

#### (12) 특허협력조약에 의하여 공개된 국제출원

## 정정판

(19) 세계지식재산권기구  
국제사무국



(43) 국제공개일  
2012년 6월 14일 (14.06.2012)

(10) 국제공개번호  
**WO 2012/077978 A9**

(51) <b>국제특허분류:</b>	<b>C01B 3/38 (2006.01)</b>	<b>B01J 23/04 (2006.01)</b>	<b>(YANG, Ja Hyun) [KR/KR]; 대전광역시 유성구 원촌동 (주)SK 대덕기술원, 305-712 Daejeon (KR). 정일용 (JEONG, Il Yong) [KR/KR]; 서울특별시 강서구 등촌1동 대동횡토방아파트 102동 101호, 157-031 Seoul (KR). 조대희 (CHO, Dae Hee) [KR/KR]; 대전광역시 유성구 봉산동 하늘바람휴먼시아아파트 111동 1406호, 305-763 Daejeon (KR). 김정목 (KIM, Jeong Mook) [KR/KR]; 대전광역시 유성구 천민동 365-16번지 204호, 305-810 Daejeon (KR). 김옥윤 (KIM, Ok Youn) [KR/KR]; 대전광역시 유성구 판평동 신동아파밀리에 503동 1503호, 305-745 Daejeon (KR). 이종찬 (LEE, Jong Chan) [KR/KR]; 대전광역시 유성구 판평동 672번지 대덕테크노밸리 6단지 601동 1001호, 305-746 Daejeon (KR). 김규태 (KIM, Gyoo Tae) [KR/KR]; 대전광역시 유성구 전민동 엑스포아파트 503동 1301호, 305-762 Daejeon (KR). 박삼룡 (PARK, Sam Ryong) [KR/KR]; 대전광역시 유성구 도룡동 스마트시티 201동 801호, 305-748 Daejeon (KR). 최선 (CHOI, Sun) [KR/KR]; 대전광역시 유성구 용산동 아너스빌 109동 101호, 305-550 Daejeon (KR). 오승훈 (OH, Seung Hoon) [KR/KR]; 서울특별시 강남구 도곡동 SK 리더스 뷰 1307호, 135-270 Seoul (KR). 심현민 (SHIM, Hyun Min) [KR/KR]; 대전광역시 유성구 전민동 세종아파트 103-706, 305-728 Daejeon (KR)</b>
(21) <b>국제출원번호:</b>		PCT/KR2011/009437	
(22) <b>국제출원일:</b>	2011년 12월 7일 (07.12.2011)		
(25) <b>출원언어:</b>	한국어		
(26) <b>공개언어:</b>	한국어		
(30) <b>우선권정보:</b>	10-2010-0124651 2010년 12월 8일 (08.12.2010) KR 10-2011-0129125 2011년 12월 5일 (05.12.2011) KR		
(71) <b>출원인(US 을(를) 제외한 모든 지정국에 대하여):</b>	<b>에스케이아이노베이션 주식회사 (SK INNOVATION CO.,LTD.) [KR/KR]; 서울특별시 종로구 서린동 99, 110-110 Seoul (KR). 박주원 (PARK, Joo Won) [KR/KR]; 대전광역시 서구 갈마1동 859번지 대명빌리 301호, 302-171 Daejeon (KR).</b>		
(72) <b>발명자; 겸</b>			
(75) <b>발명자/출원인(US 에 한하여):</b>	<b>김진홍 (KIM, Jin Hong) [KR/KR]; 대전광역시 서구 가장동 삼성나루매아파트 103-2004, 302-726 Daejeon (KR). 양자현</b>		


[다음 쪽 계속]

---

(54) Title: GASIFICATION METHOD FOR REDUCING EMISSION OF CARBON DIOXIDE

(54) 발명의 명칭 : 이산화탄소의 배출이 저감된 가스화 방법

[Fig. 1]

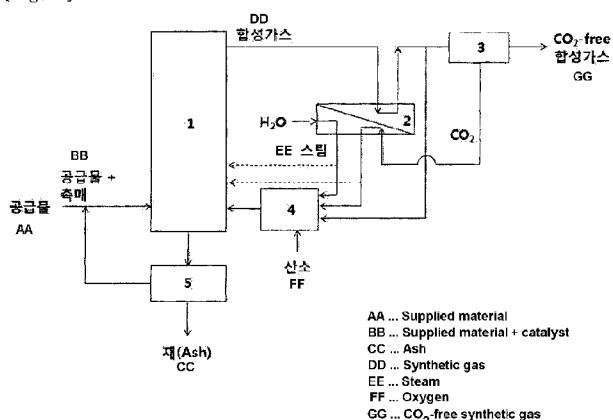

**(57) Abstract:** The present invention relates to a method for gasifying a carbon-containing material, comprising the following steps: (a) permitting the carbon-containing material to react to steam in the presence of a catalyst so as to generate synthetic gas containing hydrogen, carbon monoxide, carbon dioxide, etc.; (b) applying a portion of the synthesis gas obtained in step (a) to a combustion process, and/or separating hydrogen and carbon monoxide from the synthetic gas to generate carbon dioxide rich gas; and (c) re-circulating the carbon dioxide rich gas generated in step (b) to step (a). The method of the present invention eliminates the necessity of separating or collecting and storing carbon dioxide for reducing carbon dioxide, thus minimizing costs for constructing a special device and facility for the separation or collecting and storage of the carbon dioxide.

### (57) 유약서

[다음 쪽 계속]

# WO 2012/077978 A9

ZM, ZW), 유라시아 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 유럽 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## 공개:

- 국제조사보고서와 함께 (조약 제 21 조(3))
- 규칙 91.3(b) 규정에 의한 명백한 잘못의 정정 허가에 관한 정보와 함께 (규칙 48.2(i))

(88) 국제조사보고서 공개일: 2012년 8월 2일

(48) 본 정정판 공개일: 2012년 9월 27일

(15) 정정사항에 관한 정보:  
2012년 9월 27일 자 공지 참조

(74) 대리인: 권오식 (KWON, Oh-Sig) 등; 대전광역시 서구 둔산동 921 주은리더스텔 4층, 302-120 Daejeon (KR).

(81) 저정국 (별도의 표시가 없는 한, 가능한 모든 종류의 국내 권리의 보호를 위하여): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) 저정국 (별도의 표시가 없는 한, 가능한 모든 종류의 국내 권리의 보호를 위하여): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG,

---

본 발명은 (a) 촉매의 존재 하에 처리 대상 탄소 함유 물질을 스텝과 반응시켜 수소, 일산화탄소 및 이산화탄소 등을 포함하는 휘성가스를 생성시키는 단계; (b) 상기 단계 (a)에서 수득된 휘성가스 일부를 연소공정에 도입하거나, 및/또는 휘성가스로부터 수소와 일산화탄소를 분리하여 이산화탄소 풍부 가스(carbon dioxide rich gas)를 생성시키는 단계; 및 (c) 상기 단계 (b)로부터의 이산화탄소 풍부 가스를 상기 단계 (a)로 재순환시키는 단계를 포함하는 것을 특징으로 하는 탄소 함유 물질의 가스화 방법을 제공하여 이산화탄소의 저감을 위해 이산화탄소를 분리 또는 포집 및 저장하는 방법이 필요가 없어 이를 위한 별도의 장치 및 설비를 구성하는데 필요한 내용을 최소화할 수 있는 장점이 있다.

## 【DESCRIPTION】

## 【Invention Title】

GASIFICATION METHOD FOR REDUCING EMISSION OF CARBON DIOXIDE

## 5   【Technical Field】

[1] The present invention relates to a gasification method of a carbon-containing material such as coal, biomass or petroleum coke, and more particularly, to a gasification method capable of increasing a gasification rate and reducing an amount of carbon dioxide to be generated by using a catalyst at a low temperature.

## 【Background Art】

[2] With the rapid development of the society since the 20th century, an energy supply and demand system has become unstable and environmental problems such as global warming have increased. An attempt to use fossil energy by an environmentally friendly method along with a study on fuels that do not cause environmental pollution has been actively conducted. Particularly, compared to the direct combustion of coal which causes serious environmental pollution, attempts to convert coal into a gas fuel form such as a syngas has been tried continuously (referred to as "gasification").

25           [3] In other words, the term "gasification" means




that solid or liquid fuel which basically contains carbon such as coal, petroleum coke, and biomass is reacted with gas such as oxygen, steam, carbon dioxide, and hydrogen to produce combustible gases such as CO, H<sub>2</sub> and CH<sub>4</sub>. The 5 process is performed primarily at a high temperature and high pressure in order to maximize capacity and efficiency of a gasification treatment. The resultant combustible gases are used as a plant fuel gas, as chemicals or synthetic petroleum through a methanol synthesis process, 10 an NH<sub>3</sub> synthesis process and a Fischer-Tropsch synthesis process, or as a hydrogen generation source for a hydro-desulphurisation process and a hydrocracking process of crude oil by maximizing hydrogen production.

[4] Common gasification systems produce a syngas by 15 reacting coal or other carbon-containing materials with steam and oxygen (or air). The "syngas" of the present invention is mainly formed of hydrogen and carbon monoxide, but the present invention is not limited thereto, and may 20 additionally include components such as carbon dioxide and methane.

[5] FIG. 3 schematically shows the conventional gasification process.


[6] Referring to FIG. 3, H<sub>2</sub>O, oxygen and a carbon-containing material (for example, coal, petroleum coke, 25 biomass, and the like) are introduced to a gasifier. The

carbon-containing material introduced to a gasifier is reacted with  $H_2O$  and oxygen both with a kind of catalysts and without catalysts, thus generating a product containing  $H_2$ ,  $CO$ ,  $CO_2$ , and the like. Then, the following main 5 reactions occur in the gasifier.



[10] The product thus generated in the gasifier is 10 subjected to a removal process of particular materials,  $Hg$ , and  $NO_x$ , and then an acidic gas removal process of  $H_2S$  and  $CO_2$ . Subsequently, the resultant gas is selectively used for Fischer-Tropsch (F-T) reaction or MeOH reaction through the following water gas shift reaction, or may be used 15 without changing excess  $H_2$ .


[11] <water gas shift reaction>



[13] <Fischer-Tropsch (F-T) reaction>



20 [15] <Methanol synthesis>



[17] When a common steam/oxygen gasifier is used, 25 since the carbon gasification reaction ( $C + H_2O \rightarrow H_2 + CO$  or  $C + CO_2 \rightarrow 2CO$ ) is a very strong endothermic reaction, the corresponding heating value should be provided by the

carbon combustion reaction ( $C + O_2 \rightarrow CO_2$ ). Therefore, a portion of hydrocarbon used as raw materials is converted into carbon dioxide in or out of the gasifier, after the combustion reaction. After the gasification, the syngas generated from the gasifier need to have a  $H_2/CO$  ratio of 2, which is stoichiometrically required in order that F-T synthesis or methanol generation is performed through the water gas shift reaction. In this case, it is calculated that the total process has a theoretical carbon efficiency of less than 49.8% and has a  $CO_2$  generation amount of 0.502 mol  $CO_2$ /mol C or more. Then, carbon efficiency is defined as follows.

[18] Carbon efficiency (%) = (the sum of the mole number of carbon monoxide and the mole number of methane in syngas having a  $H_2/CO$  of 2 to 2.1)  $\times$  100/mole number of carbon in raw materials introduced for gasification

[19] [Table 1]

[20]

Gasification reaction	$1.0C + 1.0H_2O \rightarrow 1.0H_2 + 1.0CO$
Combustion reaction	$0.34C + 0.34 O_2 \rightarrow 0.34CO_2$
Water gas shift reaction	$0.33CO + 0.33H_2O \rightarrow 0.33H_2 + 0.33CO_2$
Entire reaction	$1.34C + 1.33H_2O + 0.34O_2 \rightarrow 1.33H_2 + 0.67CO + 0.67CO_2$

[21] Such low carbon efficiency reduces economic efficiency of a Coal-to-Liquids (CTL) process, or the like. Further, in order to reduce  $CO_2$  that is a greenhouse gas,

additional facilities are required, high costs are required to collect and store carbon, and it is difficult to construct commercial plants with economic efficiency.

[22] Korean patent Laid-open Publication No. 10-2008-0041635 discloses an alkaline metal catalytic steam gasification method which uses CO<sub>2</sub> trapping materials and/or mineral binder materials in a gas generation apparatus. The Patent Document discloses CO<sub>2</sub> trapping materials for converting CO<sub>2</sub> into solid carbonate or bicarbonate in order to improve catalyst activity. However, CO<sub>2</sub> may not be converted into substantially available materials such as CO. Further, there are problems where this Patent Document is limited to the specific catalyst and should additionally include CO<sub>2</sub> trapping materials such as CaO.

#### **[Disclosure]**

#### **[Technical Problem]**

[23] The present inventors found that, there is no net generation of carbon dioxide, and efficiency of gasification process is increased, when the amount of carbon dioxide consumed by the C-CO<sub>2</sub> reaction is equal to the sum of the amount of carbon dioxide produced during the combustion of syngases and the amount of carbon dioxide produced by the water gas shift reaction. Thus, the

present invention was accomplished.

[24] Therefore, an object of the present invention is to provide a gasification method of carbon-containing materials, which may reduce a CO<sub>2</sub> generation amount, as well as achieve high carbon efficiency from carbon-containing materials such as coal, petroleum coke, and biomass at a low temperature.

#### 【Technical Solution】

[25] In one general aspect, a gasification method of carbon-containing materials includes:

[26] (a) reacting carbon-containing materials to be treated under the presence of a catalyst with steam to produce a syngas containing hydrogen, carbon monoxide and carbon dioxide;

[27] (b) generating a carbon dioxide rich gas including at least one selected from i) introducing a portion of the syngas that has been produced in step (a) into the combustion process, and

[28] ii) separating hydrogen and carbon monoxide from the syngas produced in step (a); and

[30] (c) recycling, to step (a), the carbon dioxide rich gas that has been produced in step (b).

[32] Examples of the catalysts that may be used in step (a) include general catalysts that may be used for the

gasification reaction of carbon-containing materials, and preferably transition metal catalysts, or catalysts containing alkaline metals or alkaline earth metals. Examples of the alkaline metal components that may be used 5 include Li, Na, K, Rb, Cs, Fr, and the like. Examples of the alkaline earth metal components that may be used include Mg, Ca, and the like. Examples of the transition metal catalysts that may be used include Fe, Ni, Co, Cu, Zn, and the like. The present invention is not limited thereto. 10 Other metal components which is suitable to the object of the present invention may be used, which is evident to those skilled in the art.

[33] Furthermore, the catalyst which may be used includes one or a mixture of at least two, of hydrates, 15 oxides, and metal salts of the metal. In addition, the metal may be mixed with general gasification reaction catalysts.

[34] The carbon-containing materials to be treated in step (a) may be used without limitation as long as they may 20 be a material which is suitable to the object of the present invention. Typical examples thereof include coal, biomass, coke, or the like, but the present invention are not limited thereto.

[35] Furthermore, in order to generate the carbon 25 dioxide rich gas in step (b), one selected from introducing

a portion of the syngas that has been produced in step (a) to the combustion process and separating hydrogen and carbon monoxide from the syngas may be used, or two processes thereof may be used at the same time. A portion 5 of the syngas that has been produced in step (b) is introduced to the combustion process and thereby a heating value which is required for the gasification of carbon-containing materials according to the present invention may be supplied.

10 [36] A combustion method includes general flame combustion, catalyst combustion, and the like. In order to control conditions at the time of introduction to a gasifier, methods such as Chemical Looping Combustion may be used. Two or more combustion methods may be combined 15 for a higher effect.

[37]

[38] According to a preferable specific example of the present invention, the present invention may further include:

20 [39] (d) separating carbon dioxide from the syngas that has not been introduced at the time of the combustion process in step (b).

[40] Further, the present invention may further include:

25 [41] (e) recycling, to step (a), the carbon dioxide

that has been separated in step (d); or

[42] (f) recycling, to the combustion process of step (b), the carbon dioxide that has been separated in step (d).

[43]

5 [44] According to a preferable specific example of the present invention, the present invention may further include separating and recovering the catalyst used for the purpose of gasification. The catalyst may be separated and recovered at any time during the gasification according to  
10 the present invention, if necessary.

[45] The catalyst recovery is performed such that effective catalyst components are recovered in liquid or solid state from the mixture of catalyst and ash. Specifically, during or after the completion of  
15 gasification in a gasifier, the catalyst may be recovered from the mixture of catalyst and ash emitted from the lower portion of the gasifier; or from the entrainment material in gas flow, by using an apparatus separately provided or integrally equipped with the gasifier.

20

#### **【Advantageous Effects】**

[46] By the gasification method of the invention, a gasification method in which carbon dioxide that is a greenhouse gas is not generated may be implemented. Also,  
25 carbon efficiency may be maximized, when chemicals such as

methanol or production of synthetic oil are produced through the consecutive Fischer-Tropsch process after the gasification, and thus economic efficiency of the entire process may be improved.

5 [47] Further, the existing gasification process needs Carbon Capture & Storage (CCS) or separation for reducing carbon dioxide because about 50% is emitted as carbon dioxide, with respect to the carbon included in raw materials. Therefore, huge costs are required for the  
10 practical use thereof.

[48] When the gasification method for reducing emission of carbon dioxide of the present invention is used, costs for constructing a separate apparatus and facility for carbon dioxide capture and storage may be minimized,  
15 and thus the gasification process may be constructed economically.

#### 【Description of Drawings】

The above and other objects, features and advantages  
20 of the present invention will become apparent from the following description of preferred embodiments given in conjunction with the accompanying drawings, in which:

[49] FIG. 1 shows the process of a gasification method according to a preferable specific example of the  
25 present invention;

[50] FIGS. 2a and 2b show graphs showing a composition example of the syngas emitted from a gasifier, FIG. 2a is a graph showing the composition of the syngas at the time of steam-carbon dioxide gasification with use of a catalyst, and FIG. 2b is a graph showing the composition of the syngas at the time of steam-carbon dioxide gasification of lignite without use of a catalyst;

[51] FIG. 3 shows a general process of high temperature steam-oxygen gasification; and

10 [52] FIG. 4 shows a general CTL process made of a high temperature steam-oxygen gasifier.

#### 【Best Mode】

[53] Hereinafter, the present invention will be described in detail with reference to the accompanying exemplary drawings and the following reaction formulae. However, exemplified drawings are only described to easily comprehend the present invention. Also, the scope of the present invention is not limited to those illustrated in 20 the drawings, which is evident to those skilled in the art.



[54] The present invention basically includes separating and recycling carbon dioxide after gasification using a catalyst, which promotes the C-CO<sub>2</sub> gasification reaction in a gasifier.

25 [55] The gasification method according to the present

invention discloses (a) reacting carbon-containing materials to be treated, such as coal, petroleum coke, biomass, and the like under the presence of a catalyst with steam to produce a syngas containing hydrogen, carbon monoxide and carbon dioxide.

[56] Additionally for the gasification, as shown in FIG. 1, coal, petroleum coke, biomass, and the like along with a catalyst are added to a gasifier 1.

[57] Then, the following reactions are carried out in the gasifier 1:



[62] The reactions in the gasifier 1 result in production of a syngas containing hydrogen, carbon monoxide and carbon dioxide. Regardless of the steam gasification reaction, the reaction rate of the C-CO<sub>2</sub> reaction known as a carbon dioxide gasification reaction is generally slower than that of the steam gasification reaction at a low temperature. A catalyst is used to supplement the slower reaction rate of CO<sub>2</sub> reaction. Then, the catalyst that may be used in the present invention may include general catalysts that may be used for the gasification reaction of carbon-containing materials, and preferably include

catalysts containing alkaline metals or alkaline earth metals. Examples of the alkaline metal components that may be used include Li, Na, K, Rb, Cs, Fr, and the like. Examples of the alkaline earth metals that may be used include Mg, Ca, and the like. Furthermore, the catalyst which may be used includes one or a mixture of at least two, of hydrates, oxides, and metal salts of the metal. In addition, the metal may be mixed with general gasification reaction catalysts.



10 [63] The gasification may be preferably performed at a temperature of 750 to 850°C.

15 [64] As shown in FIG. 1, the syngas generated from the gasifier 1 is subjected to separation of carbon dioxide from the syngas containing H<sub>2</sub> and carbon monoxide in a CO<sub>2</sub> separation section 3.

20 [65] As shown in FIG. 1, the carbon dioxide thus separated may be recycled to a recycled line and supplied directly to the gasifier 1, or may be supplied to a catalytic combustion section 4 along with a portion of the syngas which has been emitted from the gasifier 1 and recycled to the recycled line. Then, the syngas that has been emitted from the gasifier 1 and recycled is burned in the catalytic combustion section 4, and thus a heating value required for the reaction, steam and carbon dioxide 25 are supplied.

[66]

[67] The main reaction formulae are as follows:



5 [70] The carbon dioxide that has been produced by the combustion of carbon monoxide is converted into carbon monoxide through the C-CO<sub>2</sub> reaction in the gasifier 1, a portion of the generated carbon monoxide is converted into hydrogen and carbon dioxide through the water gas shift reaction. During this process, when the amount of carbon dioxide consumed by the C-CO<sub>2</sub> reaction is equal to the sum 10 of the amount of carbon dioxide produced during the combustion of the syngases and the amount of carbon dioxide produced by the water gas shift reaction, there is no net generation of carbon dioxide, and therefore efficiency of 15 gasification process is increased. Additionally, the carbon dioxide that has been recycled and steam that has been supplied to the gasifier 1 are allowed to increase a partial pressure of carbon dioxide and a partial pressure 20 of steam as a gasification agent, which serves to promote the gasification reaction with steam and the gasification reaction with carbon dioxide.

25 [71] FIG. 2 shows the composition of the syngas generated by the steam-carbon dioxide gasification of lignite containing 10 wt% of a K<sub>2</sub>CO<sub>3</sub> catalyst and catalyst-


free lignite. The composition of the syngas proceeded at the temperature of 800°C, the atmospheric pressure and the gage pressure of 1 Kg<sub>f</sub>/cm<sup>2</sup>. Then, a partial pressure of steam was about 0.36 Kg<sub>f</sub>/cm<sup>2</sup> and a partial pressure of 5 carbon dioxide was 0.19 Kg<sub>f</sub>/cm<sup>2</sup>. When the catalyst is used as shown in FIG. 2a, carbon dioxide is converted into carbon monoxide by reaction with the carbon of coal, whereas carbon monoxide is not almost produced by the C-CO<sub>2</sub> reaction at the time of the gasification of catalyst-free 10 coal. The effect is not limited to a K<sub>2</sub>CO<sub>3</sub> catalyst.

[72] The catalyst that has been subjected to gasification is recovered, and is supplied to the gasifier 1 again along with carbon-containing materials.

[73] Hereinafter, the present invention will be 15 described with reference to the Examples. However, the following Examples will be provided for description, but the invention is not limited thereto.

[74] [Comparative Example] Heat Efficiency of General  
Steam-Oxygen Gasification Method

[75] A stoichiometric formula of the steam 20 gasification reaction to 1g-mol of bituminous coal, calculated from the composition of the syngas generated from a GE-TEXACO gasifier [see DOE/NETL-2008/1331] is as follows:



0.23CO<sub>2</sub>

[77] In this case, the maximum theoretical heat efficiency calculated using the following formula is about 70%. On the other hand, 0.23 mol of carbon dioxide is emitted per 1g-mol of the carbon included in bituminous coal, and therefore 77% of the carbon may be used effectively.

[78] Heat efficiency (%) = [(mole number of H<sub>2</sub> × unit heating value of H<sub>2</sub>) + (mole number of CO × unit heating value of CO) × 100 (%)/[g-mol of coal × unit heating value of coal]

[79] Then, a unit heating value of g-mol of coal was calculated by the enthalpy of a reaction in which carbon and hydrogen are burned to produce carbon dioxide and water.

15 [80] Example 1] Heat Efficiency Improvement by the Present Invention

[81] When the C-CO<sub>2</sub> gasification reaction proceeded by 1, the steam gasification reaction proceeded by 0.6 with respect to 1 g-mol of lignite, and 15 % of the carbon monoxide produced by the gasification reaction is converted into hydrogen and carbon dioxide by the water gas shift reaction, the total stoichiometric formula is as follows. Then, a heat of reaction required for gasification is supplied by the combustion of the produced syngas.

25 [82] CH<sub>0.8</sub>O<sub>0.2</sub> + 0.38H<sub>2</sub>O + 0.22O<sub>2</sub> → 0.78H<sub>2</sub> + 1.00CO + (-

0.001CO<sub>2</sub>)

[83] In this case, the heat efficiency calculated using the calculation equation of heat efficiency is about 96%.

5 [84] The Air Separation Unit (ASU) that separates oxygen from air and supplied to a gasifier has a very large effect on heat efficiency of the entire gasification process. A supplied oxygen amount according to the gasification method described in the present Example 10 corresponds to about 44%, compared to Comparative Example 1, and thus energy supplied for ASU operation is considerably low. Further, in a general gasifier, a heat of reaction required for gasification is supplied by the combustion of coal that is a solid state, whereas a heat of reaction 15 required for gasification is supplied by burning the syngas that is a gas state in the present invention, thus obtaining high combustion efficiency. The effect obtained from the present invention may be further improved by using a catalyst at the time of burning the syngas. In other 20 words, combustion of the syngas is performed by using a catalyst, and thereby it is expected that a ratio of oxygen to fuel may be minimized.

[85] [Table 2]

[86]

	Comparative Example 1	Example 1	Efficiency increase (%)
Heat efficiency (%)	70	96	37.7
Carbon efficiency (%)	77	100	29.9

[87] [Example 2] In the case of setting a ratio of hydrogen to carbon monoxide in syngas to 2

[88] After the gasification of coal, when synthetic oil was produced through the F-T reaction or methanol was produced, a ratio of hydrogen to carbon monoxide that is required is 2 to 1.

[89] Fischer-Tropsch reaction  $n\text{CO} + 2n\text{H}_2 \rightarrow (\text{CH}_2)_n + n\text{H}_2\text{O}$

[90] Methanol synthesis reaction  $n\text{CO} + 2n\text{H}_2 \rightarrow n\text{CH}_3\text{OH}$


[91] With respect to the syngas produced by the gasification, a ratio of hydrogen to carbon monoxide may be controlled by the water gas shift reaction. The syngas produced through a GE-TEXACO gasifier of Comparative Example 1 is converted such that a ratio of hydrogen to carbon monoxide is 2 to 1 through the water gas shift reaction.

[92]  $\text{CH}_{0.9}\text{O}_{0.1} + 0.1\text{H}_2\text{O} + 0.5\text{O}_2 \rightarrow 0.88\text{H}_2 + 0.44\text{CO} + 0.56\text{CO}_2$

[93] In the present invention, the water gas shift reaction is performed in a gasifier, and thereby an

additional reactor is not needed. Then, the steam gasification reaction and the C-CO<sub>2</sub> gasification reaction are preferably carried out by about 1 to 0.33, respectively. About 39% is converted into hydrogen and carbon dioxide 5 through the water gas shift reaction, with respect to the total amount of carbon monoxide produced by the gasification reaction.

[94] Then, a theoretical formula is as follows:



10 0.39CO<sub>2</sub>

[96] Heat efficiency, carbon efficiency and reduced amount of the generated carbon dioxide improved by the present invention was shown in Table 3

[97] [Table 3]

15 [98]

	After water gas shift reaction of Comparative Example 1	Example 2	Efficiency increase / generation amount decrease (%)
Heat efficiency (%)	67.2	95.4	42.1
Carbon efficiency (%)	44	61	38.9
CO <sub>2</sub> generation amount (%)	56	39	30.5

[99]

[100] As described in Examples 1 and 2, the carbon efficiency improved by the present invention may 20 significantly reduce an amount of raw materials such as

coal to be used. Thus, the cost of raw materials, the apparatus cost and operation cost for drying, grinding, transfer and storage of raw material (coal) may be reduced significantly. Also, the ASU apparatus cost and operation 5 cost may be improved by 50% or more through catalytic combustion of the syngas. In addition, the amount of carbon dioxide to be emitted is reduced significantly, the used energy amount and costs of apparatus such as a CO<sub>2</sub> separation process, for example, an amine absorption 10 process are improved significantly, and therefore economic efficiency of the entire process may be further improved.

**【CLAIMS】****【Claim 1】**

A gasification method of a carbon-containing material, the method comprising:

5 (a) reacting a carbon-containing material to be treated under the presence of a catalyst with steam to produce a syngas containing hydrogen, carbon monoxide and carbon dioxide;

10 (b) generating a carbon dioxide rich gas including at least one selected from i) introducing a portion of the syngas that has been produced in step (a) into a combustion process, and

ii) separating hydrogen and carbon monoxide from the syngas produced in step (a); and

15 (c) recycling, to step (a), the carbon dioxide rich gas that has produced in step (b).

**【Claim 2】**

The gasification method of a carbon-containing material of claim 1, further comprising: (d) separating carbon dioxide from the syngas that has not been introduced to the combustion process in step (b).

**【Claim 3】**

25 The gasification method of a carbon-containing

material of claim 2, further comprising: (e) recycling, to step (a), the carbon dioxide that has been separated in step (d).

5       **[Claim 4]**

The gasification method of a carbon-containing material of claim 2, further comprising: (f) recycling, to the combustion process of step (b), the carbon dioxide that has been separated in step (d).

10

**[Claim 5]**

The gasification method of a carbon-containing material of claim 1, wherein the catalyst includes transition metal catalysts, or catalysts containing 15 alkaline metals or alkaline earth metals.

**[Claim 6]**

The gasification method of a carbon-containing material of claim 5, wherein a metal component included in 20 the catalyst is one or a mixture of at least two, selected from the group consisting of Li, Na, K, Rb, Cs, Fr, Mg, Ca, Fe, Ni, Co, Cu and Zn

**[Claim 7]**

25       The gasification method of a carbon-containing

material of claim 5, wherein the catalyst is a  $K_2CO_3$  catalyst.

**[Claim 8]**

5 The gasification method of a carbon-containing material of claim 1, wherein the carbon-containing material is coal, biomass, or coke.

FIG. 1

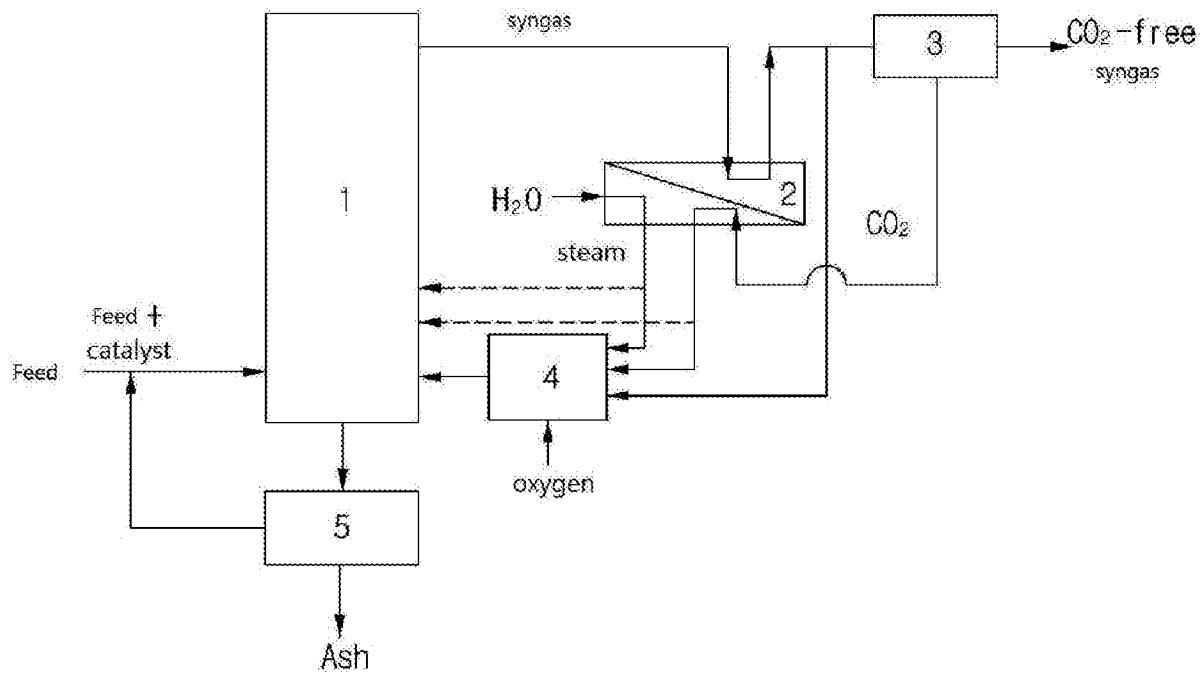


FIG. 2a



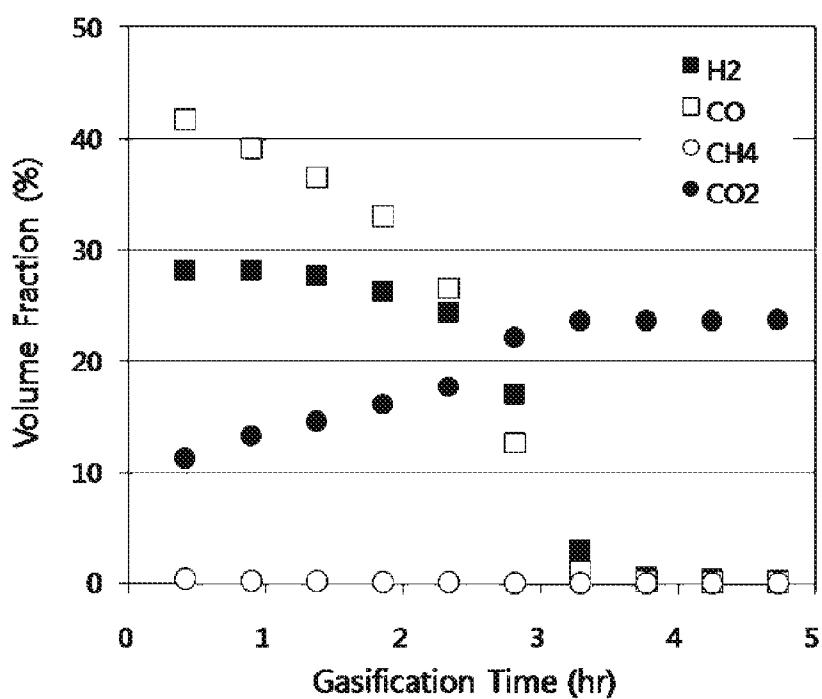


FIG. 2b

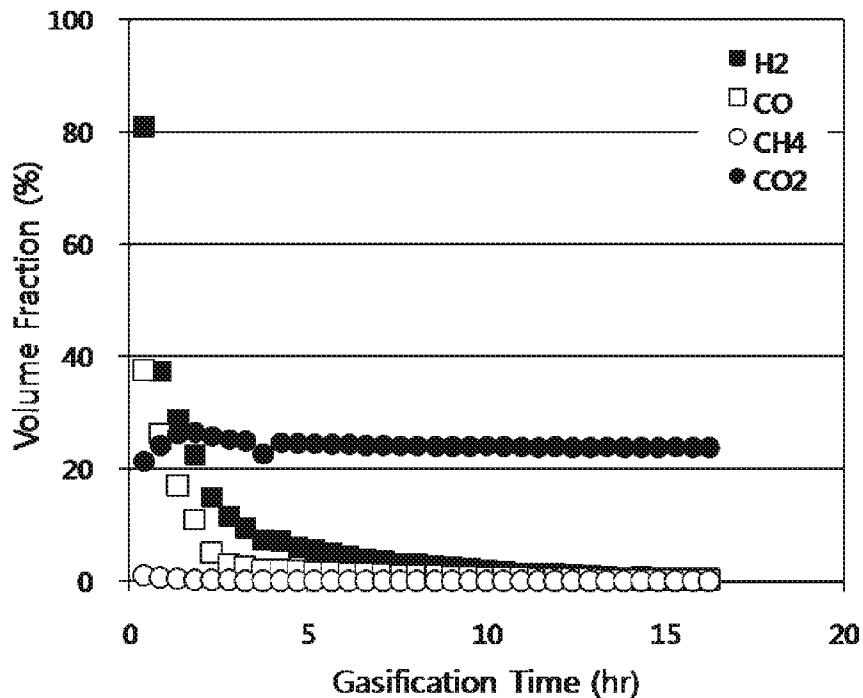

5

FIG. 3

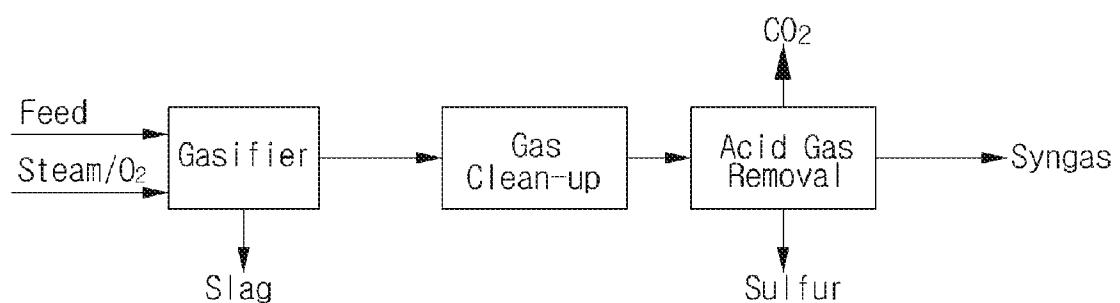

10

FIG. 4

