



(86) Date de dépôt PCT/PCT Filing Date: 2002/04/02
(87) Date publication PCT/PCT Publication Date: 2002/10/17
(45) Date de délivrance/Issue Date: 2013/01/08
(85) Entrée phase nationale/National Entry: 2003/10/01
(86) N° demande PCT/PCT Application No.: US 2002/010254
(87) N° publication PCT/PCT Publication No.: 2002/082265
(30) Priorité/Priority: 2001/04/03 (US09/825,588)

(51) Cl.Int./Int.Cl. *G06F 9/445* (2006.01),
H04W 4/14 (2009.01), *H04W 88/02* (2009.01)

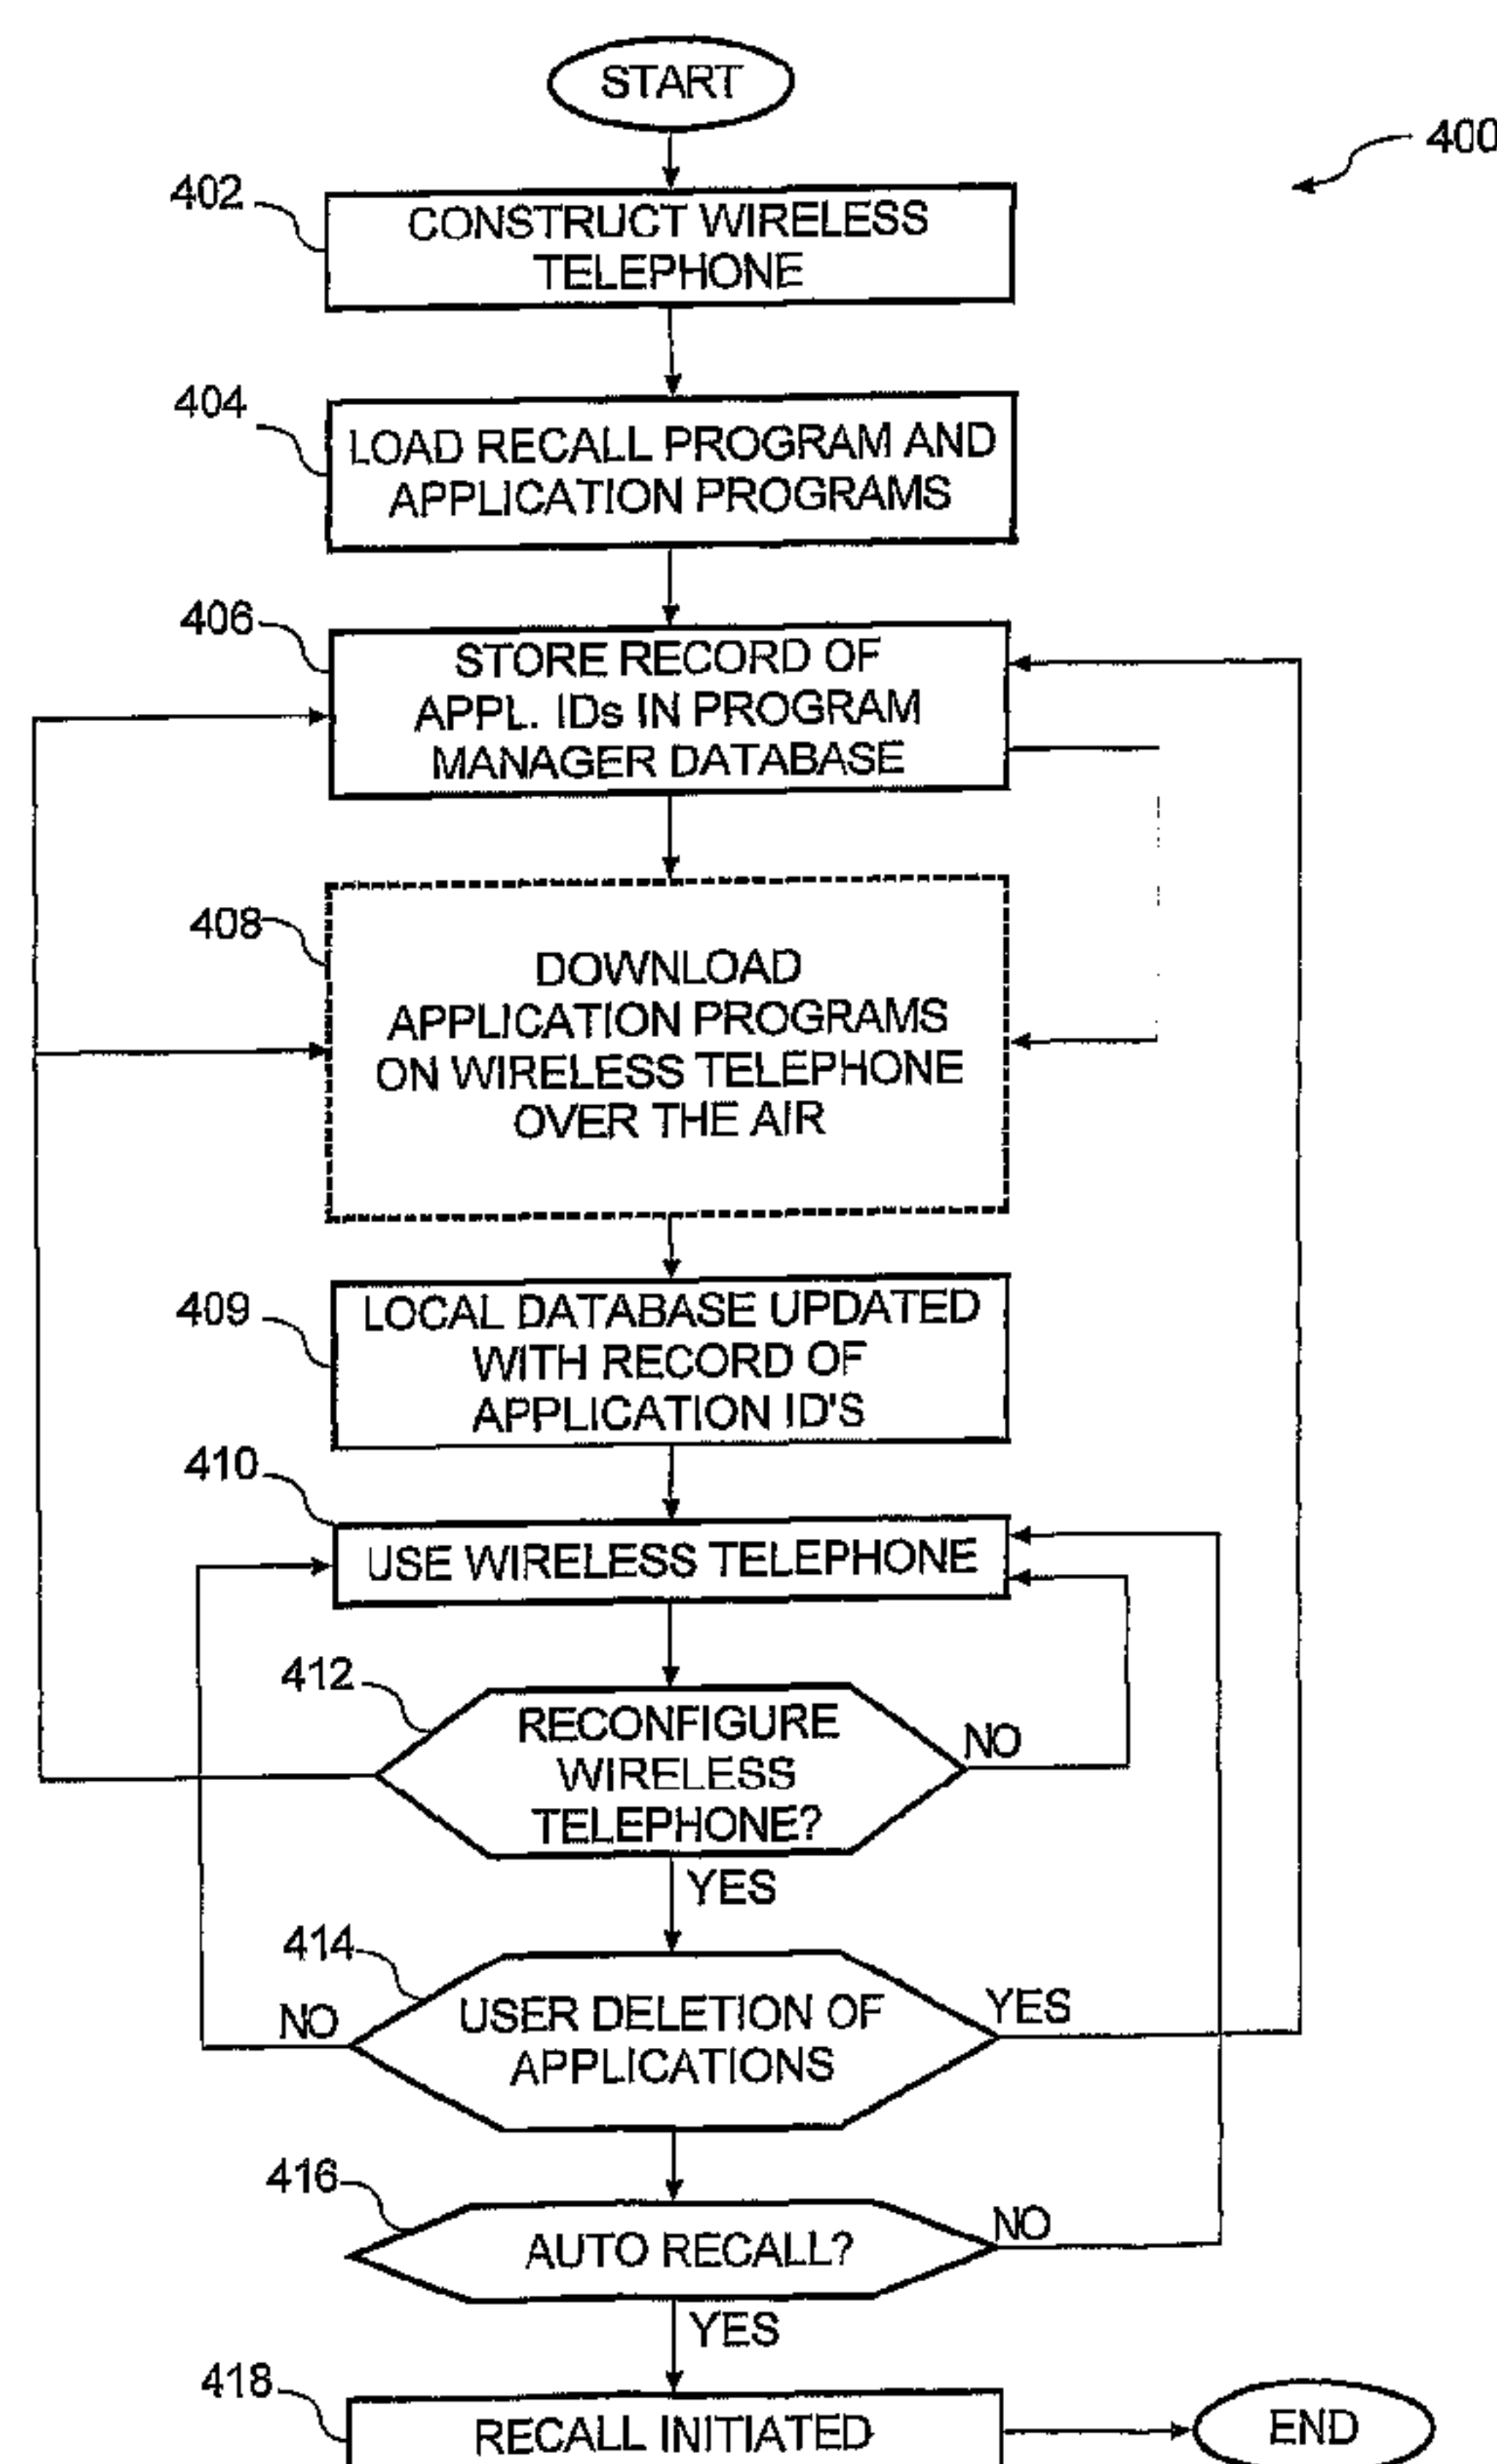
(72) Inventeurs/Inventors:
CHMAYTELLI, MAZEN, US;
MINEAR, BRIAN, US;
KENAGY, JASON, US;
JACOBS, PAUL, US

(73) Propriétaire/Owner:
QUALCOMM INCORPORATED, US

(74) Agent: SMART & BIGGAR

(54) Titre : PROCEDE ET APPAREIL POUR LA DESINSTALLATION D'UN PROGRAMME D'APPLICATION, INITIEE ET EFFECTUEE PAR UN RESEAU SANS FIL

(54) Title: METHOD AND APPARATUS FOR NETWORK INITIATED UNINSTALLATION OF APPLICATION PROGRAM OVER WIRELESS NETWORK



(57) Abrégé/Abstract:

Network-initiated uninstallation of programs on remote modules, such as wireless telephones, is performed over a wireless network to recall programs stored on the wireless telephone that are faulty or harmful to the wireless telephone, the wireless network, or a



(57) **Abrégé(suite)/Abstract(continued):**

user of the wireless telephone. If one or more recall criteria are met for uninstallation of a targeted application program, a recall command source constructs a recall command. A program manager, using a database containing information about each program downloaded onto each wireless telephone in the network, identifies, for the recall command source, which wireless telephones carry the targeted application program. The recall command includes a unique application identification for the targeted application program and an instruction to the wireless telephone to uninstall the targeted application program. The recall command is broadcast over the wireless network to the wireless telephones. In response to the recall command, the wireless telephone automatically uninstalls the targeted application program by executing a recall program on the wireless telephone.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
17 October 2002 (17.10.2002)

PCT

(10) International Publication Number
WO 02/082265 A2(51) International Patent Classification⁷: **G06F 9/445****KENAGY, Jason**; 3360 Dale Street, San Diego, CA 92104 (US). **JACOBS, Paul**; 9075 La Jolla Shores Lane, La Jolla, CA 92037 (US).

(21) International Application Number: PCT/US02/10254

(22) International Filing Date: 2 April 2002 (02.04.2002)

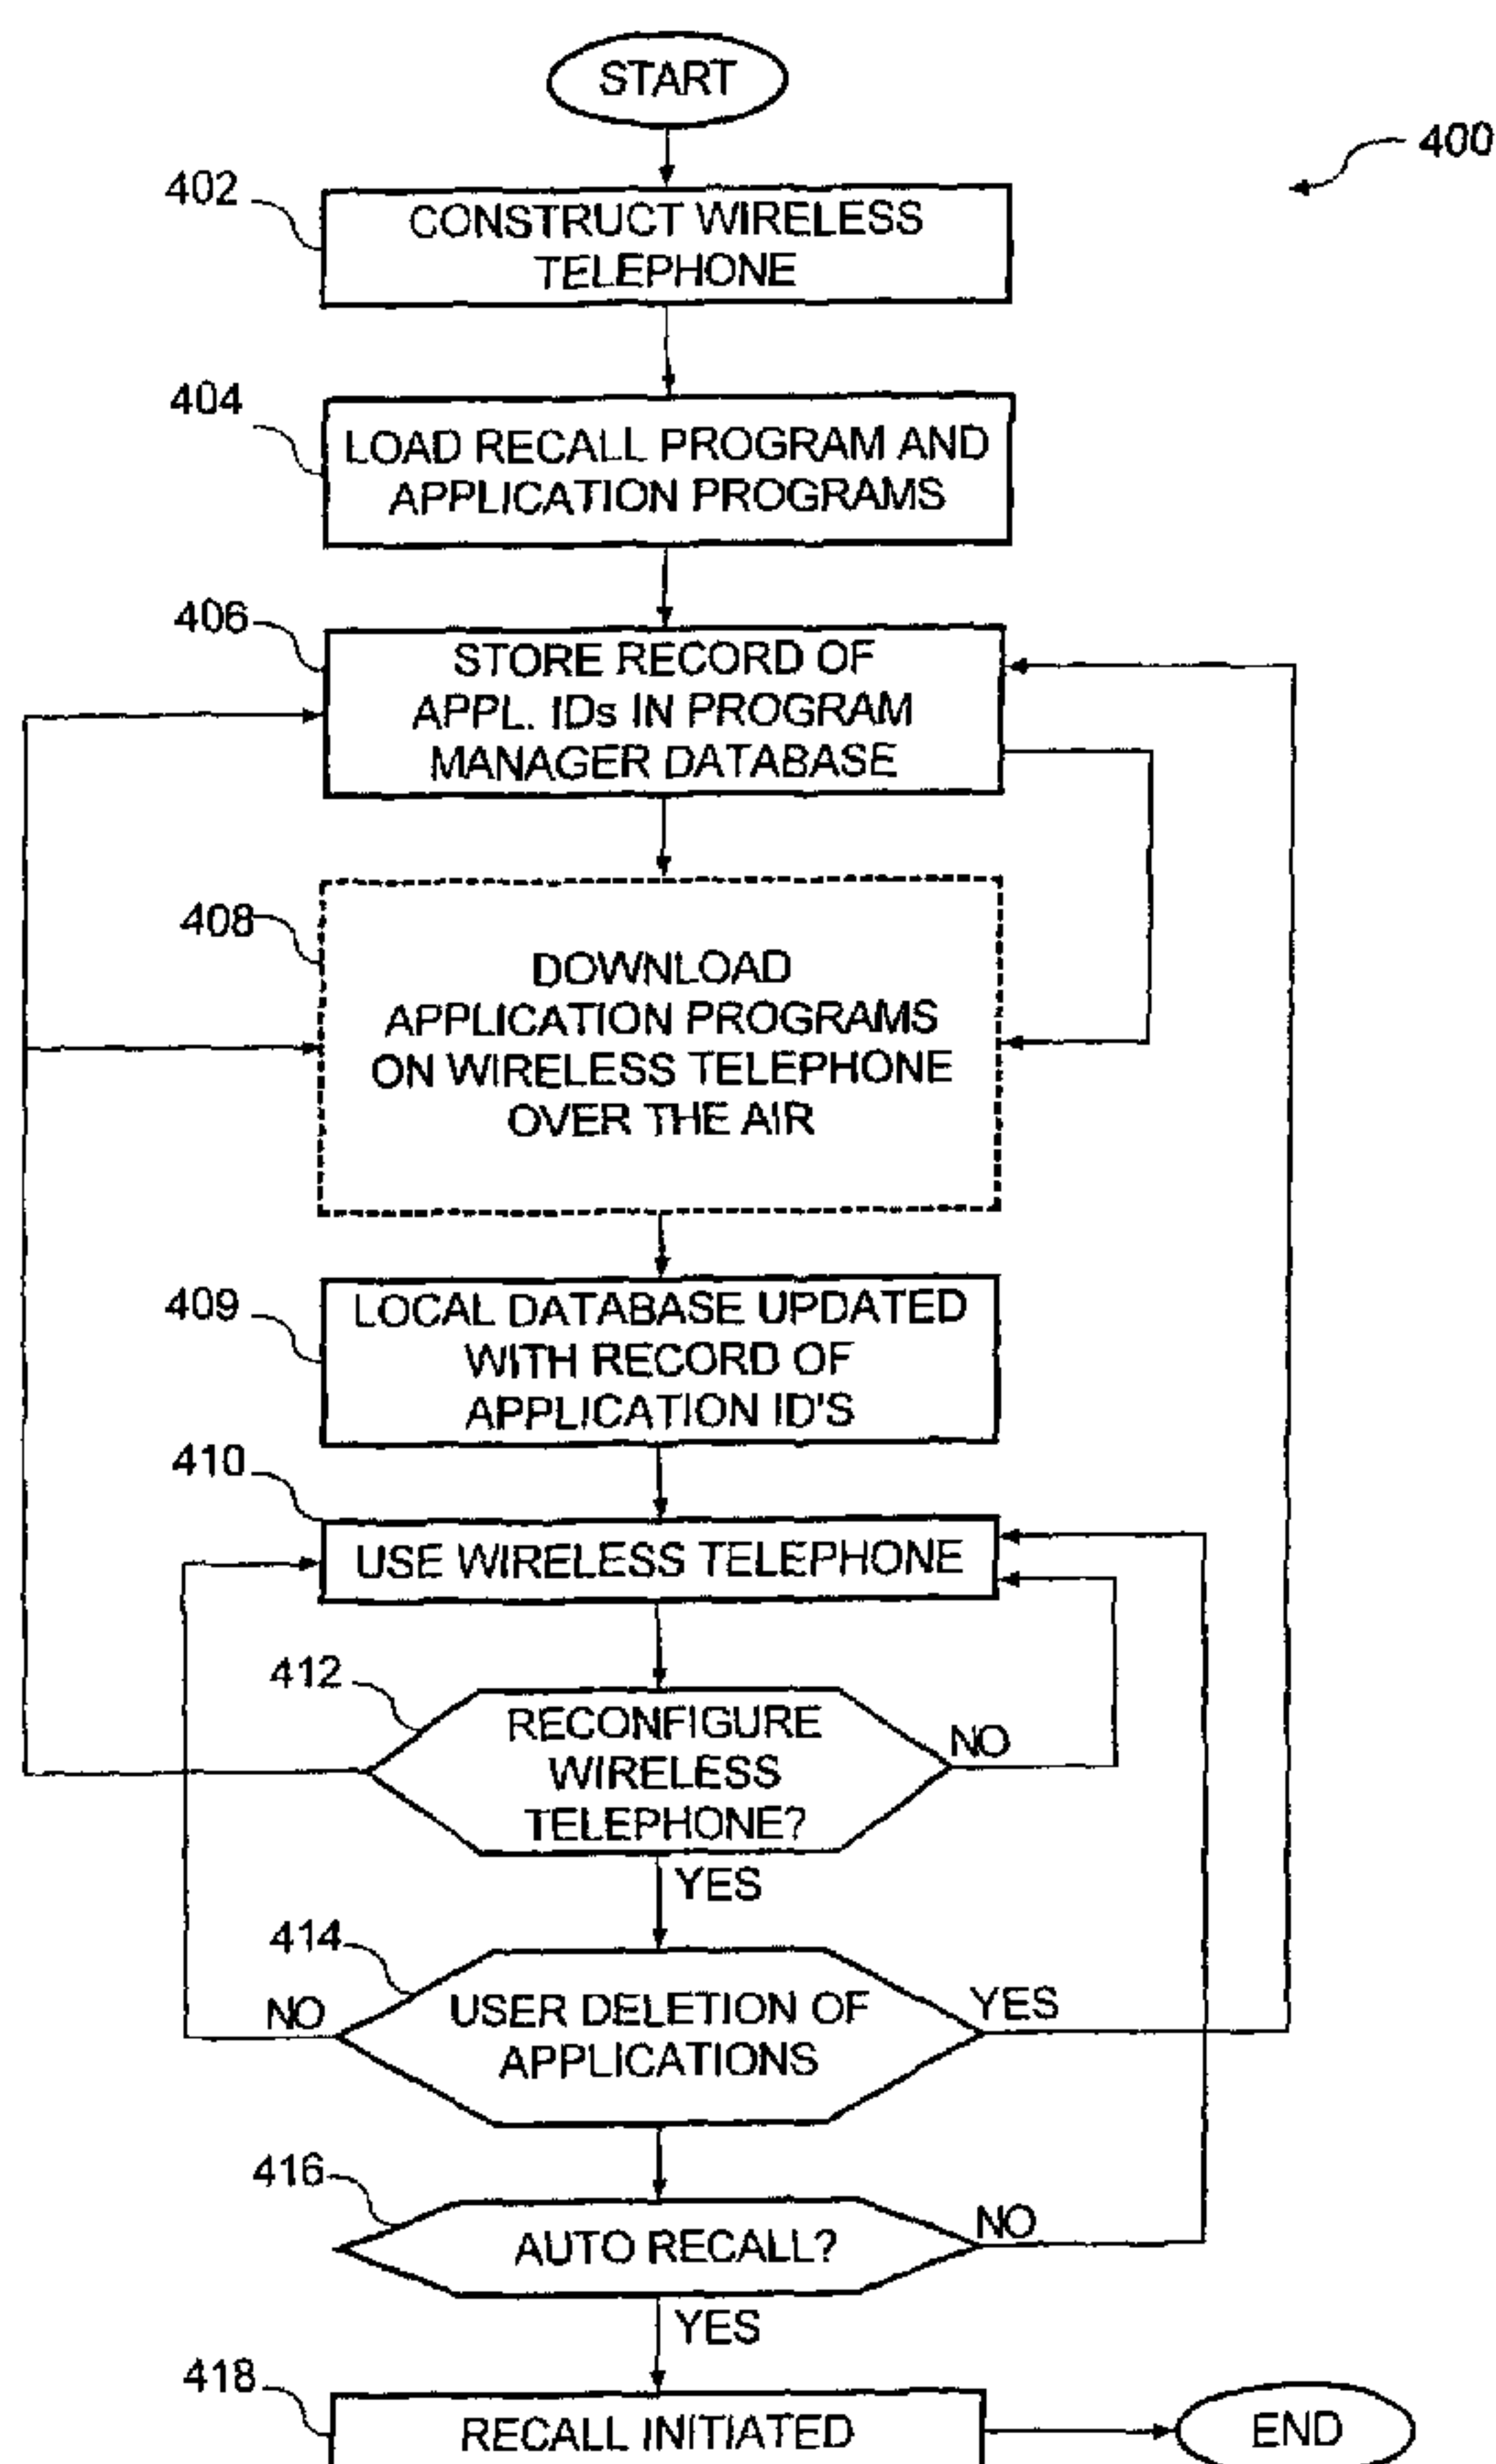
(74) **Agents: WADSWORTH, Philip, R.** et al.; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/825,588 3 April 2001 (03.04.2001) US(81) **Designated States (national)**: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.(71) **Applicant: QUALCOMM INCORPORATED** [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).(72) **Inventors: CHMAYTELLI, Mazen**; 1752 Linwood Street #6, San Diego, CA 92110 (US). **MINEAR, Brian**; 13704 Fontanelle Place, San Diego, CA 92128 (US).(84) **Designated States (regional)**: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) **Title: METHOD AND APPARATUS FOR NETWORK INITIATED UNINSTALLATION OF APPLICATION PROGRAM OVER WIRELESS NETWORK**

(57) **Abstract:** Network-initiated uninstallation of programs on remote modules, such as wireless telephones, is performed over a wireless network to recall programs stored on the wireless telephone that are faulty or harmful to the wireless telephone, the wireless network, or a user of the wireless telephone. If one or more recall criteria are met for uninstallation of a targeted application program, a recall command source constructs a recall command. A program manager, using a database containing information about each program downloaded onto each wireless telephone in the network, identifies, for the recall command source, which wireless telephones carry the targeted application program. The recall command includes a unique application identification for the targeted application program and an instruction to the wireless telephone to uninstall the targeted application program. The recall command is broadcast over the wireless network to the wireless telephones. In response to the recall command, the wireless telephone automatically uninstalls the targeted application program by executing a recall program on the wireless telephone.

WO 02/082265 A2

WO 02/082265 A2



European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

METHOD AND APPARATUS FOR NETWORK INITIATED UNINSTALLATION OF APPLICATION PROGRAM OVER WIRELESS NETWORK

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] This invention relates to the remote maintenance and deletion of programs using a wireless network. More particularly, the invention concerns a network initiated "recall" or uninstallation of targeted application programs on remote modules such as wireless telephones.

Description of the Related Art

[0002] Wireless telephones, commonly used to communicate over a wireless network, are evolving into an apparatus that provides its users with the same benefits of personal computers and hand-held personal digital assistants ("PDAs"). This transition from telephone to computer is being accomplished by the manufacturer's installation of application programming interfaces ("APIs") onto the wireless telephones. Software developers, using special software developer kits, are writing programs specifically designed to be compatible with the wireless telephones having an API.

[0003] The APIs allow users of the wireless telephones to download and operate various programs using the wireless telephones. As a result, it is anticipated that users of wireless telephones will customize their wireless telephones with programs that the user finds useful and entertaining. For example, the user may use the wireless telephone to play games, read books, get stock updates and other news information, or any other type of information or program that the user of the wireless telephone desires.

[0004] It is also anticipated that the programs will come pre-loaded at the time the wireless telephone is purchased, or the user may later request that additional programs be downloaded wirelessly over-the-air. The user of the wireless telephone also may delete programs from the wireless telephone as necessary or when desired.

74769-748

2

[0005] However, unlike traditional personal computers, wireless telephones communicate and operate over a wireless network that is used by many other people to communicate. If the wireless network crashes or is saturated, people will not be able to use the wireless telephones for their traditional and important basic function of communication.

[0006] A faulty program downloaded onto a wireless telephone may saturate the wireless network, cause the network to crash, or even pose safety risks to the user of the wireless telephone. For example, a faulty program may interfere with, or even stop, the performance of entire parts of the wireless network, including the base stations that broadcast messages to the wireless telephones. A faulty program also may cause the wireless telephones to saturate a network and prevent the routing of high priority calls, such as 911 calls. There also may be safety concerns if a faulty program caused a wireless telephone to emit radio frequencies outside of normal, safe ranges.

SUMMARY OF THE INVENTION

According to one broad aspect of the present invention, there is provided a method for a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising: booting-up the wireless device, said booting-up including initializing said wireless device for normal communications over the wireless network; after said booting-up, remotely receiving a recall command including a unique application identification for a targeted application available for execution on said computer platform of said wireless device; and responsive to said remote recall command, uninstalling said targeted application without requiring end-user interaction, wherein the uninstalling of said targeted application results in the application no longer functioning.

According to another broad aspect of the present invention, there is provided a server which recalls a targeted application installed on a subset of wireless devices selected from a set of wireless devices, said server capable of

74769-748

2a

communicating with the set of wireless devices over a wireless network, the server comprising: a database for identifying each application installed on each wireless device of said set; a processor which searches said database to identify said subset of wireless devices having said targeted application installed; and a communication
5 interface which sends an application recall command including a unique application identification for the targeted application to each wireless device in said subset which initiates uninstalling said targeted application without requiring user interaction on the wireless devices, wherein the uninstalling of said targeted application results in the targeted application no longer functioning.

10 According to yet another broad aspect of the present invention, there is provided a method for a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising: booting-up the wireless device, said booting-up including initializing said wireless device for normal
15 communications over the wireless network; after said booting-up, remotely receiving a recall message including a unique application identification for a targeted application; and responsive to said remote recall message, checking-in with a server on said wireless network to determine whether to uninstall the targeted application on said wireless device without requiring end-user interaction, wherein the uninstalling of
20 said targeted application results in the application no longer functioning.

 According to one aspect of the present invention, there is provided a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising: means for booting-up the wireless
25 device, said means for booting-up configured to initialize said wireless device for normal communications over the wireless network; means for remotely receiving, after the means for booting-up boots-up the wireless device, a recall command including a unique application identification for a targeted application available for execution on said computer platform of said wireless device; and means for
30 uninstalling, responsive to said remote recall command, said targeted application

74769-748

2b

without requiring end-user interaction, wherein the uninstallation of the means for uninstalling results in the targeted application no longer functioning.

According to another aspect of the present invention, there is provided a non-transitory computer-readable storage medium containing instructions stored thereon, which, when executed by a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, cause the wireless device to perform operations, the instructions comprising: instructions to boot-up the wireless device, said instructions to boot-up configured to initialize said wireless device for normal communications over the wireless network; instructions to remotely receive, after the instructions to boot-up boots-up the wireless device, a recall command including a unique application identification for a targeted application available for execution on said computer platform of said wireless device; and instructions to uninstall, responsive to said remote recall command, said targeted application without requiring end-user interaction, wherein the uninstallation of the targeted application results in the targeted application no longer functioning.

According to still another aspect of the present invention, there is provided a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising: a processor coupled to a memory, the processor configured to: boot-up the wireless device, wherein logic configured to boot-up is configured to initialize said wireless device for normal communications over the wireless network; remotely receive, after the logic configured to boot-up boots-up the wireless device, a recall command including a unique application identification for a targeted application available for execution on said computer platform of said wireless device; and uninstall, responsive to said remote recall command, said targeted application without requiring end-user interaction, wherein the uninstallation of the targeted application results in the targeted application no longer functioning.

74769-748

2c

According to yet another aspect of the present invention, there is provided a method for a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising: booting-up the
5 wireless device, said booting-up including initializing said wireless device for normal communications over the wireless network; after said booting-up, checking-in with a server on said wireless network to determine whether to uninstall a targeted application on said wireless device without requiring end-user interaction; in response to the server check-in, remotely receiving the recall message including a unique
10 application identification for the targeted application; and responsive to said remote recall command, uninstalling said targeted application without requiring end-user interaction, wherein the uninstallation of said targeted application results in the targeted application no longer functioning.

According to a further aspect of the present invention, there is provided
15 a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising: means for booting-up the wireless device, said booting-up including initializing said wireless device for normal communications over the wireless network; means for, after said booting-up,
20 checking-in with a server on said wireless network to determine whether to uninstall a targeted application on said wireless device without requiring end-user interaction; means for, in response to the server check-in, remotely receiving the recall message including a unique application identification for the targeted application; and means for, responsive to said remote recall command, uninstalling said targeted application
25 without requiring end-user interaction, wherein the uninstallation of said targeted application results in the targeted application no longer functioning.

According to yet a further aspect of the present invention, there is provided a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device
30 capable of executing applications, comprising: a processor coupled to memory, the

74769-748

2d

processor configured to: boot-up the wireless device, said boot-up including initializing said wireless device for normal communications over the wireless network; check-in, after said boot-up, with a server on said wireless network to determine whether to uninstall a targeted application on said wireless device without requiring
5 end-user interaction; remotely receive the recall message including a unique application identification for the targeted application, in response to the server check-in; and uninstall said targeted application without requiring end-user interaction, wherein the uninstallation of said targeted application results in the targeted application no longer functioning, responsive to said remote recall command.

10 According to still a further aspect of the present invention, there is provided a non-transitory computer-readable storage medium containing instructions stored thereon, which, when executed by a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, cause
15 the wireless device to perform operations, the instructions comprising: instructions to boot-up the wireless device, said booting-up including initializing said wireless device for normal communications over the wireless network; instructions to, after said boot-up, check-in with a server on said wireless network to determine whether to uninstall a targeted application on said wireless device without requiring end-user interaction;
20 instructions to, in response to the server check-in, remotely receive the recall message including a unique application identification for the targeted application; and instructions to, responsive to said remote recall command, uninstall said targeted application without requiring end-user interaction, wherein the uninstallation of said targeted application results in the targeted application no longer functioning.

25 According to another aspect of the present invention, there is provided a method of operating a server configured to recall a targeted application installed on a subset of wireless devices selected from a set of wireless devices, said server capable of communicating with the set of wireless devices over a wireless network, comprising: identifying each application installed on each wireless device of said set;
30 searching a database to identify said subset of wireless devices having said targeted

74769-748

2e

application installed thereon; and sending an application recall command including a unique application identification for the targeted application to each wireless device in said subset, the application recall command configured to initiate uninstallation of said targeted application without requiring user interaction on the wireless devices,
5 wherein the uninstallation of said targeted application on each wireless device results in the targeted application no longer functioning on each wireless device.

According to yet another aspect of the present invention, there is provided a server configured to recall a targeted application installed on a subset of wireless devices selected from a set of wireless devices, said server capable of
10 communicating with the set of wireless devices over a wireless network, comprising:
means for identifying each application installed on each wireless device of said set;
means for searching a database to identify said subset of wireless devices having said targeted application installed thereon; and means for sending an application recall command including a unique application identification for the targeted
15 application to each wireless device in said subset, the application recall command configured to initiate uninstallation of said targeted application without requiring user interaction on the wireless devices, wherein the uninstallation of said targeted application on each wireless device results in the targeted application no longer functioning on each wireless device.

20 According to yet a further aspect of the present invention, there is provided a non-transitory computer-readable storage medium containing instructions stored thereon, which, when executed by server configured to recall a targeted application installed on a subset of wireless devices selected from a set of wireless devices, said server capable of communicating with the set of wireless devices over a
25 wireless network, cause the server to perform operations, the instructions comprising:
instructions to identify each application installed on each wireless device of said set;
instructions to search a database to identify said subset of wireless devices having said targeted application installed thereon; and instructions to send an application recall command including a unique application identification for the targeted
30 application to each wireless device in said subset, the application recall command

74769-748

2f

configured to initiate uninstallation of said targeted application without requiring user interaction on the wireless devices, wherein the uninstallation of said targeted application on each wireless device results in the targeted application no longer functioning on each wireless device.

5 According to still a further aspect of the present invention, there is provided a method for remotely recalling one or more application programs resident upon a remote module, comprising operations of: identifying an application program as a faulty application program for which a recall is necessary as a targeted application program; identifying remote modules having the targeted application
10 program installed thereon by searching a database containing a record of application identifiers representing each application program downloaded at any time onto each remote module in a network; constructing a network initiated recall command comprising a unique application identifier for the targeted application program and an instruction to the identified remote modules to uninstall the targeted application
15 program upon receipt of the recall command; and sending the recall command to the identified remote modules via one or more wireless networks.

 According to another aspect of the present invention, there is provided apparatus for remotely recalling one or more application programs resident upon a remote module, the apparatus comprising: means for identifying an application
20 program as a faulty application program for which a recall is necessary as a targeted application program; means for identifying remote modules having the targeted application program installed thereon comprising means for searching a database containing a record of application identifiers representing each application program downloaded at any time onto each remote module in a network; means for
25 constructing a network initiated recall command comprising a unique application identifier for the targeted application program and an instruction to the identified remote modules to uninstall the targeted application program upon receipt of the recall command; and means for sending the recall command to the identified remote modules via one or more wireless networks.

74769-748

2g

According to yet another aspect of the present invention, there is provided a system comprising an apparatus as described above or detailed below and a remote module, the remote module comprising: remote module circuitry including storage; processing circuitry; means for installing a recall program in the storage, the recall
5 program comprising a program of machine-readable instructions executable by the processing circuitry to perform operations to automatically uninstall one or more application programs contained in the storage responsive to the remote module detecting a remote recall command; and means for automatically uninstalling one or more application programs contained in the storage responsive to the remote module
10 detecting a remote recall command.

According to another broad aspect of the present invention, there is provided a computer readable medium having machine-readable instructions stored thereon for causing a computer to perform a method in accordance with the foregoing aspects of the present invention.

15 [0007] Broadly, the present invention concerns network initiated uninstallation (or "recall") of one or more programs on remote modules such as wireless telephones. The recall is performed over a wireless network.

[0008] Circumstances will arise dictating a recall of one or more programs downloaded onto wireless telephones. A recall may be necessary in response to
20 customer dissatisfaction with the performance of a particular program, in response to the detection of a pattern of problems affecting the wireless network linked to a program, and/or a program that causes the wireless telephone to malfunction or cease operating.

[0009] In response to these circumstances, one or more persons or entities involved with the development and/or issuance of the program, the manufacturer of the
25 wireless telephone, and/or persons or entities involved with the function of the wireless network (such as a wireless telephone network provider or "carrier") (collectively or singly referred to as "recall command source") decide whether a recall is necessary. For each program to be recalled ("targeted application program"), the recall command source constructs a recall command.

[0010] The recall command includes, at a minimum, a unique application identification for the targeted application program and an instruction to the wireless telephone to uninstall the targeted application program. A database maintained by a program manager keeps track of the application identifications for each program downloaded onto the wireless telephones, and also keeps track of which wireless telephones have the targeted application program downloaded onto them.

[0011] The recall command source constructs the recall command and sends it to the wireless network. The base stations in the wireless network broadcast the recall command to the wireless telephones. Upon receipt of the recall command, the wireless telephones automatically begin the process for uninstalling the targeted application program.

[0012] Alternatively, the recall command source may send a more limited recall message to the wireless telephone. The recall message instructs the wireless telephone to send a message to the recall command source or another component of the wireless network to obtain the information necessary to uninstall the targeted application program.

[0013] Another aspect of the invention involves a recall process initiated by the wireless telephone. In this embodiment, the wireless telephone is programmed to periodically send a message over the wireless network to the recall command source. The recall command source, when contacted by the wireless telephone, sends a recall command to the wireless telephone for any applications that need to be uninstalled. Alternatively, the recall command instructs the wireless telephone to contact another component of the wireless network to obtain the information necessary to uninstall the targeted application program.

[0014] Accordingly, one embodiment of the invention involves different methods for uninstalling one or more targeted application programs resident upon a wireless telephone. A recall command source remotely issues a recall command in response to which the wireless telephone automatically uninstalls the targeted application program. Alternatively, the wireless telephone periodically sends messages to the recall command source for any recall commands, in response to which the wireless telephone automatically uninstalls the targeted application program.

[0015] In another embodiment, the invention involves an apparatus, such as a wireless telephone, configured and programmed to automatically uninstall a targeted application program in response to a network initiated recall command. Alternatively, the wireless telephone is configured and programmed to periodically send messages to obtain any recall commands, in response to which the wireless telephone also is configured and programmed to automatically uninstall a targeted application program.

[0016] The invention affords a number of distinct advantages. Chiefly, the invention affords a mechanism for controlling, through network initiated uninstallation, faulty or harmful application programs downloaded onto wireless telephones. Significantly, the process is initiated and controlled by persons or entities operating the wireless network, or the wireless telephone itself, and not the user of the wireless telephone. The program manager identifies which wireless telephones have the targeted application program, and the recall process is specifically targeted to those wireless telephones. This aspect ensures a high degree of uniformity, speed, and accuracy in the recall process. The invention also provides a number of other advantages and benefits that should be apparent from the following description of the invention.

DESCRIPTION OF DRAWINGS

[0017] **FIGURE 1** is a block diagram of the hardware components and interconnections of a wireless telephone including a recall program resident thereon in accordance with the invention.

[0018] **FIGURE 2** is a block diagram of the hardware components of an exemplary wireless network providing communication between different components, including a program manager and wireless telephones, in accordance with the invention.

[0019] **FIGURE 3a** shows a table of data maintained by the program manager in a program manager database in accordance with the invention.

[0020] **FIGURE 3b** shows a table of data maintained by the wireless telephone in a local database of application programs in accordance with the invention.

[0021] **FIGURE 4** is a flowchart of an operational sequence for the construction of a wireless telephone with a recall program resident thereon in accordance with the invention.

[0022] **FIGURE 5** is a flowchart of an operational sequence for sending a network initiated recall command over the wireless network in accordance with the invention.

[0023] **FIGURE 6** is a flowchart of an operational sequence performed by a wireless telephone to uninstall a targeted application program on the wireless telephone in accordance with the invention.

DESCRIPTION OF PREFERRED EMBODIMENT

[0024] The nature, objectives, and advantages of the invention will become more apparent to those skilled in the art after considering the following detailed description in connection with the accompanying drawings. As mentioned above, the invention concerns network initiated uninstallation of one or more targeted application programs on a remote module, such as a wireless telephone.

HARDWARE COMPONENTS & INTERCONNECTIONS

Wireless Telephone

[0025] Referring to Figure 1, the invention is illustrated in the context of a wireless telephone 100. The wireless telephone 100 is used as an example without any intended limitation. The invention may alternatively be performed on any form of remote module capable of communicating through a wireless network, including without limitation, personal digital assistants ("PDAs"), wireless modems, PCMCIA cards, access terminals, personal computers, access terminals, telephones without a display or keypad, or any combination or sub-combination thereof. These examples of remote modules also may have a user interface, such as a keypad, visual display or sound display.

[0026] The exemplary wireless telephone 100 shown in Figure 1 includes a microprocessor, logic circuit, assembly of discrete circuit elements, application-specific integrated circuit (ASIC), or other data processing entity. In the example of Figure 1, this processing entity is implemented as an ASIC 102 installed at the time the wireless

telephone 100 is manufactured. The ASIC is a hardware component that is driven by software included in the ASIC. This processing circuitry may also include an API, as illustrated by the API 104, which is installed in the wireless telephone 100 at the time of manufacture. The API 104 is a software layer configured to interact with the ASIC and runs on the ASIC hardware. The API 104 serves as an interface between the ASIC 102 hardware and application programs 108 (discussed below) installed on the wireless telephone 100. Alternatively, the wireless telephone 100 may contain any other form of circuitry that would allow programs to be operated in a manner that is compatible with the hardware configuration of the wireless telephone 100. The wireless telephone 100 also includes storage 106. The storage 106 comprises RAM and ROM, but alternatively may be any form of memory such as EPROM, EEPROM or flash card inserts.

[0027] Referring to Figure 1, the manufacturer (not shown) of the wireless telephone 100 downloads application programs 108 onto the storage 106 of the wireless telephone 100 at the time the wireless telephone 100 is manufactured. These application programs 108 include games, books, or any other type of data or software programs. The application programs 108 also may be downloaded onto the wireless telephone 100 over-the-air after the wireless telephone 100 is manufactured.

[0028] The manufacturer also downloads a recall program 110 onto the storage 106 of the wireless telephone 100 at the time the wireless telephone 100 is manufactured. The recall program 110 also may be installed over-the-air after the wireless telephone 100 is manufactured.

[0029] As discussed in more detail below, the recall program 110, when executed by the wireless telephone 100, uninstalls one or more targeted application programs 109 stored on the wireless telephone 100. The targeted application program 109 is an application program 108 that needs to be uninstalled from the wireless telephone 100 for various reasons discussed below. The recall program 110 may additionally or alternatively be programmed to disable the targeted application program 109 or reprogram it to perform differently.

[0030] In an alternative embodiment, discussed below, the wireless telephone 100 is programmed to periodically poll a recall command source 222 (discussed in connection with Figure 2) for any instructions to recall a targeted application program 109. In this embodiment, a recall polling program 111 is downloaded onto the storage 106 of the wireless telephone 100 at the time the wireless telephone 100 is manufactured. The recall polling program 111 is software that is self-executing at different intervals. The recall polling program 111 may automatically execute every time the wireless telephone 100 is turned on by a user, and/or at periodic time intervals while the wireless telephone 100 is being operated by a user, and/or at times pre-determined by the program (such as pre-determined dates or times of day).

[0031] The wireless telephone 100 also includes a local database 112 installed by the manufacturer. Sample contents of the local database 112 are illustrated in Figure 3b. The local database 112 contains, at a minimum, a record of the application identification 302 unique to each application program 108 stored on the wireless telephone 100. Additionally, the local database 112 may contain a record of the location 314 of the application programs 108 within the storage 106 on the wireless telephone 100 and any other information useful for keeping track of which application programs 108 are downloaded on the wireless telephone 100, and where they are located.

[0032] The application identifications 302 for the application programs 108 maintained in the local database 112 correspond to the same application identifications 302 for the application programs 108 maintained in a program manager database 204 (Figure 2, discussed below). For example, the application identification 302 for an application program 108 maintained on the program manager database 204 for "Race car 104Z" is identical to the application identification 302 for that application program 108 on the local database 112 on the wireless telephone 100.

[0033] The wireless telephone 100 further includes a download client 114. The download client 114 is a software program within the API 104 that directs where each application program 108 is stored as it is downloaded over-the-air onto the wireless telephone 100.

The download client 114 also maintains a record of where each application program 108 is stored within the storage 106 for the wireless telephone 100.

Network

[0034] Figure 2 illustrates an example of a network 200 over which a network-initiated recall command 216 is broadcast to wireless telephones 100 carrying a targeted application program 109. The network 200 includes various components linked in various manners. The network 200 described below is exemplary, only. For purposes of the present invention, the network 200 includes any system whereby remote modules, such as wireless telephones 100, communicate over-the-air between and among each other and/or between and among components of a wireless network, including, without limitation, wireless network carriers and/or servers.

[0035] Referring to Figure 2, the network 200 includes at one end a program manager 202. The program manager 202 is any entity (company) that has developed and provided the API 104 to wireless telephone 203 manufacturers for installation on the wireless telephones 203. The program manager 202 also is the entity that certifies the application programs 108 as compatible with the APIs 104 installed on the wireless telephones 203.

[0036] The program manager 202 maintains a program manager database 204. Sample contents of the program manager database 204 are illustrated in Figure 3a. The program manager database 204 contains, at a minimum, a record of the application identifications 302 representing each application program 108 downloaded at any time onto each wireless telephone 203 in the network 200, an Electronic Service Number ("ESN") 304 representing the individual who downloaded the application program 108, and a Mobile Identification Number ("MIN") 306 unique to the wireless telephone 203 carrying that application program 108. Optionally, the program manager database 204 contains records of the wireless telephone model 308, wireless network carrier 310, the region where the wireless telephone is used 312, and any other information useful to identify which wireless telephones 203 are carrying which application programs 108.

[0037] The program manager 202 also includes a recall command source 222. The recall command source 222 is the person(s) or entity that makes the decision to recall one or more targeted application programs 109. The recall command source 222 also is the entity that constructs a recall command 216 (discussed below) that is broadcast to identified wireless telephones 100 carrying the targeted application program(s) 109. Alternatively, and without limitation, the recall command source 222 may be one or more persons or entities involved with the development and issuance of the targeted application program 109, person(s) or entities involved with the manufacturing of the wireless telephones 203, person(s) or entities involved with the function of any parts of the network 200, and/or any component of the network 200.

[0038] The program manager 202 communicates with one or more computer servers 206 via a network over the Internet 208 (preferably secured). The servers 206 also communicate with a carrier network 210 via a network over the Internet 208. The carrier network 210 controls messages sent to a messaging service controller ("MSC") 212. The carrier network 210 communicates with the MSC 212 by both the Internet and POTS (plain ordinary telephone system) (collectively identified in Figure 2 as 211). The Internet connection 211 between the carrier network 210 and the MSC 212 transfers data, and the POTS 211 transfers voice information. The MSC 212, in turn, is connected to multiple base stations ("BTS") 214. The MSC 212 is connected to the BTS by both the Internet 211 (for data transfer) and POTS 211 (for voice information). The BTS 214 broadcast messages wirelessly to the wireless telephones 203 by short messaging service ("SMS"), or any other over-the-air method.

[0039] One example of a message broadcast by the BTS 214 in the present invention is a recall command 216. As further discussed herein, the wireless telephone 100 carrying a targeted application program 109, in response to receiving a recall command 216, responds by uninstalling the program 109 stored on the wireless telephone 100. The recall command 216 is constructed by the recall command source 222 (that may or may not be the same person(s) or entities that made the decision to initiate a recall of the targeted application program 109). The recall command 216 is sent by the recall command source 222 over the

network 200 to be broadcast to the wireless telephones 100 carrying the targeted application program 109.

[0040] Another example of a message broadcast by the BTS 214 is a recall message 218. As further discussed herein, a recall message 218 is a message that is sent over the network 200 by the recall command source 222 to the wireless telephones 100 carrying the targeted application program 109. In response to the recall message 218, the wireless telephones 100 automatically communicate with the recall command source 222. The recall command source 222 sends the wireless telephones 100, at a minimum, the identity of the targeted application program 109 and an instruction to uninstall the targeted application program 109. In response to receiving this information, the wireless telephones 100 uninstall the targeted application program 109. Alternatively, the recall command source 222 sends the wireless telephones 100 an instruction to retrieve the identity of the targeted application program 109 from another component of the network 200, including without limitation, a server 206.

[0041] As shown in Figure 2, the network 200 includes many wireless telephones 203, each capable of communicating wirelessly with various other network components 200 via the BTS 214. In the present invention, identified wireless telephones 100 contain a targeted application program 109 that is recalled through the use of recall commands 216 or recall messages 218 initiated by portions of the network 200 other than the wireless telephones 203 themselves. However, in another embodiment, the recall process is initiated by wireless telephones 224 carrying the recall polling program 111. This alternative method to conduct a recall is discussed below.

OPERATION

[0042] In addition to the various hardware embodiments, described above, a different aspect of the invention concerns a method for constructing a wireless telephone 100 including a recall program 110 resident thereon, and methods of remotely initiating a recall of one or more targeted application programs 109 resident on the wireless telephone 100.

Construction, Configuration, and Use of Wireless Telephone

[0043] Figure 4 shows a sequence 400 to illustrate one example of the construction, configuration, and use of a wireless telephone 100 with a recall program 110 resident thereon. For ease of explanation, but without any limitation intended thereby, the example of Figure 4 is described in the context of the hardware environment described above.

[0044] In step 402, the wireless telephone 100 is constructed by a manufacturer. In step 404, the manufacturer downloads the recall program 110 into the storage 106 on the wireless telephone 100. In step 404, the manufacturer also downloads one or more application programs 108 onto the wireless telephone 100.

[0045] In step 406, the program manager 202 updates the program manager database 204 to include a record of the application identification 302 representing each application program 108 downloaded onto each manufactured wireless telephone 100. This information may come directly from the manufacturer.

[0046] In step 408, the wireless telephone 100 receives downloads of one or more application programs 108 over-the-air. While the application programs 108 are certified by the program manager 202, the actual programs are maintained at the carrier network 210 (but may be maintained at any location in the network 200 capable of sending the application programs 108 to the BTS 214 to be broadcast to the wireless telephone 100.) The user of the wireless telephone 100 operates the wireless telephone 100 to communicate over the network 200 with the servers 206 to select a desired application program 108. In response, the carrier network 210 sends the application program 108 to the MSC 212 to be transferred to the BTS 214 that broadcast the application program 108 to the wireless telephone 100.

[0047] In response to the wireless telephone 100 receiving the application program 108, the download client 114 on the wireless telephone 100 directs the application program 108 to a particular location within the storage 106 on the wireless telephone 100, where the application program 108 is stored.

[0048] Also in step 408, either the server 206 or the carrier network 210 communicates the application identification 302 unique to the application program 108 that has been

downloaded onto the wireless telephone 100 to the program manager 202. The program manager 202 updates the program manager database 204 with a record of the application identification 302 representing the additional application program 108 that has been downloaded onto the wireless telephone 100 (step 406).

[0049] In step 409, the wireless telephone 100 updates its local database 112 to include a record of the application identification 302 unique to the application program 108 that has been downloaded onto the wireless telephone 100. Thus, the records of the application identifications 302 maintained on the wireless telephone 100 in the local database 112 are identical to the records of the application identifications 302 maintained on the wireless telephone 100 in the program manager database 204.

[0050] In step 410, the wireless telephone 100 is operated to communicate and/or run the application programs 108 stored on the wireless telephone 100. For example, the wireless telephone 100 may be operated to run a game of Tetris followed by the initiation of a telephone call.

[0051] In step 412, the wireless telephone 100 may be reconfigured so as to store additional or fewer application programs 108. If the wireless telephone 100 is operated to add application programs 108, step 408 and the update of the application identifications 302 in step 406 are repeated.

[0052] Conversely, in step 414, if the wireless telephone 100 is operated to delete one or more application programs 108, the wireless telephone 100 directs the download client 114 to locate the application program 108 to be deleted, and uninstalls the application program 108. After the application program 108 is deleted, the wireless telephone 100 automatically updates its local database 112 to delete the record of the application identification 302 representing the deleted application program 108. The wireless telephone 100 also automatically sends a message over the network 200 to the program manager 202 notifying the program manager 202 of the deleted application program 108. In response, the program manager 202 updates the record of application identifications 302 corresponding to that wireless telephone 100 maintained in the program manager database 204 (step 406).

[0053] In step 416, as opposed to user operation of the wireless telephone 100 to delete an application program 108 from the wireless telephone 100, a recall command source 222 decides to recall one or more of the application programs 108. In step 418, the recall command source 222 initiates the recall process, as discussed below, and the sequence 400 ends.

Recall Command

[0054] Figure 5 shows a sequence 500 to illustrate an example of a recall command source 222 constructing a recall command 216 and sending the recall command 216 over the network 200 to be broadcast to wireless telephones 100 identified as carrying the targeted application program 109 that needs to be uninstalled or disabled. For ease of explanation, but without any limitation intended thereby, the example of Figure 5 is described in the context of the hardware environment of Figures 1-3.

[0055] In step 502, the recall command source 222 determines whether criteria are met for a recall of one or more targeted application programs 109. The recall command source 222 may commence a recall under a number of circumstances, such as notification from any part of the network 200 that wireless telephones 100 in the network 200 are not operating correctly and/or are crashing when a user operates the targeted application program 109; developers of the targeted application program 109 contacting any part of the network 200 to notify it of an error in the targeted application program 109; users of the wireless telephone contacting any part of the network 200 with complaints about the targeted application program 109; any part of the network 200 receiving statistical feedback of problems with the interaction between the targeted application program 109 and other application programs 108 on the wireless telephone; discovering a software virus in the targeted application program 109; and/or discovering that the user's operation of the targeted application program 109 increases the amount of radio frequency emitted from the wireless telephone 100 such that operation of the targeted application program 109 poses a safety risk.

[0056] In step 502, the actual decision to recall made by the recall command source 222 may be reached by an individual, a committee, or be electronically determined, for example, from statistical feedback from the wireless telephones 100 or other parts of the network 200. The scope of the recall would depend on the nature of the problem, and the number of wireless telephones 100 affected by the problem. For example, the recall may extend to all wireless telephones 203 in the network 200, all wireless telephones 100 within a particular geographic region, specific wireless telephone 100 models, a range of ESNs 304, or a single wireless telephone 100.

[0057] In step 504, the recall command source 222 contacts the program manager 202 to obtain the unique application identification 302 representing the targeted application program 109 (assuming this information is not already available to the recall command source 222). In step 506, the program manager 202 researches the program manager database 204 that maintains the application identifications 302 representing each application program 108 stored on each wireless telephone 100 in the network 200. By searching the program manager database 204 for the application identification 302 of the targeted application program 109, the program manager 202 determines exactly which wireless telephones 100 in the network 200 contain the targeted application program 109, and this information is communicated by the program manager 202 to the recall command source 222.

[0058] In step 508, the recall command source 222 constructs a recall command 216. The recall command 216 contains, at a minimum, the application identification 302 representing the targeted application program 109 and an instruction to the wireless telephone 100 to uninstall the targeted application program 109. The recall command 216 is written as an SMS, but may be in any format that may be sent from the program manager 202 to the BTS 214 and broadcast over-the-air to the wireless telephones 100. Alternatively, the recall command source 222 may send the information necessary to construct the recall command 216 over the network 200 to the BTS 214, that in turn, may construct the recall command 216.

[0059] In step 510, after the recall command 216 is constructed and is at the BTS 214, the BTS 214 broadcast the recall command 216 to the identified wireless telephones 100. The instruction to broadcast may be included as part of the recall command 216 or separately programmed at the BTS 214. The BTS may broadcast the recall command 216 in any cellular interface, including AMPS, PCS, GSM or CDMA.

[0060] In step 512, the wireless telephones 100 receive the recall command 216, responsive to which, the wireless telephones 100 automatically uninstall the targeted application program 109, as discussed below.

Recall Message

[0061] Instead of the recall command source 222 constructing a recall command 216 that contains all of the information needed by the wireless telephone 100 to uninstall the targeted application program 109, alternatively, the recall command source 222 may construct and cause to be broadcast a more limited recall message 218. The recall message 218 is a message to the wireless telephone 100 that directs the wireless telephone 100 to automatically initiate communications with the recall command source 222. These communications are transparent to a user of the wireless telephone 100. The recall command source 222 in turn provides the wireless telephone 100 with sufficient information to identify the targeted application program 109 to be uninstalled and an instruction to uninstall the targeted application program 109. The recall command source 222 also may provide the wireless telephone 100 with the recall program 110 necessary to uninstall the targeted application program 109. Responsive to receiving the identity of the targeted application program 109 (and, alternatively, a recall program 110), the wireless telephone 100 uninstalls the targeted application program 109 in the manner described below.

[0062] Alternatively, the recall command source 222 may send the wireless telephone 100 a recall message 218 containing an instruction to retrieve information necessary to uninstall the targeted application program 109 from another component of the network 200, including without limitation, a server 206. Transparent to a user of the wireless telephone

100, in response to this recall message 218, the wireless telephone 100 obtains the identity of the targeted application program 109, an instruction to uninstall the targeted application program 109, and alternatively, a recall program 110, from another component of the network 200.

Polling For Recall Command

[0063] As an alternative to a recall process initiated by the recall command source 222, in another embodiment, the recall process is initiated by the wireless telephones 224 themselves. In this embodiment, the wireless telephones 224 have the recall polling program 111 downloaded on the telephones 224. The wireless telephones 224 automatically execute the recall polling program 111 at different intervals so that the wireless telephones 224 are checking for any instructions to uninstall a targeted application program 109.

[0064] When executed, the recall polling program 111 causes the wireless telephone 224 to automatically send a message by any over-the-air means to a recall command source 222. The recall command source 222 is the person(s), entity or network 200 component that makes the decision to recall one or more targeted application programs 109. Alternatively, and without limitation, the recall command source 222 may be one or more persons or entities involved with the development and issuance of the targeted application program 109, person(s) or entities involved with the manufacturing of the wireless telephones 203, and/or person(s) or entities involved with the function of any components of the network 200, and/or any component of the network 200.

[0065] The polling message sent by the wireless telephone 224 to the recall command source 222 requests that the recall command source 222 send the wireless telephone 224 a recall command 216 to uninstall any targeted application program 109. This "polling" for a recall command 216 may be done in various ways. For example, the polling message sent by the wireless telephone 224 may include identifying information about the wireless telephone 224 sufficient for the recall command source 222 to determine which application programs 108 are downloaded on that particular wireless telephone 224. The recall

command source 222 may make this determination by referencing the program manager database 204 containing information about each application program 108 downloaded on each wireless telephone 203 in the network 200. If the recall command source 222 determines that there is a match between the application programs 108 downloaded on that particular wireless telephone 224, and the targeted application program 109, the recall command source 222 may proceed with sending the recall command 216. If there is no match, the recall command source 222 does not send a recall command 216.

[0066] Conversely, the recall command source 222 may, in response to receiving the polling message from the wireless telephone 224, automatically send any existing recall commands 216 to the wireless telephone 224. The wireless telephone 224, upon receiving the recall command 216, determines whether the targeted application program 109 is resident upon the wireless telephone 224. If so, the wireless telephone 224 proceeds with uninstalling the targeted application program 109.

[0067] As with the previous embodiments, the recall command 216 sent in response to a polling message contains, at a minimum, the application identification 302 representing the targeted application program 109, and an instruction to the wireless telephone 224 to uninstall that program. Alternatively, the recall command 216 may instruct the wireless telephone 224 to send a message to another component of the network 200 (such as a server 206) to obtain the information necessary to complete the recall. As another alternative, an abbreviated version of the recall command 216 may be implemented, where the recall command 216 includes information representing the identity of any application programs 108 that need to be uninstalled, the mere presence of the recall command in the recall command source 222 serving as an implied instruction for the telephone to execute the command.

Uninstallation of Targeted Application Program

[0068] Figure 6 shows a sequence 600 to illustrate one example of the uninstallation of a targeted application program 109 stored on the wireless telephone 100 after the wireless

telephone 100 receives a recall command 216 or otherwise receives the identity of a targeted application program 109 and an instruction to uninstall that program.

[0069] For ease of explanation, but without any limitation intended thereby, the example of Figure 6 is described in the context of the hardware environment described in Figures 1-3. In step 602, the wireless telephone 100 receives the recall command 216 broadcast from the BTS 214 in the network 200.

[0070] In step 604, in response to receiving the recall command 216 (or the identity of a targeted application program 109 and an instruction to uninstall that program), the download client 114 on the wireless telephone 100 interprets the recall command 216 to determine the application identification 302 representing the targeted application program 109. The download client 114 then sends the recall command 216 to the recall program 110 installed on the wireless telephone 100. The download client 114 also communicates to the recall program 110 information representing the location of the targeted application program 109 in the storage 106.

[0071] In step 606, the recall command 216 reaches the recall program 110 where it causes the recall program to execute and automatically uninstall the targeted application program 109. Alternatively, the recall program 110 may disable the targeted application program 109, or take any other action that would cause the targeted application program 109 to no longer function. The recall program 110 also may be programmed to delete the recall command 216 after the uninstallation is performed.

[0072] In step 608, the wireless telephone 100 automatically reports the completed uninstallation of the targeted application program 109 to the recall command source 222. This report may be completed by an SMS or any other form of over-the-air message sent through the network 200.

[0073] In step 610, the recall command source 222 communicates the confirmation of the uninstallation to the program manager 202 (this step assumes that the recall command source 222 and the program manager 202 are not the same entity). The program manager 202 updates the program manager database 204 to reflect the fact that the wireless telephone 100 no longer contains the targeted application program 109 in an operable form.

To do this, the program manager 202 deletes the application identification 302 representing the targeted application program 109 from the list of application programs 108 downloaded on that particular wireless telephone 100.

[0074] In step 612, the wireless telephone 100 optionally automatically reports to the user of the wireless telephone 100 that the targeted application program 109 is no longer operable and/or has been uninstalled. The form and wording of this report may be included in the recall command 216, and the recall program 110 on the wireless telephone 100 may be programmed to cause the wireless telephone 100 to make the report to the user in response to an instruction in the recall command 216. The report may contain the reason(s) behind the recall. The report also may direct the user of the wireless telephone 100 to a customer service department or any third party to obtain information regarding the recall.

Signal Bearing Medium/Circuitry

[0075] As discussed above, the invention concerns methods including network-initiated uninstallation of one or more targeted application programs 109 resident upon a wireless telephone 100, and constructing a wireless telephone 100 including a recall program 110 resident thereon. The invention also concerns methods for a wireless telephone 224 polling the network 200 to obtain recall commands 216 to uninstall a targeted application program 109, and constructing a wireless telephone 224 with a recall polling program 111 resident thereon.

[0076] In the context of Figures 1-3, these methods may be implemented, for example, by operating portion(s) of the network 200 to execute a sequence of machine-readable instructions. These instructions may reside in various types of signal-bearing media. This signal-bearing media may comprise, for example, RAM (not shown) accessible by, or residing within, the components of the network 200. Alternatively, the instructions may be contained in another signal-bearing media, such as a magnetic data storage diskette (not shown). Whether contained in RAM, a diskette, or elsewhere, the instructions may be stored on a variety of machine-readable data storage media, such as DASD storage (e.g., a conventional "hard drive" or a RAID array), magnetic tape, electronic read-only memory

(e.g., ROM, EPROM, or EEPROM), an optical storage device (e.g. CD-ROM, WORM, DVD, digital optical tape), paper "punch" cards, or other suitable signal-bearing media including transmission media such as digital and analog.

[0077] As for the wireless telephones 203, the methods discussed herein may be implemented with any type of circuitry, microprocessors, or other types of hardware in the wireless telephone 203.

OTHER EMBODIMENTS

[0078] While the foregoing disclosure shows illustrative embodiments of the invention, it will be apparent to those skilled in the art that various changes and modifications can be made herein without departing from the scope of the invention as defined by the appended claims. Furthermore, although elements of the invention may be described or claimed in the singular, the plural is contemplated unless limitation to the singular is explicitly stated.

74769-748

21

CLAIMS:

1. A method for a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising:
 - 5 booting-up the wireless device, said booting-up including initializing said wireless device for normal communications over the wireless network;

after said booting-up, remotely receiving a recall command including a unique application identification for a targeted application available for execution on said computer platform of said wireless device; and
 - 10 responsive to said remote recall command, uninstalling said targeted application without requiring end-user interaction, wherein the uninstalling of said targeted application results in the application no longer functioning.
2. The method of claim 1, wherein the recall command comprises an identification of said specific application and an instruction for causing said wireless
15 device to delete said targeted application.
3. The method of claim 2, wherein the recall command is sent to the wireless device via a short message service (SMS) message.
4. The method of claim 2, wherein said step of uninstalling comprises:

searching a database on said wireless device using said unique
20 application identification to determine an address range corresponding to said targeted application; and

deleting contents of said address range.
5. The method of claim 2, wherein each recall command further comprises:

74769-748

22

an uninstall application, which when executed by a wireless device, deletes said targeted application.

6. A server which recalls a targeted application installed on a subset of wireless devices selected from a set of wireless devices, said server capable of communicating with the set of wireless devices over a wireless network, the server comprising:

a database for identifying each application installed on each wireless device of said set;

a processor which searches said database to identify said subset of wireless devices having said targeted application installed; and

a communication interface which sends an application recall command including a unique application identification for the targeted application to each wireless device in said subset which initiates uninstalling said targeted application without requiring user interaction on the wireless devices, wherein the uninstalling of said targeted application results in the targeted application no longer functioning.

7. The server of claim 6, wherein each recall command comprises an instruction for causing one of said wireless devices from said subset of wireless devices to delete said targeted application.

8. The server of claim 7, wherein the recall command is sent to the wireless device via a short message service (SMS) message.

9. The server of claim 6, wherein each recall command further comprises:

an uninstall application, which when executed by a wireless device, deletes said targeted application.

10. A method for a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising:

74769-748

23

booting-up the wireless device, said booting-up including initializing said wireless device for normal communications over the wireless network;

after said booting-up, remotely receiving a recall message including a unique application identification for a targeted application; and

5 responsive to said remote recall message, checking-in with a server on said wireless network to determine whether to uninstall the targeted application on said wireless device without requiring end-user interaction, wherein the uninstalling of said targeted application results in the application no longer functioning.

11. A wireless device capable of communicating over a wireless network
10 and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising:

means for booting-up the wireless device, said means for booting-up configured to initialize said wireless device for normal communications over the wireless network;

15 means for remotely receiving, after the means for booting-up boots-up the wireless device, a recall command including a unique application identification for a targeted application available for execution on said computer platform of said wireless device; and

means for uninstalling, responsive to said remote recall command, said
20 targeted application without requiring end-user interaction, wherein the uninstallation of the means for uninstalling results in the targeted application no longer functioning.

12. A non-transitory computer-readable storage medium containing instructions stored thereon, which, when executed by a wireless device capable of communicating over a wireless network and having operating software for supporting
25 a computer platform on said wireless device capable of executing applications, cause the wireless device to perform operations, the instructions comprising:

74769-748

24

instructions to boot-up the wireless device, said instructions to boot-up configured to initialize said wireless device for normal communications over the wireless network;

5 instructions to remotely receive, after the instructions to boot-up boots-up the wireless device, a recall command including a unique application identification for a targeted application available for execution on said computer platform of said wireless device; and

10 instructions to uninstall, responsive to said remote recall command, said targeted application without requiring end-user interaction, wherein the uninstallation of the targeted application results in the targeted application no longer functioning.

13. The non-transitory computer-readable storage medium of claim 12, wherein the recall command comprises an identification of said specific application and an instruction for causing said wireless device to delete said targeted application.

14. The non-transitory computer-readable storage medium of claim 12, 15 wherein the recall command is sent to the wireless device via a short message service (SMS) message.

15. The non-transitory computer-readable storage medium of claim 12, wherein the instructions to uninstall include:

20 instructions to search a database on said wireless device using said unique application identification to determine an address range corresponding to said targeted application; and

instructions to delete contents of said address range.

16. The non-transitory computer-readable storage medium of claim 12, wherein each recall command further comprises:

25 an uninstall application, which when executed by the wireless device, deletes said targeted application.

74769-748

25

17. The non-transitory computer-readable storage medium of claim 12, further comprising:

instructions to send a poll message to a server to request that the server evaluate whether to recall the targeted application,

5 wherein the instructions to remotely receive receives the recall command from the server in response to the poll message.

18. A wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising:

10 a processor coupled to a memory, the processor configured to:

boot-up the wireless device, wherein logic configured to boot-up is configured to initialize said wireless device for normal communications over the wireless network;

15 remotely receive, after the logic configured to boot-up boots-up the wireless device, a recall command including a unique application identification for a targeted application available for execution on said computer platform of said wireless device; and

20 uninstall, responsive to said remote recall command, said targeted application without requiring end-user interaction, wherein the uninstallation of the targeted application results in the targeted application no longer functioning.

19. The wireless device of claim 18, wherein the recall command comprises an identification of said specific application and an instruction for causing said wireless device to delete said targeted application.

20. The wireless device of claim 18, wherein the recall command is sent to
25 the wireless device via a short message service (SMS) message.

74769-748

26

21. The wireless device of claim 18, wherein, for the uninstall, the processor is further configured to:

search a database on said wireless device using said unique application identification to determine an address range corresponding to said
5 targeted application; and

delete contents of said address range.

22. The wireless device of claim 18, wherein each recall command further comprises:

an uninstall application, which when executed by the wireless device,
10 deletes said targeted application.

23. The wireless device of claim 18, wherein the processor is further configured to:

send a poll message to a server to request that the server evaluate whether to recall the targeted application,

15 remotely receive receives the recall command from the server in response to the poll message.

24. A method for a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising:

20 booting-up the wireless device, said booting-up including initializing said wireless device for normal communications over the wireless network;

after said booting-up, checking-in with a server on said wireless network to determine whether to uninstall a targeted application on said wireless device without requiring end-user interaction;

74769-748

27

in response to the server check-in, remotely receiving the recall message including a unique application identification for the targeted application; and

responsive to said remote recall command, uninstalling said targeted application without requiring end-user interaction, wherein the uninstallation of said
5 targeted application results in the targeted application no longer functioning.

25. The method of claim 24, wherein the checking-in with the server includes:

sending a poll message to the server to request that the server evaluate whether to recall the targeted application available for execution on said computer
10 platform of said wireless device,

wherein the remotely receiving receives the recall command from the server in response to the poll message.

26. A wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless
15 device capable of executing applications, comprising:

means for booting-up the wireless device, said booting-up including initializing said wireless device for normal communications over the wireless network;

means for, after said booting-up, checking-in with a server on said wireless network to determine whether to uninstall a targeted application on said
20 wireless device without requiring end-user interaction;

means for, in response to the server check-in, remotely receiving the recall message including a unique application identification for the targeted application; and

means for, responsive to said remote recall command, uninstalling said
25 targeted application without requiring end-user interaction, wherein the uninstallation of said targeted application results in the targeted application no longer functioning.

74769-748

28

27. The wireless device of claim 26, wherein the means for checking-in with the server is configured to send a poll message to the server to request that the server evaluate whether to recall the targeted application available for execution on said computer platform of said wireless device,

5 wherein the means for remotely receiving receives the recall command from the server in response to the poll message.

28. A wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, comprising:

10 a processor coupled to memory, the processor configured to:

boot-up the wireless device, said boot-up including initializing said wireless device for normal communications over the wireless network;

check-in, after said boot-up, with a server on said wireless network to determine whether to uninstall a targeted application on said wireless device without
15 requiring end-user interaction;

remotely receive the recall message including a unique application identification for the targeted application, in response to the server check-in; and

uninstall said targeted application without requiring end-user interaction, wherein the uninstallation of said targeted application results in the targeted
20 application no longer functioning, responsive to said remote recall command.

29. The wireless device of claim 28, wherein the processor is further configured to:

evaluate whether to recall the targeted application available for execution on said computer platform of said wireless device; and

74769-748

29

receive the recall command from the server in response to the poll message.

30. A non-transitory computer-readable storage medium containing instructions stored thereon, which, when executed by a wireless device capable of communicating over a wireless network and having operating software for supporting a computer platform on said wireless device capable of executing applications, cause the wireless device to perform operations, the instructions comprising:

instructions to boot-up the wireless device, said booting-up including initializing said wireless device for normal communications over the wireless network;

10 instructions to, after said boot-up, check-in with a server on said wireless network to determine whether to uninstall a targeted application on said wireless device without requiring end-user interaction;

instructions to, in response to the server check-in, remotely receive the recall message including a unique application identification for the targeted application; and

15

instructions to, responsive to said remote recall command, uninstall said targeted application without requiring end-user interaction, wherein the uninstallation of said targeted application results in the targeted application no longer functioning.

31. The non-transitory computer-readable storage medium of claim 30, wherein the instructions to check-in with the server is configured to send a poll message to the server to request that the server evaluate whether to recall the targeted application available for execution on said computer platform of said wireless device,

20

wherein the instructions to remotely receive receives the recall command from the server in response to the poll message.

25

74769-748

30

32. A method of operating a server configured to recall a targeted application installed on a subset of wireless devices selected from a set of wireless devices, said server capable of communicating with the set of wireless devices over a wireless network, comprising:

5 identifying each application installed on each wireless device of said set;

searching a database to identify said subset of wireless devices having said targeted application installed thereon; and

10 sending an application recall command including a unique application identification for the targeted application to each wireless device in said subset, the application recall command configured to initiate uninstallation of said targeted application without requiring user interaction on the wireless devices, wherein the uninstallation of said targeted application on each wireless device results in the targeted application no longer functioning on each wireless device.

15 33. The method of claim 32, further comprising:

receiving a polling message from at least one wireless device of said set, wherein the identifying is performed based on the received polling message.

20 34. The method of claim 32, wherein each recall command comprises an instruction for causing one of said wireless devices from said subset of wireless devices to delete said targeted application.

35. The method of claim 32, wherein the sending includes sending the application recall command via a short message service (SMS) message.

36. The method of claim 32, wherein each recall command further comprises:

25 an uninstall application, which when executed by a given wireless device among the subset of wireless devices, deletes said targeted application.

74769-748

31

37. A server configured to recall a targeted application installed on a subset of wireless devices selected from a set of wireless devices, said server capable of communicating with the set of wireless devices over a wireless network, comprising:

means for identifying each application installed on each wireless device
5 of said set;

means for searching a database to identify said subset of wireless devices having said targeted application installed thereon; and

means for sending an application recall command including a unique application identification for the targeted application to each wireless device in said
10 subset, the application recall command configured to initiate uninstallation of said targeted application without requiring user interaction on the wireless devices, wherein the uninstallation of said targeted application on each wireless device results in the targeted application no longer functioning on each wireless device.

38. The server of claim 37, further comprising:

15 means for receiving a polling message from at least one wireless device of said set, wherein the means for identifying performs application identification based on the received polling message.

39. A non-transitory computer-readable storage medium containing instructions stored thereon, which, when executed by server configured to recall a
20 targeted application installed on a subset of wireless devices selected from a set of wireless devices, said server capable of communicating with the set of wireless devices over a wireless network, cause the server to perform operations, the instructions comprising:

instructions to identify each application installed on each wireless
25 device of said set;

74769-748

32

instructions to search a database to identify said subset of wireless devices having said targeted application installed thereon; and

instructions to send an application recall command including a unique application identification for the targeted application to each wireless device in said
5 subset, the application recall command configured to initiate uninstallation of said targeted application without requiring user interaction on the wireless devices, wherein the uninstallation of said targeted application on each wireless device results in the targeted application no longer functioning on each wireless device.

40. The non-transitory computer-readable storage medium of claim 39,
10 further comprising:

instructions receive a polling message from at least one wireless device of said set, wherein the instructions identify performs application identification based on the received polling message.

41. A method for remotely recalling one or more application programs
15 resident upon a remote module, comprising operations of:

identifying an application program as a faulty application program for which a recall is necessary as a targeted application program;

identifying remote modules having the targeted application program installed thereon by searching a database containing a record of application
20 identifiers representing each application program downloaded at any time onto each remote module in a network;

constructing a network initiated recall command comprising a unique application identifier for the targeted application program and an instruction to the identified remote modules to uninstall the targeted application program upon receipt
25 of the recall command; and

74769-748

33

sending the recall command to the identified remote modules via one or more wireless networks.

42. The method of claim 41, further comprising:

the remote module automatically uninstalling the targeted application program, in response to the recall command.

43. The method of claim 41 or 42 further comprising the step of:

the remote module sending one or more polling messages to a recall command source prompting the recall command source to transmit the recall command.

10 44. The method of any one of claims 41 to 43 further comprising the step of:

referencing a local database to determine whether the targeted application program is stored on the remote module; and

15 be stored on the remote module.

45. The method of any one of claims 41 to 44 further comprising:

installing a recall program in a storage of a remote module, the recall program comprising a program of machine-readable instructions executable by the processing circuitry to perform operations to automatically uninstall one or more application programs contained in the storage responsive to the remote module detecting a remote recall command; and

automatically uninstalling one or more application programs contained in the storage responsive to the remote module detecting a remote recall command.

25 46. The method of claim 45 further comprising the step of downloading one or more application programs to the storage.

74769-748

34

47. The method of claim 45 or claim 46 further comprising the step of wirelessly downloading the recall program from a remote server.

48. The method of any one of claims 45 to 47 wherein:

the recall command identifies at least one application program and
5 contains instructions to uninstall the identified application program.

49. The method of any one of claims 45 to 48 further comprising the steps of:

receiving a recall message containing instructions to obtain the recall
command from a recall command source, and obtaining the recall command from the
10 recall command source.

50. The method of any one of claims 45 to 49 further comprising the step of:

referencing a local database to determine whether the identified
application program resides in the storage.

15 51. The method of any one of claims 45 to 50, further comprising the step of:

sending one or more polling messages to a recall command source
prompting the recall command source to transmit the recall command.

52. Apparatus for remotely recalling one or more application programs
20 resident upon a remote module, the apparatus comprising:

means for identifying an application program as a faulty application
program for which a recall is necessary as a targeted application program;

means for identifying remote modules having the targeted application
program installed thereon comprising means for searching a database containing a

74769-748

35

record of application identifiers representing each application program downloaded at any time onto each remote module in a network;

means for constructing a network initiated recall command comprising a unique application identifier for the targeted application program and an instruction to the identified remote modules to uninstall the targeted application program upon receipt of the recall command; and

means for sending the recall command to the identified remote modules via one or more wireless networks.

53. A system comprising the apparatus of claim 52 and a remote module, the remote module comprising:

remote module circuitry including storage;

processing circuitry;

means for installing a recall program in the storage, the recall program comprising a program of machine-readable instructions executable by the processing circuitry to perform operations to automatically uninstall one or more application programs contained in the storage responsive to the remote module detecting a remote recall command; and

means for automatically uninstalling one or more application programs contained in the storage responsive to the remote module detecting a remote recall command.

54. The system of claim 53, the remote module further comprising:

means for downloading one or more application programs to the storage.

55. The system of claim 53 or claim 54, the remote module further comprising:

74769-748

36

means for wirelessly downloading the recall program from a remote server.

56. The system of any one of claims 53 to 55 wherein:

the recall command identifies at least one application program and
5 contains instructions to uninstall the identified application program.

57. The system of any one of claims 53 to 56, the remote module further comprising:

means for receiving a recall message containing instructions to obtain
the recall command from a recall command source, and means for obtaining the
10 recall command from the recall command source.

58. The system of any one of claims 53 to 57 the identified application programs being resident upon the remote module.

59. The system of any one of claims 53 to 58, the remote module further comprising:

15 means for referencing a local database to determine whether the identified application program resides in the storage.

60. The system of any one of claims 53 to 59 the processing circuitry comprising application-specific integrated circuitry.

61. The system of any one of claims 53 to 60, the remote module further
20 comprising:

a download client configured to download one or more application programs to the storage.

62. The system of any one of claims 53 to 61, the remote module further comprising;

74769-748

37

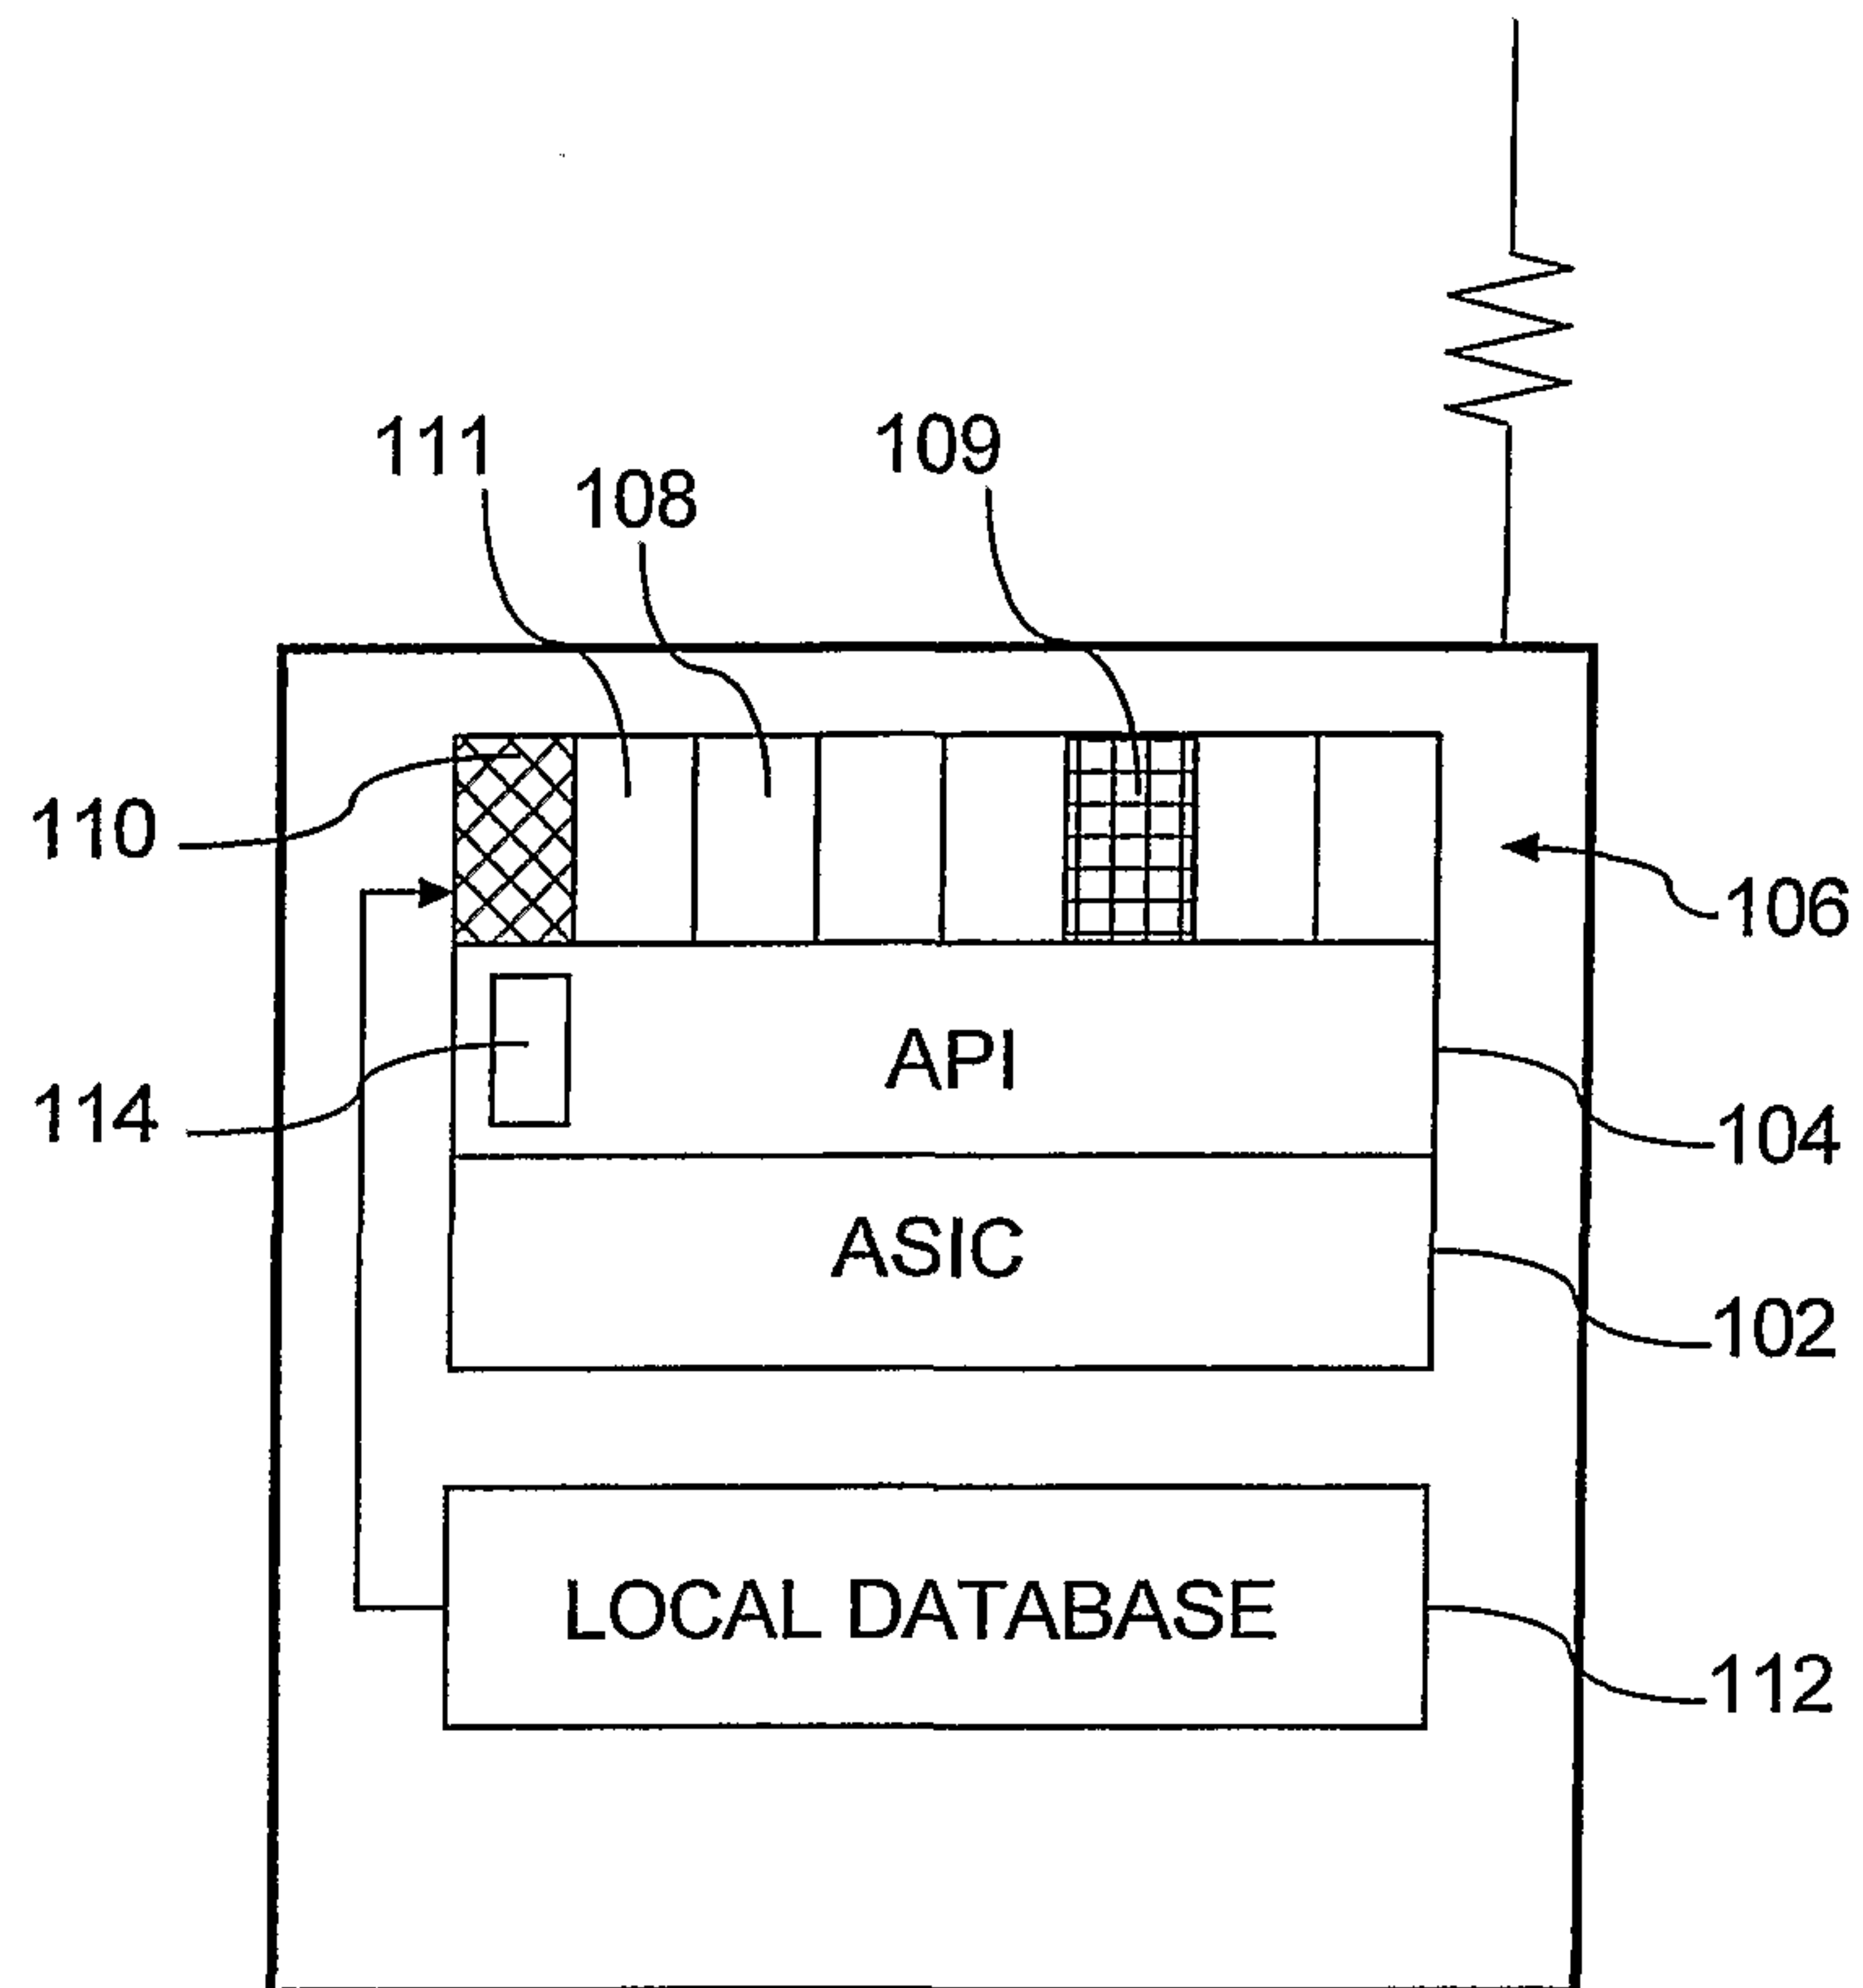
means for sending one or more polling messages to a recall command source prompting the recall command source to transmit the recall command.

63. A computer-readable medium comprising machine-readable instructions stored thereon for causing a computer to perform the method of any one
5 of claims 41 to 51.

1/6

FIGURE 1

100



2/6

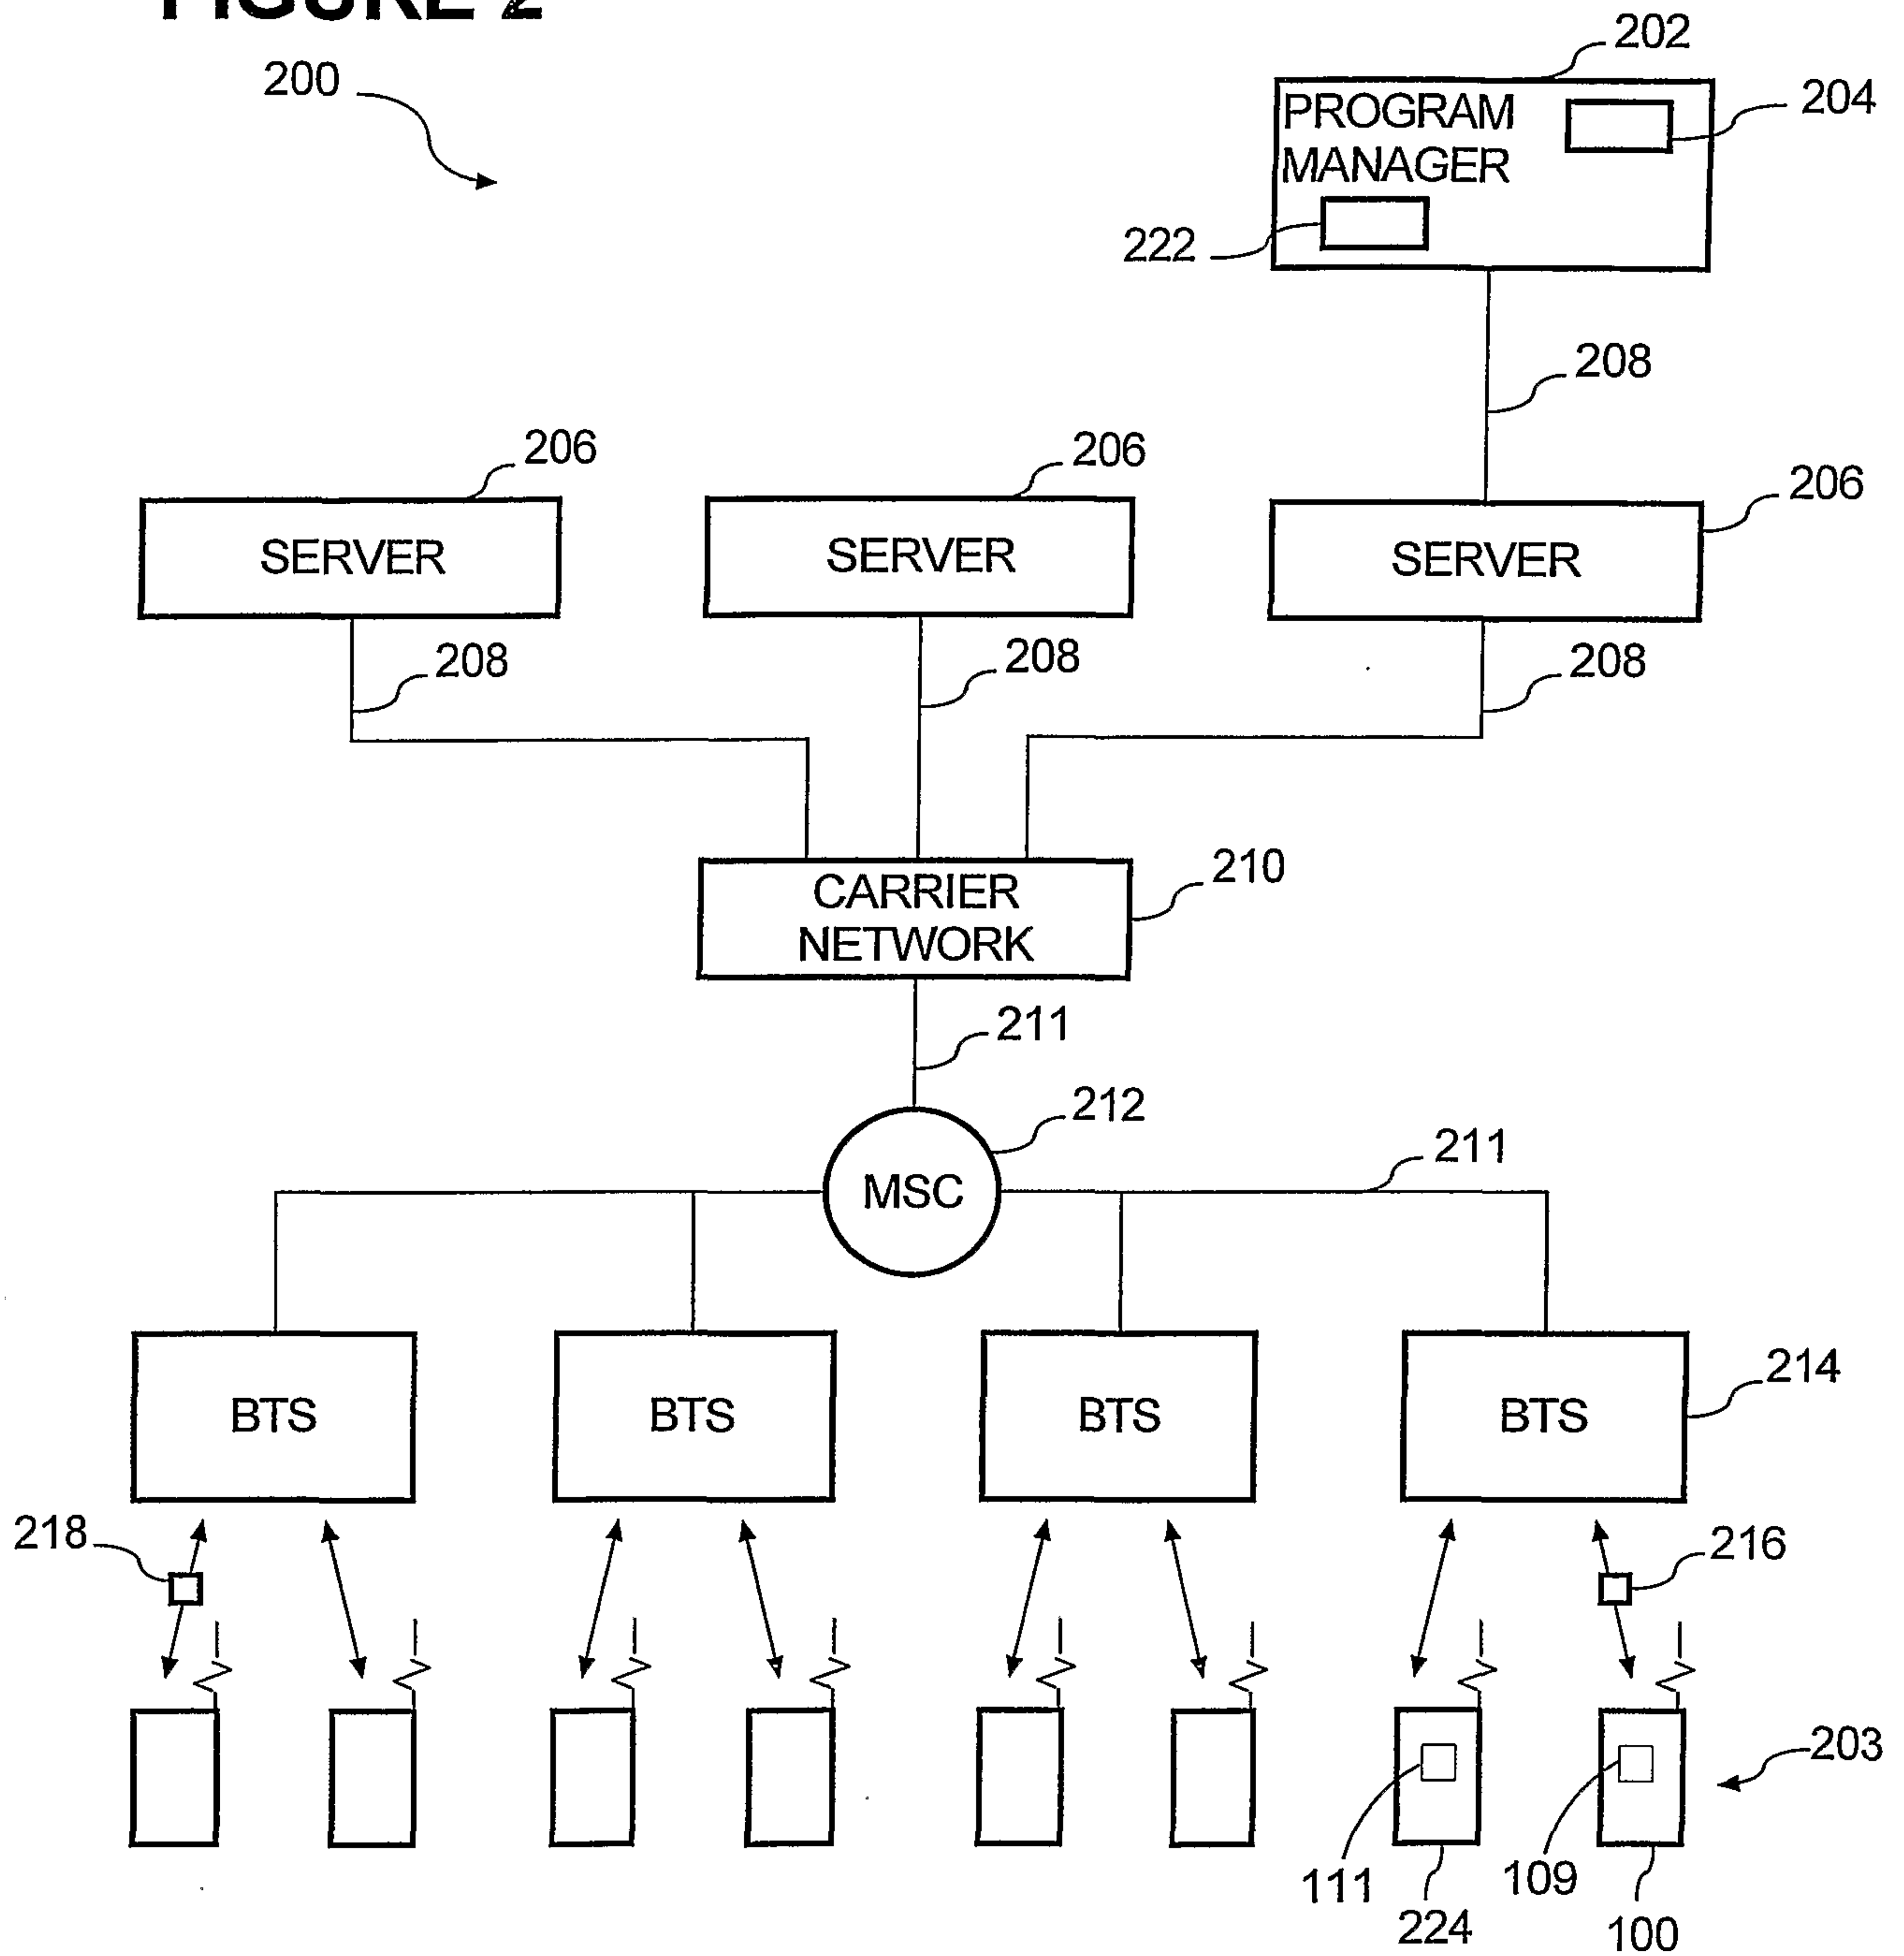
FIGURE 2

FIGURE 3a PROGRAM MANAGER DATABASE

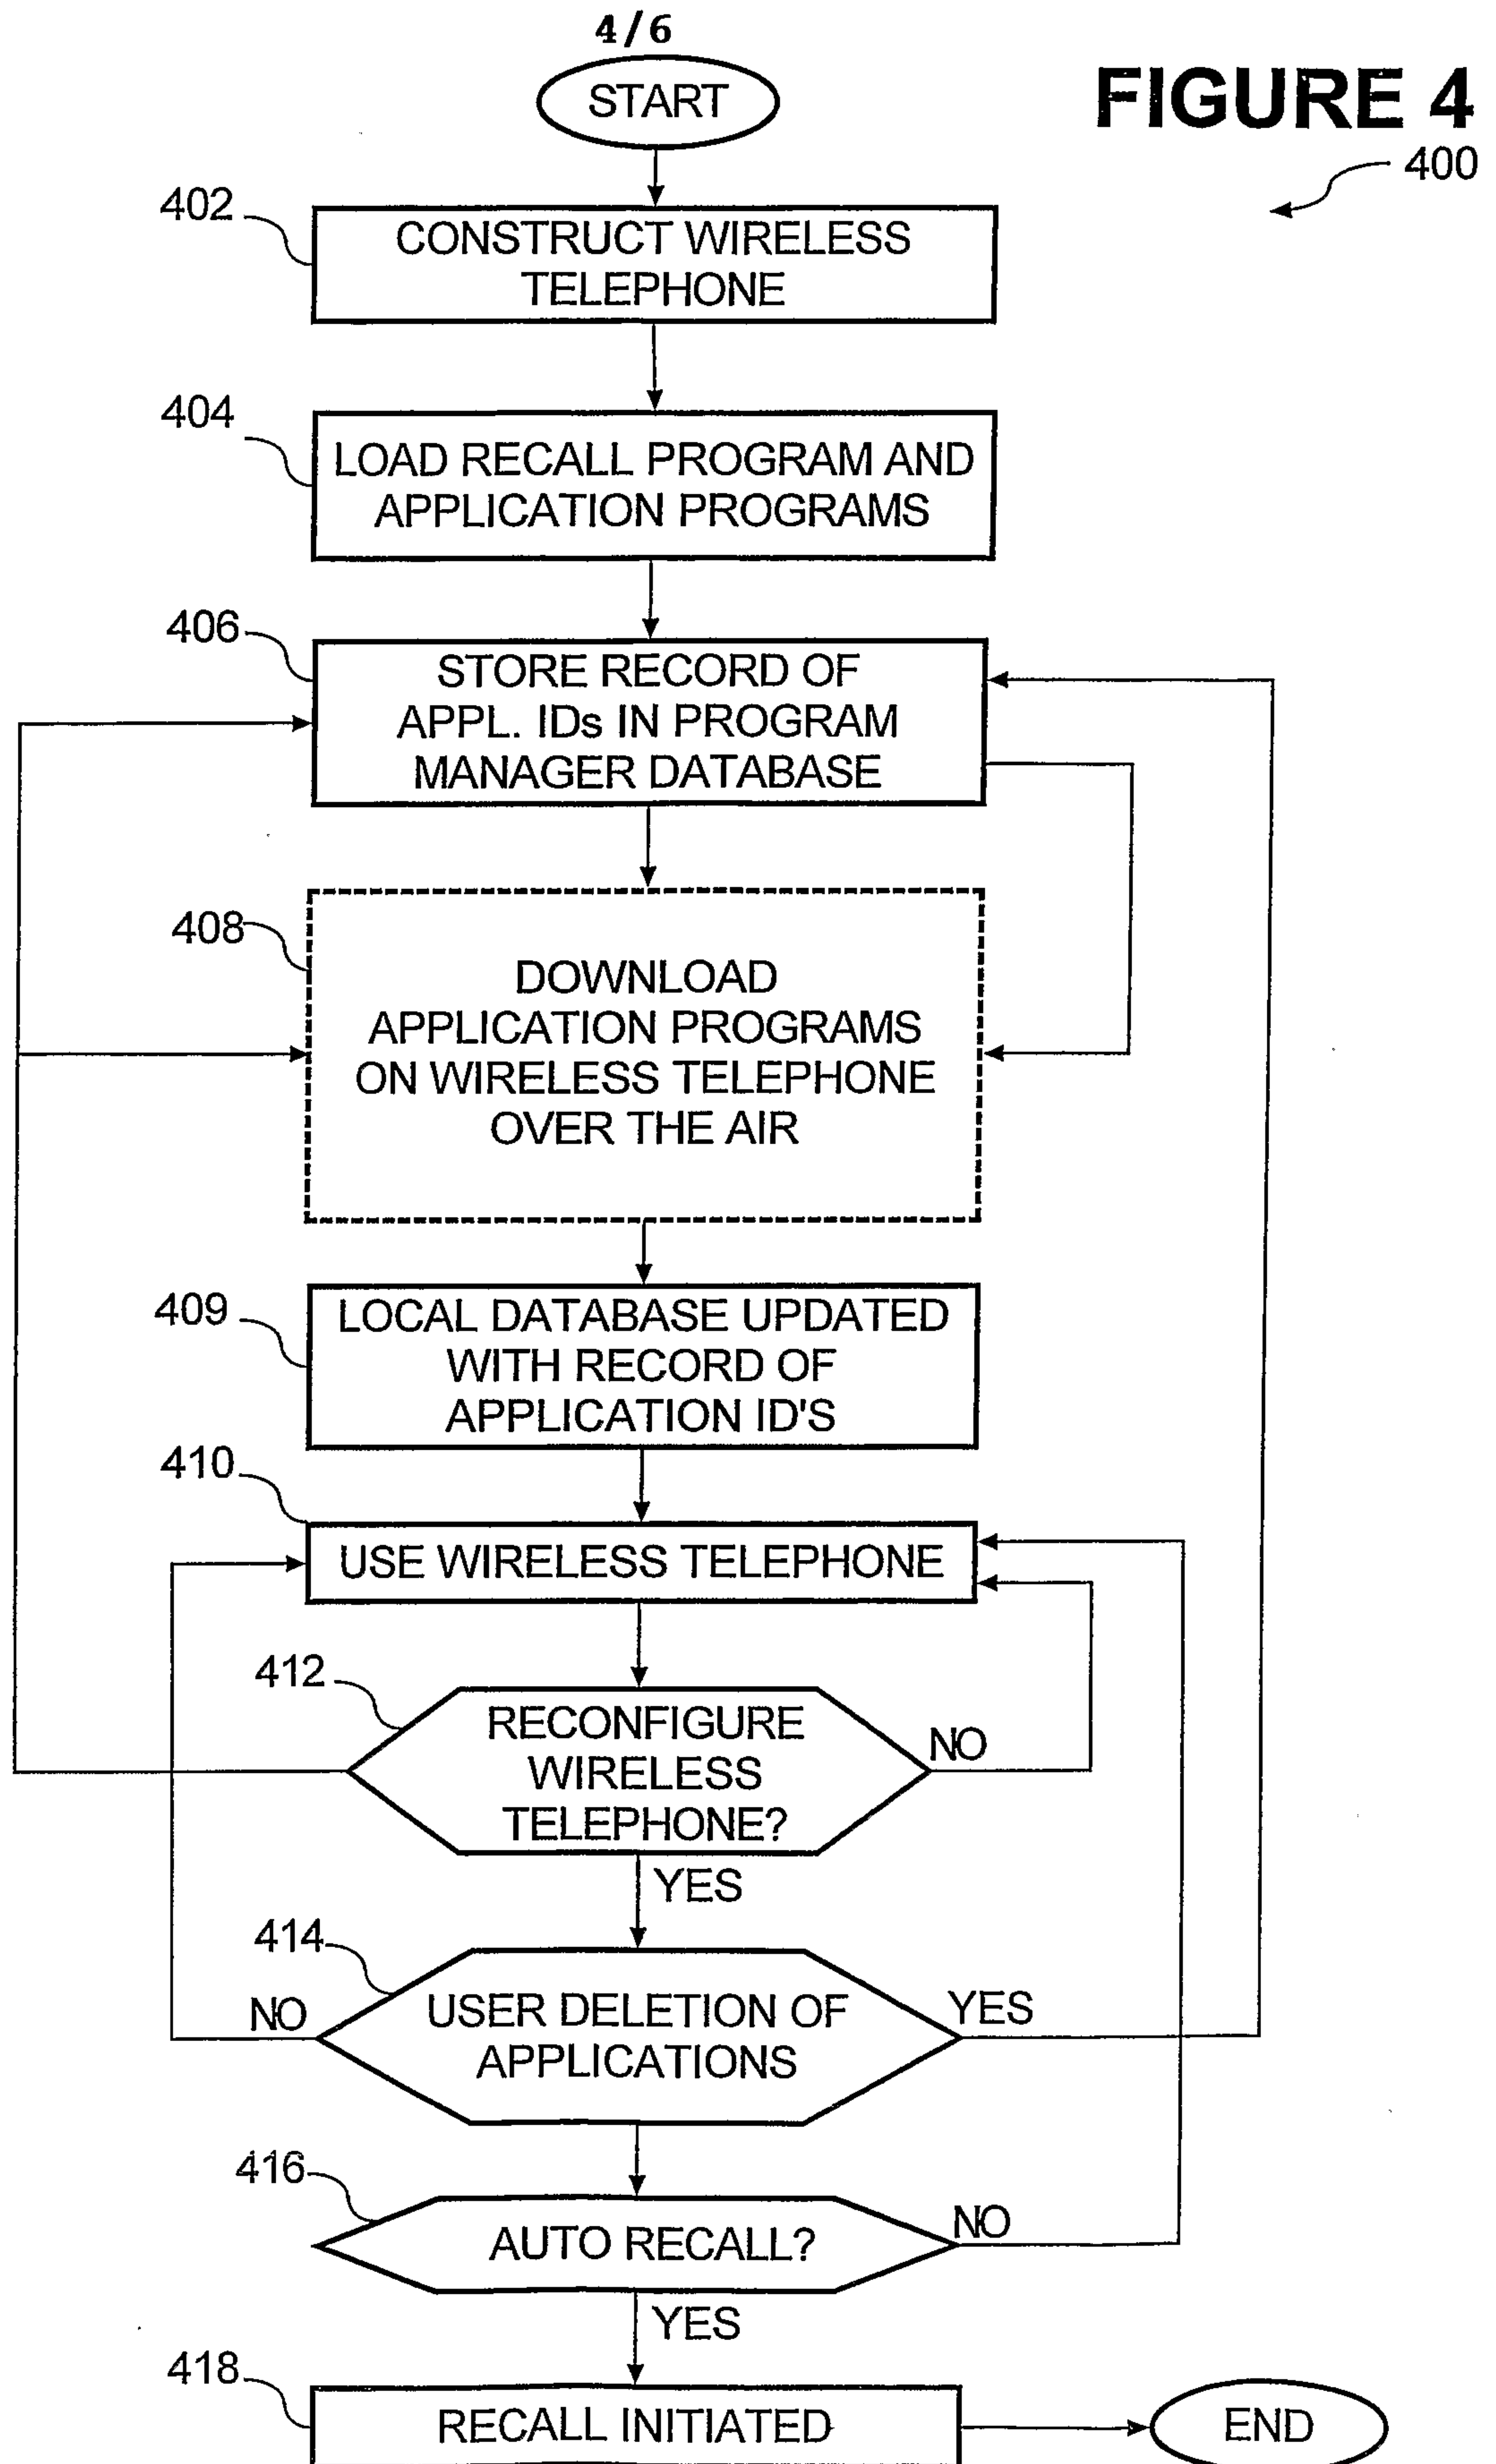
204

302	304	306	308	310	312
APPLICATION ID FOR APPLICATION PROGRAMS	ESN OF INDIVIDUAL WHO DOWNLOADED APPLICATION PROGRAMS	MIN (MOBILE IDENTIFICATION NUMBERS)	PHONE MODEL	CARRIER	REGION
TETRIS™ 100X	9002X	(363) 555-4613	SONY™ 3250	ATT™	CA
TABLE TENNIS 102Y	9003X	(496) 555-9629	SAMSUNG™ 9840	AIR-TOUCH™	CA
RACECAR 104Z	9004X	(903) 555-9671	QEST 2001	QRSTU	CA

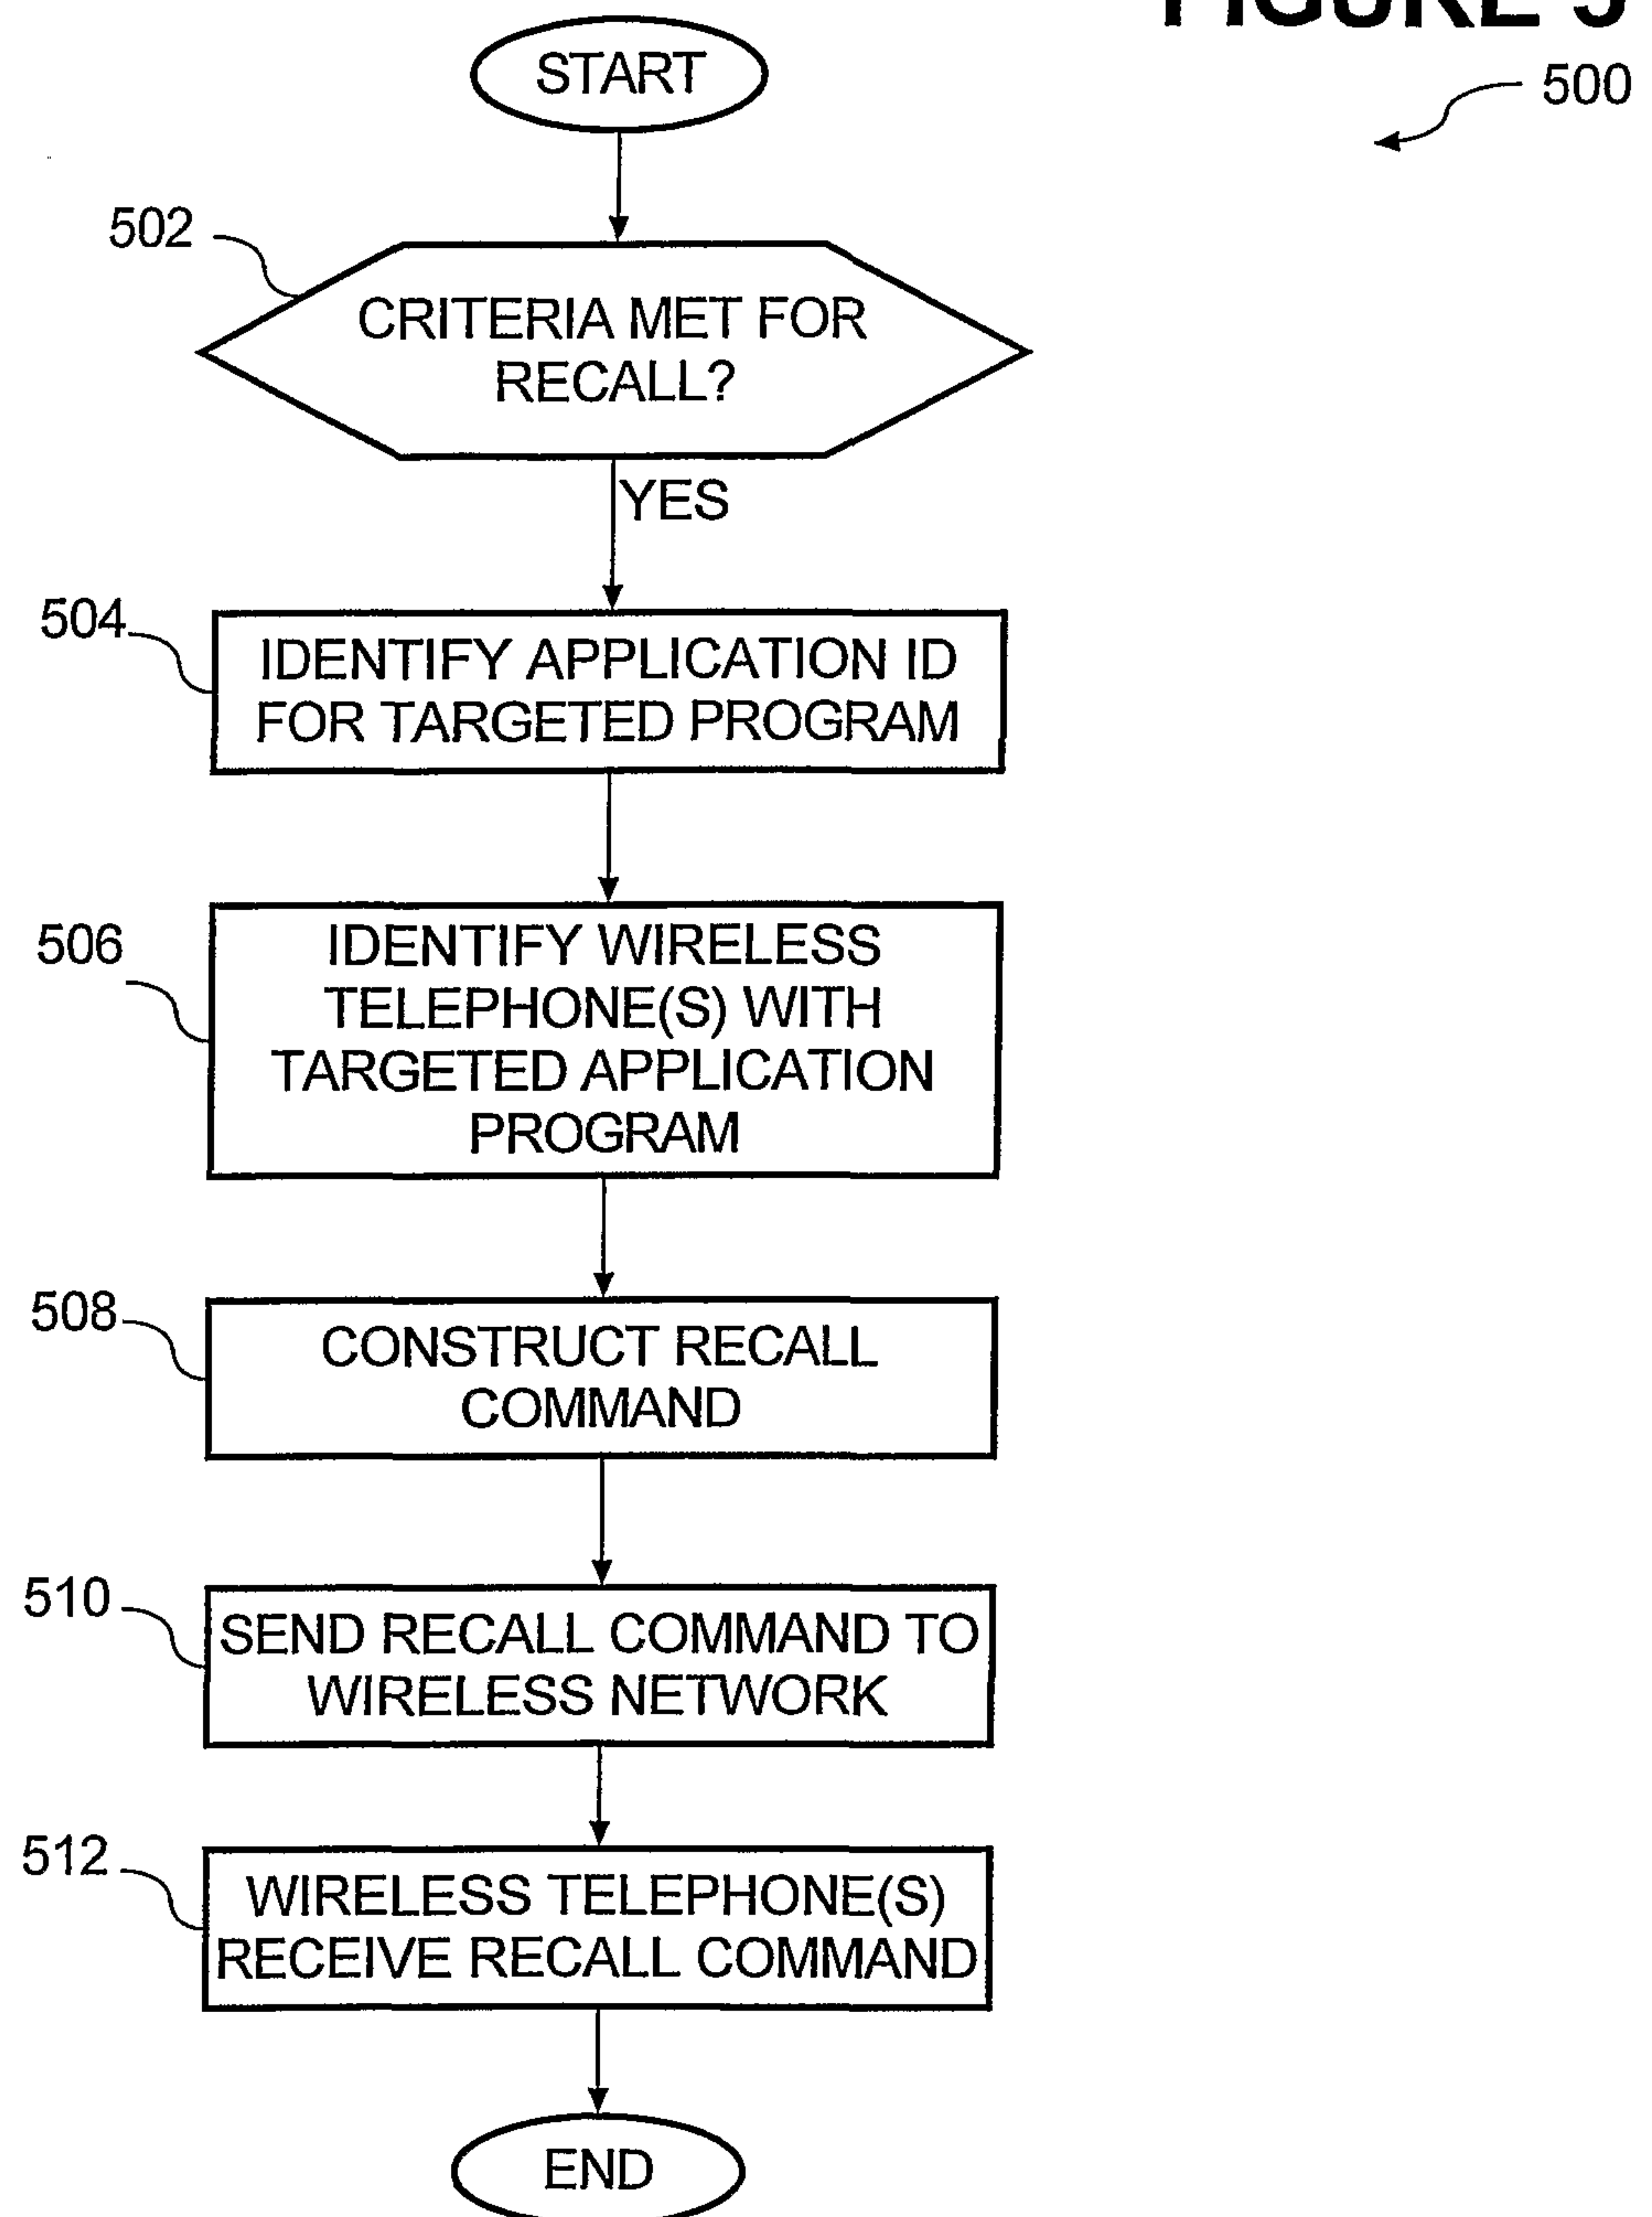
FIGURE 3b LOCAL DATABASE OF APPLICATION PROGRAMS

112

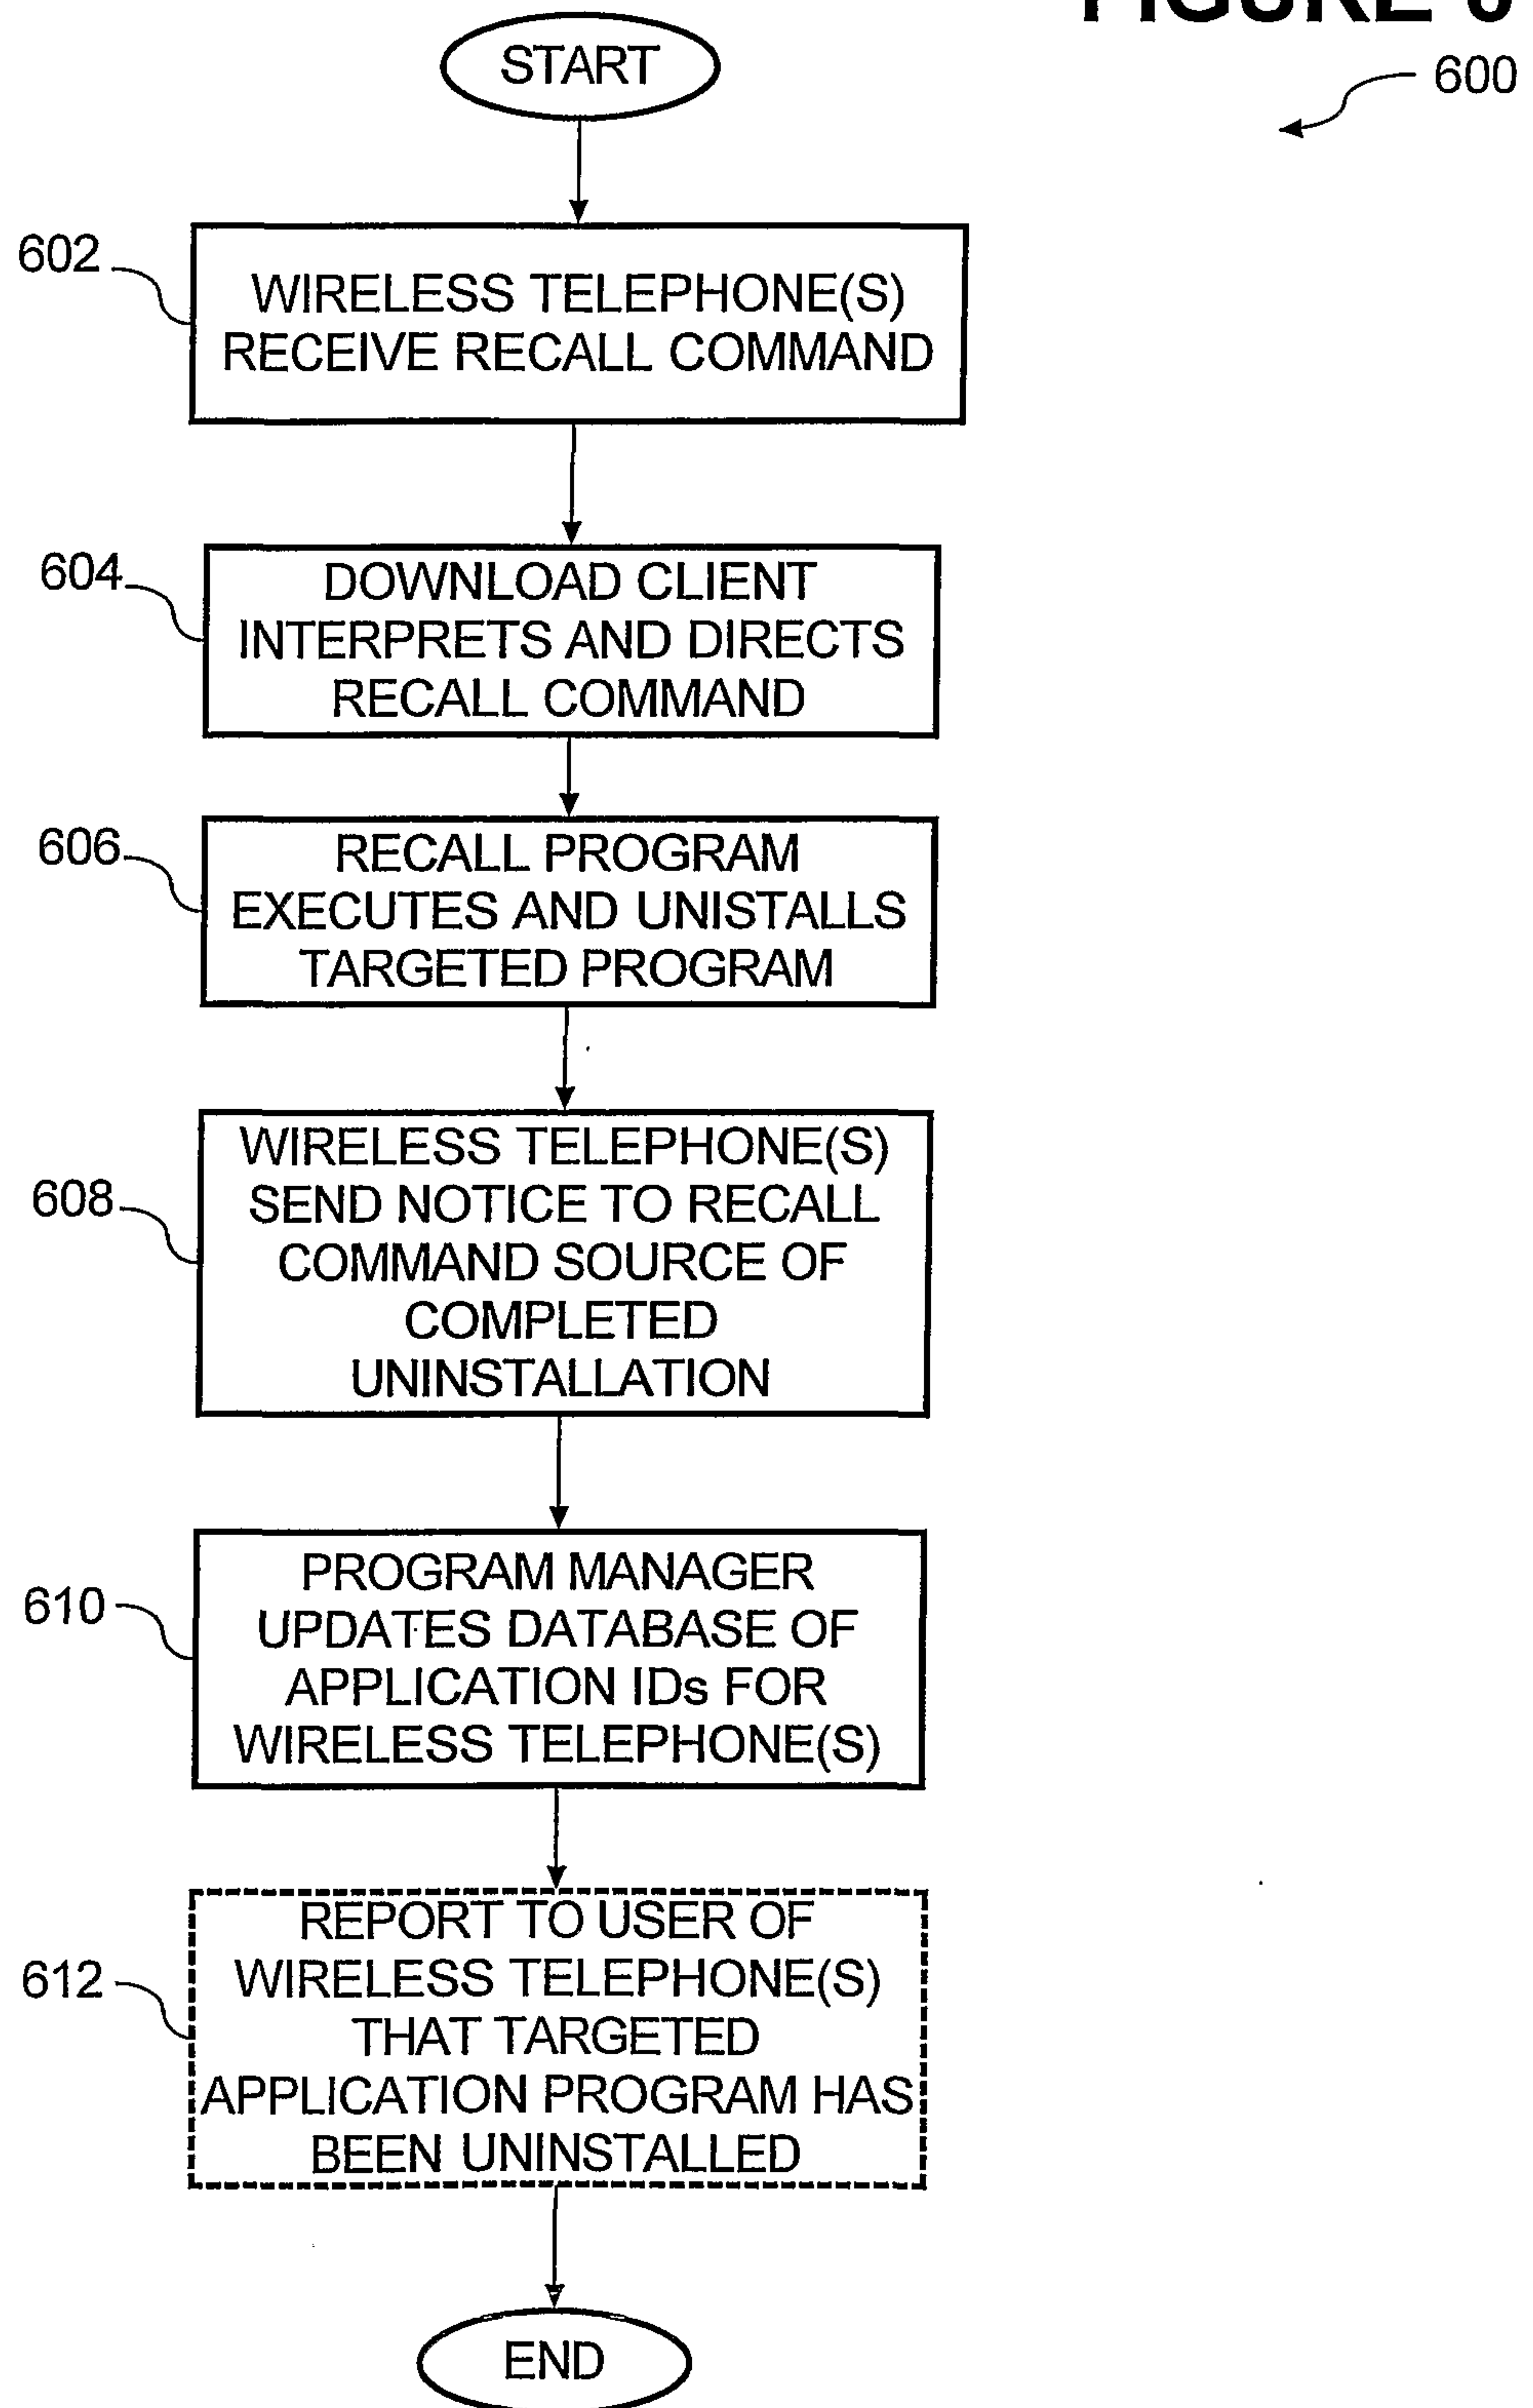
302	314
APPLICATION ID FOR APPLICATION PROGRAMS	LOCATION OF APPLICATION PROGRAM ON WIRELESS TELEPHONE
TETRIS™ 100X	Z012
TABLE TENNIS 102Y	Y015
RACECAR 104Z	X021

FIGURE 4

5/6

FIGURE 5

6/6

FIGURE 6

START

400

402
CONSTRUCT WIRELESS
TELEPHONE

404
LOAD RECALL PROGRAM AND
APPLICATION PROGRAMS

406
STORE RECORD OF
APPL. IDs IN PROGRAM
MANAGER DATABASE

408
DOWNLOAD
APPLICATION PROGRAMS
ON WIRELESS TELEPHONE
OVER THE AIR

409
LOCAL DATABASE UPDATED
WITH RECORD OF
APPLICATION ID'S

410
USE WIRELESS TELEPHONE

412
RECONFIGURE
WIRELESS
TELEPHONE?

NO

YES

414
NO
USER DELETION OF
APPLICATIONS

YES

416
AUTO RECALL?

NO

YES

418
RECALL INITIATED

END

