US 20070130845A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2007/0130845 A1

Halverson (43) Pub. Date: Jun. 14, 2007

(54) MODULAR SHOOTING RANGE

(75) Inventor: **Michael D. Halverson**, Las Vegas, NV (US)

Correspondence Address:
WORKMAN NYDEGGER
(F/K/A WORKMAN NYDEGGER & SEELEY)
60 EAST SOUTH TEMPLE
1000 EAGLE GATE TOWER
SALT LAKE CITY, UT 84111 (US)

(73) Assignee: **Michael D. Halverson**, Las Vegas, NV

(21) Appl. No.: **11/674,307**

(22) Filed: **Feb. 13, 2007**

Related U.S. Application Data

(62) Division of application No. 11/189,511, filed on Jul. 26, 2005.

(60) Provisional application No. 60/615,433, filed on Oct. 1, 2004. Provisional application No. 60/692,402, filed on Jun. 21, 2005.

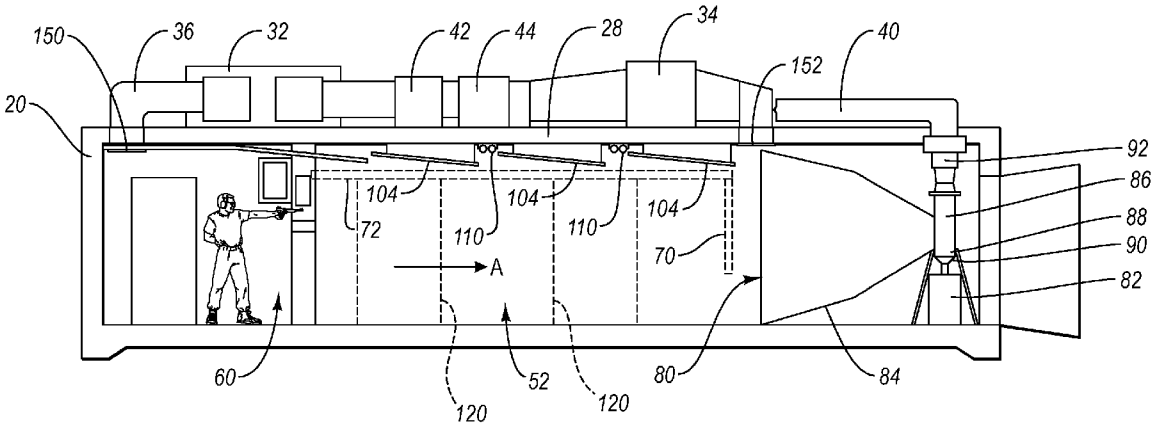
Publication Classification

(51) **Int. Cl.**
E04H 6/00 (2006.01)

(52) **U.S. Cl.** **52/79.1**

(57) **ABSTRACT**

Disclosed is a modular, expandable, and portable shooting range system. The system can include one or more shooting modules that mount together to provide different numbers of shooting lanes with various lengths. The shooting modules are pre-engineered with removable panels to permit additional shooting modules to be added on as customer orders. This configuration also permits adding to the length of the shooting range to accommodate firing of different weapons. The shooting range system can further include a control booth which is divided from the shooting lanes. The control booth can be integrally formed with the shooting modules, or can be separate. The control booth can include a module control which allows a person to control lighting, air, and target control systems of the shooting range system, and can further provide a safe location to view the range.



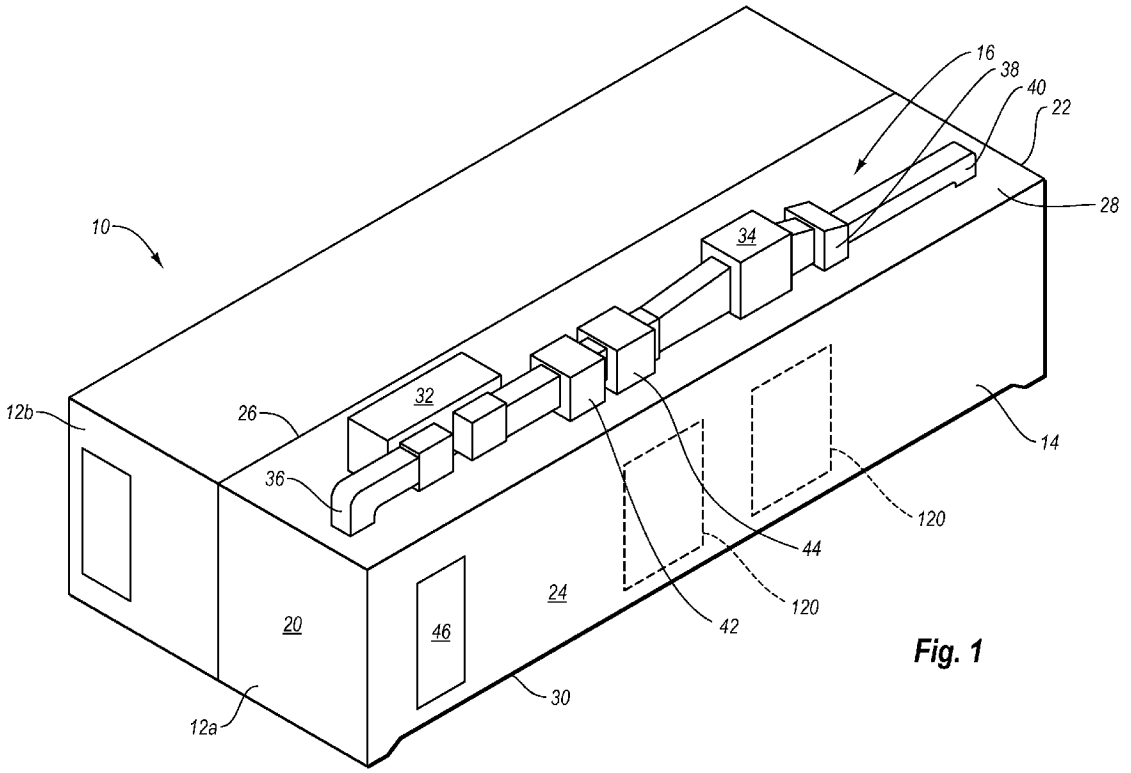


Fig. 1

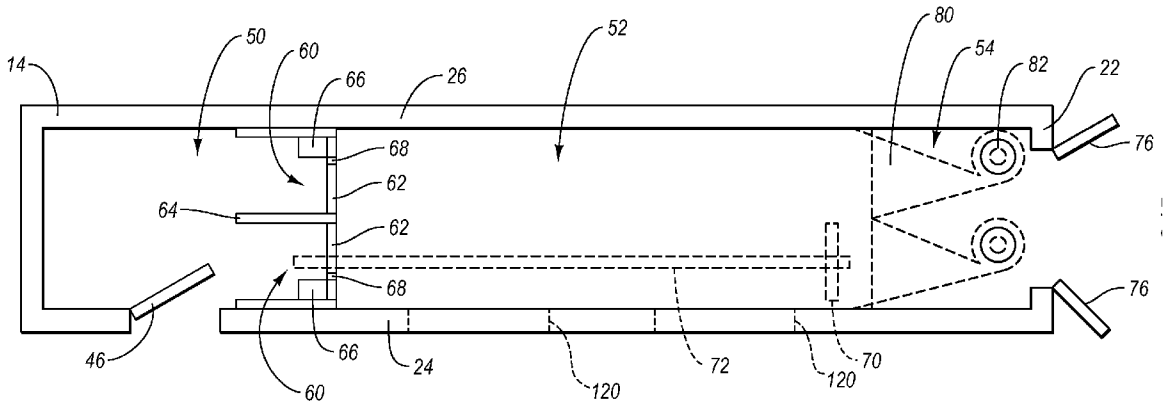

14
50
60
66
26
52
80
54
82
22
76
68
62
64
62
68
76
46
66
24
120
72
120
70
60

Fig. 2

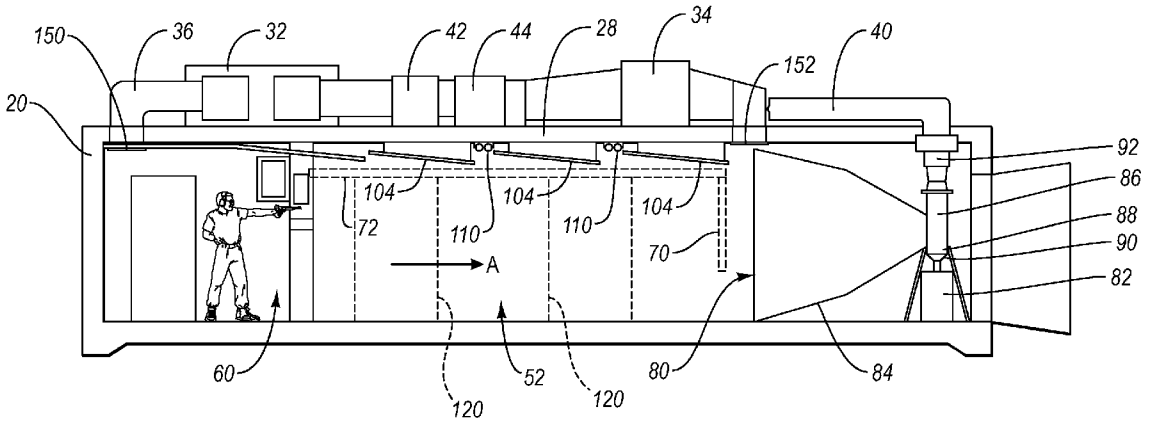

150
36
32
42
44
28
34
152
40
20
92
86
88
90
82
104
72
110
104
110
104
70
A
60
52
120
120
80
84

Fig. 3

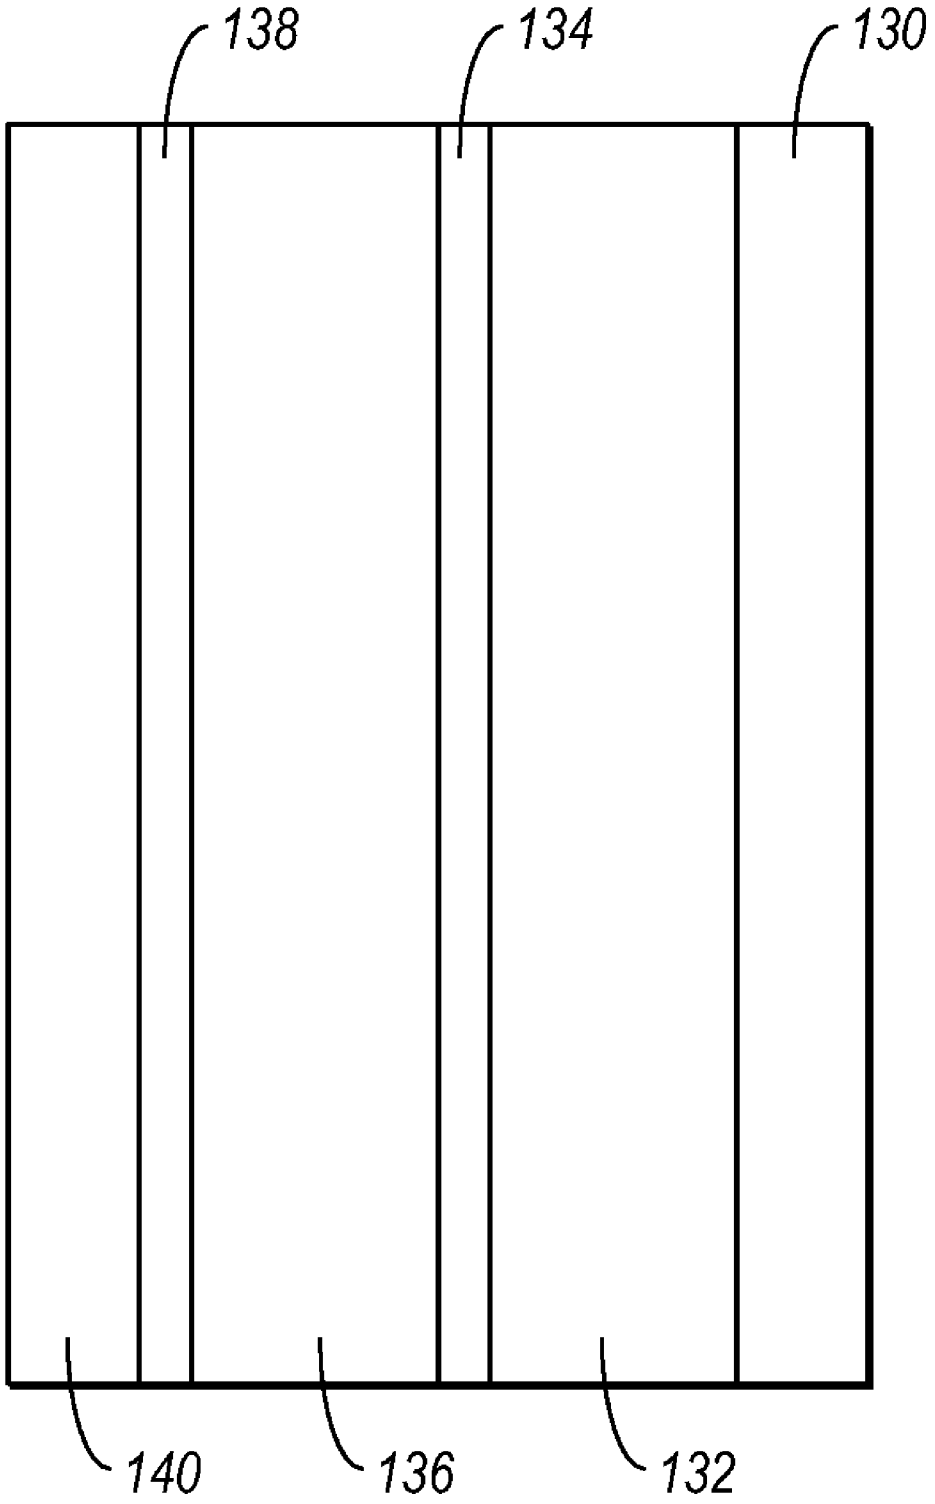


Fig. 4

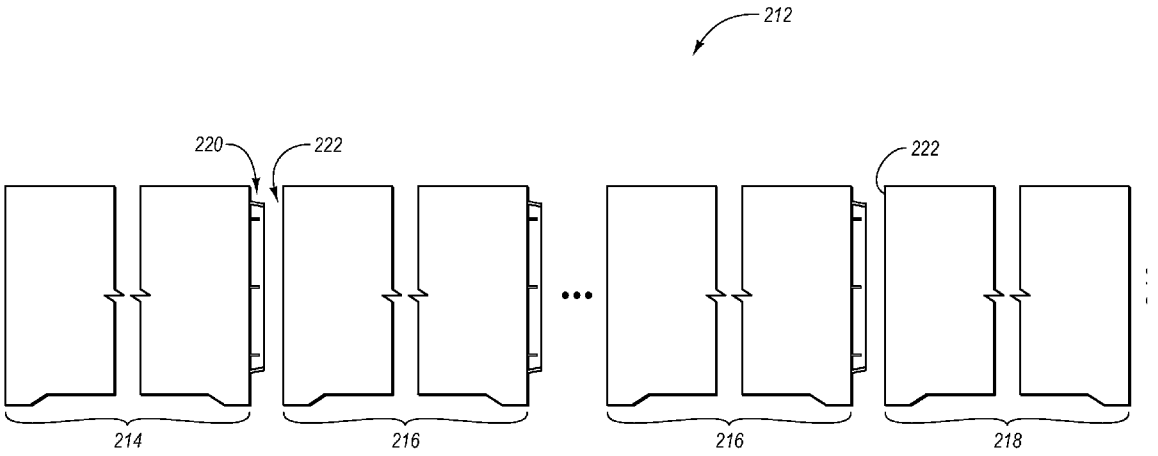


Fig. 5

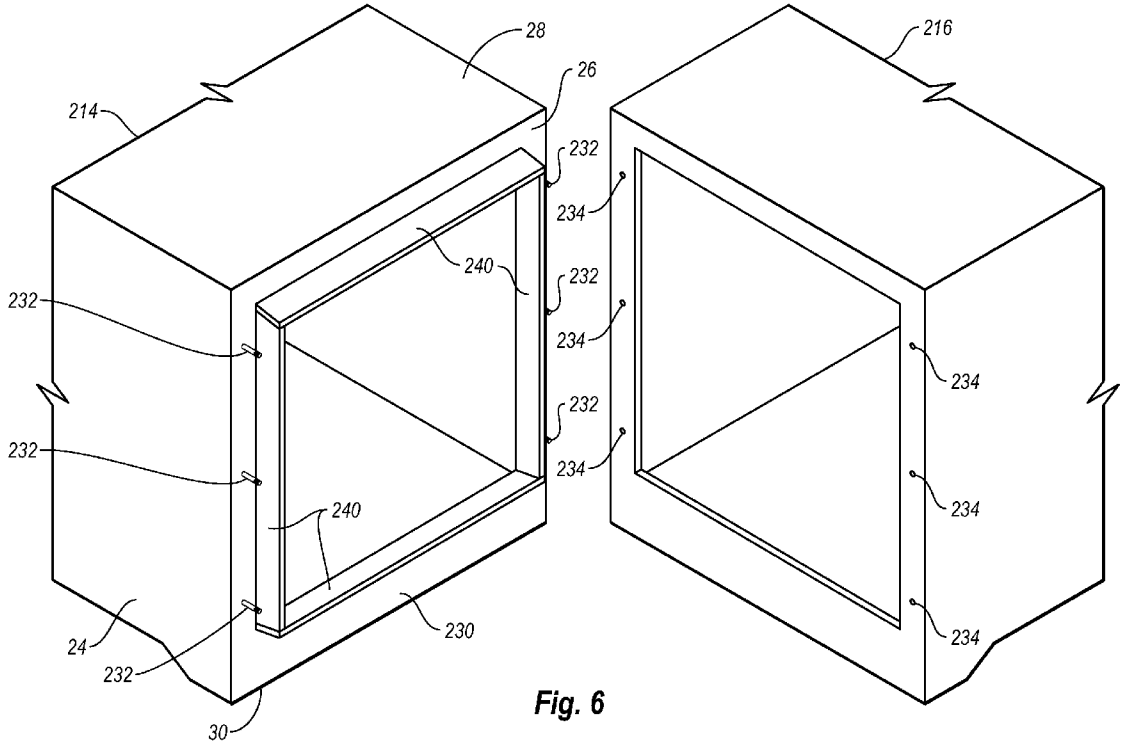

28
26
214
232
234
240
232
234
232
232
234
240
234
234
24
232
230
234
30

Fig. 6

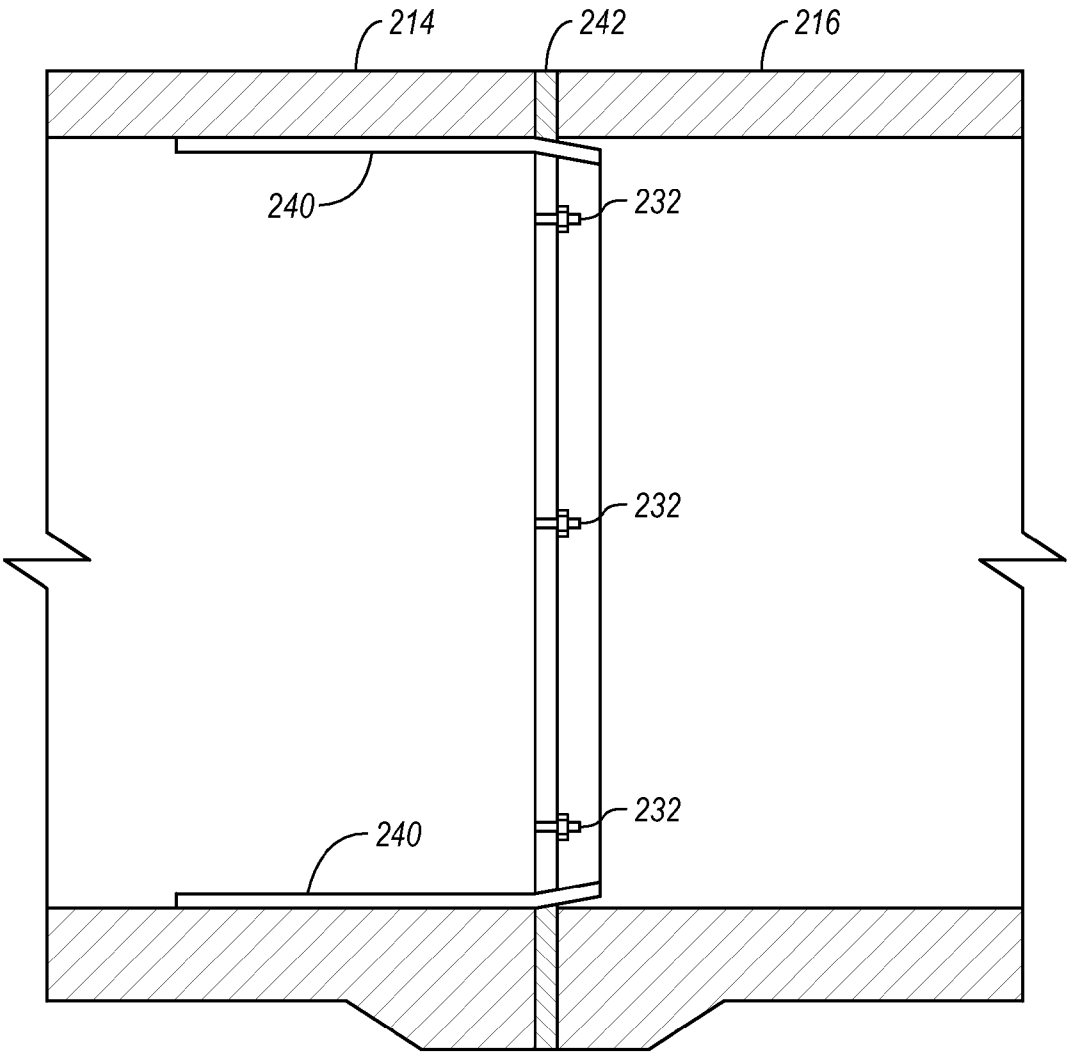


Fig. 7

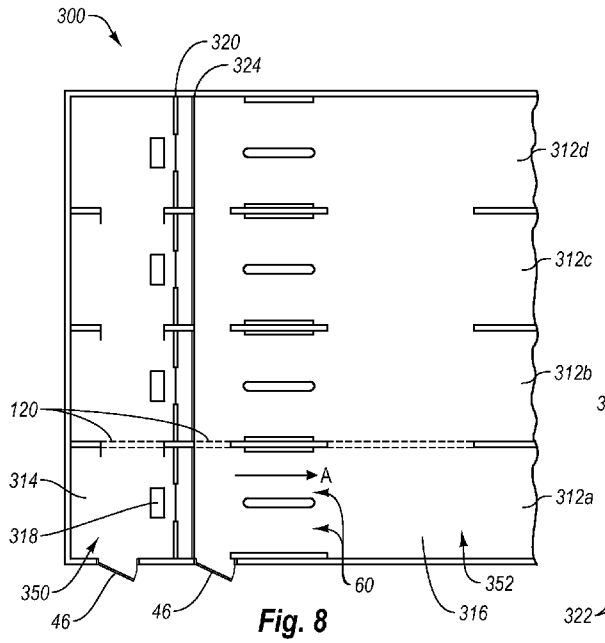

300
320
324
312d
312c
312b
312a
120
314
318
350
46
46
A
60
352
316

Fig. 8

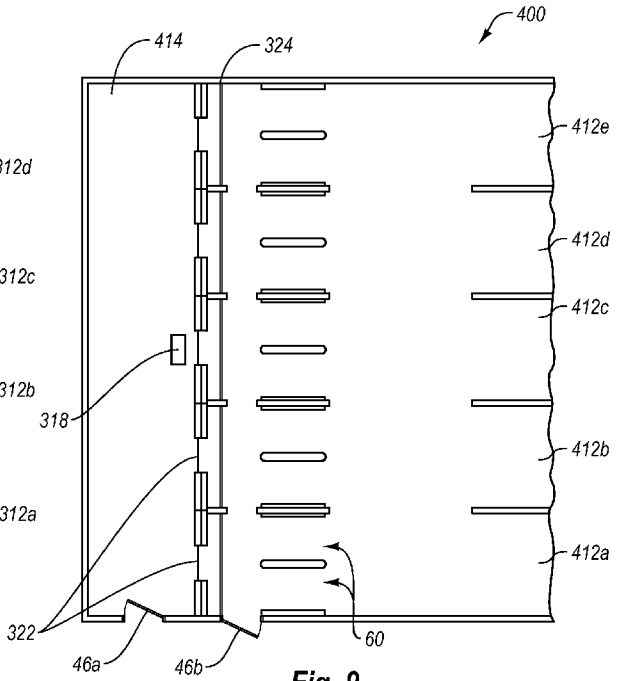

400
414
324
412e
412d
412c
412b
412a
318
322
46a
46b
60

Fig. 9

MODULAR SHOOTING RANGE

RELATED APPLICATIONS

[0001] This application is a division of U.S. patent application Ser. No. 11/189,511, filed Jul. 26, 2005, entitled "Modular Shooting Range, which application claims the benefit and priority of U.S. Provisional Patent Application Ser. No. 60/615,433, filed Oct. 1, 2004, entitled "Portable Firing Range", and also claims the benefit of and priority to U.S. Provisional Patent Application Ser. No. 60/692,402, filed Jun. 21, 2005, and entitled "Containerized Shooting Range", the disclosure of which are all incorporated herein by this reference.

BACKGROUND OF THE INVENTION

[0002] 1. The Field of the Invention

[0003] The present invention generally relates to facilities designed for weapons or firearms training and practice, commonly known as shooting ranges. More specifically, the present invention relates to modular shooting ranges that can be assembled, disassembled, and transported simply and efficiently.

[0004] 2. The Relevant Technology

[0005] Existing shooting ranges are generally permanent facilities constructed on site. These ranges can be either outdoor or indoor shooting ranges. For outdoor shooting ranges permanent shooting stations, target areas, bullet stops, etc. are constructed on a large plot of land. Although outdoor shooting ranges are designed with safety are a primary consideration, there is, however, the possibility of injury to participants and onlookers within a large surface danger zone. For instance, participants, onlookers, and those unauthorized persons walking in the danger zone can be injured from accidental misfires which may not be directed toward the targets.

[0006] Noise also can be a problem with an outdoor shooting range. To alleviate this problem, many outdoor shooting ranges are initially located in a remote area. Unfortunately, the area surrounding the shooting range typically becomes developed for other commercial or for residential purposes. Various steps can be taken to lessen noise somewhat, but the only practical solution to encroachment may be to abandon the shooting range and construct a new range in another area. This can be expensive and time consuming to accomplish due to the significant environmental impact caused be embedded lead within the soil and the resultant clean-up costs associated with a move.

[0007] In addition to the above, outdoor ranges are typically only used when the weather permits. In cold climates the limited time during which the range may be used may not justify the cost of the large area required and the expense of construction.

[0008] To alleviate some of the above problems, another type of shooting range can be used, such as an indoor shooting range. These ranges are typically installed inside a building structure or the like. Again, a disadvantage of such shooting range is that it is stationary. Also the cost of operating such indoor ranges is high because of expense of building the structure or the necessary rental of the premises.

[0009] Still another type of mobile shooting ranges uses a modified tractor trailer. Unfortunately, this type of shooting range is not expandable in width or length. In addition, because of the elevated position of the compartment of the trailer, it is difficult to access. Further, it is difficult to install the tractor trailer-type shooting range within a building due to the inclusion of the wheels and the height of the trailer.

BRIEF SUMMARY OF THE INVENTION

[0010] A need therefore exits for a shooting range system that can be inexpensive to operate and eliminates many of the problems associated with existing outdoor and indoor shooting ranges. The present invention generally relates to a shooting range system that is modular in construction to permit expandable capabilities and be moveable to allow for operation at alternative site locations. Advantageously, the modular shooting range system can be pre-engineered to enable simple and efficient movement of the shooting range system as needed. The shooting range system can be built at a location and be operational through simply providing electrical power to the modular shooting range system. The system can be designed with complete ventilation, optional removable panels, and a structure resistant to penetration by projectiles and inhibit ricochets.

[0011] One aspect is a system that uses modular shooting containers that can be mounted together to create a shooting range having any desired length and number of shooting positions. Advantageously, the modular shooting range system can be easily and efficiently expanded over time to provide flexibility with the types of weapons fired within the shooting range and the number of available shooting positions.

[0012] Another aspect is a system that limits the environmental impact caused by use of the modular shooting range system. Advantageously, the modular shooting range system can filter gases and airborne particles produced during firing of a weapon and can collect bullets, shot, and other projectiles for simple disposal. Harmful gases, airborne particles, or used bullets, shot, or projectiles can be collected and prevented from exiting the modular shooting range in an uncontrolled manner.

[0013] Still another aspect is a system that can be used for tactical training. Advantageously, each shooting container of the modular shooting range system can include one or more removable panels to allow access between adjacent shooting containers. This provides flexibility with the training scenarios used with the modular shooting range system and so provides a system to increase the readiness of those using the modular shooting range system.

[0014] Yet another aspect is a system that can be safely transported without damaging the shooting containers or modules of the modular shooting range system. With each shooting container or module pre-engineered for structural integrity when one or more of the panels are removed, the modular shooting range system can still be disassembled, transported, and re-assembled without damaging each shooting container.

[0015] In one embodiment, the system can include a shooting container having a one or more shooting positions from which individuals can shot firearms, means for collecting bullets, shot, or projectiles shot from the firearm, and

means for ventilating the air and gases within the shooting container. Optionally, the shooting container can include removable panels to enable users of the shooting container to move between shooting containers positioned adjacent one to another during tactical training and usage of the modular shooting system.

[0016] In another embodiment the system can include one or more shooting containers that can mount together to create one or more shooting lanes from which an individual can fire a weapon. A first shooting container can include one or more shooting positions, while a second shooting container can include means for collecting one or more bullets or projectiles received from the first shooting container. Depending upon the particular length of the system, one or more intermediate shooting containers can be disposed between the first shooting container and the second shooting container. Mountable to the first shooting container, the second shooting container, and/or the one or more intermediate shooting containers is a ventilation system that filters gases and particulates generated through use of the modular shooting range system.

[0017] In still another embodiment of the system, a control booth is connected to one or more shooting modules and allows a range controller to operate any or all of the electrical, lighting, cooling, heating, or target retrieval systems within the shooting range system. The control booth may be integrally manufactured with the one or more shooting modules, and may have removable panels such that it is expandable as additional shooting modules are added. Alternatively, the control booth can be a separate module which is later connected to the one or more shooting modules. In either configuration, the environment of the control booth can be separated from the shooting module environment, and the control booth can have a separate heating, cooling, and/or ventilation system.

[0018] These and other objects and features of the present invention will become more fully apparent from the following description and appended claims, or may be learned by the practice of the invention as set forth hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] To further clarify the above and other advantages and features of the present invention, a more particular description of the invention will be rendered by reference to specific embodiments thereof which are illustrated in the appended drawings. It is appreciated that these drawings depict only typical embodiments of the invention and are therefore not to be considered limiting of its scope. The invention will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

[0020] FIG. **1** illustrates a perspective view of a system according to one embodiment of the present invention;

[0021] FIG. **2** illustrates a cross-sectional top view of a shooting container of the system of FIG. **1**;

[0022] FIG. **3** illustrates a cross-sectional side view of the shooting container of FIG. **2**;

[0023] FIG. **4** illustrates a cross-sectional view of a wall of the shooting container of FIGS. **2-3**;

[0024] FIG. **5** illustrates a side view of another system according to the present invention;

[0025] FIG. **6** illustrates an perspective view of the male-type connection and the female-type connection of the system of FIG. **5**;

[0026] FIG. **7** illustrates a cross-sectional side view of the system of FIG. **5** of the present invention;

[0027] FIG. **8** illustrates a cross-sectional top view of another system according to the present invention; and

[0028] FIG. **9** illustrates a cross-sectional top view of still another system according to the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0029] The present invention generally relates to a shooting range system that is modular in construction to permit expandable capabilities and be moveable to allow for operation at alternative site locations if needed. Through simply providing electrical power, the modular shooting range system can be operational for use. The system can be designed with complete ventilation, optional removable panels, and a structure resistant to penetration by projectiles and inhibit ricochets.

[0030] Turning to FIG. **1**, illustrated is a perspective view of a shooting range system **10** according to the present invention. As illustrated, shooting range system **10** includes two shooting range modules; a first shooting range module **12***a* and a second shooting range module **12***b*. These shooting range modules **12***a* and **12***b* are mounted together to create the shooting range system **10** and provide flexibility to indoor training and testing. Although two shooting range modules **12***a* and **12***b* are illustrated, it can be understood by those skilled in the art that the shooting range system **10** can include one or more shooting range modules. The shooting range system **10** of FIG. **1** is illustrated in an expanded width configuration; however, other shooting range module configurations enable the shooting range system to expand to varying widths, lengths, and optionally heights.

[0031] The following discussion will be directed to the first shooting range module **12***a*, however a similar discussion may be made for the second shooting range module **12***b*. As such, in the discussion of FIG. **1** we shall use the phrase "shooting range module **12**" to refer to either of the first shooting range **12***a* or the second shooting range **12***b*.

[0032] As illustrated, shooting range module **12** can include a shooting container **14** to which is mounted a ventilation system **16**. The shooting container **14** can have a general elongated configuration having a first end **20**, a second end **22**, walls **24** and **26**, and a top and bottom **28** and **30**, respectively. In one configuration, the shooting container **14** is a modified shipping container having varying lengths, widths, and heights. The shipping container or the shooting container **14** can be fabricated from a metal, metal alloy, or other material sufficient to provide the desired strength and rigidity and provide some resistance to bullets, shot, or projectiles fired at the first end **20**, the second end **22**, the walls **24** and **26**, the top **28**, and the bottom **30**.

[0033] Mounted to the top **28** is part of the ventilation system **16**. The ventilation system **16** can include a heating and air conditioning system **32**, optionally with an integral

or separate intake fan, which can cool or heat air that is directed to an interior of the shooting container **14** by way of an inlet duct **36**. This air, and any gases and airborne particles generated through use of the shooting system **10**, can be removed from the interior of the shooting container **14** and filtered using a filter **34** and ducts **38** and **40**. With this configuration, the interior of the shooting container **14** can be heat, cooled, and the air within ventilated to prevent particles and gases from being incident upon an individual using or outside the shooting range system **10** of the present invention.

[**0034**] The heating and air conditioning unit **32** can receive air from outside the ventilation system **16**, such as by way of an inlet port **42**. A fan **44** disposed between the inlet port **42** and the filter **34** can aid in drawing the air, airborne particles, and gases from within the shooting container **14** and optionally aid with drawing air from outside the ventilation system **16** into the ventilation system. Optionally, the fan **44** can function as the air intake fan associated with the heating and air conditioning unit **32**.

[**0035**] The filter **34** can be a High-Efficiency Particulate Air (HEPA) filter with up to 99.9% HEPA quality air. Air passed through the filter **34** will be exhausted with no hazardous lead or other airborne contaminant. This provides an environmentally safe shooting range system **10** and provides the desired air quality for the safety of the shooter, instructor, and those outside the shooting range system **10**. In one configuration, the filter **34** can filter the air within the shooting container **14** at 2000 cubic feet per minute.

[**0036**] It will be understood that other filtration systems or techniques and flow rates higher or lower than 2000 cubic feet per minute are possible. For instance, in another configuration, other mechanical air filters, electronic or electrostatic air cleaners, gas-phase adsorption devices, ultraviolet systems, or combinations thereof can be used to clean and/or purify the air removed from the interior of the shooting container **14**.

[**0037**] Formed in wall **24** of shooting container **14** is a door **46** to provide access to its interior. According to the present invention, the door **46** can be a double-swing or single-swing door. Alternatively, the door **46** can take the form of two separate doors that control access to the interior of the shooting container **14**. For instance, an individual wishing to enter the shooting container **14** will need to open both doors to gain access. This provides additional safety to those entering and exiting the shooting container **14** and also aids with bullet safety and sound attenuation.

[**0038**] Disposed in close proximity to the door **46** is a "Range in Use" light **48**. This light **48** can be illuminated to notify those individuals outside the shooting range system **10** that individuals are shooting or firing weapons within the shooting container **14**. It can be understood that upon illuminating the light **48**, the door **46** can automatically lock to prevent unwanted access to the interior of the shooting range system **10** and limit the possibility of unauthorized access and potential injury.

[**0039**] Turning to FIG. **2**, illustrated is an exemplary interior of the shooting container **14** of the present invention. The interior of the shooting container **14** is generally split into three portions; a first portion **50** from which an individual can fire a weapon, a second portion **52** through which a bullet, shot, or projectile is fired, and a third portion **54** having means for collecting the bullet, shot, or projectile. The first portion **50** can include two firing positions **60** from which an individual can fire a weapon. This results in the shooting container **14** having two shooting lanes. It will be understood that the shooting container **14** can include a greater or lesser number of firing positions **60** and so number of shooting lanes.

[**0040**] As illustrated in FIG. **2**, each firing position **60** can include an overturning or removable support **62** used to support the weapons fired from the shooting position **60**. Separating the two shooting positions **60** can be a dividing wall **64**, with optionally walls mounted to the walls **24** and **26** of shooting container **14**. The dividing wall **64** can be made from bullet-proof and/or anti-rebound material and can also optionally be made of sound-absorbing material. For instance, in one configuration, the dividing wall **64** and the other walls forming part of the shooting station **60** can be manufactured to a level **3** bullet resistant level.

[**0041**] Optionally located at each shooting station **60** are (i) a monitor **66** to view one or more targets **70** located in close proximity to the end of the second portion **52**, and (ii) a controller **68** to control the lighting, air temperature, air pressure, filter usage, and position of the one or more target **70**. For instance, the controller **68** can operate an electronic target retrieval system **72**, such as a movable track, suspended from the ceiling of the shooting container **14** to move the one or more targets **70** and to vary the position of the one or more targets **70** for distance adjustment in live fire training. This eliminates the need for the shooter to travel down range for target shooting. Only one target **70** and one electronic target retrieval system **72** are depicted in FIG. **2**; however, those skilled in the art will appreciate that various other numbers of electronic target retrieval systems and targets can be used.

[**0042**] It can be understood that the first portion **50** can include a separate monitor **66** and controller **68** operable by an instructor or operator of the shooting range system **10** (FIG. **1**). In this manner, the instructor or operator, rather than and optionally in addition to those individuals firing from the shooting positions **60**, can control and monitor the lighting, air temperature, air pressure, filter usage, and position of the one or more target **70**.

[**0043**] In addition to the above, each shooting position **60**, and optionally the first portion **50**, can include a noise suppression mat upon which the shooter can stand while firing his/her weapon. This mat can both suppress noise and provide comfort to the shooter. In one configuration, the mat can be a rubber mat. More generally, any material that can provide the desired comfort to the shooter and noise reduction or suppression can be used.

[**0044**] As illustrated in FIG. **3**, disposed between the first portion **50** and the third portion **54** is the second portion **52**. This second portion **52** aids with directing bullets, shots, or projectiles toward the means for collecting the bullets, shots, or projectiles and providing desired shooting conditions for training. Disposed within the second portion **52**, and optionally the first portion **50** and the third portion **54** are a plurality of deflector assemblies **100**. Each deflector assembly **100** aids to direct misdirected bullets, shots, or projectiles towards the third portion **54**.

[**0045**] The deflection assembly **100** can include a support structure **102** that mounts a deflector structure **104** to the top

28 of the shooting container **14** in an inclined fashion, such as but not limited to an angle of thirty degrees. With the incline of the deflector plates **104** being generally inclined in the direction that bullets, shot, or projectiles traverse the second portion **52**, i.e., in the direction of arrow A, any bullets, shot, or projectiles hitting the deflector plates **104** are directed towards the bullet trap **80**.

[**0046**] The support structure **102** can be any structure that can support and aid with mounting the deflector structure **104** to the shooting container **14**, such as, but not limited, to brackets, mechanical fasteners, adhesives, welds, or other device(s) and/or techniques for mounting one structure to another structure. Optionally, the support structure **102** can be used to vary the angular orientation of the deflector structures **104** relative to each other and to the top **28** of the shooting container **14**. For instance, although reference is made to the angular orientation of the deflector structures **104** being thirty degrees, it will be understood that angular orientations larger and smaller than thirty degrees are possible so long as the deflector structures **104** direct an bullet, shot, or projectile down range toward the means for collecting the bullets, shots, or projectiles.

[**0047**] The deflector structure **104** can be fabricated from a steel plate, such as 9 gauge steel to ⅜ AR 500. In one configuration, the deflector structure **14** has a sandwich configuration with one or more layers of metal, such as but not limited to steel, fiber board, safety wood, and sound proofing or controlling material or noise absorbing material or barriers. For instance, each deflector structure **104** can be at least partially covered with acoustical foam or material sold under the trademark SONEX or any other sound proofing or controlling material or noise absorbing material or barriers. It will be understood that in other configurations the deflector structure **104** can be fabricated from one or more of the above-mentioned materials, so that the deflector structure **104** is fabricated from one or more layers.

[**0048**] As mentioned above, the second portion **52** can include various structures to help direct the bullets, shots, and projectiles to the third portion **54**. These structures direct the bullets, shots, and projectiles toward a means for collecting the bullets, shots, or projectiles disposed at the third portion **54**. The end **22** of the shooting container **14** can include one or more doors **76** to provide access to the means for collecting bullets, shot, or projectiles. In one configuration, the means for collecting bullets, shot, or projectiles can be one or more bullet traps **80** accessible through the doors **76**. Each bullet trap **80** changes the forward inertia and velocity of the bullet, shot, or projectile into rotational motion that allows gravity to force the bullet, shot, or projectile to drop into a removable collecting canister **82**.

[**0049**] The bullet trap **80** can include a funnel-shaped inlet **84** that receives and guides the bullet, shot, or projectile to a collection chamber **86**. As a bullet, shot, or projectile enters the collection chamber **86**, helical structures (not shown) within the collection chamber **86** change the forward velocity to rotational motion that decelerates the bullet, shot, or projectile until it falls to a lower portion **88** of the collection chamber **86** and exits into the collecting canister **82** through a funnel **90** or other structure capable of directing the bullet, shot, or projectile from one structure to another structure. When the collecting canister **82** is full, it can be replaced with an empty collecting canister.

[**0050**] Mounted to an upper portion **92** of the collection chamber **86** is the duct **40**. As the bullet, shot, or projectile traverses the collection chamber **86** any generated airborne particles, dust, or gases can be removed from the collection chamber **86** by the ventilation system **16**. This eliminates any airborne particles and gases that can be hazardous to an individual operating or using the shooting range system of the present invention.

[**0051**] With the configuration described above, the lead associated with the bullets, shots, or projectiles can be safely collected and subsequently disposed with the minimum of effort and without hazard to the operator of the shooting range system. This complies with regulations for the training of both military and law enforcement personnel and preventing contamination of soil, air and water near the shooting range system.

[**0052**] Optionally mounted within the interior of the shooting container **14**, such as within the first portion **50**, the second portion **52**, and/or the third portion **54**, is a plurality of lights **110**. Lights **110** provide illumination to the shooter located at shooting position **60**. These lights **110** can be of various types, such as florescent, halogen, or any other type of device to illuminate at least a portion of the interior of the shooting container **14** for at least a period of time. Optionally, the lights **110** can have the form of a strobe light such that shooting practice and training may be performed in the dark with a strobe light operating. This provides a different environment for the shooter to practice and be tested.

[**0053**] To provide electrical power to the shooting range module **12** and the associated ventilation system **16** (FIG. **1**), monitors **66** (FIG. **2**), controllers **68** (FIG. **2**), electronic target retrieval system **72** (FIG. **2**), lights **110** (FIG. **3**), and other devices requiring electricity, the shooting range module **12** can include one or more electrical panels (not shown), optionally a main outside main panel and interior sub panel, with associated electrical disconnects and breakers. By providing electricity to the single main outside main panel, electricity is provided to the entire shooting range module **12**.

[**0054**] As mentioned before, the first end **20**, the second end **22**, the wall **24** and/or the wall **26** of the shooting container **14** can be engineered with one or more removable panels **120** to enable access between adjacent shooting containers **14**, such as between the first shooting range module **12***a* and the second shooting range module **12***b*. With these one or more removable panels **120**, the shooting range system **10** (FIG. **1**) is expandable in width to accommodate various number of firing lanes and allows for expansion of the shooting range system **10** (FIG. **1**) to accommodate any number of adjacently positioned shooting range modules.

[**0055**] These one or more removable panels **120** can be removed to provide an access opening for a door between adjacently positioned shooting range modules. With doors or accessing openings having various widths positioned at any location along the length of the shooting range module, the shooting range module can be used for tactical training. Once a removable panel **120** is removed, the resultant opening can be filled with a door or other structure or unfilled to allow unimpeded access to an adjacently positioned shooting range module. The shooting range system **10** (FIG. **1**), therefore, can be used not only as a lane-type

shooting range but as a true fire training facility that simulates urban warfare, building clearing, tactical assaults, and other training exercises.

[0056] The area of the shooting container **14** around the panels **120** is pre-engineered and constructed to prevent damage to the shooting container **14** during transporting, assembling, and disassembling. This is unlike any other portable range. Other indoor shooting ranges are assembled and then cutouts and access are created on site, making the structure unsound to move. With the shooting container **14** pre-engineered for assembly, disassembly, and transporting as many times as needed, the shooting container **14** remains structurally safe to move and use.

[0057] Various manners are provided to enable the panels **120** to be removable. For instance, the panels **120** can be bolted onto the shooting container **14** and removed as needed. In other configurations, the panels can be welded onto the shooting container **14** and removed as needed.

[0058] To provide bullet, shot, or projectile resistance, each of the first end **20**, the second end **22**, the walls **24** and **26**, and the top and bottom **28** and **30** can have a layered construction, as illustrated in FIG. **4**. This layered construction can (i) prevent bullets, shot, and projectiles penetrating the shooting container **14**, (ii) reduce the noise heard by individuals outside the shooting container **14**, and (iii) provide a finished exterior coating per customer requests.

[0059] To achieve the above, the first end **20**, the second end **22**, the walls **24** and **26**, and the top and bottom **28** and **30** can include an exterior finish layer **130** disposed on an insulation layer **132**, which is in turn disposed on a container wall **134**. Another insulation layer **136** can be disposed on the container wall **134**, with a bullet, shot, or projectile resistant layer **138** disposed on the insulation layer **136** and an optional sound proofing or controlling or noise absorbing or reducing layer **140**, such as the layer associated with the deflector structure **104** (FIG. **3**), disposed on the bullet, shot, or projectile resistant layer **138**. It will be understood that the order of the layers described herein can be varied based upon the particular configuration of the shooting container **14**. In addition, other layers can be included in the layered construction of the first end **20**, the second end **22**, the walls **24** and **26**, and the top and bottom **28** and **30**. For instance, an extra bullet, shot, or projectile resistant layer can be disposed between the insulation layer **136** and the container wall **134**. Similarly, a second container wall, with associated insulation, can be disposed between the container wall **134** and the insulation **132**. Further, the optional sound proofing or controlling or noise absorbing or reducing layer **140** can optionally be substituted with a rubber protection layer that can aid with reducing in ricochets.

[0060] Generally, the exterior finish layer **130** can be made from any material selected by a customer of the shooting range system **10** (FIG. **1**). For instance, the exterior finish layer **130** can be a polymer siding, such as those provided under the trademark KYNAR. In other configurations, any polymeric or metallic products usable to cover the insulation **132** and prevent wind, water, and other weather elements contacting the insulation **132**.

[0061] Turning to the insulation layers **132** and **136**, these can be made from any material or combinations of materials that function to insulate or to prevent the passage or heat, electricity, or sound through the surface(s) to which the material is mounted. In one configuration, the insulation can be, for instance, and not by way of limitation, fiberglass, rockwool, cellulose, polystyrene, polyurethane, polyisocyanurate, vermiculite, perlite, or other types of insulating material.

[0062] With respect to the container wall **134** and the bullet, shot, or projectile resistant layer **138**, these layers can be made from metallic plates or panels. The container wall **134** can be fabricated from a material, such as steel, that is bullet, shot, or projectile proof to a 9 mm bullet at point blank fire. Similarly, the bullet, shot, or projectile resistant layer **138** can be fabricated from a material, such as steel, that is bullet, shot, or projectile proof to 7.62 by 39 rifle bullet at point blank fire. More powerful calibers can be accommodated by varying the number of layers and armor resistant material used. In one configuration, the bullet, shot, or projectile resistant layer **138** can be 9 gauge up to ⅜ inch plate steel with an optional smooth finish. More generally, the bullet, shot, or projectile resistant layer **138** can be made from a material with a Brinell rating based upon the type of weapon being used. For instance, the bullet, shot, or projectile resistant layer **138** can having a Brinell rating of 400 or 500 depending upon the particular pistol or rifle being used within the shooting container **14**. The particular bullet, shot, or projectile resistant layer **138** can have sufficient structural integrity to resist penetration by bullets, shots, or projectiles and optionally inhibit rebounding bullets, shots, or projectiles while serving as a guiding mechanism to keep bullets, shots, or projectiles traveling down range, in the direction of arrow A (FIG. **3**).

[0063] Returning to FIG. **3**, mounted to the top **28** of shooting container **14** is the ventilation system **16**. The top **28** can be optionally pitched to aid with directing water, snow, ice, etc. from the ventilation system **16**. The inlet duct **36** of the ventilation system **16** can pass air into the interior of the shooting container **14** through an inlet register or grill **150** in close proximity to the first portion **50** and behind the shooting position **60**. Alternatively, or in addition to inlet register or grill **150**, an air-wall can be disposed between the first end **20** and shooting position **60**; the air-wall including a plurality of holes or perforations through which the air can flow. In one configuration, the air-wall is a polymer panel having a plurality of holes or perforations; however, one skilled in the art will appreciate that various other configurations of the air-wall are possible and may be known to those skilled in the art in light of the teaching contained herein.

[0064] Exhaust gases and airborne particles can be removed from the interior of the shooting container **14** by way of an outlet grill **152** disposed in close proximity to the bullet traps **80**. The air delivered to the inlet register **150** can be pressurized so that an air-wall is created behind the shooting positions **60**. This provides a laminar air flow of a rate of approximately 50 to 75 feet per minute down range in the direction of arrow A, which meets the U.S. Navy's new 2004 indoor range requirements. This results in no airborne particles or other materials being incident to the shooter at the shooting position **60**.

[0065] As mentioned before, using the shooting range system of the present invention the length and width of the shooting range can be varied based upon the particular

requirements of the customer. For instance, the number and length of the shooting lanes can be varied due to the modular characteristics of the shooting range system. The embodiment described with respect to FIG. **1-4** illustrates a manner for increasing the width of the shooting range system, illustrated in FIGS. **5-7** are the components of the shooting range system that enable the length of the shooting lanes to be increased. It can be understood that the functions and features of the system illustrated in FIGS. **5-7** can apply to the system described in FIGS. **1-4**.

[**0066**] Turning to FIG. **5**, illustrated is another configuration of the shooting range system **10**. The shooting range system can include one or more shooting range modules **212**, only one being illustrated in FIG. **5**. One or more shooting range modules **212** can be mounted together in a similar manner to that illustrated in FIG. **1** with shooting range system **10** to create the shooting range system and provide flexibility to indoor training and testing, such as described above with respect to shooting range system **10** (FIG. **1**). For ease of illustration, the ventilation system **16** is omitted from FIGS. **5-9**.

[**0067**] The illustrated shooting range module **212** of FIG. **5** can include a first end shooting module **214**, a second end shooting module **218**, and one or more intermediate shooting modules **216**. Each shooting module **214**, **216**, and **218** can include the shooting container **14**, which can be a modified shipping container having varying lengths, widths, and heights. The shipping container can be fabricated from a metal, metal alloy, or other material sufficient to provide the desired strength and rigidity and provide some resistance to bullets, shot, or projectiles fired within an interior thereof.

[**0068**] These modules **214**, **216**, and **218** can mount together to create one or more shooting lanes and an area to perform tactical training. For instance, a customer can select the width and length, and optionally height, of the shooting range system and the desired number of modules **214**, **216**, and **218** can be brought to customer site in sections via a flatbed trailer and set in place using cranes, forklift vehicles, etc. These modules **214**, **216**, and **218** are pre-engineered to enable disassembly, transportation, and reassembly as many times as needed without damaging the structural integrity of the shooting range system. This is in contrast to existing indoor systems that are modified on-site and reduce the structure integrity to allow numerous disassemblies, transportations, and reassemblies.

[**0069**] With this modular configuration, the length of the shooting range system and the shooting range module **212** can be varied from forty feet to greater than one hundred feet. It will be understood that the particular length of the shooting range system can be selected based upon the particular shipping containers used to achieve the customer's desired configuration. It will be also understood that that particular length of the shooting range system can be greater or lesser than one hundred feet and/or forty feet.

[**0070**] Mounted to one or more of the first end shooting module **214**, the one or more intermediate modules **216**, and the second end shooting module **218** is the ventilation system that can heat and cool and remove gases and airborne particles from the interior of the shooting range module **212**. It will be understood that any portion of the ventilation system can be elongated to accommodate for changes in the length of the shooting range module **212**. For instance, ducts of different lengths can be added to the ventilation system **16** to accommodate for changes in the length of the shooting range module **212**. The filter, fan, or heat and cooling components of the ventilation system **16** can be optionally elongated or be added thereto to accommodate for changes in the length of the shooting range module **212**.

[**0071**] Generally, the first end shooting module **214** and the second end shooting module **218** can have a similar configuration, respectively, to the first portion **50** and the third portion **54** of the shooting range module **12** (FIG. **1**). As such, the first end shooting module **214** can include one or more firing positions, monitors, controllers, walls, etc, while the second end shooting module **218** can include the means for collecting the bullets, shots, or projectiles, such as but not limited to one or more bullet traps. Each of the one or more intermediate shooting range modules **216** can include the structures associated with the second portion **52** of the shooting range module **12***a* (FIG. **1**), such as but not limited to, one or more deflector assemblies **100**, removable panels **120**, lights **110**, targets **70**, and electronic target retrieval systems **72**.

[**0072**] To enable mounting of the modules **214**, **216**, and **218** together, each module **214**, **216**, and **218** can include one or two complementary ends so that adjacently positioned modules can mount together. For instance, the first end shooting module **214** can include a male-type connector **220** and the second end shooting range module **218** can include a female-type connector **222**. In this example, each of the intermediate modules **216** can include one male-type connector **220** and one female-type connector **222**. It will be understood, however, that various other combinations of connectors **220** and **222** are possible. For instance, the intermediate modules **216** can include two male-type connectors **220**, two female-type connectors **222**, or one of each connector **220** and **222**. Similarly, the first end shooting module **214** can include a female-type connector **222** and the second end shooting range module **218** can include a male-type connector **220**.

[**0073**] Reference will know be made to FIGS. **6** and **7**, which illustrates portions of the first end shooting module **214** and one of the intermediate modules **216** and the associated male-type and female-type connectors **220** and **222**. It will be understood that a similar discussion can be made for two intermediate modules **216**, the first end shooting module **214** with the second end shooting module **218**, and/or the intermediate module **216** with the second end shooting module **218**.

[**0074**] As illustrated in FIG. **6**, extending from a first end **230** of the first end shooting module **214** is a plurality of connector members **232**. As illustrated, the connector members **232** extend from the walls **24** and **26** of the first end shooting module **214**. These connector members **232** can be threaded and can be received in complementary openings **234** formed in an adjacently positioned intermediate module **216**. These connector members **232** can integrally formed with or mounted to the first end shooting module **214**, such as but not limited to, through welding, mechanical fasteners, complementary engagement structures, such as, but not limited, to threads, interference fits, etc., or other techniques or structures for mounting one structure to another structure. The connector members **232** and the openings **234** are illustrated in the ends of the walls **24** and **26**; however, it will

be understood that the connector members **232** and openings **234** can be associated with the top **28** and the bottom **30** of the shooting container **14** of the shooting range module **212**.

[**0075**] In addition to the connector members **232** extending from the first end shooting module **214**, one or more overlapping members **240** extend from an interior of the first end shooting module **214** into an interior of the intermediate module **216**. These overlapping members **240** can aid with aligning the connector members **232** with the openings **234**. In addition, since the overlapping members **240** can be fabricated from material having a degree of resistance to bullets, shot, or projectiles, such as but not limited to similar materials to those of the shooting container **14** (FIG. **1**), the bullet, shot, or projectile resistant layer **138** (FIG. **4**), and/or the deflector structure **104** (FIG. **3**), the overlapping members **240** provide resistance to the junction of the first end shooting module **214** and the intermediate module **216**. With the overlapping members **240** optionally being inclined, the overlapping members **240** can direct any bullets, shot, or projectiles towards the end of the shooting range module **212** and the associated means for collecting the bullets, shot, or projectiles.

[**0076**] Turning to FIG. **7**, illustrated are the first end shooting module **214** mounted to the intermediate module **216**. A gasket **242** can be disposed between the first end shooting module **214** and the intermediate module **216** to limit the possibility of water and wind penetration into the interior of the shooting range module **212** (FIG. **5**). This gasket **242** can be fabricated from various materials so long as it can limit the infiltration of water, snow, ice, wind, etc. into the interior of the shooting range module **212**.

[**0077**] The combination of the gasket **242** and the overlapping members **240** can aid with installation of the shooting range module **212** (FIG. **5**) by accommodating for variations in the position and orientation of the first end shooting module **214** and the intermediate module **216**. Since the overlapping members **240** extend part way into an interior of the intermediate module **216** the position of the first end shooting module **214** from the intermediate module **216** can be varied up to the limit of the length of the overlapping members **240** extendable into the interior of the intermediate module **216**. The resultant space between the first end shooting module **214** and the intermediate module **216** can be filled with one or more gaskets **242**, each being fabricated from the same or different materials. This enables simple and efficient installation of the shooting range module **212** of the present invention.

[**0078**] Turning to FIGS. **8** and **9**, illustrated are additional configurations of shooting range systems **300** and **400** of the present invention. One or more shooting range modules **312** can be mounted together in a similar manner to that illustrated in FIG. **1**, thereby providing flexibility to indoor training and testing, such as described above. Although four shooting range modules **312***a-d* are illustrated, it will be appreciated that the shooting range system **300** can include less than four or more than four shooting range modules. It can also be understood that the functions and features of the systems illustrated in FIGS. **8** and **9** can apply to the systems described in FIGS. **1-7**, or vice versa.

[**0079**] The following discussion will be generally be directed to the first shooting range module **312***a* of the shooting range system **300**; however a similar discussion may be made for the other shooting range modules **312***b-d*. In FIG. **8**, the shooting range module **312***a* can include a control booth **314**. In one implementation, the control booth **314** is integrally formed with shooting range modules **312***a-d*. For example, in the illustrated implementation, a first portion **350** of a shooting range module **312***a* can be pre-engineered with a control booth **314**. Firing positions **60** can be located in the second portion **352**, which defines at least a portion of the shooting area **316**. In this manner, control booth **314** can be used to control components of shooting range module **312***a* and/or monitor a person or targets within the shooting area **316**.

[**0080**] As described above with respect to shooting range system **10** (FIG. **1**), the first portion **350** can be engineered with one or more removable panels **120**, one being illustrated with dotted lines. Once the removable panel **120** is removed, the resultant opening may be left open to allow unimpeded access to the first portion **350** of the adjacently positioned shooting range modules **312***b-d*. Stated another way, upon removal of removable panel **120**, access is provided to the control booth of any adjacent shooting range modules **312***b-d*. The control booth **314** for shooting range system **300** can then be optionally defined by one or the combination of accessible control booths from the positioned shooting range module **312***b-d*. Accordingly, the first portion **350** may, either alone or in combination with adjacent shooting range modules, define the control booth **314**, and is thus expandable to accommodate the various number of shooting lanes.

[**0081**] A module control **318** can be positioned within control booth **314** of shooting range module **312***a*, and can be used to monitor any number of shooting lanes and/or operate various components of shooting range system **300**. The module control **318** can be operatively connected to the ventilation system **16** (FIG. **1**) to manage operation of the air flow through all or part of shooting range system **300**. For instance, the module control **318** can control the ventilation system **16** of shooting range module **312***a*, the ventilation system of control booth **314**, and/or any or all of the ventilation systems of shooting range modules **312***b-d*.

[**0082**] Additionally, the module control **318** can be operatively connected to various other components of the electrical system. For example, the module control **318** may control lighting, communication systems, electronic retrieval systems **72** (FIG. **2**), monitors **66** (FIG. **2**), etc. of shooting range module **312***a* and/or any and all of the shooting range modules **312***b-d*.

[**0083**] Optionally, one module control **318** can act as a master control to control all shooting range modules **312***a-d* within the shooting range system **300**. Further, each module control **318** can be modular and moved from one shooting range module to another to maintain the module control **318**, or master control, centrally within the shooting range system **300**. Accordingly, each shooting range module **312***a-d* can include electrical and signal transmitting connections to enable movement and repositioning of the control module **318**.

[**0084**] In addition to the one or more removable panels **120**, the shooting range module **312***a* and any or all of the shooting range modules **312***b-d* can include a divider wall **320** that extends between the control booth **314** and the shooting area **316**. The divider wall **320** can allow partici-

pants, onlookers, or others to be positioned outside the danger zone and the shooting area **316**, while also allowing them to move around and monitor any of the various shooting lanes. In addition, the divider wall **320** creates a separation between the control booth **314** and the shooting area **316** that aids with sound attenuation. When shooting range system **300** includes divider wall **320**, one or more doors **46** may also be formed in shooting range modules **312***a* to allow access to the control booth **314** and/or shooting area **316**.

[**0085**] One or more sight windows **322** can be formed in divider wall **320**. In FIG. **8**, shooting range module **312***a* has one sight window **322** within divider wall **320**. Sight windows **322** allow a person within the control booth **314** to view the shooting area **316**, including any people or targets therein. The combination of divider wall **320** and the sight windows **322** can further allow safe monitoring and/or control of shooting area **316**. Optionally, divider wall **320** can be fabricated from bullet-proof, anti-rebound, and/or sound-absorbing materials. For instance, divider wall **320** may be made from a steel plate, or may have one more layers of metal, fiber board, safety wood, or other materials. In some configurations, divider wall **320** can be formed from the same or different materials as dividing wall **64** (FIG. **2**), deflector structures **104** (FIG. **3**), and/or walls **24**, **26**, **28**, and **30** (FIG. **1**). Additionally, sight windows **322** can be fabricated from a substantially transparent, bullet-proof and/or anti-rebound material such as bullet-proof glass. In this manner, control booth **314** can be protected from stray bullets or projectiles which may it against divider wall **320**.

[**0086**] The divider wall **320** can also isolate the control booth **314** from the environment within the shooting area **316**. In some configurations, the ventilation system **16** (FIG. **1**) provides heating and/or air conditioning to shooting area **316**. Where control booth **314** is isolated from shooting area **316**, control booth **314** can have a separate ventilation system including heating and/or air conditioning components to reduce the risk that contaminants and airborne particles from shooting area **316** will enter control booth **314**.

[**0087**] Optionally, ventilation system **16** (FIG. **1**) can provide ventilation to shooting area **316** through use of an air-wall **324**. In one configuration, the air-wall **324** can be fabricated from a sheet of material which contains a series of holes or perforations through which air from the inlet duct **36** (FIGS. **1**, **3**) passes to create a laminar flow in shooting area **316** in the direction of arrow A. The sheet of material can be substantially transparent, thus allowing a person inside the control booth **314** to view the shooting area **316** through the sight windows **322** and the air-wall **324**. Representative transparent materials usable in the air-wall **324** can include, but are not limited to, polycarbonate (e.g. Lexan) and polyacrylic (e.g. Lucite).

[**0088**] It can be appreciated by a person having ordinary skill in the art that the air-wall **324** can be separate from the divider wall **320**, as shown. In other configurations, the divider wall **320** can be perforated or include a series of holes, thereby optionally eliminating the need for the air wall **324**. In addition, in some configurations, the sight windows **322** are not formed in divider wall **320**. Further, a transparent air-wall **324** may form substantially the entire divider wall **320** and sight windows **322**, such that separate sight windows **322** can be omitted without eliminating the visual view of the shooting lanes from control booth **314**. Alternatively, either in place of, or in addition to the sight windows **322**, a video surveillance system may be used to monitor shooting range module **312***a*. In such an implementation, the master or module control **318** may include one or more display monitors (not shown) which receive a video feed from one or more cameras (not shown) which monitor the shooting lanes. In still other configurations, an inlet register or grill replaces air-wall **324** to deliver heat and/or air to shooting range module **312***a*.

[**0089**] FIG. **9** illustrates an alternative embodiment of a shooting range system, identified by reference numeral **400**, having a control module **414** and one or more shooting range modules **412***a-e*. In one implementation, shooting range modules **412***a-e* are separately formed from control module **414**. For example, shooting range modules **412***a-e* may be the same or similar to other shooting range modules described herein and can be mounted together to create the shooting range system **400**, thereby providing flexibility to indoor training and testing. Although five shooting range modules **412***a-e* are illustrated in the shooting range system **400**, it can be understood by those skilled in the art that the shooting range **400** can include more or fewer than five shooting range modules.

[**0090**] As illustrated, the shooting range system **400** can include the control module **414** which is separate from the shooting range modules **412***a-e*. The control module **414** functions in a similar manner to the control booth of FIG. **8**, i.e. by providing a safe location for a range controller to view and control at least one of the lighting, heating, cooling, target retrieval, etc. of the shooting range modules **412***a-e*. As the control module **414** is separate from shooting range modules **412***a-e*, it can be transported separately and may be installed either at the same time as or after the shooting range modules **412***a-e*. In one implementation, the control module **414** is a modular container which is configured to allow a person to control and/or monitor the inside of the shooting range modules **412***a-e*. The length and/or height of the control module **414** can be adapted to form a spatial relationship with shooting range modules **412***a-e*. For example, the control module **414** may be constructed similar to the shooting range module **212** as illustrated in FIG. **5**, such that the length, width, and/or height is selectively configurable. Control module **414** can be adapted such that its length is substantially the same as all or a portion of the combined width of shooting range modules **412***a-e*. In this manner, a person in the control module **414** can monitor shooters, targets, and components within shooting range modules **412***a-e* from within a single container, whether or not such module is fabricated from one or more separate modules or containers.

[**0091**] In the illustrated implementation of the shooting range system **400**, separate doors **46***a-b* are provided to allow access to the control module **414** and the shooting range modules **412***a-e*, respectively. Door **46***a* is formed on the end of the structure making up the control module **414**. In addition, door **46***a* may be single-swing or double-swing, or may be an access door similar to access door **76** (FIG. **2**). Door **46***b* may also be any type of door as previously described. In the illustrated implementation, for example, the shooting range modules **412***a-e* include removable panels **120** between air-wall **324** and shooting positions **60**. The

removable panels can form a walk-way behind the shooting positions **60**, and can further be adapted to support the door **46***b*.

[**0092**] Control module **414** can be selectively connected to the shooting range modules **412***a-e*. By connecting the control module **414**, a person within the control module **414** can monitor or control the shooting range system **400**. For example, the control module **414** can include a master control or one or more module controls **318** which allows control of targets, lighting, air flow, and the like within shooting range modules **412***a-e*. To facilitate such control, the control module **414** can be connected to shooting range modules **412***a-e* in any manner as described above, or by any other suitable method. Corresponding male-type and female-type connections may be positioned on the shooting range modules **412***a-e* and/or control module **414** and may be used with or without gaskets to connect a side of control module **414** to at least one end of the shooting range modules **414***a-e*. In other embodiments, the control module **414** is only electrically connected to the shooting range modules **412***a-e* such as where, for example, a video surveillance system is used to monitor the shooting lanes.

[**0093**] Optionally, the shooting range system **400** may have sight windows **322** positioned between the control module **414** and the shooting range modules **412***a-e*. Sight windows **322** act as means for visually monitoring the shooting lanes, as described above. The sight windows **322** may be fabricated from a transparent bulletproof material or can be one or more removable panels. In one configuration, mating sight windows **322** are installed in the walls of each of the structures forming the shooting range modules **412***a-e* and the control module **414**. It can be appreciated, however, that in other configurations, the shooting range modules **412***a-e* and/or the control module **414** may have removable panels in which sight windows **322** can be placed either before or after shooting range modules **412***a-e* are coupled to control module **414**. Additionally, in some configurations of shooting range system **400**, an air-wall **324** is connected to the ventilation system **16** (FIG. **1**), as described above, and provides laminar air flow along the length of shooting range modules **412***a-e*.

[**0094**] Generally, the shooting range system of the present invention is fully capable of modular expansion as shooting range demand increases and is completely self-contained only requiring power source and location from the customer. The shooting range system is also transportable in sections to reassemble at alternative locations, includes means for abating noise to satisfy statutory noise emission specifications, and includes a ventilation system that is designed to ventilate across entire range removing harmful vapors, fumes, and airborne particulate matter safely during range operation.

[**0095**] By achieving the above, the present invention can function as a modular shooting range for Military and Law Enforcement training and test firing use. The modular characteristics of the shooting range system enable a customer to purchase and use module as needed based upon location and budgetary constraints. For instance, a customer may need a total of ten firing positions, but can only afford to purchase two positions. The present invention enables the used to continue to purchase and add shooting modules until their end goal for the number of positions required is met. This important feature allows many ranges of the Military and Law Enforcement to start their training as needed and allow the customer to plan further expansion into their yearly budget, as this is a piece of equipment.

[**0096**] The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

1. A method of installing a shooting range system, the method comprising:

positioning at least two first modules, each said first module have a first end, a second end, a pre-engineered door opening configured to receive a door at said first end, and at least one removable panel disposed between said door opening and said second end, an area adjacent said at least one removable panel being pre-engineered with one or more structural supports to maintain structural integrity of said first module during transport, assembly, and disassembly; and

following positioning said at least two first modules, aligning said first end and said at least one removable panel of each said first module and mounting said at least two first modules together.

2. The method of installing the shooting range system as recited in claim 1, further comprising connecting electrical power to each of said at least two first modules.

3. The method of installing the shooting range system as recited in claim 1, further comprising selectively removing said at least one removable panel from each of said at least two first modules to define an opening between said at least two first modules, said opening being unfilled to allow unimpeded access between said at least two first modules at a location between said door opening and said second end.

4. The method of installing the shooting range system as recited in claim 1, further comprising mounting at least one second module to at least one of said at least two first modules, said at least one second module extending a length of the shooting range system.

5. The method of installing the shooting range system as recited in claim 4, wherein each of said first module and said second module comprises two firing lanes.

6. The method of installing the shooting range system as recited in claim 4, further comprising mounting at least one third module to at least one of said second module, said at least one third module extending a length of the shooting range system.

7. The method of installing the shooting range system as recited in claim 1, further comprising mounting a control module to both of said at least two first modules, said control module providing a safe location for a range controller of the shooting range system.

8. A method of installing a shooting range system, the method comprising:

pre-engineering one or more shipping containers at a first location, said one or more shipping containers each having a first end and a second end and being pre-engineered with:

at least one door opening to receive a door;

at least one removable panel disposed between said at least one door and said second end; and

at least one projectile resistant layer formed on at least one wall of each of said one or more shipping containers;

moving said one or more shipping containers to a second location, remote from the first location, where the shooting range system is to be installed; and

following positioning said one or more shipping containers, installing the shooting range system by aligning said at least one removable panel of each shipping container of said one or more shipping containers and mounting said one or more shipping containers together.

9. The method of installing the shooting range system as recited in claim 8, further comprising connecting electrical power to each of said one or more shipping containers.

10. The method of install the shooting range system as recited in claim 8, further comprising pre-engineering each of said one or more shipping containers for a ventilation system adapted to filter gases and particulates from within said shipping container.

11. The method of install the shooting range system as recited in claim 8, further comprising pre-engineering each of said one or more shipping containers with at least one deflector structure that deflects projectiles toward said second end of said one or more shipping containers.

12. The method of install the shooting range system as recited in claim 8, further comprising pre-engineering each of said one or more shipping containers with two shooting stations disposed toward said first end of each of said one or more shipping containers.

13. The method of installing the shooting range system as recited in claim 1, further comprising selectively removing said at least one removable panel from each of said at least two first modules to define an opening between said at least two first modules, said opening being unfilled to allow unimpeded access between said at least two first modules at a location between said door opening and said second end.

14. A method of installing a shooting range system, the method comprising:

receiving a first module, a second module, and an intermediate module, each of said first module, said second module, and said intermediate module pre-engineered to maintain structural integrity of said first module, said second module, and said intermediate module during transport, assembly, and disassembly;

mounting said intermediate module to said first module, one or more first overlapping members extending from a first module interior to an intermediate module interior; and

mounting said intermediate module to said second module, one or more second overlapping member extending from said intermediate module interior to a second module interior.

15. The method of installing the shooting range system as recited in claim 14, wherein said one or more first overlapping member are inclined to direct projectiles toward said intermediate module.

16. The method of installing the shooting range system as recited in claim 14, further comprising connecting electrical power to one of said first module, said second module, and said intermediate module.

17. The method of installing the shooting range system as recited in claim 14, further comprising mounting at least one additional first module to said first module, at least one additional second module to said second module, and at least one additional intermediate module to said intermediate module.

18. The method of installing the shooting range system as recited in claim 15, further comprising installing at least one door within at least one door opening pre-engineered at a first end of each of said at least one first module and said at least one additional first module.

19. The method of installing the shooting range system as recited in claim **178**, further comprising removing at least one removable panel from at least one of said first module and said at least one additional first module following mounting of said at least one additional first module to said first module to provide access between said first module and said at least one additional first module, said at least one removable panel being disposed between said at least one door opening and a second end of said at least one first module and said at least one additional first module.

20. The method of installing the shooting range system as recited in claim 14, further comprising mounting at least one bullet trap within said second module interior.

* * * * *