




(86) Date de dépôt PCT/PCT Filing Date: 2003/05/20
(87) Date publication PCT/PCT Publication Date: 2003/11/27
(45) Date de délivrance/Issue Date: 2010/10/26
(85) Entrée phase nationale/National Entry: 2004/11/18
(86) N° demande PCT/PCT Application No.: GB 2003/002158
(87) N° publication PCT/PCT Publication No.: 2003/097341
(30) Priorité/Priority: 2002/05/21 (GB0211573.1)


(51) Cl.Int./Int.Cl. *B31B 19/90* (2006.01),
B29C 65/00 (2006.01), *B29C 65/18* (2006.01),
B29C 69/00 (2006.01)
(72) Inventeur/Inventor:
LEIGHTON, MURRAY EDWARD BRUCE, GB
(73) Propriétaire/Owner:
ILLINOIS TOOL WORKS, INC., US
(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : APPLICATION DE FERMETURES A GLISSIERE SUR UN MATERIAU PELLICULAIRE
(54) Title: APPLICATION OF ZIPPERS TO FILM MATERIAL

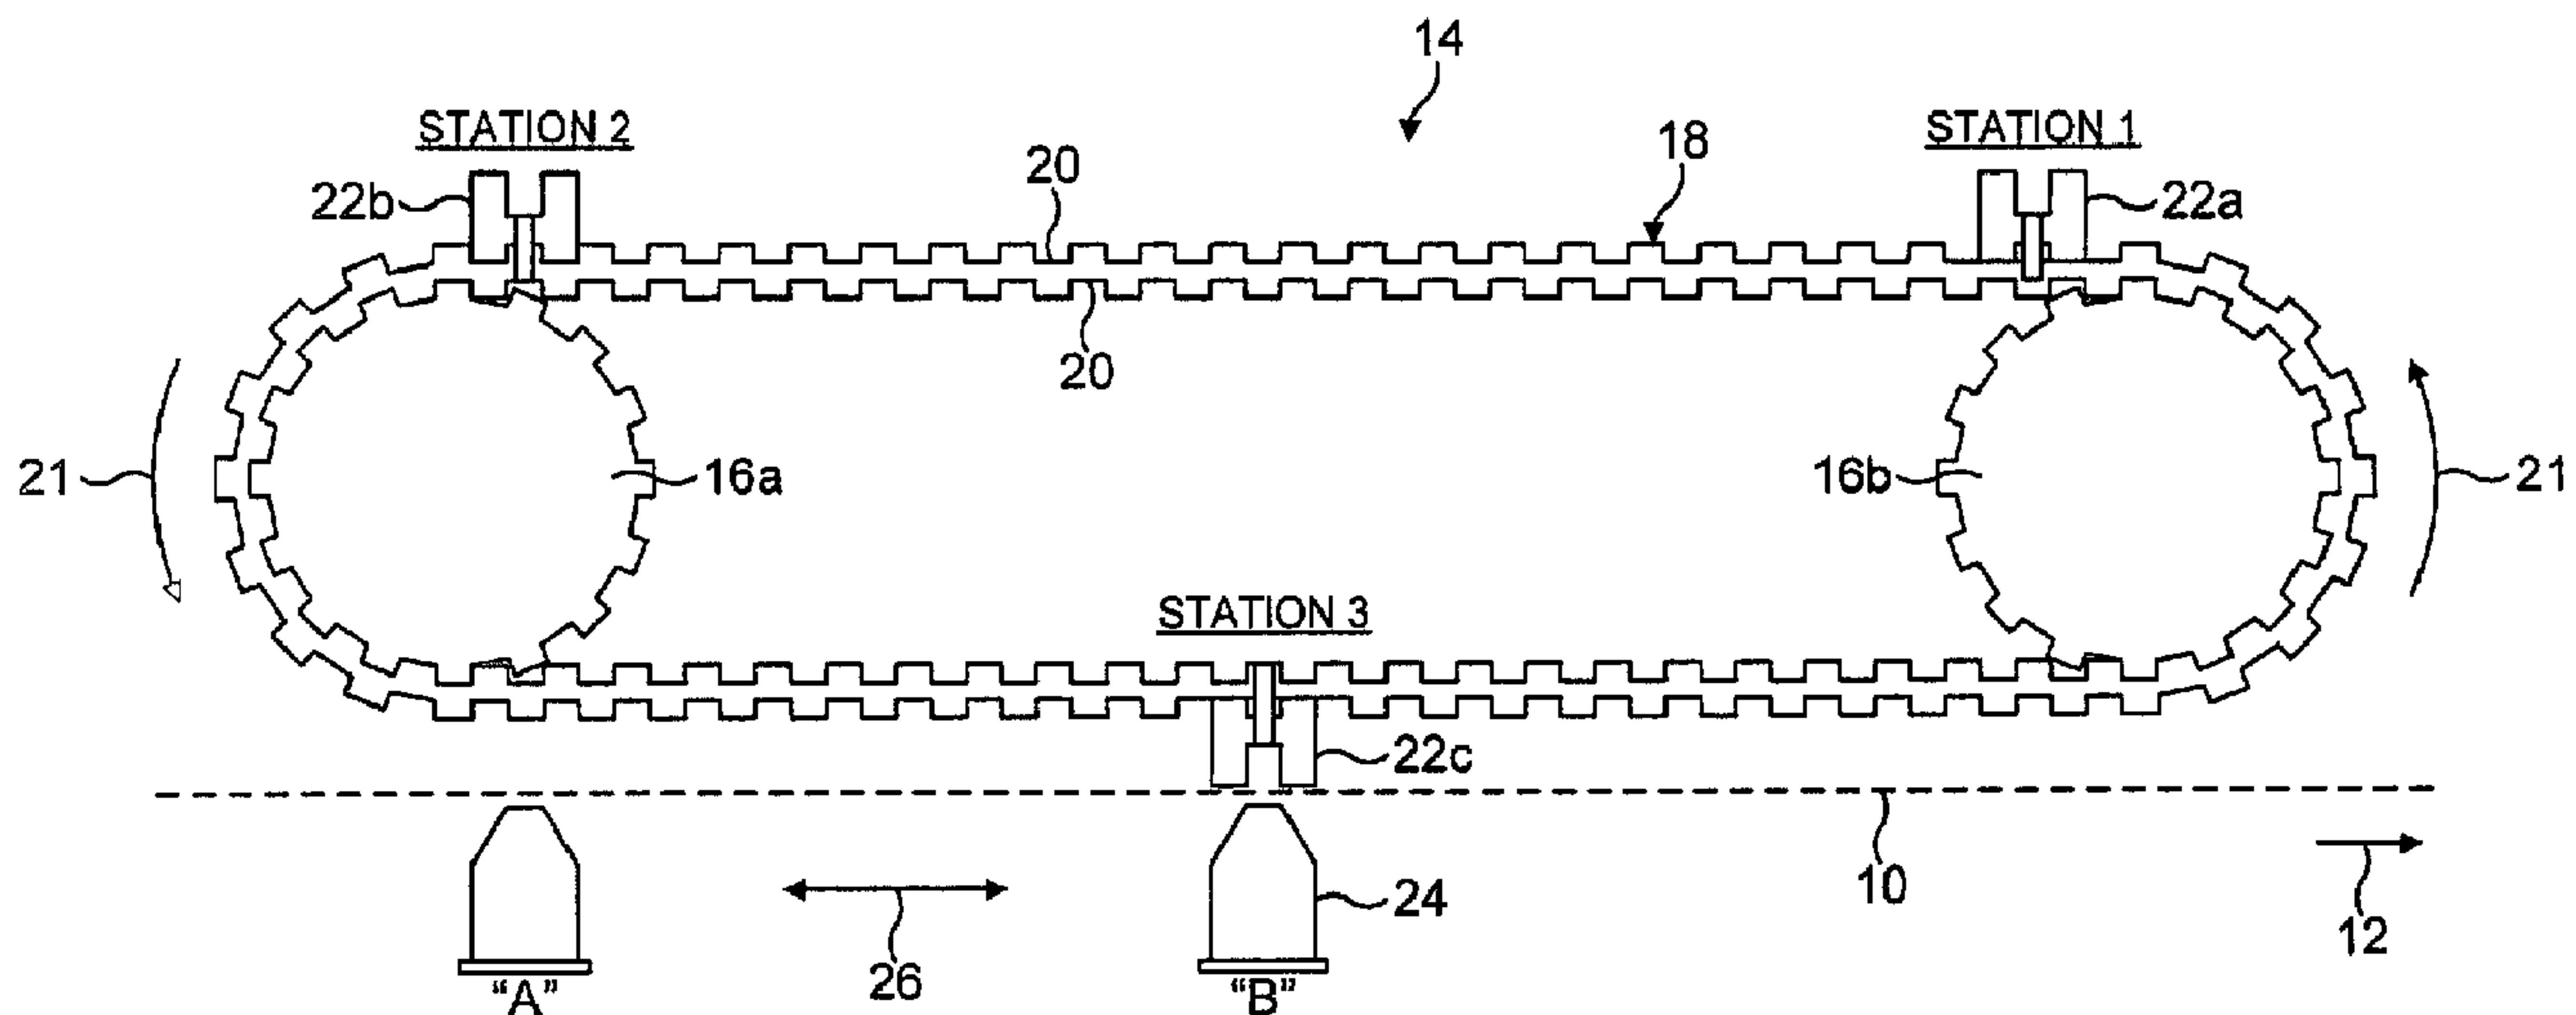

(57) **Abrégé/Abstract:**

The apparatus applies a transverse zipper strip to a film (10) moving continuously in a direction (12). A continuous belt (18) is driven by sprocket wheels (16a, 16b) and carries upper seal bars (22a, 22b, 22c) which receive pre-cut lengths of zipper at station (3). The pre-cut lengths are attached to the film (10) by a lower seal bar (24) which moves towards the film (12) at position A when an upper seal bar carrying a zipper strip is located directly above the film. Sealing takes place as the upper and lower seal bars move at the same speed as the film (12) from position A to position B where the zipper is released from the upper seal bar (22c). The process then repeats for the next zipper strip length.

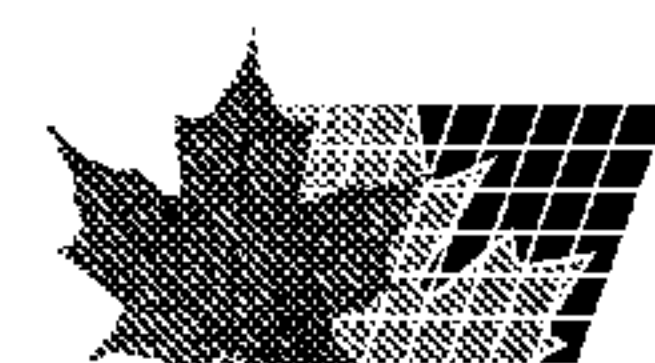

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 November 2003 (27.11.2003)

PCT

(10) International Publication Number
WO 03/097341 A1

(51) International Patent Classification⁷: **B31B 19/90**,
B29C 65/18

(21) International Application Number: PCT/GB03/02158

(22) International Filing Date: 20 May 2003 (20.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0211573.1 21 May 2002 (21.05.2002) GB

(71) Applicant (for all designated States except US):
SUPREME PLASTICS HOLDINGS LIMITED
[GB/GB]; Supreme House, 300 Regents Park Road,
Finchley, London N3 2TL (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LEIGHTON, Mur-
ray, Edward, Bruce** [GB/GB]; 20A York Road, Harrogate,
Yorkshire HL1 5HZ (GB).

(74) Agent: **ACKROYD, Robert**; W.P. Thompson & Co.,
Eastcheap House, Central Approach, Letchworth, Hert-
fordshire SG6 3DS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: APPLICATION OF ZIPPERS TO FILM MATERIAL

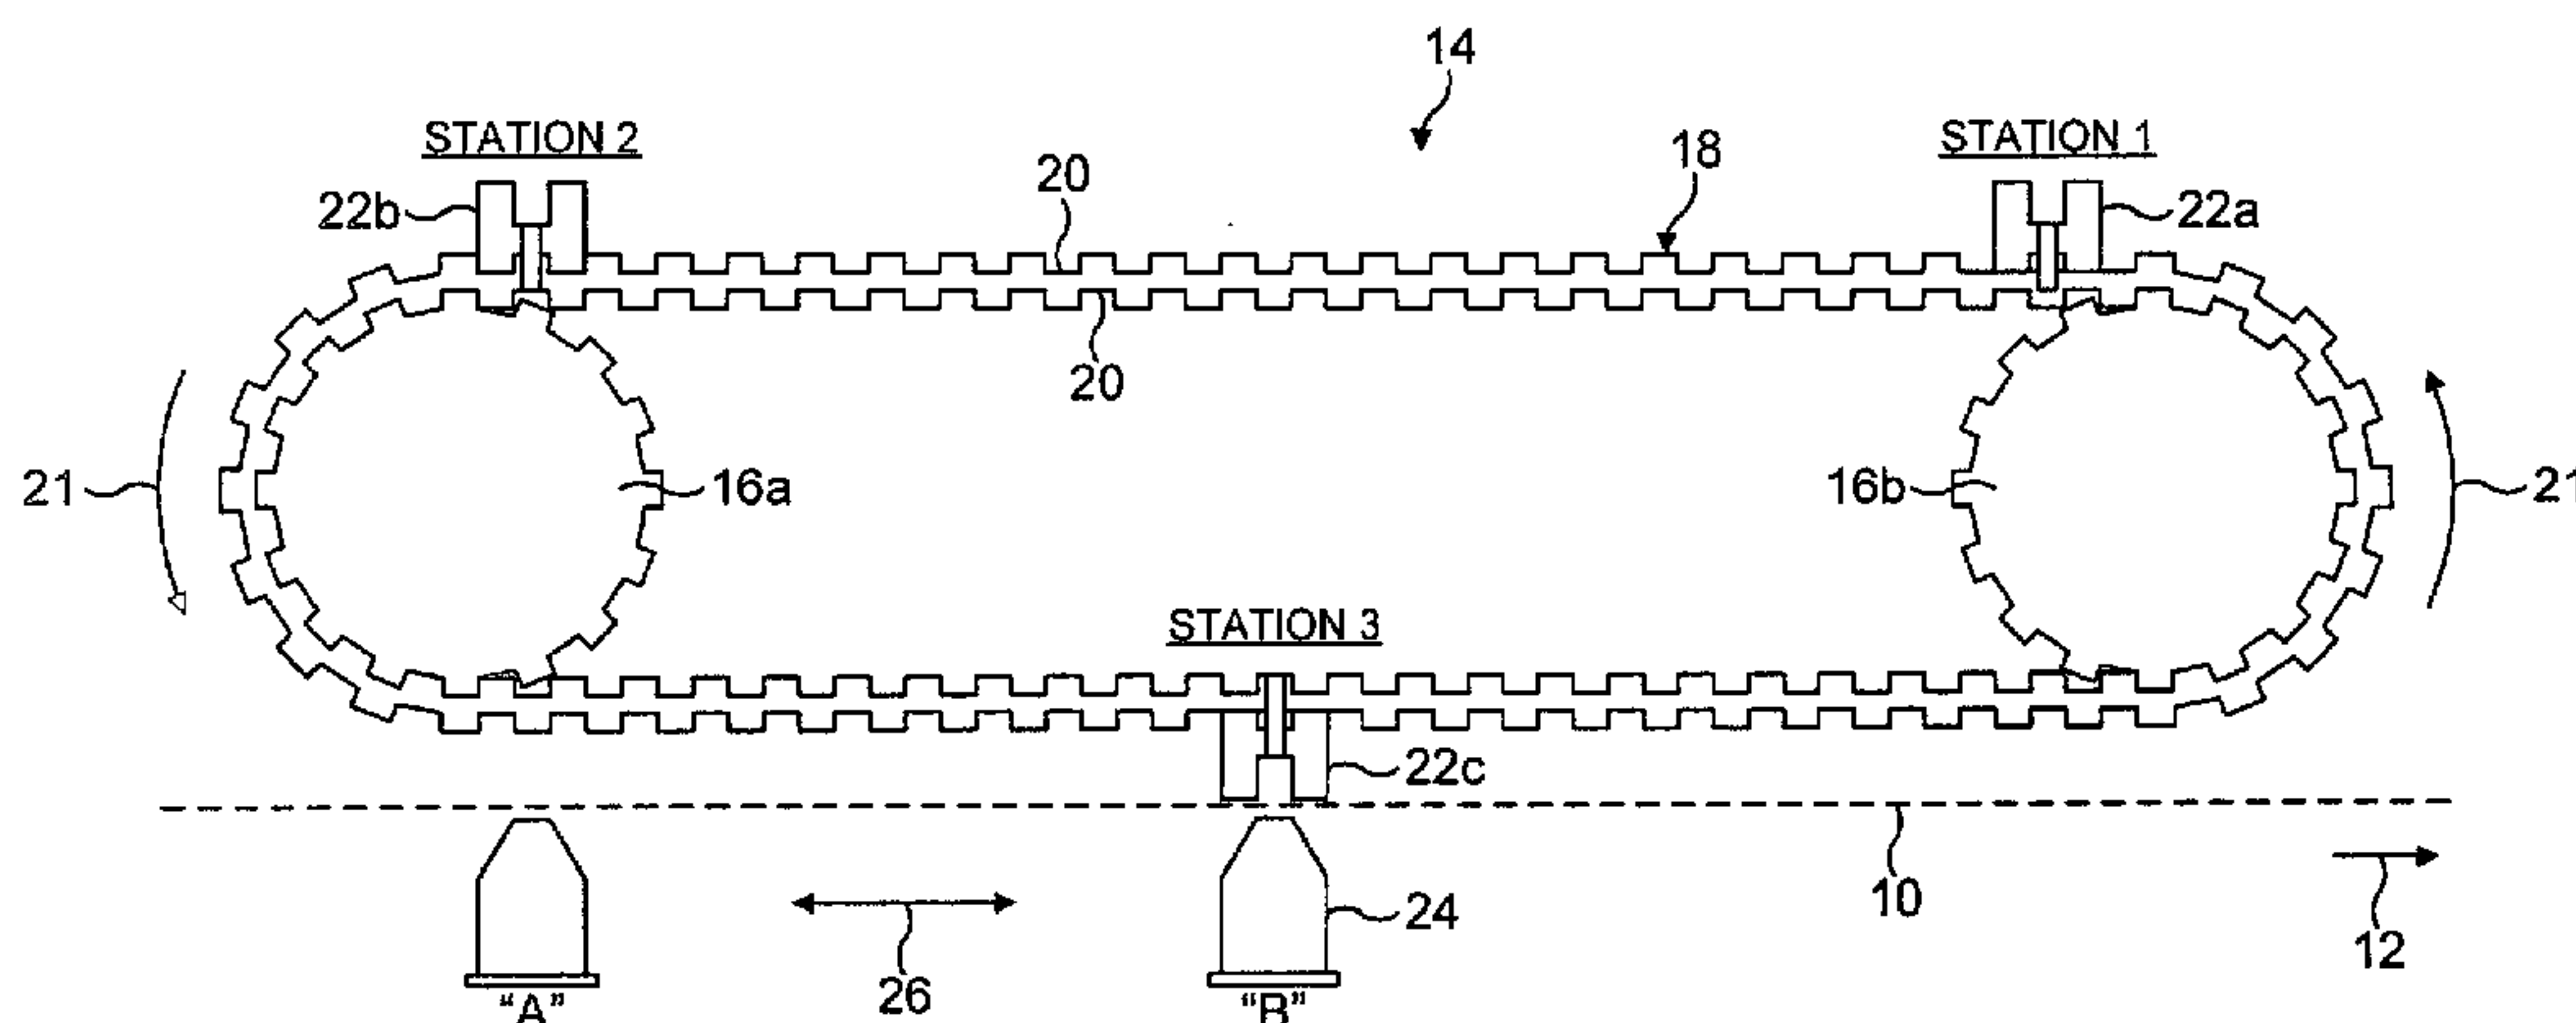

(57) Abstract: The apparatus applies a transverse zipper strip to a film (10) moving continuously in a direction (12). A continuous belt (18) is driven by sprocket wheels (16a, 16b) and carries upper seal bars (22a, 22b, 22c) which receive pre-cut lengths of zipper at station (3). The pre-cut lengths are attached to the film (10) by a lower seal bar (24) which moves towards the film (12) at position A when an upper seal bar carrying a zipper strip is located directly above the film. Sealing takes place as the upper and lower seal bars move at the same speed as the film (12) from position A to position B where the zipper is released from the upper seal bar (22c). The process then repeats for the next zipper strip length.



WO 03/097341 A1

APPLICATION OF ZIPPERS TO FILM MATERIAL

This invention relates to methods of and apparatus for applying recloseable fastener profiles, otherwise known as
5 zippers, to film material, where the zipper is applied transversely to the direction of movement of the film material.

Transverse web or cross-web technology is now well known, where a zipper is applied transversely to the
10 longitudinal axis of a film, but by its very nature the inclusion of means to stop the film and apply the zipper makes a continuously operating unit inefficient.

It is therefore an object of the present invention to provide a method of and apparatus for applying the zipper
15 while the film material or web is still moving at the normal line rate, thus maintaining the efficiency of the line operation.

The method and apparatus of the present invention are applicable both to continuously operating horizontal units
20 and machines and to continuously operating vertical units and machines.

Broadly in accordance with one aspect of the invention there is provided a method of applying a zipper strip to a film transversely to the direction of movement of the film,
25 which comprises moving the film continuously at constant speed, feeding the zipper strip longitudinally to an applicator means which presents the zipper strip to the film at a first location, arranging for sealing means to begin sealing of the strip to the film at said first location, and
30 moving the sealing means with the zipper strip at the same speed as the film to a second location at which sealing has been completed.

Conveniently, the zipper strip is presented to the film at the first location by a first one of a plurality of strip-

receiving units which the applicator means comprise and at least one successive zipper strip is presented at the same location by a respective one of the remainder of the plurality of strip-receiving units.

5 Advantageously, the plurality of strip-receiving units are used cyclically. The number of applicators may then be a convenient small number, such as three.

10 The zipper strips are preferably supplied to the strip-receiving units at the second location and are moved to the first location during a respective operating cycle. This need not be the case however and the zipper strips may be supplied to the strip-receiving units at any point between the second and the first location in the direction of movement of the strip-receiving units during an operating cycle.

15 Broadly in accordance with another aspect of the invention there is provided an apparatus for applying a zipper strip to a film transversely to the direction of movement of the film, comprising means for causing the film to move continuously at constant speed, applicator means to
20 which the zipper strip is fed longitudinally and which are arranged to present the zipper strip to the film at a first location and to advance the strip downstream at the same speed as the film, and sealing means arranged to move downstream at the same speed as the film to effect sealing of
25 the strip to the film between said first location and a second location downstream from said first location.

30 Preferably, the applicator means comprises a continuous band arranged in proximity to the film, which carries a plurality of strip-receiving units and which is intermittently movable to present the strips to the film in timed relationship to the movement of the film.

Advantageously, the continuous band is internally slotted and is in engagement thereby with sprockets on a rotatable drive means for the continuous band.

Conveniently, the continuous band is externally slotted to receive therein the plurality of strip-receiving units.

Preferably, on the side of the film opposite to the applicator means there is a sealing unit which is
5 reciprocable between an upstream location and a downstream location, which is movable into contact with the film at the upstream location in alignment with a zipper strip, and which travels to the downstream location at the same speed as the film and in contact with the film.

10 One presently preferred embodiment of continuous cross web applicator in accordance with the invention will now be described by way of example and with reference to the accompanying drawing which is a schematic illustration of the applicator.

15 In the drawing, a continuously moving web or film material is indicated by the broken line 10 and, as indicated by arrow 12, moves from left to right in the drawing. The applicator which is indicated generally at 14 comprises a pair of rotatable driving wheels 16a, 16b which provide a
20 driving motion for a continuous band, chain or belt 18 which, as indicated by arrows 21, travels in the anticlockwise direction, so that the lower run of the band 18 travels in the same direction as the film material 10 and parallel to it. The band 18 is provided with a regular array of slots
25 on both its inside and outside surfaces. The inner slots engage with sprockets on the drive wheels 16a, 16b. The outer slots enable the band to carry a plurality of strip-receiving units in the form of upper seal bars, three of which are shown at 22a, 22b and 22c in the applicator illustrated in
30 the drawing. The three upper seal bars shown in the drawing are equispaced around the periphery of the band 18. Upper seal bar 22a is positioned at station 1; upper seal bar 22b is positioned at station 2; upper seal bar 22c is positioned at station 3. Each of the upper seal bars is arranged to

receive and hold a length of zipper which is to be applied to the film material 10.

Positioned below the film material 10 is a single lower seal bar 24 which is movable in a reciprocating manner as indicated by arrow 26 between a position A and a position B. In the illustrated embodiment, the positions A and B are spaced by a distance which is approximately equal to half the length of the lower run of the band 18.

In operation, the zipper, customarily cut from a length of zipper material, is supplied to the upper seal bar 22c at station 3. At this time the lower seal bar 24 is at position A. Upper seal bar 22c is then moved by the band 18 through station 1 to station 2 where it dwells. As it dwells here, upper seal bar 22a will be receiving the next zipper at station 3. The upper seal bar which is positioned at station 2 waits there for the correct position of the film material 10 to apply the zipper to the film. In a correctly timed relationship the upper seal bar at station 2 moves down into proximity to the film material 10 and moves forward at the same speed as that of the film. At the same time the lower seal bar 24 moves up at position A to begin the sealing of the film 10 to the zipper and travels at the same speed as the film to position B where the sealing has been completed and the zipper has been sealed to the film. The lower seal bar 24 is then lowered at position B and returns to position A where it waits for the next application point. One thus has a continuously moving film 10 and an intermittently moving band 18.

CLAIMS:

1. An apparatus for applying a zipper strip to a film transversely to the direction of movement of the film, comprising means for causing the film to move continuously at constant speed, applicator means to which the zipper strip is fed longitudinally and which are arranged to present the zipper strip to the film at a first location and to advance the strip downstream at the same speed as the film, and sealing means arranged to move downstream at the same speed as the film to effect sealing of the strip to the film between said first location and a second location downstream from said first location.

2. The apparatus according to claim 1, in which, on the side of the film opposite to the applicator means, there is a sealing unit which is reciprocable between an upstream location and a downstream location, which is movable into contact with the film at the upstream location in alignment with a zipper strip, and which travels to the downstream location at the same speed as the film and in contact with the film.

3. The apparatus according to claim 1 or 2, in which the applicator means comprises a continuous band arranged in proximity to the film, which carries a plurality of strip-receiving units and which is intermittently movable to present the strips to the film in timed relationship to the movement of the film.

30

4. The apparatus according to claim 3, in which the continuous band is internally slotted and is in engagement thereby with sprockets on a rotatable drive means for the continuous band.

5. The apparatus according to claim 3 or 4, in which the continuous band is externally slotted to receive therein the plurality of strip-receiving units.

5

6. A method of applying a zipper strip to a film transversely to the direction of movement of the film, which comprises moving the film continuously at constant speed, feeding the zipper strip longitudinally to an applicator means which presents the zipper strip to the film at a first location, arranging for sealing means to begin sealing of the strip to the film at said first location, and moving the sealing means with the zipper strip at the same speed as the film to a second location at which sealing has been completed.

15

7. The method according to claim 6, in which the zipper strip is presented to the film at the first location by a first one of a plurality of strip-receiving units which the applicator means comprise and at least one successive zipper strip is presented at the same location by a respective one of the remainder of the plurality of strip-receiving units.

20

8. The method according to claim 7, in which the plurality of strip-receiving units are used cyclically.

25

9. The method according to claim 8, in which the zipper strips are supplied to the strip-receiving units at the second location and are moved to the first location during a respective operating cycle.

30

1 / 1

