



(51) International Patent Classification:
F23N 5/02 (2006.01)

(21) International Application Number:
PCT/US2014/031561

(22) International Filing Date:
24 March 2014 (24.03.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/806,626 29 March 2013 (29.03.2013) US
14/222,015 21 March 2014 (21.03.2014) US

(71) Applicant: ROSEMOUNT ANALYTICAL, INC.
[US/US]; 6565P Davis Industrial Parkway, Solon, OH
44139 (US).

(72) Inventors: KRAMER, James, D.; 9466 Pawnee Rd.,
Homerville, OH 44235 (US). NEMER, Joseph, C.; 6343
Woodhawk Dr., Mayfield Heights, OH 44124 (US). SIM-

MERS, Douglas, E.; 7485 Cheryl Lane NW, Massillon,
OH 44646 (US).

(74) Agents: CHRISTENSON, Christopher, R. et al.; Kelly,
Holt & Christenson PLLC, 113 West Main Street, Wa-
conia, MN 55387 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: IN SITU HEATED PROCESS PROBE

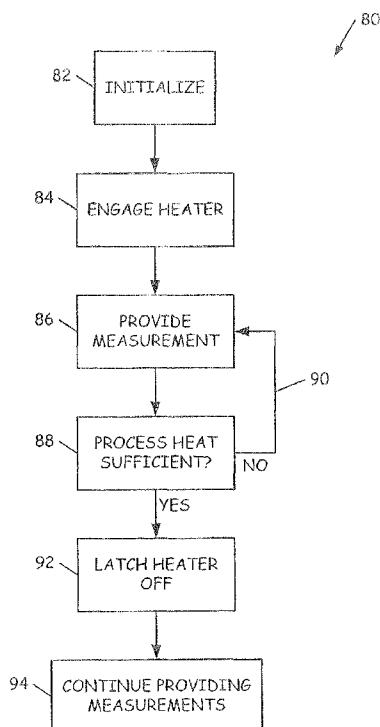


FIG. 4

(57) Abstract: A process combustion transmitter (10) is provided. The transmitter (10) includes a process probe (12) extendible into a flow of process combustion exhaust. The process probe (12) has a measurement cell (36) with an operating temperature that is above a flashpoint of process combustion fuel. The process probe (12) includes a heater (38) configured to heat the measurement cell (36) to the operating temperature. Electronic circuitry is coupled to the measurement cell (36) and to the heater (38). The electronic circuitry is configured to disengage power to the heater (38) once process combustion heat is sufficient to maintain the measurement cell (36) at the operating temperature and thereafter to maintain the heater (38) in a de-energized state.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

IN SITU HEATED PROCESS PROBE

BACKGROUND

[0001] Industrial process industries primarily rely upon energy sources that include one or more combustion processes. Such combustion processes include operation of a furnace or boiler to generate energy from combustion, which is then used for the process. While combustion provides relatively low-cost energy, its use is typically regulated and combustion efficiency is sought to be maximized. Accordingly, one goal of the process management industry is to reduce the cost of fuel being burned, which also inherently minimizes production of greenhouse gases by maximizing combustion efficiency of existing furnaces and boilers.

[0002] In situ or in-process analyzers are commonly used for monitoring, optimizing, and/or controlling combustion processes. Typically, these analyzers employ sensors that are heated to relatively high temperatures and are operated directly above, or near, the furnace or boiler combustion zone. Known analyzers, such as those sold under the trade designation Oxymitter or Model 6888 O₂ Combustion Flue Gas Transmitter available from Rosemount Analytical, Inc. of Solon, Ohio (an Emerson Process Management company), often employ zirconia oxide sensors heated to a temperature above approximately 736° Celsius (1300° Fahrenheit). If the combustion process should suffer a flame out condition, raw fuel and air could be exposed to this sensor which, by virtue of its elevated temperature, could become an ignition source with the possibility of precipitating an explosion.

[0003] Some process analyzers are approved for hazardous area operation. Some approvals include those provided by the Canadian Standards Association (CSA), Factory Mutual (FM), ATEX, et cetera. Typically, hazardous area-approved analyzers include a flame arrestor that is added over the diffuser with the intent of quenching, or otherwise inhibiting, an explosion that might occur in front of the heated measurement cell, thereby preventing the ignition of the larger fuel volume in the boiler or combustion zone. These flame arrestors have been tested and approved in the past. However, it is believed that such arrestors can be improved. Moreover, the utilization of the flame arrestors may inhibit, to some degree, access to the measurement cell thereby increasing measurement lag. However, the utilization of flame arrestors adds expense and complexity to the system.

[0004] Some known process analyzers use flame scanners to detect a flameout and quickly and automatically cease fuel and/or air flow. Additionally, some efforts have been directed toward automatically creating a gaseous buffer between the measurement cell and the

flue upon detection of a flameout. While these systems are effective, they add additional hardware and complexity thereby increasing system cost.

SUMMARY

[0005] A process combustion transmitter is provided. The transmitter includes a process probe extendible into a flow of process combustion exhaust. The process probe has a measurement cell with an operating temperature that is above a flashpoint of process combustion fuel. The process probe includes a heater configured to heat the measurement cell to the operating temperature. Electronic circuitry is coupled to the measurement cell and to the heater. The electronic circuitry is configured to disengage power to the heater once process combustion heat is sufficient to maintain the measurement cell at the operating temperature and thereafter to maintain the heater in a de-energized state.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] FIG. 1 is a diagrammatic view of an in situ combustion process analyzer with which embodiments of the present invention are particularly useful.

[0007] FIG. 2 is a diagrammatic exploded view of a process analytic oxygen transmitter in accordance with an embodiment of the present invention.

[0008] FIG. 3 is a diagrammatic view of an in situ combustion process analyzer in accordance with an embodiment of the present invention.

[0009] FIG. 4 is a flow diagram of a method of operating an in situ process analytic oxygen transmitter in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0010] FIG. 1 is a diagrammatic view of an in situ process combustion analyzer with which embodiments of the present invention are particularly useful. Transmitter 10 can be any suitable analyzer including the 6888 O₂ Combustion Flue Gas Transmitter listed above. Transmitter 10 includes a probe assembly 12 that is disposed within a stack or flue 14 and measures at least one parameter related to combustion occurring at burner 16. Typically, transmitter 10 is an oxygen transmitter, but can be any device that measures any suitable parameter related to the combustion process. Burner 16 is operably coupled to a source 18 of air or oxygen and a source 20 of combustible fuel. Each of sources 18 and 20 is preferably coupled to burner 16 through a valve of some sort to deliver a controlled amount of oxygen

and/or fuel to burner 16 in order to control the combustion process. Transmitter 10 measures the amount of oxygen in the combustion exhaust flow and provides an indication of the oxygen level to combustion controller 22. Controller 22 controls one or both of valves 24, 26 to provide closed-loop combustion control. Transmitter 10 includes an oxygen sensor that typically employs a zirconia oxide sensor substrate to provide an electrical signal indicative of oxygen concentration, content or percentage in the exhaust. Zirconia oxide sensors operate at a temperature of about 700° Celsius and transmitter 10 includes, within probe assembly 12, an electrical heater that is operably coupled to AC power source 29. AC power source 29 can be a 110 or 220 VAC source that provides electrical energy to one or more electrical heating elements within probe assembly 12 to heat the zirconia oxide sensor substrate to a suitable temperature.

[0011] As can be appreciated, should burner 16 experience a flameout condition, it is possible that raw fuel and air could continue to flow from sources 20, 18, respectively, which materials could contact the hot zirconia oxide sensor, which could provide an unintended source of ignition. In order to address flameout conditions, prior art methods generally include a flame scanner 28 disposed to provide a signal indicative of the presence of flame 30 at burner 16. This flame scanner signal has been provided allow suitable reaction to the flameout condition. In the past, the flame scanner signal has been used to close a fuel valve and/or remove power from the analyzer thereby de-energizing the heater within probe assembly 12. In many cases, this removal of power allows rapid cooling of the zirconia oxide sensor to a temperature that is below the fuel ignition temperature, thereby creating a safe condition.

[0012] FIG. 2 is a diagrammatic view of an in situ process combustion analyzer in accordance with an embodiment of the present invention. Probe assembly 12 is generally configured to house the sensor core assembly which includes diffuser 32 disposed next to measurement cell 36. As described above, measurement cell 36 is operable at an elevated temperature and the elevated temperature is provided by electrical heater assembly 38, during startup. Measurement cell 36 and heater assembly 38 are electrically coupled to electronic circuitry of transmitter 10. The electronic circuitry is carried on electronics board 42 in housing 44. Additionally, temperature sensor 46 is also coupled to electronic circuitry on board 42. Temperature sensor 46 provides an indication of the temperature of the probe assembly 12 to the circuitry. Temperature sensor 46, in one embodiment, is separate from and in addition to the temperature sensor disposed within or proximate heater assembly 38 for thermal control of heater 38 during energization. In this way, temperature sensor 46 can provide an indication of

process heat that is less affected by heat generated from heater assembly 38. In accordance with an embodiment of the present invention, the electronic circuitry is configured, through hardware, software or a combination thereof, to determine whether the temperature of probe assembly 12, as indicated by temperature sensor 46, has reached a heater shutoff threshold and upon reaching such threshold, latching, or otherwise placing, the heater power in an off condition until the electronic circuitry receives a reset signal. Thus, the process heat becomes the sole source of elevated temperature for measurement cell 36. If the process combustion should suffer a flameout condition, the loss of flame will quickly allow measurement cell 36 to cool such that it will not be a source of unintended ignition for non-combusted fuel. This passive protection feature can provide enhanced flameout protection in environments where a flame scanner is not technically and/or economically feasible. Additionally, while embodiments of the present invention are designed for use at flameout conditions, they are generally not employed during system startup. However, the system startup is generally a more controlled situation than a steady state flameout because a technician or operator is present during the system startup.

[0013] FIG. 3 is a diagrammatic view of an in situ combustion process analyzer in accordance with an embodiment of the present invention. Transmitter 50 includes probe assembly 52 containing therein a process gas sensor that operates at a temperature that is high enough to ignite unburned fuel from source 20 in the presence of air or oxygen from source 18 if flame 30 is lost. The combustion process analyzer shown in FIG. 3 does not require a flame scanner signal and thus the flame scanner is omitted from the combustion monitoring/control system. Transmitter 50, in accordance with an embodiment of the present invention, once reset, will allow its heater to operate until such time as it determines that process heat from flame 30 is sufficient to maintain a suitable elevated temperature of measurement cell 36, within probe assembly 52. Once the process heat is sufficient, heater 38 is disengaged and thereafter maintained in such condition until transmitter 50 is reset. Such reset can be in the form of a technician operating a reset button or control disposed on transmitter 50 or by sending a suitable reset command to transmitter 50 via a process communication loop or other suitable communication channel. This reset signal will generally be provided by the technician when the combustion process is starting up, and thus occurs under the technician's supervision. Since embodiments of the present invention provide protection against flameout conditions without the need for a flame scanner signal or a constant connection to a source of gas, such as calibration or purge gas, it is believed that embodiments of the present invention can be utilized

in more applications than previous systems due to the simplicity and lower cost. Additionally, some embodiments of the present invention may be practicable without requiring the additional expense of a flame arrestor.

[0014] FIG. 4 is a flow diagram of a method of operating an in situ process analytic oxygen transmitter in accordance with an embodiment of the present invention. Method 80 begins at block 82 where the in situ transmitter is initialized. Such initialization may include an initial power-up of the transmitter or, in the case of the transmitter already having power, the provision of a reset signal, either locally or via suitable communication techniques. Once initialized, the in situ transmitter will allow its heater to be engaged, as indicated at block 84. This allows the measurement cell to quickly reach its operating temperature such that useful process measurements can be provided. At block 86, the transmitter begins providing process variable information, such as oxygen content in combustion gases, to a process controller, such as controller 22, or other suitable device. At block 88, the transmitter determines if process heat is sufficient to maintain an elevated temperature of the measurement cell. If the process heat is not sufficient, control returns to block 86 via line 90, and the method loops until sufficient process heat is present. Once sufficient process heat is present, control passes to block 92, where the heater is latched in an off or de-energized state. The determination of whether sufficient process heat is present, in one embodiment, is performed automatically by transmitter 52. In such instance, transmitter 52 measures a temperature within or proximate probe 52 and compares the measured temperature with a threshold value. If the measured temperature is at or above the threshold value, for example, the heater can be de-energized and remain so until the transmitter receives a reset. However, embodiments of the present invention also include other techniques by which the heater may be latched off. For example, the transmitter may receive a “heater off” signal from the combustion controller, which has determined that the combustion heat is sufficient to maintain the measurement cell at a suitable elevated temperature for operation. Once the heater is latched off, control passes to block 94 where the process combustion transmitter continues providing process variable information regarding process combustion gases, such as oxygen content, while the heater is de-energized.

[0015] Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

WHAT IS CLAIMED IS:

1. A process combustion transmitter comprising;
a process probe extendible into a flow of process combustion exhaust, the process probe having a measurement cell with an operating temperature that is above a flashpoint of process combustion fuel, wherein the process probe includes a heater configured to heat the measurement cell to the operating temperature; and electronic circuitry coupled to the measurement cell and to the heater, the electronic circuitry being configured to disengage power to the heater once process combustion heat is sufficient to maintain the measurement cell at the operating temperature, and thereafter to maintain the heater in a de-energized state.
2. The process combustion transmitter of claim 1, wherein the measurement cell includes an oxygen sensor.
3. The process combustion transmitter of claim 2, wherein the oxygen sensor is a heated sensor with an operating temperature at or above about 700 degrees Celsius.
4. The process combustion transmitter of claim 1, wherein the electronic circuitry is operably coupled to a temperature sensor disposed to provide an indication of a temperature of the process probe.
5. The process combustion transmitter of claim 4, wherein the temperature sensor is disposed within the process probe.
6. The process combustion transmitter of claim 1, wherein the electronic circuitry is configured to maintain the heater in the de-energized state until a reset signal is received.
7. The process combustion transmitter of claim 6, wherein the reset signal is generated locally at the process combustion transmitter.
8. The process combustion transmitter of claim 6, wherein the electronic circuitry is configured to receive the reset signal via a process communication loop.
9. A method of operating an in situ process combustion transmitter having a measurement cell with an operating temperature above a flashpoint of combustion fuel, the method comprising:
initializing the transmitter to begin providing a process combustion variable output and to heat the measurement cell to the operating temperature;
determining whether process combustion heat is sufficient to maintain the measurement cell at or above the operating temperature;

placing the heater in a de-energized state when the process combustion heat is sufficient to maintain the measurement cell at or above the operating temperature and thereafter maintaining the heater in the de-energized state.

10. The method of claim 9, wherein determining whether the process combustion heat is sufficient to maintain the measurement cell at or above the operating temperature is performed by the process combustion transmitter.


11. The method of claim 9, wherein the operating temperature is about 700 degrees Celsius.

12. The method of claim 9, wherein the process combustion variable output is indicative of an oxygen content in combustion exhaust.

13. The method of claim 9, wherein initializing the process combustion transmitter includes providing a reset to the process combustion transmitter.

14. The method of claim 13, wherein the reset is provided locally to the process combustion transmitter.

15. The method of claim 13, wherein the reset is provided to the process combustion transmitter over a process communication channel.

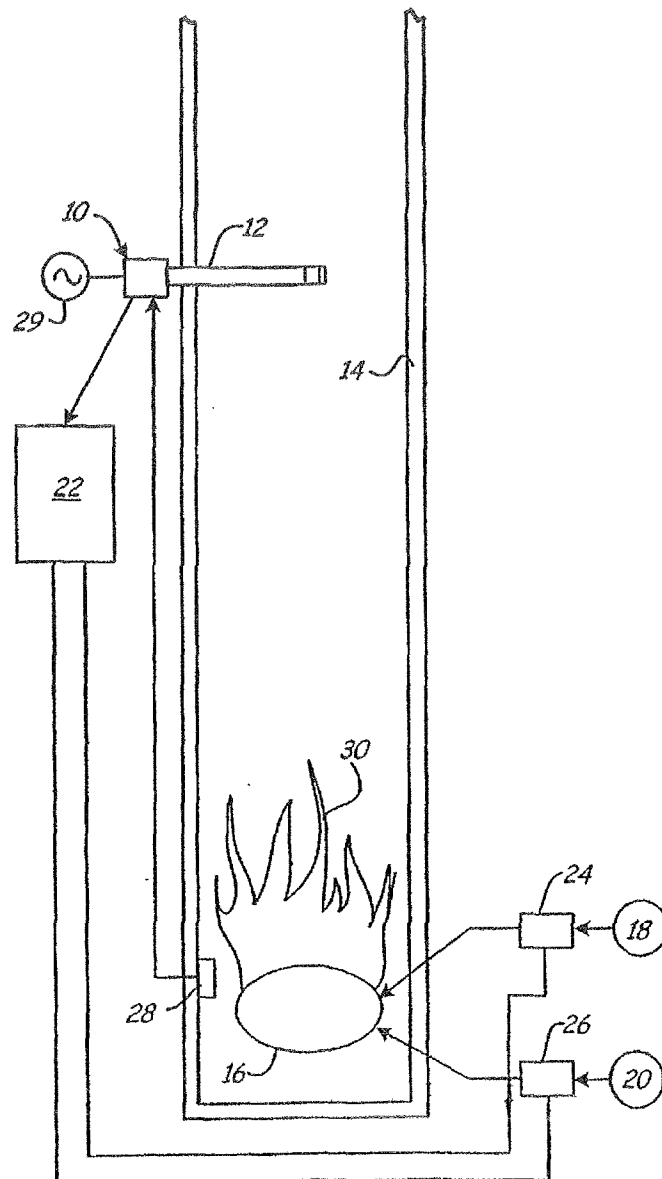*Fig. 1*

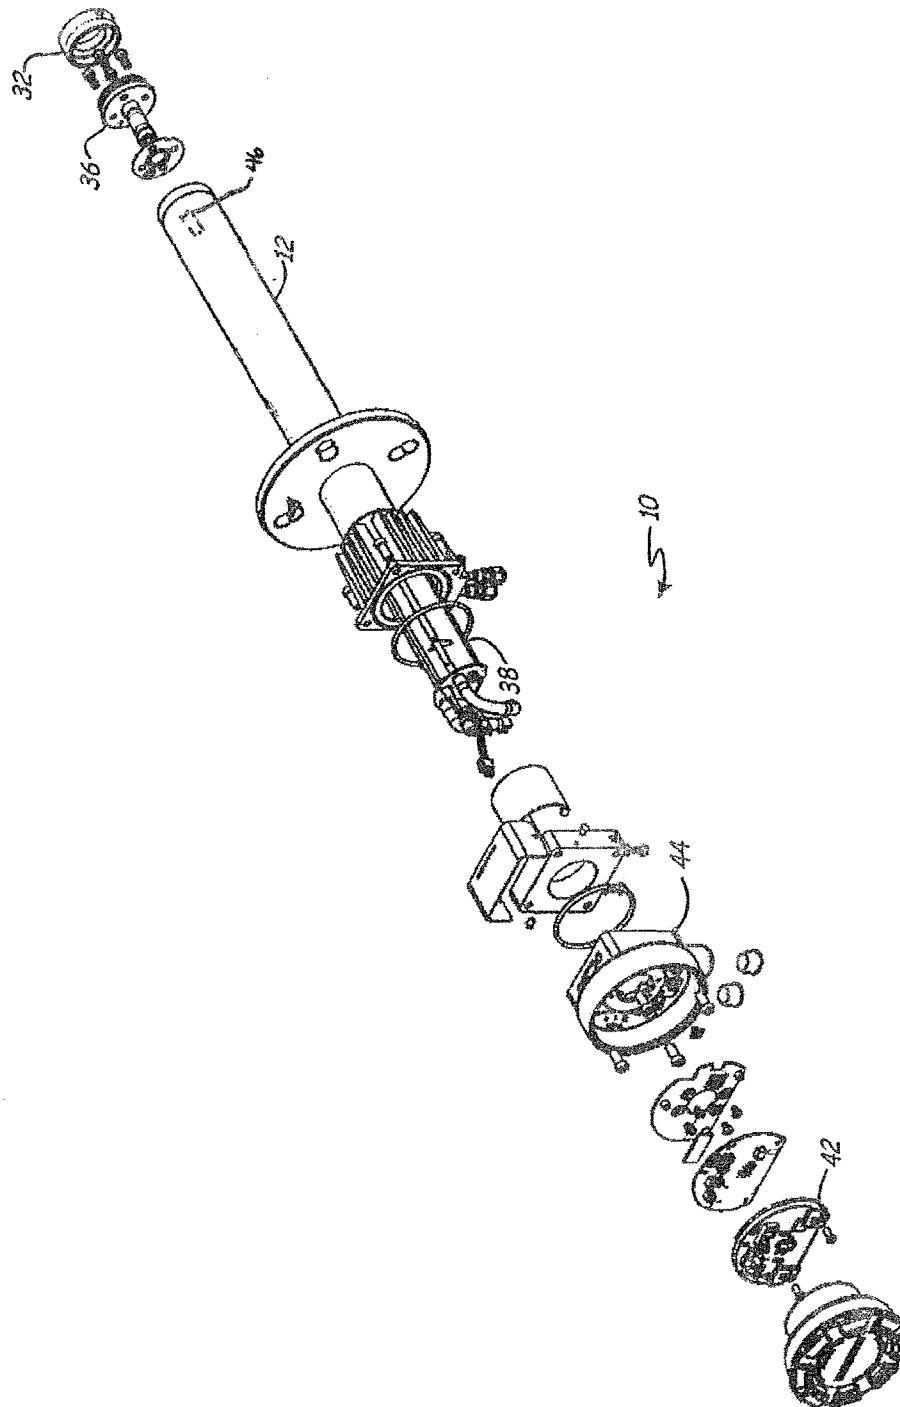
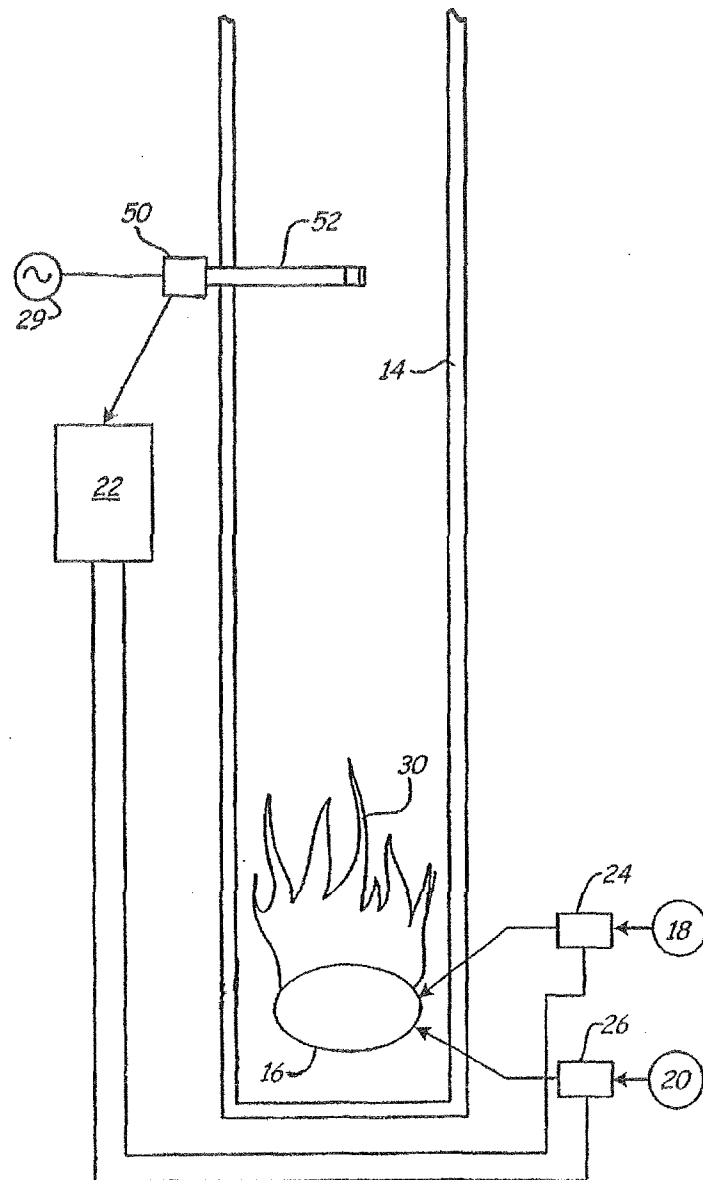


Fig. 2

*Fig. 3*

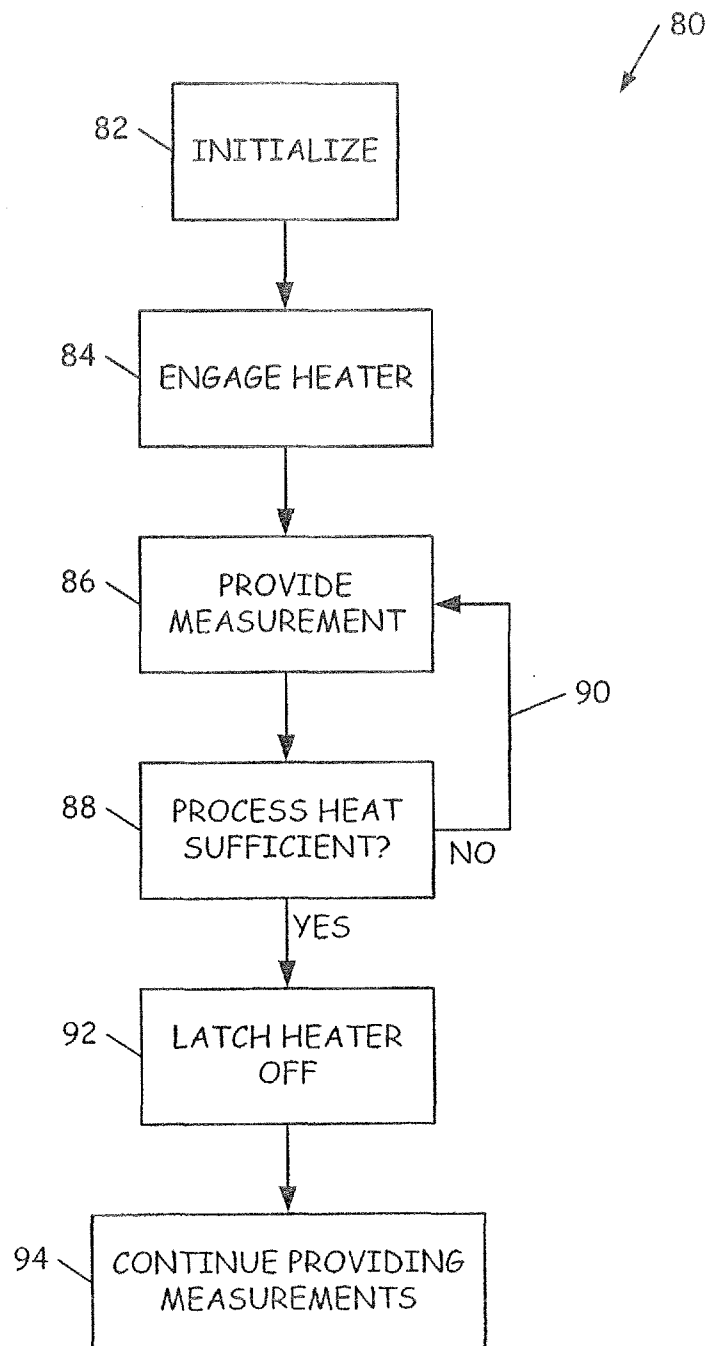


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/031561**A. CLASSIFICATION OF SUBJECT MATTER****F23N 5/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F23N 5/02; F01N 3/00; F16K 31/02; G01N 33/00; G01N 27/26; G01R 27/08; G01D 21/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: combustion, burner, transmitter, probe, sensor, heater, and operating temperature

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011-0012040 A1 (BAILEY, EDWARD J.) 20 January 2011	1-3, 6-15
Y	See paragraphs [0015]-[0026], claims 1-4, 15 and figures 2-3.	4-5
Y	US 2010-0073017 A1 (BEVOT et al.) 25 March 2010	4-5
	See paragraphs [0032]-[0034] and figure 1.	
A	US 2008-0087005 A1 (WAHL et al.) 17 April 2008	1-15
	See abstract and claims 1-3.	
A	US 5137616 A (POOR et al.) 11 August 1992	1-15
	See column 10, line 22 - column 12, line 32 and figures 1-2.	
A	US 2011-0056313 A1 (DAHLEN et al.) 10 March 2011	1-15
	See paragraphs [0033]-[0036] and figures 1-2.	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 August 2014 (19.08.2014)

Date of mailing of the international search report

20 August 2014 (20.08.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

HWANG, Chan Yoon

Telephone No. +82-42-481-3347



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/031561

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0012040 A1	20/01/2011	CN 102725571 A	10/10/2012
		CN 102725571 B	02/07/2014
		EP 2454508 A2	23/05/2012
		JP 05543591 B2	09/07/2014
		JP 2012-533721 A	27/12/2012
		US 2013-145814 A1	13/06/2013
		US 8635899 B2	28/01/2014
		US 8689605 B2	08/04/2014
		WO 2011-008743 A2	20/01/2011
		WO 2011-008743 A3	20/09/2012
US 2010-0073017 A1	25/03/2010	CN 101685078 A	31/03/2010
		CN 101685078 B	25/06/2014
		DE 102008042268 A1	01/04/2010
		US 8286470 B2	16/10/2012
US 2008-0087005 A1	17/04/2008	DE 102005006760 A1	17/08/2006
		EP 1853807 A1	14/11/2007
		EP 1853807 B1	08/01/2014
		JP 04825224 B2	30/11/2011
		JP 2008-530542 A	07/08/2008
		KR 10-2007-0110851 A	20/11/2007
		KR 1092812 B1	12/12/2011
		US 8240127 B2	14/08/2012
		WO 2006-087261 A1	24/08/2006
US 05137616 A	11/08/1992	CA 2060700 A1	05/10/1992
		CA 2060700 C	13/08/1996
		MX 9201152 A	01/10/1992
		US 05211820 A	18/05/1993
US 2011-0056313 A1	10/03/2011	CA 2723413 A1	19/11/2009
		CN 102016476 A	13/04/2011
		EP 2274566 A1	19/01/2011
		JP 2011-524508 A	01/09/2011
		RU 2010-143982 A	20/06/2012
		RU 2505746 C2	27/01/2014
		US 08584540 B2	19/11/2013
		WO 2009-139714 A1	19/11/2009