

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 September 2004 (10.09.2004)

PCT

(10) International Publication Number
WO 2004/077412 A2

(51) International Patent Classification⁷:

G11B

(21) International Application Number:

PCT/KR2004/000391

(22) International Filing Date: 25 February 2004 (25.02.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10-2003-0011830

25 February 2003 (25.02.2003) KR

10-2003-0011829

25 February 2003 (25.02.2003) KR

10-2003-0015634

13 March 2003 (13.03.2003) KR

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-721 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PARK, Yong Cheol** [KR/KR]; Jugong APT. 215-204, Wonmun-dong, Gwachon-si, Gyeonggi-do 427-030 (KR). **KIM, Sung Dae** [KR/KR]; Jugong APT. 1110-1406, Sanbon-dong, Gunpo-si, Gyeonggi-do 435-040 (KR).

(74) Agents: **BAHNG, Hae Cheol** et al.; Kims International Patent & Law Office, 15th Floor Yo Sam Building, 648-23, Yeoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RECORDING MEDIUM HAVING DATA STRUCTURE FOR MANAGING AT LEAST A DATA AREA OF THE RECORDING MEDIUM AND RECORDING AND REPRODUCING METHODS AND APPARATUSES

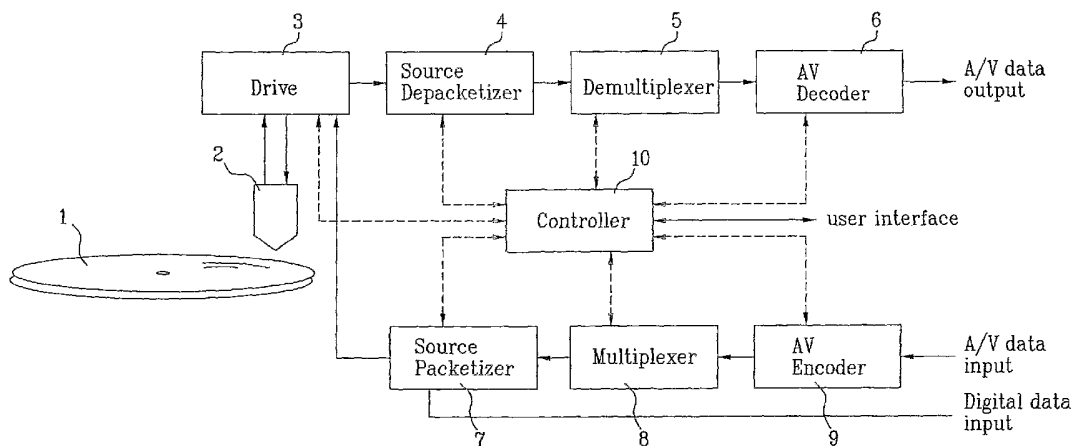

(57) Abstract: The data structure on the recording medium includes a temporary defect management area storing a data block. The data block includes a space bit map and a temporary definition structure. The space bit map indicates recordation status of the data area, and the temporary definition structure provides a pointer to the space bit map.

WO 2004/077412 A2

**RECORDING MEDIUM HAVING DATA STRUCTURE FOR MANAGING
AT LEAST A DATA AREA OF THE RECORDING MEDIUM AND
RECORDING AND REPRODUCING METHODS AND APPARATUSES**

5 Technical Field

The present invention relates to a recording medium having a data structure for managing at least a data area of the recording medium as well as methods and apparatuses for reproduction and recording.

10 Background Art

The standardization of new high-density read only and rewritable optical disks capable of recording large amounts of data has been progressing rapidly and new optical disk related products are expected to be commercially available in the near future. For example, the blu-ray disc (BD), which belongs to the
15 next-generation HD-DVD technology, is the next-generation optical recording solution that can strikingly surpass the data recording capability of existing DVDs.

Recording on and reading from a BD uses a celadon laser having a wavelength of 405nm, which is much denser than a red laser having a wavelength
20 of 650nm used with existing DVDs. Thus, a greater amount of data may be stored on BD than on existing DVDs.

While at least one standard related to the BD (Blu-ray Disc) has been developed, such as BD-RE (BD Rewritable disc), many other standards such as BD-WO (BD Write Once disc) are still in development. Standards such as BD-RE
25 provide a data structure for managing defects in the data area of the recording medium. However, the BD-WO, because of its write-once nature, presents challenges not faced by existing BD standards such as BD-RE, and an effective

data structure and method of managing defects is still under development for the BD-WO standard.

Disclosure of Invention

5 The recording medium according to the present invention includes a data structure for managing at least a data area of the recording medium.

 In one exemplary embodiment, a temporary defect management area of the recording medium stores a first data block that includes a space bit map and a temporary definition structure. The space bit map indicates recordation status of
10 the data area, and the temporary definition structure provides a first pointer to the space bit map.

 The space bit map, for example, indicates the recordation status of the data area on a recording unit by recording unit basis. Here, a recording unit may be a cluster.

15 In another exemplary embodiment, the temporary definition structure may also provide a second pointer to a temporary defect list stored in a second data block in the temporary management area. The temporary defect list at least indicates defective portions of the data area.

 In the above embodiment, the first pointer of the temporary definition
20 structure may indicate a first physical sector number of the space bit map and the second pointer may indicate a first physical sector number of the temporary defect list. More specifically though, the first and second pointers identify a most current space bit map and a most current temporary defect list as of when the temporary definition structure is recorded.

25 The present invention further provides apparatuses and methods for recording and reproducing the data structure according to the present invention.

Brief Description of the Drawings

The above features and other advantages of the present invention will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

5 Fig. 1 illustrates a single-layer write once optical disc according to an example embodiment of the present invention.

Fig. 2 shows the method of recording and updating the TDFL (temporary defect list) according to an embodiment of the present invention;

10 Fig. 3 schematically illustrates the direction in which the different areas of the optical disc are recorded;

Figs. 4A illustrates the case where the SBM (space bit map) is recorded in the 31 leading sectors in a cluster, and the TDDS (temporary disc definition structure) is recorded in the remaining sector;

Fig. 4B illustrates an example of the data structure of the SBM;

15 Fig. 5 illustrates another example embodiment of a single-layer write once optical disc according to the present invention; and

Fig. 6 illustrates an embodiment of a recording and reproducing apparatus according to the present invention.

20 **Best mode for Carrying Out the Invention**

In order that the invention may be fully understood, exemplary embodiments thereof will now be described with reference to the accompanying drawings.

25 Fig. 1 illustrates a single-layer write once optical disc according to an example embodiment of the present invention. While this and other embodiments of the present invention will be described in detail with respect to an optical disc, it will be understood that the recording medium is not limited to being an optical

disk.

As shown in Fig. 1, the optical disc includes a main data area referred to as a user area for recording data. However, this user area may include defects that prohibit proper recording and/or reproduction. Accordingly, inside and outside spare areas ISA0 and OSA0 are provided to serve as replacement recording area for defect areas of the user area.

Providing such replacement areas also requires providing a data structure for managing defect replacement. As shown in Fig. 1, one or more defect management areas (DMAs) are provided for storing information to manage defect replacement, among other things, of the recording medium. In the case of a general rewritable optical disc, data can be repeatedly written in and erased from a DMA (Defect Management Area) even if the DMA has a limited size, and thus a DMA of a large size is not required. However, in the case of a write once optical disc, a once-recorded area cannot be re-used for data recording, and a management area of a larger size is required. Accordingly, the optical disc of the embodiment in Fig. 1 includes one or more TDMAs (Temporary Defect Management Areas) for managing information of the defect area. When no further recording is or can be made on the optical disc, the final TDMA information is transferred to and recorded in the DMA.

In the embodiment of FIG. 1, the TDMAs include first and second TDMAs TDMA1 and TDMA2. TDMA1 is arranged in a lead-in area of the optical disc, and has a fixed size. TDMA2 is arranged in the outside spare area OSA0, and has a size associated with a size of the outside spare area OSA0. For example, if the outside spare area OSA0 has a size of $N \times 256$ clusters, then the TDMA2 has a size $P = (N \times 256) / 4$. In this example of a BD-WO, a recording unit is defined as one cluster, and one cluster is composed of 32 sectors.

The respective TDMAs may be used to store a TDFL (Temporary Defect

List), a TDDS (Temporary Disc Definition Structure), and an SBM (Space Bit-Map) as data area management information. As will be described in greater detail below, the TDFL provides information for the replacement of defect areas in the data area with portions of the spare areas ISA0 and OSA0, and has a size of 1~4 clusters according to the size of the defect area list.

The SBM (Space Bitmap) provides information indicating the use or recordation status of the disc, and is applicable to the user area and/or the whole area of the disc. The SBM allocates one bit to each cluster, which is the minimum recording unit, to indicate the recording status of the associated cluster. For example, '1b' indicates the corresponding cluster is a recorded area and '0b' indicates the corresponding cluster is a non-recorded area. Accordingly, by reading the SBM information, the recording/non-recording areas of the disc may be easily recognized. Because the SBM indicates the use status of the disc even if the disc is not recorded sequentially (e.g., is recorded randomly), the SBM is used and managed if the optical disc write once is to be recorded in a random recording mode.

As will be described in greater detail below, the TDDS provides position information indicating a most current version of the TDFL and the SBM at the time the TDDS is recorded. As will be appreciated, as data is written to the optical disc and as portions of the spare areas ISA0 and OSA0 are used to replace defective areas, the TDFL, SBM and TDDS are updated (e.g., written anew in the TDMA's).

As shown in Fig. 1, the TDFL and TDDS (TDFL+TDDS) are recorded as one data block (in the case of BD-WO, at least one cluster) in a TDMA, and the SBM and TDDS (SBM+TDDS) are recorded as another data block in the TDMA. Fig. 1 shows an example where the TDFL+TDDS and SBM+TDDS are recorded in the TDMA in the unit of a cluster for respective update timings. That is, in one

cluster composed of 32 sectors, the TDFL and the SBM are recorded in the 31 leading sectors sector0~sector30, and the TDDS information is recorded on the remaining sector sector31. However, it will be understood that more than one cluster may be necessary to store the respective data blocks. Even so, the TDDS is stored as the last information in the data block. The TDDS information generally includes the general management information of the disc, and because the TDDS information is recorded as the last part of the recorded area in the TDMA, the TDDS information may be easily accessed. Alternatively, a system designer may place the TDDS in as the first information in the data block to achieve the same benefits.

In this embodiment of the present invention, the position information for the TDFL and SBM provided by the TDDS is the First PSN (physical sector number) of the latest TDFL, and the First PSN of latest SBM. Accordingly, accessing the TDDS provides the position of the latest TDFL and SBM such that the present defect replacement information and recording status of the disc may be easily and efficiently determined. A first physical sector number is the address of the first leading sector in a corresponding cluster.

Fig. 2 shows the method of recording and updating the TDFL according to an embodiment of the present invention. Fig. 2 illustrates that two defect entries defect entry #1,#2 were recorded during a first recording of a TDFL+ TDDS data block. If during a second updating, a new defect entry #3 is to be added, a new TDFL+TDDS data block, in which the TDFL includes the first, second and third defect entries #1, #2, #3, is recorded. Similarly, if during a third updating, a new defect entry #4 is to be added, a new TDFL+TDDS data block, in which the TDFL includes the first-fourth defect entries #1-#4, is recorded. By cumulatively recording the defect entries as described above, the defect entries of the whole disc may be accessed by accessing the latest TDFL, thereby providing

convenience to the user.

As will be appreciated, with each updating of the TDFL the TDDS is updated; particularly, to indicate the new position of the TDFL.

Fig. 3 schematically illustrates the direction in which the different areas of the optical disc are recorded. This explanation will be helpful in understanding the data structure of the SBM described in detail below with respect to Figs. 4A and 4B.

While Fig. 1 illustrated an example of a single layer optical disc, BD-WO may have a plurality of recording layers. As such aspects of the single layer optical disc according to the present invention may be applied to both layers. For the purposes of explanation, Fig. 3 schematically illustrates a plurality of layers for the respective areas in an optical disc write once, such as a BD-WO.

In the BD-WO of Fig. 3, first and second recording layers Layer0 and Layer1 (hereinafter referred to as 'L0' and 'L1') may exist. The respective recording layers include an inner area, an inner spare area, a user area, an outer spare area, and an outer area. In the case of a dual-layer disc, the inner area of the first recording layer L0 becomes the lead-in area, and the inner area of the second recording layer L1 becomes the lead-out area. However, in the case of the single-layer disc, the outer area will be the read-out area.

Fig. 3 shows that the first recording layer L0 is used from the inner periphery to the outer periphery, and only the outer spare area OSA0 thereof is used from the outer periphery to the inner periphery. The second recording layer L1 is used from the outer periphery to the inner periphery, and only the inner spare area ISA1 thereof is used from the inner periphery to the outer periphery. Accordingly, the start position of the respective area is determined according to a use direction of the area. However, this just corresponds to the use efficiency of the disc, and if the use direction of the respective area is changed, the start position

of the area is also changed.

In a state that the use direction and the start position of the respective area of the disc are defined as described above, the method of indicating the SBM, which is changed according to the use status of the disc, will now be explained in
5 detail.

Figs. 4A illustrates the case where the SBM is recorded in the 31 leading sectors in a cluster, and the TDDS is recorded in the remaining sector sector31. Fig. 4B illustrates an example of the data structure of the SBM. As shown, the SBM includes three parts: a header for enabling recognition of the SBM, SBM
10 information for directly indicating the SBM, and an SBM terminator for informing an end of the SBM.

The header, in addition to identifying this information field as an SBM, includes a recording layer information field and a format version field. The recording layer information field indicates which recording layer (e.g., layer
15 number 0 or 1) the SBM is associated. The format version field indicates to which format version the SBM conforms.

The SBM information is prepared for each divided area of the disc as shown in Fig. 4B, and whether to update the SBM may be determined as needed by a user, a disc manufacturer or a host (hereinafter collectively referred to as a host).
20 Specifically, the SBM information includes start position information (Start Cluster First PSN) of each area, length information of the corresponding area, and bitmap data for each area. In one example embodiment, the bitmap information is updated only once the start position information and the length information are set. This method is called an SBM on/off function, and is for actively coping with the
25 diverse requests of the host. Also, in the case of the BD-WO, if the use environment corresponds to a real-time recording, defect management may not be performed. In this case, the spare area is not allocated and it is not required to

update the SBM of the corresponding area.

Also, in one particular case, only the user area, which is an area where the user data is recorded, may be managed by the SBM, and the SBM will not be updated for changes to the other areas. Operating according to this embodiment is
5 beneficial because if the SBM is updated whenever the management information is changed, frequent updates to the SBM may be required. This embodiment may prevent quickly using up the available TDMA area on the disc. Accordingly, if it is desired to perform the SBM updating of the user data area only using the SBM on/off function and not to update the remaining area, the start position information
10 and the length information of the other areas are set to a specified value, for example, to a 'zero' value.

As will be appreciated, with each update of the SBM, a new SBM+TDDS data block is recorded in the TDMA, where the SBM provides a cumulative indication of the recordation status of the disc. As such, with each updating of the
15 SBM, the TDDS is updated; particularly, to indicate the new position of the SBM.

Fig. 5 illustrates another example embodiment of a single-layer write once optical disc according to the present invention. However, as with the embodiment of Figs. 1-4B, this embodiment may be applied to a multiple layer recording medium. In this embodiment of the present invention, an area for recording the
20 SBM, which indicates the disc use status information, is separately provided in a specified area of the disc.

As shown, the TDMA area for recording the TDFL+TDDS data block is provided in management areas (lead-in or lead-out area) of the disc. For fixed size management areas, such as the lead-in area, the TDMA (e.g., TDMA1) has a fixed
25 size. A TDMA (e.g., TDMA2) may also be provided in the outer spare area OSA0, which has a variable size and thus the TDMA has a variable size. Also, an area for recording the SBM is provided in a specified area of the disc, for example, in the

outer spare area OSA0. In this example, the SBM area in the outer spare area OSA0 has a fixed size (that is, Q clusters). However, the SBM area may be provided in an area other than the outside spare area OSA0.

In this embodiment of the present invention, the TDFL+TDDS data block
5 are recorded and updated in the same manner described in detail with respect to the embodiment of Figs. 1-4B; and therefore, a detailed description thereof will not be repeated. Also, the SBM of this embodiment has the same structure as described in detail above with respect to Fig. 4B; therefore, the detailed explanation thereof will be omitted.

10 Fig. 5 shows the recording of SBM+TDDS in the SBM area, but the designer can freely select the recorded information and thus the recording of SBM only would come within the scope of the present invention.

In comparison to the first embodiment, this second embodiment provides additional information in the TDDS. As shown, the start position and size
15 information of the SBM area are additionally included in the TDDS in order to manage the separately provided SBM area. The position and size information are indicated as the 'First PSN of SBM' and 'The size of SBM' information fields. In the same manner as the first embodiment, this second embodiment includes the latest TDFL and SBM position information. Fig. 5 uses arrows to demonstrate
20 how the latest TDDS points to (e.g., provides position information for) the latest TDFL and SBM information such that the information to facilitate the management of the disc may be efficiently and easily obtained.

Fig. 6 illustrates a schematic diagram of an embodiment of an optical disk recording and reproducing apparatus according to the present invention. As
25 shown, an encoder 9 receives and encodes data (e.g., still image data, audio data, video data, etc.). The encoder 9 outputs the encoded data along with coding information and stream attribute information. A multiplexer 8 multiplexes the

encoded data based on the coding information and stream attribute information to create, for example, an MPEG-2 transport stream. A source packetizer 7 packetizes the transport packets from the multiplexer 8 into source packets in accordance with the audio/video format of the optical disk. As shown in Fig. 6, the operations of the encoder 9, the multiplexer 8 and the source packetizer 7 are controlled by a controller 10. The controller 10 receives user input on the recording operation, and provides control information to encoder 9, multiplexer 8 and the source packetizer 7. For example, the controller 10 instructs the encoder 9 on the type of encoding to perform, instructs the multiplexer 8 on the transport stream to create, and instructs the source packetizer 7 on the source packet format. The controller 10 further controls a drive 3 to record the output from the source packetizer 7 on the optical disk.

The controller 10 also creates the navigation and management information for managing reproduction of the data being recorded on the optical disk. For example, the controller 10 controls the drive 3 to record one or more of the data structures of Figs. 1-6 on the optical disk.

During reproduction or further recording operations, the controller 10 may control the drive 3 to reproduce this data structure. Based on the information contained therein, as well as user input received over the user interface (e.g., control buttons on the recording and reproducing apparatus or a remote associated with the apparatus), the controller 10 controls the drive 3 to reproduce and/or record data from/to the optical disk.

Reproduced source packets are received by a source depacketizer 4 and converted into a data stream (e.g., an MPEG-2 transport packet stream). A demultiplexer 5 demultiplexes the data stream into encoded data. A decoder 6 decodes the encoded data to produce the original data that was fed to the encoder 9. During reproduction, the controller 10 controls the operation of the source

depacketizer 4, demultiplexer 5 and decoder 6. The controller 10 receives user input on the reproducing operation, and provides control information to decoder 6, demultiplexer 5 and the source packetizer 4. For example, the controller 10 instructs the decoder 9 on the type of decoding to perform, instructs the demultiplexer 5 on the transport stream to demultiplex, and instructs the source depacketizer 4 on the source packet format.

While Fig. 6 has been described as a recording and reproducing apparatus, it will be understood that only a recording or only a reproducing apparatus may be provided using those portions of Fig. 6 providing the recording or reproducing function.

The data structure for and method for managing at least a data area of a high-density recording medium in accordance with embodiments of the present invention enables an efficient and progressive use of a write-once recording medium such as BD-WO.

Industrial applicability

As apparent from the above description, the present invention provides methods and apparatuses for recording a data structure on a high density recording medium for managing at least a data area of the recording medium.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art, having the benefit of this disclosure, will appreciate numerous modifications and variations there from. For example, while described with respect to a Blu-ray Write-Once optical disk in several instances, the present invention is not limited to this standard of optical disk or to optical disks. It is intended that all such modifications and variations fall within the spirit and scope of the invention.

What Is Claimed Is:

1. A recording medium having a data structure for managing a data area of the recording medium, comprising:
 - 5 a temporary defect management area storing a first data block, the first data block including a space bit map and a temporary definition structure, the space bit map indicating recordation status of the data area, and the temporary definition structure providing a first pointer to the space bit map.
- 10 2. The recording medium of claim 1, wherein the space bit map indicates recordation status of the data area on a recording unit by recording unit basis.
3. The recording medium of claim 2, wherein the recording unit is a cluster.
- 15 4. The recording medium of claim 3, wherein the first data block includes at least one cluster.
5. The recording medium of claim 1, wherein the temporary definition structure also provides a second pointer to a temporary defect list stored in a
20 second data block in the temporary defect management area, the temporary defect list indicating defective portions of the data area.
6. The recording medium of claim 5, wherein the first pointer indicates a first physical sector number of the space bit map and the second pointer indicates
25 a first physical sector number of the temporary defect list.
7. The recording medium of claim 5, wherein the first and second pointers

identify a most current space bit map and a most current temporary defect list as of when the temporary definition structure is recorded.

8. The recording medium of claim 1, wherein the temporary defect
5 management area stores a second data block, the second data block including a temporary defect list and a temporary definition structure, the temporary defect list of the second data block indicating defective portions of the data area, the temporary definition structure of the second data block providing a first pointer to the space bit map of the first data block and a second pointer to the temporary
10 defect list.

9. The recording medium of claim 8, wherein the first pointer of the temporary definition structure in the second data block indicates a first physical sector number of the space bit map in the first data block and the second pointer of
15 the temporary definition structure in the second data block indicates a first physical sector number of the temporary defect list in the second data block.

10. The recording medium of claim 8, wherein the temporary defect list in the second data block indicates defective clusters of the data area.

20

11. The recording medium of claim 8, wherein the first and second pointers in the temporary definition structure of the second data block identify a most current space bit map and a most current temporary defect list as of when the temporary definition structure of the second block is recorded.

25

12. The recording medium of claim 1, wherein the temporary defect management area stores a second data block, the second data block including a

temporary defect list and a temporary definition structure, the temporary defect
list of the second data block indicating defective portions of the data area, the
temporary definition structure of the second data block provides a first pointer to a
space bit map residing in a data block other than the first data block and provides a
5 second pointer to the temporary defect list in the second data block.

13. The recording medium of claim 12, wherein the first pointer of the
temporary definition structure in the second data block indicates a first physical
sector number of the space bit map in the other data block and the second pointer
10 of the temporary definition structure in the second data block indicates a first
physical sector number of the temporary defect list in the second data block.

14. The recording medium of claim 13, wherein the temporary definition
structure in the first data block includes a second pointer to the temporary defect
15 list in the second data block.

15. The recording medium of claim 1, wherein the space bit map includes
space bit map data, a data pointer pointing to the space bit map data, and a length
indicator indicating a length of the space bit map data.

20

16. The recording medium of claim 15, wherein the data pointer indicates a
first physical sector number of the space bit map data.

17. The recording medium of claim 15, wherein the space bit map data
25 includes a status indicator associated with each recording unit of the data area, the
status indicator indicating whether data is recorded in the associated recording
unit.

18. The recording medium of claim 17, wherein the recording unit is a cluster.

5 19. The recording medium of claim 15, wherein the space bit map further includes a format indicator indicating a format of the space bit map.

20. The recording medium of claim 15, wherein
the recording medium is a dual layer optical disc; and
10 the space bit map further includes a layer indicator indicating a layer to which the space bit map corresponds.

21. The recording medium of claim 1, wherein the recording medium is an optical disk.

15 22. A method of recording management data on a recording medium, comprising:

recording a first data block in a temporary defect management area, the first data block including a space bit map and a temporary definition structure, the
20 space bit map indicating recordation status of the data area, and the temporary definition structure providing a first pointer to the space bit map.

23. A method of reproducing data from a recording medium, comprising:
reproducing at least a portion of data recorded on the recording medium
25 based on a first data block recorded in a temporary defect management area of the recording medium, the first data block including a space bit map and a temporary definition structure, the space bit map indicating recordation status of the data area,

and the temporary definition structure providing a first pointer to the space bit map.

24. An apparatus for recording management data on a recording medium,
5 comprising:

a driver for driving an optical recording device to record data on the recording medium; and

a controller for controlling the driver to record a first data block in a temporary defect management area, the first data block including a space bit map
10 and a temporary definition structure, the space bit map indicating recordation status of the data area, and the temporary definition structure providing a first pointer to the space bit map.

FIG. 1

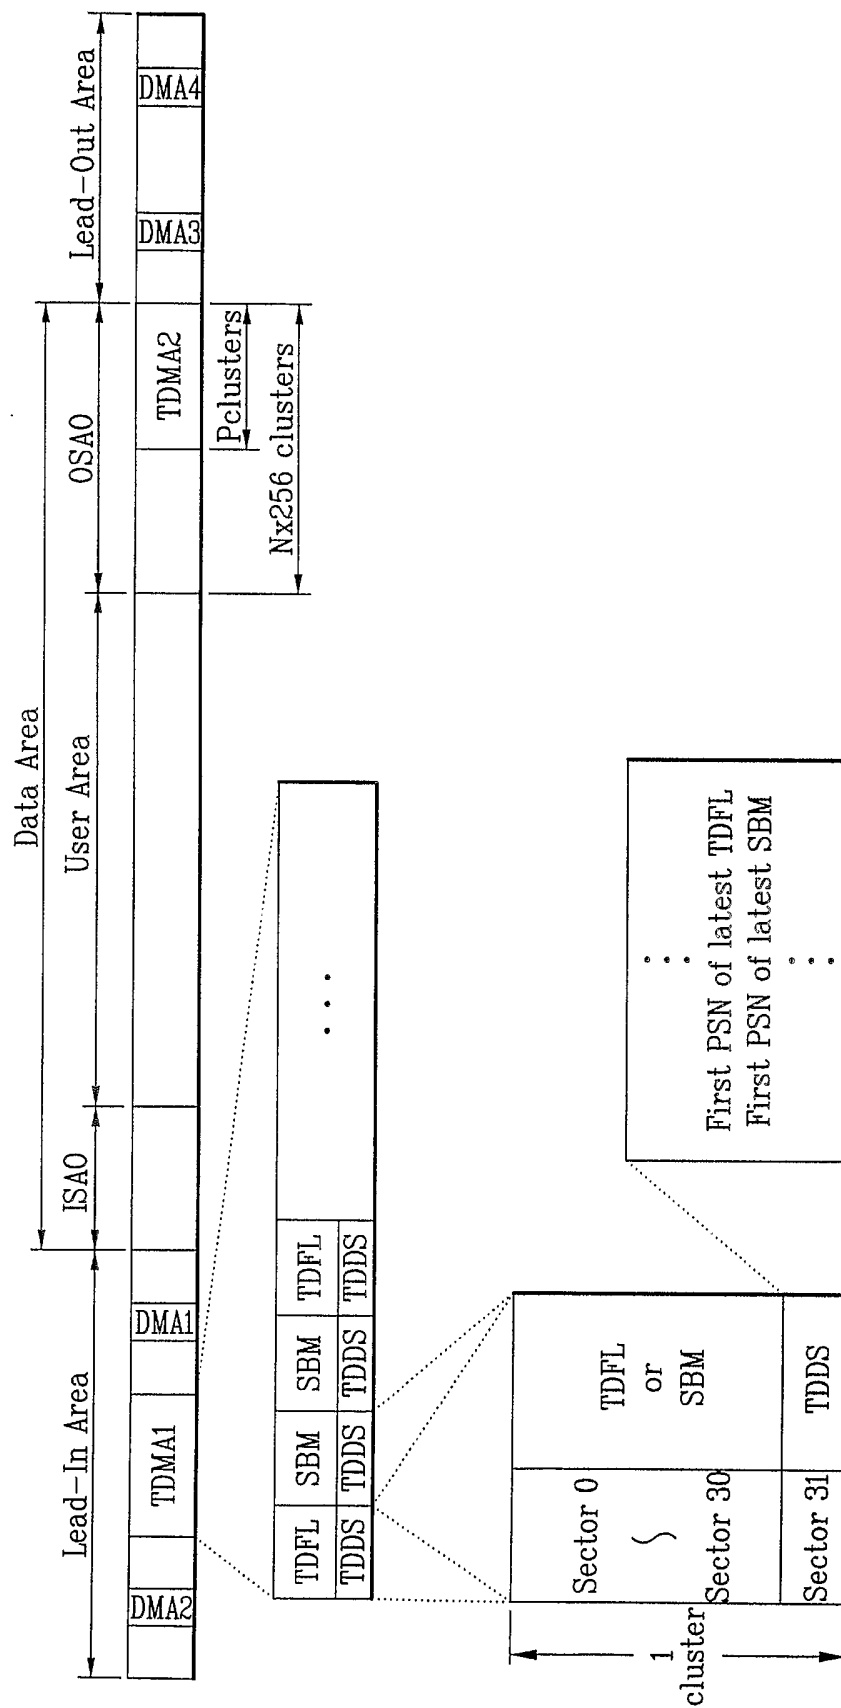


FIG. 2

TDFL

Defect_entry #1	Defect_entry #1	Defect_entry #1
Defect_entry #2	Defect_entry #2	Defect_entry #2
	Defect_entry #3	Defect_entry #3
		Defect_entry #4
TDDS	TDDS	TDDS
1st update	2nd update	3rd update

FIG. 3


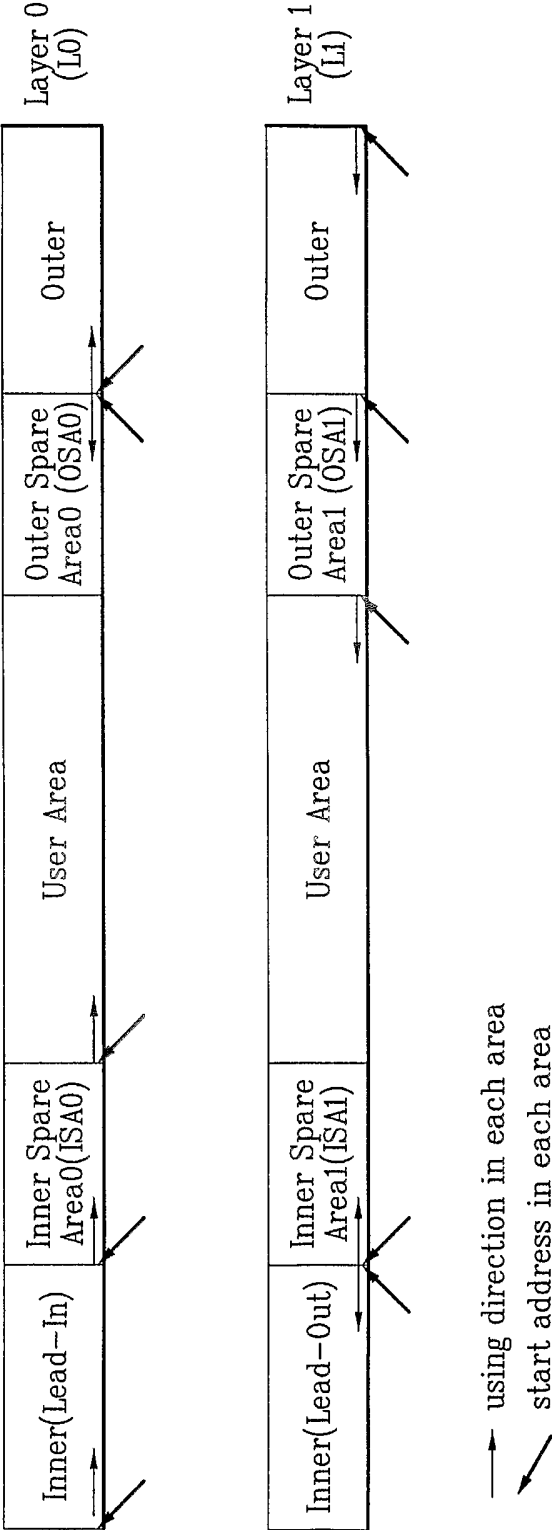


FIG. 4A

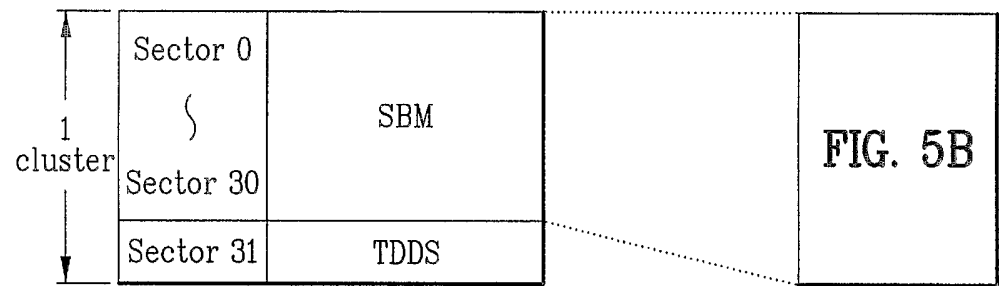

5/7

FIG. 4B

	contents	Number of Bytes
SBM Header	Un-allocated Space Bitmap Identifier = "UB"	2
	Format Version = 00h	1
	Reserved, 00h	1
	Layer Number (0 or 1)	4
	Reserved, 00h	R
SBM Info	SBM for inner Area	
	Start Cluster First PSN	4
	Length in inner area	4
	Bitmap Data	M
	Reserved, 00h	4
	SBM for inner spare Area	
	Start Cluster First PSN	4
	Length in inner spare area	4
	Bitmap Data	N
	Reserved, 00h	4
	SBM for User Area	
	Start Cluster First PSN	4
	Length in user area	4
	Bitmap Data	O
	Reserved, 00h	4
	SBM for outer spare Area	
	Start Cluster First PSN	4
	Length in outer spare area	4
	Bitmap Data	P
	Reserved, 00h	4
	SBM for Outer Area	
	Start Cluster First PSN	4
	Length in outer area	4
	Bitmap Data	Q
	Reserved, 00h	4
SBM Terminator		

FIG. 5

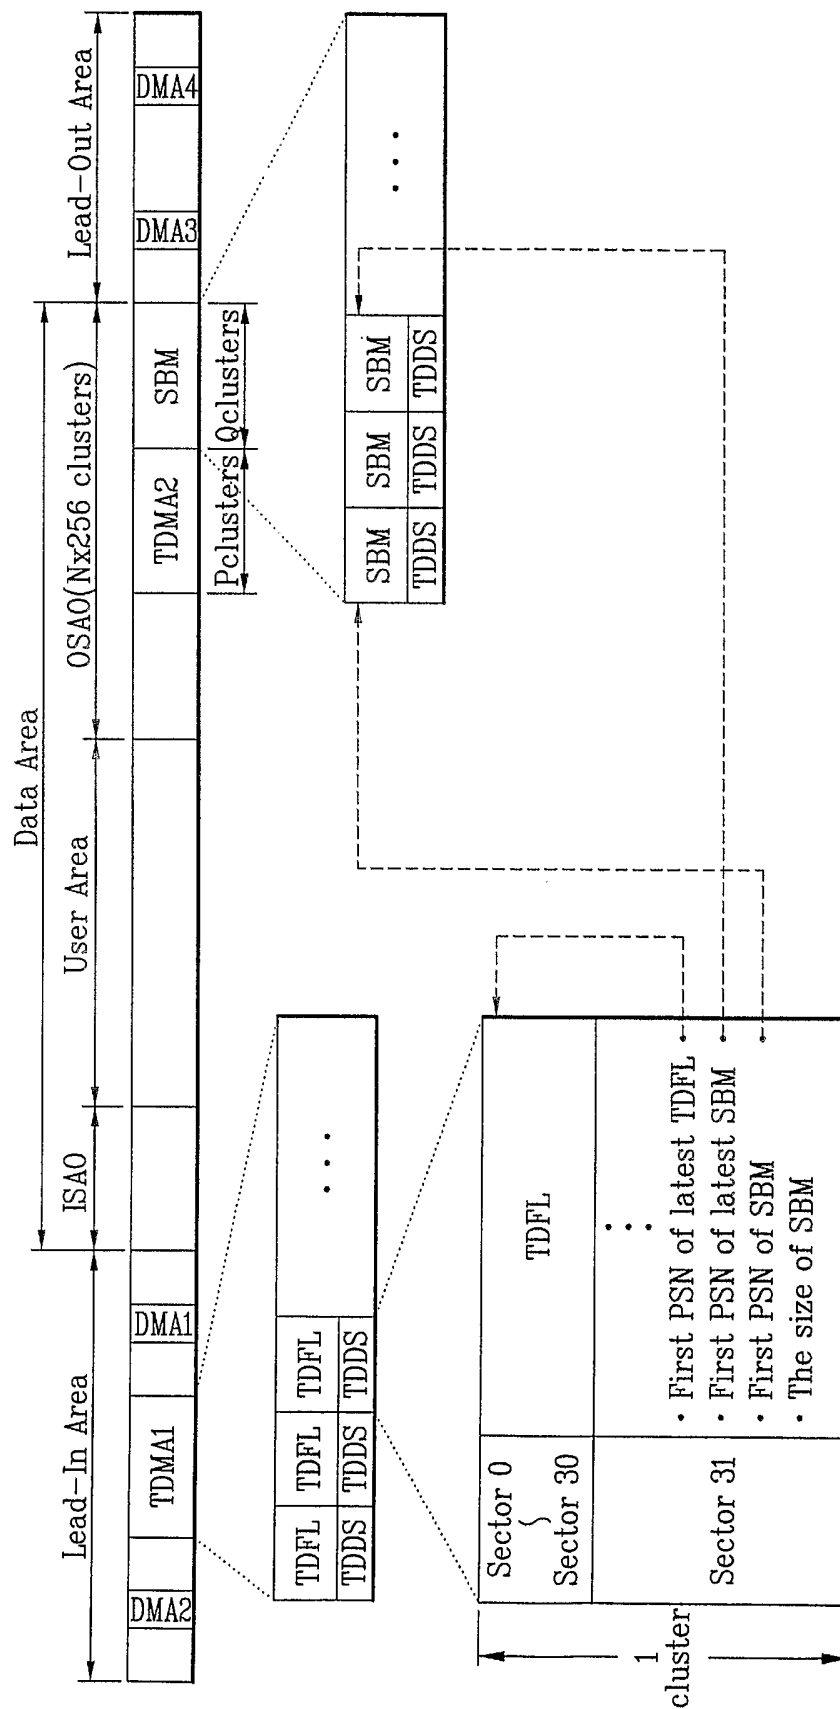


FIG. 6

