

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 April 2003 (24.04.2003)


PCT

(10) International Publication Number
WO 03/033242 A1

- (51) International Patent Classification⁷: **B29C 49/48**, 33/04
- (21) International Application Number: PCT/CA02/01581
- (22) International Filing Date: 18 October 2002 (18.10.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/045,567 19 October 2001 (19.10.2001) US
- (71) Applicants and
(72) Inventors: **RYAN, Michael, J.** [CA/CA]; 28 Hunters Glen, Aurora, Ontario L4G 6W4 (CA). **WEBER, Reinhardt** [CA/CA]; 256 Gordon Drive, Penetanguishene, Ontario L9M 1H4 (CA).
- (74) Agents: **MOSS, W., Dennis et al.**; Ridout & Maybee LLP, 1 Queen Street East, Suite 2400, Toronto, Ontario M5C 3B1 (CA).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: NICKEL BLOW MOLD AND HOLDER DEFINING HEAT TRANSFER PASSAGES THEREBETWEEN

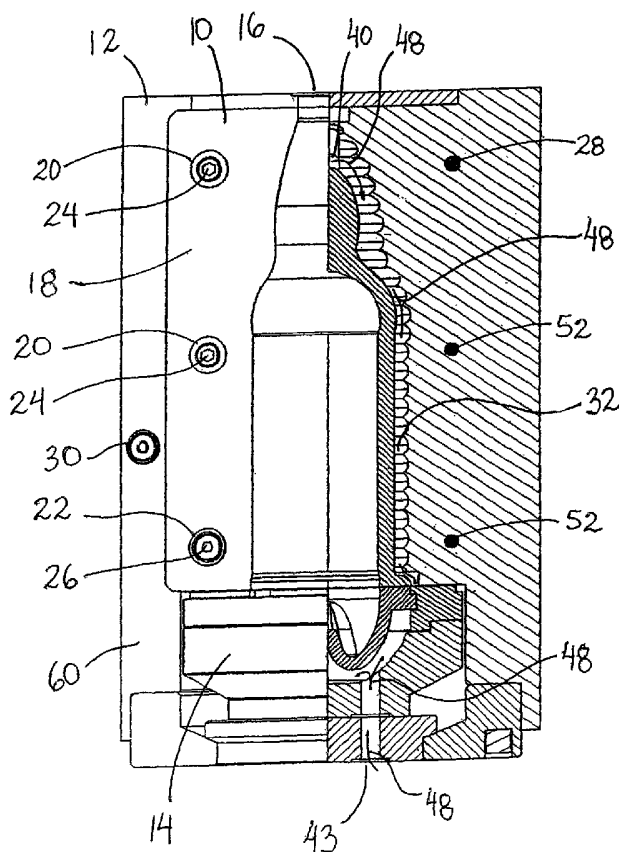

(57) Abstract: An air cooled or heated blow mold is shown having a mold cavity shell (10) and a mold holder (12). The mold cavity shell (10) is made by a process of nickel vapour deposition and so requires no hand finishing or polishing. The mold cavity shell (10) has a cavity portion (13) with a front face defining a cavity (34) in the shape of a portion of a product to be molded. The mold holder (12) is located rearwardly of the mold cavity shell (10) and defines an inner wall spaced from the mold cavity shell (10) cavity portion to define a heat transfer passage (39) between the inner wall and the cavity portion (13). In use, air is passed through the heat transfer passage (39) to transfer heat to or from the mold cavity shell (10).

WO 03/033242 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- 1 -

**NICKEL BLOW MOLD AND HOLDER DEFINING HEAT TRANSFER
PASSAGES THEREBETWEEN**

5

The present invention relates to blow molds, and in particular to air cooled blow molds.

10 Producing plastic products by blow molding is well known. One way of doing this is to provide mating mold halves having shells defining the shape of the desired product to be molded nested within mold holders. A parison is provided inside the mold halves and air is then introduced into the parison to expand it to conform to the shape defined by the mold shells. Upon cooling to a
15 suitable temperature, the molded product is then removed from the blow mold and thereafter, employed in its desired capacity.

Molds are normally made of aluminium. The mold surfaces, which define the shape of the product to be blown, require machining and hand finishing or polishing in order to produce a desired surface finish. Even when the mold
20 surface has been machined, it is difficult to create fine detail which will be easily reproduced in the subsequent blown product. An example of this fine detail desired would be a very small symbol indicating the product is made of recycled plastic, or intricate designs indicating the proprietor's trade-mark. This machining and polishing requirement, apart from being complicated, makes it
25 expensive to produce the molds.

The blow molding process requires that the blow mold unit be cooled or heated to suit the process. Until the blow mold unit has been sufficiently cooled or heated, the blown product cannot be removed. Pre-mature removal of the blown product is likely to result in deformation of its shape which in turn, may
30 affect its commercial applicability as well as its aesthetic appeal. Such cooling or heating is normally accomplished by introducing cold or hot liquid respectively, through a network of heat transfer passages that are machined into the molds. Again, this makes the molds complex, and expensive to produce.

-2-

An example of a liquid cooled mold is shown in U.S. Patent No. 3,768,948, issued to Horberger Jr. et al. This patent shows a blow mold consisting of a carrier and a shell, the shell having fins on its back surface extending toward the carrier, and fin channels provided by the carrier, thus
5 creating a complex fluid cooling network for passage of heat transfer fluid therethrough. The precision manufacture required for the shell and carrier combinations of this nature is expensive. Proper alignment and cooperation of the fins and fin channels in manufacture is also complex.

Other examples of liquid cooled molds produced in the past are shown in
10 U.S. Patent No. 4,072,456 issued to Appel et al. and U.K. Patent No. 2,240,300 issued to Hanna et al. Again, the molds are complex and expensive to produce.

The present invention alleviates some of the above mentioned difficulties as well as others. The present invention provides a mold of simple construction having a nickel vapour deposited nickel cavity shell requiring no hand finishing,
15 and provides for a simple method of cooling or heating.

According to the invention, there is provided a mold assembly for use in a plastic blow mold. The mold assembly comprises a mold cavity shell made by nickel vapour deposition (NVD). The mold cavity shell has a cavity portion including a front face, a rear face and peripheral edge portions. The front face
20 defines a cavity in the shape of a portion of a product to be molded. The mold has coplanar peripheral side portions attached to the peripheral edge portions, the side portions defining front surfaces adapted to mate with corresponding surfaces of a mating mold cavity shell to define the product to be molded. A mold holder is located rearwardly of the mold cavity shell. Means are provided
25 for releasably connecting the mold holder to the peripheral side portions. Also, the mold holder defines an inner wall spaced from the mold cavity portion to define a heat transfer passage between the inner wall and the cavity portion.

Preferred embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

30 Figure 1 is a perspective view of the rear face of a preferred embodiment of a mold cavity shell according to the present invention;

-3-

Figure 2 is a perspective view of the front face of the mold cavity shell shown in Figure 1;

Figure 3 is a perspective view of a preferred embodiment of a mold holder according to the present invention;

5 Figure 4 is a perspective view of the mold cavity shell of Figure 1 mounted in the mold holder of Figure 3, with the addition of a mold cavity bottom;

Figure 5 is an elevational view of the mold components of Figure 4, with the right side shown in cross-section;

10 Figure 6 is a cross-section view taken along the lines 6-6 in Figure 4, modified to show an optional liquid heat transfer passage in the mold holder;

Figure 7 is an enlarged scrap view of the portion of Figure 6 identified by circle 7;

15 Figure 8 is a perspective view similar to Figure 1 but showing another preferred embodiment of a mold cavity shell according to the present invention; and

Figure 9 is a cross-sectional view taken along lines 9-9 of Figure 8.

Referring to the drawings, a preferred embodiment of a mold cavity shell according to the present invention is generally indicated by reference numeral

20 10. Mold cavity shell 10 fits into a mold holder 12 (see Figure 3) and together they form a "blow mold unit". The mold cavity shell 10 is made by any conventional nickel vapour deposition (NVD) process. The thickness of mold cavity shell 10 can be varied, depending upon considerations of cost and utility. Increasing the thickness of mold cavity shell 10 increases its resistance to

25 stress and deformation, but increases cost as well. The thickness of mold cavity shell 10 typically ranges from 0.078 - 0.39 inches (2 - 10 millimetres). An alternative to increasing the thickness of the mold cavity shell 10 (to improve resistance to stress and deformation) is to provide structural enhancement ribs 38 (see Figure 8) on the rear face 36 of the mold cavity shell 10 (as will be

30 further discussed below).

-4-

Mold holder 12 is preferably made of aluminium. The mold cavity shell 10 has a cavity portion 13 which defines a cavity 34 in the partial shape of an object to be molded. When mold cavity shell 10 is mated to a corresponding mold cavity shell 10, the entire shape of the object to be molded is defined, although such an object may also include a mold cavity bottom 14 as indicated in Figure 4. The mold cavity shell 10 having been produced by the NVD process provides a smooth and detailed cavity 34 which requires no machining or hand finishing.

In defining the cavity 34, the mold cavity shell 10 also defines a first opening 16 communicating with the cavity 34 to receive a preform or parison (not shown) for blow molding, and a second opening 42 to receive a mold container bottom 14 for creating objects such as plastic bottles (not shown).

The mold cavity shell 10 has peripheral side portions 18 circumscribing the cavity portion 13.

The mold cavity shell 10 also includes locating registering means 22 and locating clamping means 20. These locating registering means 22 can for example, be in the form of bushings. These bushings can be encapsulated into the mold cavity shell 10 during the NVD process, and may be threaded.

Locating registering means 22 are used to accurately align the mold cavity shell 10 with mold holder 12 by engaging holder guiding recesses 28 which include openings 20 to receive threaded fasteners, as described further below.

Similarly, the locating clamping means 20 engage holder securing means or recesses 52 when the mold cavity shell 10 is properly aligned with the mold holder 12.

The mold holder 12 defines a recess 32 on its front face. The recess 32 is designed to receive the rear face 36 of the mold cavity shell 10 such that a heat transfer passage 39 is formed therebetween for air flow for cooling or heating mold cavity portion 13. Recess 32 also includes an air inlet(s) 40 and air outlet(s) 41 to allow for the entry and exit of air in the heat transfer passages 39. Similarly, the mold cavity bottom 14 can also have an air inlet(s) (43) and air outlet(s) (not shown).

-5-

One embodiment of the invention allows for the inclusion of structural enhancement ribs 38 (see Figure 8) on the rear face 36 of the mold cavity shell 10 that nest within the corresponding mold holder recess 32. Such structural enhancement ribs can be in the form of parallel ribs 38. These ribs can be made of steel bars 50 (see Figure 9) attached to the rear face 36 by the NVD process. The addition of ribs 38 improves the strength of the mold cavity shell 10. Other patterns of structural enhancement ribs 38 are possible. The structural enhancement ribs 38 are designed so that air can still pass between the rear face of the mold shell 36 and the mold holder recess 32 for even cooling or heating.

Air cooling or heating in recess 32 can be improved by creating flow enhancement surface irregularities such as grooves 46 on the surface of recess 32. Other patterns of flow enhancement surface irregularities are possible.

In an alternate embodiment of the invention, the mold holder 12 can be equipped to receive liquid cooling or heating (heat transfer) passages 54 (see Figure 6) to further accelerate cooling or heating of the blow mold unit. Such liquid heat transfer passages would allow a liquid to enter through one end of a liquid heat transfer passage 54 and exit the other end. The passage of liquid through passage 54 would allow the mold holder 12 to cool or heat the air in heat transfer passage 39.

In use, mold cavity shell 10 is matingly engaged to mold holder 12 by aligning the rear face 36 of the mold cavity shell 10 with the defined recess 32 of the mold holder 12. The alignment is facilitated by locating registering means 22 on mold cavity shell 10 engaging holder guiding means 28 on mold holder 12. Once properly located, a socket head shoulder screw 26 can then be used to maintain correct alignment by passing the socket head shoulder screw 26 through both the locating registering means 22 and the holder guiding means 28. To further secure mold cavity shell 10 to mold holder 12, socket head cap screws 24 can be passed through locating clamping means 20 and holder securing means 52. Holder securing means 52 and holder guiding means 28

-6-

can be threaded to ensure the socket head cap screws 24 and socket head shoulder screws 26 respectively, are securely received. In the instance of blow molding a bottle (not shown), a mold cavity bottom 14 can be similarly aligned and securely received at the mold holder bottom 44.

- 5 To form a complete mold, a second corresponding blow mold unit comprised of a mold cavity shell 10 nested within a mold holder 12 is then matingly joined to the first blow mold unit described above. The first mold holder 12 can be accurately aligned with the second mold holder 12 by aligning holder peripheral guiding means 30 of the first mold holder 12 with the second.
- 10 As seen in Figures 5 and 7, mold holder edge portions 60 extend outwardly of the mold cavity shell peripheral side portions 18, as indicated by extension 58 in Figure 7. When one mold cavity shell 10 is cooperatively engaged with a second mold cavity shell 10, extensions 58, if present, prevent the mold cavity shells 10, 10 from being sealingly engaged, thus creating a slight air space
- 15 between the mold cavity shells 10, 10. This air space allows excess air in the mold cavity shells 10, 10 to escape when a parison (not shown) is being blown. Generally, the extensions 58 extend forward of the peripheral side portion 18 a distance 56 of between 0.002 and 0.003 inches (0.051 and 0.076 millimetres) thus creating a gap of total distance between 0.004 and 0.006 inches (0.102
- 20 and 0.152 millimetres) between the mated mold cavity shells 10, 10. The slight air pocket that results between the mold cavity shells 10, 10 will allow air to escape during the blow molding process. If extensions 58 are not present, then mold cavity shells 10, 10 will sealingly engage each other.

 Once the blow mold unit is assembled, it is attached to a blow molding
25 machine (not shown), several types of which are already well known in the art. If the mold holder 12 is equipped for liquid cooling or heating, the appropriate liquid cooling or heating lines (not shown) are then also attached to the mold holder 12 at the liquid heat transfer passage 54.

 A parison (not shown) is introduced into the mold cavity shell opening 16.
30 Air injected by the blow molding machine resulting in expansion of the parison to

-7-

fill and conform to the shape of the cavity 34 of the mold cavity shells 10, 10. Where the peripheral edge portions 60 of the mold holder 12 include extensions 58, a slight gap for air flow is created between the mated mold cavity shells 10, 10, thus allowing excess air in cavity 34 to escape.

5 During the blow molding process, the surfaces of the mold cavity shells 34 are susceptible to temperature change. Cooling or heating of the blow mold unit is necessary before the finished product can be removed properly. Cooling or heating occurs by entry of air through the air inlet(s) 40, which circulates between rear face 36 and recess 32, and exits through the air outlet(s) 41. The
10 typical direction of air flow is indicated by the arrows 48 in Figure 5. If structural enhancement ribs 38 or flow enhancement surface irregularities (for example, in the form of grooves 46) are present, cooling or heating time can be improved. Cooling or heating time can be further improved by implementing liquid cooling or heating, if mold holder 12 is adapted to do so. This is accomplished by
15 connecting liquid heat transfer means (not shown) to the liquid heat transfer passage 54 to pass liquid through passage 54.

As will be apparent to those skilled in the art in the light of the foregoing disclosure, many alterations and modifications are possible in the practice of this invention without departing from the spirit or scope thereof. The foregoing
20 description is of the preferred embodiments and is by way of example only, and it is not to limit the scope of the invention.

-8-

WHAT IS CLAIMED IS:


1. A mold assembly for use in a plastic blow molding process, the mold assembly comprising:
 - a mold cavity shell made by nickel vapour deposition;
 - the mold cavity shell having a cavity portion including a front face, a rear face and peripheral edge portions, the front face defining a cavity in the shape of a portion of a product to be molded;
 - the mold cavity shell also having coplanar, peripheral side portions attached to said peripheral edge portions, the side portions defining front surfaces adapted to mate with corresponding surfaces of a mating mold cavity shell to define the product to be molded;
 - a mold holder located rearwardly of the mold;
 - means for releasably connecting the mold holder to the peripheral side portions; and
 - the mold holder defining an inner wall spaced from the mold cavity portion to define a heat transfer passage between said inner wall and said cavity portion.
2. An assembly as claimed in claim 1 wherein the mold holder inner wall is formed with flow enhancement surface irregularities.
3. A mold assembly as claimed in claim 2 wherein the flow enhancement surface irregularities are a series of parallel grooves.
4. A mold assembly as claimed in claim 1 wherein the mold cavity portion rear face is formed with structural enhancement ribs.
5. A mold assembly as claimed in claim 4 wherein the structural enhancement ribs are a series of parallel spaced apart ribs.
6. A mold assembly as claimed in claim 1 wherein the mold holder has peripheral parting line portions located outwardly of the mold cavity shell peripheral side portions.

-9-


7. A mold assembly as claimed in claim 6 wherein the mold holder peripheral parting line portions have front faces extending slightly forwardly of the mold cavity shell side portion front surfaces.
8. A mold assembly as claimed in claim 7 wherein the front faces extend forwardly a distance of between 0.002 and 0.003 inches (0.051 and 0.076 millimetres) so that when the mold assembly is mated to a corresponding mating mold assembly, a gap of between 0.004 and 0.006 inches (0.102 and 0.152 millimetres) is present between the mating mold cavity shell side portion front surfaces.
9. A mold assembly as claimed in claim 1 wherein the peripheral side portions have locating registering means and the mold holder has corresponding locating registering means adapted to receive the peripheral side portion locating registering means.
10. A mold assembly as claimed in claim 9 wherein the peripheral side portion locating registering means and the mold holder locating registering means are adapted to receive a threaded fastener.
11. A mold assembly as claimed in claim 1 wherein the peripheral side portions have locating clamping means and the mold holder has corresponding locating clamping means adapted to receive the peripheral side portion locating clamping means.
12. A mold assembly as claimed in claim 11 wherein the peripheral side portion locating clamping means and the mold holder locating clamping means are adapted to receive a threaded fastener.
13. A mold assembly as claimed in claim 1 wherein the mold assembly is a first mold assembly, and further comprising a second like mold assembly adapted to matingly engage the first mold assembly.

-10-

14. A mold assembly as claimed in claim 13 wherein the mating first and second mold assemblies define only a portion of the product to be molded, and further comprising a third mold assembly adapted to mate with the first and second mold assemblies to complete the product to be molded.
15. A mold assembly as claimed in claim 1 wherein the mold holder is formed with heat transfer passages therein.
16. A mold assembly as claimed in claim 1 wherein the mold holder is made of aluminium.

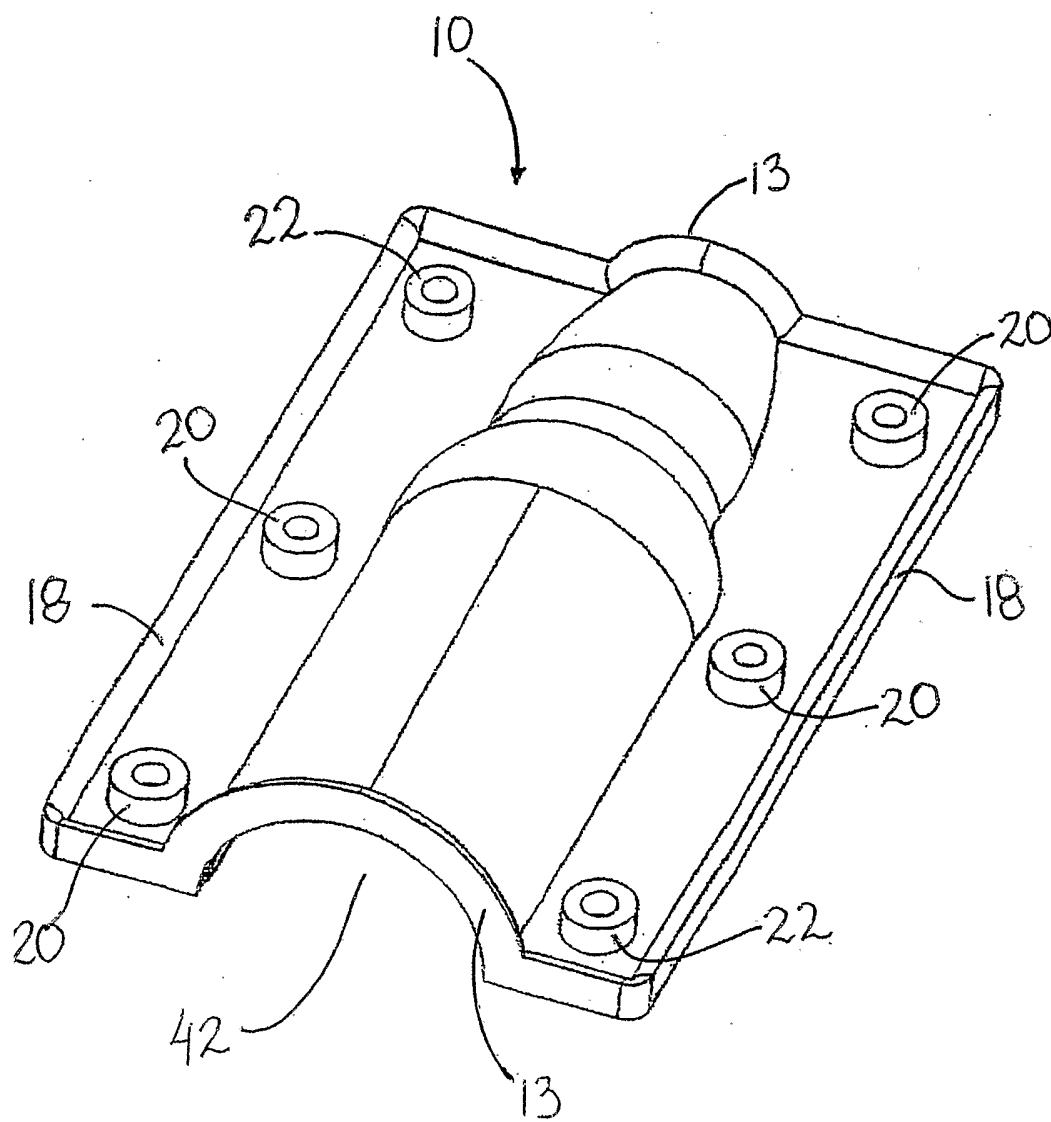

2/9

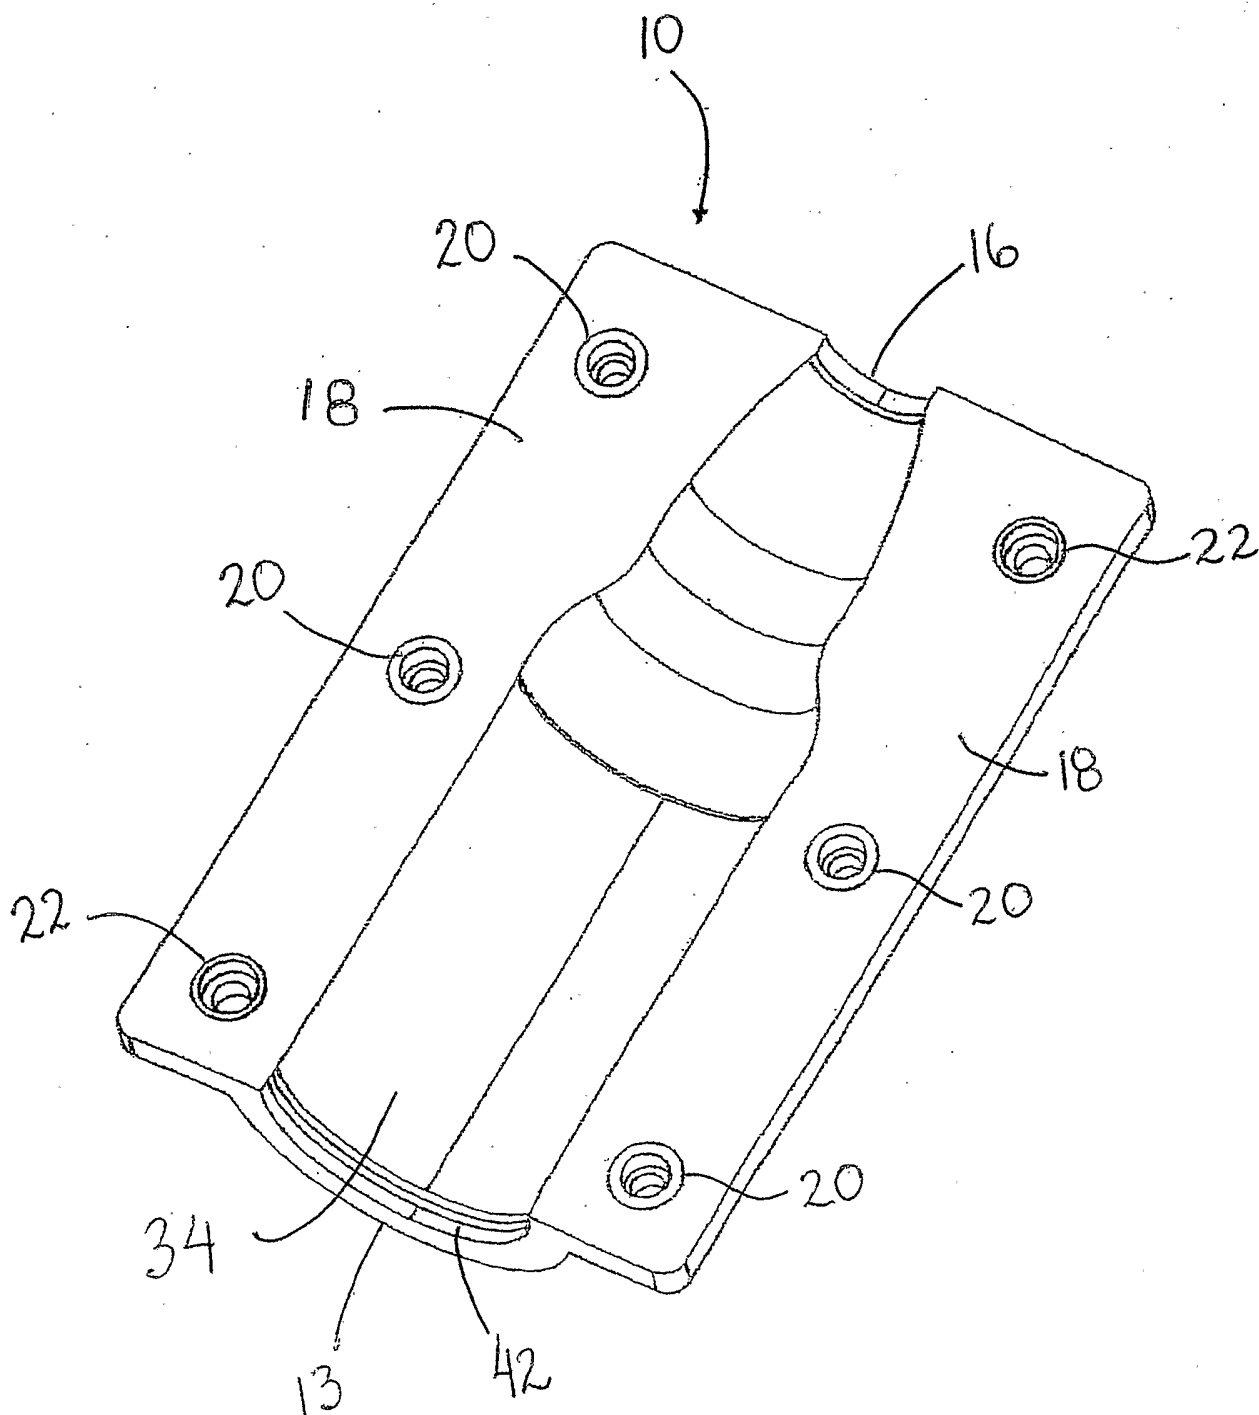

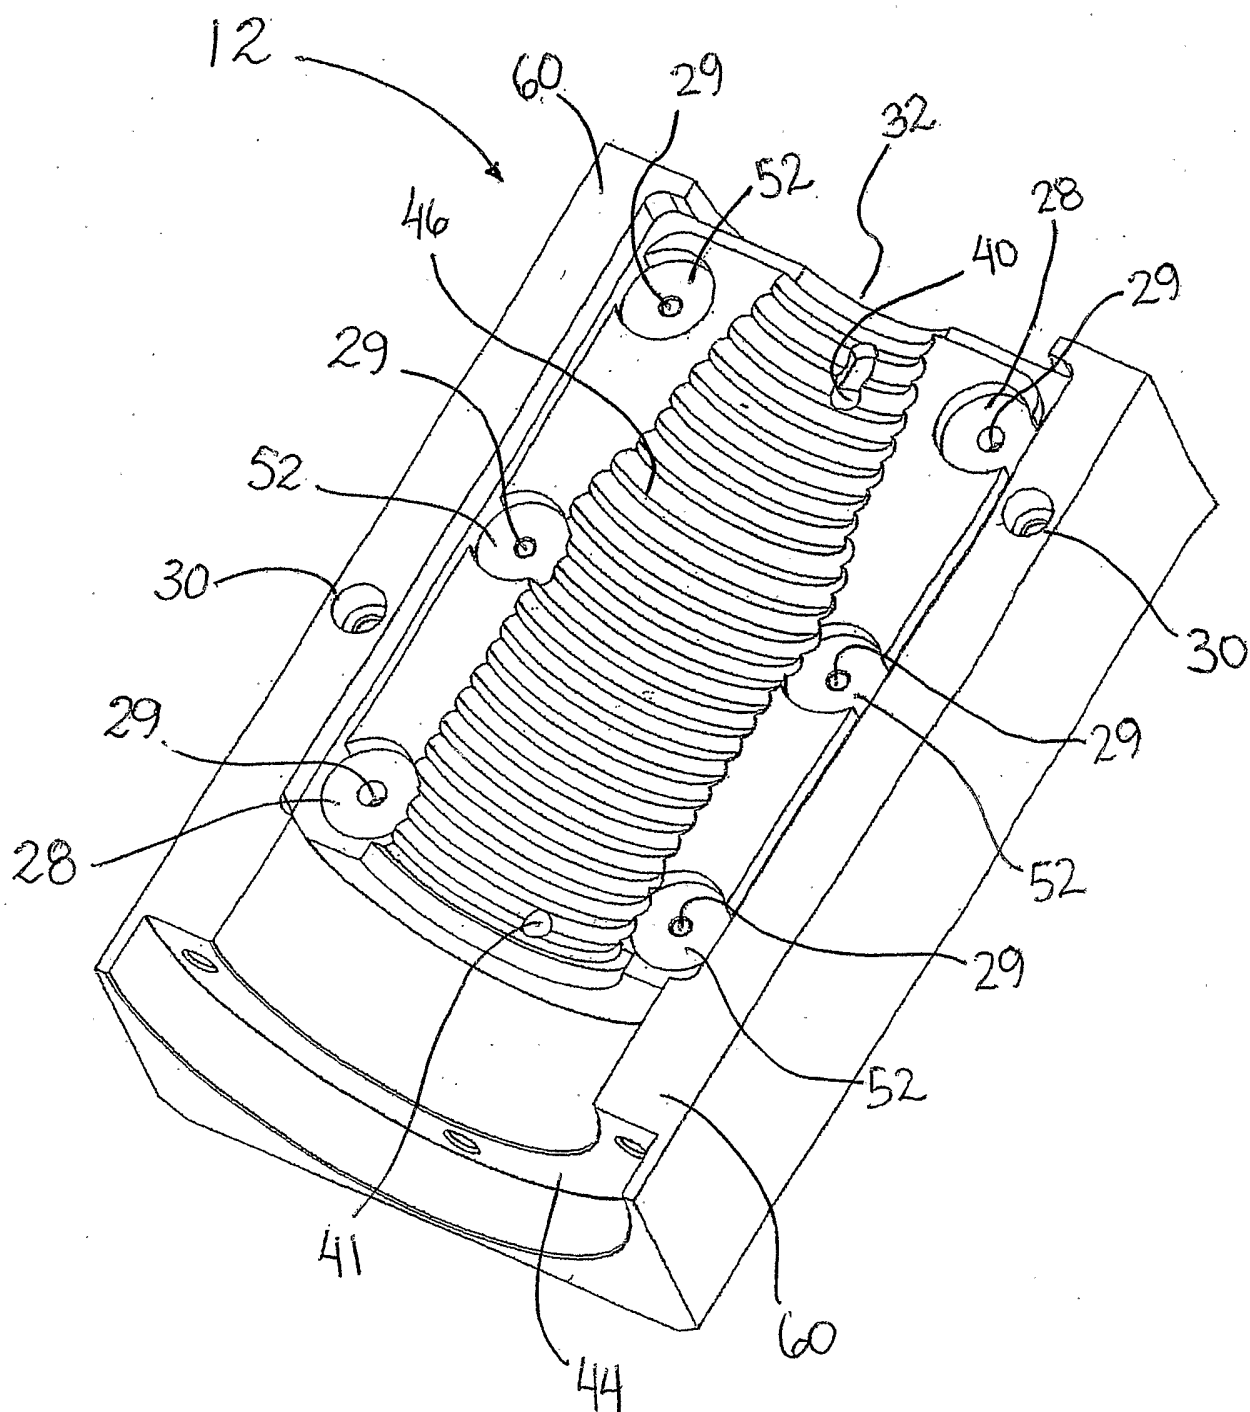


FIGURE 3

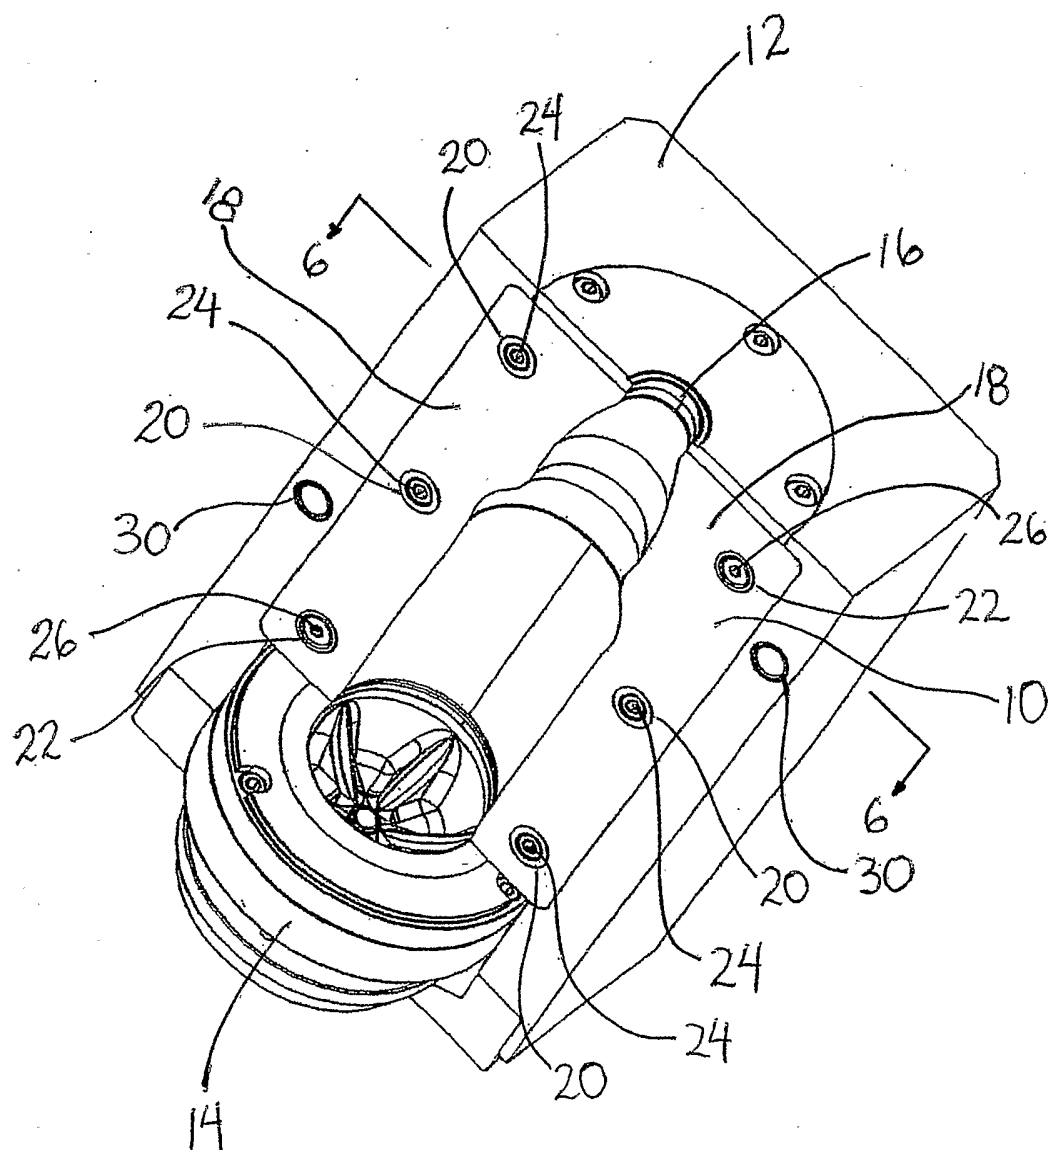


FIGURE 4

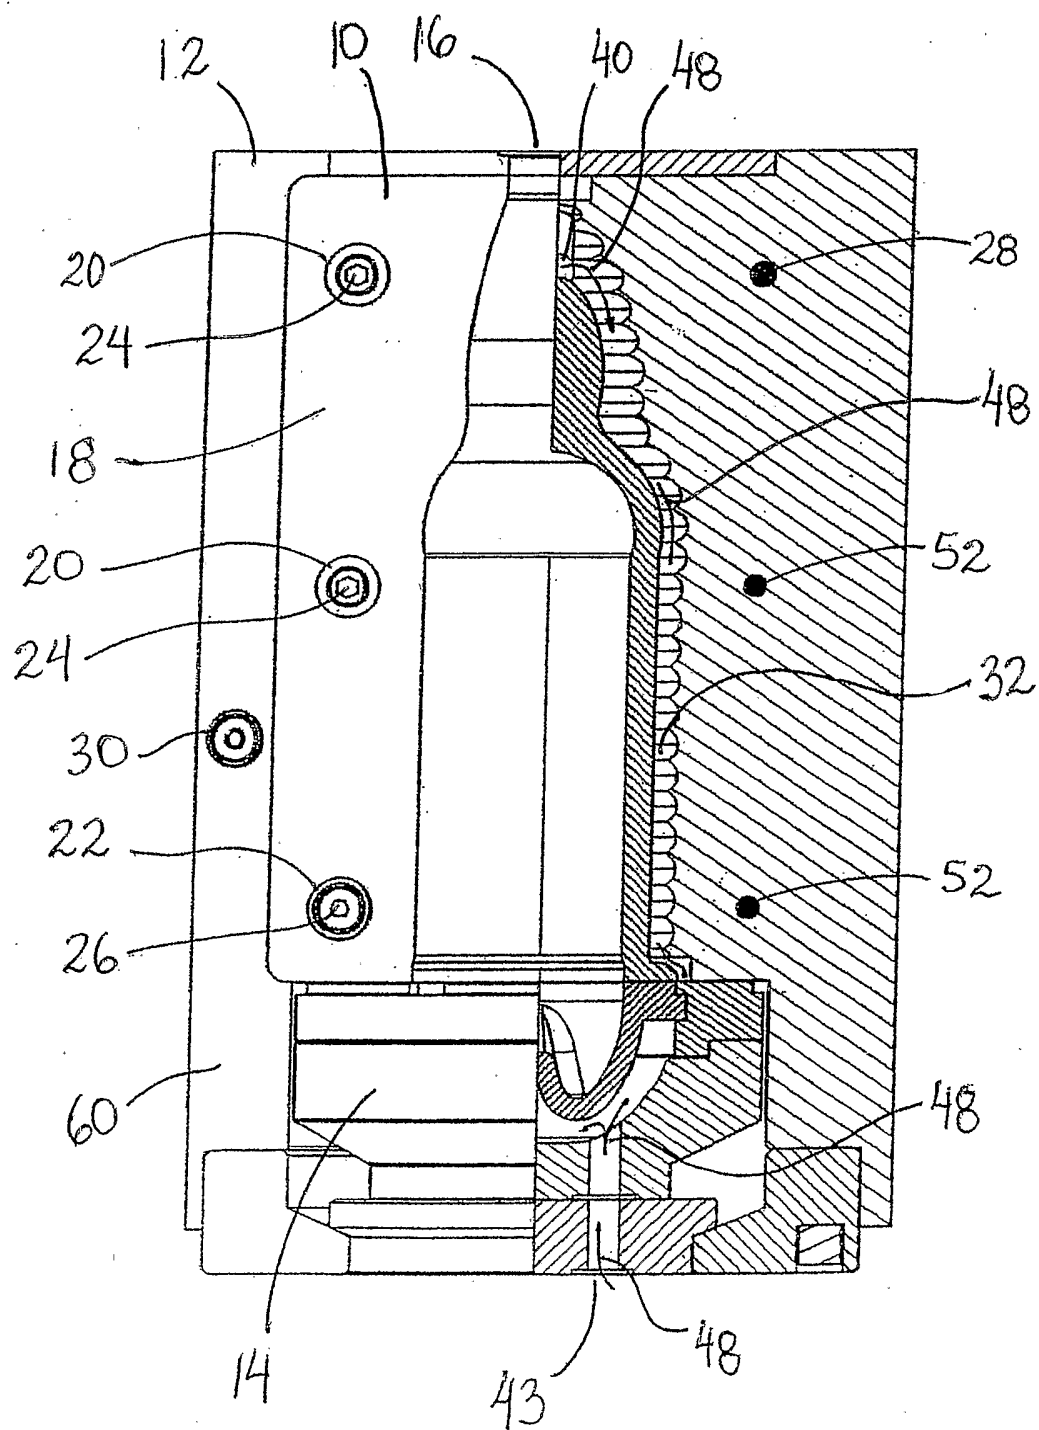


FIGURE 5

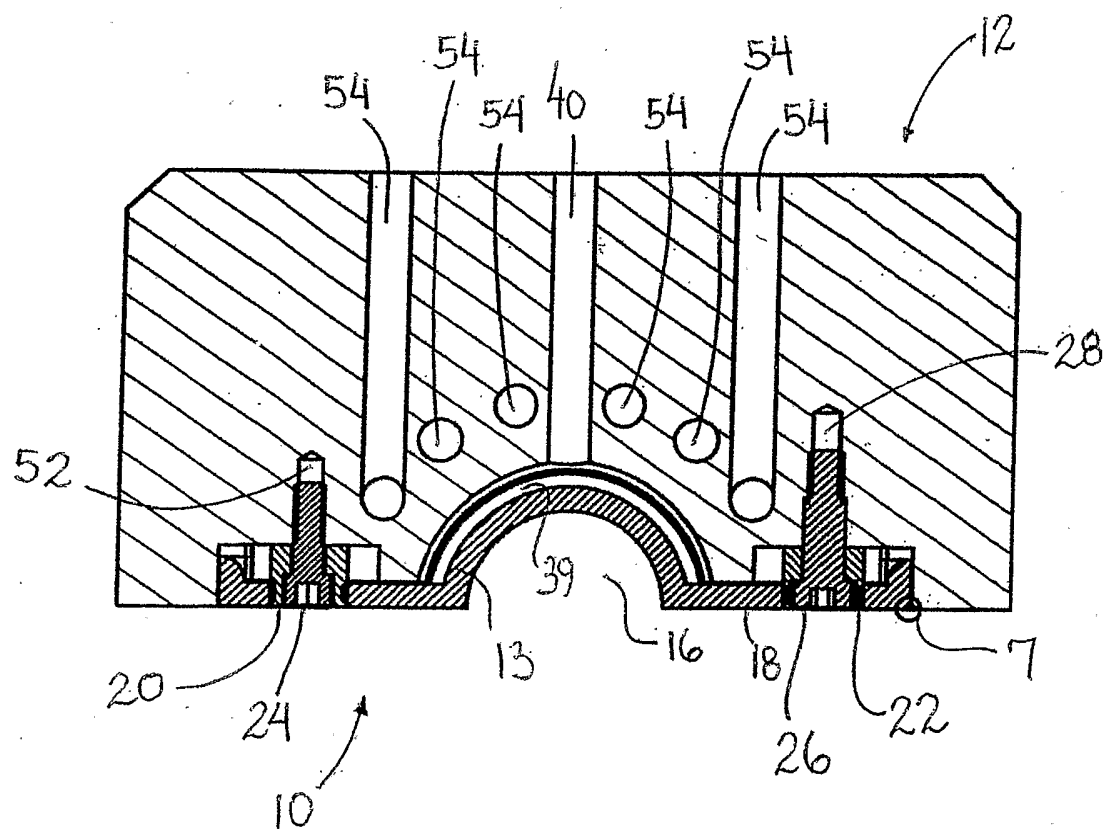


FIGURE 6

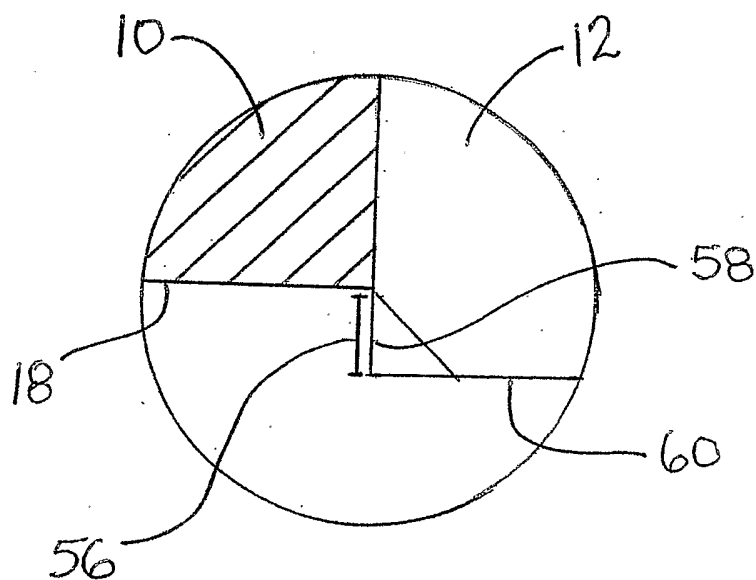


FIGURE 7

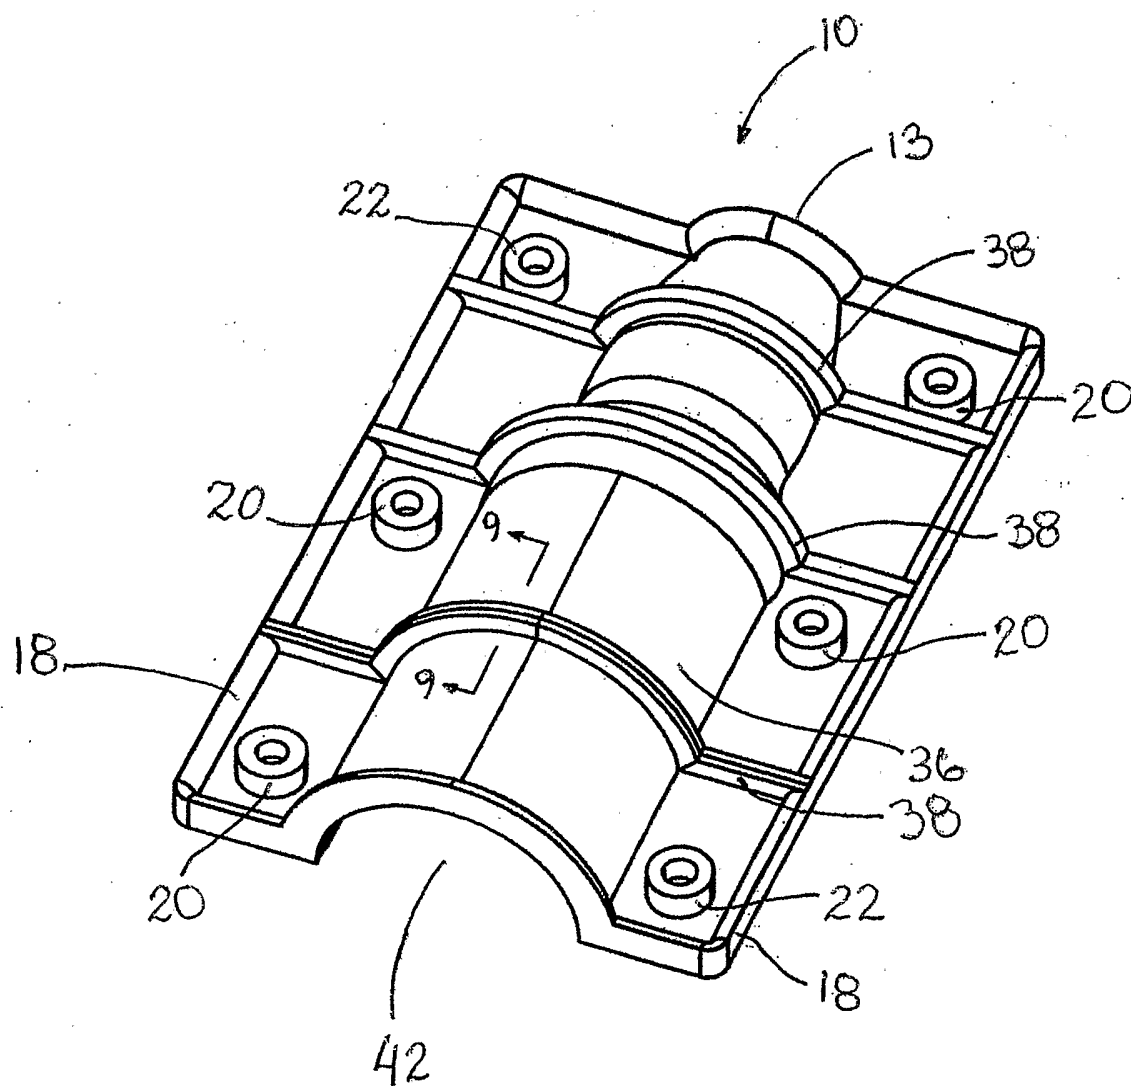


FIGURE 8

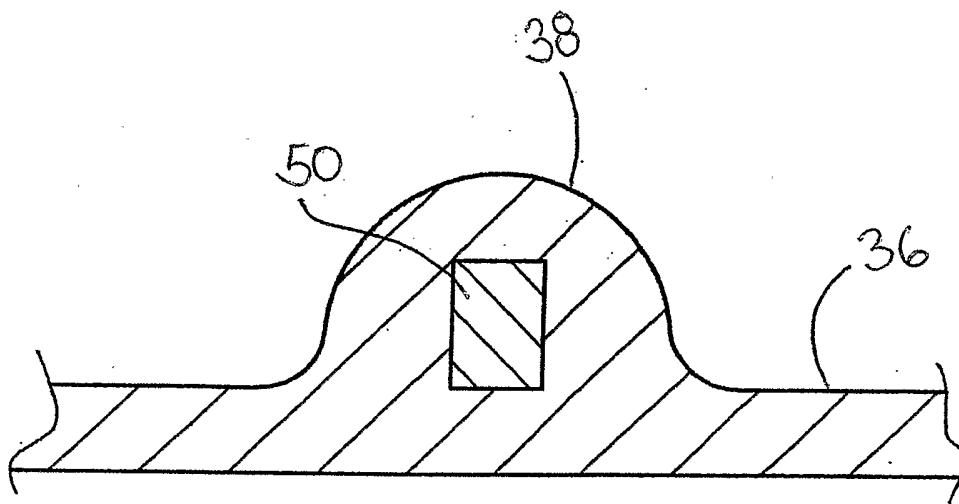


FIGURE 9

INTERNATIONAL SEARCH REPORT

Internat pplication No

PCT/CA 02/01581

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B29C49/48 B29C33/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B29C C23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 768 948 A (HORBERG C ET AL) 30 October 1973 (1973-10-30) cited in the application column 3, line 38-40; figures column 4, line 4 - line 38 column 5, line 6 - line 11 ---	1,4-16
X	GB 2 240 300 A (METAL BOX PLC ;CMB FOODCAN PLC (GB)) 31 July 1991 (1991-07-31) figures ---	1,6-16
A	US 3 249 672 A (SMALL OWEN M ET AL) 3 May 1966 (1966-05-03) figures --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

16 January 2003

Date of mailing of the international search report

24/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kosicki, T

INTERNATIONAL SEARCH REPORT

Intern: Application No
PCT/CA 02/01581

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 02, 29 February 2000 (2000-02-29) & JP 11 300748 A (KAO CORP), 2 November 1999 (1999-11-02) abstract -----	1
A	US 5 750 160 A (SHEPPARD ROBERT E ET AL) 12 May 1998 (1998-05-12) abstract -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/CA 02/01581

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3768948	A	30-10-1973	NONE	
GB 2240300	A	31-07-1991	NONE	
US 3249672	A	03-05-1966	NONE	
JP 11300748	A	02-11-1999	NONE	
US 5750160	A	12-05-1998	AU 1572895 A	29-08-1995
			DE 69505956 D1	17-12-1998
			DE 69505956 T2	29-07-1999
			EP 0750544 A1	02-01-1997
			CA 2182971 A1	17-08-1995
			WO 9521733 A1	17-08-1995