

(19)



(11)

EP 2 849 162 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
05.04.2023 Bulletin 2023/14

(51) International Patent Classification (IPC):
G08B 13/196 ^(2006.01) **G08B 25/14** ^(2006.01)

(21) Application number: **14178599.8**

(52) Cooperative Patent Classification (CPC):
G08B 13/19691; G08B 13/19697; G08B 25/14

(22) Date of filing: **25.07.2014**

(54) **System and method for visualization of history of events using bim model**

System und Verfahren zur Visualisierung von Historien unter Verwendung des BIM-Modells

Système et procédé de visualisation d'un historique d'événements au moyen d'un modèle BIM

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **08.08.2013 US 201313962228**

(43) Date of publication of application:
18.03.2015 Bulletin 2015/12

(73) Proprietor: **Honeywell International Inc.**
Morris Plains, NJ 07950 (US)

(72) Inventors:
• **Gurudoss, Malayappan**
Morristown, NJ New Jersey 07962-2245 (US)
• **Dharmalingham, Vinoth**
Morristown, NJ New Jersey 07692-2245 (US)

- **Janapati, Kalpana**
Morristown, NJ New Jersey 07962-2245 (US)
- **Krishnan, Viswanathan Chatapuram**
Morristown, NJ New Jersey 07962-2245 (US)
- **Venkatesh, Vinay**
Morristown, NJ New Jersey 07962-2245 (US)
- **Popowski, Paul M.**
Morristown, NJ New Jersey 07962-2245 (US)

(74) Representative: **Houghton, Mark Phillip**
Patent Outsourcing Limited
1 King Street
Bakewell, Derbyshire DE45 1DZ (GB)

(56) References cited:
US-A1- 2012 194 336 US-A1- 2013 027 561
US-A1- 2013 091 432

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 849 162 B1

Description**FIELD**

[0001] The field relates to security systems and more particularly to methods of tracking events within security systems.

BACKGROUND

[0002] Security systems for the protection of homes and/or businesses are generally known. Such systems typically involve the use of one or more sensors located on the doors or windows surrounding a secured area for the detection of intruders.

[0003] The sensors of a security system are typically monitored via an alarm panel either located within the home or business or at a central monitoring station. Upon activation of one of the sensors, the alarm panel may activate an alarm.

[0004] While some security systems may be monitored by a full time security guard, many security systems are only monitored indirectly via the reporting of security events to a central monitoring station. Upon detecting an alarm, the guard or central monitoring station may respond by summoning the police.

[0005] In most cases, security events are typically saved into an event file including an identifier of the sensor raising the alarm and a time of activation of the sensor. The event files are important during any investigation into events in order to determine how an intruder entered the secured area and the identity of the intruder.

[0006] While existing security systems work well, the security events saved into the event files are difficult to read and interpret. Accordingly, a need exists for better methods of recording and presenting such events.

[0007] US patent, publication number 2012/0194336A1 discloses a user interface of a security system where a user can create a pop-up to view the output of a camera. US patent application 2013/0091432A1 discloses a user interface of a security system where video clips of a tracked object or person can be displayed in a 'results' panel.

SUMMARY OF THE INVENTION

[0008] The present invention provides for a method of a security system and a corresponding system as claimed in the accompanying claims.

BRIEF DESCRIPTION OF THE DRAWINGS**[0009]**

FIG. 1 is a block diagram of a security system shown generally in accordance with an illustrated embodiment;

FIG. 2 depicts a screen that may be shown on a

display of the system of FIG. 1;

FIG. 3 depicts a screen showing video from the system of FIG. 1;

FIG. 4 depicts a digest view of events from the system of FIG. 1; and

FIG. 5 shows a set of method steps that may be used by the system of FIG. 1.

DETAILED DESCRIPTION OF AN ILLUSTRATED EMBODIMENT

[0010] While embodiments can take many different forms, specific embodiments thereof are shown in the drawings and will be described herein in detail with the understanding that the present disclosure is to be considered as an exemplification of the principles hereof, as well as the best mode of practicing same. No limitation to the specific embodiment illustrated is intended.

[0011] FIG. 1 is a block diagram of a security system 10 shown generally in accordance with an illustrated embodiment. Included within the system is a number of sensors 12, 14 used to protect a secured area 16. The sensors may be limited switches mounted on doors and/or windows located along a periphery of the secured area that detect entry of intruders into the secured area. The sensors could also be motion detectors based upon passive infrared (PIR) devices or cameras that perform video processing of video images to detect changes between successive frames. The sensors could also be environmental detectors based upon any of a number of different technologies (e.g., smoke detectors, carbon monoxide detectors, natural gas detectors, etc.).

[0012] The sensors may be monitored by a control panel 20 located within the secured area or within a central monitoring 18. Upon detecting activation of one of the sensors (either directly where the control panel is located at the central monitoring station or via a message sent to the central monitoring station where the control panel is located within the secured area), the central monitoring station may respond by summoning the appropriate help (e.g., police, fire department, etc.).

[0013] Located within the control panel may be one or more processor apparatus (processors) 20, 22, each operating under control of one or more computer programs 24, 26 loaded from a non-transitory computer readable medium (memory) 28. As used herein, reference to a step performed by a program is also reference to the processor that executed that step.

[0014] Included within the control panel is an alarm processor that monitors the status of each of the sensors. Upon detection of activation of one of the sensors, the alarm processor may activate a local alarm 34 to notify authorized occupants of the secured area and may also summon help.

[0015] Also located within the control panel may be an event processor. Upon activation of one of the sensors, the event processor saves an event into an event file 30, 32 or may add an entry into a preexisting event file within

memory. The entry includes an identifier of the activated sensor and a time of the event.

[0016] Also associated with the secured area is a user interface 36. The user interface may include an interactive display 38 or a display and separate keyboard 40. The user interface may be located on the control panel where the control panel is located within the secured area or may be a stand-alone device.

[0017] The user interface may be used to arm or disarm the security system protecting the secured area. The user interface may also display alarm events. In order to arm or disarm the system, an authorized user may enter a personal identification number (PIN) and a function key (e.g., arm, arm away, disarm, etc.). The user interface may respond with a graphical indicator showing the status of the local alarm system.

[0018] In addition to the user interface, the security system may also include sensors that allow access into the secured area by authorized users. In this case, at least one of the sensors could be a card reader that reads an identify card carried by an authorized user and grants access into the secured area.

[0019] Also included within the security system is a building information model (BIM) 42. The BIM may contain three-dimensional views of the secured area along with geographical coordinates of each of the sensors within the secured area.

[0020] The BIM is used along with the event files by an event display system including one or more event processors 20, 22 to display events on the user interface under a process shown generally in FIG. 5. The user enters a time through the user interface and the event processor may display events that happened at that time on a three-dimensional view of the secured area or portion of the secured area along with a graphical indicator on the three dimensional view that indicates where that event occurred. In accordance with the present invention, a respective popup is displayed that includes information about the event. Further in accordance with the invention, the user identifies a time interval of interest by entering a starting time and ending time and the video processor may show the events that occurred within that time period. A sequence processor may also play back the events in the sequence as they occurred.

[0021] FIG. 2 may depict a screen 100 shown on the display by one or more of the event processors. The screen may include a number of information elements. The screen includes a time scale 102 including the entered start time 104 and end time 104. The time scale also includes a time indicator 106.

[0022] Also included within the screen may be one or more graphical indicators 110, 112 that show the geographical locations of sensors activated between the start time and location of the indicator 106. Associated with the graphical indicators is a respective popup 114, 116 that shows information associated with the respective event. In this regard, the popup may show an identifier of the alarm, the type of alarm, the time and the status.

A circled indicator may show the total number of alarms/alerts from the sensor during some predetermined time period.

[0023] The screen of FIG. 2 may also include one or more function buttons 118, 120. The function buttons may be used to control the format of information displayed in conjunction with that time interval. For example, one of the function buttons may be a playback button that plays back events as they occurred within the selected area.

[0024] In order to use the event display system, the user may first click on an icon of the BIM model displayed on the display of the user interface. In response, a display processor may show a three-dimensional view of the entire secured area including an interactive window through which the user enters starting and ending times. In the case where the secured area is a multistory building, the three-dimensional view may include a three-dimensional representation of the multi-story building. The user may select one of the stories using a cursor 121 and be presented with the three-dimensional view of one of the stories of the building. The user enters a start and end time and activate an enter button resulting in a display such as that shown in FIG. 2.

[0025] The user may select the time indicator using the cursor and drag the time indicator across the time scale. As the time indicator is dragged across the time scale, a time processor identifies any activated sensors that had been activated between the start time and current location of the time indicator and displays them on the screen including a popup and graphical indicator location showing the location of the sensor within the three-dimensional view.

[0026] Alternatively, the user may select a playback button of the function buttons. In this case, the playback processor increments the location of the time indicator at some rate (e.g., 1:1 for playback at the same rate as the events occurred; 2:1 for playback at twice the rate, etc.). In response, the time indicator automatically moves across the time scale incrementally displaying events based upon the location of the time indicator.

[0027] As the indicator moves across the time scale, the operator may activate a pause button of the function pushbuttons. While paused, the user may activate a view video pushbutton 124 on any of the popups. Activating the view video pushbutton cause a video processor to retrieve a sequence of video images from one or more cameras that were previously identified within the BIM as capturing images associated with the activated sensor.

[0028] Once activated, the video processor may display a sequence of images from a predetermined time period before activation of the corresponding sensor until a predetermined time after activation of the sensor. The images may be displayed within a separate window 126 of the popup as shown in FIG. 3.

[0029] Once the user has viewed the images associated with the activated sensor, the user may activate a

hide video pushbutton 128. In response, the screen may return to the view of FIG. 2. Alternatively, the user may double click on the displayed view and receive a full screen view of the recorded video showing activation of the sensor.

[0030] In addition to viewing video, the user may also activate a digest view pushbutton of the function push-buttons. In this case, a digest view processor may retrieve and display a history of all activated sensors over some much larger time period as shown in FIG. 4.

[0031] In general, the system provides the functionality where all of the events/alarms of the system may be displayed in a specified timeframe. A BIM of the building or other secured area may be used to do this. The display of the system may have a timeline slider used in conjunction with a display under the BIM to playback the history of events/alarms that happened between the limits of the specified time.

[0032] The user can choose the timeframe to view the history of alarms/events in the floor/premises of the building using the BIM. In response, the system will play back the history of events/alarms within a 3-D display provided under the BIM of the specified floor/premises by highlighting the device (door/reader/panel). In this regard, any activated sensor may be highlighted with different colors according to the priority of the alarm. The details of that event/alarm is also displayed nearby on the model using an associated window like a popup dialog with the count of the alarm/event that happened from the start to end times of the timeframe.

[0033] A user can pause the history timeline at any time to view the events/alarms that happened at that moment and can click on the event/alarm in the popup dialog to see more detail about the alarm. The user can also view the recorded video on the camera nearest the device (door/reader/panel) where the alarm has occurred.

[0034] FIG. 2 shows the timeline slider with play/pause option for the time between 1 pm and 2pm using the BIM of a building. The alarms/events that happened between the time limits in that time frame with its details and its count from the start time of the timeframe is shown as a popup dialog box in the diagram. The device from which the alarm/event originated is highlighted with different colors based on its priority.

[0035] FIG. 3 depicts details of how a user may view the recorded video from a camera near the device (door/reader/panel) where the alarm/event occurred. The recorded video of the particular event/alarm is viewed by expanding the link "view video" in the event/alarm popup as shown.

[0036] FIG. 4 depicts the "digest view" where a user can view the overlay of all events/alarms that happened during the specified timeframe in a single snapshot view. The user can drill down to see details about individual alarms/events by expanding the popup. The user can open and review the recorded video of that particular event.

[0037] The user can instantly shift from the history

timeline view to "digest view" if the user wants to see the total count of events/alarms of various devices. The user can switch back and forth between views as and when needed.

[0038] The system also includes a "digest view" where a user can view the overlay of all events/alarms that happened on the specified timeframe in a single snapshot view. In the event/alarm popup the count of alarms/events that happened on the device from the start time of the timeframe will be displayed. The user can drill down to see details about individual alarms/events by expanding the popup. The user can open and review the recorded video of that particular event.

[0039] The system solves the problem of viewing alarms/events in a number of ways. First, by providing the play/pause timeline slider for the history of events/alarms in the BIM, the user can visually identify what, when and where the alarm/event occurred. Second, by specifying the count of alarms/events that happened in a time frame, a user can easily identify which region of the building is more alarm prone. By providing a method to view the recorded video on the cameras nearest the areas where the alarm happened in the BIM model itself, a user is more location aware of the context of the alarm/event. By using "digest view", a user can view the overlay of all events/alarms that happened on the specified timeframe in a single snapshot view.

[0040] In general, the system may operate by using a set of steps including a building information model (BIM) of a security system providing a three-dimensional view of a secured area of the security system including the physical location of any sensors of the security system, an input device of the security system receiving from a user a starting time and ending time of a time interval of interest and a processor of the security system displaying the three-dimensional view of the secured area including a time scale showing the starting time on one end of the time scale and the ending time at an opposing end of the time scale and a respective popup of details for each corresponding sensor of at least some sensors of the security system activated during the time interval of interest, each respective popup graphically connected to the physical location of the corresponding sensor within the three dimensional view.

[0041] The system may accomplish these steps using apparatus including a building information model (BIM) of a security system embodied in a non-transient computer readable medium, the BIM provides a three-dimensional view of a secured area of the security system including the physical location of any sensors of the security system, an input device of the security system that receives from a user a starting time and ending time of a time interval of interest and a processor of the security system that displays the three-dimensional view of the secured area including a time scale showing the starting time on one end of the time scale and the ending time at an opposing end of the time scale and a respective popup of details for each corresponding sensor of at least some

sensors of the security system activated during the time interval of interest, each respective popup graphically connected to the physical location of the corresponding sensor within the three dimensional view.

[0042] In alternate embodiments, the system may include a security system that protects a secured area, a building information model (BIM) of the security system embodied in a non-transient computer readable medium, the BIM provides a three-dimensional view of the secured area of the security system including the physical location of a plurality of sensors of the security system, an input device of the security system that receives from a user a starting time and ending time of a time interval of interest and a processor of the security system that displays the three-dimensional view of the secured area including a time scale showing the starting time on one end of the time scale and the ending time at an opposing end of the time scale and a respective popup of details for each corresponding sensor of the plurality of sensors that were activated during the time interval of interest, each respective popup graphically connected to the physical location of the corresponding sensor within the three dimensional view.

Claims

1. A method comprising:

a building information model (BIM) of a security system (10) providing a three-dimensional view of a secured area (16) of the security system including the physical location of any sensors (12, 14) of the security system;
 if a sensor (12, 14) is activated, saving an entry into an event file (30) wherein the entry includes an identifier of the activated sensor and the time of the activation;
 an input device (40) of the security system receiving from a user a starting time and ending time of a time interval of interest; and
 a processor (20, 22) and a display (38) of the security system displaying the three-dimensional view of the secured area (16) including a time scale (102) showing the starting time input by the user on one end of the time scale and the ending time input by the user at an opposing end of the time scale and a respective popup (114, 116) of details for each sensor (12, 14) of the security system activated during the time interval of interest, each respective popup being graphically connected to the physical location of the corresponding sensor within the three dimensional view,
 wherein, upon a user activating the time scale (102), the processor (20, 22) and display (38) of the security system (10) play back activations of sensors (12, 14) as they occurred, including

display of the respective popup (114, 116), in accordance with a time indicator (106) shown on the display incrementing along at least a portion of the time interval between the starting time and the ending time.

2. The method as in claim 1 further comprising at least one respective popup including a view video activation button.
3. The method as in claim 2 further comprising the user activating the view video activation button (118, 120) and viewing video associated with activation of the corresponding sensor.
4. The method as in claim 1 where the corresponding sensor (12, 14) further comprises an intrusion sensor.
5. The method as in claim 1 wherein the at least some sensors (12, 14) further comprises a card reader.
6. The method as in claim 1 wherein the graphical connector further comprises an arrow leading from the popup to the location of the corresponding sensor.
7. An apparatus comprising a building information model (BIM) of a security system, an input device of the security system and a processor and a display of the security system, all configured to perform a method as previously claimed.

Patentansprüche

1. Verfahren, umfassend:

ein Gebäudeinformationsmodell (BIM) eines Sicherheitssystems (10), das eine dreidimensionale Ansicht eines gesicherten Bereichs (16) des Sicherheitssystems bereitstellt, einschließlich der physischen Position aller Sensoren (12, 14) des Sicherheitssystems;
 wenn ein Sensor (12, 14) aktiviert ist, Speichern eines Eintrags in einer Ereignisdatei (30), wobei der Eintrag eine Kennung des aktivierten Sensors und die Zeit der Aktivierung enthält;
 eine Eingabevorrichtung (40) des Sicherheitssystems, die von einem Benutzer eine Startzeit und eine Endzeit eines Zeitintervalls von Interesse erhält; und
 einen Prozessor (20, 22) und eine Anzeige (38) des Sicherheitssystems, die die dreidimensionale Ansicht des gesicherten Bereichs (16) anzeigt, einschließlich einer Zeitskala (102), die die vom Benutzer eingegebene Startzeit an einem Ende der Zeitskala und die vom Benutzer eingegebene Endzeit an einem gegenüberlie-

- genden Ende der Zeitskala anzeigt, und ein jeweiliges Popup (114, 116) von Details für jeden Sensor (12, 14) des Sicherheitssystems, der während des Zeitintervalls von Interesse aktiviert wurde, wobei jedes jeweilige Popup grafisch mit der physischen Position des entsprechenden Sensors innerhalb der dreidimensionalen Ansicht verbunden ist, wobei, wenn ein Benutzer die Zeitskala (102) aktiviert, der Prozessor (20, 22) und die Anzeige (38) des Sicherheitssystems (10) Aktivierungen von Sensoren (12, 14) wiedergeben, wie sie aufgetreten sind, einschließlich der Anzeige des jeweiligen Popups (114, 116), in Übereinstimmung mit einem Zeitindikator (106), der auf der Anzeige angezeigt wird und sich entlang mindestens eines Teils des Zeitintervalls zwischen der Startzeit und der Endzeit inkrementiert.
2. Verfahren nach Anspruch 1, ferner umfassend mindestens ein entsprechendes Popup, einschließlich einer Aktivierungsschaltfläche zum Anzeigen eines Videos.
 3. Verfahren nach Anspruch 2, ferner umfassend, dass der Benutzer die Aktivierungsschaltfläche zum Anzeigen eines Videos (118, 120) aktiviert und ein Video betrachtet, das mit der Aktivierung des entsprechenden Sensors verbunden ist.
 4. Verfahren nach Anspruch 1, wobei der entsprechende Sensor (12, 14) ferner einen Einbruchsensor umfasst.
 5. Verfahren nach Anspruch 1, wobei die mindestens einigen Sensoren (12, 14) ferner einen Kartenleser umfassen.
 6. Verfahren nach Anspruch 1, wobei der grafische Verbinder ferner einen Pfeil umfasst, der von dem Popup zur Position des entsprechenden Sensors führt.
 7. Vorrichtung, umfassend ein Gebäudeinformationsmodell (BIM) eines Sicherheitssystems, eine Eingabevorrichtung des Sicherheitssystems und einen Prozessor und eine Anzeige des Sicherheitssystems, die alle konfiguriert sind, um ein Verfahren wie zuvor beansprucht auszuführen.

Revendications

1. Procédé comprenant :

un bâti immobilier modélisé (BIM) d'un système de sécurité (10) fournissant une vue tridimensionnelle d'une zone sécurisée (16) du système

de sécurité comportant l'emplacement physique de tout capteur (12, 14) du système de sécurité ; si un capteur (12, 14) est activé, la sauvegarde d'une entrée dans un fichier d'événements (30), dans lequel l'entrée comporte un identifiant du capteur activé et l'heure de l'activation ; un dispositif d'entrée (40) du système de sécurité recevant d'un utilisateur une heure de début et une heure de fin d'un intervalle de temps d'intérêt ; et un processeur (20, 22) et un afficheur (38) du système de sécurité affichant la vue tridimensionnelle de la zone sécurisée (16) comportant une échelle de temps (102) mentionnant l'heure de début saisie par l'utilisateur à une extrémité de l'échelle de temps et l'heure de fin saisie par l'utilisateur à une extrémité opposée de l'échelle de temps et une fenêtre contextuelle respective (114, 116) de détails pour chaque capteur (12, 14) du système de sécurité activé pendant l'intervalle de temps d'intérêt, chaque fenêtre contextuelle respective étant reliée graphiquement à l'emplacement physique du capteur correspondant dans la vue tridimensionnelle, dans lequel, lorsqu'un utilisateur active l'échelle de temps (102), le processeur (20, 22) et l'afficheur (38) du système de sécurité (10) reproduisent les activations des capteurs (12, 14) au fur et à mesure qu'elles se produisent, y compris l'affichage de la fenêtre contextuelle respective (114, 116), selon un indicateur horaire (106) mentionné sur l'afficheur s'incrémentant le long d'au moins une partie de l'intervalle de temps entre l'heure de début et l'heure de fin.

2. Procédé selon la revendication 1, comprenant en outre au moins une fenêtre contextuelle respective comportant un bouton d'activation de visualisation vidéo.
3. Procédé selon la revendication 2, comprenant en outre l'activation par l'utilisateur du bouton d'activation de visualisation vidéo (118, 120) et la visualisation vidéo associée à l'activation du capteur correspondant.
4. Procédé selon la revendication 1, dans lequel le capteur correspondant (12, 14) comprend en outre un capteur d'intrusions.
5. Procédé selon la revendication 1, dans lequel les au moins quelques capteurs (12, 14) comprennent en outre un lecteur de carte.
6. Procédé selon la revendication 1, dans lequel le connecteur graphique comprend en outre une flèche menant de la fenêtre contextuelle à l'emplacement du capteur correspondant.

7. Appareil comprenant un bâti immobilier modélisé (BIM) d'un système de sécurité, un dispositif d'entrée du système de sécurité et un processeur ainsi qu'un afficheur du système de sécurité, tous configurés pour exécuter un procédé selon les revendications précédentes. 5

10

15

20

25

30

35

40

45

50

55

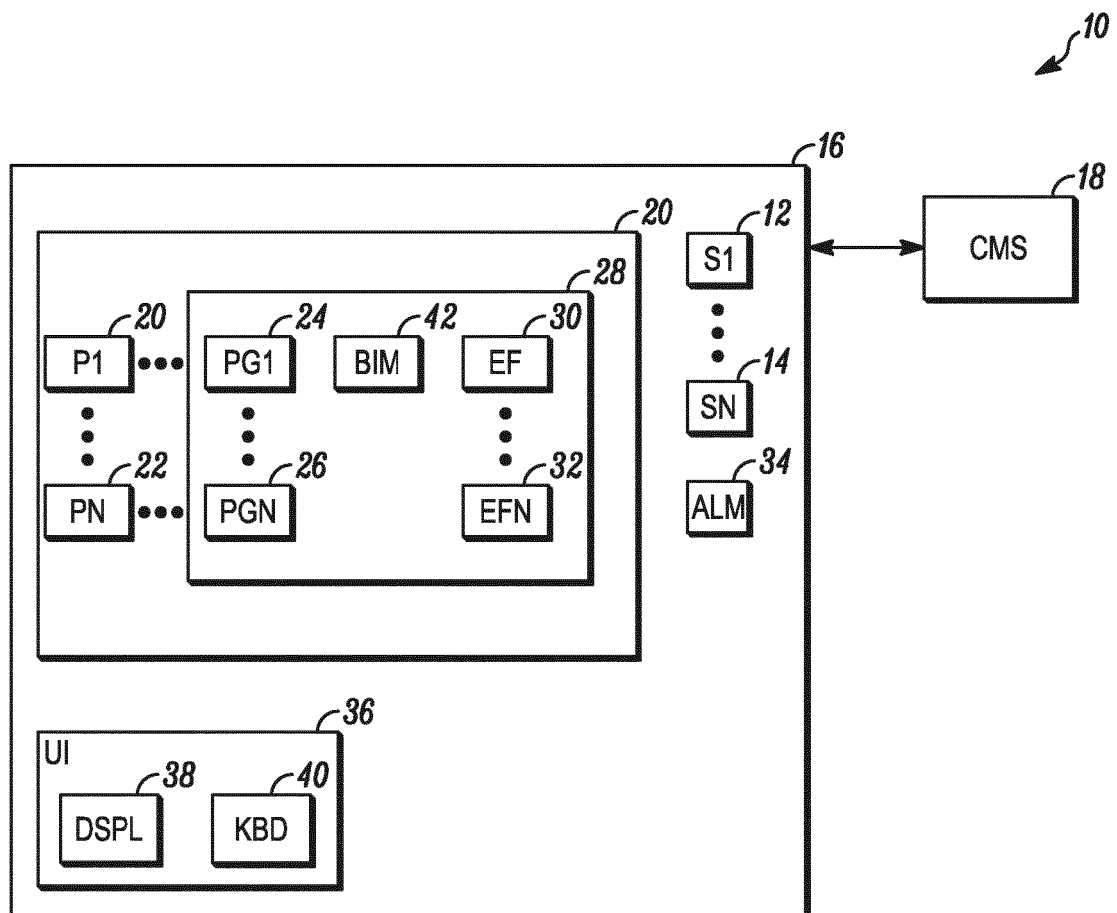


FIG. 1

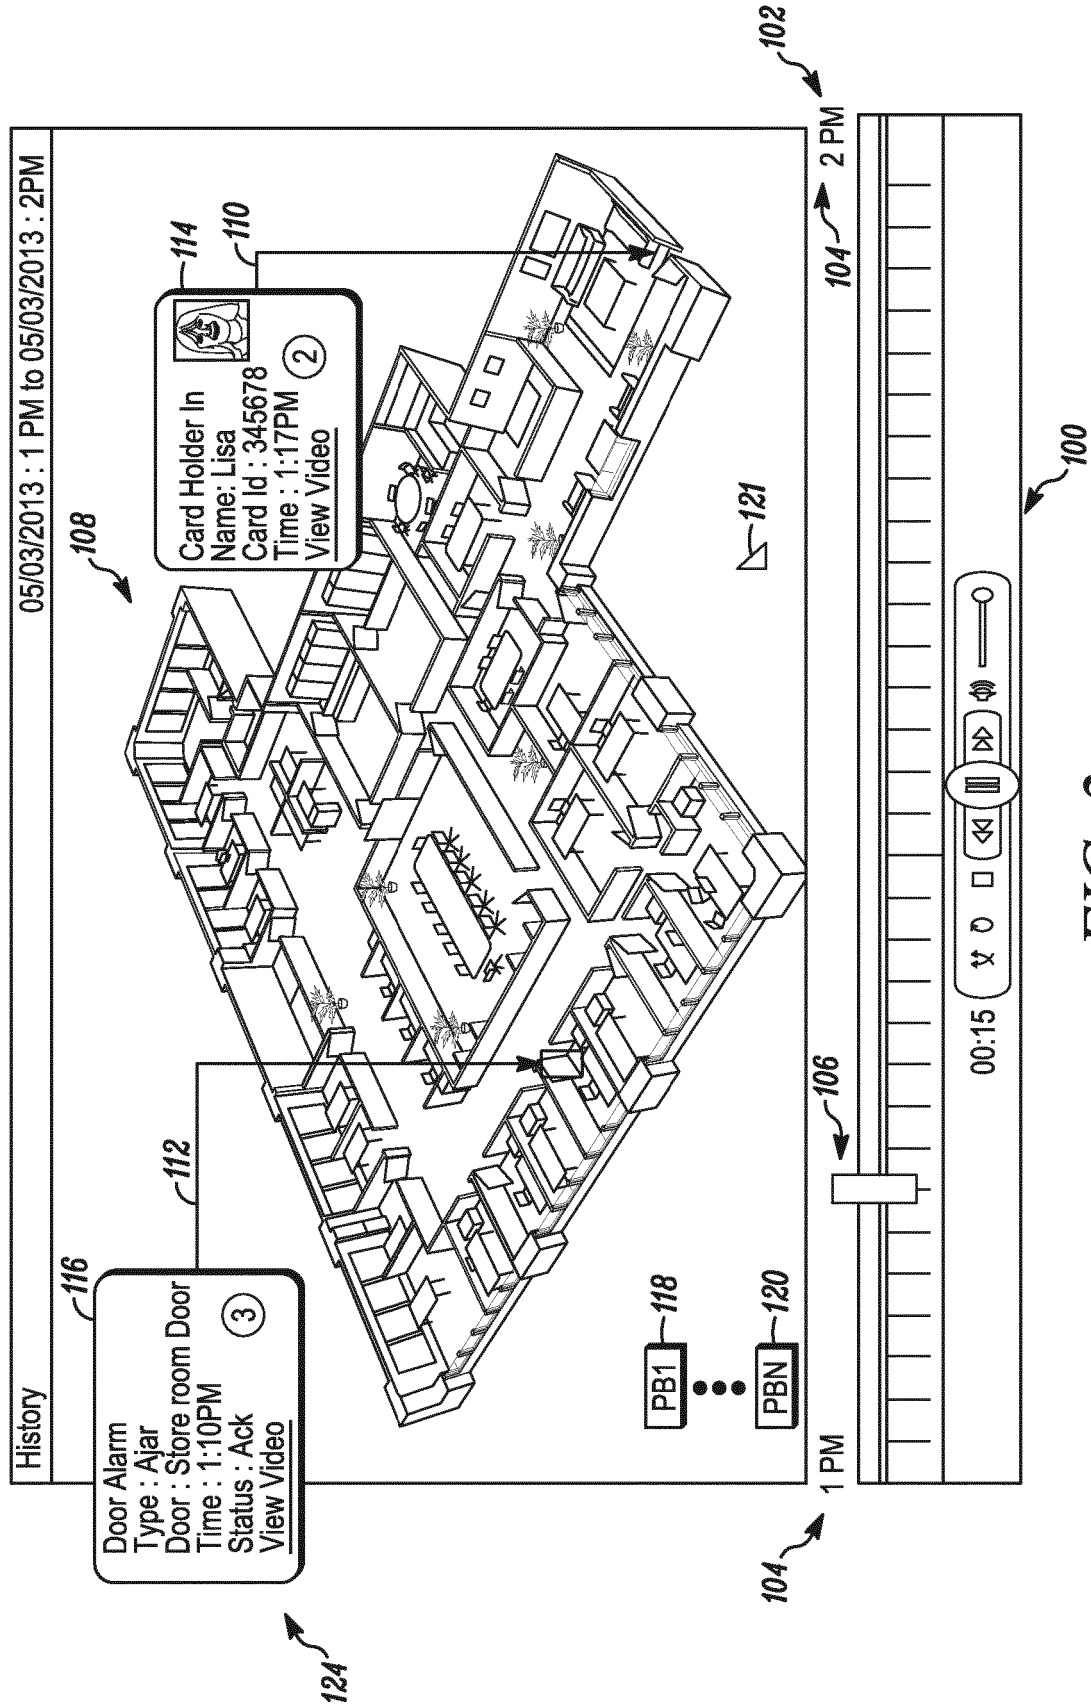


FIG. 2

System and method for visualization of historical events using BIM model

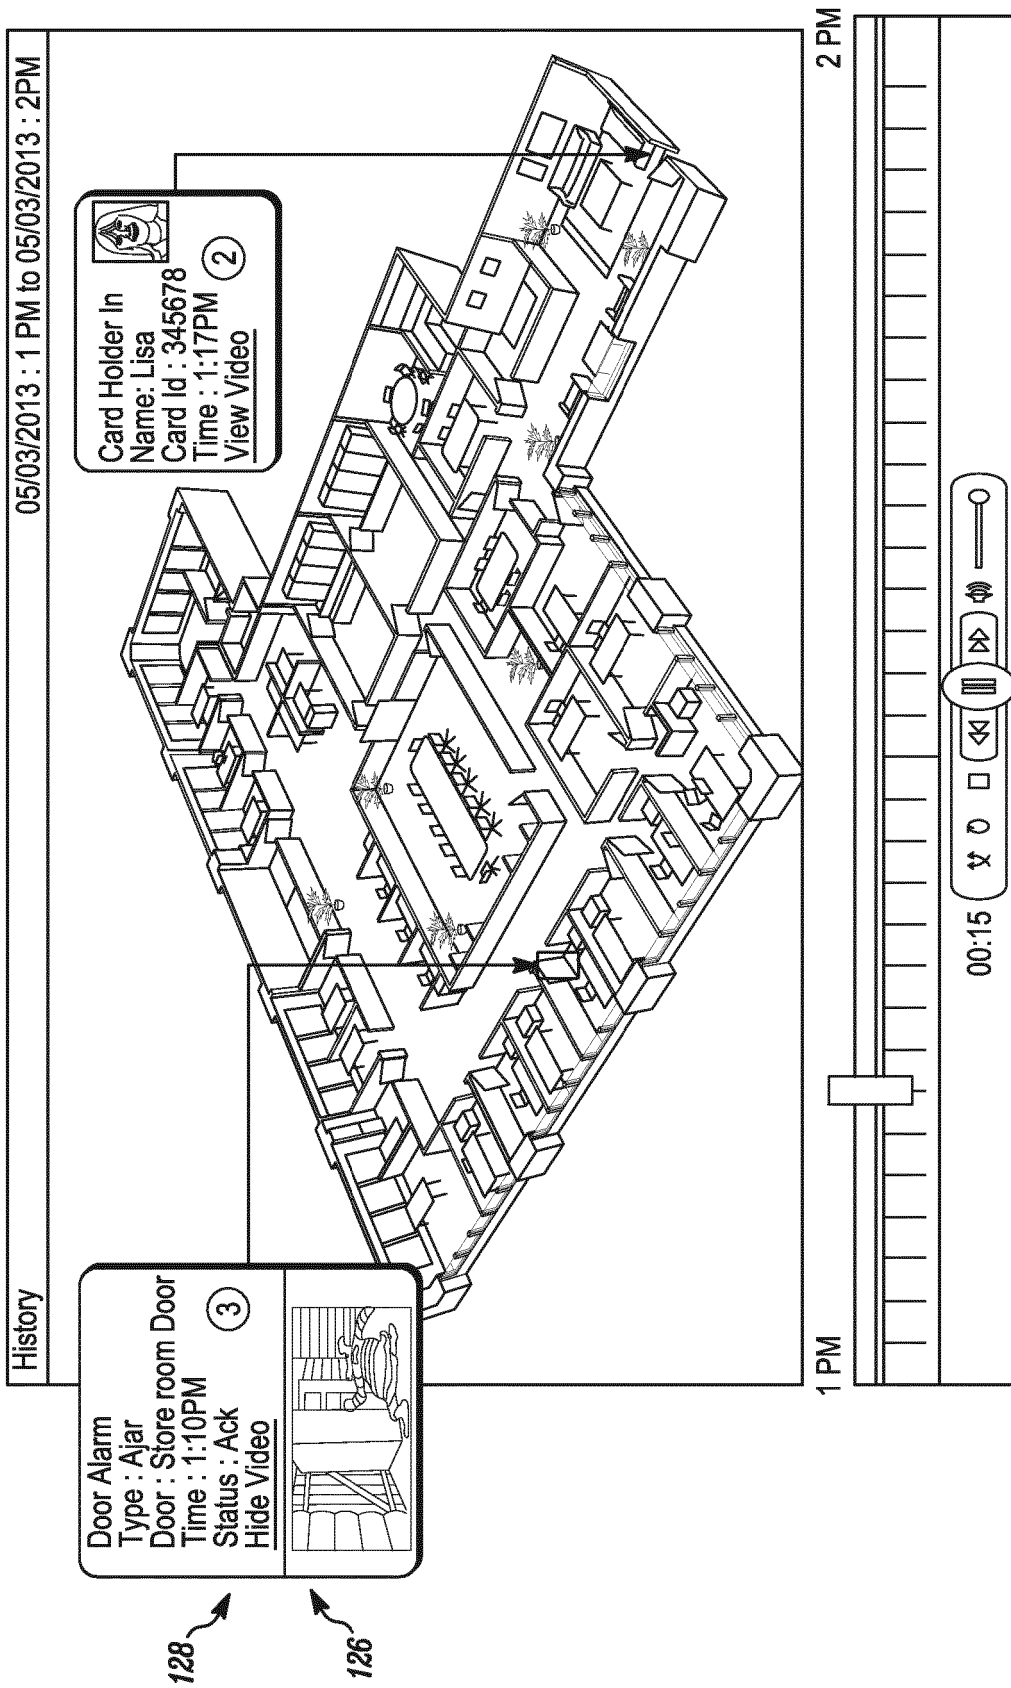


FIG. 3

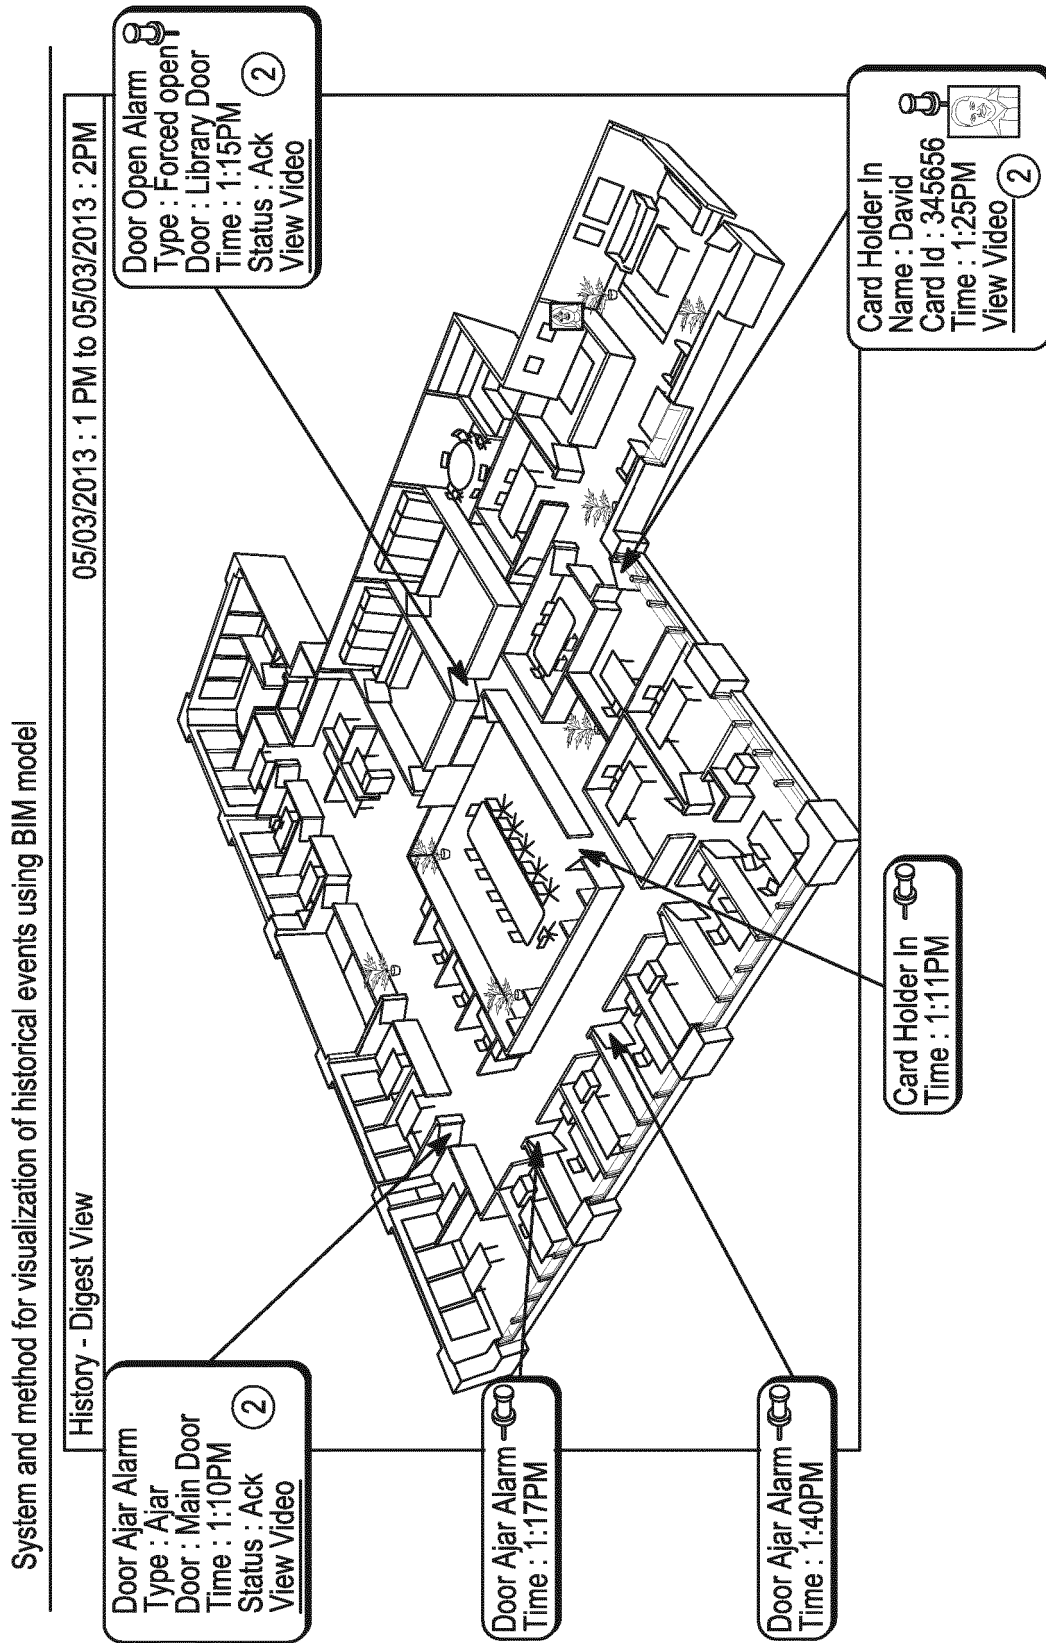
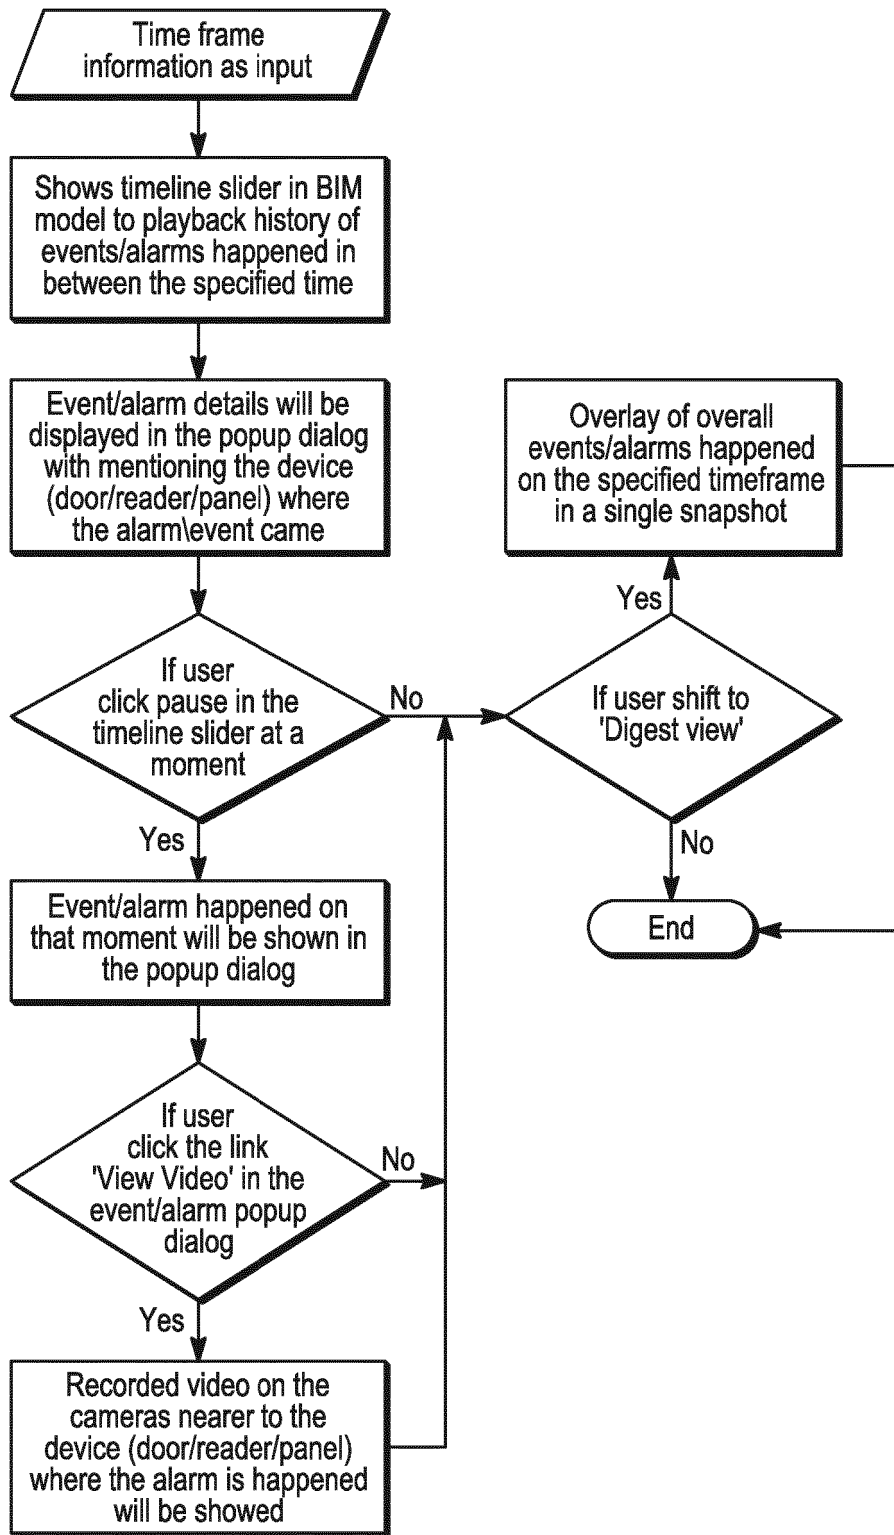


FIG. 4

*FIG. 5*

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20120194336 A1 [0007]
- US 20130091432 A1 [0007]