

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets

SCIENCE REFERENCE LIBRARY

11: Publication number

0 028 074
B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **30.03.83**

(51) Int. Cl.³: **H 01 R 43/00**

(21) Application number: **80303489.1**

(22) Date of filing: **03.10.80**

(54) **Wire connecting apparatus.**

(30) Priority: **26.10.79 US 88691**

(43) Date of publication of application:
06.05.81 Bulletin 81/18

(45) Publication of the grant of the patent:
30.03.83 Bulletin 83/13

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI NL SE

(56) References cited:
EP - A - 0 007 711
US - A - 3 986 256

(73) Proprietor: **AMP INCORPORATED**
Eisenhower Boulevard
Harrisburg Pennsylvania (US)

(72) Inventor: **Hatfield, John Gross**
61 Eastgate Drive
Camp Hill Pennsylvania 17011 (US)

(74) Representative: **Stuart-Prince, Howard & Grey**
20 Queensmere
Slough, Berkshire SL1 1YZ (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 028 074 B1

The invention relates to wire connecting apparatus.

European Patent Application No. 79301267.5, Publication No. EP 7711, discloses apparatus for connecting individual wires extending from a bundle of wires in a cable to respective individual contacts of a row of contacts extending along an electrical connector, comprising a connector holder and a wire connecting means mounted for relative longitudinal traverse by indexing means to bring individual contacts of a connector when mounted in the connector holder successively into alignment with the wire connecting means; and, a cable clamp. The above application falls within the area defined in Article 54(3) EPC.

A disadvantage of the prior apparatus is that the cable clamp remains in a fixed position relative to the connector holder for the duration of the entire longitudinal traverse of the wire connecting means relative to the connector holder. This often results in an inefficient cable lead out orientation.

It is an object of the invention to avoid this disadvantageous result.

In apparatus according to the invention, the cable clamp is linked to the indexing means and cam means are arranged to effect relative movement between the cable clamp and the connector holder in both longitudinal and transverse directions simultaneously for at least part of the traverse.

As the cable clamp is moved relative to the connector holder along a desired path during indexing a predetermined and more efficient and desirable cable lead out orientation can be obtained.

For example, desirably, the cam means are arranged to guide the cable clamp along an arcuate path towards the midpoint of the connector holder during the operation of the indexing means to effect part of the traverse.

The cable may lead out perpendicularly from the connector with the individual wires orientated symmetrically on each longitudinal side of the terminated respective contacts.

An example of the invention will now be described with reference to the accompanying drawings in which:—

Figure 1 is a perspective view of a cable clamp;

Figure 2 is a schematic perspective view of a wire connecting apparatus according to the invention incorporating the cable clamp of Figure 1;

Figure 3 is a cross-sectional view of a cable gripping part of the cable clamp holding a cable;

Figure 4 is a similar view to Figure 3 with the cable clamp jaws open;

Figure 5 is a fragmentary cross-sectional view of the wire connecting apparatus at the

beginning of a wire insertion cycle, with the insertion ram mechanisms omitted;

Figure 6 is a similar view to Figure 5 with the apparatus at a midpoint of the wire insertion cycle;

Figure 7 is a cross-sectional view of a telescopic link arm of the cable clamp in extended condition;

Figure 8 is a similar view to Figure 7 with the telescopic link arm in collapsed condition; and

Figure 9 is a similar view to Figure 6 with the apparatus at the end of a wire insertion cycle.

In this example of the invention, a cable clamp 12 is mounted on one end of a link arm 13 the other end 14 of which is pivotally mounted in a clevis block 15 by pivot pins 16, 16'. The link arm 13 comprises an inner sleeve 17 telescopically received within an outer sleeve 18, against the action of a compression spring 19 trapped in the sleeves which biases the link arm towards an extended condition. A locking pin 21 is secured at one end 22 in sleeve 18 and extends concentrically through both sleeves in sliding engagement with the sleeve 17 to retain the sleeves together.

A cam following roller 24 mounted to extend laterally from sleeve 18 is located in a cam slot 26 formed in a vertical cam plate 27. The cam plate 27 is formed with a laterally extending foot 28 received as a sliding fit in a longitudinally extending groove 29 formed in a base plate 30. A calibrated undercut clamping plate 31 fixed on one side of the base plate receives cap screws 32 for engagement with the foot 28 received in the undercut enabling the cam plate 27 to be clamped in different longitudinal positions according to connector length. It should be noted that the cam slot 26 has a downwardly inclined portion terminating in a horizontal portion 36 having a blind end 37.

The cable clamp 12 comprises first and second clamping jaws 41 and 42, respectively. The second jaw 42 is mounted at one end on a horizontal pivot pin 43 extending through a clevis block 44 fixed on sleeve 18 of link arm 13. The first jaw 41 is pivotally mounted at one end in an aperture 45, formed in jaw 42 adjacent the clevis block 44, for pivotal movement away from the second jaw (Figure 4) to admit or release a cable from between the jaws. An aperture 46 is also formed in jaw 41 and receives a shaft 47 having a handle 48 at one end and fixed at the other end in jaw 42. A compression spring 49 is trapped between the handle 48 and the jaw 41 to bias the jaws together to grip a cable tightly when located between them.

A locking pin 51 is received in a socket in an extension of the clevis block 44 adjacent aperture 45 and is biased by a compression spring 52 into the aperture 45 to prevent pivotal movement of the jaws away from the base plate 30, in a vertical plane.

As shown in Figure 4, a heel 54 provided on the pivoted end of jaw 41 depresses the locking pin against the spring 52 out from the aperture 45 to permit pivoting of the jaws away from the base plate 30 as seen in Figure 2 when the jaws are opened particularly during loading of the cable. It may be more convenient to load the cable when the jaws have been pivoted away from the base plate 30. The locking pin 51 may also be pulled out of the aperture 45 when desired by pulling a shank 53 of the pin.

The cable clamp and associated cam mechanism are assembled in apparatus of the general type described in European Patent Application No. 79301267.5. As shown schematically in Figure 2, in this type of apparatus, a pair of wire insertion ram mechanisms 66, 66' are mounted on opposite ends of a yoke 67 removably secured to an internally threaded drive block 68 receiving a worm 69 driven by a stepping motor 70. Operation of the motor indexes the ram mechanisms 66, 66' along opposite sides of a connector 71 in a connector holder 72 extending cantilever fashion from the front of the apparatus. The indexing operation brings the ram mechanisms into alignment with successive individual contacts of a row of contacts extending longitudinally on each side of the connector which is of the type described in United States Patent No. 3760335. Wire guides 73, 73' are mounted on the ram mechanisms 66, 66' adjacent the rams.

The base plate 30 is fixed to a stationary frame part of the apparatus and the clevis block 15 is fixed to the yoke 67 for movement therewith. A cable 80 is inserted into the cable clamp when the cable clamp is pivoted to its most accessible position away from the connector 71. The cable clamp is then pivoted to the position shown in Figure 5 to bring the cable adjacent one end of the connector 71 and the stepping motor operated to index the ram mechanism into alignment with successive contacts to insert individual wires 81 of the cable guided by guides 73, 73' into successive contacts. The clevis block 15 is advanced by the same indexing increments as the ram mechanisms, incrementally advancing the cable clamp constrained by the cam slot 35 along an arcuate path towards the midpoint of the connector until half the wires have been connected in the connector (as shown in Figure 6) when the cam following roller 24 engages the blind end 37 of the cam slots preventing further advance of the cable clamp (Figure 7). At this stage the cable extends vertically away from the midpoint of the connector. Further advance of the clevis block 15 during indexing is accommodated by collapse of arms 13 with compression of spring 19, (Figure 8), until the final condition shown in Figure 9 is reached in which all the wires are terminated and extend symmetrically arranged on each side of the connector 71, with the cable extending verti-

cally away from the midpoint of the connector in desired fashion.

Thus, a desired cable lead out orientation can be obtained in an efficient manner without the cable or wires interfering with the insertion and indexing mechanisms.

Claims

1. Apparatus for connecting individual wires extending from a bundle of wires in a cable to respective individual contacts of a row of contacts extending along an electrical connector, comprising a connector holder and a wire connecting means mounted for relative longitudinal traverse by indexing means to bring individual contacts of a connector when mounted in the connector holder successively into alignment with the wire connecting means; and, a cable clamp, characterised in that the cable clamp (12) is linked to the indexing means (67, 69) and cam means (24, 27) are arranged to effect relative movement between the cable clamp (12) and the connector holder (72) in both longitudinal and transverse directions simultaneously for at least part of the traverse.

2. Apparatus according to Claim 1, characterised in that the indexing means (67, 69) is operatively connected to traverse the wire connecting means (66, 66') relatively along the connector holder (72) which is stationary, the cam means (24, 27) comprising a stationary guide cam (27) in operative engagement with a cam follower (24) mounted intermediate the ends of a link arm (13) one end of which is pivotally connected to the indexing means (67, 69) the other end carrying the cable clamp (12).

3. Apparatus according to Claim 1 or Claim 2, characterised in that means (29, 31, 32) are provided to mount the guide cam (27) in alternative predetermined locations spaced longitudinally of the connector holder (72).

4. Apparatus according to any one of Claims 1 to 3, characterised in that the cam means (24, 27) are arranged to guide the cable clamp (12) along an arcuate path towards the midpoint of the connector holder (72) during the operation of the indexing means (67, 69) to effect part of the traverse.

5. Apparatus according to Claim 4, characterised in that a stop (37) is provided at an exit end of the cam (27) and the link arm (13) is adapted to permit lost motion between the cam follower (24) and the indexing means (67, 69) after the cam follower (24) is arrested by the stop (37).

6. Apparatus according to Claim 5, characterised in that the link arm (13) is telescopic to permit the lost motion means (19) being provided to bias the link arm (13) in an extended condition.

Revendications

1. Appareil de connexion de fils individuels sortant d'un faisceau de fils dans un câble à des

contacts individuels respectifs d'une rangée de contacts s'étendant le long d'un connecteur électrique, comprenant un porteconnecteur et des moyens de connexion de fils montés pour pouvoir être déplacés sur une course longitudinale relative par des moyens d'indexage afin d'amener des contacts individuels d'un connecteur, lorsqu'il est monté dans le porte-connecteur, successivement en alignement avec les moyens de connexion de fils; et un serre-câble, caractérisé en ce que le serre-câble (12) est relié aux moyens d'indexage (67, 69) et des moyens à came (24, 27) sont agencés pour produire un mouvement relatif entre le serre-câble (12) et le porte-connecteur (72) dans les deux directions longitudinale et transversale, simultanément, sur au moins une partie de la course.

2. Appareil selon la revendication 1, caractérisé en ce que les moyens d'indexage (67, 69) sont reliés fonctionnellement pour déplacer les moyens de connexion de fils (66, 66') relativement le long du porte-connecteur (72) qui est fixe, les moyens de came (24, 27) comprenant une came fixe (27) de guidage en prise fonctionnelle avec un galet de came (24) monté entre les extrémités d'un bras (13) de liaison dont une première extrémité est articulée sur les moyens d'indexage (67, 69), l'autre extrémité portant le serre-câble (12).

3. Appareil selon la revendication 1 ou la revendication 2, caractérisé en ce que des moyens (29, 31, 32) sont prévus pour monter la came (27) de guidage dans des positions alternées prédéterminées, espacées le long du porte-connecteur (72).

4. Appareil selon l'une quelconque des revendications 1 à 3, caractérisé en ce que les moyens de came (24, 27) sont agencés pour guider le serre-câble (12) le long d'un trajet courbe vers le milieu du porte-connecteur (72) pendant le fonctionnement des moyens d'indexage (67, 69) pour effectuer une partie de la course.

5. Appareil selon la revendication 4, caractérisé en ce qu'une butée (37) est prévue à une extrémité de sortie de la came (27) et le bras de liaison (13) est conçu pour permettre un mouvement libre entre le galet de came (24) et les moyens d'indexage (67, 69) après que le galet de came (24) a été arrêté par la butée (37).

6. Appareil selon la revendication 5, caractérisé en ce que le bras de liaison (13) est télescopique pour permettre aux moyens (19) à mouvement libre d'être prévus pour solliciter le bras de liaison (13) vers un état d'extension.

Patentansprüche

1. Vorrichtung zum Verbinden einzelner Drähte, die sich von einem Bündel von Drähten in einem Kabel weg erstrecken, mit entsprechenden Einzelkontakten einer Reihe von Kon-

takten, die sich entlang eines elektrischen Verbinders erstrecken, mit einem Verbindhalter und einer Drahtanschlußeinrichtung, die für eine relative Längsverschiebung mittels einer Weiterschalteneinrichtung angeordnet ist, um Einzelkontakte eines Verbinders, wenn dieser in dem Verbindhalter befestigt ist, nacheinander mit der Drahtanschlußeinrichtung auszurichten; und mit einer Kabelklemme, dadurch gekennzeichnet, daß die Kabelklemme (12) mit der Weiterschalteneinrichtung (67, 69) in Verbindung steht, und daß Steuerflächeneinrichtungen (24, 27) derart angeordnet sind, daß sie eine Relativbewegung zwischen der Kabelklemme (12) und dem Verbindhalter (72) sowohl in Längsrichtung als auch in Querrichtung gleichzeitig für zumindest einen Teil der Verschiebung bewirken.



2. Vorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Weiterschalteneinrichtung (67, 69) betriebsmäßig so angeschlossen ist, daß sie die Drahtanschlußeinrichtung (66, 66') relativ entlang des Verbindhalters (72), der ortsfest ist, verschiebt, und daß die Steuerflächeneinrichtungen (24, 27) eine ortsfeste Führungs-Steuerfläche (27) aufweisen, die sich in betriebsmäßigem Eingriff mit einem Steuerflächenfolgeelement (24) befindet, das zwischen den Enden eines Gelenkarms (13) angebracht ist, dessen eines Ende mit der Weiterschalteneinrichtung (67, 69) schwenkbar verbunden ist und dessen anderes Ende die Kabelklemme (12) trägt.




3. Vorrichtung nach Anspruch 1 oder Anspruch 2, dadurch gekennzeichnet, daß Einrichtungen (29, 31, 32) vorgesehen sind zum Befestigen der Führungs-Steuerfläche (27) an alternativen, vorbestimmten Stellen in Längs-Beabstandung von dem Verbindhalter (72).





4. Vorrichtung nach einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß die Steuerflächeneinrichtungen (24, 27) derart angeordnet sind, daß sie zur Bewirkung eines Teils der Verschiebung die Kabelklemme (12) während des Betriebs der Weiterschalteneinrichtung (67, 69) entlang einer bogenförmigen Bahn in Richtung auf den Mittelpunkt des Verbindhalters (72) führen.

5. Vorrichtung nach Anspruch 4, dadurch gekennzeichnet, daß an einem ausgehenden Ende der Steuerfläche (27) ein Anschlag (37) vorgesehen ist, und daß der Gelenkarm (13) so ausgelegt ist, daß er einen Totgang zwischen dem Steuerflächenfolgeelement (24) und der Weiterschalteneinrichtung (67, 69) gestattet, nachdem das Steuerflächenfolgeelement (24) durch den Anschlag (37) arretiert worden ist.

6. Vorrichtung nach Anspruch 5, dadurch gekennzeichnet, daß der Gelenkarm (13) teleskopisch ist, um der vorgesehenen Totgangeinrichtung (19) ein Vorspannen des Gelenkarms (13) in einen ausgefahrenen Zustand zu gestatten.

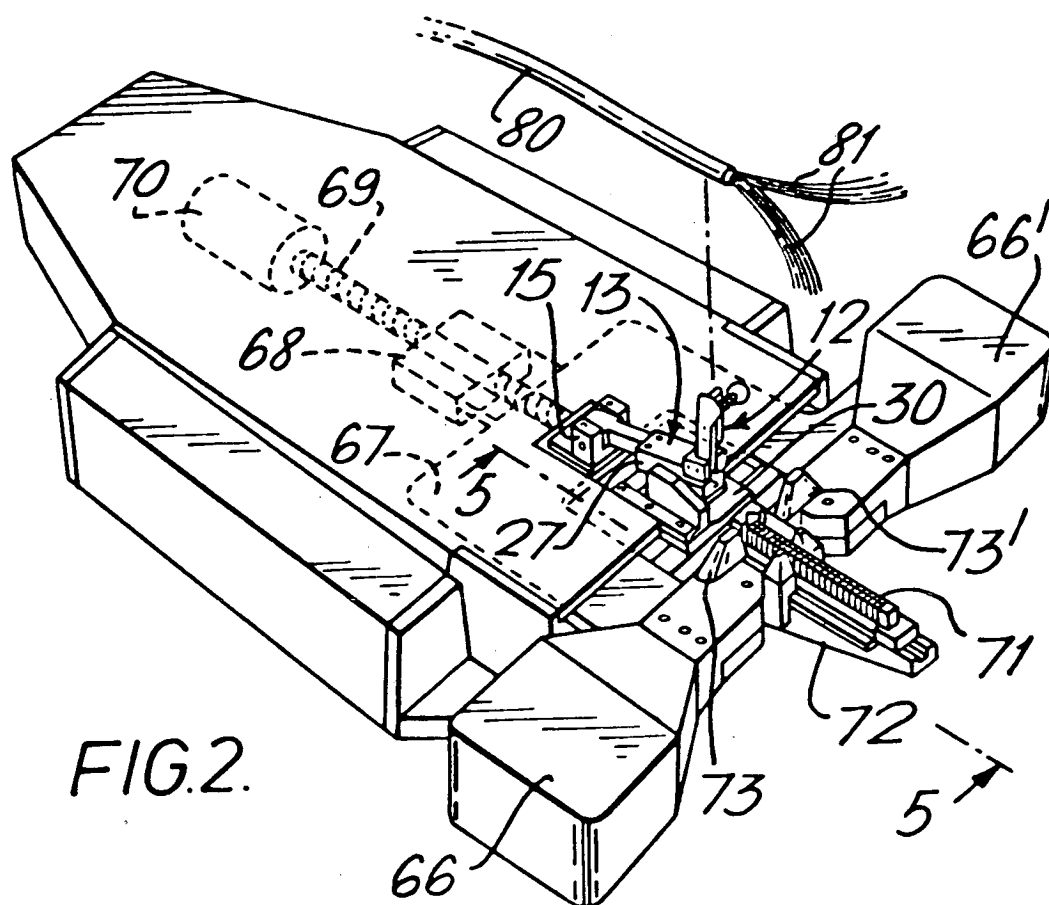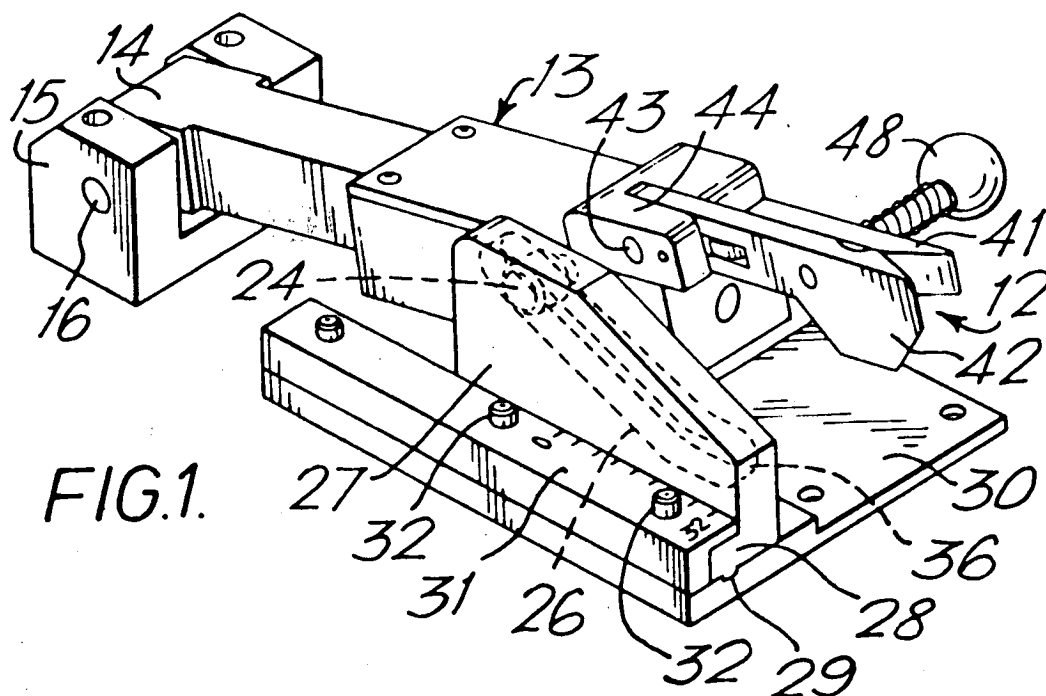

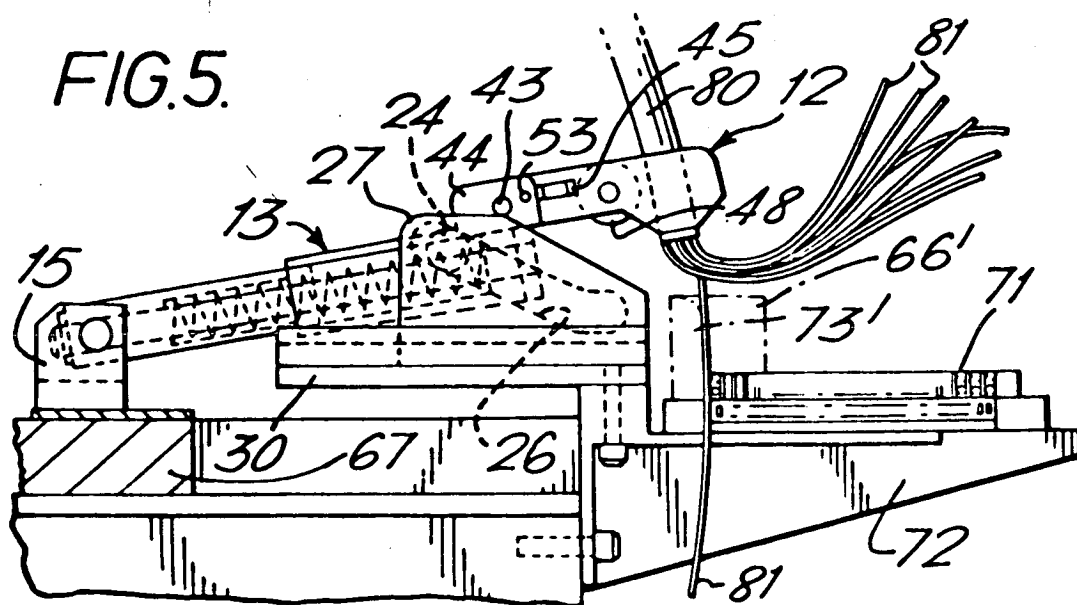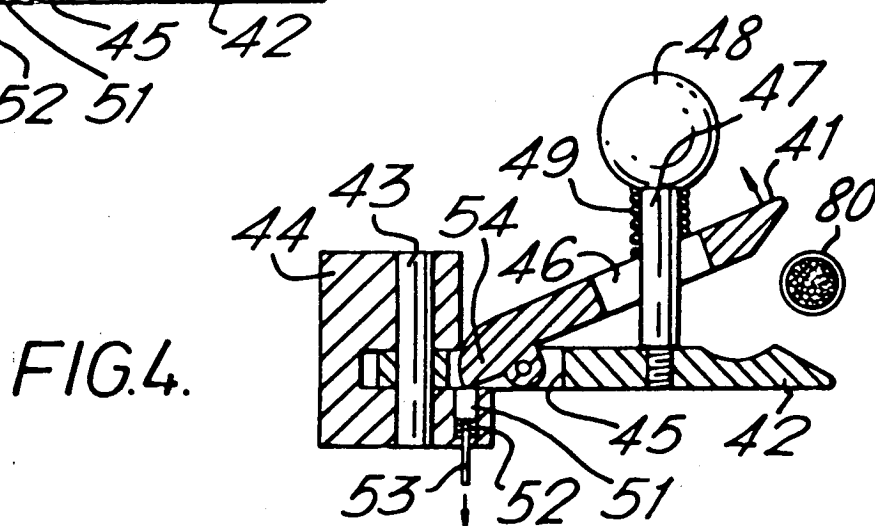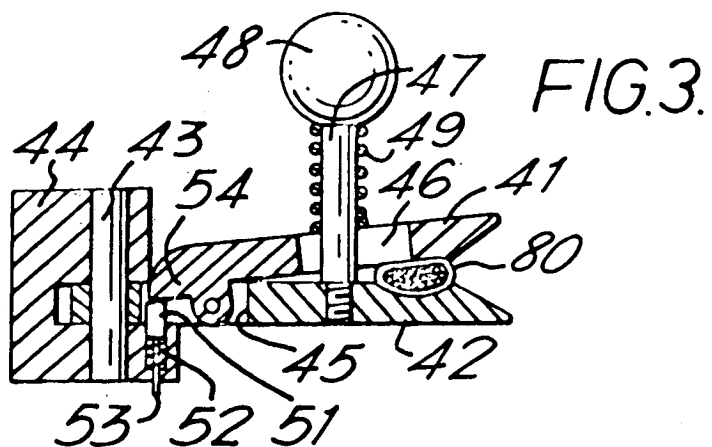

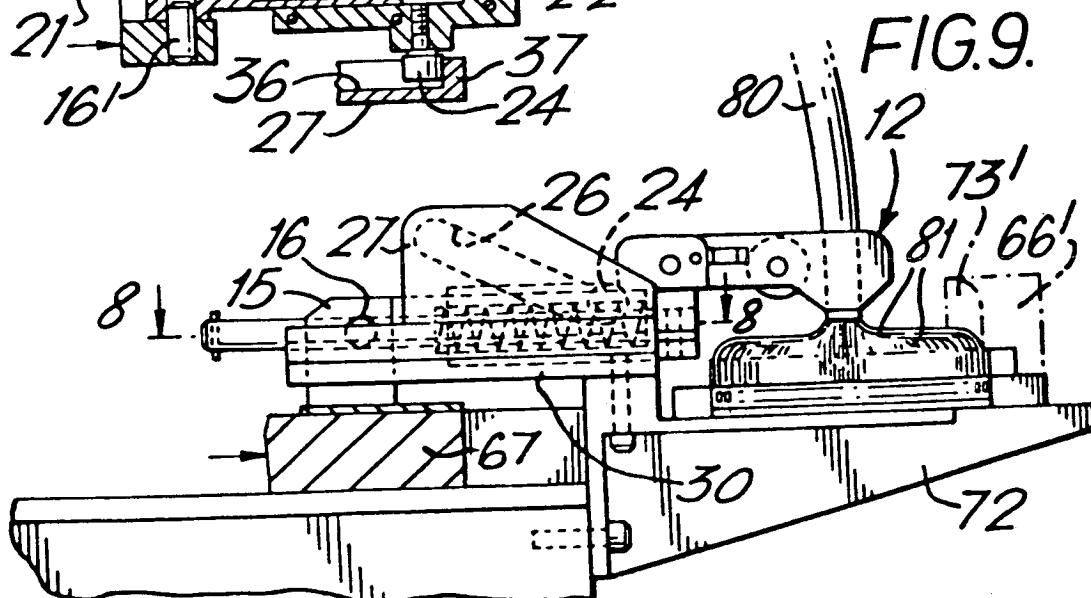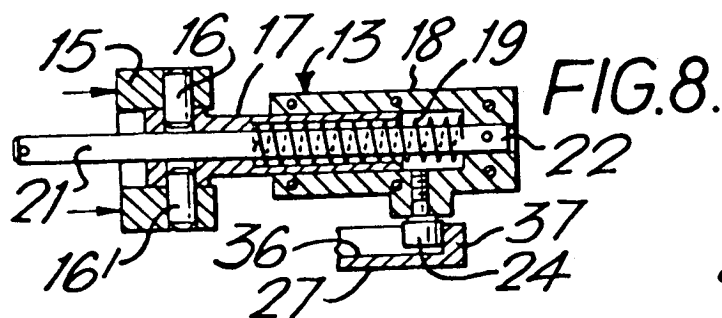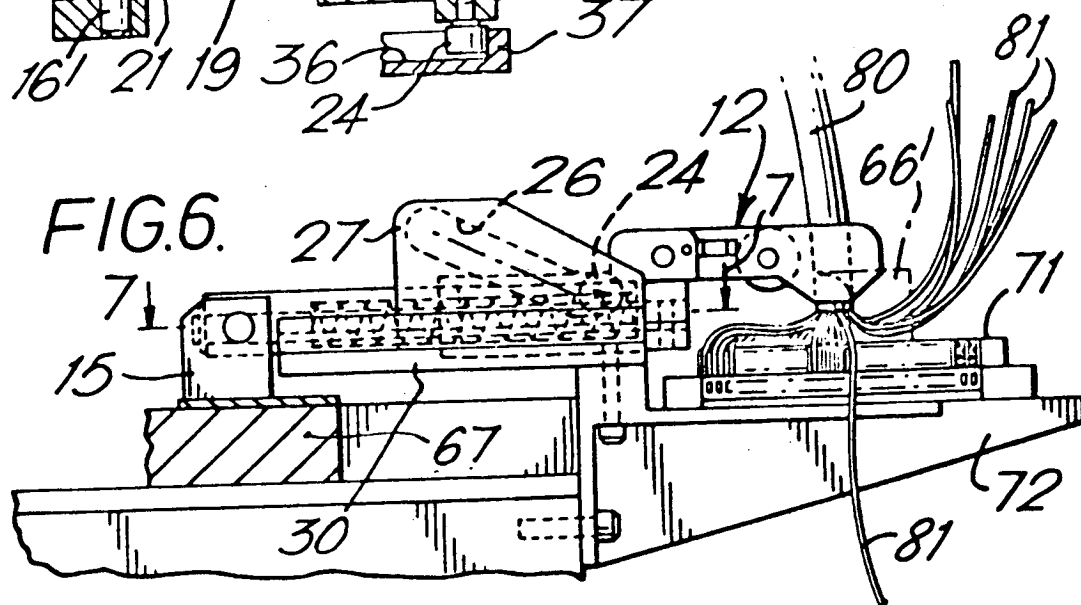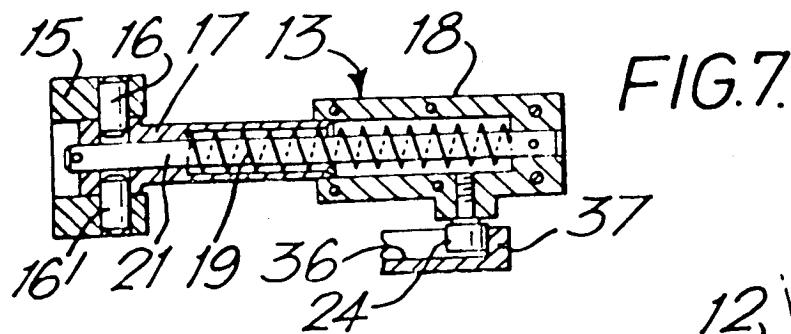



THE PATENT OFFICE

State House 66-71 High Holborn London WC1R 4TP

Switchboard 01-831 2525

RENEWAL DETAILS

PATENT No 00 280 74

RENEWAL DATE 3 / 10 / 80

RENEWAL FEE PAID FOR 6TH YEAR ON 11-9-85

P. J. Denihan

FOR THE COMPTROLLER

21/5/86

NOTE: RENEWALS FILED WITHIN THE LAST FEW DAYS MAY NOT APPEAR
IN THE RECORDS

(11) 0028074 (21) 30303489.1 (86) (87)
(45) 30.03.83 (43) 06.05.81 (22/86) 03.10.80 (87) 00.00.00
(86) EN (87) EN (84) AT BE CH DE FR GB IT LI NL SE

(51) H01R43/00

(30) 26.10.79/ US 88691

(54)
Drahtverbindungsapparat
Wire connecting apparatus
Appareil pour connecter des fils

(72) Hatfield, John Gross

(73) AMP INCORPORATED
Eisenhower Boulevard
Harrisburg Pennsylvania/US

(74) Stuart-Prince, Richard Geoffrey
20 Queensmere
Slough, Berkshire SL1 1YZ/GB

Hauptanmeldung/parent application/demande d'origine :

frühere Anmeldung/earlier application/demande initiale :

Address for service

~~Address for service given overleaf/above~~