

(19) AUSTRALIAN PATENT OFFICE

(54) Title
A filter housing

(51) 6 International Patent Classification(s)
A47L 9/12 060408BMEP
(2006.01) A47L 9/00
A47L 9/00 20060101ALI20
(2006.01) 060408BMEP
A47L 9/12 PCT/GB03/0045
20060101AFI20 2

(21) Application No: 2003202711 (22) Application Date: 2003.02.03

(87) WIPO No: WO03/068043

(30) Priority Data

(31) Number (32) Date (33) Country
0203150.8 2002.02.11 GB

(43) Publication Date : 2003.09.04

(43) Publication Journal Date : 2003.10.02

(71) Applicant(s)
Dyson Technology Limited

(72) Inventor(s)
Mason, Richard Anthony; Genn, Stuart Lloyd

(74) Agent/Attorney
Shelston IP, Level 21 60 Margaret Street, Sydney, NSW, 2000

(56) Related Art
GB 1047804
DE 19903734
JP 05003843

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2003 (21.08.2003)

PCT

(10) International Publication Number
WO 03/068043 A1

(51) International Patent Classification?: A47L 9/12, 9/00

[GB/GB]; 31 Elmer Close, Malmesbury, Wiltshire SN16 9UE (GB).

(21) International Application Number: PCT/GB03/00452

(74) Agent: SMITH, Gillian, R.; Intellectual Property Department, Dyson Limited, Tisbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).

(22) International Filing Date: 3 February 2003 (03.02.2003)

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, IR, IU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PL, PT, RO, RU, SC, SD, SH, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(26) Publication Language: English


(72) Inventors; and

(73) Priority Data: 0203150.8 11 February 2002 (11.02.2002) GB

(75) Inventors/Applicants (for US only): GENN, Stuart, Lloyd [GB/GB]; 4 Castilian Mews, Shaw, Swindon, Wiltshire SN5 5PR (GB). MASON, Richard, Anthony

[Continued on next page]

(54) Title: A FILTER HOUSING

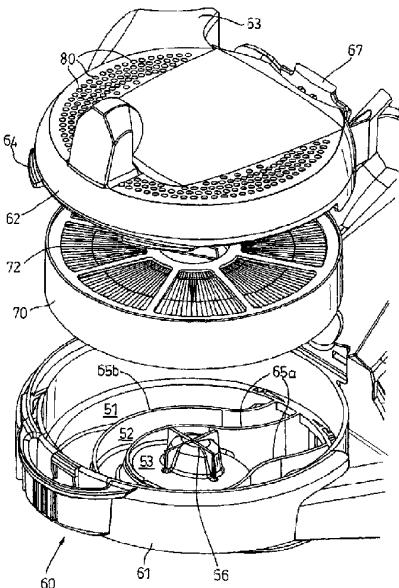

(57) Abstract: A filter housing (60) comprises an inlet for receiving airflow, a cavity for receiving a filter (70) and an airflow passage between the inlet and the filter (70). At least one vane (65a, 65b, 65c) is positioned in the airflow passage for partitioning the airflow passage into a plurality of ducts (51, 52, 53). Each vane (65a, 65b) has a non-linear shape in the direction of flow through the airflow passage. This helps to reduce acoustic emissions from the machine since sound waves emitted by the fan and/or motor are caused to bounce off the vanes (65a, 65b), which allows the vanes (65a, 65b) to absorb some of the sound energy. The filter housing (60) can form part of a vacuum cleaner.

WO 03/068043 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NI, SN, TD, TG). *For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Published:
with international search report

2003202711 20 Oct 2004

- 1 -

A Filter Housing

The invention relates to a filter housing. Particularly, but not exclusively, the invention relates to a filter housing for use in a domestic appliance such as a vacuum cleaner.

5 Any discussion of the prior art throughout the specification should in no way be considered as an admission that such prior art is widely known or forms part of common general knowledge in the field.

Vacuum cleaners are required to separate dirt and dust from an airflow. Dirt and dust-laden air is sucked into the appliance via either a floor-engaging cleaner head or a tool
10 connected to the end of a hose and wand assembly. The dirty air passes to some kind of separating apparatus which attempts to separate dirt and dust from the airflow. Many vacuum cleaners suck or blow the dirty air through a porous bag so that the dirt and dust is retained in the bag whilst cleaned air is exhausted to the atmosphere. In other vacuum cleaners, cyclonic or centrifugal separators are used to spin dirt and dust from the
15 airflow (see, for example, EP 0 042 723). Whichever type of separator is employed, there is commonly a risk of a small amount of dust passing through the separator and being carried to the fan and motor unit, which is used to create the flow of air through the vacuum cleaner whilst it is in operation. Also, with the majority of vacuum cleaner fans being driven by a motor with carbon brushes, such as an AC series motor, the motor
20 emits carbon particles which are carried along with the exhaust flow of air.

In view of this, it is common for a filter to be positioned after the motor and before the point at which air is exhausted from the machine. Such a filter is often called a 'post motor' filter.

There is an increasing awareness among consumers of the problem of emissions, which
25 can be particularly problematic for asthma sufferers. Thus, recent vacuum cleaner models are fitted with filters which have a large surface area of filter material, and the filters often comprise several types of filter material and a foam pad. Such filters are physically bulky and housing such filters in the cleaner is quite challenging. A vacuum cleaner called the Dyson DC05, manufactured and sold by Dyson Limited, houses a
30 circular post motor filter beneath the dirt collection bin. Air flows towards a first face of

the filter, passes through the filter and exhausts from the machine via a set of apertures in the cover above the filter.

US 5,961,677 shows a vacuum cleaner exhaust filter in which air flows out of a central conduit, via a series of openings formed between angled vanes, before passing through

5 an open space to a cylindrical filter which surrounds the central conduit.

It is an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative.

There is also a desire to increase the rate of flow of air through a vacuum cleaner. A higher rate of flow generally increases both the ability of the cleaner to pick up material

10 from a surface and the ability of the cyclonic separator to separate material from the dirty airflow. However, an increased rate of airflow can cause the machine to be noisy in operation. It is possible to place acoustically absorbent material in the path of the exhaust air, but this increases the resistance of the path seen by the airflow. This has a detrimental effect on the overall rate of airflow through the machine in addition to

15 adding both weight and cost to the machine.

Accordingly, the present invention provides a filter housing comprising an inlet for receiving an airflow, a cavity for receiving a filter, an airflow passage between the inlet and the cavity and at least one vane positioned in the airflow passage for partitioning the airflow passage into a plurality of elongated ducts, wherein each vane has a non-linear

20 shape in the direction of flow through the airflow passage, which direction is substantially along the ducts.

Unless the context clearly requires otherwise, throughout the description and the claims, the words 'comprise', 'comprising', and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, 25 but not limited to".

The non-linear vanes serve to reduce acoustic emissions from the machine since sound waves emitted by the fan and/or motor are caused to bounce off the vanes, which allows the vanes to absorb some of the sound energy. Thus, a reduction in noise is achieved without the use of dedicated noise reduction structures.

Although this invention is described in relation to a cylinder (canister) vacuum cleaner, it will be apparent that it can be applied to other kinds of vacuum cleaner, domestic appliances or machines which use a filter of some kind.

5 Embodiments of the invention will now be described with reference to the accompanying drawings in which:

Figure 1 is a perspective view of a vacuum cleaner in which a filter housing according to the invention is embodied;

10

Figures 2 and 3 are side views of the vacuum cleaner of Figure 1, showing some of the internal components of the cleaner;

Figure 4 shows the filter housing of the vacuum cleaner of Figures 1 to 3;

15

Figure 5 shows the chassis of the vacuum cleaner and the conduit leading to the filter housing of Figure 4;

Figure 6 is a plan view of the lower part of the filter housing of Figure 4;

20

Figures 7 and 8 illustrate the effect of vanes in reducing swirl in the airflow;

Figures 9 and 10 illustrate the effect of the shape of the vanes in the filter housing of Figure 6; and

25

Figure 11 is a plan view of an alternative embodiment of the lower part of the filter housing.

Figures 1 to 3 show an example of a vacuum cleaner 10 in which the invention is

30

embodied. The vacuum cleaner 10 is a cylinder or canister type of vacuum cleaner comprising a chassis 12 with wheels 13, 15 for allowing the chassis 12 to be moved

across a surface to be cleaned. The chassis 12 supports a chamber 20 which serves as a separator for separating dirt, dust and other debris from an airflow and also as a collector for the separated material. While a cyclonic separator is shown here, the separator can take any form and this is not important to the invention. Chamber 20 is

5 removable from the chassis 12 such that a user can empty the chamber 20. Although not shown for reasons of clarity, a hose connects to inlet 14 of the vacuum cleaner 10 and a user can fit a wand or tools to the distal end of the hose for use in cleaning various surfaces.

10 Figures 2 and 3 show some of the internal components of the vacuum cleaner 10 of Figure 1. The chamber 20 communicates with the inlet 14 through which an airflow can enter the chamber in a tangential manner. The chamber 20 has an apertured shroud 21 mounted centrally within it. The region 22 externally of the shroud 21 forms a first cyclonic separation stage. The apertures 23 in the shroud 21 communicate with a
15 second cyclonic separation stage comprising a set of frusto-conical separators 25 arranged in parallel. The outlets of the second stage separators 25 are connected, via a duct 29, to a housing for a pre-motor filter 30. The pre-motor filter 30 serves to trap any fine dust or microscopic particles which have not been separated by the two cyclonic separation stages 22, 25. The downstream side of the pre-motor filter 30 communicates
20 with a fan and motor housing 48. This housing 48 accommodates an impeller 45 which is driven by a motor 40. The outlet of the housing 48 communicates, via an aperture 50, with a filter housing 60. The filter housing 60 houses a post-motor filter 70 which serves to trap any particles remaining in the airflow, as well as carbon particles emanating from the motor 40. The downstream side of the filter housing 60
25 communicates with an exhaust duct 90 having outlet apertures 95 at its furthest end.

The filter housing 60 will now be described in more detail with reference to Figure 4.

The filter housing 60 comprises a lower part 61, which in this embodiment forms part of

the chassis 12 of the vacuum cleaner 10, and an upper part 62. The upper part 62 fits

30 removably to the lower part 61 by means of lugs 64 and a snap fastener 67. Other types of fastener could, of course, be used. The lower part 61 defines an airflow passage

which communicates at its upstream end with the aperture 50 which forms the outlet from the housing 48. The space between the lower part 61 and the upper part 62 defines a cavity for housing the filter 70. The upper part 62 has an outlet branch 63 which mates, in an airtight manner, with the lower end of the exhaust duct 90.

5

A plurality of vanes 65a, 65b, 65c are located in the airflow passage. Two of the vanes 65a, 65b extend from the aperture 50 and into the area of the airflow passage which lies adjacent the cavity for receiving the filter 70. In this area, the vanes 65a, 65b extend from the lower part 61 towards the upper part 62 so that they lie adjacent, or even 10 contact, the filter 70. A third vane 65c extends from the aperture 50 towards the area of the airflow passage which lies adjacent the cavity for receiving the filter 70 but terminates immediately before the said area. Three separate ducts 51, 52, 53 are formed between the vanes 65a, 65b, 65c.

15 The vanes 65a, 65b, 65c serve to guide the airflow passing through the vacuum cleaner 10 to and from the filter 70. The vanes 65a, 65b, 65c extend from the outlet 50 of the motor housing 48 along the lower surface of part 61. The vanes 65a, 65b continue beneath the area where filter 70 is located. The vanes 65a, 65b, 65c have two uses: firstly they serve to distribute airflow across the surface of the filter 70 in a reasonably 20 uniform manner, and secondly their non-linear shape serves to attenuate sound from the impeller 45. Referring to Figure 5, the vanes 65a, 65b, 65c divide outlet 50 into six apertures 51a, 51b, 52a, 51b, 53a, 53b. In use, this causes the flow of air from the impeller 45 to be divided into six separate flows. Each aperture 51a, 51b, 52a, 52b, 53a, 25 53b forms an inlet to one of the ducts 51, 52, 53. Each duct 51, 52, 53 communicates with a distinct and separate portion of the surface area of the filter 70. The height of each vane 65a, 65b is chosen such that the distal edges thereof lie adjacent, and preferably touch, the surface of the filter 70 when the filter is fitted in the filter housing 60. Thus, each duct 51, 52, 53 communicates with a separate and distinct portion of the filter 70 so that air flowing along each duct 51, 52, 53 is constrained to flow through the 30 respective portion of the filter 70.

Referring again to Figure 2 it can be seen that the upstream surface of the filter 70 lies, in use, at an acute angle (approximately 10°) with respect to the incoming airflow from the motor housing 48. The division of the airflow into separate portions in the manner just described helps to distribute the airflow evenly across the surface of the filter 70,

5 even though the arrangement of the filter 70 with respect to the incoming airflow is not ideal for even distribution. It is particularly beneficial that each duct 51, 52, 53 serves a portion of the filter surface which is a different distance from the inlet 50; i.e. duct 51 serves the remote portion of the filter 70, duct 52 the middle section, and duct 53 the nearest portion of the filter surface 70.

10

Figure 6 shows the lower part 61 of the filter housing 60 in plan view. The path taken by the airflow along part of the duct 52 is shown by arrow 85 while the path taken by sound waves is shown by arrow 86. Due to the shape of the vanes 65a, 65b, it can be seen that the sound waves are forced to bounce between the vanes 65a, 65b on multiple occasions or at the very least provide an obstruction to sound waves emanating from the motor housing 48. Vanes 65a, 65b, 65c can be moulded or otherwise formed integrally with the lower part 61 of the filter housing 60 or they can be provided as a separate part or set of parts which locate within the lower part 61 of the filter housing 60.

20 The provision of the vanes 65a, 65b, 65c described above is also particularly beneficial where the airflow inlet 50 is off-centre with respect to the filter housing 60. Figure 7 shows the expected airflow without the presence of vanes of this sort. Air enters the filter housing 60 and swirls around the housing. This swirling airflow can cause added noise and can further reduce suction power. Figure 8 shows the effect of positioning 25 vanes 65a, 65b within the filter housing 60. Air entering the filter housing 60 is now unable to swirl to any noticeable degree.

The shape of the vanes 65a, 65b, 65c ensures a smooth transition between directions and section changes which helps to avoid 'break away' and turbulence which increase noise

30 and back pressure. It is particularly desirable to minimise back pressure in a vacuum cleaner as it reduces suction power. Figures 9 and 10 show the effect of 'break away'

airflow by contrasting a smoothly curved duct (Figure 9) with a duct which is curved too sharply (Figure 10).

5 The position of the vanes 65a, 65b, 65c within the outlet aperture 50 of the motor housing 48 is chosen such that the cross sectional area of the inlet to each duct 51, 52, 53 is substantially proportional to the surface area of the filter portion served by that duct. This helps to ensure that the airflow is evenly distributed across the filter surface. The provision of two inlets to each duct (e.g. inlets 51a, 51b to duct 51) also helps to balance the airflow to the filter.

10

Filter 70 is shown here as a pleated filter, in which a cylindrical plastic case houses a pleated structure 72. Other types of filter, e.g. a simple foam pad filter, could be used in place of what has been shown here. Preferably the post-motor filter is a HEPA (High Efficiency Particulate Air) filter.

15

Figure 11 shows a plan view of an alternative embodiment of the lower part 61 of the filter housing 60. In this embodiment, a set of vanes 165a – 165e are positioned in a different manner to that shown in Figure 6. Here, the vanes 165a – 165e extend outwardly from the outlet aperture 50 of the motor housing 48 towards the furthermost 20 side of the lower part 61 of the filter housing 60. As before, this arrangement of vanes divides the area beneath the filter 70 into a plurality of ducts 151 – 156, each duct communicating with a different portion of the filter surface. Each vane has a non-linear, 25 sinuous shape which enhances the likelihood of sound waves colliding with at least one of the vanes. In use, incoming airflow will be divided into a plurality of separate portions, each portion flowing along a respective duct. As before, the cross-section of each inlet is proportional to the filter area served by the inlet.

The operation of the vacuum cleaner will now be described. In use, air is drawn by the 30 motor-driven impeller 45, through any floor tool and hose into inlet 14 of the vacuum cleaner 10. The dirty air passes through the cyclonic separation stages 22, 25, during which dirt and dust is removed from the airflow in a manner which is well documented

elsewhere. Air flows from the outlet of cyclones 25, along duct 29, through pre motor filter 30 and into the motor housing 48. Exhaust air is blown towards the aperture 50 and is there divided into six portions by the leading edges of the vanes 65a, 65b, 65c. The divided portions of the airflow flow along the three ducts 51, 52, 53. As described 5 above, acoustic waves bounce along the ducts 51, 52, 53 between opposing vanes 65a, 65b. Airflow from the ducts 51, 52, 53 then passes through the portion of the post-motor filter 70 with which each respective duct 51, 52, 53 communicates. After passing 10 through the filter 70, air passes to the inlet to the exhaust duct 90. Some of the air vents to atmosphere via apertures 80 in the upper face of the filter housing part 62 (see arrows 82, Figure 3). The remainder of the air flows along the exhaust duct 90. As the air flows along the exhaust duct 90, it slows down because the duct 90 widens in the direction of flow. This air vents to atmosphere via apertures 95 (see arrows 85, Figure 3).

Claims:

1. A filter housing comprising an inlet for receiving an airflow, a cavity for receiving a filter, an airflow passage between the inlet and the cavity and at least one vane positioned in the airflow passage for partitioning the airflow passage into a plurality of ducts, wherein each vane has a non-linear shape in the direction of flow through the airflow passage.
2. A filter housing according to claim 1, wherein each vane has an arcuate shape along its entire length.
3. A filter housing according to claim 1 or 2, wherein at least one of the ducts has two inlets for receiving the airflow.
4. A filter housing according to any one of the preceding claims, further comprising a filter having a filter surface, each vane being dimensioned such that an edge of the vane lies adjacent to, or contacts, the filter surface when the filter is mounted within the housing, such that each duct communicates with a separate portion of the filter surface.
5. A filter housing according to claim 4, wherein the cross sectional area of the inlet to each duct is substantially proportional to the area of the portion of the filter surface with which the said duct communicates.
6. A filter housing according to claim 4 or 5, wherein the portions of the filter surface with which each duct communicates are located at different distances from the inlet.
7. An appliance comprising an inlet, a filter housing according to any one of the preceding claims, an exhaust assembly, and means for generating an airflow through the appliance from the inlet to the exhaust assembly.

2003202711 20 Oct 2004


- 10 -

8. An appliance according to claim 7 in the form of a vacuum cleaner, the vacuum cleaner further comprising means for separating dirt and dust from the airflow.
9. A filter housing substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings and/or 5 examples.
10. An appliance substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings and/or examples.

DATED this 19th Day of October 2004
10 Shelston IP
Attorneys for: DYSON LIMITED

1/7

Fig. 1

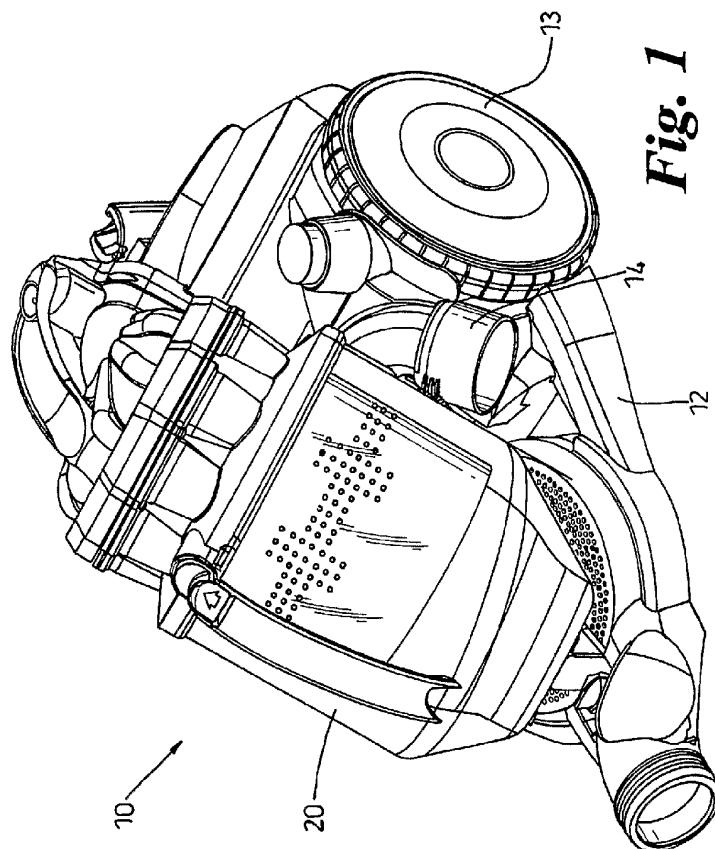

SUBSTITUTE SHEET (RULE 26)

2/7

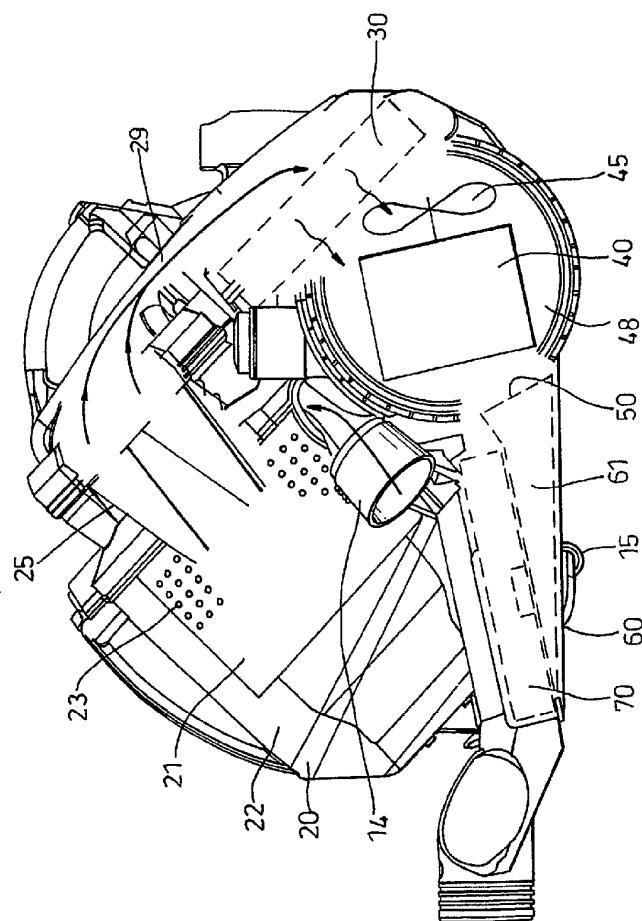


Fig. 2

SUBSTITUTE SHEET (RULE 26)

3/7


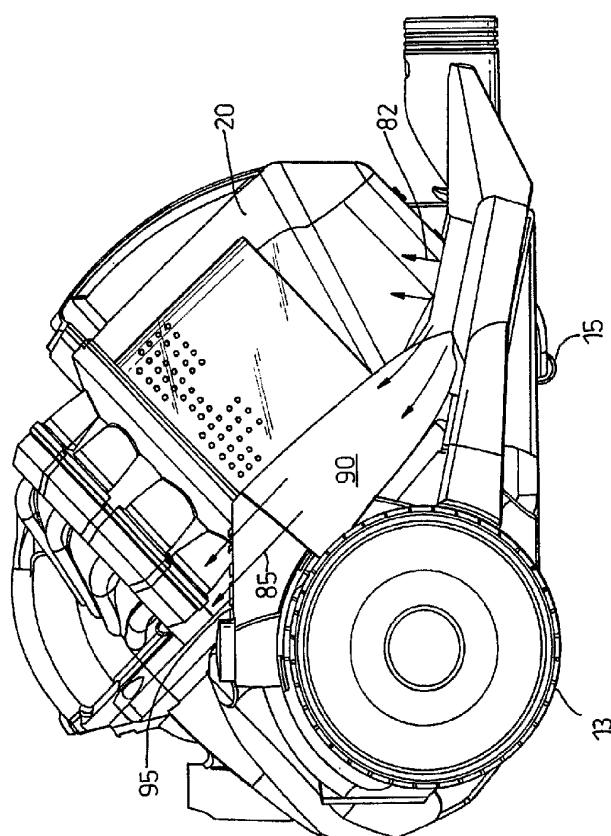


Fig. 3


SUBSTITUTE SHEET (RULE 26)

4/7

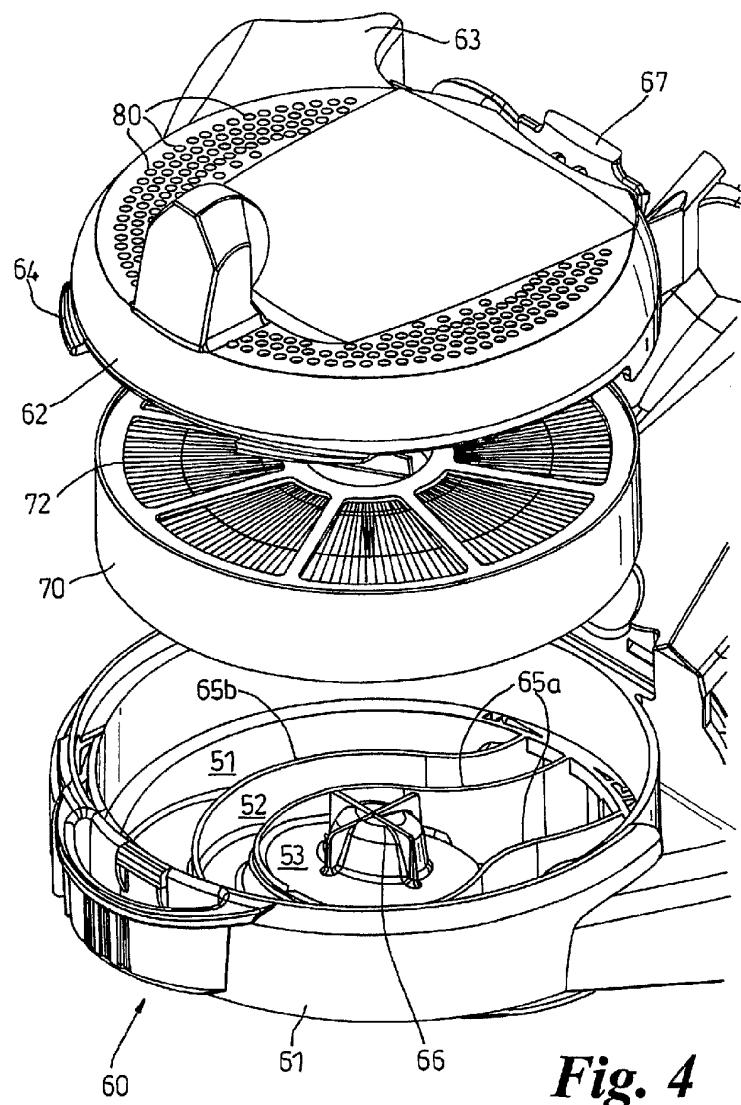

SUBSTITUTE SHEET (RULE 26)

5/7

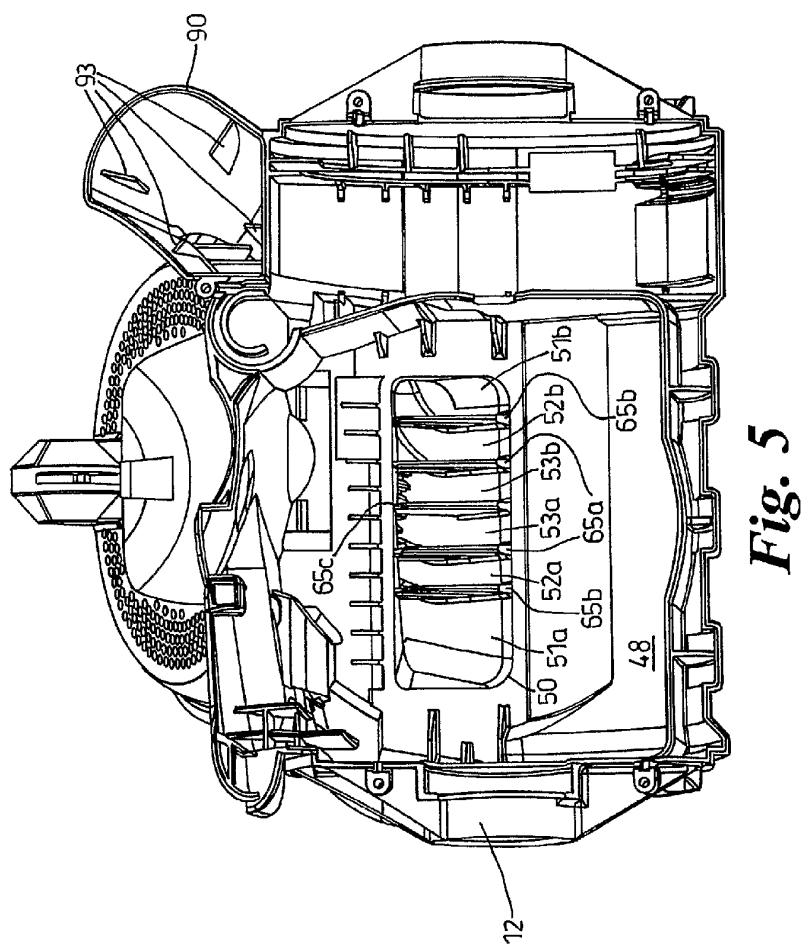

SUBSTITUTE SHEET (RULE 26)

6/7

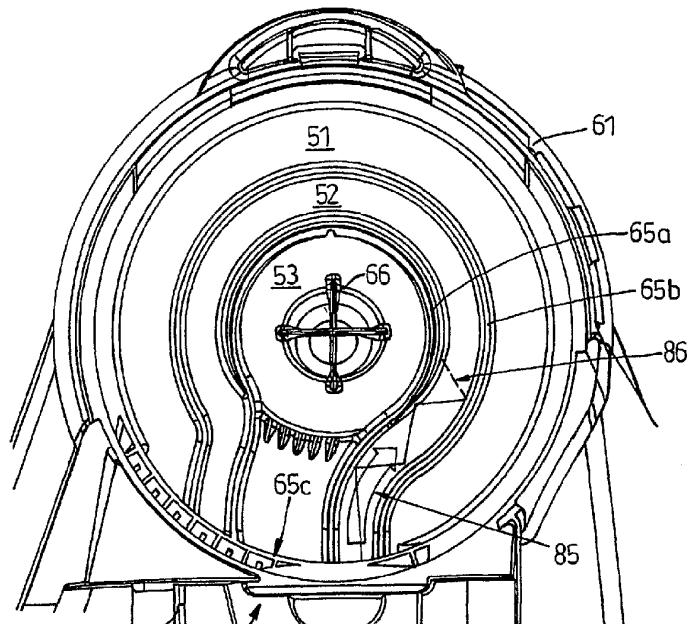


Fig. 6

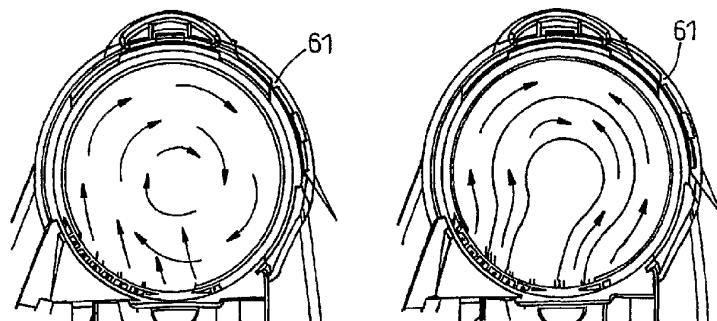


Fig. 7

Fig. 8

SUBSTITUTE SHEET (RULE 26)

7/7

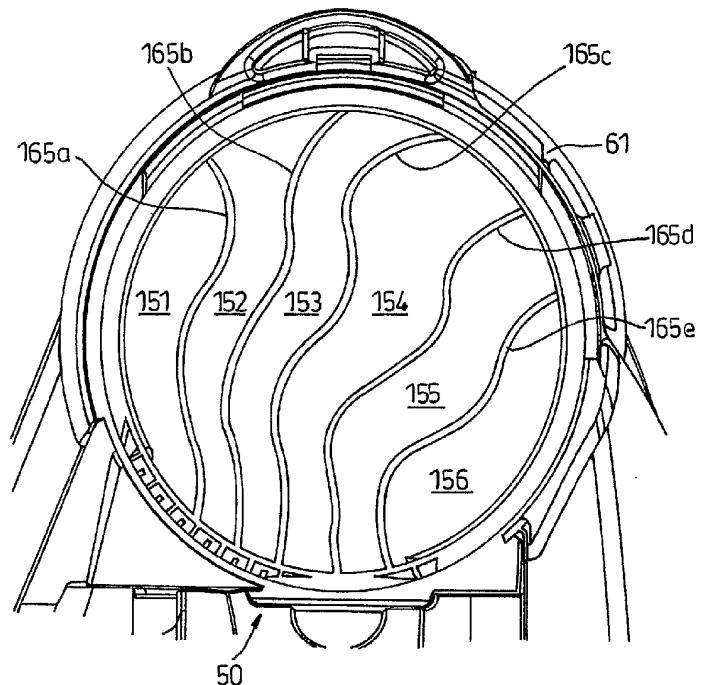


Fig. 11

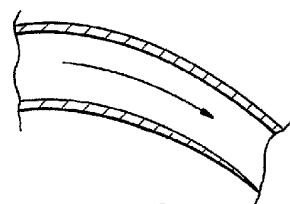


Fig. 9

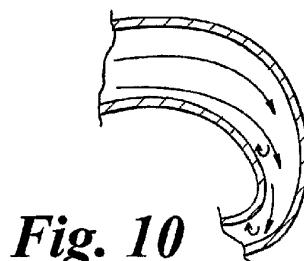


Fig. 10

SUBSTITUTE SHEET (RULE 26)