

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 October 2008 (16.10.2008)

PCT

(10) International Publication Number
WO 2008/123971 A1

(51) International Patent Classification:
C21C 7/00 (2006.01) **C21C 5/04** (2006.01)

(74) Agent: **JESSEN, Derek, S.**; Minerals Technologies Inc.,
1 Highland Avenue, Bethlehem, PA 18017 (US).

(21) International Application Number:
PCT/US2008/004222

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 1 April 2008 (01.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/731,969 2 April 2007 (02.04.2007) US

(71) Applicant (*for all designated States except US*): **SPECIALTY MINERALS (MICHIGAN) INC.** [US/US];
30600 Telegraph Road, Bingham Farms, MI 48025 (US).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **COLAVITO, Dominick, M.** [US/US]; 50 Beechwood Court, Bangor, PA 18013 (US). **DAMIANO, John** [US/US]; 1135E W. Lafayette Street, Easton, PA 18042 (US). **VERMEULEN, Yves, C.** [BE/US]; 807 Birch Avenue, Pen Argyl, PA 18072 (US).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: WIRE INJECTION LANCE NOZZLE INSERT

FIG. 3

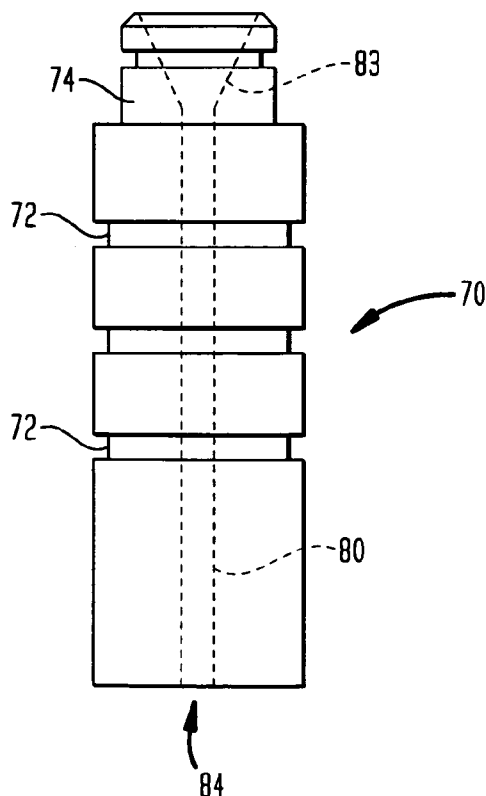

(57) Abstract: A lance nozzle insert for a refractory lance for feeding an additive wire into a quantity of molten metal below the surface of the molten metal surface is made of a material comprising stabilized zirconium oxide and graphite substantially increasing the corrosion resistance of the lance nozzle insert.

WO 2008/123971 A1



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

WIRE INJECTION LANCE NOZZLE INSERT

FIELD OF THE INVENTION

[0001] The present invention relates to methods and apparatus for metal production.

BACKGROUND

[0002] In the production of steel, a ferrous melt is typically produced in a suitable furnace and then tapped into a ladle where it is treated with one or more ingredients for refining or alloying purposes. It is well known to add calcium to the molten ferrous material at this point as a refining agent for oxide inclusion flotation, oxide inclusion morphology modification, desulfurization, etc. Unfortunately, the low density (relative to steel), volatility and reactivity of calcium severely complicate the task of providing a satisfactory process for its addition to the molten material in the ladle.

[0003] A variety of techniques have been employed for the addition of calcium to the molten material in a steelmaking ladle. Bulk addition of calcium-containing particulate materials is unsatisfactory because these materials rapidly rise to the surface of the melt without spending a sufficient residence time therein. Efforts to increase residence time by pouring the particulate material directly into the tapping stream from the furnace give rise to excessive reaction of the calcium with atmospheric oxygen. Introductions of calcium-containing materials by plunging or the injection of clad projectiles into the melt generally provide adequate residence times but are complicated, expensive and time-consuming procedures. It has also been proposed to inject calcium-containing powders into a melt by inert gas injection through a refractory lance. Since sizable flows of gas are required to propel the powder into the molten ferrous material, a high level of turbulence is generated at the surface of the melt as the gas is released, thereby causing an excessive exposure of the molten ferrous material to oxygen and nitrogen in the atmosphere. Furthermore, after leaving the lance, the calcium tends to rise rapidly through the melt in the inert gas plume surrounding the lance or in upwelling molten material adjacent the plume. Thus, calcium residence time in the bath is unacceptably low.

[0004] In an attempt to overcome the above-mentioned problems, calcium has also been added to melts in steelmaking ladles in the form of a calcium metal-containing wire (clad or unclad) continuously fed through the upper surface of the melt. A major advantage of wire feeding is that large flows of gas are not needed, as in powder injection, to propel the calcium-containing material into the molten ferrous material. However, the high volatility of calcium hinders the attainment of an efficient utilization of the calcium added in surface wire feeding. If the wire does not penetrate to a sufficient depth below the surface before the calcium in the wire desolidifies, a low residence time and poor recovery of the calcium results along with a non-uniform treatment of the melt. It is particularly important that most or all of the input calcium remain unreacted until it descends below the depth at which the ferrostatic pressure is equal to the vapor pressure of calcium. This goal is difficult to achieve, even when a clad calcium metal-containing wire is employed. When calcium desolidifies at ferrostatic pressures lower than its vapor pressure, large calcium gas bubbles are formed that rise rapidly to the surface of the melt. The result is an inefficient, non-uniform treatment of the molten ferrous material and the generation of a large amount of turbulence at the surface of the melt.

[0005] United States patent No. 4,512,800, assigned to the applicant, discloses an apparatus and method for treating molten ferrous material with processing additives in wire form such as calcium containing wires directly into a quantity of molten material using a heat-resistant lance having an outlet disposable beneath the surface of the molten material. In such a lance apparatus, the wire is fed into a passage going through the lance and an inert gas is concurrently injected into the passage together with the wire to prevent clogging of the lance by solidification of molten material while agitating the molten material by gas bubble agitation.

[0006] The use of the lance allows the calcium wire to melt and react with the molten ferrous material at a depth below the surface of the molten bath at which the ferrostatic pressure is greater than the vapor pressure of calcium at the temperature of the molten ferrous material. Because of the buoyancy of the wire, resulting from its lower density than that of the melt, the calcium wire bends.

[0007] The desolidification of calcium at a ferrostatic pressure greater than its vapor pressure leads to the creation by melting of liquid calcium globules, which rise much more slowly through the melt (thus providing a much higher residence time) than

do calcium gas bubbles. As these liquid globules slowly rise through the molten ferrous material, those that do not react with inclusions are eventually transformed into a very large number of small gas bubbles that do not generate excessive turbulence when they reach the surface of the melt. Furthermore, the lance is generally positioned such that these liquid calcium globules rise through a region of downwelling of the ferrous molten material to promote efficient utilization of the calcium additive.

SUMMARY

[0008] According to an embodiment, a lance nozzle insert for a refractory lance for feeding an additive wire into a quantity of molten metal below the surface of the molten metal surface is disclosed. The lance nozzle insert comprises an inlet and an outlet, a passage provided between the inlet and the outlet for the additive wire being fed through the lance. The lance nozzle insert is made of a material comprising stabilized zirconium oxide, graphite and resin. The graphite can be natural graphite or synthetic graphite but natural flake graphite is preferred.

[0009] According to another embodiment, a lance for feeding or injecting an additive wire into a quantity of molten metal below the molten metal surface is disclosed. The lance comprises a refractory casing having a conduit providing a passage therein for conveying the wire to an outlet through which the wire exits the lance. The outlet is provided at the end of the lance that gets immersed below the surface of the molten metal. A lance nozzle insert is provided within the refractory casing in communication with the conduit and forming the outlet. The lance nozzle insert is made of a material comprising stabilized zirconium oxide, graphite and resin. The graphite can be natural graphite or synthetic graphite but natural flake graphite is preferred.

[0010] Because the nozzle tip end of the lance is immersed in the molten metal for a substantial lengths of time while the molten metal is being treated, the lance nozzle insert is exposed to the harsh conditions imposed by the molten metal. The stabilized zirconium oxide and graphite composition provide much better temperature and corrosion resistance than pure carbon that is currently used in lance injection and improves the durability of the lance nozzle insert in this harsh environment. The result is that the lance nozzle insert of the present invention has substantially longer operational life than the conventional lance nozzle inserts.

[0011] The refractory casing of the lance can be formed in two pieces, a main portion and a lance tip portion. In that configuration, the main portion contains a main portion of the conduit and the lance tip portion contains a second portion of the conduit and the lance nozzle insert. The main portion and the second portion of the conduit are configured and adapted to removably engage one another so that the lance tip portion can be removed from the main portion of the lance if necessary. This would allow the lance tip portion to be replaced with a new one should the lance nozzle insert become too worn out either from the corrosive effects of the molten metal environment or the mechanical wear from the additive wire passing through the lance nozzle insert.

[0012] The various embodiments of the invention will be described with the aid of the following drawings, in which, like reference numbers represent like elements.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIG. 1 is a perspective representation of a lance apparatus used for treatment of a quantity molten metal with additives in the form of a wire.

[0014] FIG. 2 is a perspective, partially cut-away, view of the lance of FIG. 1.

[0015] FIG. 3 is a side view of a lance nozzle insert provided in the lance of FIGS. 1 and 2.

[0016] FIG. 4 is a cross-sectional view of the outlet end of the lance of FIG. 3 taken along line 3-3.

[0017] FIG. 5 is a cross-sectional view of the outlet end of another embodiment of the lance of FIG. 1.

[0018] All drawings are schematic illustrations and the structures rendered therein are not intended to be in scale. It should be understood that the invention is not limited to the precise arrangements and instrumentalities shown, but is limited only by the scope of the claims.

DETAILED DESCRIPTION OF THE INVENTION

[0019] FIG. 1 shows a general view of a wire injection lance apparatus for treating a molten metal product using one or more processing elements provided in the form of a wire **20**. A typical application for such apparatus is treating ferrous molten metal in a ladle with calcium containing wire. The wire **20** is conveyed from a reel **22** to the quantity of molten metal **56** in receptacle **52** (e.g. a ladle of ferrous molten metal). In order to accomplish such feeding, a feeding mechanism **24** draws the wire from the reel **22** and conveys the wire along a feed path. Adjacent the output portion, especially in the vicinity of a refractory lance **60**, the wire **20** is carried in a gas-tight conduit **44**. An inert gas is supplied to the gas-tight conduit, and a seal mechanism **30** located immediately upstream of the inert gas input prevents loss of inert gas around wire **20** in a direction backwards along the feed path. The conduit **44** extends into the lance **60** providing a passageway for the wire **20** through the lance **60**.

[0020] A detailed description of a suitable wire feed mechanism **24** can be obtained from U.S. patent No. 4,235,362, the disclosure of which is incorporated herein by reference. A wide range of wire sizes and compositions are possible, including both sheathed and unsheathed wires. The wires, such as calcium containing wires, used for treating molten metals are generally of a dimension and composition that results in fairly stiff wire. Accordingly, the feed mechanism as well as the wire-carrying members must be capable of withstanding rough wear. Moreover, it should be expected that during feeding the relatively stiff wire will be prone to a certain amount of vibration and transverse displacement because of various discontinuities along the wire feed path and also because of bumps and bends that may be present in the wire.

[0021] The lance **60** shown in detail in FIG. 2, according to an embodiment comprises a refractory ceramic casing **62** surrounding a conduit **78**. The refractory casing portions **62** may be made of alumina silica refractory or any other suitable refractory material such as those used to line kilns and the like. The conduit **78** provides a passage **86** through which the wire **20** is conveyed and exit through an outlet **84**. The outlet **84** is formed by a lance nozzle insert **70**. The lance nozzle insert **70** has a passage **80** extending longitudinally therethrough and extends the passage **86** of the conduit **78** to the outlet **84**.

[0022] FIG. 3 shows a detailed plan view of the lance nozzle insert **70** according to an embodiment. The lance nozzle insert **70** has a generally elongated shape with the passage **80** extending longitudinally therethrough for conveying the wire **20**. The embodiment of the lance nozzle insert **70** as illustrated has a generally cylindrical outer shape but the insert does not need to be limited to such shape. For example, the lance nozzle insert may have a four-sided elongated shape or any other shape that is suitable for manufacture as long as it has the passage **80** therethrough for conveying the wire **20**. One end of the passage **80** is the outlet **84** where the wire **20** exits into the molten metal. The opposite end of the lance nozzle insert **70** is configured and adapted to engage with the conduit **78**. For example, in this example, the lance nozzle insert **70** is provided with a neck portion **74** at the inlet end which has a smaller outer diameter than the rest of the nozzle insert **70** for engaging into a recess **77** (shown in FIG. 4) of the conduit **78**. The inlet **83** of the passage **80** flares out providing a funnel-shaped inlet. This enlarged opening enables the wire **20** to advance smoothly without kinks or jamming as the wire is transitioned from the conduit **78** portion to the lance nozzle insert **70**. This is especially helpful at the initial feed of the wire **20** through the lance **60**.

[0023] Referring to FIG. 4, a detailed cross-sectional view of the lance **60** of FIG. 2 taken through the line 3-3 will be discussed. The lance nozzle insert **70** and the conduit **78** are configured and adapted to engage one another in a suitable manner. For example, in the illustrated embodiment, the lance nozzle insert **70** has a neck portion **74** that engages the conduit **78** by fitting into the recess **77** provided at the end of the conduit **78**. The lance nozzle insert **70** and the conduit **78** would be assembled together before they are encased in the refractory casing **62**. Thus, the passage **86** of the conduit **78** and the passage **80** of the lance nozzle insert **70** provides a continuous passage way for the wire **20**. The wire **20** advances in the direction of the arrow **A** shown. The diameter of the passage **80** in the lance nozzle insert **70** is generally much closer to the diameter of the wire **20** and smaller than the diameter of the passage **86** of the conduit **78**. This arrangement in conjunction with the positive pressure of the inert gas being pumped through the conduit **78** prevents any of the molten metal from entering the passage **80** which could clog the lance.

[0024] The outer surface of the lance nozzle insert **70** is preferably provided with some contouring surface structure to promote mechanical locking of the nozzle insert

with the refractory casing **62** surrounding the nozzle insert. In this embodiment, the lance nozzle insert **70** is provided with recessed channels **72** on the outer surface. The lance **60** is formed by casting or molding the refractory material around the conduit **78** and the lance nozzle insert **70** and the contoured surface of the lance nozzle insert **70** ensures that the nozzle tip is held securely within the refractory casing **62** by mechanical locking.

[0025] Now referring to FIG. 5, another embodiment of the lance **60a** is shown. In this embodiment, the lance **60a** is provided in two pieces, a main portion **66** and a nozzle portion **68**. The nozzle portion **68** has the lance nozzle insert **70** and a first conduit portion **78a** provided therein and the main portion **66** has a second conduit portion **78b** provided therein.

[0026] The lance nozzle insert **70** forms the outlet **84** at the terminal end of the nozzle portion **68** while the first conduit portion **78a** forms an inlet end of the nozzle portion **68** that removably engages the main portion **66**. The first conduit portion **78a** is configured and adapted to engage the lance nozzle insert **70** at one end and configured and adapted to removably engage the second conduit portion **78b** at the other end. The second conduit portion **78b** is configured and adapted to engage the first conduit portion **78a**. For example, the first conduit portion **78a** may be provided with an extending threaded neck **79a** and the second conduit portion **78b** may be provided with a recessed portion **79b** that is threaded to mate with the threaded neck **79a**. Thus, the nozzle portion **68** and the main portion **66** of the lance are assembled together by threading the first conduit portion **78a** and the second conduit portion **78b** together. The first and second conduit portions **78a**, **78b** are preferably centered within the nozzle portion **68** and the main portion **66**, respectively, as shown in FIG. 5 so that when the two lance portions are assembled together, they form a unitary lance nozzle **60a**. The first and second conduit portions **78a** and **78b** form a passage **86** for the wire **20**. This embodiment is useful where the lance nozzle insert **70** is exposed to a very corrosive environment and/or a lot of mechanical abrasion from the wire **20** which requires replacement of the lance nozzle insert **70** and or thermal shock of the refractory casing **62** due to subsequent steel dipping. In such situations, only the nozzle portion **68** of the lance **60a** needs to be replaced rather than replacing the whole lance. This provides the user with much more economical technology.

[0027] The overall lance nozzle 60 is made long enough to extend to a preselected depth in the reservoir of molten metal. It is usually preferred that the wire additive be discharged from the nozzle about 2 to 8 feet below the slag/metal interface. Accordingly, with due regard to the high temperature and corrosive nature of the slag and metal, the refractory casing 62 is generally on the order of about 10 to 15 feet long.

[0028] The lance nozzle 60 may be raised and lowered with respect to the metal receptacle 52, or vice versa, by means of appropriate mechanical linkages. As shown schematically in FIG. 1, the metal receptacle 52 may be carried by a winch/conveying system, including yoke assembly 48. Alternatively, it may be preferable to raise and lower the entire feed mechanism as a unit. In any event, it is beneficial to avoid flexing the conduit 44.

[0029] In order to add the wire additive to the molten metal 56 at a point well below the surface of molten metal, it is necessary to overcome substantial fluid pressure in the molten metal. The fluid pressure is, of course, a function of the depth below the surface of molten metal. The particular pressure will depend upon the particular metal, but will usually be quite substantial at a depth of one or two meters. The pressure of inert gas supplied must overcome this fluid pressure in order to prevent molten metal 56 from rising in the nozzle. Should any molten metal be permitted to run into the nozzle, the wire 20 can immediately be seized and welded to a conduit wall as the molten metal solidifies.

[0030] According to an embodiment, to improve the useable life, i.e. the durability, of the lance nozzle insert 70, the lance nozzle insert is made from a new material that has higher oxidation resistance and slag corrosion resistance and at the same time still has a low friction surface to help feed the calcium wire through the lance nozzle insert at high speed. Higher resistance to oxidation and slag corrosion provides much longer useable life for the lance nozzle insert and thus necessitating much less frequent replacement of the nozzle insert during the life of the lance or may not even require any replacement.

[0031] The new material for the lance nozzle insert comprises stabilized zirconium oxide (ZrO_2), graphite and resin binder for holding the material together. The material comprises about 60 to 85 wt. percent of ZrO_2 , about 10 to 36 wt. percent graphite and about 4 to 15 wt. percent resin binder. The material preferably comprises about 67 to 77 wt. percent of ZrO_2 , about 19 to 29 wt. percent graphite and about 4 to 8

wt. percent resin binder. The ZrO_2 grains in the nozzle tip provide high corrosion resistance against the ladle slag in the ferrous molten metal. But ZrO_2 needs to be stabilized to avoid thermal spalling, caused by phase transformations due to subsequent thermal cycling. ZrO_2 can be stabilized with several oxides: CaO , MgO , Y_2O_3 , or CeO . Typical ladle slag contains elevated lime concentrations and under these conditions, CaO is the preferred stabilizer because it is the thermodynamically most stable form of stabilized ZrO_2 for such environment.

[0032] The presence of graphite in combination with ZrO_2 in the new material increases the thermal shock resistance of the lance nozzle insert. The graphite component can be natural graphite or synthetic graphite. However, natural flake graphite (amorphous graphite being other common form of natural graphite) is preferred because of natural flake graphite's high oxidation resistance, which increases the nozzle insert's oxidation resistance properties. The corrosion resistance of the ZrO_2 /graphite blend is significantly higher compared to the current lance nozzle inserts which are made from pure carbon.

[0033] Because ZrO_2 grains are very hard and have sharp edges, a fine grain size distribution (-325 Mesh, i.e. less than $44\text{ }\mu\text{m}$ particle size) is preferred to minimize mechanical friction and wear properties of ZrO_2 . If the grain size distribution is not controlled to such fine size, excessive mechanical wear at the inner bore of the lance nozzle insert 70 may be observed from the wire feeding through the nozzle insert, which would shorten the life of the lance nozzle insert.

[0034] The fabrication process for the lance nozzle insert involves blending ZrO_2 powder and graphite. Then, resin binder in the amount specified above is added to the blend to form a plastic mixture, hereafter referred to as a slurry. The resin binder is preferably a thermosetting binder material that is added in a combination of liquid and solid powder form. Both the powder and the liquid resins are phenol-formaldehyde polymer resin. The powder resin can be classified as novolak while the liquid resin can be classified as resole. The powder resin and liquid resin is provided in a powder/liquid wt. percent ratio of about 60/40 to about 40/60 and preferably about 50/50. The slurry is continuously mixed until the temperature of the slurry reaches $140\text{ }^\circ\text{F}$. The temperature of the slurry rises during the mixing process because of the internal friction of the slurry material from the mechanical mixing action. At this stage, the blended slurry comprises

globules of the mixed material bound by the liquid resin. Generally, because the amount of liquid resin added to enable homogeneous blending of the material is more than optimal for the next molding step, the slurry is then dried in a rotating furnace. The drying step is engineered in terms of the temperature and time duration to produce a slurry having the desired moisture content for the molding step. The dried slurry is then molded into a desired shape for the lance nozzle insert and thermally treated.

[0035] One of the advantages of using organic resin over water to form the slurry is that water will evaporate during subsequent thermal processing steps leaving behind pores and resulting in unacceptably high porosity in the lance nozzle insert **70**. On the other hand, organic resin gets partially burned off during subsequent thermal processing steps and leaves behind carbon residue. This residual carbon material promotes lower porosity and enhances the properties of the nozzle insert. Higher porosity is not desired because pores promote the corrosion mechanism that attacks the nozzle insert when immersed in the molten metal.

[0036] Pure zirconia, although having better corrosion resistance than pure carbon, currently used for lance nozzle insert, is not suitable because of its poor thermal shock resistance attributable to its monoclinic tetragonal crystal structure. Stabilized ZrO_2 , however, having a cubic crystal structure has better thermal shock resistance and, thus, is better suited for lance nozzle insert application. Both the thermal shock resistance and the surface abrasion (i.e. friction) properties are further improved by blending the ZrO_2 with graphite resulting in more durable lance nozzle inserts. Test results show about 2 to 20 times improvement in the useable life of the ZrO_2 -based lance nozzle inserts compared to the lance nozzle inserts made from conventional pure carbon.

[0037] The molding process for forming the pre-dried slurry into the lance nozzle insert can be any one of a variety of molding processes available that would work for this particular blend of material and the final shape of the insert. An example of such molding process is isostatic molding. Isostatic molding is a process where molding pressures are applied evenly in all directions around the part being made, unlike in compression molding which has pressure applied in only one direction. An isostatically molded part is made to near net shape and thus significantly less waste material is generated compared to other molding techniques. Isostatically molded parts generally have highly consistent material properties. Isostatic molding applies the pressure on the

mold by placing the mold inside a high pressure vessel filled with hydraulic fluid. The hydraulic pressure of 5,000 to 20,000 psi and even higher may be used. Such high isostatic pressure produces lower porosity and more favorable pore size distribution of the molded part.

[0038] Next, the isostatically molded lance nozzle insert is cured at about 180°C to volatilize the organic vapors from the polymer resin. Then, the lance nozzle insert is fired preferably at about 800 to 1200°C in reducing atmosphere. If necessary, the lance nozzle insert may be further machined to print dimensions.

[0039] As the wire 20 is fed, it can be expected to vibrate and rattle around the allowed space within the passage 80. However, the wire generally remains centrally positioned in the discharge passage 80 even if resting against a side wall of the passage 80. The space which is left open between the wire 20 and the side wall of the passage 80 is small enough that the gas pressure overcomes the fluid pressure of displaced molten metal, otherwise tending to flow up the nozzle. Interactive movement of the wire and the inert gas enhance the ability of the nozzle to resist clogging.

[0040] The seal mechanism 30 is provided in the wire feeding system to prevent a backwash of inert gas. Seal mechanism 30 comprises a housing having at least one pair of opposed pistons 32 having contoured sealing surfaces for slidably engaging the wire moving therebetween, which clasp the advancing additive wire 20 in a gas-tight fashion. Downstream of the opposed pistons 32, the inert gas is fed from inert gas source 31 via conduit 33 to the area of the wire 20, the wire now being enclosed in a gas-tight conduit 44 leading from seal 30 to the lance 60. A compressed air source 34 is preferably used to drive opposed pistons 32 against the wire 20. Spring biasing, hydraulic pressure or the like are also possible. A manifold 36 may be used to equally distribute the air pressure of compressor 34 or other source. The particulars of the seal mechanism 30 are disclosed in U.S. patent No. 4,512,800, assigned to the applicant, the disclosure of which is incorporated herein by reference.

[0041] A suitable control mechanism may be connected simultaneously to the pinch roller wire feed device 24 and to the inert gas pressure control 42. To avoid waste, the gas control 42 should be left closed until the wire becomes engaged by opposed pistons 32 of seal 30. In any event, no particular gas pressure is required until the wire injector lance 60 is brought into proximity with the molten metal 56, or the slag 54

thereupon. At this point, the feeder and inert gas pressure control may be simultaneously activated, and the nozzle plunged into the molten metal. Melting additive and inert gas are discharged at the nozzle orifice, well below the slag/metal interface.

[0042] The essential features of the invention having been disclosed, further variations will now become apparent to persons skilled in the art. All such variations are considered to be within the scope of the appended claims. Reference should be made to the appended claims, rather than the foregoing specification, as indicating the true scope of the subject invention.

What is claimed is:

1. A lance nozzle insert for a refractory lance for feeding an additive wire into a quantity of molten metal below the surface of the molten metal, the lance nozzle insert comprising:
 - an inlet and an outlet; and
 - a passage provided between the inlet and the outlet for the additive wire being fed through the lance, wherein the lance nozzle insert is made of a material comprising stabilized zirconium oxide and graphite.
2. The lance nozzle insert of claim 1, wherein the graphite is natural graphite.
3. The lance nozzle insert of claim 2, wherein the graphite is natural flake graphite.
4. The lance nozzle insert of claim 1, wherein the graphite is synthetic graphite.
5. The lance nozzle insert of claim 1, wherein the material for the lance nozzle insert further comprises a thermosetting resin binder.
6. The lance nozzle insert of claim 1, wherein the material for the lance nozzle insert comprises about 60 to 85 wt. percent stabilized zirconium oxide and about 10 to 36 wt. percent graphite.
7. The lance nozzle insert of claim 5, wherein the material for the lance nozzle insert comprises about 60 to 85 wt. percent stabilized zirconium oxide, about 10 to 36 wt. percent graphite and about 4 to 15 wt. percent thermosetting resin binder.
8. The lance nozzle insert of claim 5, wherein the material for the lance nozzle insert comprises about 67 to 77 wt. percent stabilized zirconium oxide, about 19 to 29 wt. percent graphite and about 4 to 8 wt. percent thermosetting resin binder.
9. The lance nozzle insert of claim 1, wherein the zirconium oxide is stabilized with an oxide selected from the group consisting of CaO, MgO, Y₂O₃, and CeO.

10. A lance for feeding an additive wire into a quantity of molten metal below the surface of the molten metal, the lance comprising:
- a refractory casing having an outlet;
 - a conduit located within the refractory casing providing a passage for conveying the wire to the outlet; and
 - a lance nozzle insert provided within the refractory casing in communication with the conduit and forming the outlet, wherein the lance nozzle insert is made from material comprising stabilized zirconium oxide and graphite.
11. The lance of claim 10, wherein the graphite is natural graphite.
12. The lance of claim 11, wherein the graphite is natural flake graphite.
13. The lance of claim 10, wherein the graphite is synthetic graphite.
14. The lance of claim 10, wherein the material for the lance nozzle insert further comprises a thermosetting resin binder.
15. The lance of claim 10, wherein the material for the lance nozzle insert comprises about 60 to 85 wt. percent stabilized zirconium oxide and about 10 to 36 wt. percent graphite.
16. The lance of claim 14, wherein the material for the lance nozzle insert comprises about 60 to 85 wt. percent stabilized zirconium oxide, about 10 to 36 wt. percent graphite and about 4 to 15 wt. percent thermosetting resin binder.
17. The lance of claim 14, wherein the material for the lance nozzle insert comprises about 67 to 77 wt. percent stabilized zirconium oxide, about 19 to 29 wt. percent graphite and about 4 to 8 wt. percent thermosetting resin binder.
18. The lance of claim 10, wherein the zirconium oxide is stabilized with an oxide selected from the group consisting of CaO, MgO, Y₂O₃, and CeO.

19. The lance of claim 10, wherein the refractory casing comprises:
a nozzle portion having the lance nozzle insert and a first portion of the conduit provided therein; and
a main portion having a second portion of the conduit provided therein, wherein the first and second portions of the conduit engage to form the passage for conveying the wire to the outlet.
20. The lance of claim 19, wherein the main portion and the nozzle portion are adapted and configured to removably engage each other allowing the nozzle portion to be replaced.
21. The lance of claim 20, wherein the first and second conduit portions are provided with mating threads and the main portion and the nozzle portion of the refractory casing threadably engage each other by operation of the mating threads.
22. A method of making the lance nozzle insert of claim 1 wherein the lance nozzle insert is made by molding.
23. A method of making the lance nozzle insert of claim 1 wherein the lance nozzle insert is made by isostatic molding.

FIG. 1

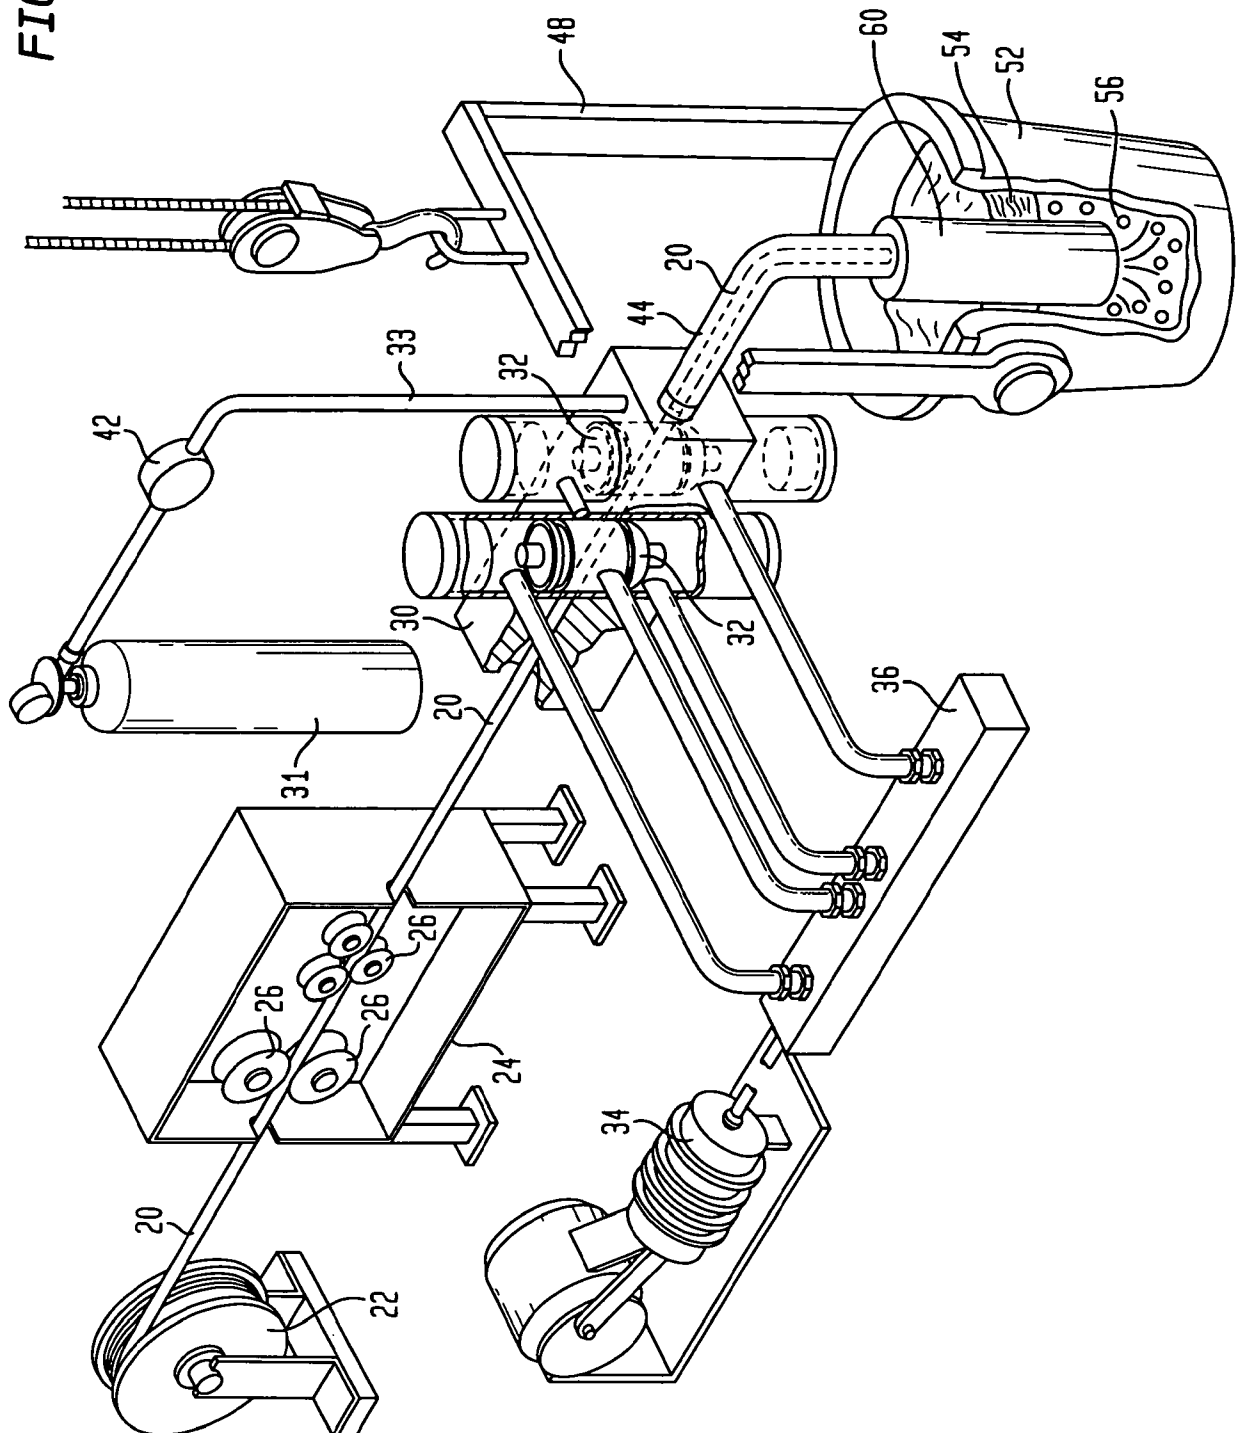


FIG. 2

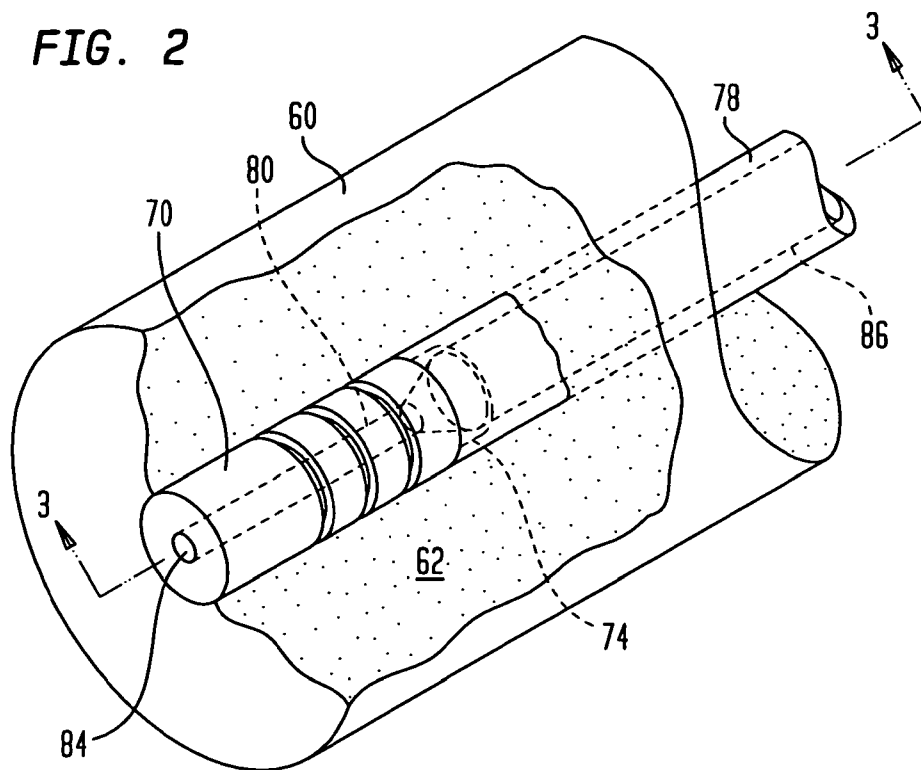


FIG. 3

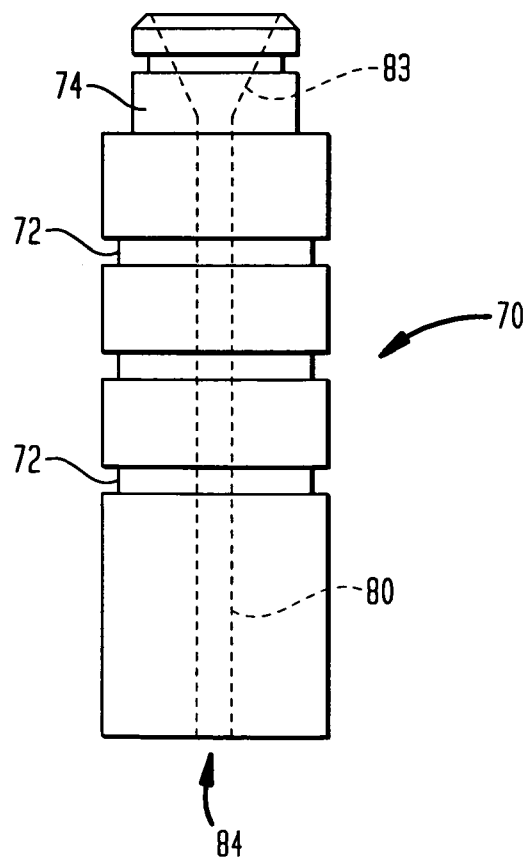


FIG. 4


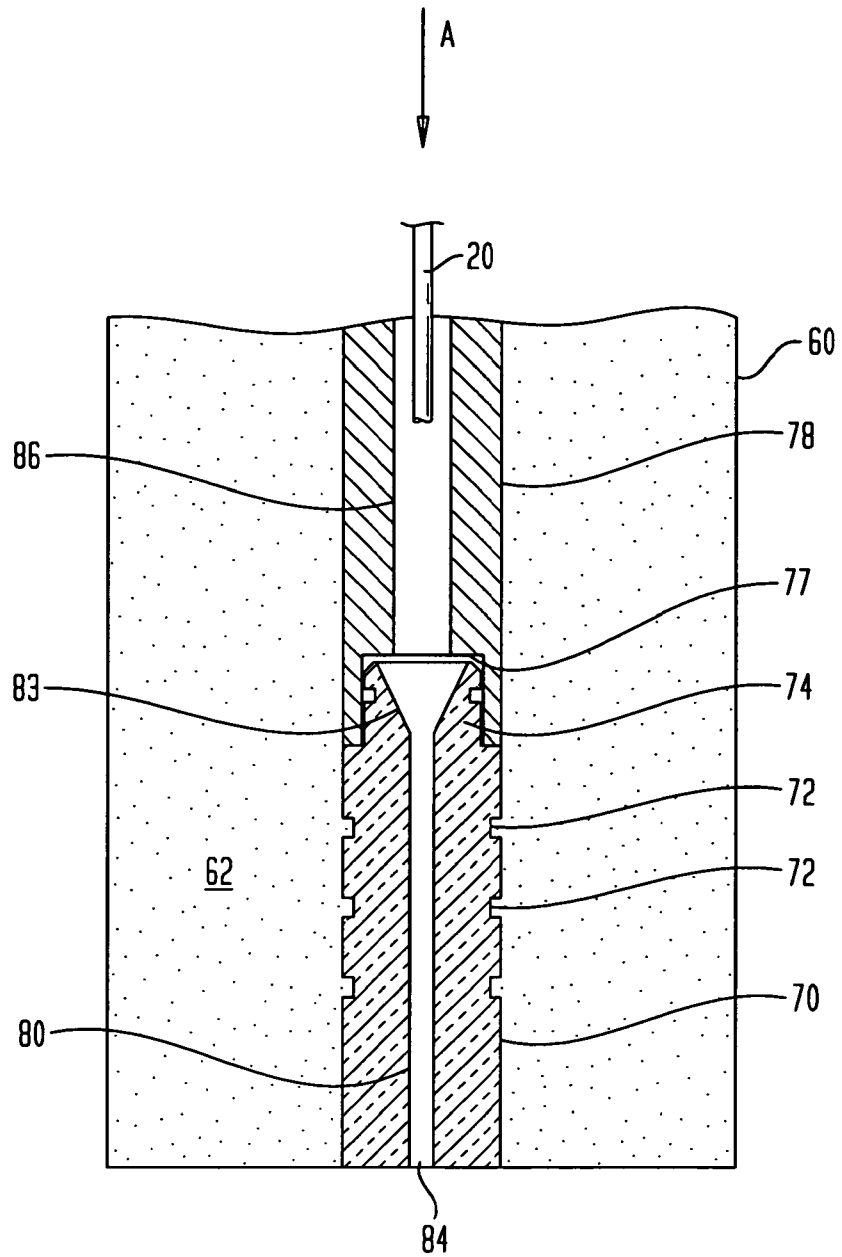


FIG. 5

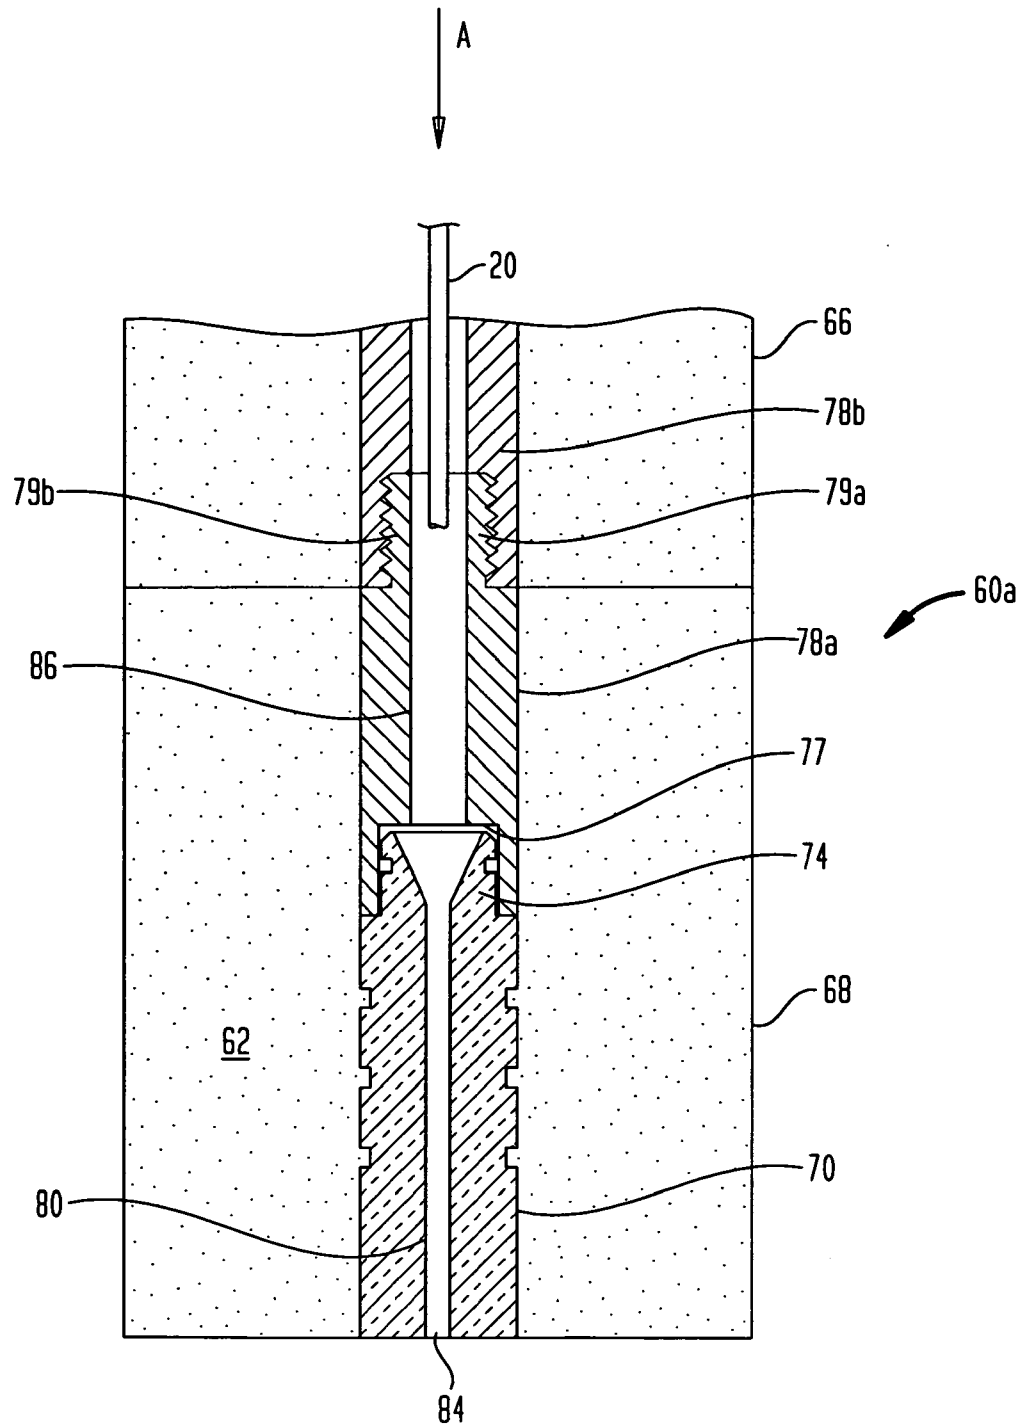

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 08/04222

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - C21C 7/00, 5/04 (2008.04)

USPC - 266/216; 75/526

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - C21C 7/00, 5/04 (2008.04)

USPC - 266/216; 75/526

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC - 266/216,226,915; 75/526,663; 164/311; 428/659; 427/433

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST, Google Patents Database, Google Scholar Database

(lance, nozzle, insert, refractory, molten, metal, inlet, outlet, zirconium oxide, graphite, natural, flake, synthetic, thermosetting, resin, binder, calcium, magnesium, yttrium, cerium, casing, isostatic, molding)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/0110202 A1 (Barrett, et al.) 26 May 2005 (26.05.2005) paragraphs 0033-0035, 0037, 0039, 0042, 0045-0046, 0048, 0053, 0063, 0065	1-2, 5-11, 14-22
Y		3-4, 12-13, 23
Y	US 4,895,713 A (Greinke, et al.) 23 Jan 1990 (23.01.1990) column 4, line 66-68, column 5, line 1-4	3-4, 12-13
Y	US 4,888,313 A (Adams, et al.) 19 Dec 1989 (19.12.1989) column 4, line 25-29	23

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 Jun 2008 (30.06.2008)

Date of mailing of the international search report

09 JUL 2008

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774