



(11) **EP 4 163 207 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

- (45) Date of publication and mention of the grant of the patent:
03.07.2024 Bulletin 2024/27

(21) Application number: **21202033.3**

(22) Date of filing: **11.10.2021**
- (51) International Patent Classification (IPC):
B64D 13/06 (2006.01)

(52) Cooperative Patent Classification (CPC):
B64D 13/06; B64D 2013/0662; Y02T 50/50

(54) **HUMIDIFICATION SYSTEM FOR AIRCRAFT**
BEFEUCHTUNGSSYSTEM FÜR FLUGZEUGE
SYSTÈME D'HUMIDIFICATION POUR AÉRONEF

- | | |
|--|---|
| <p>(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR</p> <p>(43) Date of publication of application:
12.04.2023 Bulletin 2023/15</p> <p>(73) Proprietor: CTT Systems AB
611 29 Nyköping (SE)</p> <p>(72) Inventors:
• Helin, Robert
61971 Vagnhärad (SE)</p> | <p>• Spång, Johan
61137 Nyköping (SE)</p> <p>(74) Representative: Groth & Co. KB
P.O. Box 6107
102 32 Stockholm (SE)</p> <p>(56) References cited:
EP-A1- 2 096 033 EP-A1- 3 401 220
US-A- 5 699 983</p> |
|--|---|

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The invention relates to the field of aircraft humidifier systems in particular aircraft humidifier systems that can be installed in cramped spaces and in existing environmental control systems (ECS) of aircrafts.

Background of the Invention

[0002] There is a need to provide humidifiers to existing aircrafts. A lot of commercial aircrafts that are currently in use are built without humidification systems for the AC air that is transported and provided to the cabin, crew space, cockpit and so on. The interest to install humidification systems in existing aircraft is however rather big and this poses certain technical challenges to such humidification systems. These technical challenges include limited space and high requirements regarding pressure issues, in particular pressure loss and pressure increase situations, in the ventilation systems of aircrafts.

[0003] In aircrafts the cabin air is typically supplied with some sort of supply air. The supply air can be a mixture of recycled cabin air and fresh outside air, alternatively the supply air consists of only fresh outside air. The supply air is normally conditioned and distributed via stems or ducts to cabin zones, the cockpit and/or crew resting areas. One can imagine that a possible solution to install a humidifier in an existing ventilation system in an aircraft could be to install a humidifier with high capacity, which would be comparably big in size, in the ventilation system, whereby this humidifier is positioned prior to any division of air streams, such as air streams to different cabin zones, cockpit and crew rest areas. An alternative to that solution would be to use a separate humidifier of smaller size in each partial air stream that goes to the consumers and thus the cabin, the cockpit or crew rest areas. As mentioned, in many cases there is however no space for one big humidifier nor several small humidifiers. Additionally, if many smaller humidifiers for each air streams are used, maintenance and economic concerns arise since many small humidifiers lead to challenges regarding faults over time and higher costs.

[0004] One potential solution could be to lead the air stream, prior to any distribution via partial air streams and ducts, through a comparably small humidifier, this would however result in a too high pressure drop and certainly lead to a humidification system and a ventilation system that is operating outside the technically acceptable boundaries, which can lead to problems in the ventilation system.

[0005] The prior art is illustrated by document EP 2 096 033 A1.

Summary of the Invention

[0006] In view of the above it is an object of the present

invention to provide a humidification system for aircrafts that is economic, energy saving and compact.

[0007] Another object is to provide a humidification system that can be installed in existing aircrafts and that can operate within the given technical boundaries of ventilation systems and/or environmental control systems (ECS) of aircrafts.

[0008] The inventors of the present invention have discovered that it is possible to take the given parameters such as space, pressure loss or increase and low energy use into account and provide a humidification system for aircrafts that can be installed in tight spaces in existing ECS of aircrafts. The basic concept the inventor discovered is to use one single humidifier in a partial air stream that goes to the consumer and over humidify this partial air stream and then re-distribute this over humidified partial air stream into chosen air streams that flow towards the consumer and at the same time normalize the humidity in the partial air stream by re-distributing air from other air streams that go to consumers and which other air streams comprise dry and warm air. The re-distribution is done prior to any air reaching the consumer. Such a humidification system solves the above-mentioned problems and shortcomings.

[0009] Disclosed herein is a humidification system for aircrafts comprising:

- a first duct configured to guide a first air stream;
- a second duct configured to guide a second air stream, said second duct comprising a humidifier for humidifying the air in the second duct;
- a first conduit for directing a part of the second air stream to the first duct thus interconnecting the second duct with the first duct, said first conduit comprising a first conduit inlet leading into the first duct and a first conduit outlet from the second duct, and
- a second conduit for directing a part of the first air stream to the second duct thus interconnecting the first duct with the second duct, said second conduit comprising a second conduit inlet leading into the second duct and a second conduit outlet from the first duct, wherein the first conduit outlet is arranged downstream of the humidifier, the second conduit inlet is arranged downstream of the first conduit outlet and wherein the first conduit inlet is arranged downstream the second conduit outlet.

[0010] Prior to reaching the humidifier the second duct may comprise a supply air stream and similarly prior to reaching the second conduit outlet, the first duct may comprise a supply air stream.

[0011] The humidification system according to the above embodiment can be installed in existing ECS (and new ECS) of aircrafts within the pre-described pressure loss or pressure increase boundaries without requiring substantial additional energy and within the available space in the aircraft body.

[0012] The humidification system according to the

above embodiment can further be scaled and also works for three duct, four ducts and so on whereby each of the ducts is designed to be guided towards a consumer space such as for example cockpit, cabin, galley and/or crew resting areas.

[0013] In a further embodiment the humidification system comprises an air supply duct configured to guide a dry supply air stream and a first two-way manifold connected to the air supply duct, the first duct and the second duct, whereby the air is configured to flow from the air supply duct into the two-way manifold and then partially into the first duct and the second duct forming the first air stream and the second air stream.

[0014] In an embodiment the humidifier of the humidification system is an adiabatic humidifier or preferably an adiabatic evaporation humidifier or even more preferably an adiabatic contact humidifier.

[0015] The adiabatic humidifier may comprise a contact humidifier pad that is kept wet via a water supply in order to humidify the second air stream.

[0016] An adiabatic humidifier does not require energy for providing humidity to the second air stream.

[0017] In an embodiment the two-way manifold may be configured to split the heated supply air stream at least more or less equally into the first air stream and the second air stream. Additionally, first conduit and the second conduit may be configured to split the second air stream and the first air stream at least more or less equally.

[0018] This may help to provide equal air quality to the entire cabin including cockpit and crew rest areas and lavatories.

[0019] In a further embodiment the humidification system may comprise a bypass or bypass duct configured to bypass the humidifier on the second duct.

[0020] Such a bypass may be used in order to ensure that there are no substantial pressure losses or pressure increases present. In addition, the bypass may comprise a restrictor that is fixedly installed to balance the air flow in the bypass. In an alternative embodiment the bypass may contain an electronically and potentially remotely controlled controlling element for adjusting the bypassing air according to a measured pressure.

[0021] The controlling element(s) disclosed herein may be a fan, a valve or a restrictor, said restrictor could thereby be a fixed or adjustable restrictor.

[0022] Any of the first and second duct or both or any of the first and second conduits may comprise restrictors to balance air flows. The restrictors may be fixedly installed restrictors or adjustable restrictors.

[0023] The restrictor(s) may be designed as plate-shaped, preferably circularly shaped platelike elements with holes through which the air stream can pass. Such restrictors may be installed in any of the conduits or the ducts. If the restrictors are adjustable the restrictors may be installed in the ducts or conduits pivotable so that they can be positioned from parallel to the air stream and up to 90 degrees to the air stream. Servomotors may be used to control the position of adjustable restrictors.

[0024] Any of the first and second duct or both or any of the first and second conduits may additionally comprise a pressure sensor that is connected to a controller, which controller then steers and regulates the valves in the humidification system, in particular the valve of the bypass.

[0025] In an embodiment first conduit and the second conduit may be arranged in one duct, whereby said one duct has a dividing wall to accommodate both conduits the first conduit and the second conduit.

[0026] This may increase space efficiency, ease installation and handling of the humidification system.

[0027] In another embodiment the humidifier may comprise a humidifying pad for humidifying the second air stream. The humidifying pad may be kept wet via a water supply pipe or the like.

[0028] The advantage of a humidifying pad is that no energy needs to be supplied to the humidifier and that bacteria and dirt is kept on the pad and does not enter the ECS of the aircraft.

[0029] In an embodiment the first air stream and the second air stream may comprise humidified air downstream the first conduit inlet and downstream the second conduit inlet, respectively.

[0030] Thus, the first duct and the second duct supply warm and humidified air into the cabin, cockpit or crew rest areas.

[0031] Further, the first duct and/or the second duct may comprise a heating element in order to adjust the temperature of the air supplied to the consumers prior to delivery. In the second duct the heating element may be arranged upstream the humidifier.

[0032] The humidification system according to any of the previous claims, wherein the first conduit and/or the second conduit comprises a controlling element.

[0033] In an embodiment the first duct and/or the second duct comprises a controlling element, for example in the form of valves or fans. Said valves may be centrally controlled and adjusted depending on pressure sensors arranged in the first and second duct respectively.

[0034] The first and/or the second duct may comprise pressure sensors in order to survey the pressure. The pressure sensors may be connected to a control unit or the like, which control unit is capable of steering the ECS.

[0035] In a further embodiment the first duct and the second duct may comprise mixing elements downstream the first conduit inlet and the second conduit inlet, respectively.

[0036] These mixing elements may ensure a good mixing of the humidified and none humidified air downstream the first conduit inlet on the first duct and downstream the second conduit inlet on the second duct.

[0037] The terms upstream and downstream used herein refer always to the present air flow direction in the duct or conduit considered. Downstream thereby means flowing along the air stream and upstream thereby means against the flow or flowing of the air stream.

[0038] The embodiments illustrated herein can be

combined and various features of one embodiment can be introduced in other embodiments. The features illustrated in one embodiment may be applied in another embodiment. None of the features are in particular excluded from being employed or implemented in another embodiment shown herein.

Brief Description of the Drawings

[0039] The present invention will now be described, for exemplary purposes, in more detail by way of an embodiment(s) and with reference to the enclosed drawings, in which:

Fig. 1 schematically illustrates a diagrammatic view of an embodiment of the invention; and

Fig. 2 schematically illustrates in a cross-sectional view of an embodiment of the invention.

Detailed Description

[0040] Figure 1 illustrates the general and basic concept of the humidification system 1 according to the invention. The humidification system 1 comprises an air supply duct 2, a two-way manifold 4, a first duct 6 and a second duct 10. The two-way manifold 4 is connected to the air supply duct 2, the first duct 6 and the second duct 10. A supply air stream comprising fresh outside air and recycled cabin air, which supply air stream is warm and dry, is divided in the two-way manifold 4 into a first air stream in the first duct 6 and a second air stream in the second duct 10. The first air stream and the second air stream may comprise similar or the same amount of air and thus air flow rate. This air flow rate(s) may however be adapted and changed depending on circumstances and on how many ducts and therewith how many spaces within the aircraft need to be served with humidified or treated air. The second duct 10 comprises a humidifier 28, which may be of the adiabatic type, said humidifier 28 having an inlet 42 and an outlet 44. The second air stream is over humidified in the humidifier 28 to a high level so that it can be re-distributed via a first conduit 8 having a first conduit inlet 22 connected to the second duct 10, said first conduit inlet 22 being located downstream the humidifier 22 on the second duct 10, to a first conduit outlet 20 connected to the first duct 6. In order to balance the air humidity in the second duct 10 a second conduit 12 is provided, said second conduit 12 comprising a second conduit outlet 36 connected to the first duct 6 and a second conduit inlet 34 connected to the second duct 10 downstream the first conduit outlet 22. The second conduit outlet 36 is located upstream the first conduit inlet 20. The second and first conduits 12, 8 are therewith capable to re-distribute dry warm air from the first duct 6 and cold over humidified air from the second duct 10 so that the air streams that are delivered to the consumers 48 are of equal quality, thus humidity and temperature.

[0041] The second duct 10 may comprise a bypass 30,

which bypass 30 allows a certain amount of the second air stream to bypass the humidifier 28. This bypass 30 is, in normal operation, closed but it can be opened in case there is a pressure loss somewhere in the second duct 10. As mentioned previously the bypass 30 may comprise a fixedly installed restrictor, which restrictor is adapted to balance the ventilation system. Such restrictors may be called passive restrictors herein.

[0042] Any of the ducts and/or conduits may comprise such passive restrictors.

[0043] Since the humidification system 1 is taking into account the operating parameters of the environmental control system (ECS) of the aircraft including but not limited to pressure requirements in the entire ventilation system the correct operation of the ECS is maintained. In order to further provide controlling instruments and surveillance tools, pressure sensors 18 and controlling elements 16 in the form of valves, fans or restrictors (fixed or adjustable), are provided at various positions in the humidification system 1. The pressure sensors 18 are optional and can be put where needed in order to survey the correct operation of the humidification system and the ECS. In case the pressure sensors 18 detected a pressure loss in the system the according controlling element 16 may be engaged and a valve may be further opened, or a fan speed may be increased. If a pressure increase is detected by any of the pressure sensors 18 the respective controlling element 16 may be restricted, thus a valve opening may be reduced, or a fan speed decreased.

[0044] The pressure sensors 18 may be positioned strategically in the humidification system 1, such as for example in the bypass 30, in the first duct 6 upstream the consumers 48 or in the second duct 10 upstream the consumers 48. Each pressure sensor 18 may be arranged together and therewith close to a controlling element 16. Controlling elements 16 may thus be arranged upstream the consumers 48 in the first and/or second ducts 6, 10. Likewise controlling elements 16 and pressure sensors 18 may be arranged in the first conduit 8 and/or the second conduit 12.

[0045] Again, the controlling elements 16 and the pressure sensors 18 are optional solutions of the invention and the humidification system 1 is designed to work without these elements. In addition, the bypass 30 is also an optional solution and is for instance not shown in figure 2.

[0046] The arrows in figure 1 illustrate the general flow direction of the air streams in figure 1.

[0047] Figure 2 shows another embodiment of the invention in a schematic cross-sectional view. The humidification system 1' of figure 2 is illustrated in a similar manner as figure 1 but without controlling elements and/or pressure sensors. The bypass 30' in figure 2 is arranged within the humidifier 28' and bypasses the actual humidification device or element, for example in the form of a humidification pad. In order to illustrate the bypass 30 and the fact that it is arranged within the humidifier 28' it is shown with dashed lines. The arrows in figure 2

illustrate the direction of the air flows in the embodiment of figure 2.

[0048] The embodiment illustrated in figure 2 shows the air supply duct 2' connected to the two-way manifold 4' which then separates the supply air stream into a first air stream in the first duct 6' and a second air stream in the second duct 10'. The first conduit 8' and the second conduit 12' is also well illustrated and again the sequence on the first duct 6' of the first conduit inlet 20' on the first duct 6', the second conduit outlet 36' on the first duct 6', arranged upstream the first conduit inlet 20' is well visible. Also, the sequence on the second duct 10' of the first conduit outlet 22' being arranged downstream the humidifier 28' and the second conduit inlet 34' being arranged downstream the first conduit outlet 22' is well visible and illustrated. These sequences are of importance to guarantee the functioning of the humidification system 1, 1'.

[0049] Figure 2 further illustrates a baffle element 50 arranged upstream the first conduit inlet 20' within the first duct 6' and a baffle element 50 arranged upstream the second conduit inlet 34' in the second duct 10'. The baffle elements 50 may be perforated plates or the like or other guiding elements that create turbulence in the air stream for an optimal mixing of the air stream once the dry and over humidified air streams have been combined.

[0050] In addition, figure 2 illustrates a controlling element 16' in the form of a passive restrictor arranged in the first duct 6' and the bypass 30'. The passive restrictor 16' comprises flat element, for example a disc with a hole in it, for example in the centre, which disc is arranged within the first duct 6' and/or the bypass 30'. As previously mentioned, the passive restrictor(s) may be placed at any suitable position within the humidification system 1', 1 also in the embodiment shown in figure 1. One or several or no restrictor may be arranged in the first and/or second duct 6, 6', 10, 10' and/or the first conduit 8, 8' and/or the second conduit 12, 12'. The amount and placement of the restrictors depends on system requirements and design.

[0051] The baffle elements 50 of the embodiment of figure 2 may also be installed in the embodiment of figure 1 and the controlling elements 16 and pressure sensors 18 illustrated in the embodiment of figure 1 may be fully or partially employed in the embodiment of figure 2. As previously stated, the controlling elements 16, 16' may be embodied as fans, valves or passive/active restrictors.

[0052] In any of the shown embodiments of figures 1 and 2 the first conduit 8, 8' and the second conduit 12, 12' may be combined in one air pipe or the like as long as the sequences of the first conduit inlet 20, 20' and second conduit outlet 36, 36' and first conduit outlet 22, 22' and second conduit inlet 34, 34' are respected.

[0053] Even though the embodiment of figures 1 and 2 are both shown comprising the two-way manifold 4, 4' and the air supply duct 2, 2', this two-way manifold 4, 4' and air supply duct 2, 2' may not be present and the

invention will still work or can still be employed. It could for instance be possible that the first and second ducts 6, 6', 10, 10' each comprise supply air streams taken from two different ports or packers of the aircraft. In that case the two-way manifold 4, 4' is not present and the first duct 6, 6' may comprise a supply air stream prior to reaching the humidifier 28, 28' or bypass 30, 30' and similarly, prior to reaching the second conduit outlet 36, 36' the first duct 6, 6' may comprise a supply air stream.

Claims

1. A humidification system (1) for aircrafts comprising:

- a first duct (6, 6') configured to guide a first air stream;
- a second duct (10, 10') configured to guide a second air stream, said second duct (10, 10') comprising a humidifier (28, 28') for humidifying the air in the second duct (10, 10'),

the humidification system further comprising:

- a first conduit (8, 8') for directing a part of the second air stream to the first duct (6, 6'), said first conduit (8, 8') comprising a first conduit inlet (20, 20') leading into the first duct (6, 6') and a first conduit outlet (22, 22') from the second duct (10, 10');
- a second conduit (12, 12') for directing a part of the first air stream to the second duct (10, 10'), said second conduit (12, 12') comprising a second conduit inlet (34, 34') leading into the second duct (10, 10') and a second conduit outlet (36, 36') from the first duct (6, 6'), wherein the first conduit outlet (22, 22') is arranged downstream of the humidifier (28, 28'),

characterized in that the second conduit inlet (34, 34') is arranged downstream of the first conduit outlet (22, 22') and wherein the first conduit inlet (20, 20') is arranged downstream the second conduit outlet (36, 36').

2. The humidification system according to claim 1, comprising an air supply duct (2, 2') configured to guide a supply air stream and a two-way manifold (4, 4') connected to the air supply duct (2, 2'), the first duct (6, 6') and the second duct (10, 10'), whereby the air is configured to flow from the air supply duct (2, 2') into the two-way manifold (4, 4') and then partially into the first duct (6, 6') and the second duct (10, 10') forming the first air stream and the second air stream,

3. The humidification system according to claim 1 or 2, wherein the humidifier (28, 28') is an adiabatic humidifier.

4. The humidification system according to any of the previous claims, further comprising a bypass (30, 30') configured to bypass the humidifier (28, 28') on the second duct (10, 10').
5. The humidification system according to claim 4, wherein the bypass (30) comprises a controlling element (16, 16').
6. The humidification system according to any of the previous claims wherein the first conduit (8, 8') and the second conduit (12, 12') are arranged in one duct or pipe.
7. The humidification system according to any of the previous claims, wherein the humidifier (28, 28') comprises a humidifying pad for humidifying the second air stream.
8. The humidification system according to any of the previous claims, wherein the first air stream and the second air stream comprise humidified air downstream the first conduit inlet (20, 20') and the second conduit inlet (34, 34'), respectively.
9. The humidification system according to any of the previous claims, wherein the first conduit (8, 8') and/or the second conduit (12, 12') comprises a controlling element (16, 16').
10. The humidification system according to any of the previous claims, wherein the first duct (6, 6') and/or the second duct (10, 10') comprises a controlling element (16, 16').
11. The humidification system according to any of the previous claims, wherein the first duct (6, 6') and the second duct (10, 10') comprise baffle elements (50) downstream the first conduit inlet (20, 20') and the second conduit inlet (34, 34'), respectively.
12. The humidification system according to any of the previous claims, wherein the first duct (6, 6') and/or the second duct (10, 10') comprises at least one pressure sensor (18).
13. The humidification system according to any of the previous claims, wherein the first conduit (8, 8') and/or the second conduit (12, 12') comprises at least one pressure sensor (18).
14. The humidification system according to previous claims 5, 9 or 10, wherein the controlling elements (16, 16') can be any of a fan, a valve or a restrictor.
15. The humidification system according to claims 5, 9, 10, 12 or 13, wherein the controlling elements (16, 16') and/or the pressure sensor(s) (18) are connect-

ed to a control unit configured to control an environmental control system of an aircraft.

5 Patentansprüche

1. Befeuchtungssystem (1) für Flugzeuge, umfassend:

einen ersten Kanal (6, 6'), der so konfiguriert ist, dass er einen ersten Luftstrom führt;
einen zweiten Kanal (10, 10'), der so konfiguriert ist, dass er einen zweiten Luftstrom führt, wobei der zweite Kanal (10, 10') einen Befeuchter (28, 28') zum Befeuchten der Luft im zweiten Kanal (10, 10') umfasst,
das Befeuchtungssystem ferner umfassend:

eine erste Leitung (8, 8') zum Leiten eines Teils des zweiten Luftstroms zu dem ersten Kanal (6, 6'), wobei die erste Leitung (8, 8') einen ersten Leitungseinlass (20, 20'), der in den ersten Kanal (6, 6') mündet, und einen ersten Leitungsauslass (22, 22') aus dem zweiten Kanal (10, 10') umfasst;
eine zweite Leitung (12, 12') zum Leiten eines Teils des ersten Luftstroms zu dem zweiten Kanal (10, 10'), wobei die zweite Leitung (12, 12') einen zweiten Leitungseinlass (34, 34'), der in den zweiten Kanal (10, 10') mündet, und einen zweiten Leitungsauslass (36, 36') aus dem ersten Kanal (6, 6') umfasst, wobei der erste Leitungsauslass (22, 22') stromabwärts des Befeuchters (28, 28') angeordnet ist,
dadurch gekennzeichnet, dass der zweite Leitungseinlass (34, 34') stromabwärts des ersten Leitungsauslasses (22, 22') angeordnet ist und dass der erste Leitungseinlass (20, 20') stromabwärts des zweiten Leitungsauslasses (36, 36') angeordnet ist.

2. Befeuchtungssystem nach Anspruch 1, umfassend einen Luftzufuhrkanal (2, 2'), der so konfiguriert ist, dass er einen Zuluftstrom leitet, und einen Zweigeverteiler (4, 4'), der mit dem Luftzufuhrkanal (2, 2'), dem ersten Kanal (6, 6') und dem zweiten Kanal (10, 10') verbunden ist, wobei die Luft so konfiguriert ist, von dem Luftzufuhrkanal (2, 2') in den Zweigeverteiler (4, 4') und dann teilweise in den ersten Kanal (6, 6') und den zweiten Kanal (10, 10') zu strömen und den ersten Luftstrom und den zweiten Luftstrom zu bilden.
3. Befeuchtungssystem nach Anspruch 1 oder 2, wobei der Befeuchter (28, 28') ein adiabatischer Befeuchter ist.
4. Befeuchtungssystem nach einem der vorhergehen-

den Ansprüche, das außerdem einen Bypass (30, 30') umfasst, der so konfiguriert ist, dass er den Befeuchter (28, 28') am zweiten Kanal (10, 10') umgeht.

5. Befeuchtungssystem nach Anspruch 4, wobei der Bypass (30) ein Steuerelement (16, 16') umfasst.
6. Befeuchtungssystem nach einem der vorhergehenden Ansprüche, wobei die erste Leitung (8, 8') und die zweite Leitung (12, 12') in einem Kanal oder Rohr angeordnet sind.
7. Befeuchtungssystem nach einem der vorhergehenden Ansprüche, wobei der Befeuchter (28, 28') ein Befeuchterkissen zum Befeuchten des zweiten Luftstroms umfasst.
8. Befeuchtungssystem nach einem der vorhergehenden Ansprüche, wobei der erste Luftstrom und der zweite Luftstrom befeuchtete Luft hinter dem ersten Leitungseinlass (20, 20') bzw. dem zweiten Leitungseinlass (34, 34') umfassen.
9. Befeuchtungssystem nach einem der vorhergehenden Ansprüche, wobei die erste Leitung (8, 8') und/oder die zweite Leitung (12, 12') ein Steuerelement (16, 16') umfassen.
10. Befeuchtungssystem nach einem der vorhergehenden Ansprüche, wobei der erste Kanal (6, 6') und/oder der zweite Kanal (10, 10') ein Steuerelement (16, 16') umfassen.
11. Befeuchtungssystem nach einem der vorhergehenden Ansprüche, wobei der erste Kanal (6, 6') und der zweite Kanal (10, 10') Leitelemente (50) hinter dem ersten Leitungseinlass (20, 20') bzw. dem zweiten Leitungseinlass (34, 34') umfassen.
12. Befeuchtungssystem nach einem der vorhergehenden Ansprüche, wobei der erste Kanal (6, 6') und/oder der zweite Kanal (10, 10') mindestens einen Drucksensor (18) umfassen.
13. Befeuchtungssystem nach einem der vorhergehenden Ansprüche, wobei die erste Leitung (8, 8') und/oder die zweite Leitung (12, 12') mindestens einen Drucksensor (18) umfassen.
14. Befeuchtungssystem nach einem der vorhergehenden Ansprüche 5, 9 oder 10, wobei die Steuerelemente (16, 16') ein Ventilator, ein Ventil oder ein Begrenzer sein können.
15. Befeuchtungssystem nach einem der Ansprüche 5, 9, 10, 12 oder 13, wobei die Steuerelemente (16, 16') und/oder der/die Drucksensor(en) (18) mit einer Steuereinheit verbunden sind, die dazu konfiguriert

ist, ein Klimatisierungssystem eines Flugzeugs zu steuern.

5 Revendications

1. Système d'humidification (1) pour aéronefs comprenant :

- un premier conduit (6, 6') configuré pour guider un premier flux d'air ;
- un second conduit (10, 10') configuré pour guider un second flux d'air, ledit second conduit (10, 10') comprenant un humidificateur (28, 28') pour humidifier l'air dans le second conduit (10, 10'),



le système d'humidification comprenant également :

- une première conduite (8, 8') pour diriger une partie du second flux d'air vers le premier conduit (6, 6'), ladite première conduite (8, 8') comprenant une première entrée de conduite (20, 20') menant dans le premier conduit (6, 6') et une première sortie de conduite (22, 22') à partir du second conduit (10, 10') ;
- une seconde conduite (12, 12') pour diriger une partie du premier flux d'air vers le second conduit (10, 10'), ladite seconde conduite (12, 12') comprenant une seconde entrée de conduite (34, 34') menant dans le second conduit (10, 10') et une seconde sortie de conduite (36, 36') à partir du premier conduit (6, 6'), dans lequel la première sortie de conduite (22, 22') est agencée en aval de l'humidificateur (28, 28'),

caractérisé en ce que la seconde entrée de conduite (34, 34') est agencée en aval de la première sortie de conduite (22, 22') et dans lequel la première entrée de conduite (20, 20') est agencée en aval de la seconde sortie de conduite (36, 36').

2. Système d'humidification selon la revendication 1, comprenant un conduit d'alimentation en air (2, 2') configuré pour guider un flux d'air soufflé et un collecteur bidirectionnel (4, 4') connecté au conduit d'alimentation en air (2, 2'), au premier conduit (6, 6') et au second conduit (10, 10'), moyennant quoi l'air est configuré pour s'écouler du conduit d'alimentation en air (2, 2') dans le collecteur bidirectionnel (4, 4') puis partiellement dans le premier conduit (6, 6') et le second conduit (10, 10') formant le premier flux d'air et le second flux d'air,
3. Système d'humidification selon la revendication 1 ou 2, dans lequel l'humidificateur (28, 28') est un humidificateur adiabatique.

4. Système d'humidification selon l'une quelconque des revendications précédentes, comprenant également une dérivation (30, 30') configurée pour contourner l'humidificateur (28, 28') sur le second conduit (10, 10').
 5. Système d'humidification selon la revendication 4, dans lequel la dérivation (30) comprend un élément de commande (16, 16').
 6. Système d'humidification selon l'une quelconque des revendications précédentes, dans lequel la première conduite (8, 8') et la seconde conduite (12, 12') sont agencées dans un conduit ou un tuyau.
 7. Système d'humidification selon l'une quelconque des revendications précédentes, dans lequel l'humidificateur (28, 28') comprend un tampon humidificateur pour humidifier le second flux d'air.
 8. Système d'humidification selon l'une quelconque des revendications précédentes, dans lequel le premier flux d'air et le second flux d'air comprennent de l'air humidifié en aval de la première entrée de conduite (20, 20') et de la seconde entrée de conduite (34, 34'), respectivement.
 9. Système d'humidification selon l'une quelconque des revendications précédentes, dans lequel la première conduite (8, 8') et/ou la seconde conduite (12, 12') comprennent un élément de commande (16, 16').
 10. Système d'humidification selon l'une quelconque des revendications précédentes, dans lequel le premier conduit (6, 6') et/ou le second conduit (10, 10') comprennent un élément de commande (16, 16').
 11. Système d'humidification selon l'une quelconque des revendications précédentes, dans lequel le premier conduit (6, 6') et le second conduit (10, 10') comprennent des éléments déflecteurs (50) en aval de la première entrée de conduite (20, 20') et de la seconde entrée de conduite (34, 34'), respectivement.
 12. Système d'humidification selon l'une quelconque des revendications précédentes, dans lequel le premier conduit (6, 6') et/ou le second conduit (10, 10') comprennent au moins un capteur de pression (18).
 13. Système d'humidification selon l'une quelconque des revendications précédentes, dans lequel la première conduite (8, 8') et/ou la seconde conduite (12, 12') comprennent au moins un capteur de pression (18).
 14. Système d'humidification selon les revendications
- précédentes 5, 9 ou 10, dans lequel les éléments de commande (16, 16') peuvent être n'importe lesquels parmi un ventilateur, une vanne ou un restricteur.
- 5 15. Système d'humidification selon les revendications 5, 9, 10, 12 ou 13, dans lequel les éléments de commande (16, 16') et/ou le(s) capteur(s) de pression (18) sont connectés à une unité de commande configurée pour commander un système de régulation environnementale d'un aéronef.

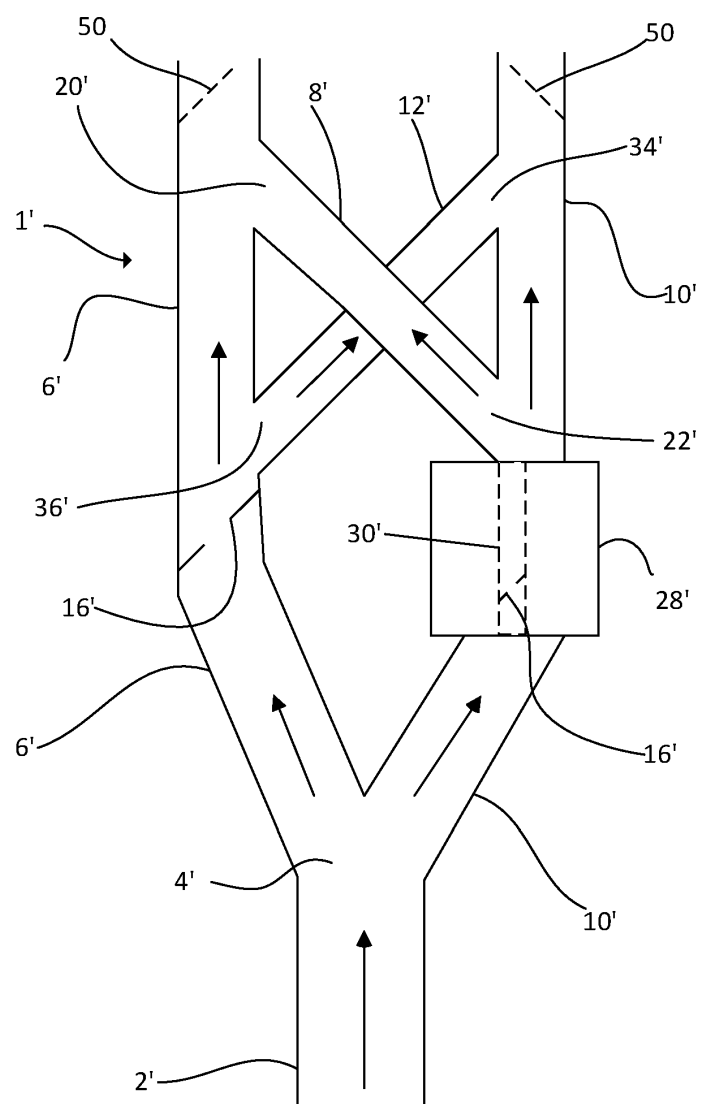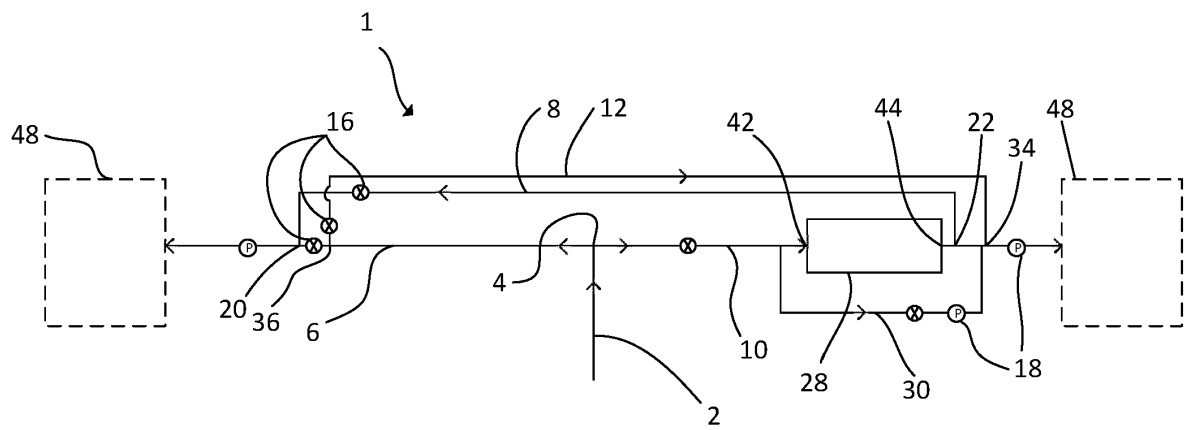

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2096033 A1 [0005]