




(86) Date de dépôt PCT/PCT Filing Date: 2000/02/16
(87) Date publication PCT/PCT Publication Date: 2000/08/24
(45) Date de délivrance/Issue Date: 2012/01/03
(85) Entrée phase nationale/National Entry: 2001/08/17
(86) N° demande PCT/PCT Application No.: US 2000/004021
(87) N° publication PCT/PCT Publication No.: 2000/049836
(30) Priorité/Priority: 1999/02/18 (US09/252,572)

(51) Cl.Int./Int.Cl. *H04R 25/00* (2006.01),
H04R 1/08 (2006.01)
(72) Inventeurs/Inventors:
KILLION, MEAD C., US;
SCHULEIN, ROBERT B., US;
MONROE, TIMOTHY S., US
(73) Propriétaire/Owner:
ETYMOTIC RESEARCH, INC., US
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : ENSEMBLE MICROPHONE DIRECTIONNEL
(54) Title: DIRECTIONAL MICROPHONE ASSEMBLY

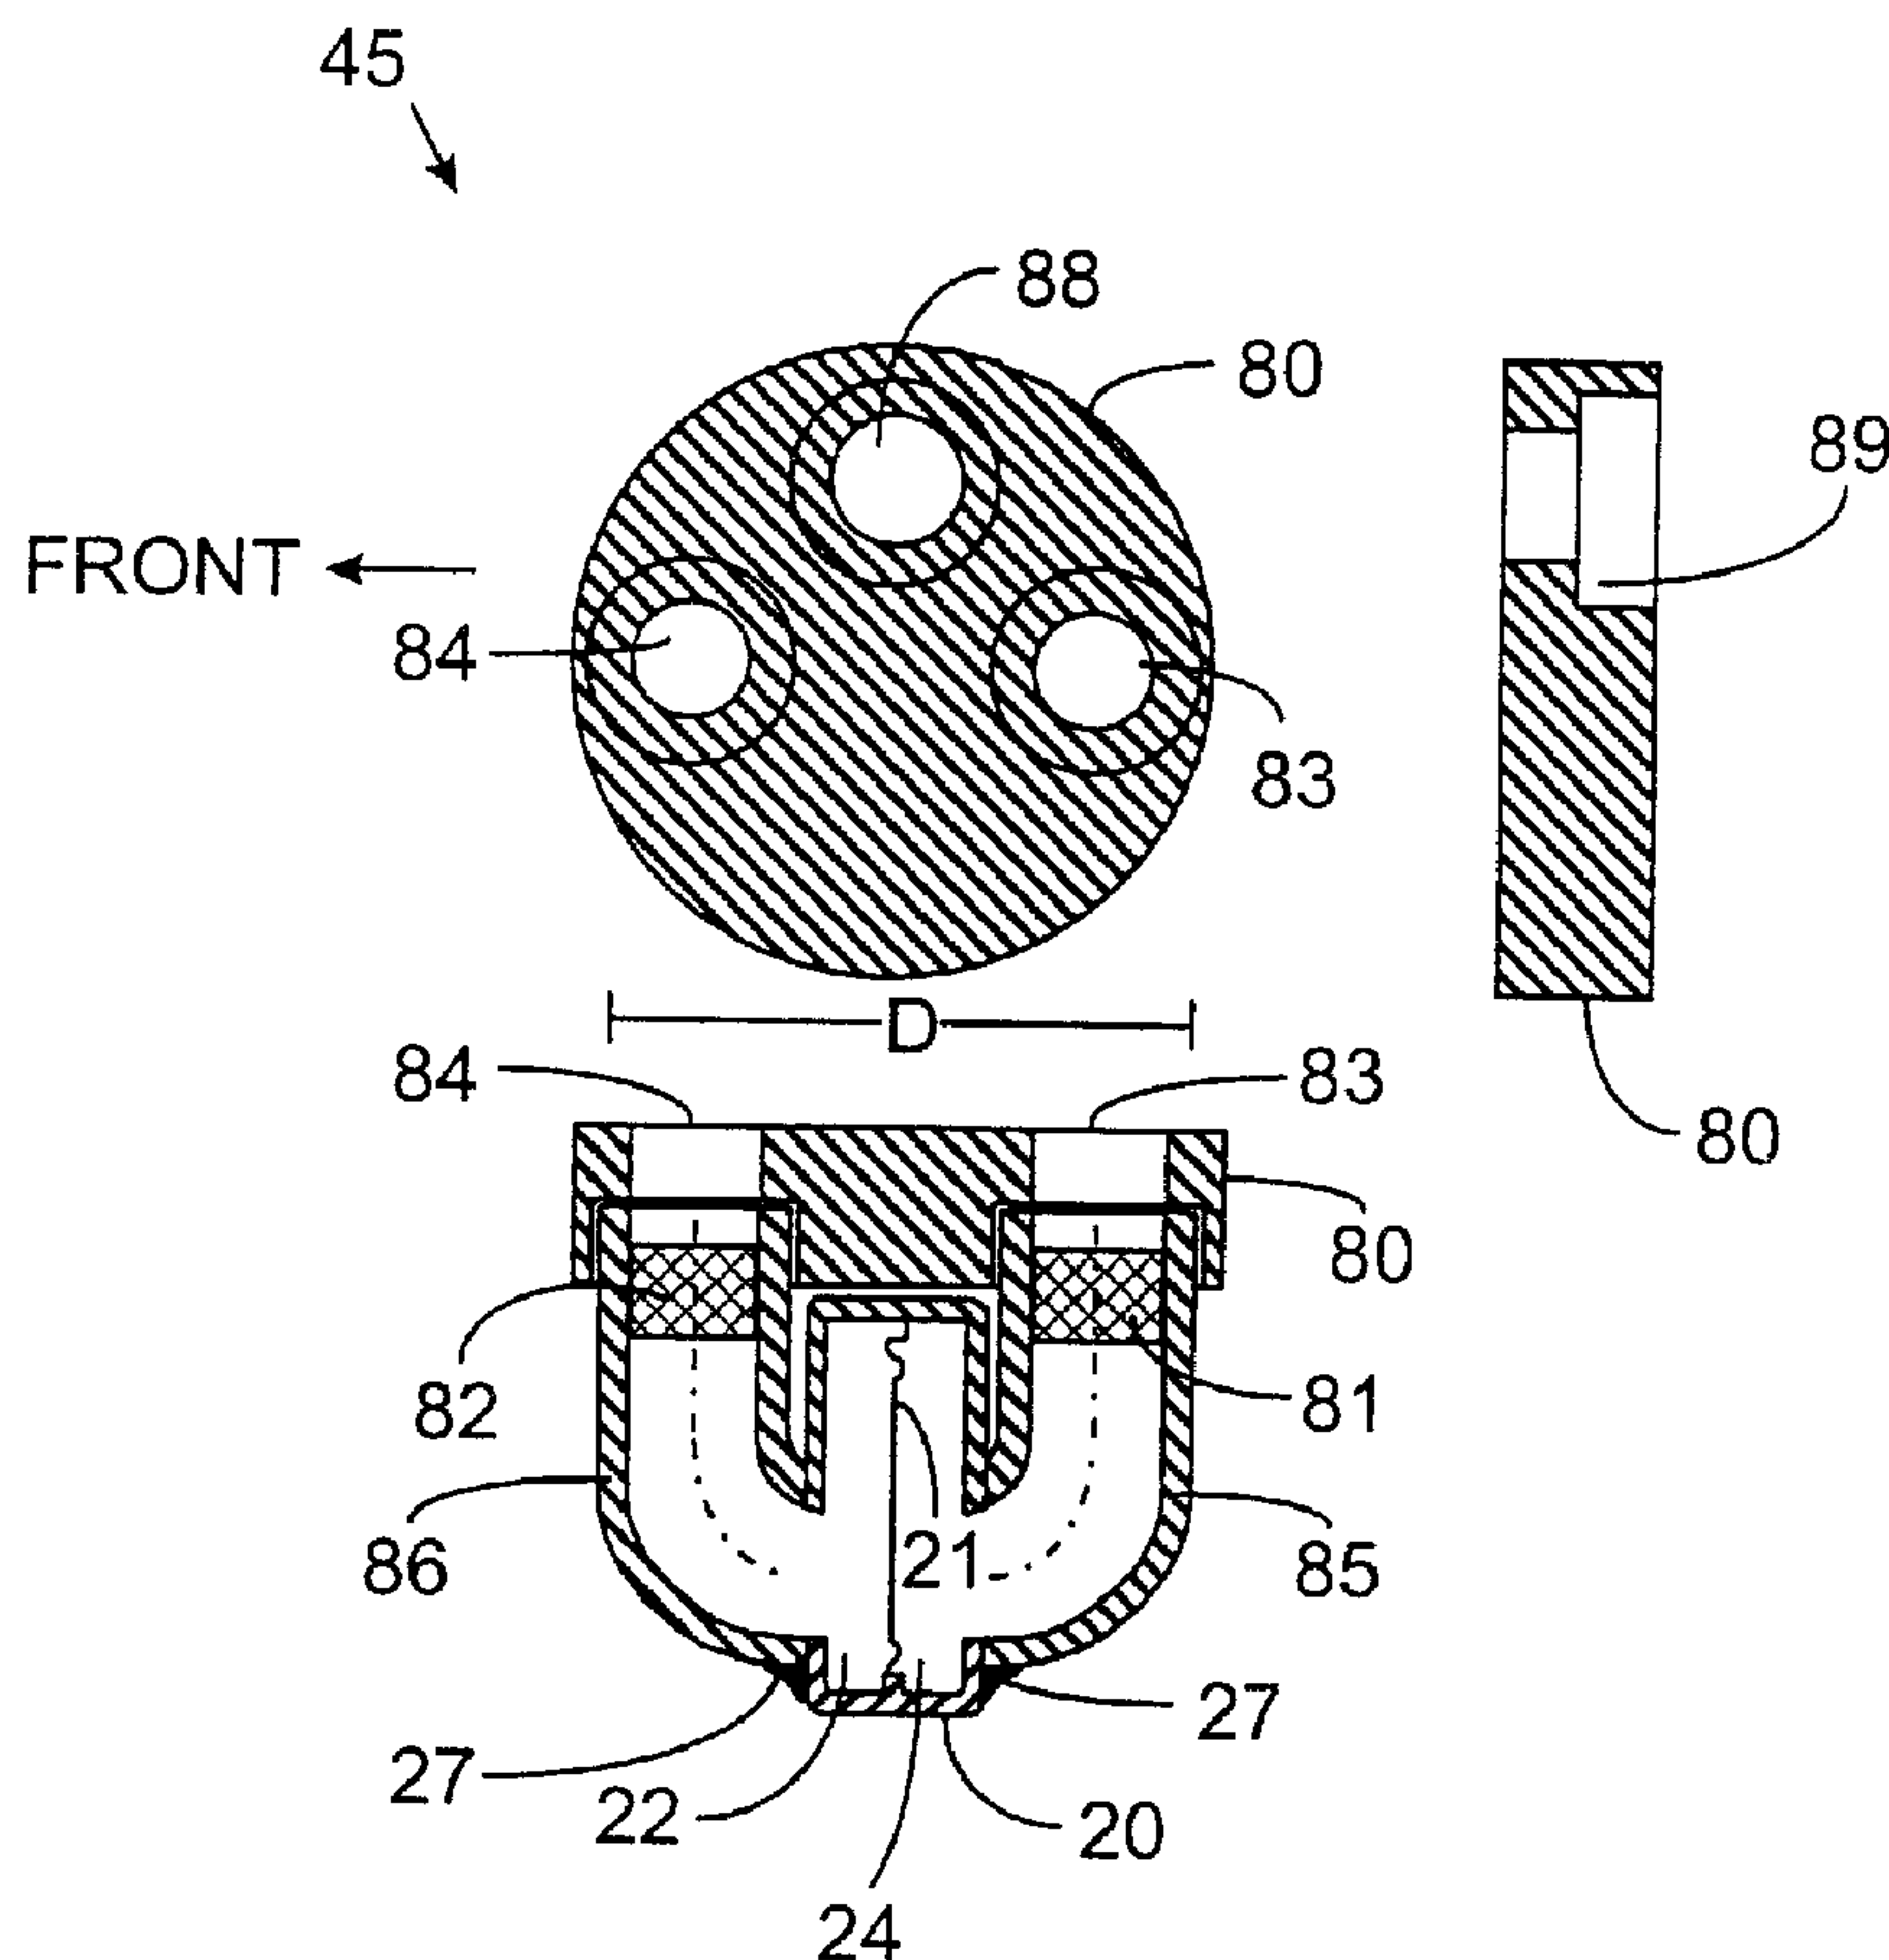

(57) Abrégé/Abstract:

A microphone capsule (40) for an in-the-ear hearing aid is disclosed. The capsule (40) can include a top plate (80) having first and second spaced openings defining front and rear sound inlets (83, 84), and a directional microphone cartridge (20) enclosing a




(57) **Abrégé(suite)/Abstract(continued):**

diaphragm (21). The diaphragm (21) is oriented generally perpendicular to the top plate and divides directional microphone cartridge housing into a front chamber (22) and a rear chamber (24). A front sound passage (85) communicates between the front sound inlet and the front chamber, and a rear sound passage (86) communicates between the rear sound inlet and the rear chamber. Front and rear acoustic damping resistors (81, 82) having selected resistance values are associated with the front and rear sound passages. The acoustic resistor pair provides a selected time delay, such as about 4 microseconds, between the front and rear sound passages. The use of two acoustic resistors instead of one levels the frequency response, compared to the frequency response provided by a rear acoustic damping resistor alone.

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04R 25/00	A1	(11) International Publication Number: WO 00/49836 (43) International Publication Date: 24 August 2000 (24.08.00)
(21) International Application Number: PCT/US00/04021 (22) International Filing Date: 16 February 2000 (16.02.00) (30) Priority Data: 09/252,572 18 February 1999 (18.02.99) US (71) Applicant: ETYMOTIC RESEARCH, INC. [US/US]; 61 Martin Lane, Elk Grove Village, IL 60007 (US). (72) Inventors: KILLION, Mead, C.; 755 Leicester, Elk Grove Village, IL 60007 (US). SCHULEIN, Robert, B.; 215 Brown Avenue, Evanston, IL 60202 (US). MONROE, Timothy, S.; 223 S. Whittier Court, Schaumburg, IL 60193 (US). (74) Agents: WINSLADE, Christopher, C. et al.; McAndrews, Held & Malloy, Ltd., 34th floor, 500 West Madison Street, Chicago, IL 60661 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: DIRECTIONAL MICROPHONE ASSEMBLY (57) Abstract A microphone capsule (40) for an in-the-ear hearing aid is disclosed. The capsule (40) can include a top plate (80) having first and second spaced openings defining front and rear sound inlets (83, 84), and a directional microphone cartridge (20) enclosing a diaphragm (21). The diaphragm (21) is oriented generally perpendicular to the top plate and divides directional microphone cartridge housing into a front chamber (22) and a rear chamber (24). A front sound passage (85) communicates between the front sound inlet and the front chamber, and a rear sound passage (86) communicates between the rear sound inlet and the rear chamber. Front and rear acoustic damping resistors (81, 82) having selected resistance values are associated with the front and rear sound passages. The acoustic resistor pair provides a selected time delay, such as about 4 microseconds, between the front and rear sound passages. The use of two acoustic resistors instead of one levels the frequency response, compared to the frequency response provided by a rear acoustic damping resistor alone.		

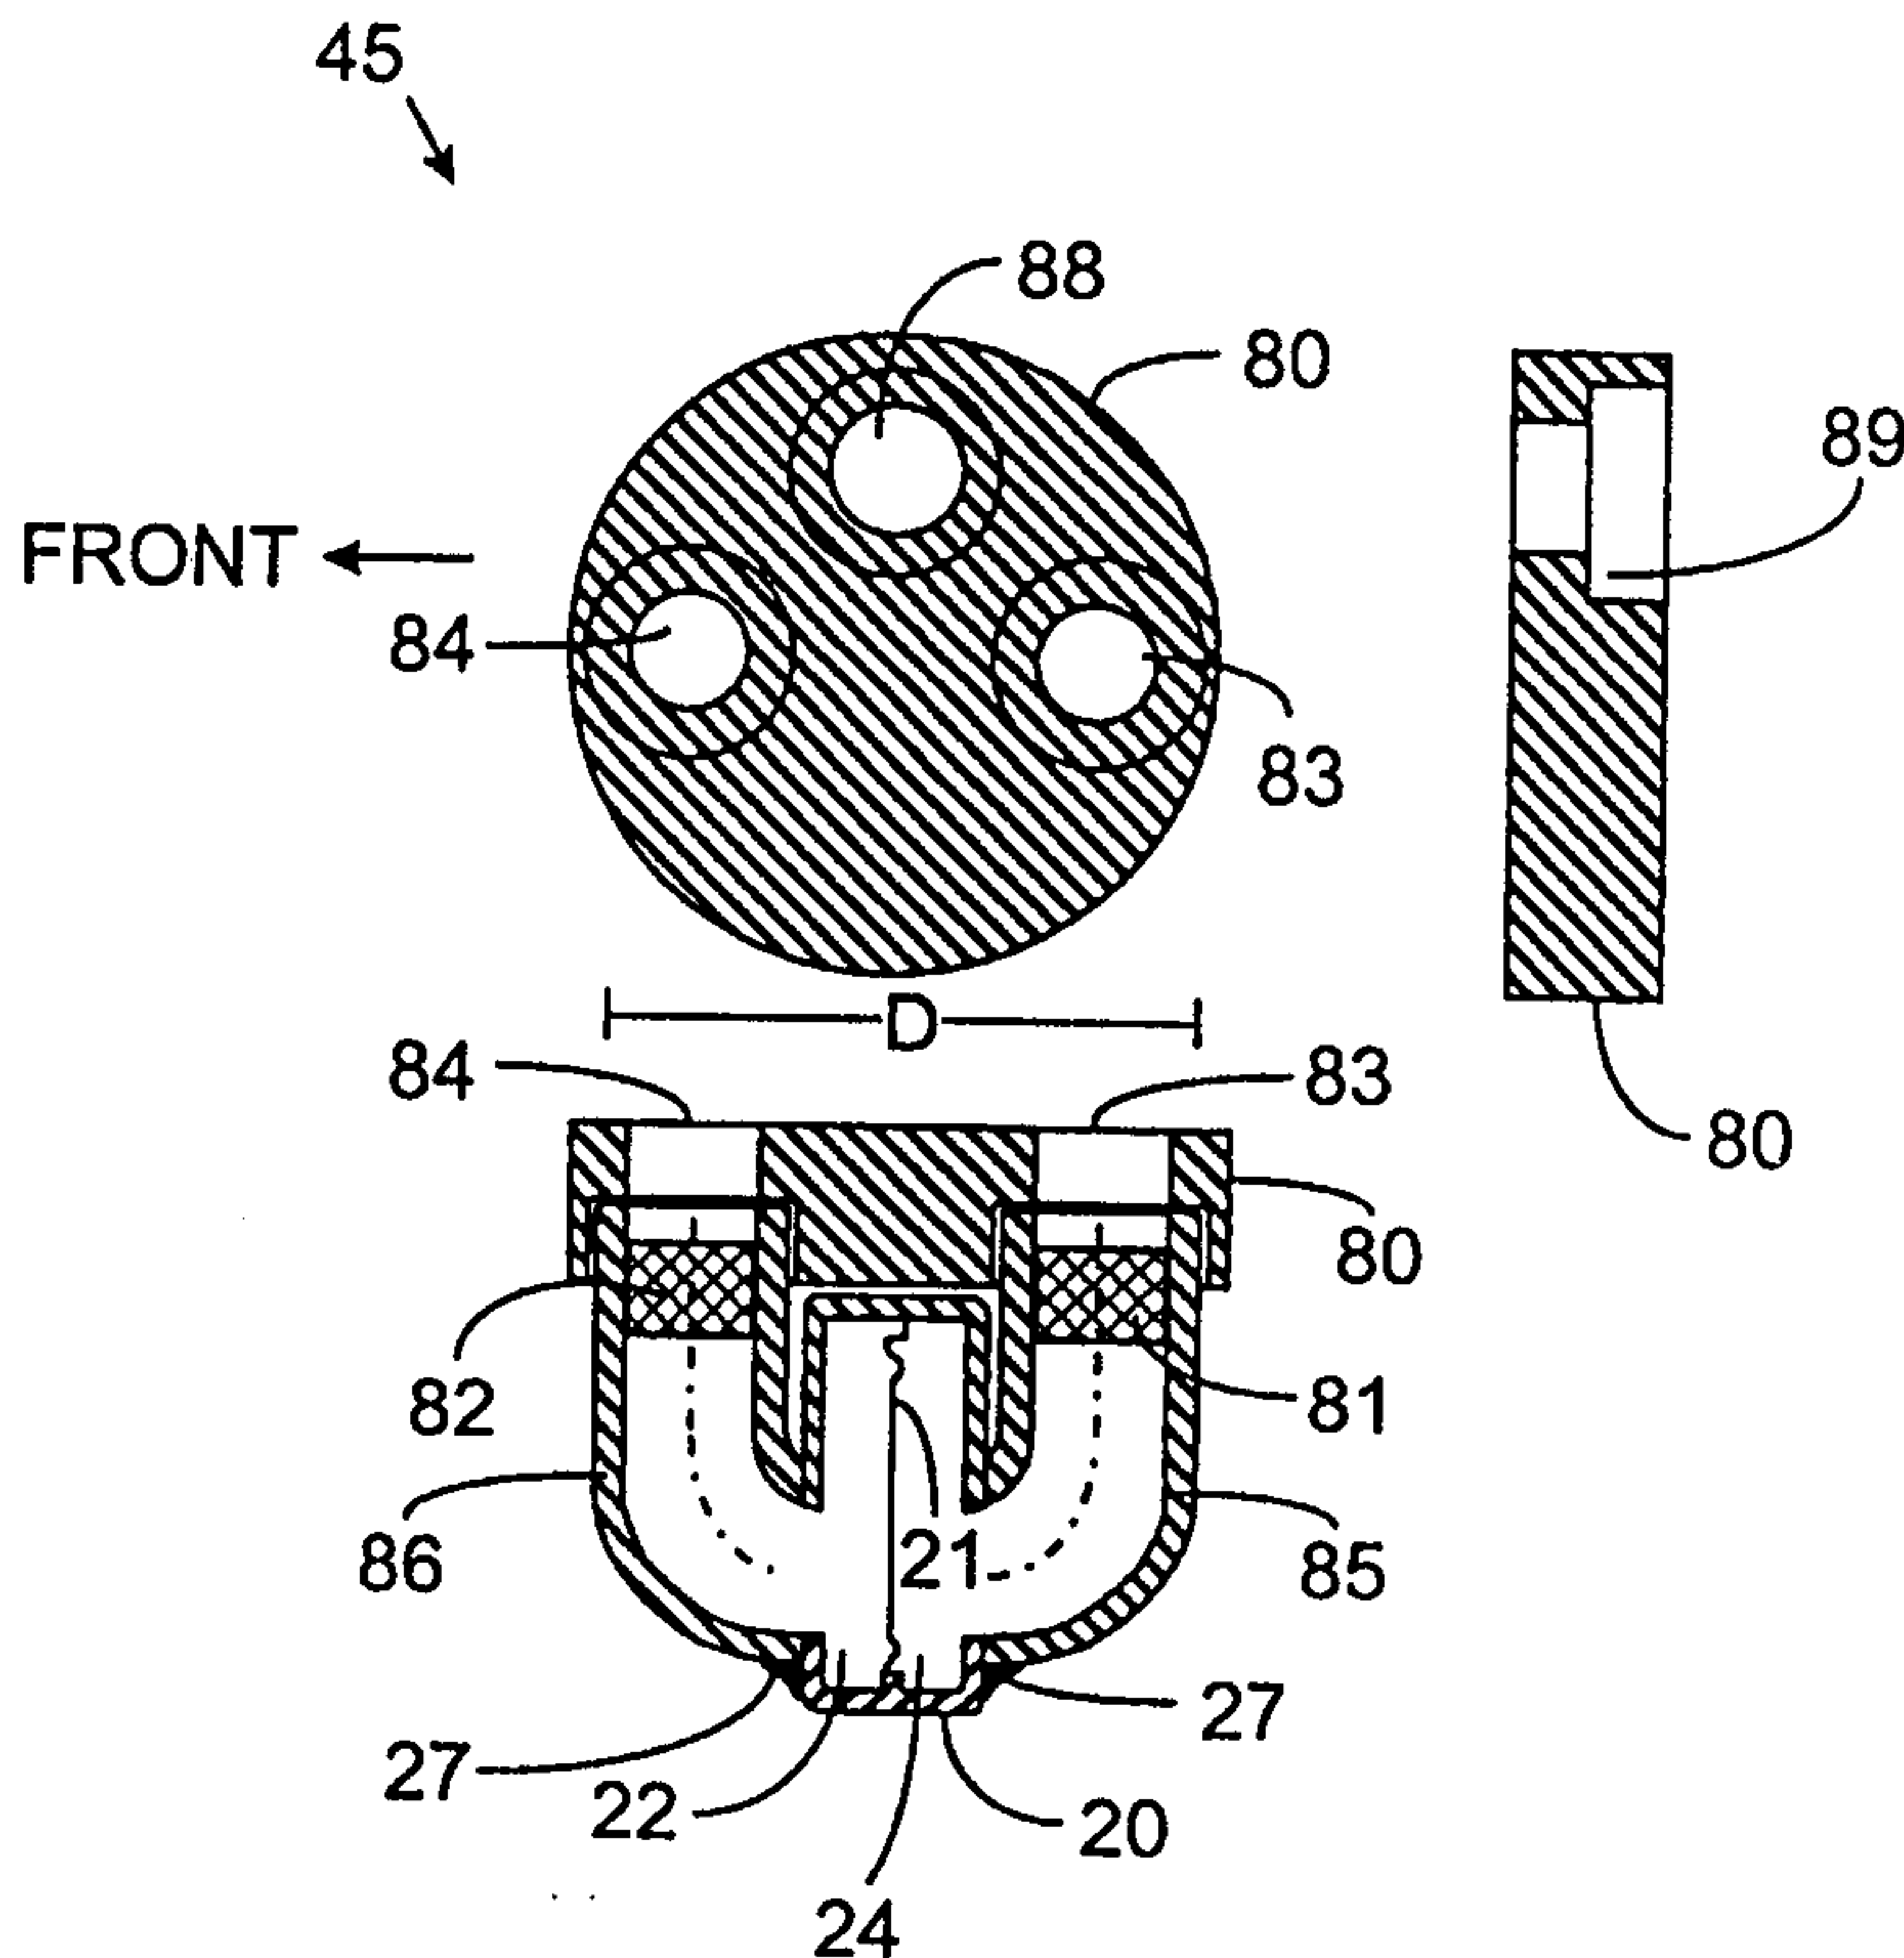

TITLE OF THE INVENTION

DIRECTIONAL MICROPHONE ASSEMBLY

BACKGROUND OF THE INVENTION

The application of directional microphones to hearing aids is well known in the patent literature (Wittkowski, U.S. Patent No. 3,662,124 dated 1972; Knowles and Carlson, U.S. Patent No. 3,770,911 dated 1973; Killion, U.S. Patent No. 3,835,263 dated 1974; Ribic, U.S. Patent No. 5,214,709, and Killion et al. U.S. Patent No. 5,524,056, 1996) as well as commercial practice (Maico hearing aid model MC033, Qualitone hearing aid model TKSAD, Phonak "AudioZoom" hearing aid, and others).

Directional microphones are used in hearing aids to make it possible for those with impaired hearing to carry on a normal conversation at social gatherings and in other noisy environments. As hearing loss progresses, individuals require greater and greater signal-to-noise ratios in order to understand speech. Extensive digital signal processing research has resulted in the universal finding that nothing can be done with signal processing alone to improve the intelligibility of a signal in noise, certainly in the common case where the signal is one person talking and the noise is other people talking. There is at present no practical way to communicate to the digital processor that the listener now wishes to turn his attention from one talker to another, thereby reversing the roles of signal and noise sources.

It is important to recognize that substantial advances have been made in the last decade in the hearing aid art to help those with hearing loss hear better in noise.

Available research indicates, however, that the advances amounted to eliminating defects in the hearing aid processing, defects such as distortion, limited bandwidth, peaks in the frequency response, and improper automatic gain control or AGC action. Research conducted in the 1970's, before these defects were corrected, indicated that the wearer of hearing aids typically experienced an additional deficit of 5 to 10 dB above the unaided condition in the signal-to-noise ratio ("S/N") required to understand speech. Normal hearing individuals wearing those same hearing aids might also experience a 5 to 10 dB deficit in the S/N required to carry on a conversation, indicating that it was indeed the hearing aids that were at fault. These problems were discussed by applicant in a recent paper "Why some hearing aids don't work well!!!" (Hearing Review, Jan. 1994, pp. 40-42).

Recent data obtained by applicant and his colleagues confirm that hearing impaired individuals need an increased signal-to-noise ratio even when no defects in the hearing aid processing exist. As measured on one popular speech-in-noise test, the SIN test, those with mild loss typically need some 2 to 3 dB greater S/N than those with normal hearing; those with moderate loss typically need 5 to 7 dB greater S/N; those with severe loss typically need 9 to 12 dB greater S/N. These figures were obtained under conditions corresponding to defect free hearing aids.

As described below, a headworn first-order directional microphone can provide at least a 3 to 4 dB improvement in signal-to-noise ratio compared to the open ear, and substantially more in special cases. This degree of improvement will bring those with mild hearing loss back to normal hearing ability in noise, and substantially reduce the difficulty those with moderate loss experience in noise. In contrast, traditional omnidirectional head-worn microphones cause a signal-to-noise deficit of about 1 dB compared to the open ear, a deficit due to the effects of head diffraction and not any particular hearing aid defect.

A little noticed advantage of directional microphones is their ability to reduce whistling caused by feedback (Knowles and Carlson, 1973, U.S. Patent No.

3,770,911). If the ear-mold itself is well fitted, so that the vent outlet is the principal source of feedback sound, then the relationship between the vent and the microphone may sometimes be adjusted to reduce the feedback pickup by 10 or 20 dB. Similarly, the higher-performance directional microphones have a relatively low pickup to the side at high frequencies, so the feedback sound caused by faceplate vibration will see a lower microphone sensitivity than sounds coming from the front.

Despite these many advantages, the application of directional microphones has been restricted to only a small fraction of Behind-The-Ear (BTE) hearing aids, and only rarely to the much more popular In-The-Ear (ITE) hearing aids which presently comprise some 80% of all hearing aid sales.

Part of the reason for this low usage was discovered by Madafarri, who measured the diffraction about the ear and head. He found that for the same spacing between the two inlet ports of a simple first-order directional microphone, the ITE location produced only half the microphone sensitivity. Madafarri found that the diffraction of sound around the head and ear caused the effective port spacing to be reduced to about 0.7 times the physical spacing in the ITE location, while it was increased to about 1.4 times the physical spacing in the BTE location. In addition to a 2:1 sensitivity penalty for the same port spacing, the constraints of ITE hearing aid construction typically require a much smaller port spacing, further reducing sensitivity.

Another part of the reason for the low usage of directional microphones in ITE applications is the difficulty of providing the front and rear sound inlets plus a microphone cartridge in the space available. As shown in FIG. 17 of the '056 patent mentioned above, the prior art uses at least one metal inlet tube (often referred to as a nipple) welded to the side of the microphone cartridge and a coupling tube between the microphone cartridge and the faceplate of the hearing aid. The arrangement of FIG. 17 of the '056 patent wherein the microphone cartridge is also parallel with the faceplate of the hearing aid forces a spacing D as shown in that figure which may not be suitable for all ears.

A further problem is that of obtaining good directivity across frequency. Extensive experiments conducted by Madafarri as well as by applicant and his colleagues over the last 25 years have shown that in order to obtain good directivity across the audio frequencies in a head-worn directional microphone it, requires
5 great care and a good understanding of the operation of sound in tubes (as described, for example, by Zuercher, Carlson, and Killion in their paper "Small acoustic tubes," J. Acoust. Soc. Am., V. 83, pp. 1653-1660, 1988).

A still further problem with the application of directional microphones to hearing aids is that of microphone noise. Under normal conditions, the noise of a
10 typical non-directional hearing aid microphone cartridge is relatively unimportant to the overall performance of a hearing aid. Sound field tests show that hearing aid wearers can often detect tones within the range of 0 to 5 dB Hearing Level, i.e., within 5 dB of average young normal listeners and well within the accepted 0 to 20 dB limits of normal hearing. But when the same microphone cartridges are used to
15 form directional microphones, a low frequency noise problem arises. The subtraction process required in first-order directional microphones results in a frequency response falling at 6 dB/octave toward low frequencies. As a result, at a frequency of 200 Hz, the sensitivity of a directional microphone may be 30 dB below the sensitivity of the same microphone cartridge operated in an
20 omnidirectional mode.

When an equalization amplifier is used to correct the directional microphone frequency response for its low frequency drop in sensitivity, the amplifier also amplifies the low frequency noise of the microphone. In a reasonably quiet room, the amplified low frequency microphone noise may now become objectionable.
25 Moreover, with or without equalization, the masking of the microphone noise will degrade the best aided sound field threshold at 200 Hz to approximately 35 dB HL, approaching the 40 dB HL lower limits for what is considered a moderate hearing impairment.

The equalization amplifier itself also adds to the complication of the hearing
30 aid circuit. Thus, even in the few cases where ITE aids with directional

microphones have been available, to applicant's knowledge, their frequency response has never been equalized. For this reason, Killion et al (U.S. Patent No. 5,524,056) recommend a combination of a conventional omnidirectional microphone and a directional microphone so that the lower internal noise omnidirectional microphone may be chosen during quiet periods while the external noise rejecting directional microphone may be chosen during noisy periods.

Although directional microphones appear to be the only practical way to solve the problem of hearing in noise for the hearing-impaired individual, they have been seldom used even after nearly three decades of availability. It is the purpose of the present invention to provide an improved and fully practical directional microphone for ITE hearing aids.

Before summarizing the invention, a review of some further background information will be useful. Since the 1930s, the standard measure of performance in directional microphones has been the "directivity index" or DI, the ratio of the on-axis sensitivity of the directional microphone (sound directly in front) to that in a diffuse field (sound coming with equal probability from all directions, sometimes called random incidence sound). The majority of the sound energy at the listener's eardrum in a typical room is reflected, with the direct sound often less than 10% of the energy. In this situation, the direct path interference from a noise source located at the rear of a listener may be rejected by as much as 30 dB by a good directional microphone, but the sound reflected from the wall in front of the listener will obviously arrive from the front where the directional microphone has (intentionally) good sensitivity. If all of the reflected noise energy were to arrive from the front, the directional microphone could not help.

Fortunately, the reflections for both the desired and undesired sounds tend to be more or less random, so the energy is spread out over many arrival angles. The difference between the "random incidence" or "diffuse field" sensitivity of the microphone and its on-axis sensitivity gives a good estimate of how much help the directional microphone can give in difficult situations. An additional refinement can be made where speech intelligibility is concerned by weighing the directivity index

at each frequency to the weighing function of the Articulation Index as described, for example, by Killion and Mueller on page 2 of The Hearing Journal, Vol. 43, Number 9, Sept. 1990. Table 1 gives one set of weighing values suitable for estimating the equivalent overall improvement in signal-to-noise ratio as perceived by someone trying to understand speech in noise.

The directivity index (DI) of the two classic, first-order directional microphones, the "cosine" and "cardioid" microphones, is 4.8 dB. In the first case the microphone employs no internal acoustic time delay between the signals at the two inlets, providing a symmetrical figure 8 pattern. The cardioid employs a time delay exactly equal to the time it takes on-axis sound to travel between the two inlets. Compared to the cosine microphone, the cardioid has twice the sensitivity for sound from the front and zero sensitivity for sound from the rear. A further increase in directivity performance can be obtained by reducing the internal time delay. The hypercardioid, with minimum sensitivity for sound at 110 degrees from the front, has a DI of 6 dB. The presence of head diffraction complicates the problem of directional microphone design. For example, the directivity index for an omni BTE or ITE microphone is -1.0 to - 2.0 dB at 500 and 1000 Hz.

Recognizing the problem of providing good directional microphone performance in a headworn ITE hearing aid application, applicant's set about to discover improved means and methods of such application. It is readily understood that the same solutions which make an ITE application practical can be easily applied to BTE applications as well.

BRIEF SUMMARY OF THE INVENTION

It is an object of the present invention to provide improved speech intelligibility in noise to the wearer of a small in-the-ear hearing aid.

It is a further object of the present invention to provide the necessary mechanical and electrical components to permit practical and economical directional microphone constructions to be used in head-worn hearing aids.

It is a still further object of the present invention to provide a mechanical

arrangement which permits a smaller capsule than heretofore possible.

It is a still further object of the present invention to provide a switchable noise reduction feature for a hearing aid whereby the user may switch to an omnidirectional microphone mode for listening in quiet or to music concerts, and then switch to a directional microphone in noisy situations where understanding of conversational speech or other signals would otherwise be difficult or impossible.

It is a still further object of the present invention to provide a self-contained microphone capsule containing the microphone cartridges, acoustic couplings, and electrical equalization necessary to provide essentially the same frequency response for both omnidirectional and directional operation.

It is another object of the invention to provide a replaceable protective screen.

It is yet another object of the invention to provide a means of color match to the hearing aid faceplate.

These and other objects of the invention are obtained in a microphone capsule that employs both an omnidirectional microphone element and a directional microphone element. The capsule contains novel construction features to stabilize performance and minimize cost, as well as novel acoustic features to improve performance.

Known time-delay resistors normally used in first-order directional microphones will, when selected to provide the extremely small time delay associated with ITE hearing aid applications, give insufficient damping of the resonant peak in the microphone. This problem is solved in accordance with one embodiment of the present invention by adding a second novel acoustic damping resistor to the front inlet of the microphone, and adjusting the combination of resistors to produce the proper difference in time delays between the front acoustic delay and the rear acoustic delay, thereby making it possible to provide the desired directional characteristics as well as a smooth frequency response.

In another embodiment of the present invention, a set of gain-setting resistors is included in the equalization circuit so that the sensitivities of the directional and

omnidirectional microphones can be inexpensively matched and so the user will experience no loss of sensitivity for the desired frontal signal when switching from omnidirectional to directional microphones.

5 In still another embodiment of the present invention, a molded manifold is used to align the parts and conduct sound through precise sound channels to each microphone inlet. This manifold repeatably provides the acoustic inertance and volume compliance required to obtain good directivity, especially at high frequencies.

10 In yet another embodiment of the present invention, a protective screen means is provided which reduces wind noise and provides a protective barrier against debris, but does not appreciably affect the directivity of the module. In addition, the protective screen enables color matching of the microphone to the hearing aid.

15 **BRIEF DESCRIPTION OF THE
SEVERAL VIEWS OF THE DRAWINGS**

FIG. 1A is a side elevation view of one embodiment of a hearing aid mounted in an ear in accordance with the present invention.

20 FIG. 1B is a partial cross-sectional view taken along the section line B-B showing the capsule of the present invention.

FIGS. 2A, 2B, and 2C show the isolated capsule of the present invention from the top, side, and bottom views.

25 FIG. 3 shows a subassembly of one embodiment of the capsule of the present invention, showing a top plate with sound inlets and sound tubes coupling to the two microphone cartridges.

30 FIG. 4 shows a cutaway view of one embodiment of a complete capsule in accordance with the present invention, the capsule containing two microphone cartridges mounted in the top plate of FIG. 3 along with appropriate coupling tubes and acoustic resistances and an equalization circuit in order to form directional and omnidirectional microphones having similar frequency response after the directional

microphone signal has passed through the equalization circuit.

FIG. 5 shows a schematic drawing of one embodiment of the equalization circuit of the present invention.

FIG. 6, plot 41, shows the prominent peak in the frequency response of the directional microphone of the present invention when a single acoustic resistance is placed in the rear inlet tube of the microphone to provide the time delay of approximately 4 microseconds required to obtain good directivity in accordance with the present invention when the capsule is mounted on a head worn ITE hearing aid.

FIG. 6, plot 42, shows the smooth frequency response obtained when an acoustic resistor is added to the front inlet tube of the microphone so that the total resistance is chosen in order to provide the desired response smoothness while the two resistances is chosen in order to provide the required time delay.

FIG. 7 shows the on-axis frequency response of the omnidirectional microphone and the directional microphone after equalization with the circuit of FIG. 5. Both curves were obtained with the capsule of the present invention mounted in an ITE hearing aid as shown in FIG. 1 placed in the ear of a KEMAR mannequin.

FIG. 8 shows polar plots of the directional microphone of the present invention at frequencies of 0.5, 1, 2, 4, 6 and 8 kHz, measured as in FIG. 7.

FIG. 9 shows still another embodiment of the top plate where molded sound passages and a manifold construction eliminate the need for three coupling tubes and their time consuming assembly operations.

FIG. 10 shows a schematic of a simple low frequency adjustment for the directional microphone response for those cases where some low frequency attenuation is desired in high level noise.

FIG. 11 shows yet another embodiment of a microphone assembly built in accordance with the present invention.

FIG. 12 is an exploded view of the microphone assembly of FIG. 11.

FIG. 13 is a different exploded view of the microphone assembly of FIG. 11.

FIG. 14 is a cross-sectional view of the microphone assembly of FIG. 11.

FIG. 15 is an enlarged view of a portion of FIG. 14 illustrating the location of acoustic dampers and the sealing of the microphone sound openings in accordance with the present invention.

5 FIG. 16 illustrates the frequency response of the directional microphone assembly of FIG. 11 according to the present invention, along with the frequency response of that assembly if only a single acoustic damper were used.

FIG. 17 shows the polar characteristics of the directional microphone assembly of FIG. 11 having only a single acoustic damper.

10 FIG. 18 shows the polar characteristics of the directional microphone assembly of FIG. 11 having both acoustic dampers according to the present invention.

15 DETAILED DESCRIPTION OF THE INVENTION

Certain elements of the functions of the present invention, in particular the use of a switch to choose directional or omnidirectional operation with the same frequency response, were described in Applicant's U.S. Patent No. 3,835,263, dated 1974. The combination of directional and omnidirectional microphones in a hearing aid with an equalization circuit and a switch to provide switching between omnidirectional and directional responses with the same frequency response was described in Applicant's U.S. Patent No. 5,524,056, 1996. The disclosures of these two patents are incorporated herein by reference.

20 A hearing aid apparatus 100 constructed in accordance with one embodiment of the invention is shown generally at 10 of FIG. 1. As illustrated, the hearing aid apparatus 10 utilizes a microphone capsule 40, a switch 55 to select the directional microphone or omnidirectional microphone outputs of capsule 40, and a protective screen 90 to reduce the troublesome effects of wind noise, protect against debris contamination, and provide a visual color match with the hearing aid face plate.

30 FIG. 2 shows more of the construction of capsule 40, consisting of a top

plate 80 (defining an exterior portion of said capsule as worn), a cylinder or housing 50 and an equalization circuit 60.

FIG. 3 shows a subassembly 45 of one embodiment of the capsule 40 of the present invention, showing a top plate 80 with sound tubes 85 and 86 coupling
5 sound inlets 83, 84, to the front chamber 22 and the rear chamber 24 of microphone cartridge 20. Adhesive 27 seals tubes 85 and 86 to microphone cartridge 20. Microphone cartridge 20 is mounted with the plane of the diaphragm 21 generally normal to the top plate 80. This configuration eliminates the need for the prior art metal inlet tube or tubes of the microphone and provides a smaller distance D
10 (measured as shown in FIG. 17 of the '056 patent) than would be possible using prior art constructions. As a result, the diameter of capsule 40 may be maintained at 0.25 inches or less.

Also shown is sound inlet 88, to which omnidirectional microphone cartridge 30 (not shown) is to be connected. Shoulder 89 in inlets 83, 84, and 88 provides a
15 mechanical stop for the tubings 85 and 86 and microphone cartridge 30 (not shown). Tubings 85 and 86 are attached or sealed to top plate 80 and to microphone cartridge 20. Acoustical resistors 81 and 82 provide response smoothing and the time delay required for proper directional operation. Resistors 81 and 82 may for example be like those described by Carlson and Mostardo in U.S. Patent No.
20 3,930,560 dated 1976.

FIG. 4 shows a cutaway view of one embodiment of a complete capsule 40 in accordance with the present invention, the capsule containing microphone cartridge 20 mounted as shown in FIG. 3 in order to form a directional microphone, and omnidirectional microphone cartridge 30 mounted into inlet 88 of top plate 80.
25 Each of the microphones 20, 30 is used to convert sound waves into electrical output signals corresponding to the sound waves. Cylinder 50 may be molded in place with compound 51 which may be epoxy, UV cured acrylic, or the like.

Conventional directional microphone construction would utilize only acoustic resistance 81, chosen so that the R-C time constant of resistance 81 and the
30 compliance formed by the sum of the volumes in tube 85 and the rear volume 24 of

cartridge 20 would provide the correct time delay. For example, in the present case, the inlets 83 and 84 are mounted approximately 4 mm apart, so the free-space time delay for on-axis sound would be about 12 microseconds. In order to form a cardioid microphone, therefore, an internal time delay of 12 microseconds would be required. In this case, sound from the rear would experience the same time delays reaching rear chamber 24 and front chamber 22 of the microphone, so that the net pressure across diaphragm 21 would be zero and a null in response would occur for 180 degrees sound incidence as is well known to those skilled in the art.

In the case of a head-mounted ITE hearing aid application, however, head diffraction reduces the effective acoustic spacing between the two inlets to approximately 0.7X, or about 8.4 microseconds. If an approximately hypercardioid directional characteristic is desired, the appropriate internal time delay is less than half the external delay, so that the internal time delay required in the present invention would be approximately 4 microseconds. We have found that an acoustic resistance of only 680 Ohms will provide the required time delay. This value is about one-third of the resistance used in conventional hearing aid directional microphone capsules, and leads to special problems as described below.

As shown in FIG. 5, microphone cartridges 20 and 30 are wired to equalization circuit 60 with wires 26 and 28 respectively. Circuit 60 provides equalization for the directional microphone response and convenient solder pads to allow the hearing aid manufacturer to connect to both the omnidirectional and equalized directional microphone electrical outputs. An additional output is also provided for the directional microphone without equalization.

FIG. 5 shows a schematic drawing of one embodiment of equalization circuit 60. Input resistor 61 can be selected from among several available values 61A through 61E at the time of manufacture, allowing the sensitivity of the equalized directional microphone to be made equal to that of the omnidirectional microphone.

Transistors 76 and 77 form a high gain inverting amplifier 160, so that the feedback path consisting of resistor 64 and resistor 62 and capacitor 73 can be chosen to provide compensation for the lower gain and the low frequency rolloff of the

directional microphone.

Suitable values for the components in equalization circuit 60 are:

	61A	56K Ω
	61B	47K Ω
5	61C	39K Ω
	61D	33K Ω
	61E	27K Ω
	62	18K Ω
	63	1M Ω
10	64	47K Ω
	65	22K Ω
	66	22K Ω
	67	1M Ω
	68	1M Ω
15	71	0.047 μ F
	72	0.1 μ F
	73	1000 pF
	74	0.047 μ F
	76	2N3904
20	77	2N3906

Circuit 60 has power supply solder pads VBAT, ground pad GND, omnidirectional microphone signal output pad OMNI, directional microphone signal output pad DIR, and equalized directional microphone output pad DIR-EQ.

FIG. 6 shows an undesirable peak in the directional microphone frequency response curve 41 at approximately 4 kHz. This results when a single resistance such as 680 Ω is chosen for resistor 81 in the rear inlet tube 85 of the microphone 20, and a single resistance such as 0 Ω is chosen for resistor 82 in the front inlet tube 86 of Figure 3. This value provides a time delay of approximately 4 microseconds as required to obtain good directivity in accordance with the present

invention when the capsule 40 is mounted on the head in an ITE hearing aid, but produces an undesirable peak. Curve 42 of FIG. 6 shows the frequency response obtained when a total resistance of 2500 Ohms is chosen instead for the combination of resistors 81 and 82 to provide the desired response smoothness. The values of resistors 81 and 82 is then chosen to provide the required time delay of approximately 4 microseconds. We have found that a value of 1500 Ω for resistor 82 and 1000 Ω for resistor 81 provides a desired combination of response smoothness and time delay when a Knowles Electronics TM-series microphone cartridge is used for microphone 20, as shown in curve 42 of FIG. 6 and the polar plots of FIG. 8. We have also found that a value of 1250 Ω for resistor 82 and 1250 Ω for resistor 81 provides a similar desired combination of response smoothness and time delay.

FIG. 7 shows the on-axis frequency response 43 of the omnidirectional microphone 30 and on-axis frequency response 44 of the directional microphone 20 after equalization with the circuit of FIG. 5. Both curves were obtained in an anechoic chamber with the capsule 40 of the present invention mounted in an ITE hearing aid placed in the ear of a KEMAR Mannequin.

FIG. 8 shows polar plots of the directional microphone of the present invention obtained on a KEMAR Mannequin (Right Ear). Table 1 below gives the measurement frequency and the corresponding polar response curve number, Directivity Index, and Articulation Index weighing number.

TABLE 1

	Directivity			
	<u>Frequency</u>	<u>Curve #</u>	<u>Index</u>	<u>AI weighing</u>
25	0.5 kHz	31	3.5 dB	0.20
	1 kHz	32	3.1 dB	0.23
	2 kHz	33	6.3 dB	0.33
	4 kHz	34	6.0 dB	0.24
	6 kHz	35	3.7 dB	0.0
30	8 kHz	36	2.4 dB	0.0

The Directivity Index values give an Articulation-Index-weighted average Directivity Index of 4.7 dB. To the applicant's knowledge, this is the highest figure of merit yet achieved in a headworn hearing aid microphone.

FIG. 9 shows still another embodiment of the capsule of the present invention. Capsule 140 includes top plate 180 which contains molded sound passages 185 and 186 in a manifold type construction, eliminating the need for coupling tubes 85 and 86 of Figure 4 and their time consuming assembly operations. Gasket 170 may be cut from a thin foam with adhesive on both sides to provide ready seal for microphone cartridges 20 and 30 as well as top plate 180. Cylinder 150 may be molded in place around the microphone cartridges, leaving opening 187 to cooperate with passage 185 of top plate 180. Circuit 60 provides equalization and solder pads as described above with respect to FIG. 4.

By mounting microphone cartridges 20 and 30 adjacent to each other in Capsule 140, a single inlet 184 provides sound access to both microphone cartridges 20 and 30, so that resistor 182 provides damping for both cartridges. In this application, the presence of the second cartridge approximately doubles the acoustic load, so to a first approximation only one half the value for acoustic resistor 182 is required. As before, the values of resistors 182 and 181 are chosen to provide both response smoothness and the correct time delay for proper directional operation.

Alternately, plate 180 can be molded with three inlets as is done with plate 80 of FIG. 3. In this case, the front sound passage 186 and rear sound passage 185 plus 187 can be chosen to duplicate the acoustic properties of tubes 85 and 86 of FIG. 3, so that similar acoustic resistors may be used to provide the desired response and polar plots.

FIG. 10 shows a schematic of a simple low frequency adjustment circuit 200, where a trimpot adjustment of the directional microphone low frequency response can be obtained by adding a variable trimpot resistor 202 and fixed resistor 201 connected in series between the DIR-EQ pad capacitor 205 and ground 225. The output 210 of circuit 200 is connected to switch 55, as is the output 230 of the

omnidirectional microphone. By adjusting resistor 202, the low frequency roll-off introduced by circuit 200 can be varied between approximately 200 and 2000 Hz dependent upon the input impedance of the hearing aid amplifier. Switch 55 permits the user to select omnidirectional or directional operation. Although the same frequency response in both cases is often desirable, rolling off the lows when switching to directional mode can provide a more dramatic comparison between switch positions with little or no loss in intelligibility in most cases, according to dozens of research studies over the last decade. In some cases, some low frequency attenuation for the directional microphone response will be desired in high level noise as well as with windy conditions. The degree of such attenuation can be selected by the dispenser by adjusting trimpot 202.

FIG. 11 illustrates yet another embodiment of a microphone assembly built in accordance with the present invention. Microphone assembly 301 is comprised of assembly portions or halves 303 and 305. As explained more completely below with respect to FIGS. 12 and 13, the portions 303 and 305 fit or snap together during assembly to form the microphone assembly 301. Each of the assembly portions 303 and 305 include a retaining member 307 and a releasable retaining member 309 for releasable mounting of a printed circuit board 311 in the microphone assembly 301. As can be seen, portions of the printed circuit board 311 are received under the retaining members 307 and releasable retaining members 309. The microphone assembly 301 further includes a protective screen assembly 313. It should be noted that this assembly provides an additional benefit of allowing the color of the hearing aid to be matched to that of the microphone.

FIGS. 12 and 13 illustrate different exploded views of the microphone assembly 301 of FIG. 11. FIGS. 12 and 13 show assembly portions 303 and 305, retaining members 307, releasable retaining members 309, printed circuit board 311 and protective screen assembly 313, all disassembled. FIGS. 12 and 13 also illustrate directional microphone cartridge 315 and omnidirectional microphone cartridge 317. Directional microphone cartridge 315 has sound openings 319 and 320 for receiving sound energy therethrough. Omnidirectional microphone

cartridge 323 likewise has a sound inlet 329 for receiving sound energy therethrough. Directional microphone cartridge 315 also has a surface 321, and omnidirectional microphone cartridge 317 has a similar surface 323, both for mounting the printed circuit board 311 on the directional microphone cartridge 315 and the omnidirectional microphone cartridge 317. The directional microphone cartridge 315 and omnidirectional microphone cartridge 317 are in turn mounted on the assembly portions 303 and 305.

More specifically, assembly portion 303 has a surface 325, and assembly portion 305 has a similar surface (not shown) that together mount thereon the directional microphone capsule 315. Assembly portion 303 also has a surface 327, and assembly portion 305 has a similar surface (not shown), that together mount thereon the omnidirectional microphone capsule 317. Inlet port 329 of the omnidirectional microphone capsule 317 fits into a recess 331 of assembly portion 303 and a recess 332 of assembly portion 305.

Note the interference between pins 335 and holes 333 is such that the parts may be assembled in a press fit manner with adequate retention. Furthermore, they allow portions 303 and 305 to be separated for purposes of repair or salvage. Assembly portion 303 also has a pocket 337 that receives therein acoustical damper or resistor 339 and o-ring 341. Assembly portion 305 likewise has a pocket 338 that receives therein acoustical damper or resistor 340 and o-ring 342. O-rings 341 and 342 are preferably made of a resilient material, such as, for example, silicone rubber.

Further, each of assembly portions 303 and 305 includes a recess 312 that receives a corresponding mating element 314 of the protective screen assembly 313, thereby enabling snap assembly of the protective screen assembly 313 onto the assembly portions 303 and 305 when those portions are in an assembled relationship. The protective screen assembly 313 further includes acoustical openings 343 and 345 that permit acoustical coupling of sound energy to sound openings 319 and 320 of the directional microphone cartridge 315 via sound inlet passages 352 and 344 in the assembly portions 303 and 305, respectively. Sound

inlet passage 352 has an input end located near acoustical opening 343 and an output end located near sound opening 320. Similarly, sound inlet passage 344 has an input end located near acoustical opening 345 and an output end located near sound opening 319. The protective screen assembly 313 also has an acoustical opening 347 that permits acoustical coupling of sound energy to the omnidirectional microphone cartridge 317 via sound inlet port 329. Each of the acoustical openings 343, 345 and 347 receive screen elements 349 that reduce wind noise and help prevent ear wax or other debris from entering the sound inlet passages 352 and 344 and the inlet port 329.

As mentioned above, the printed circuit board 311 is mounted directly on surfaces 321 and 323 of the directional microphone capsule 315 and omnidirectional microphone capsule 317, respectively. Such a configuration enables the printed circuit board to be soldered directly to the microphone capsules 315 and 317, eliminating the need for any separate wiring. In addition, also as mentioned above, portions of the printed circuit board 311 are received under retaining members 307 and releasable retaining members 309. Thus, if the microphone assembly 301 is damaged during, for example, manufacture, the printed circuit board 311 and microphone capsules 315 and 317, the more costly components, may be removed as a unit and thus salvaged.

FIG. 14 is a cross-sectional view of the microphone assembly of FIG. 11. As can be seen, assembly portions 303 and 305 are in an assembled relationship, with directional microphone cartridge 315 mounted thereon. Also as can be seen, acoustic damper 340 and o-ring 342 are mounted on a surface inside pocket 338, and acoustic damper 339 and o-ring 341 are likewise mounted on a surface inside pocket 337. O-rings 341 and 342 engage surfaces of the microphone cartridge to provide a seal around sound openings 320 and 319, respectively. Adhesive material may be used to cement the acoustic dampers and o-rings in the pockets, as well as to cement the o-rings against the surfaces of the microphone cartridge 315. Further, the printed circuit board 311 is mounted on the microphone cartridges 315 and 317 and is retained by retaining members 307 and 309 as discussed above.

During operation, sound energy enters the acoustical opening 345 in protective screen assembly 313, travels through sound inlet passage 344, the acoustic damper 340 and o-ring 342 and enters sound opening 319 of directional microphone 315 for acoustical coupling with a microphone diaphragm (not shown) as discussed above. Likewise, sound energy also enters the acoustical opening 343 in protective screen assembly 313, travels through sound inlet passage 352 the acoustic damper 339 and o-ring 341 and enters sound opening 320 for acoustical coupling with the microphone diaphragm.

FIG. 15 is an enlarged view of the section 351 of FIG. 14 showing sound inlet passage 344, acoustical damper 340, o-ring 342, pocket 338, and sound opening 319. FIG. 15 better illustrates the mounting of acoustical damper 340 and o-ring 342 on a surface 353 in pocket 338; as well as the mounting of the o-ring 342 against a surface 355 of the microphone cartridge 315 to seal sound opening 319.

As discussed above, two acoustic dampers or resistors are used in the present invention to collectively determine a polar response of the directional microphone and smooth out the frequency response. In other words, these two acoustic dampers primarily perform separate functions. More particularly, the first or "front" acoustic damper generally has a small volume between it and the moving microphone diaphragm and is used primarily, but not exclusively, for damping (i.e., frequency response smoothing). The second or "rear" acoustic damper generally has a relatively larger volume between it and the moving microphone diaphragm and is used primarily, but not exclusively, to produce a time delay (as in the prior art). Such an arrangement allows a relatively high front resistance value for frequency response smoothing without canceling the time delay created by the rear resistor.

In the embodiment of FIG. 4, these two acoustic resistors 81 and 82 are located near outer openings of sound inlets 83 and 84. In the embodiment of FIGS. 11-15, however, the acoustic dampers 339 and 340 are located at opposite ends of sound inlet passages 352 and 344, respectively, near the sound openings 320 and 319 of microphone cartridge 315. Placement of the acoustical dampers 339 and 340 as such provides greater protection from contamination that would tend to increase

their acoustical value and thus degrade the performance of the directional microphone. Also, placement of the dampers as such helps prevent damage that may occur thereto by improper installation of the protective screen assembly 313, such as, for example, if the mating elements 314 of the protective screen assembly 313 were mistakenly placed in the sound inlet passages 352 and 344.

In addition, placement of the dampers as such enables the o-ring sealing arrangement discussed above. By sealing the acoustical dampers and o-rings together and against surfaces in the pockets 338 and 337, and by sealing the o-rings 342 and 341 against the microphone cartridge 315 to surround the sound openings 319 and 320, the embodiment of FIGS. 11-15 reduces the amount of sound pick up entering the sound openings 319 and 320 via paths other than the desired sound inlet passages 344 and 352. FIG. 16 illustrates the frequency response of the directional microphone assembly of FIGS. 11-15, along with the frequency response of that assembly if only a single acoustic damper were used as suggested by the prior art. Curve 401 of FIG. 16 represents the frequency response of the directional microphone assembly of FIGS. 11-15 having only a single 1500 Ω acoustic damper as taught by the prior art (i.e., no front or frequency response shaping resistor is used). Curve 403 of FIG. 16 represents the frequency response of the directional microphone assembly of FIGS. 11-15 having two resistors, here each having a value of 1500 Ω , as taught by the present invention. As can be seen, at a frequency of about 4 kHz, the frequency response is smoothed by the addition of the second resistor.

FIG. 17 represents the polar characteristics of the microphone assembly of FIGS. 11-15 under free field conditions where only a single 1500 Ω acoustic damper is used (i.e., no front or frequency response shaping resistor is used). Curves 405, 407, and 409 represent the characteristics at 500, 1000, and 2000 Hz, respectively, and have a directivity index of 5.5, 5.4, and 5.2 dB, respectively.

FIG. 18, on the other hand, represents that polar characteristics of the microphone assembly of FIGS. 11-15 where two acoustic dampers are used, each

having a value of 1500 Ω . Curves 411, 413, and 415 represent the characteristics at 500, 1000, and 2000 Hz, respectively, and have a directivity index of 6.0, 5.7, and 5.5 dB, respectively.

Many modifications and variations of the present invention are possible in light of the above teachings. Thus, it is to be understood that, within the scope of the appended claims, the invention may be practiced otherwise than as described hereinabove.

CLAIMS:

1. A directional microphone assembly for an in-the-ear hearing aid comprising:

5 a directional microphone cartridge having a first sound opening and a second sound opening;

a first sound inlet passage acoustically coupling sound energy to the first sound opening, the first sound inlet passage having an input end and an output end;

10 a second sound inlet passage acoustically coupling sound energy to the second sound opening, the second sound inlet passage having an input end and an output end;

a first acoustic damper located at the output end of the first sound inlet passage; and

15 a second acoustic damper located at the output end of the second sound inlet passage.

2. The directional microphone assembly of claim 1 further comprising a first o-ring located adjacent the first acoustic damper and a second o-ring located adjacent the second acoustic damper.

20 3. The directional microphone assembly of claim 2 wherein the first o-ring is located between the first acoustic damper and the first sound opening, and the second o-ring is located between the second acoustic damper and the second sound opening.

25 4. The directional microphone assembly of claim 1 further comprising a microphone assembly housing, and wherein the first and second sound inlet passages are formed in the housing, and the microphone cartridge is mounted in the housing.

5. The directional microphone assembly of claim 4 further comprising a protective screen mounted on the housing and having a first acoustical opening coupling sound energy to the input end of the first sound inlet passage and a second acoustical opening coupling sound energy to the input end of the second sound inlet passage.

6. The directional microphone assembly of claim 4 further comprising a printed circuit board releasably mounted on the housing and operatively connected to the microphone cartridge.

7. The directional microphone assembly of claim 4 wherein the housing is comprised of a first portion having the first sound inlet passage formed therein and a second portion having the second sound inlet passage formed therein, the first portion having at least one recess and the second portion having at least one mating member, the at least one recess receiving the at least one mating member in mating relation during assembly of the housing.

8. The directional microphone assembly of claim 4 further comprising a first pocket located in the housing for seating the first acoustic damper and a second pocket located in the housing for seating the second acoustic damper.

9. The directional microphone assembly of claim 8 wherein the first pocket and second pockets also respectively seat first and second o-rings.

10. The directional microphone assembly of claim 6 wherein the printed circuit board rests on a surface of the microphone cartridge and is directly soldered to the microphone cartridge.

11. The directional microphone assembly of claim 6 further comprising at least

one releasable retaining member forming part of the housing that assists in retaining the circuit board in a mounted position on the housing and enables removal of the circuit board from the housing.

12. The directional microphone assembly of claim 1 wherein the first acoustic damper primarily affects the frequency response of the directional microphone assembly and the second acoustic damper primarily affects the directivity index of the directional microphone assembly.

13. A directional microphone assembly for an in-the-ear hearing aid comprising:

a directional microphone cartridge having a first sound opening and a second sound opening; and

an assembly housing comprised of a first housing portion and a second housing portion, the first housing portion having a first sound inlet passage and at least one mating recess formed therein, the second housing portion having a second sound inlet passage formed therein and at least one mating member, the at least one mating member engaging the at least one recess in mating relation during assembly of the first and second housing portions into a final assembled relationship wherein the first sound inlet passage is acoustically coupled to the first sound opening and the second sound inlet passage is acoustically coupled to the second sound opening.

14. The directional microphone assembly of claim 13 wherein the first and second sound inlet passages each have an input end and an output end, and further comprising a first acoustic damper located at the output end of the first sound inlet passage and a second acoustic damper located at the output end of the second sound inlet passage.

15. The direction microphone assembly of claim 14 further comprising a first o-

ring located adjacent the first acoustic damper and a second o-ring located adjacent the second acoustic damper.

16. The directional microphone assembly of claim 15 wherein the first o-ring is located between the first acoustic damper and the first sound opening, and the second o-ring is located between the second acoustic damper and the second sound opening.

17. The directional microphone assembly of claim 13 further comprising a protective screen mounted on the assembly housing and having a first acoustical opening coupling sound energy to the input end of the first sound inlet passage and a second acoustical opening coupling sound energy to the input end of the second sound inlet passage.

18. The microphone assembly of claim 14 further comprising a first pocket located in the first housing portion for seating the first acoustic damper and a second pocket located in the second housing portion for seating the second acoustic damper.

19. The microphone assembly of claim 18 wherein the first and second pockets also respectively seat first and second o-rings.

20. The microphone assembly of claim 13 further comprising a printed circuit board releasably mounted on the assembly housing and operatively coupled to the microphone cartridge.

21. The microphone assembly of claim 20 wherein the printed circuit board rests on a surface of the microphone cartridge and is directly soldered to the microphone cartridge.

22. The microphone assembly of claim 20 further comprising at least one releasable retaining member forming part of the housing that assists in retaining the circuit board in a mounted position on the housing and enables removal of the circuit board from the housing.

5

23. A directional microphone assembly for an in the in-the-ear hearing aid comprising:

an assembly housing having first and second sound inlet passages located therein and at least one releasable retaining member;

10

a microphone cartridge mounted on the assembly housing, the microphone cartridge having first and second sound openings, the first and second sound inlet passages acoustically coupling sound energy to the first and second sound openings, respectively; and

a printed circuit board operatively connected to the microphone cartridge and
15 releasably mounted on the assembly housing, the releasable retaining member assisting to retain the printed circuit board in a mounted position on the assembly housing and enabling removal of the printed circuit board from the assembly housing by movement of the at least one retaining member and without requiring removal of the releasable retaining member from a remainder of the assembly
20 housing.

24. The directional microphone assembly of claim 23 wherein the assembly housing further comprises at least one non-releasable retaining member, the at least one non-releasable retaining member assisting to retain the printed circuit board in
25 the mounted position on the assembly housing.

25. The directional microphone assembly of claim 23 wherein the printed circuit board rests on a surface of the microphone cartridge.

30 26. The directional microphone assembly of claim 25 wherein the printed circuit board is directly soldered to the microphone cartridge and wherein the releasable retaining member enables removal of the printed circuit board and the microphone cartridge as a unit from the assembly housing.

27. The directional microphone assembly of claim 23 wherein the first and second sound inlet passages each have an input end and an output end, and further comprising a first acoustic damper located at the output end of the first sound inlet passage and a second acoustic damper located at the output end of the second sound inlet passage.

28. The directional microphone assembly of claim 27 further comprising a first o-ring located adjacent the first acoustic damper and a second o-ring located adjacent the second acoustic damper.

29. The directional microphone assembly of claim 28 wherein the first o-ring is located between the first acoustic damper and the first sound opening and the second o-ring is located between the second acoustic damper and the second sound opening.

30. The directional microphone assembly of claim 27 further comprising a protective screen mounted on the assembly housing and having a first acoustical opening coupling sound energy to the input end of the first sound inlet passage and a second acoustical opening coupling sound energy to the input end of the second sound inlet passage.

31. The directional microphone assembly of claim 23 wherein the assembly housing is comprised of a first portion having the first sound inlet passage formed therein and a second portion having the second sound inlet passage therein, the first portion having at least one recess and the second portion having at least one mating member, the at least one recess receiving the at least one mating member in mating relation during assembly of the housing.

32. The directional microphone assembly of claim 27 further comprising a first pocket located in the housing for seating the first acoustic damper and a second pocket located in the housing for seating the second acoustic damper.

33. The directional microphone assembly of claim 32 wherein the first and second pockets also respectively seat first and second o-rings.

1/17

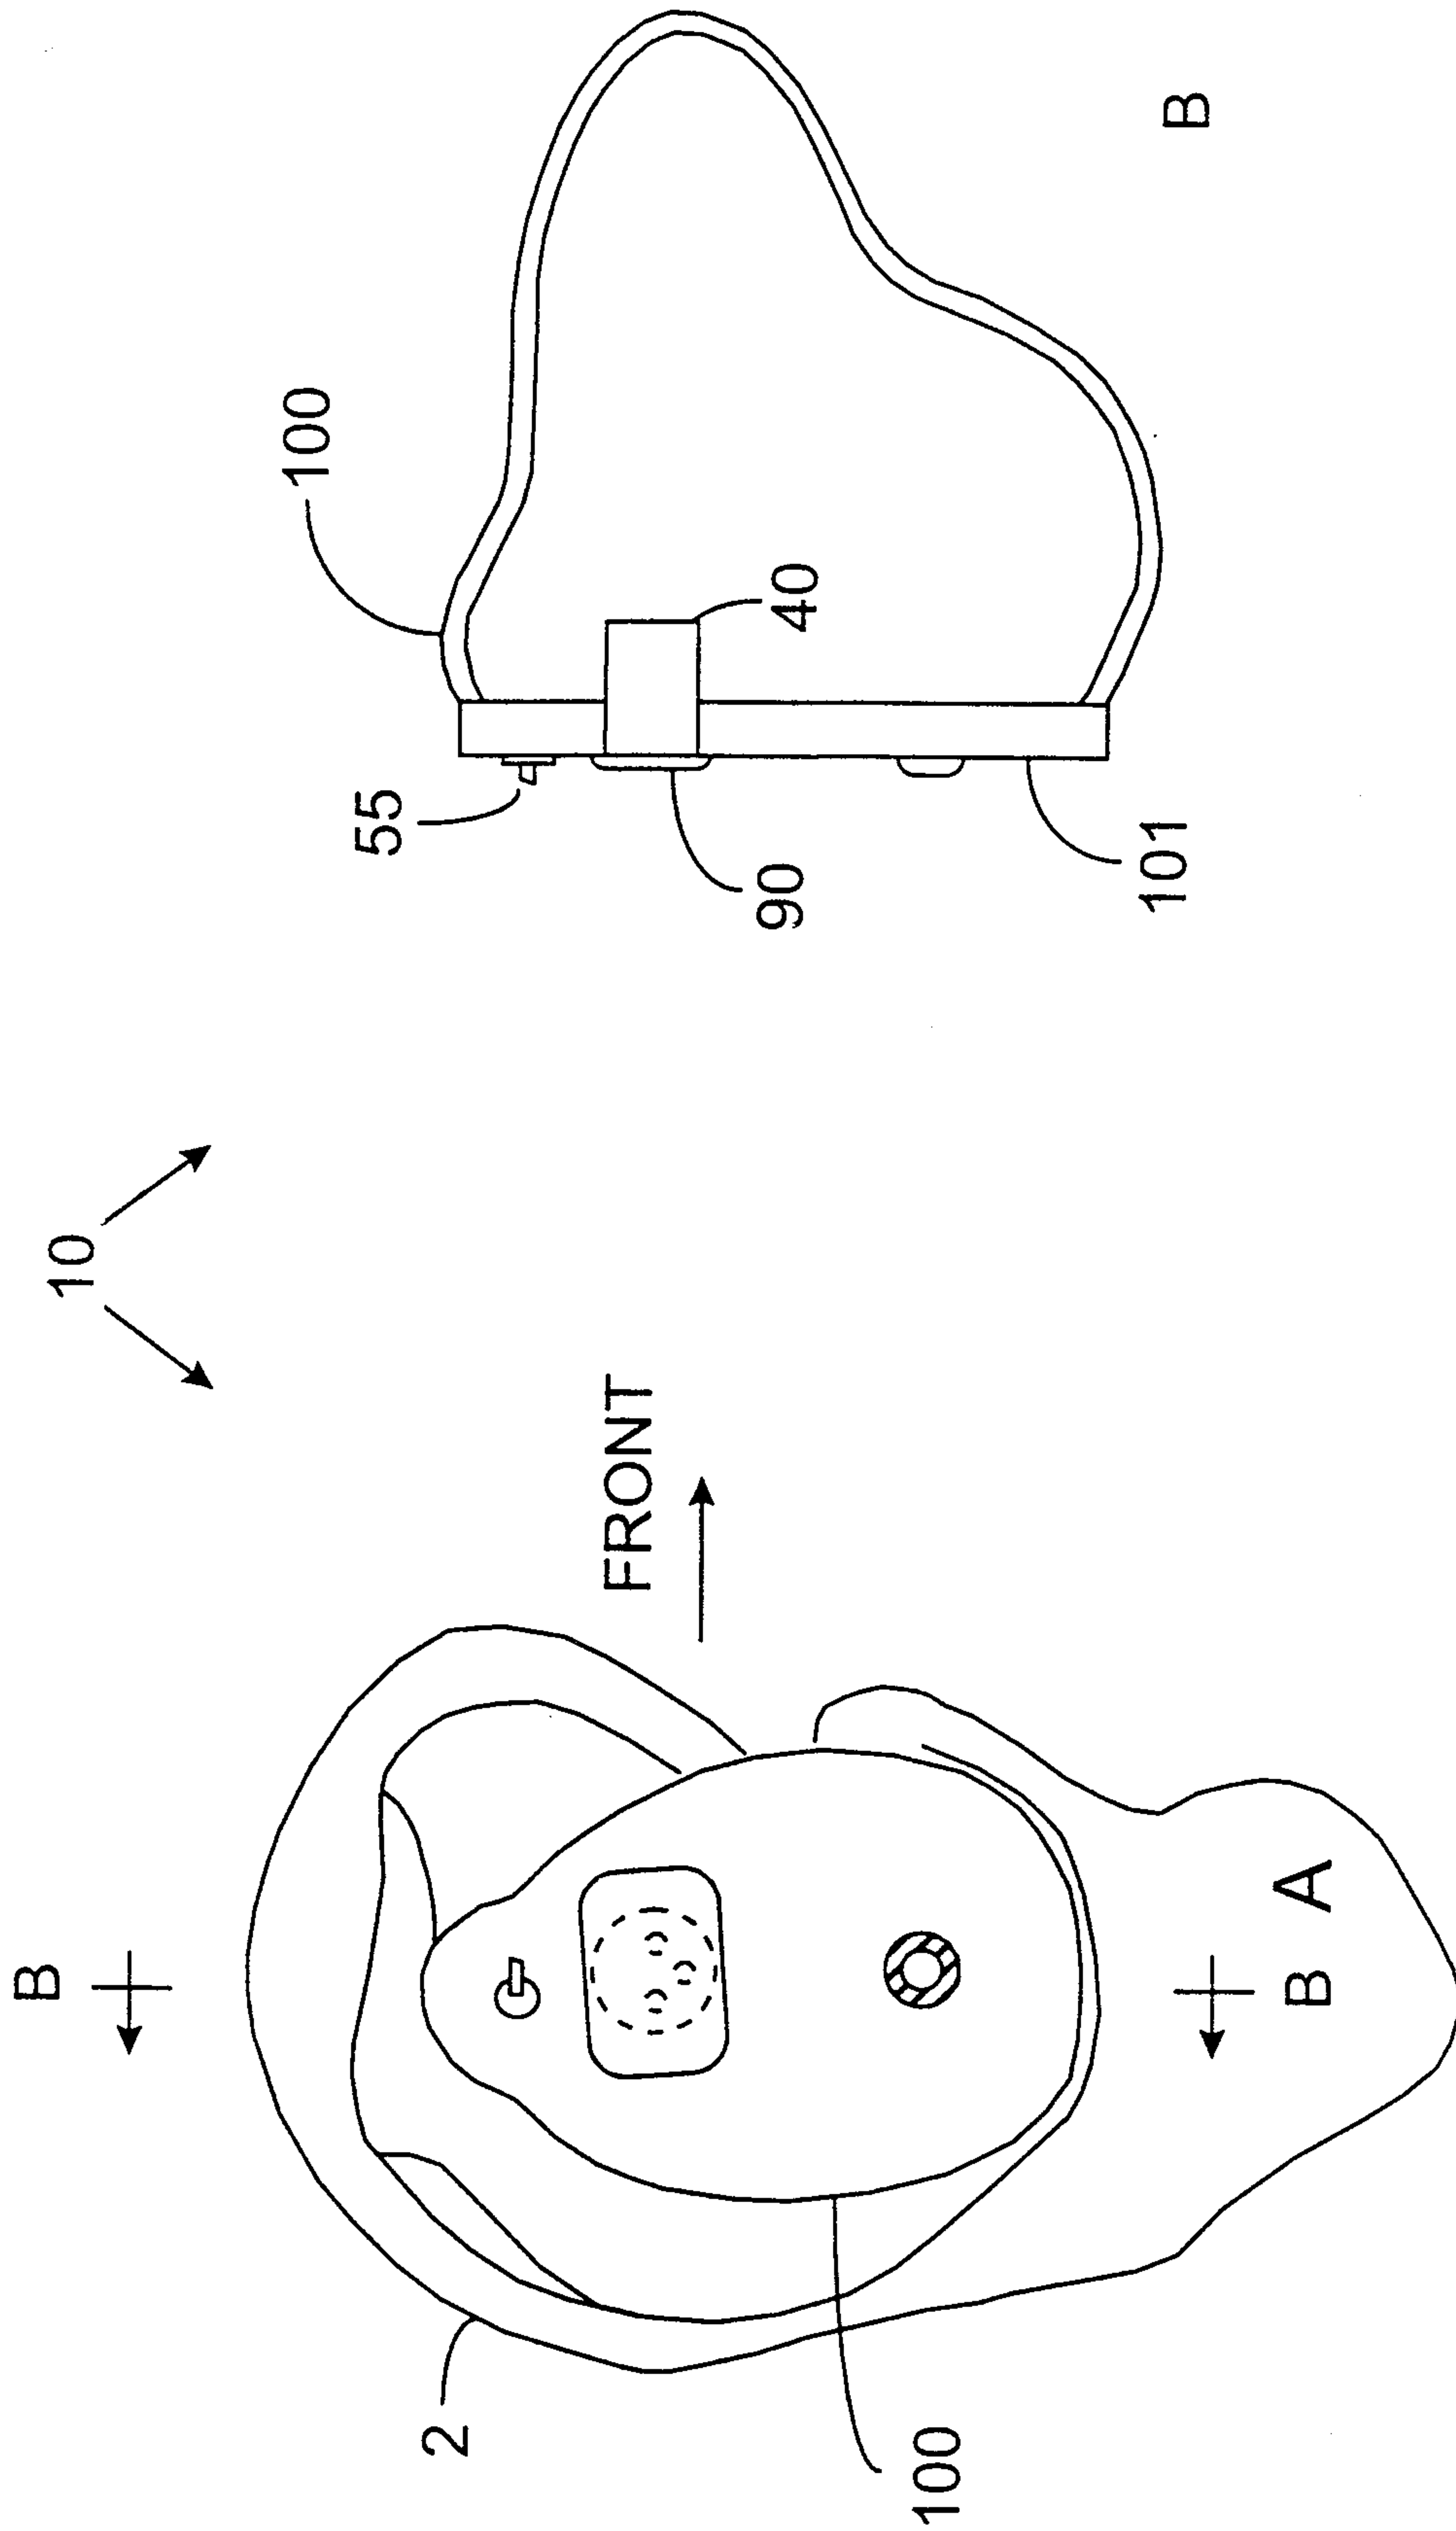


FIG. 1

2/17

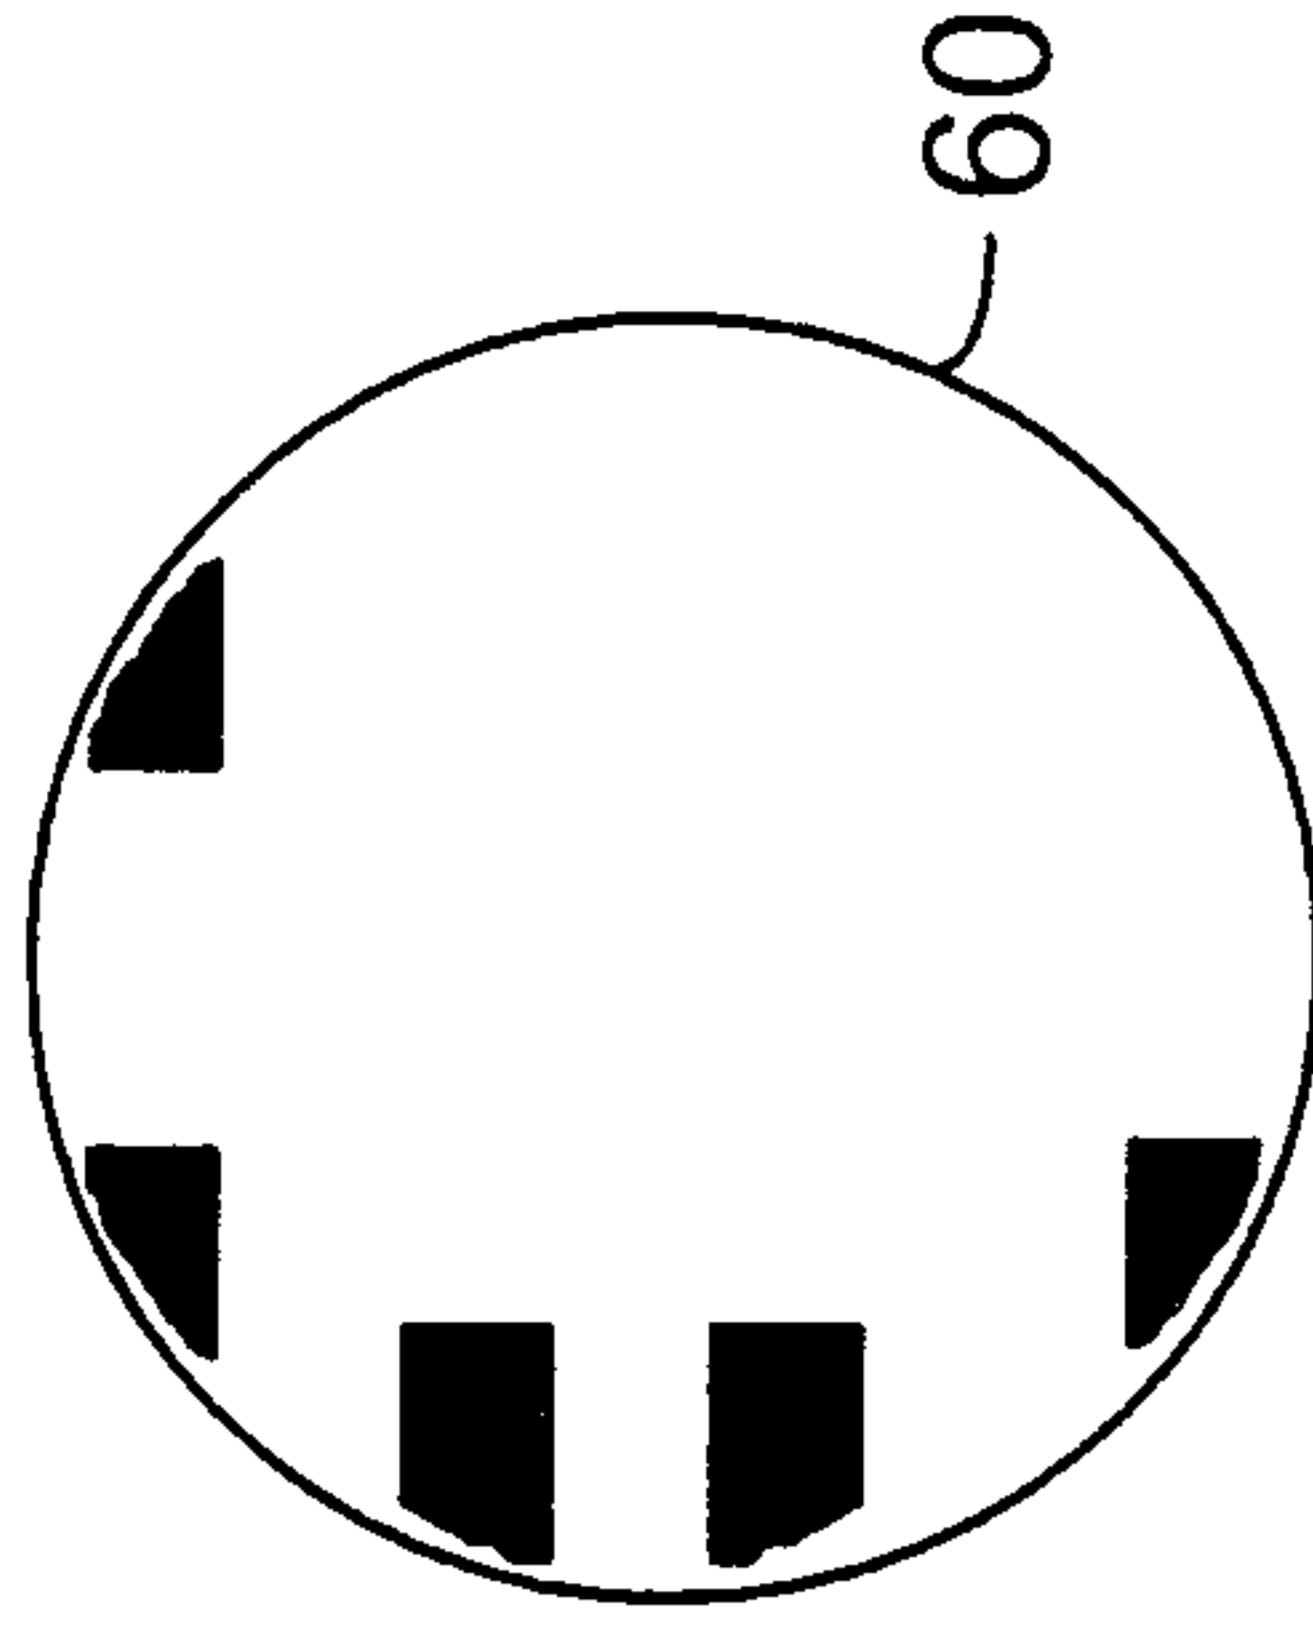


FIG. 2C

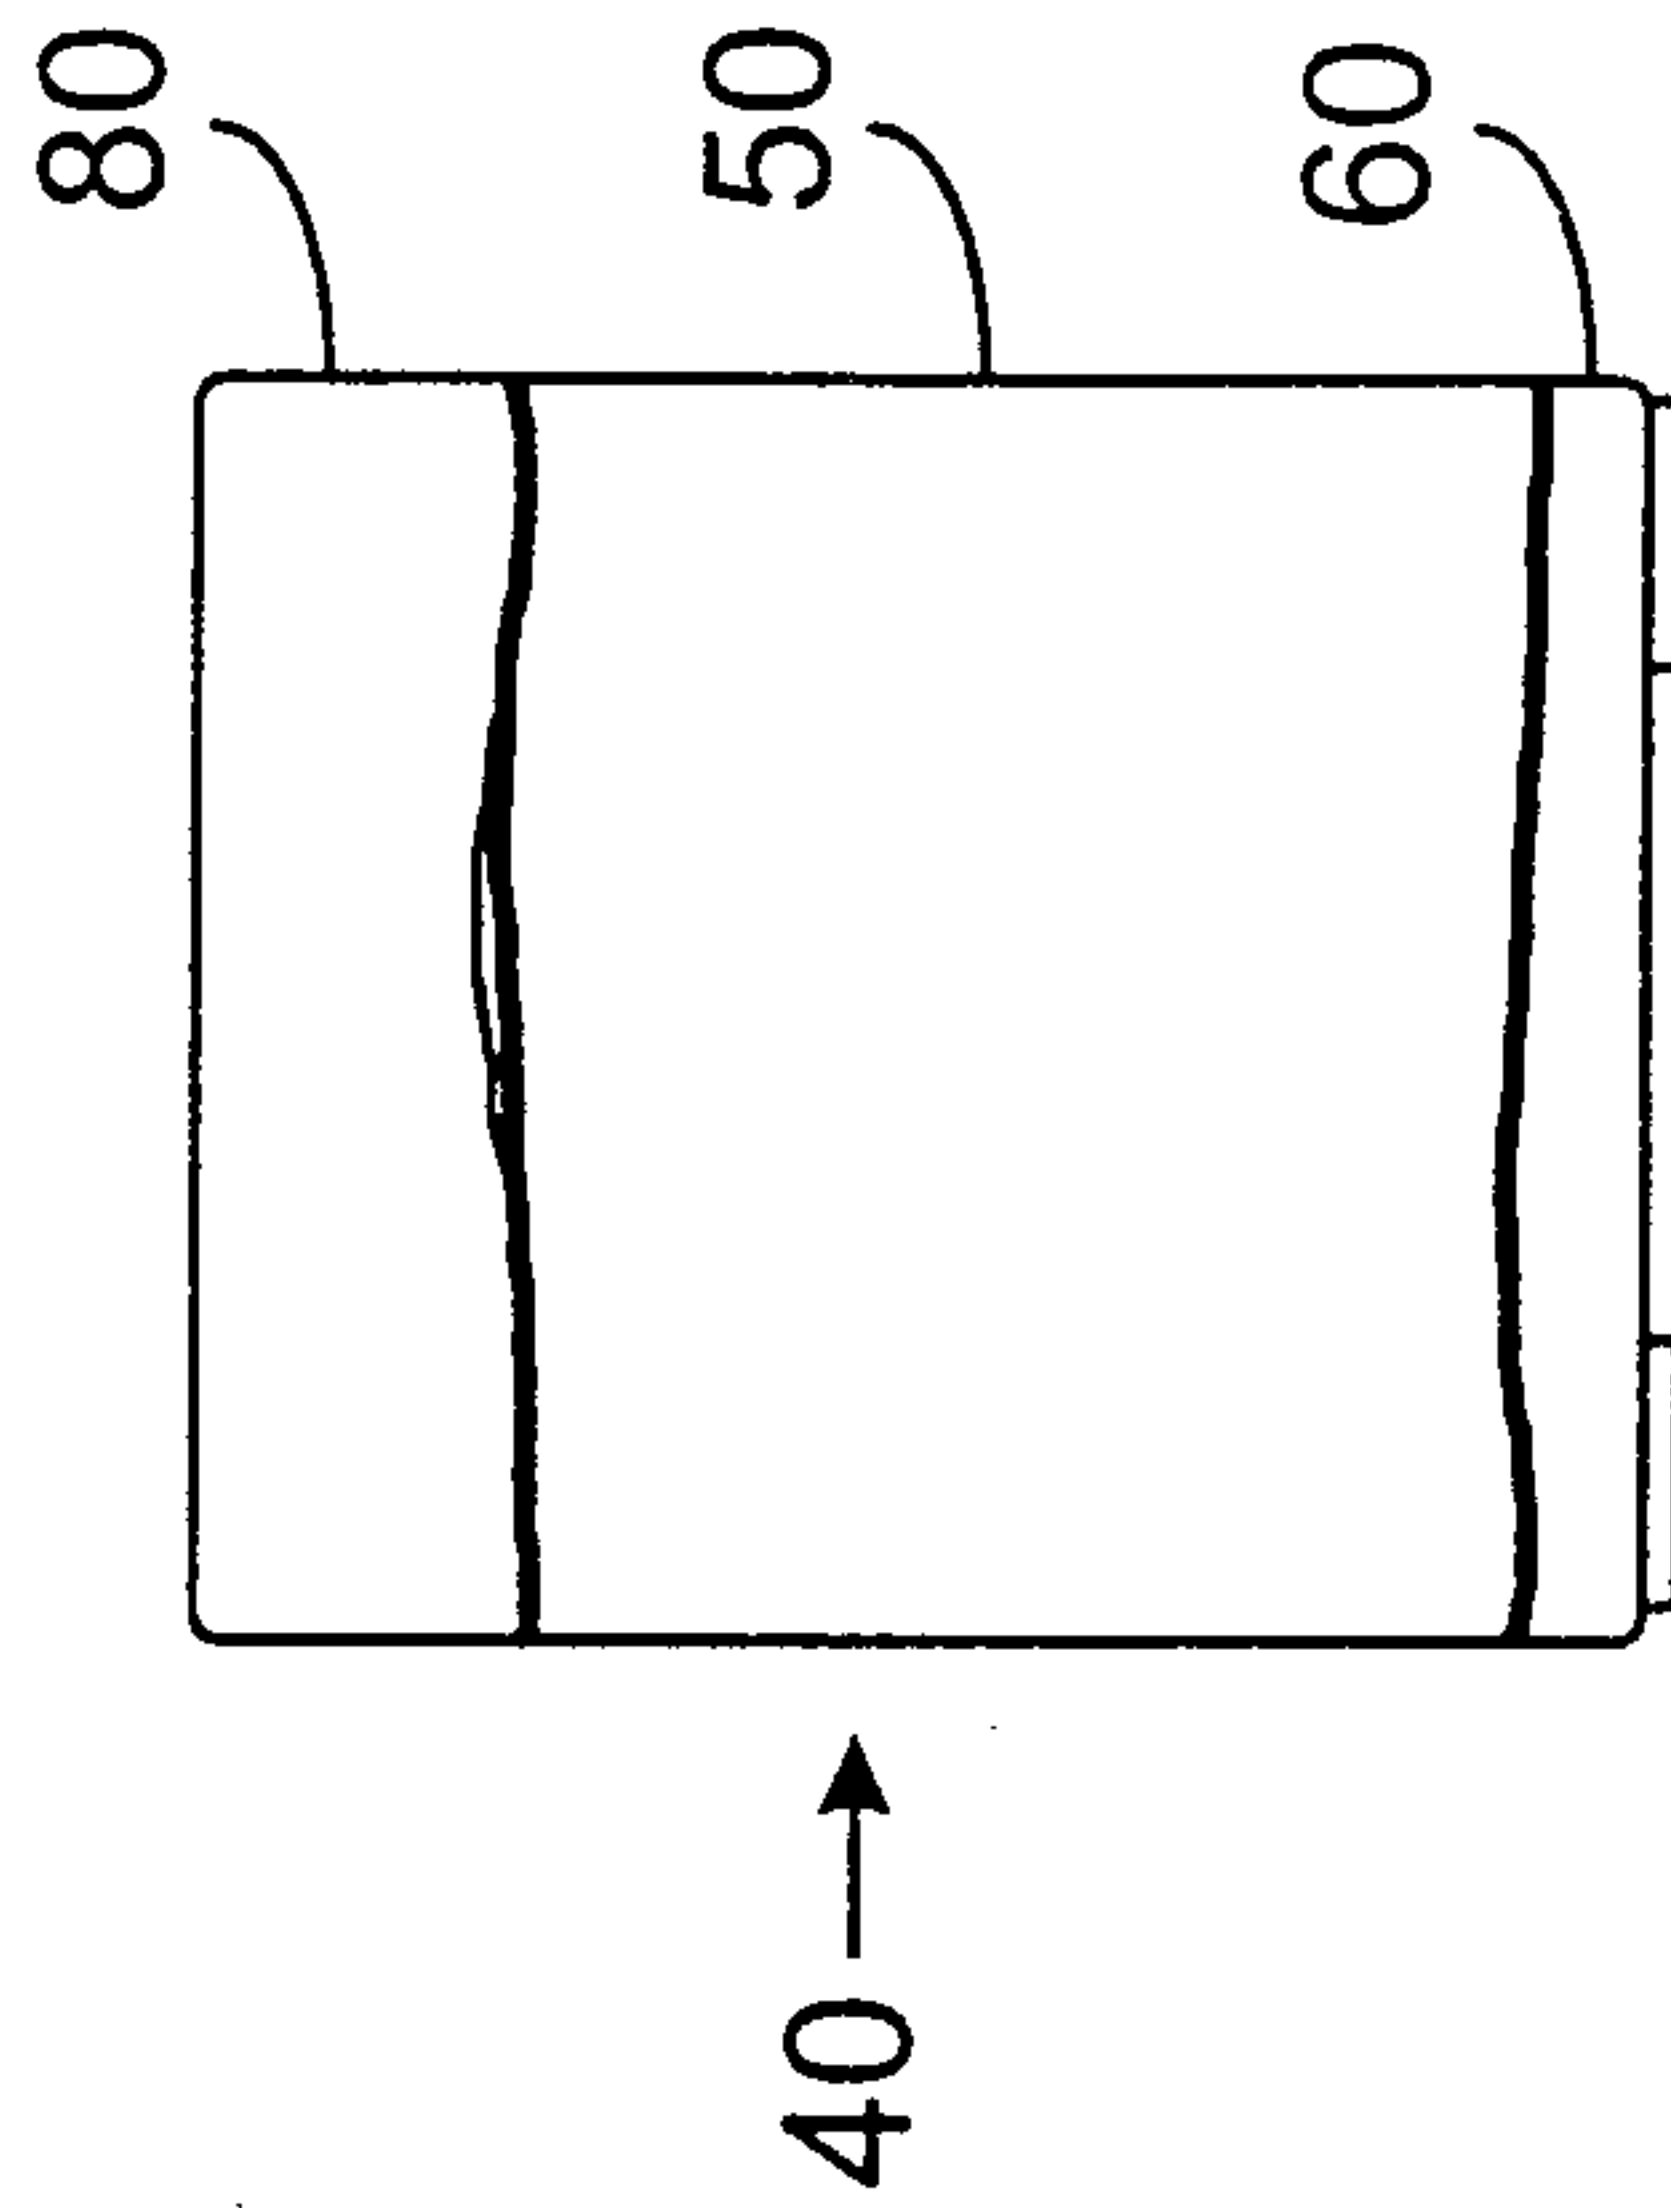


FIG. 2B

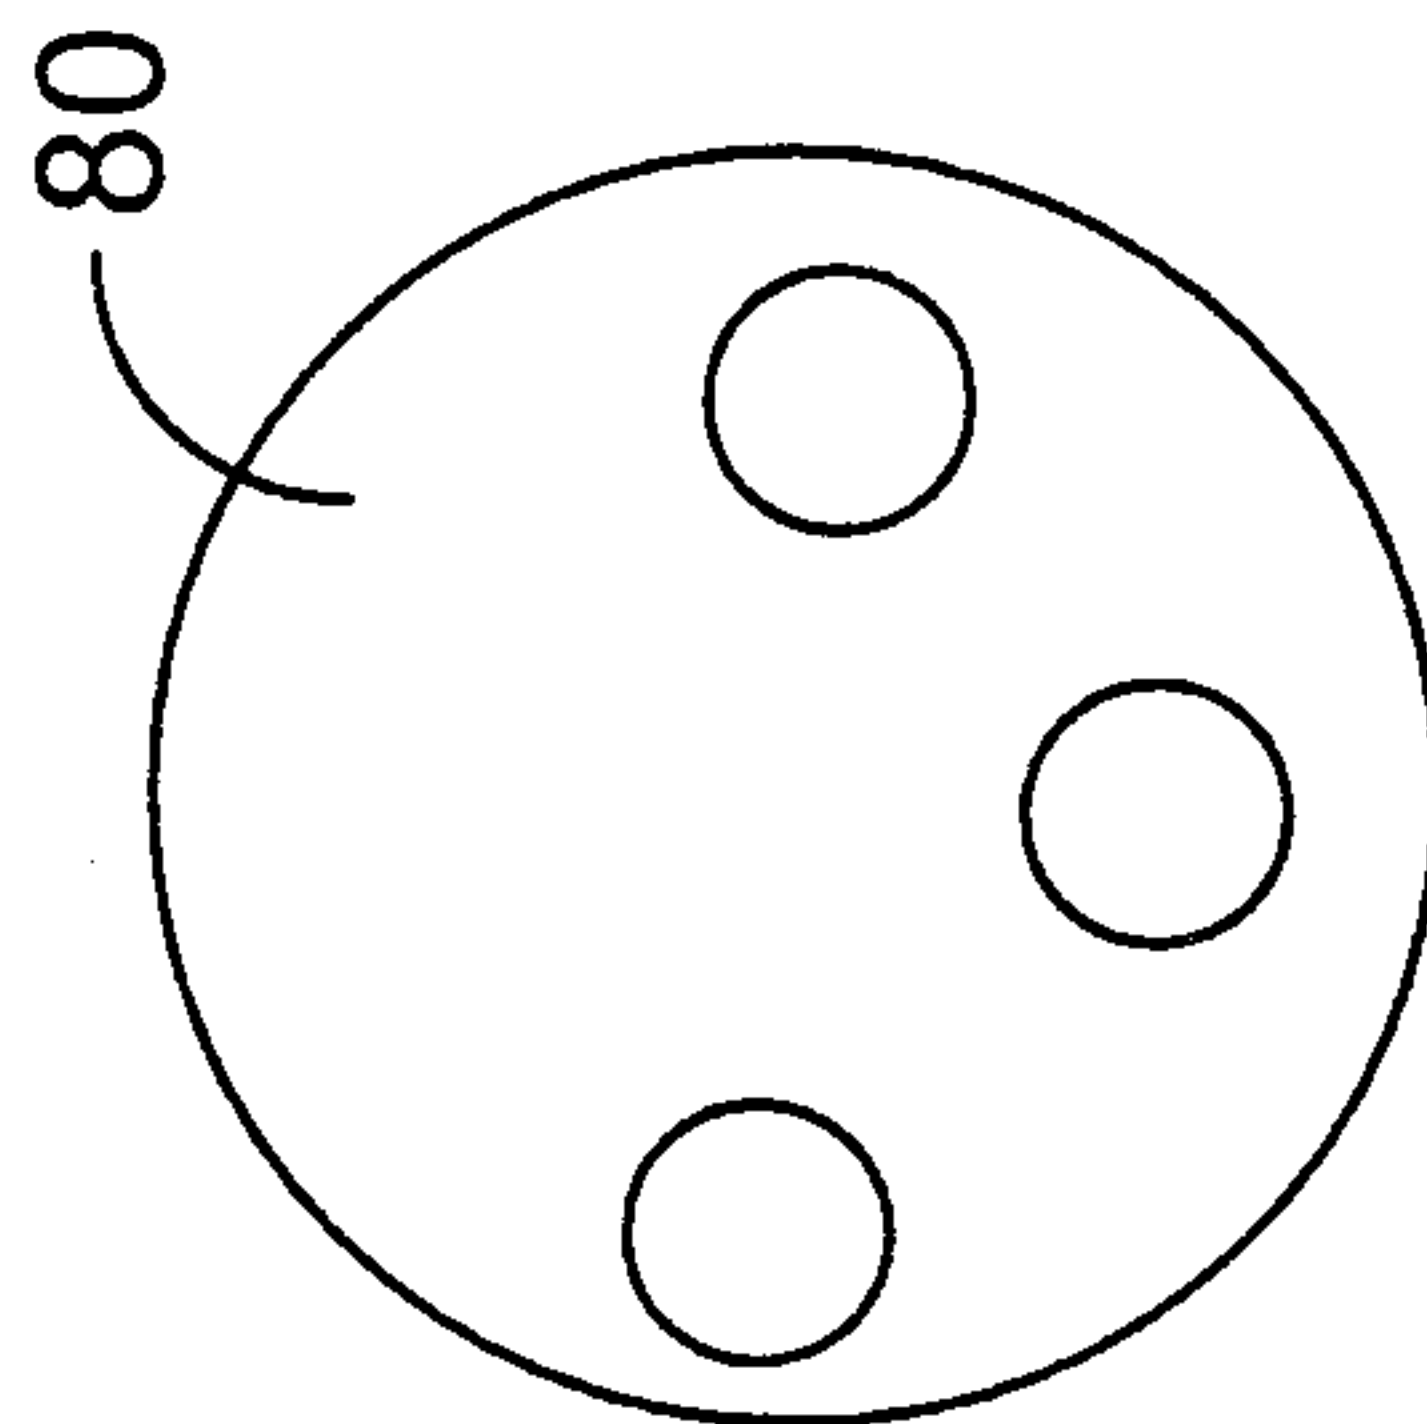
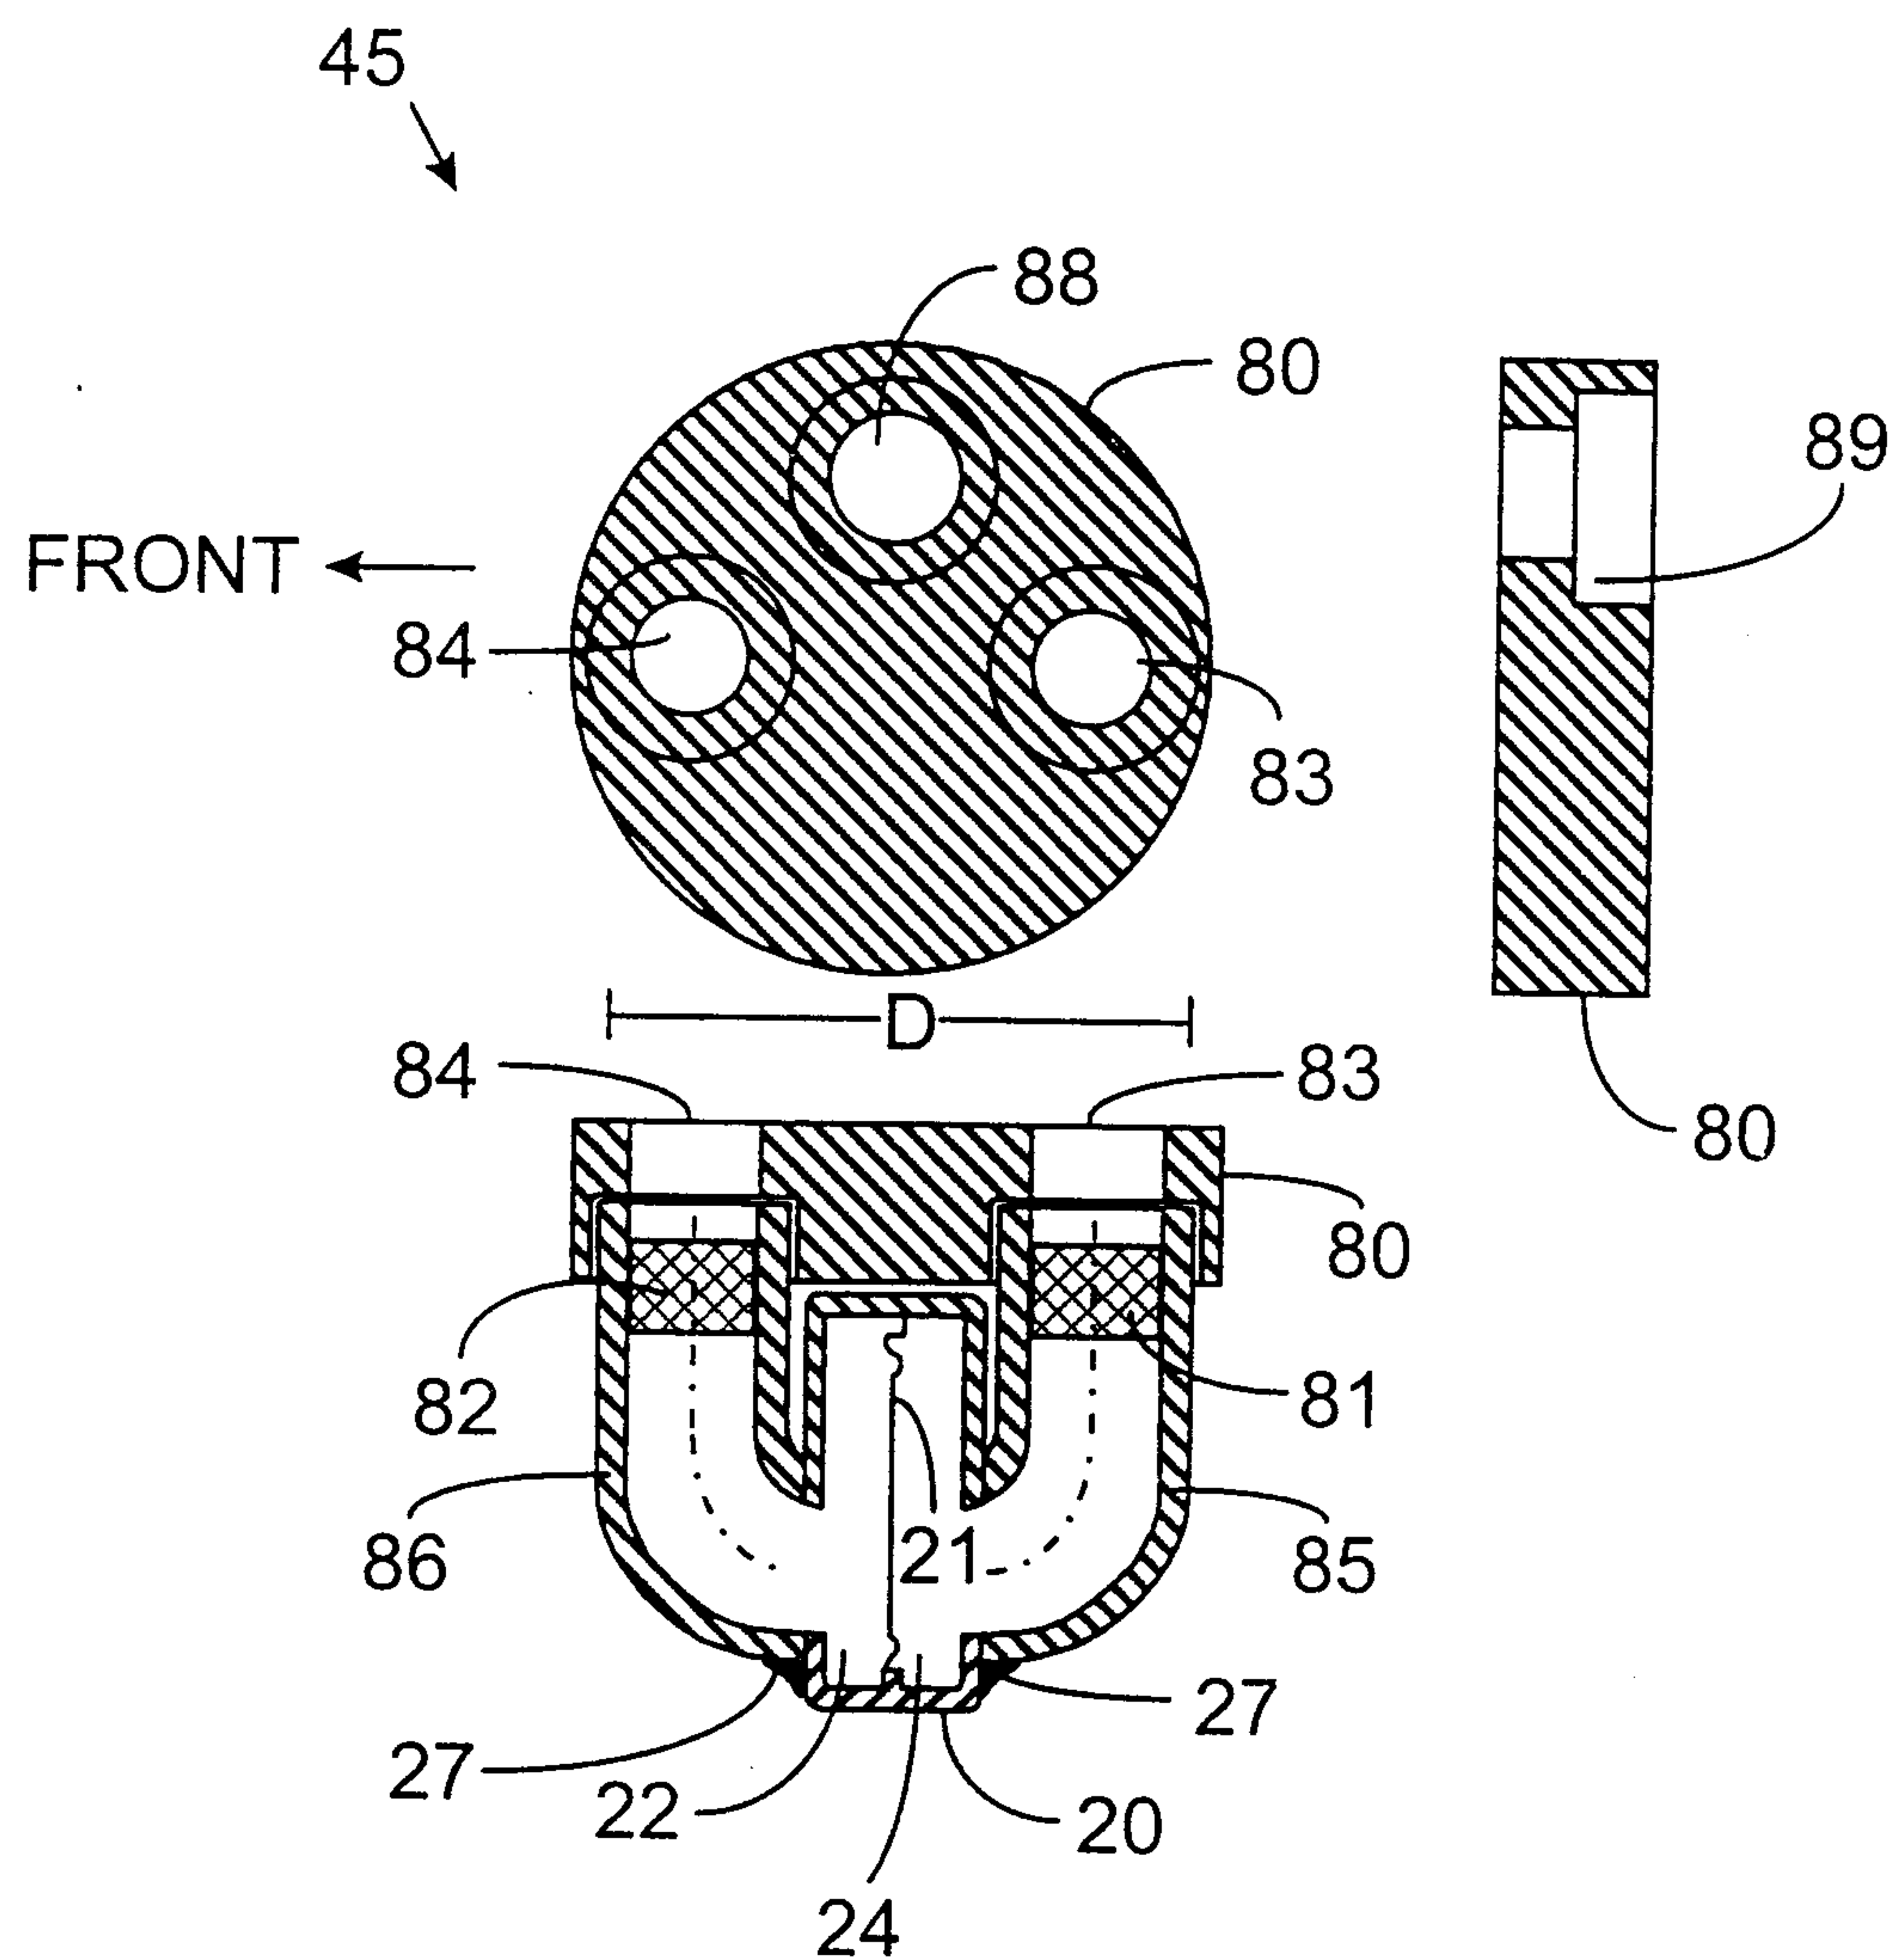
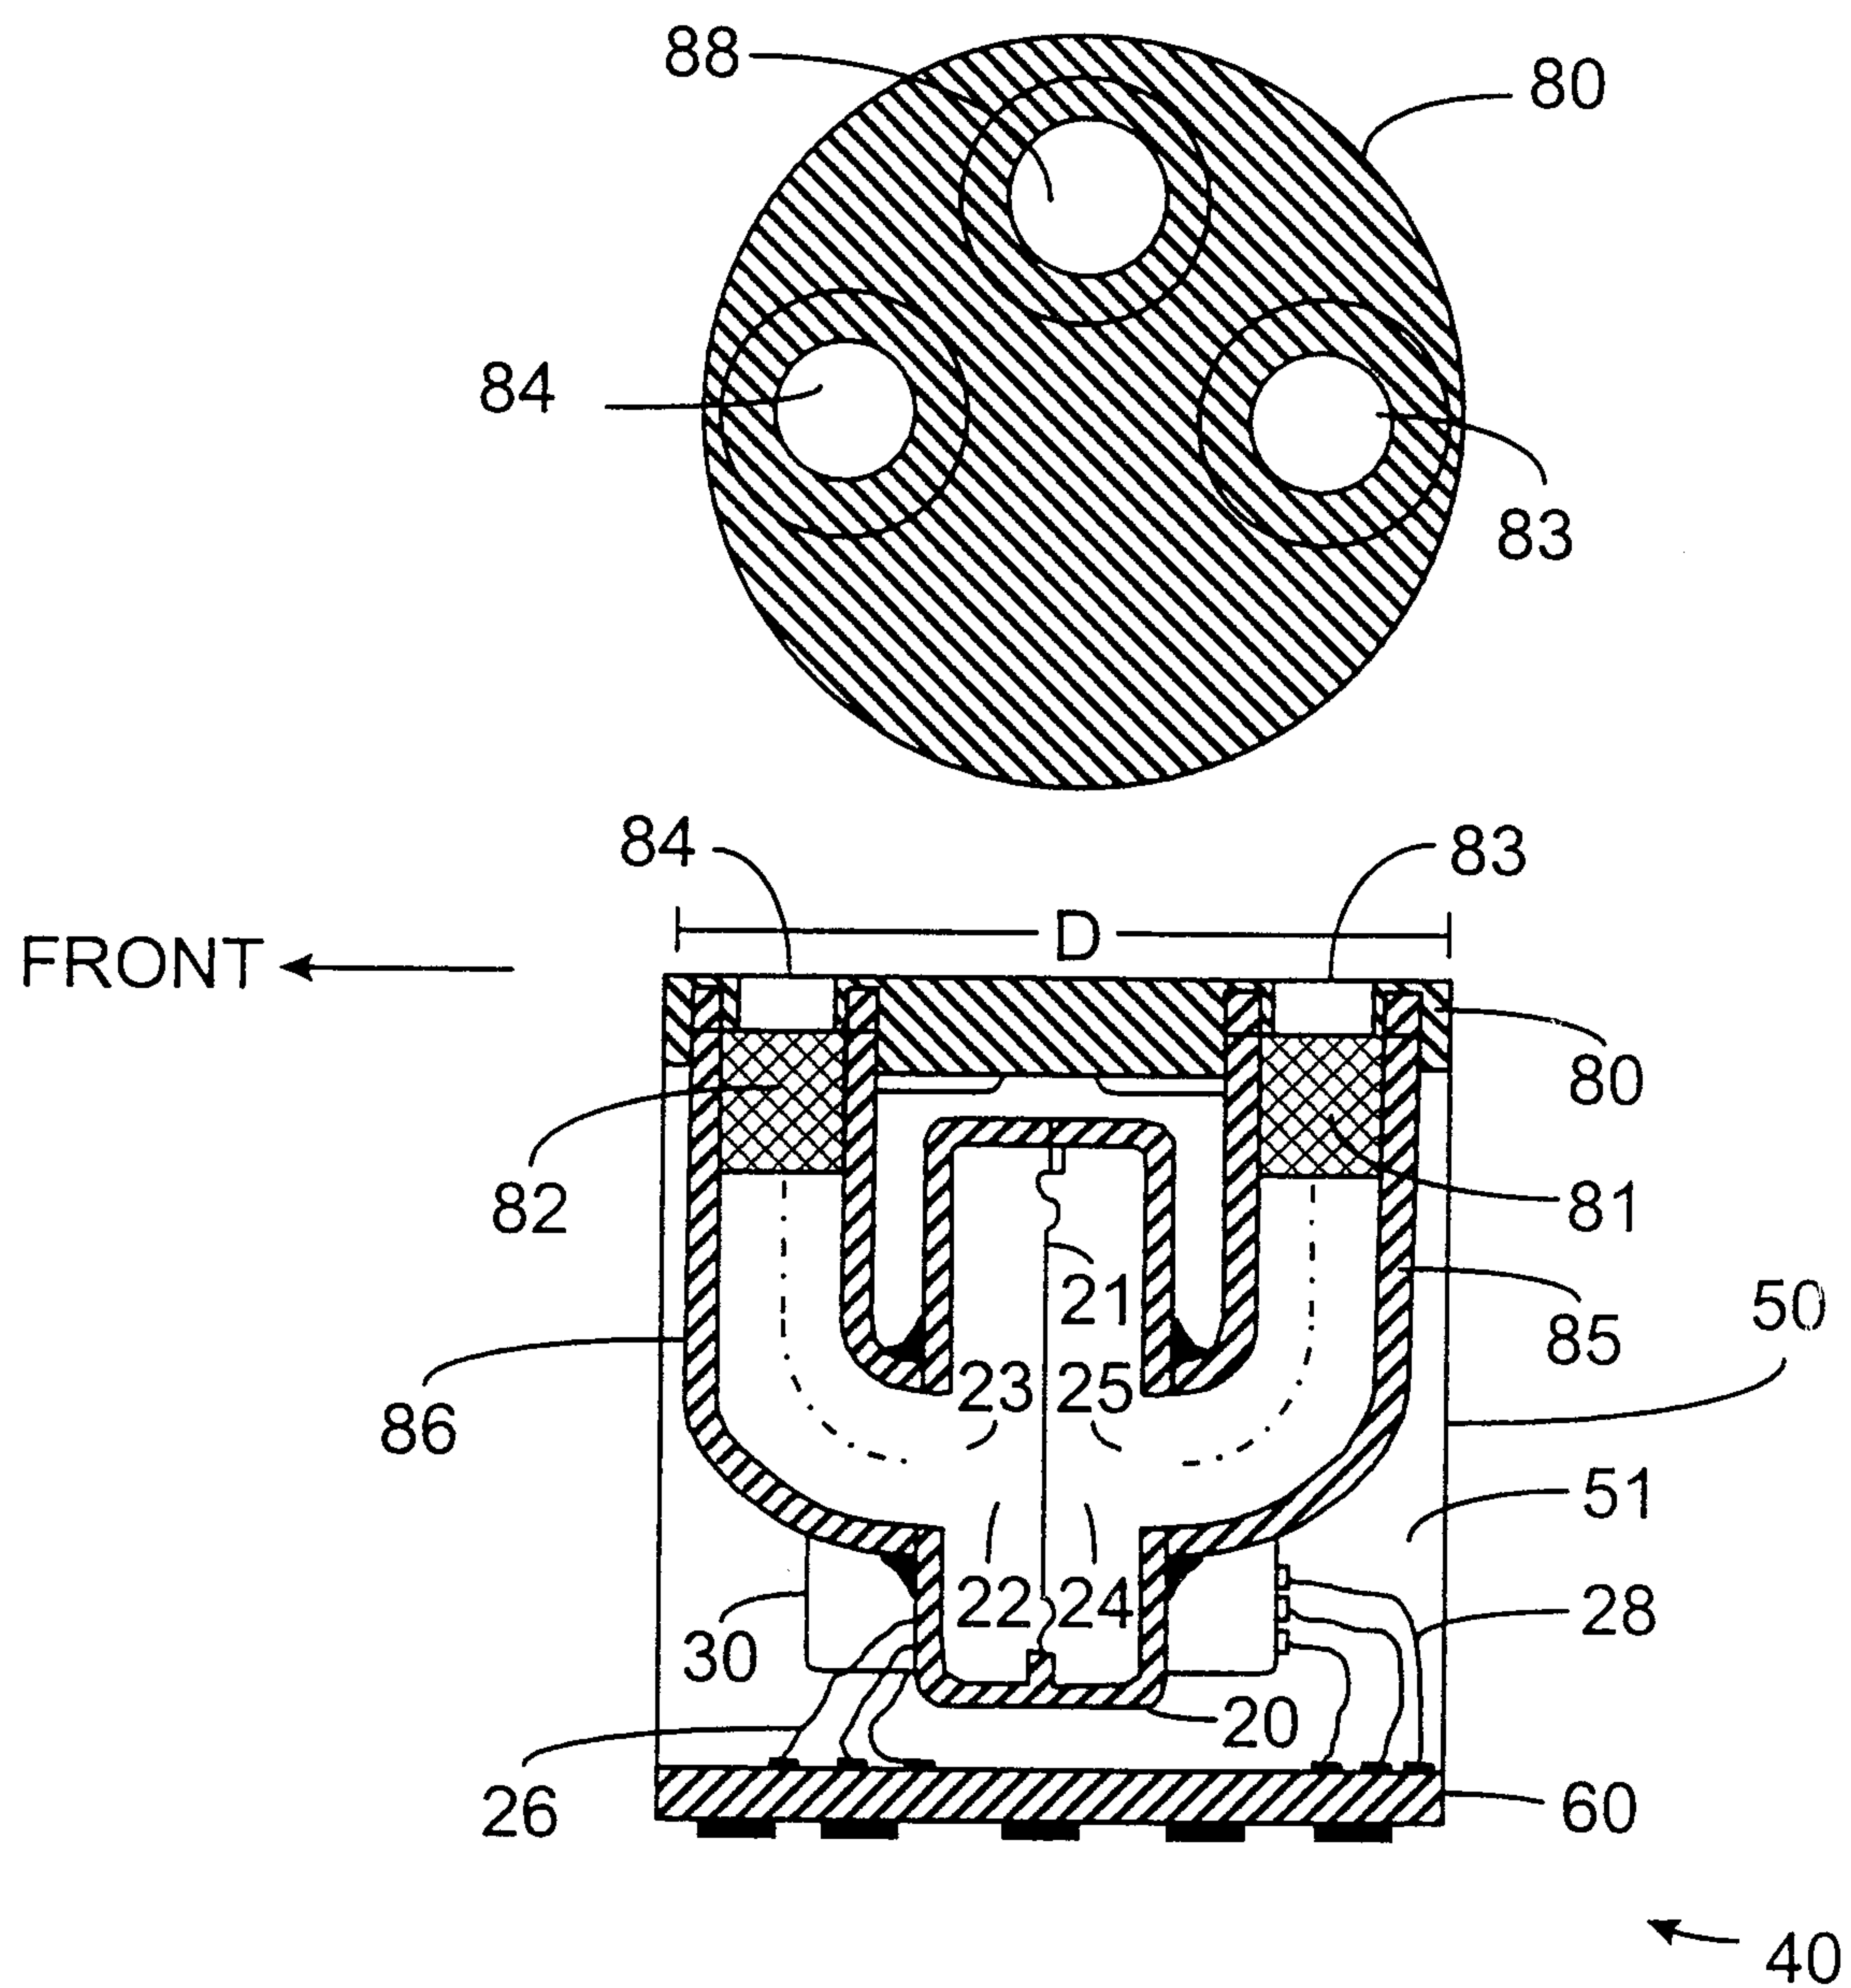


FIG. 2A

3/17

**FIG. 3**

4/17

**FIG. 4**

5/17

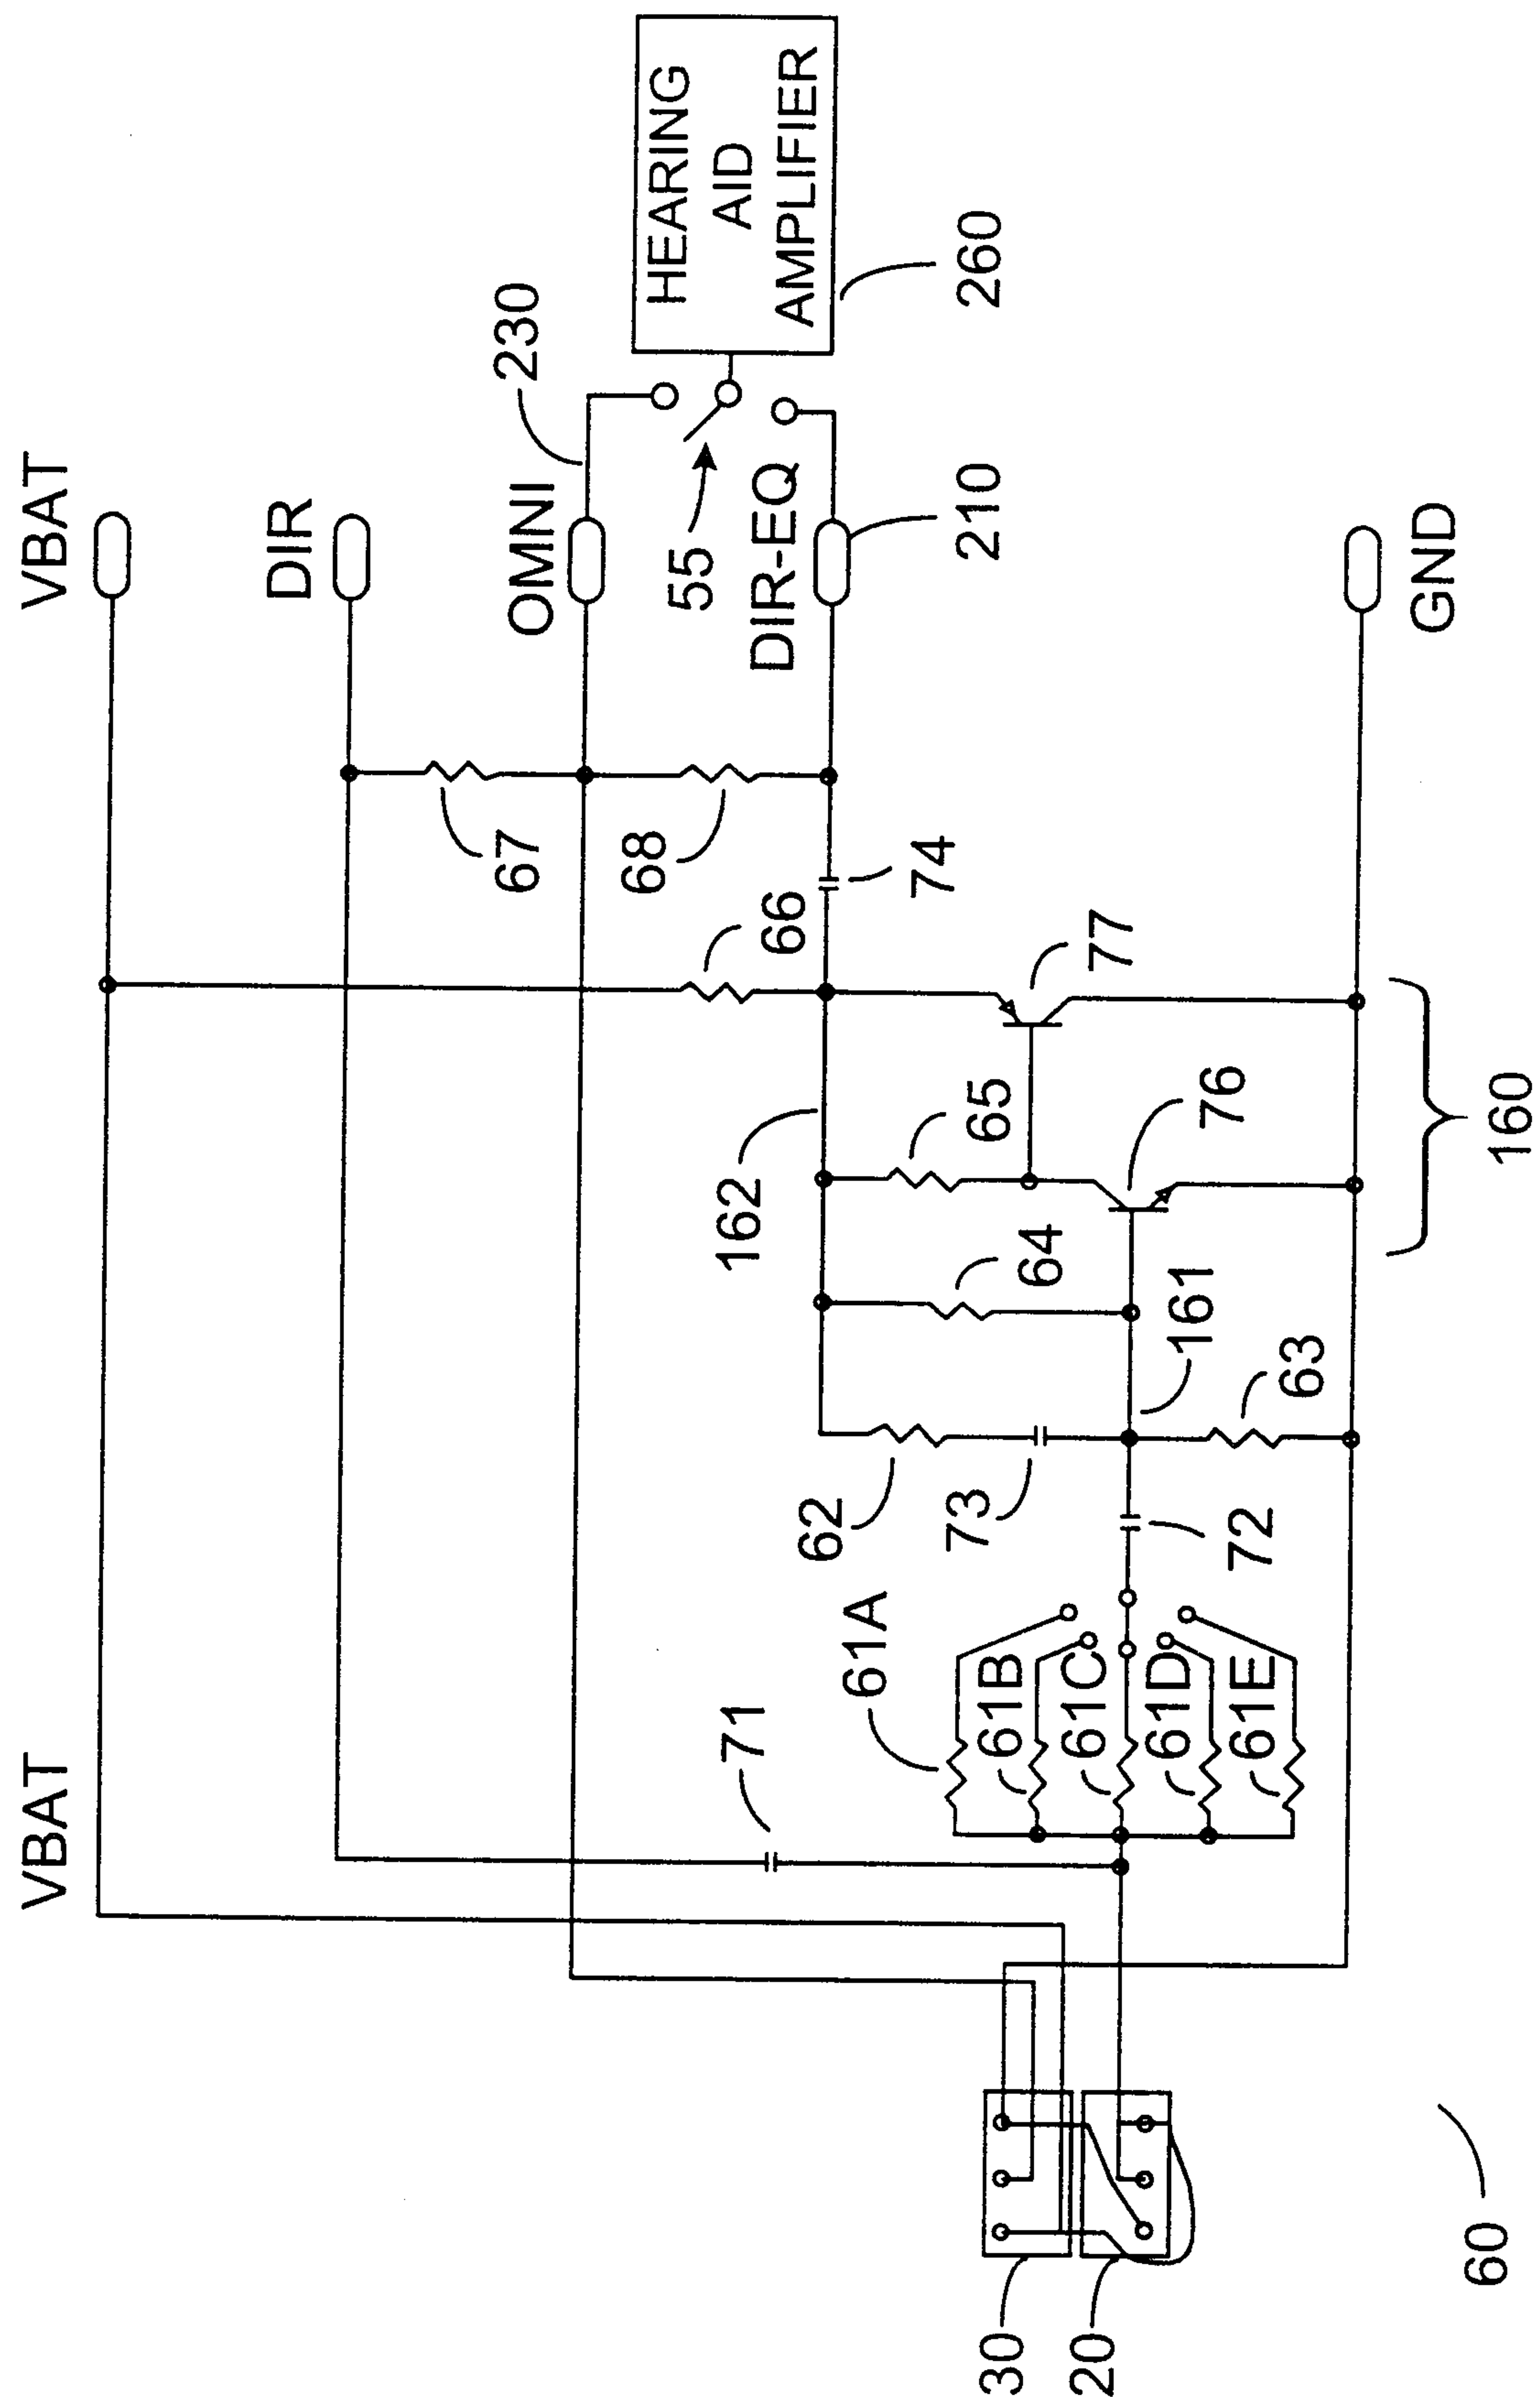


FIG. 5

6/17



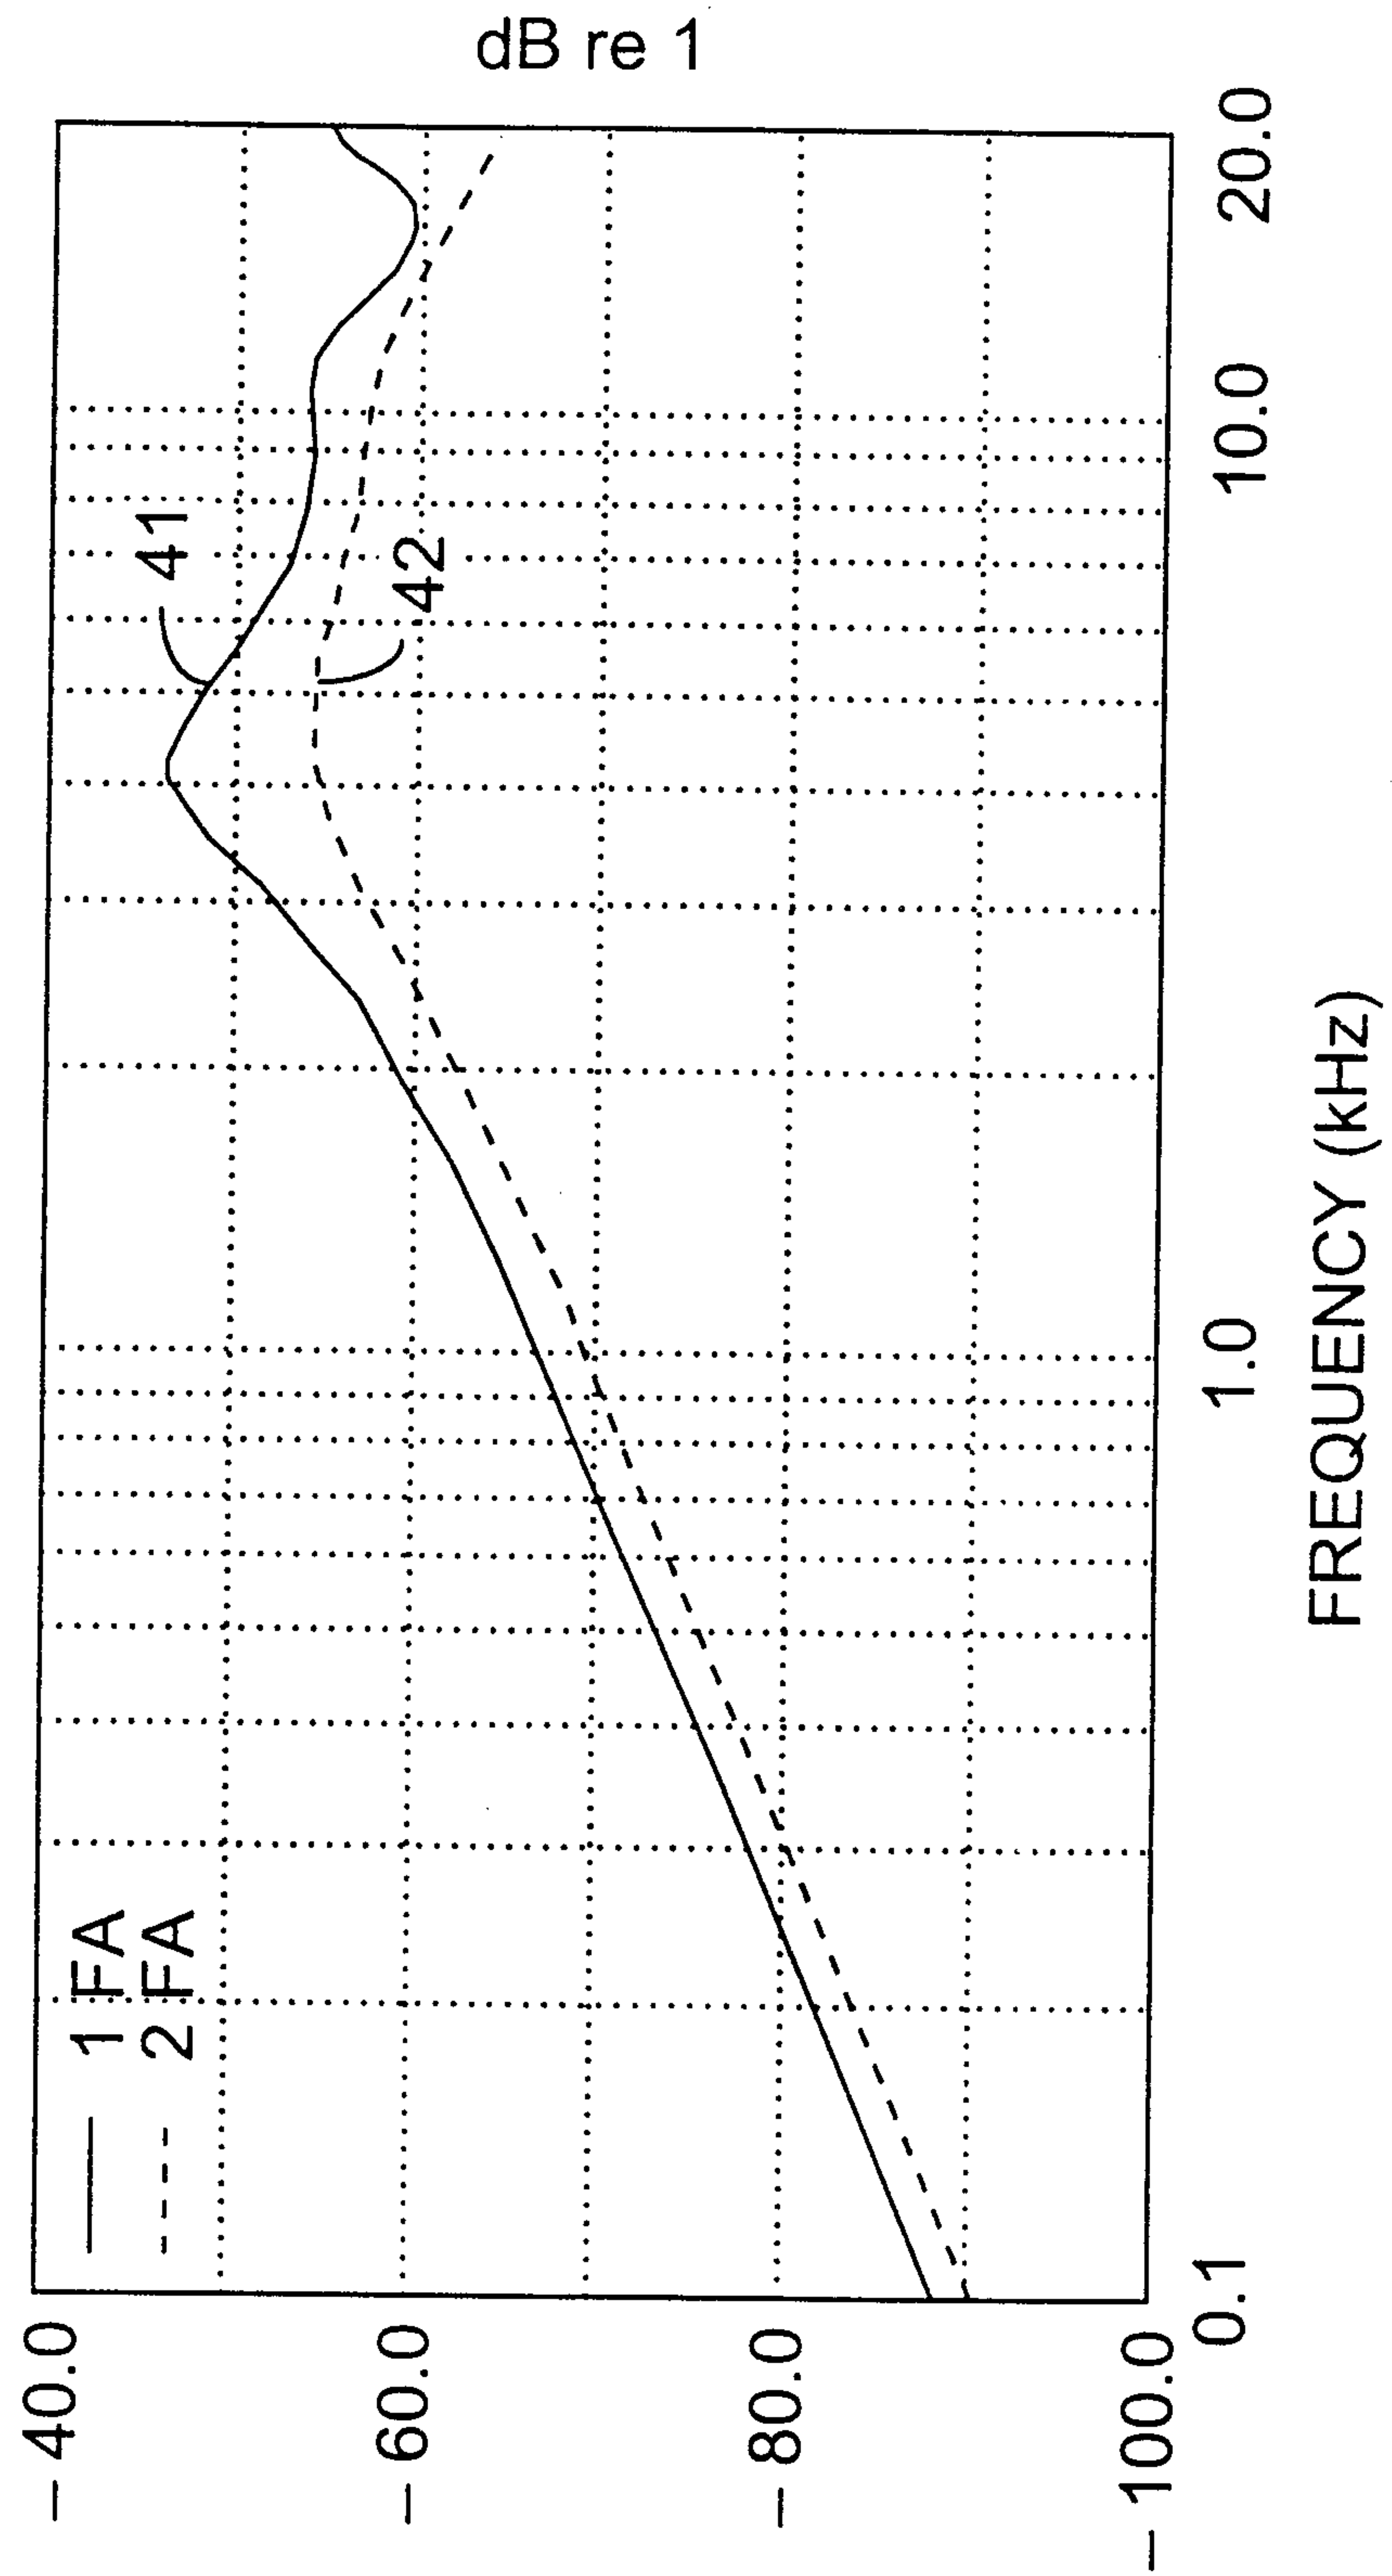


FIG. 6

7/17

**FIG. 7**

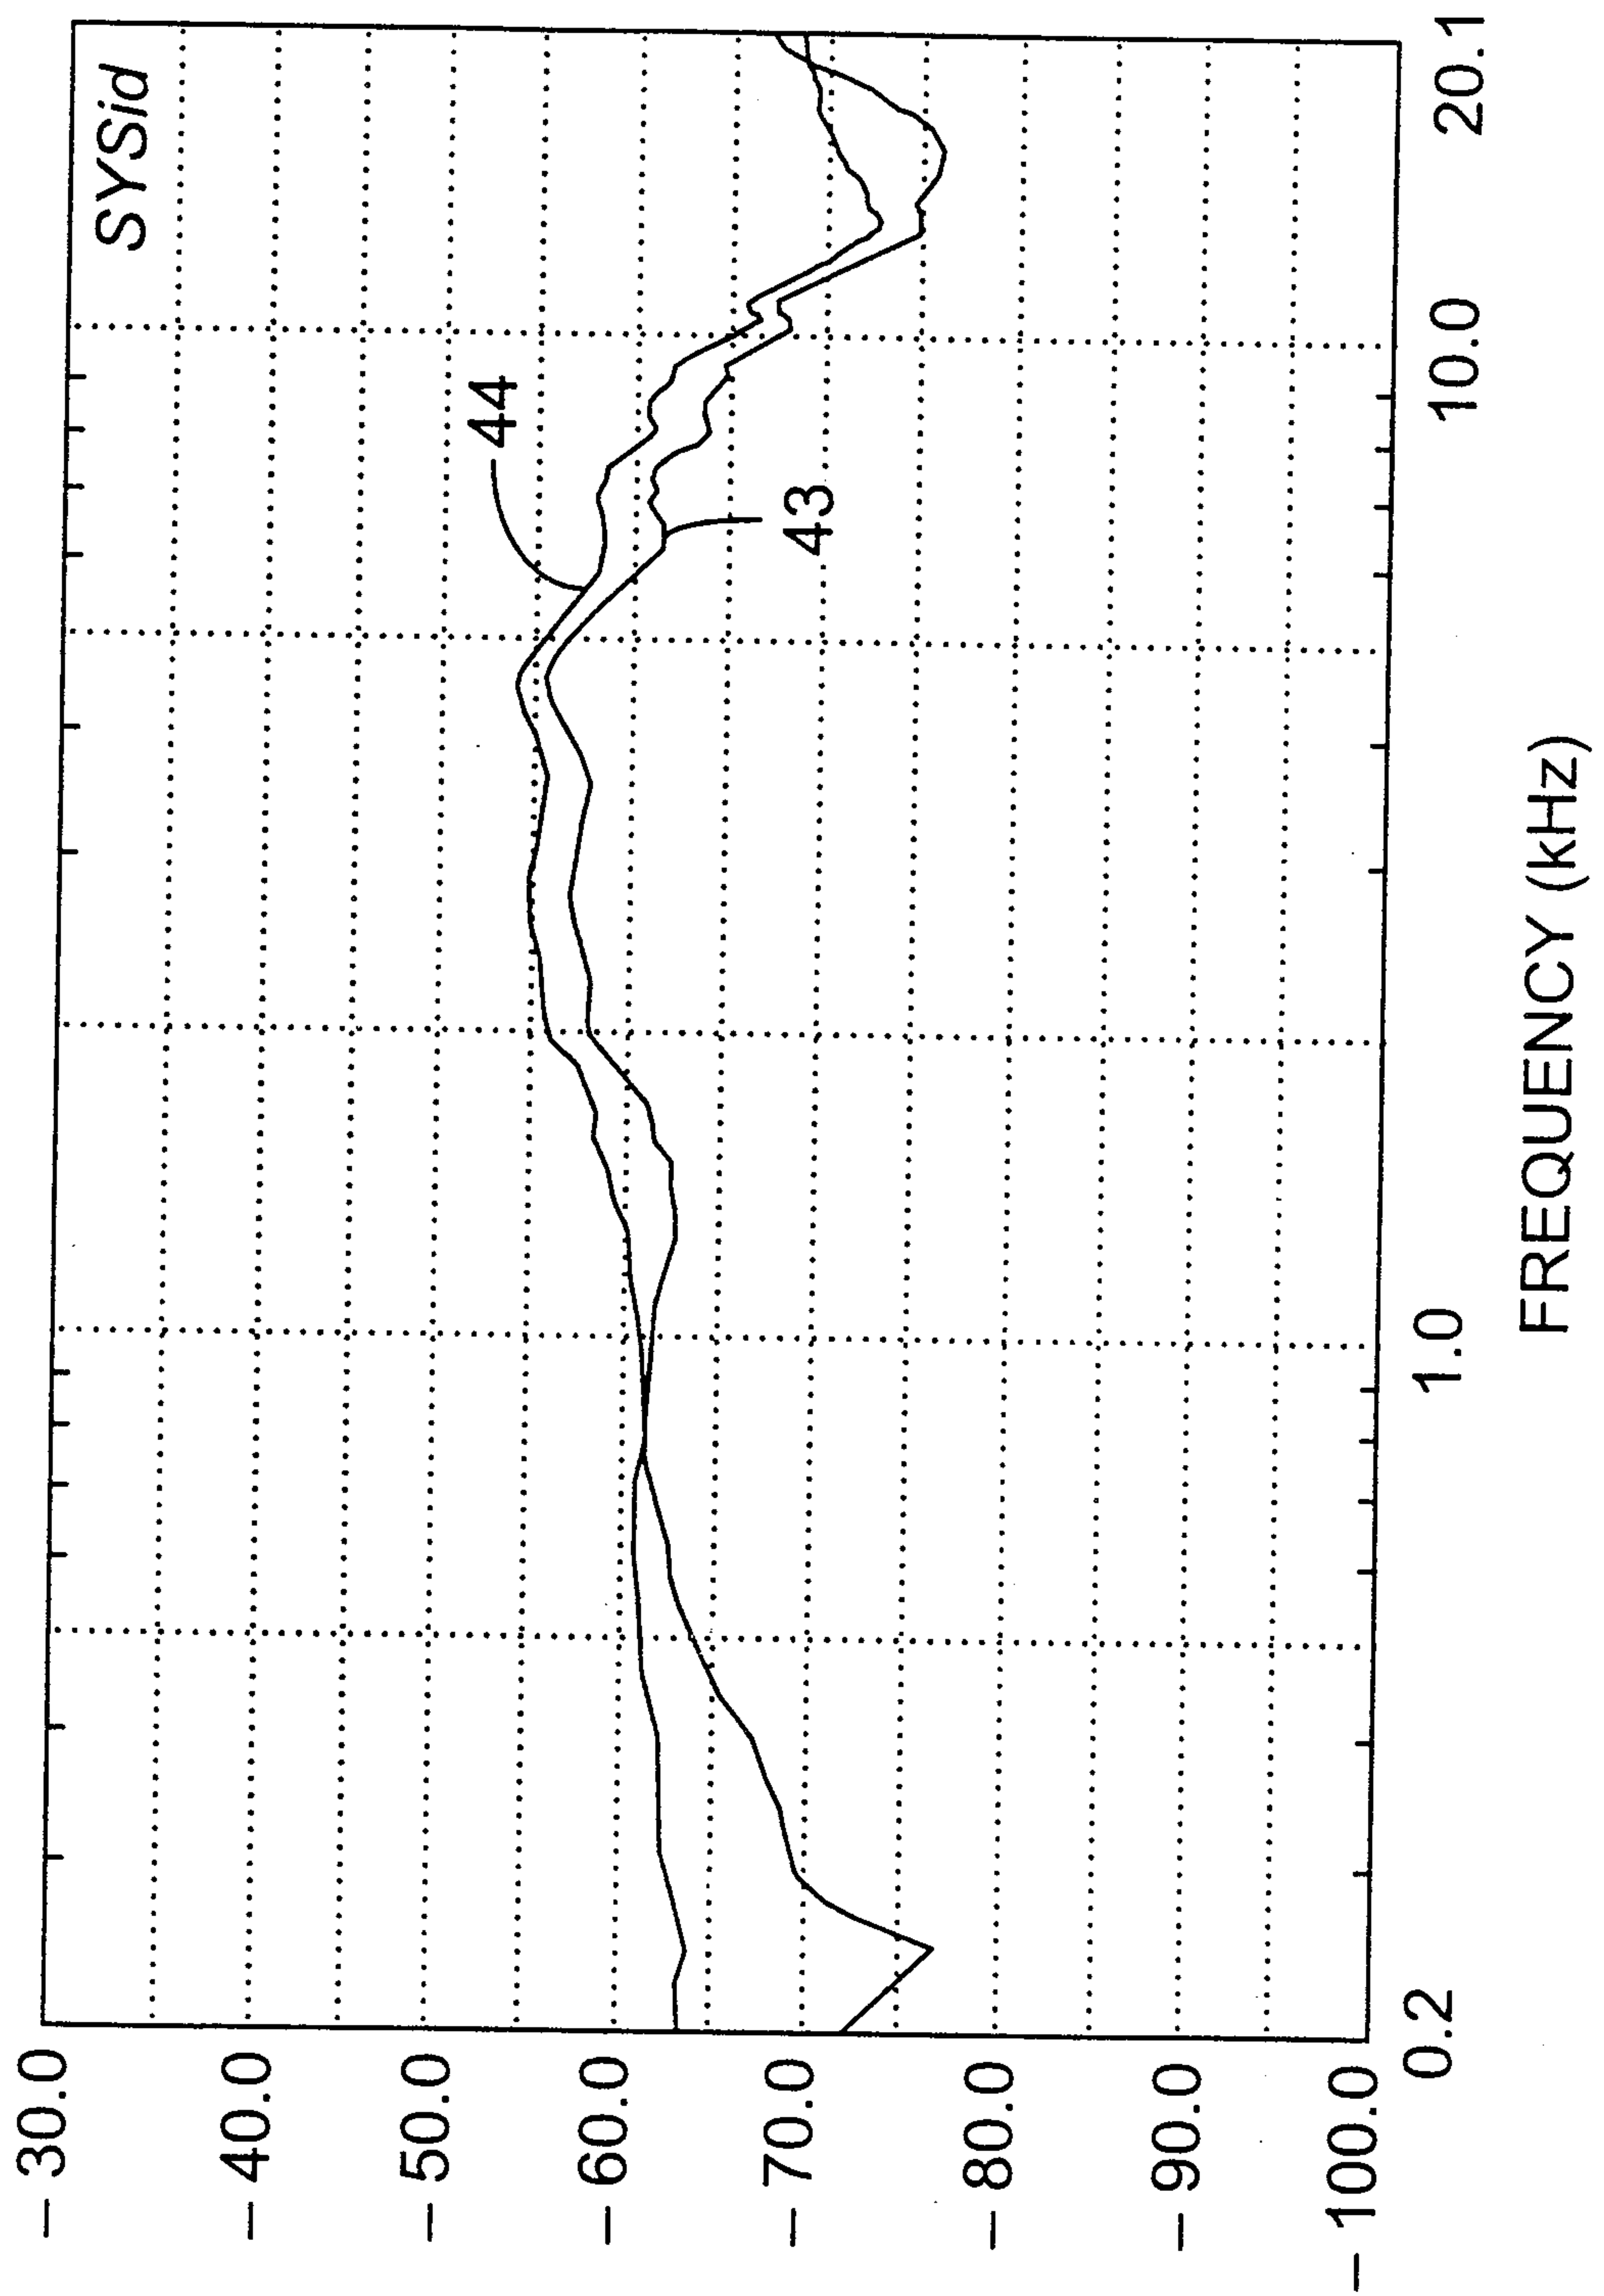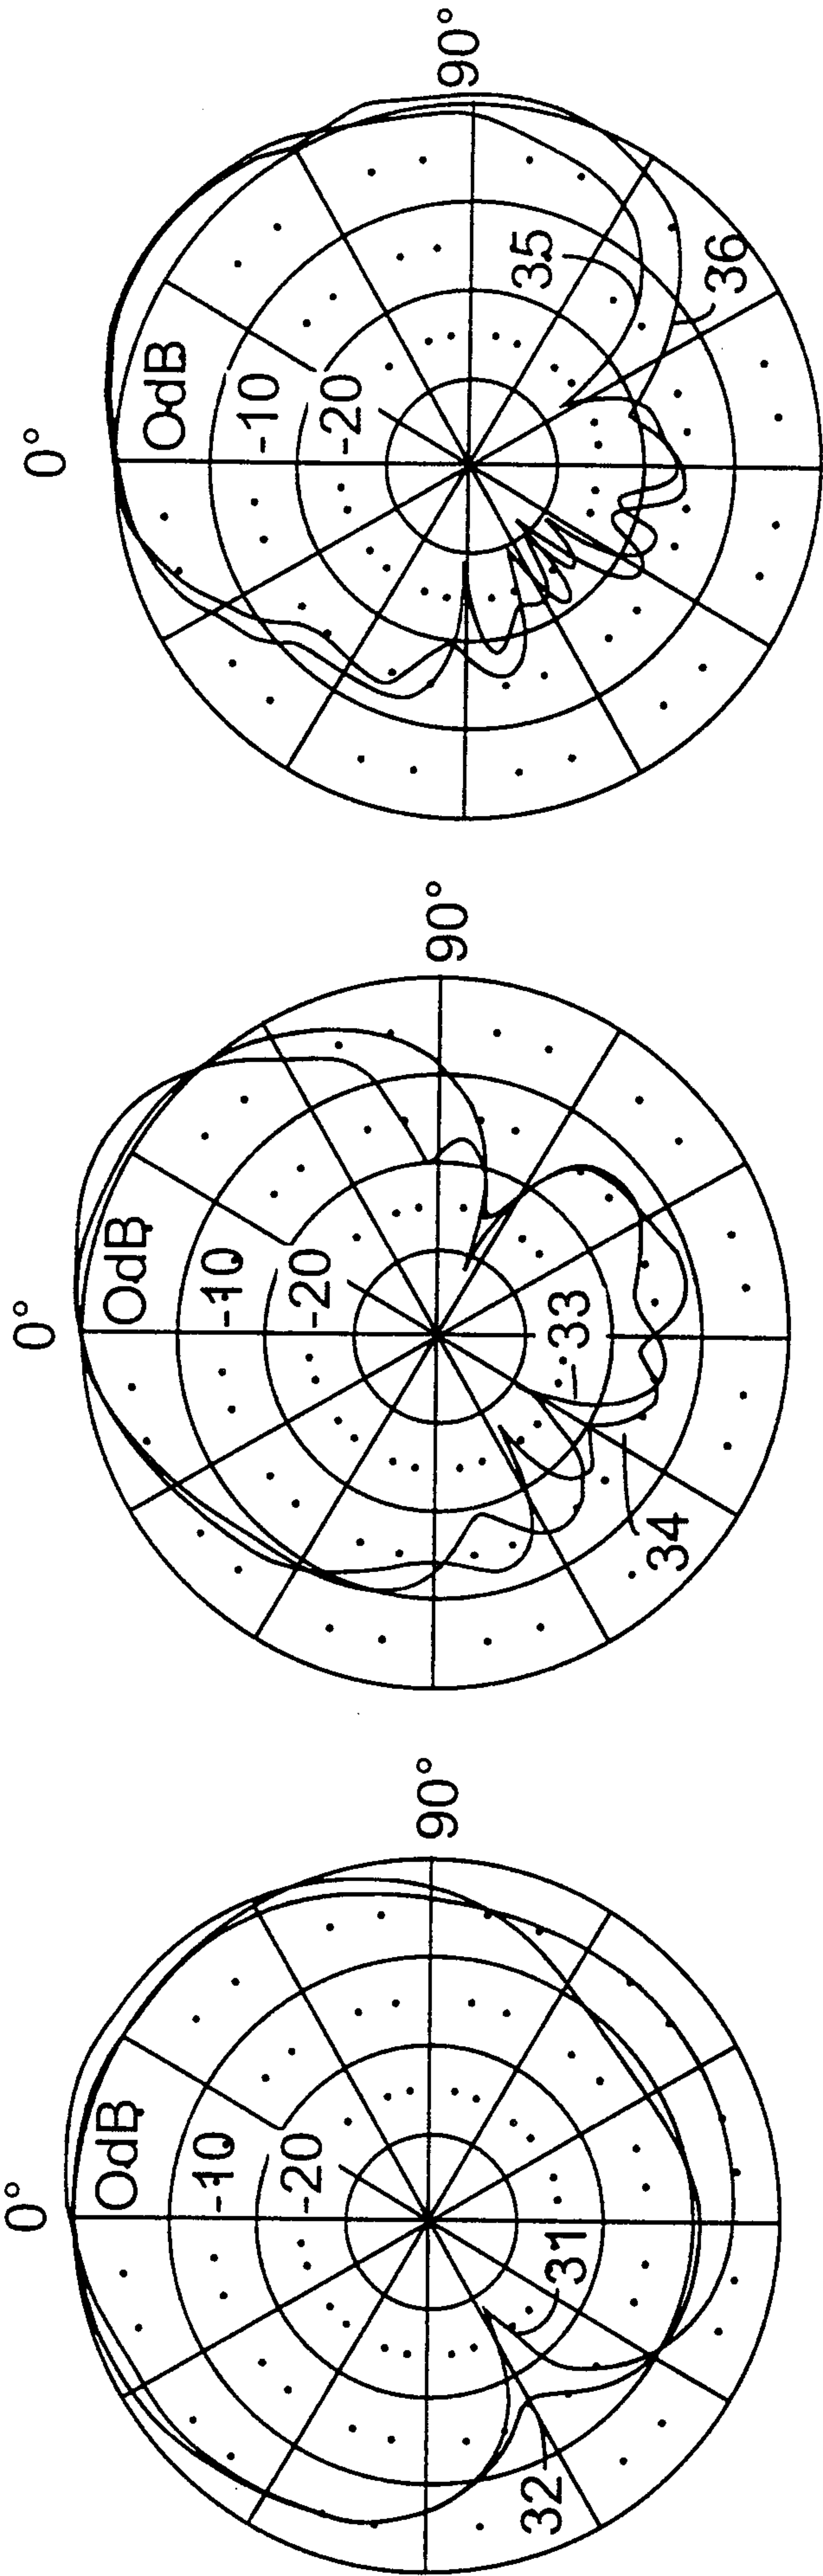

Polar Characteristics
(10 dB/Major Division)

FIG. 8

9/17

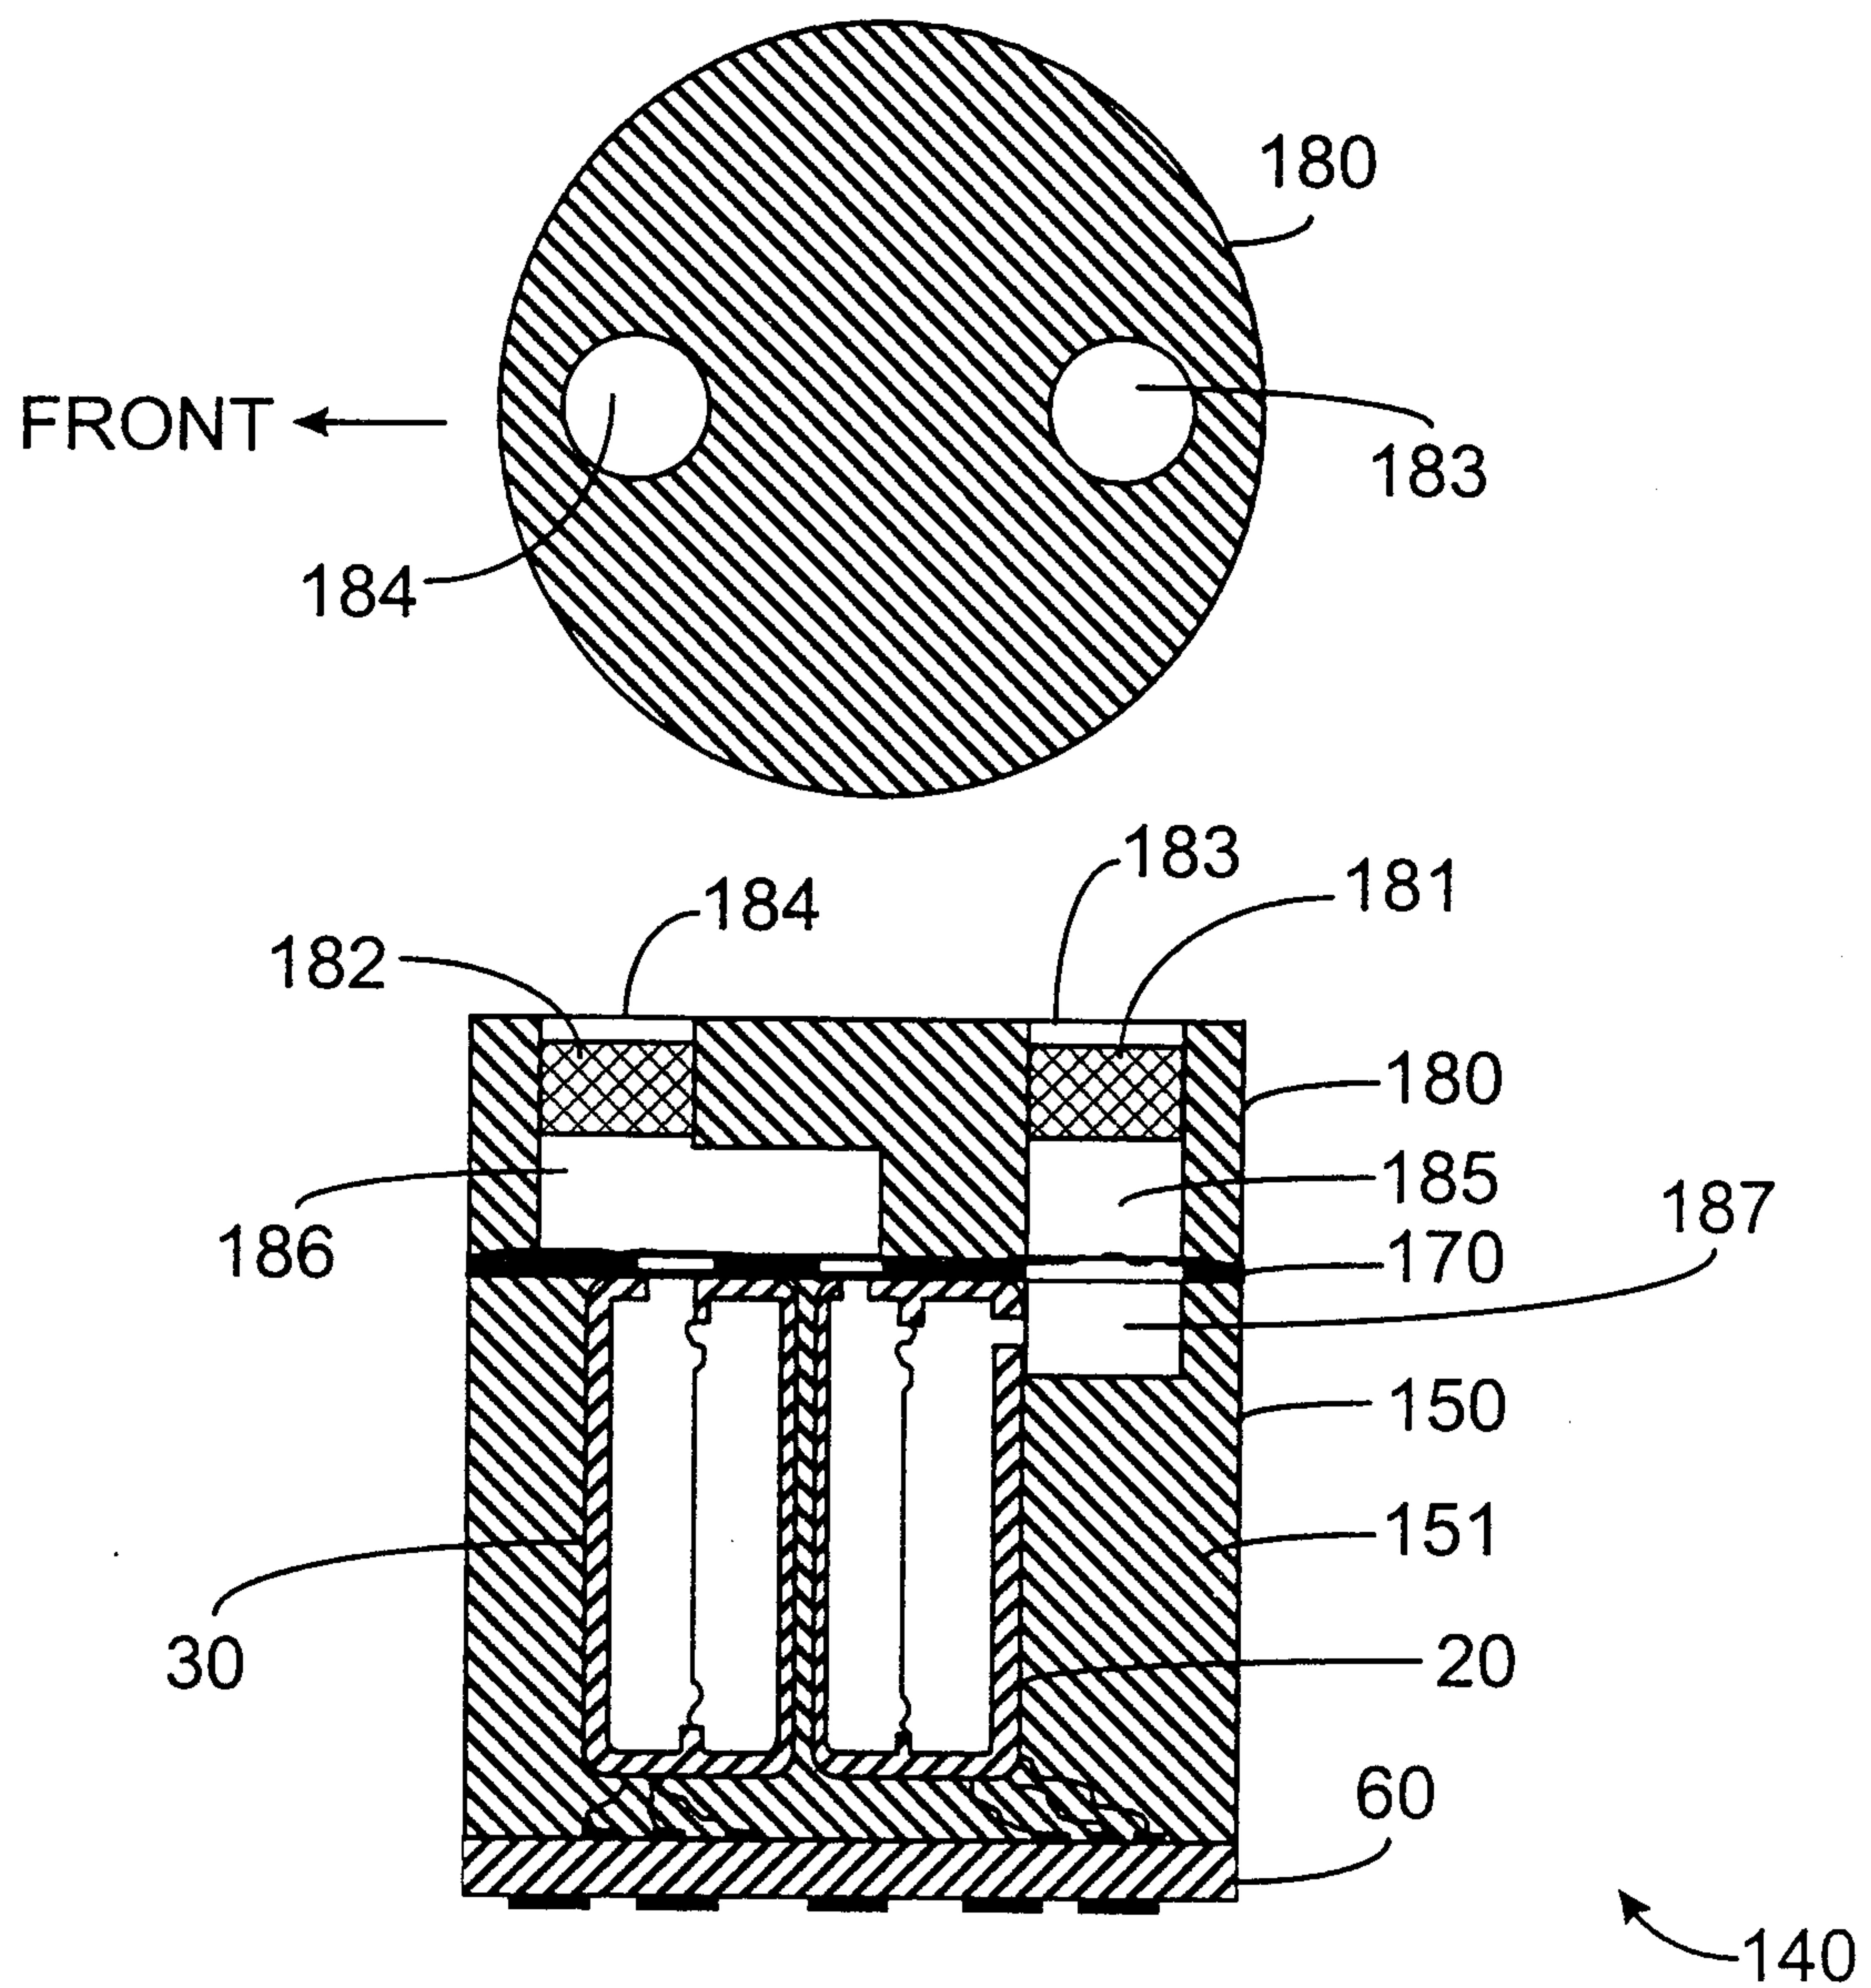


FIG. 9

10/17

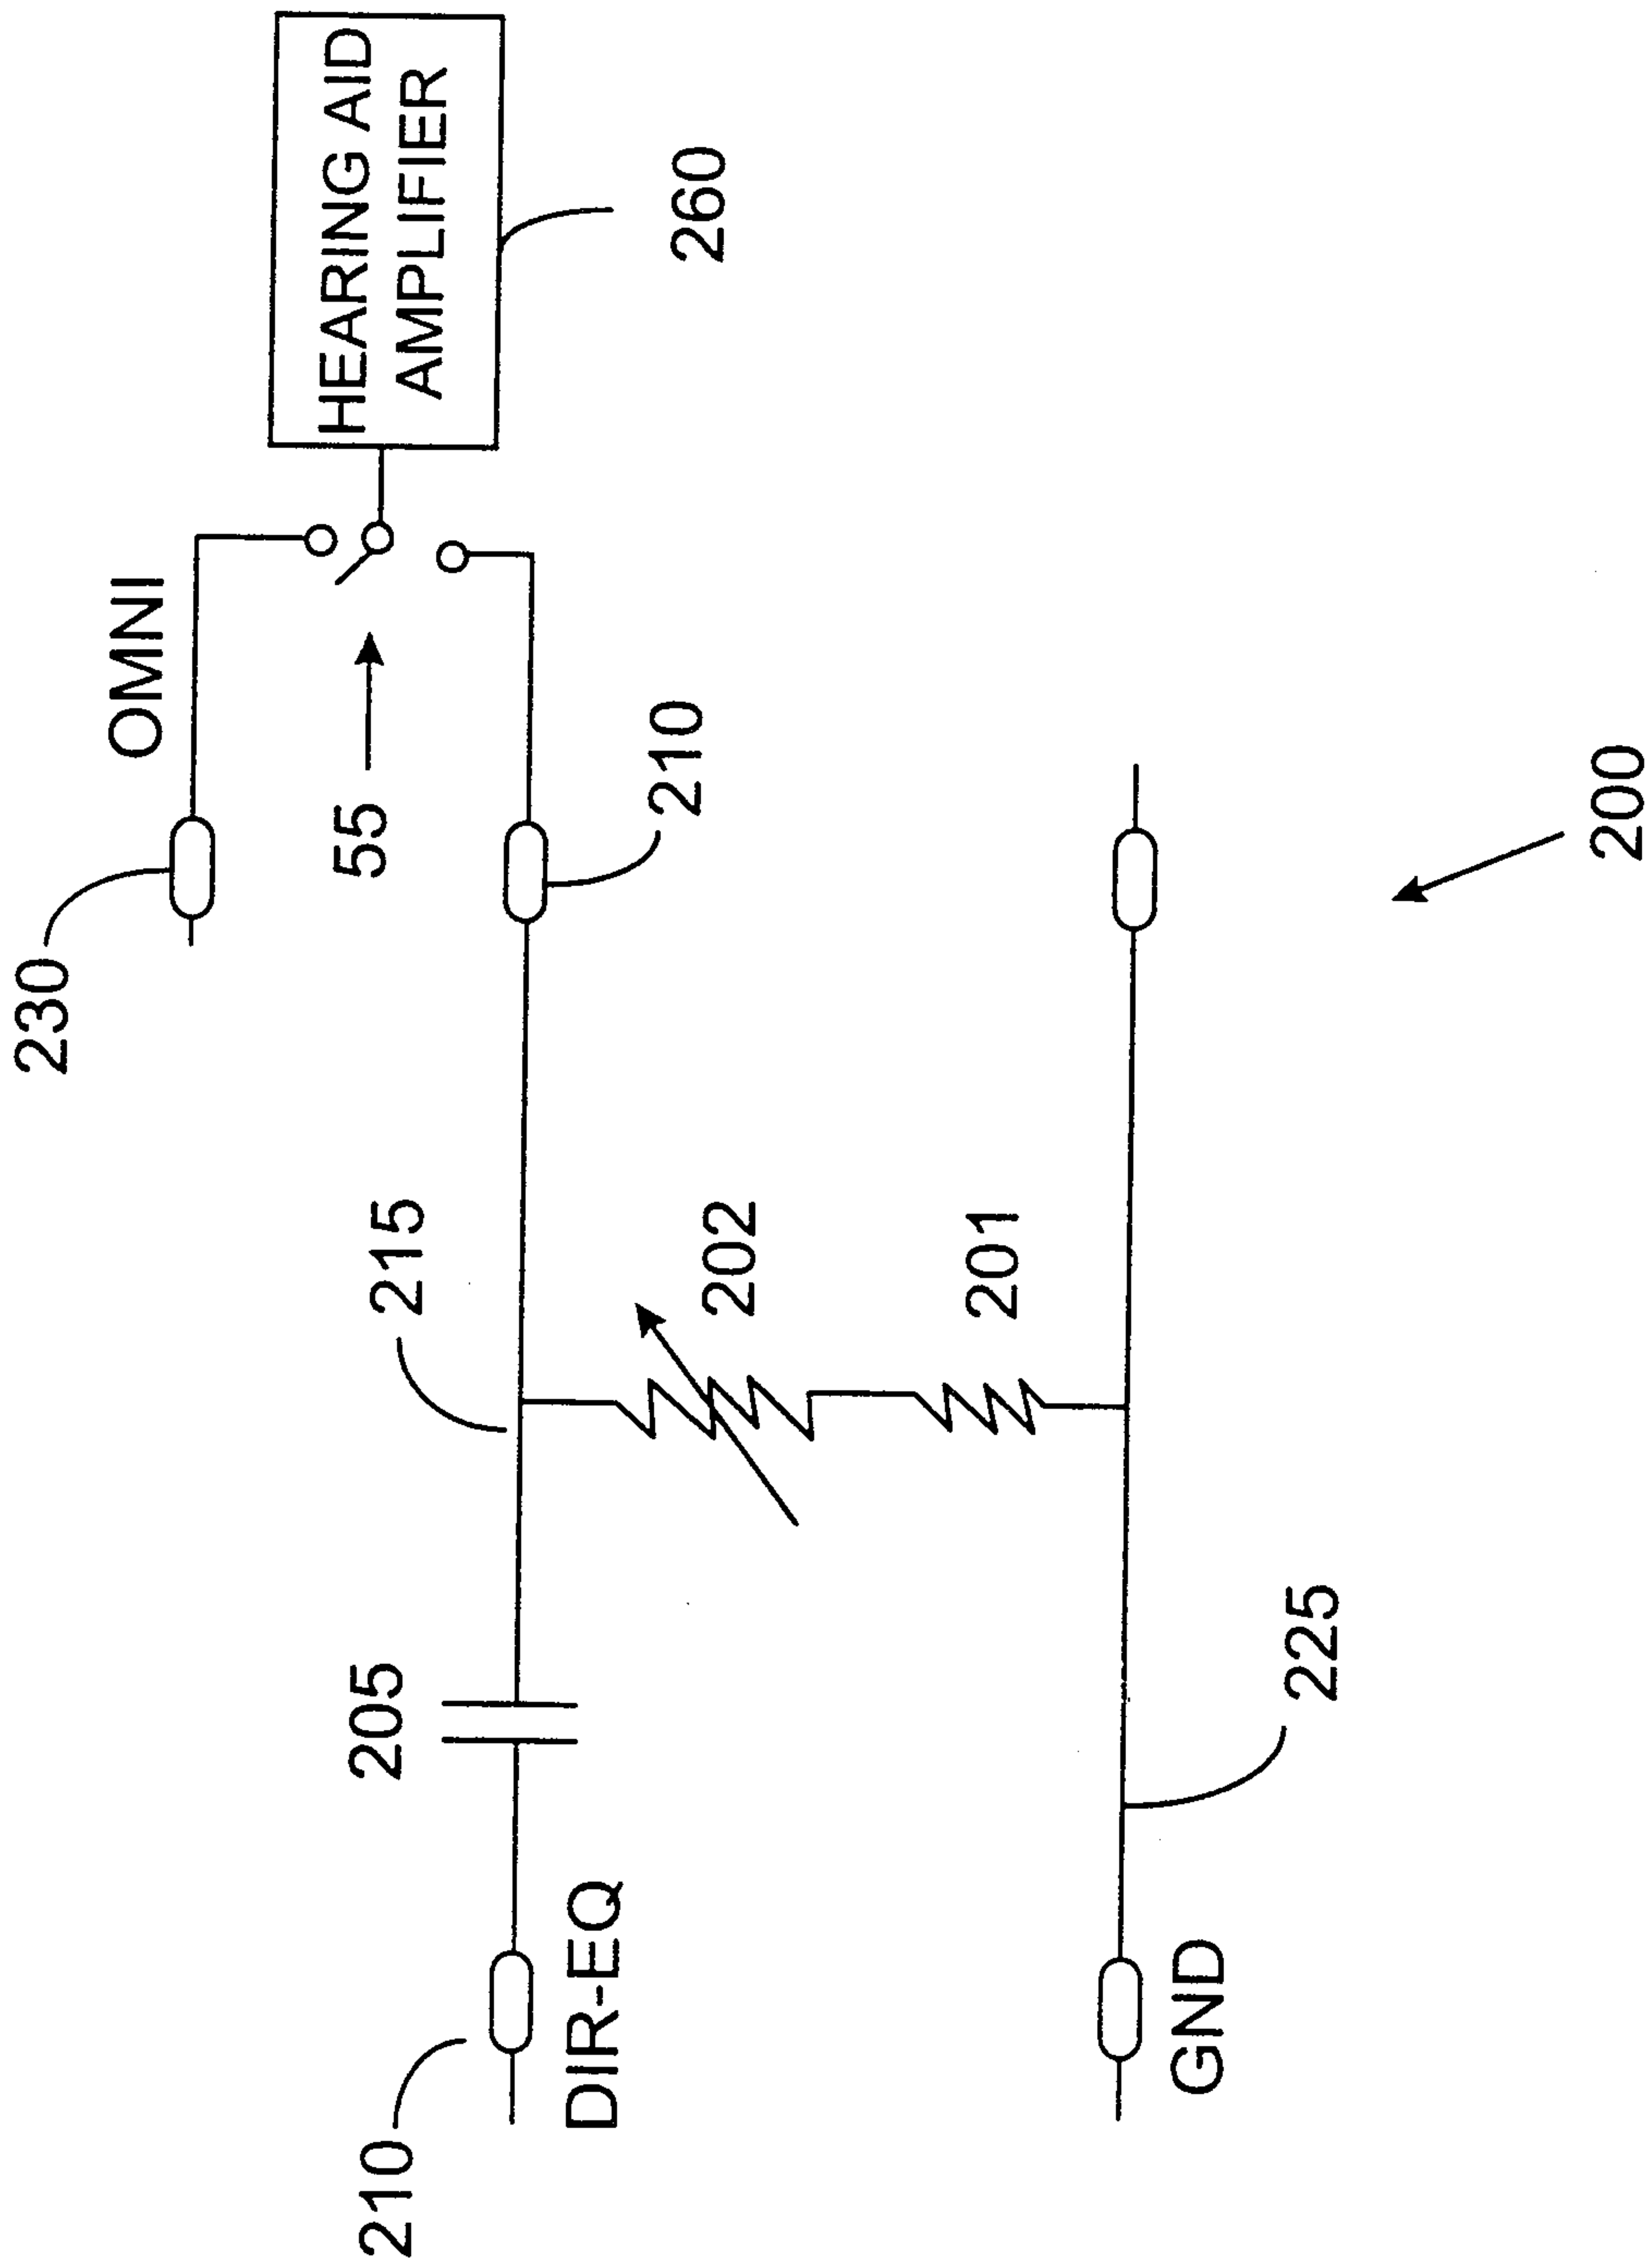
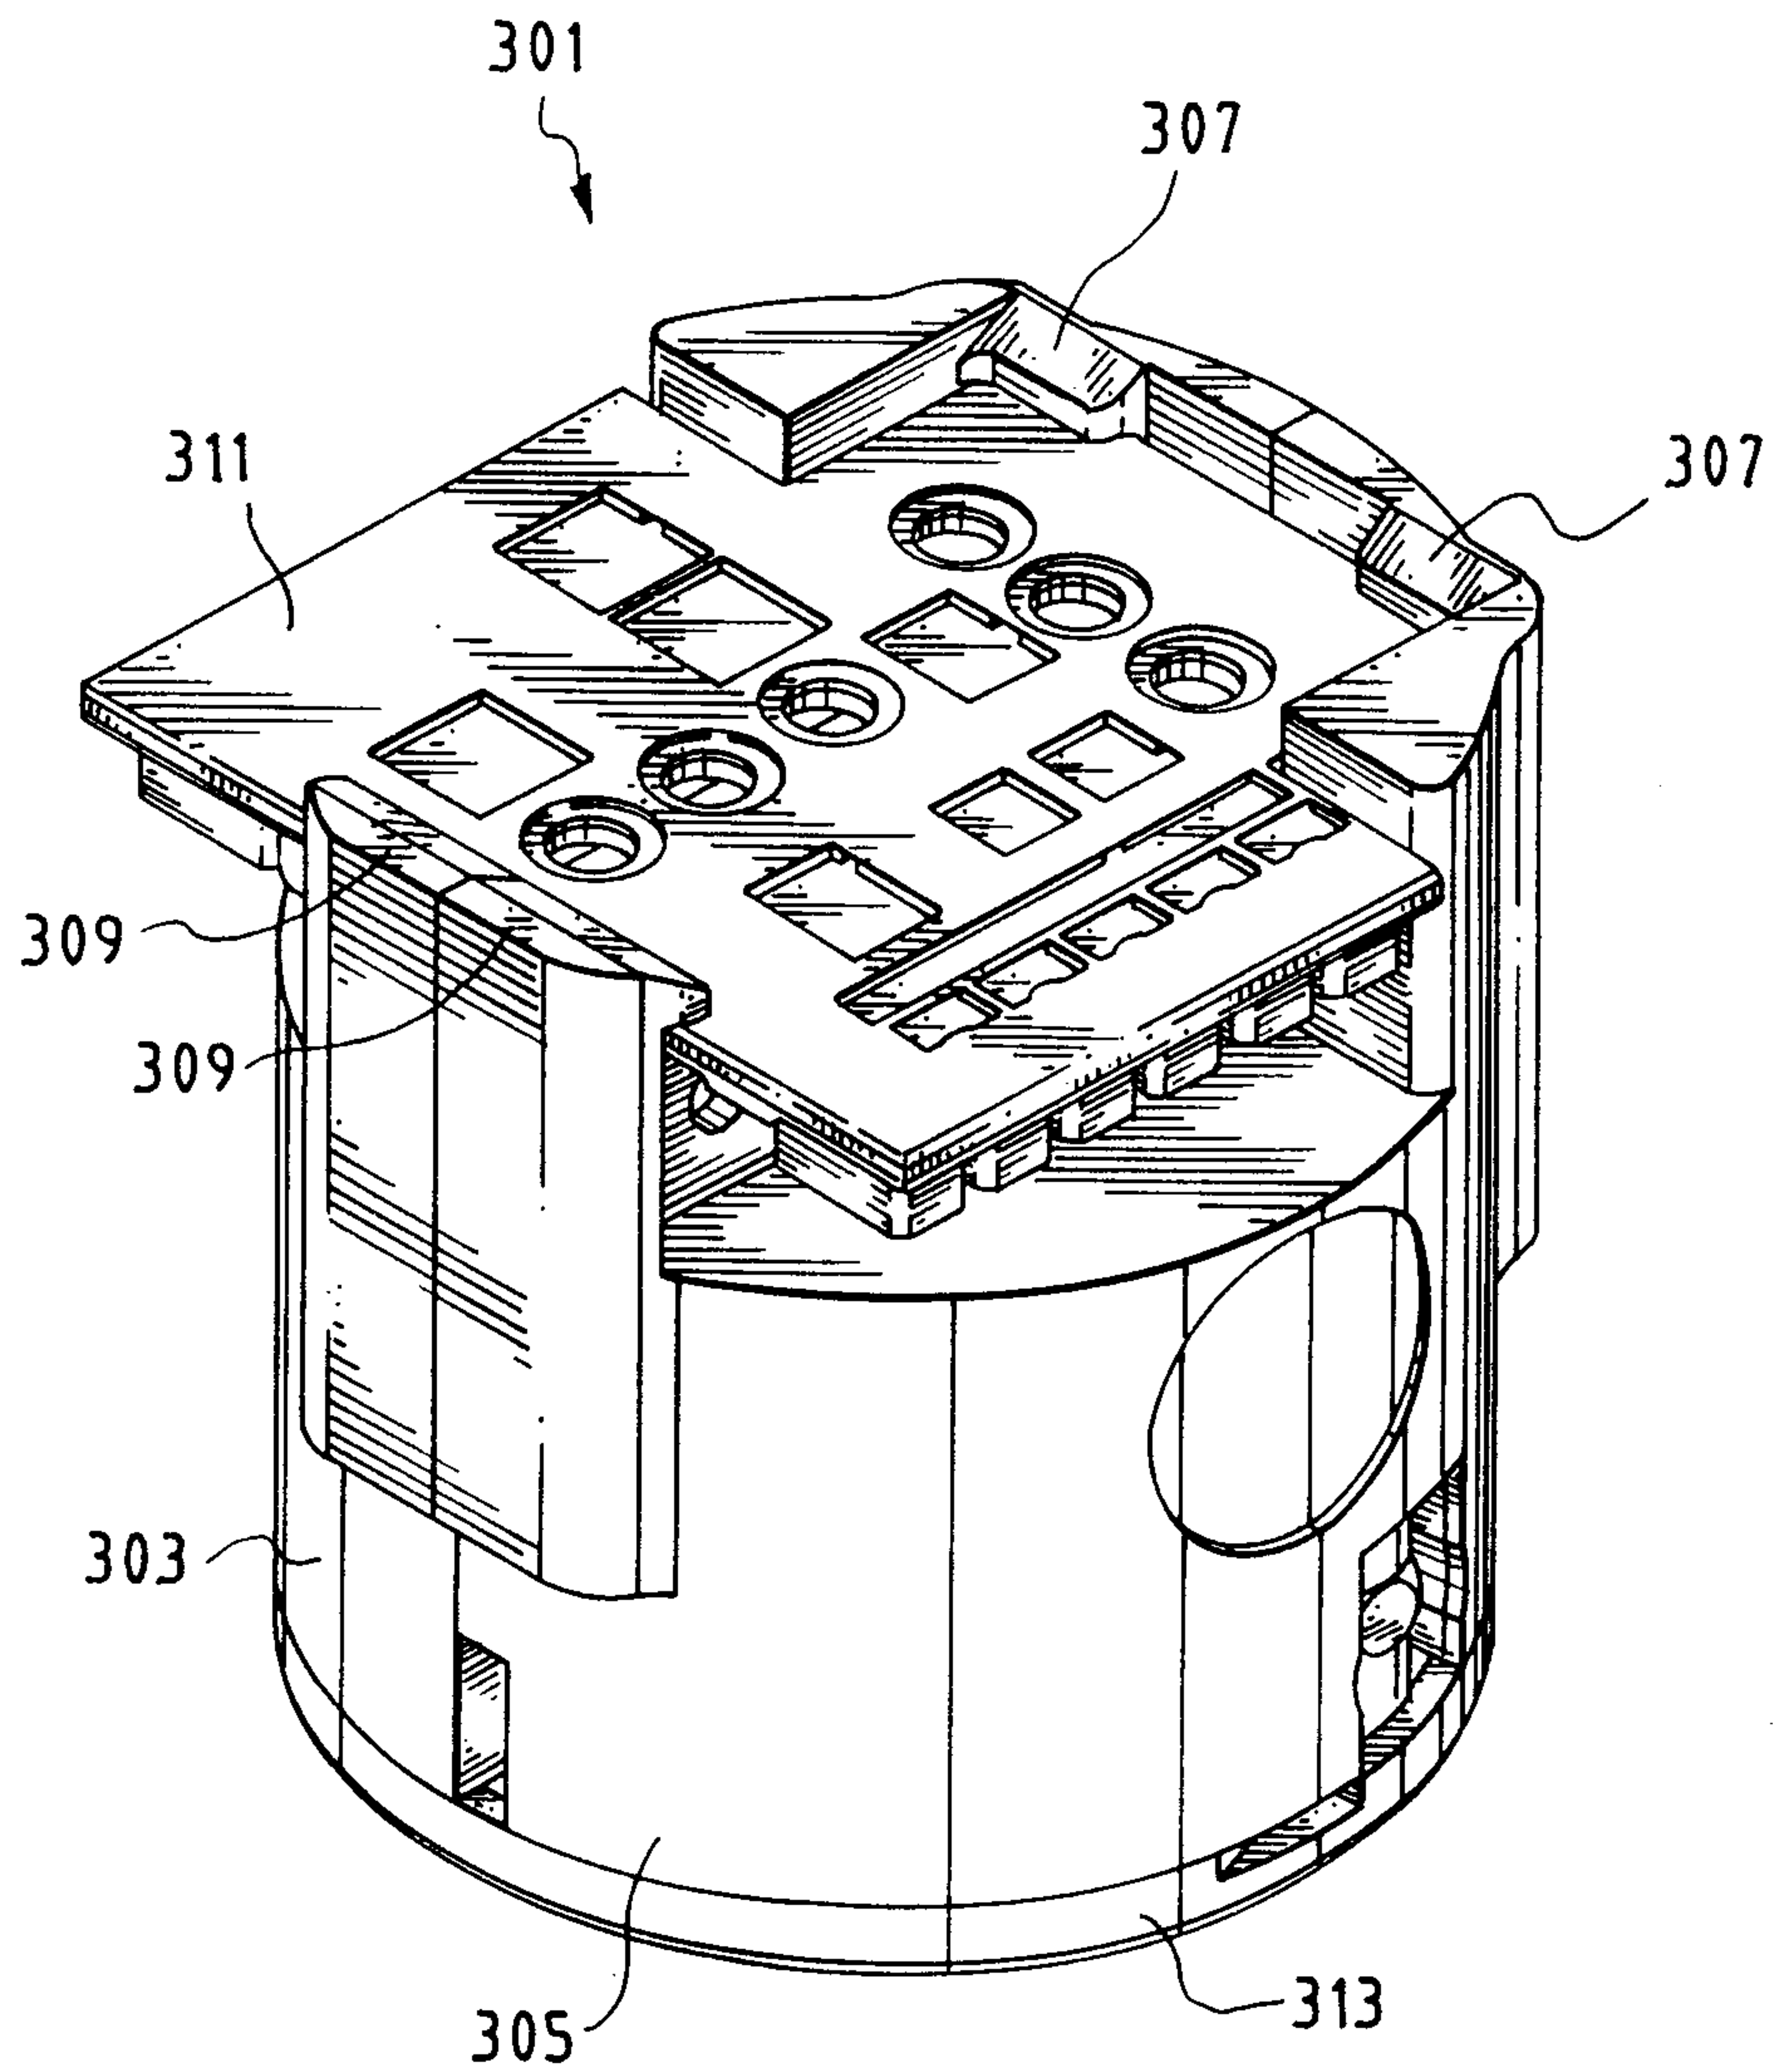
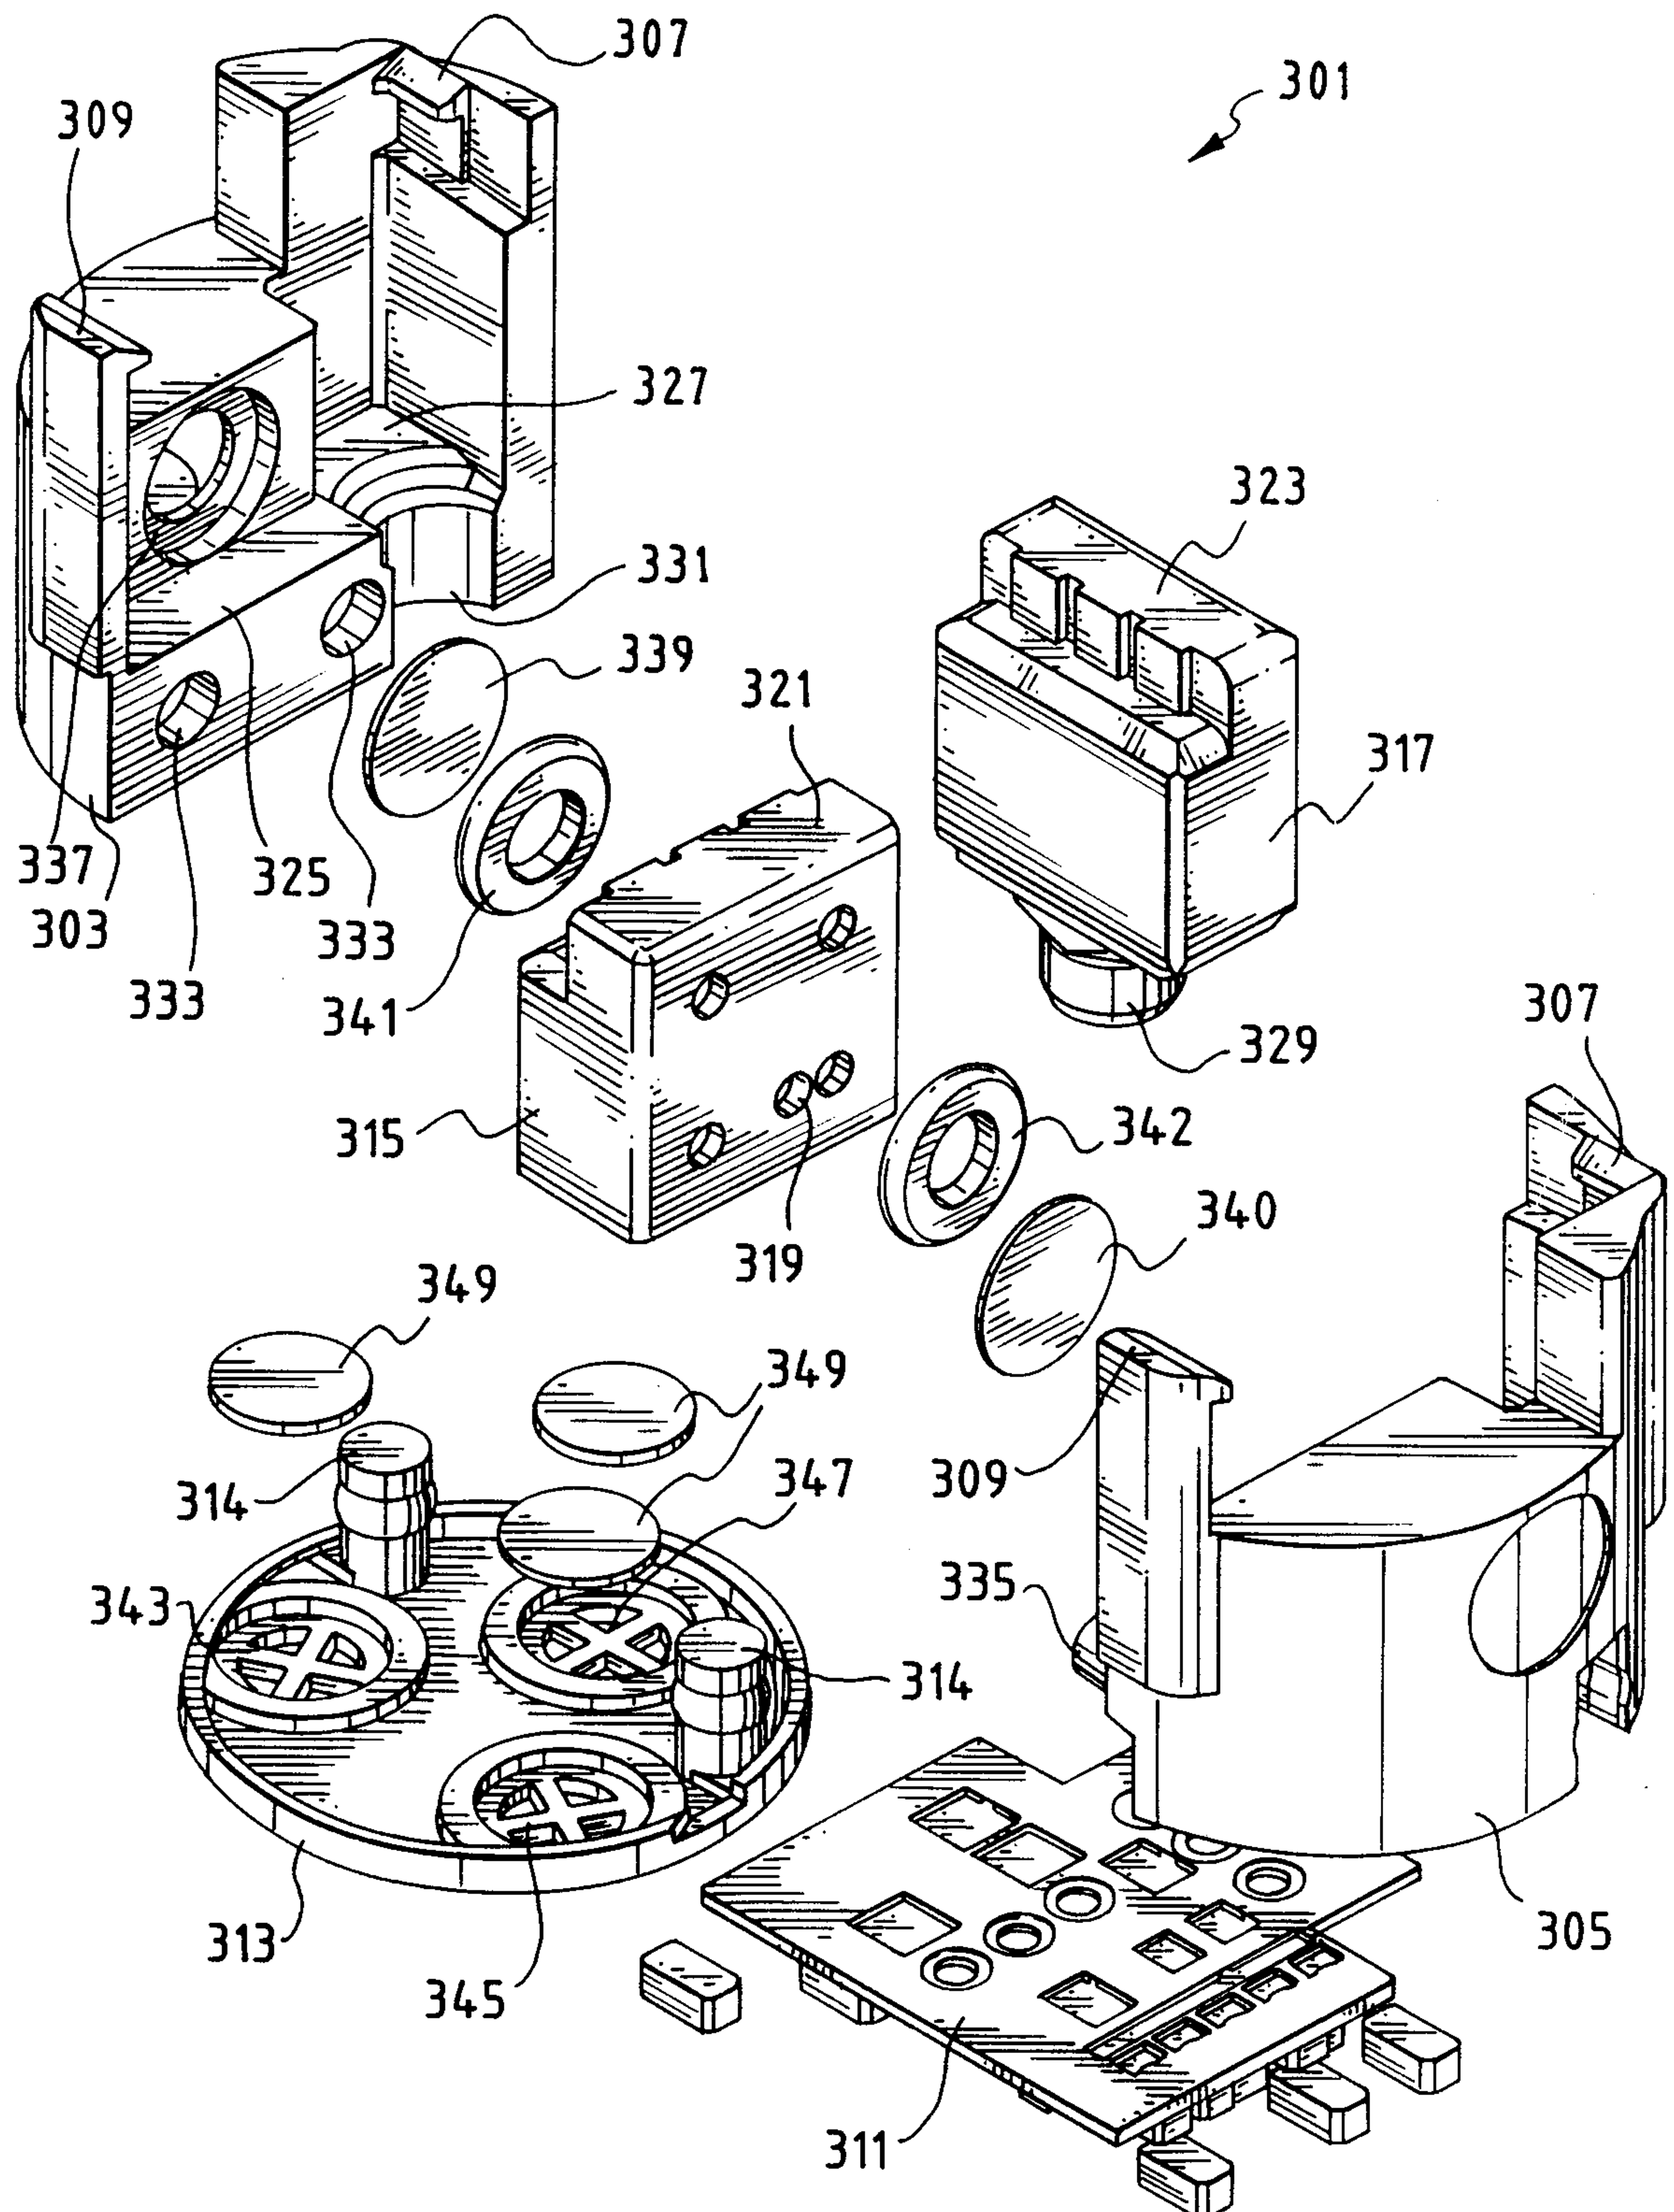


FIG. 10

11/17


FIG. 11

12/17

FIG. 12

13/17

FIG. 13

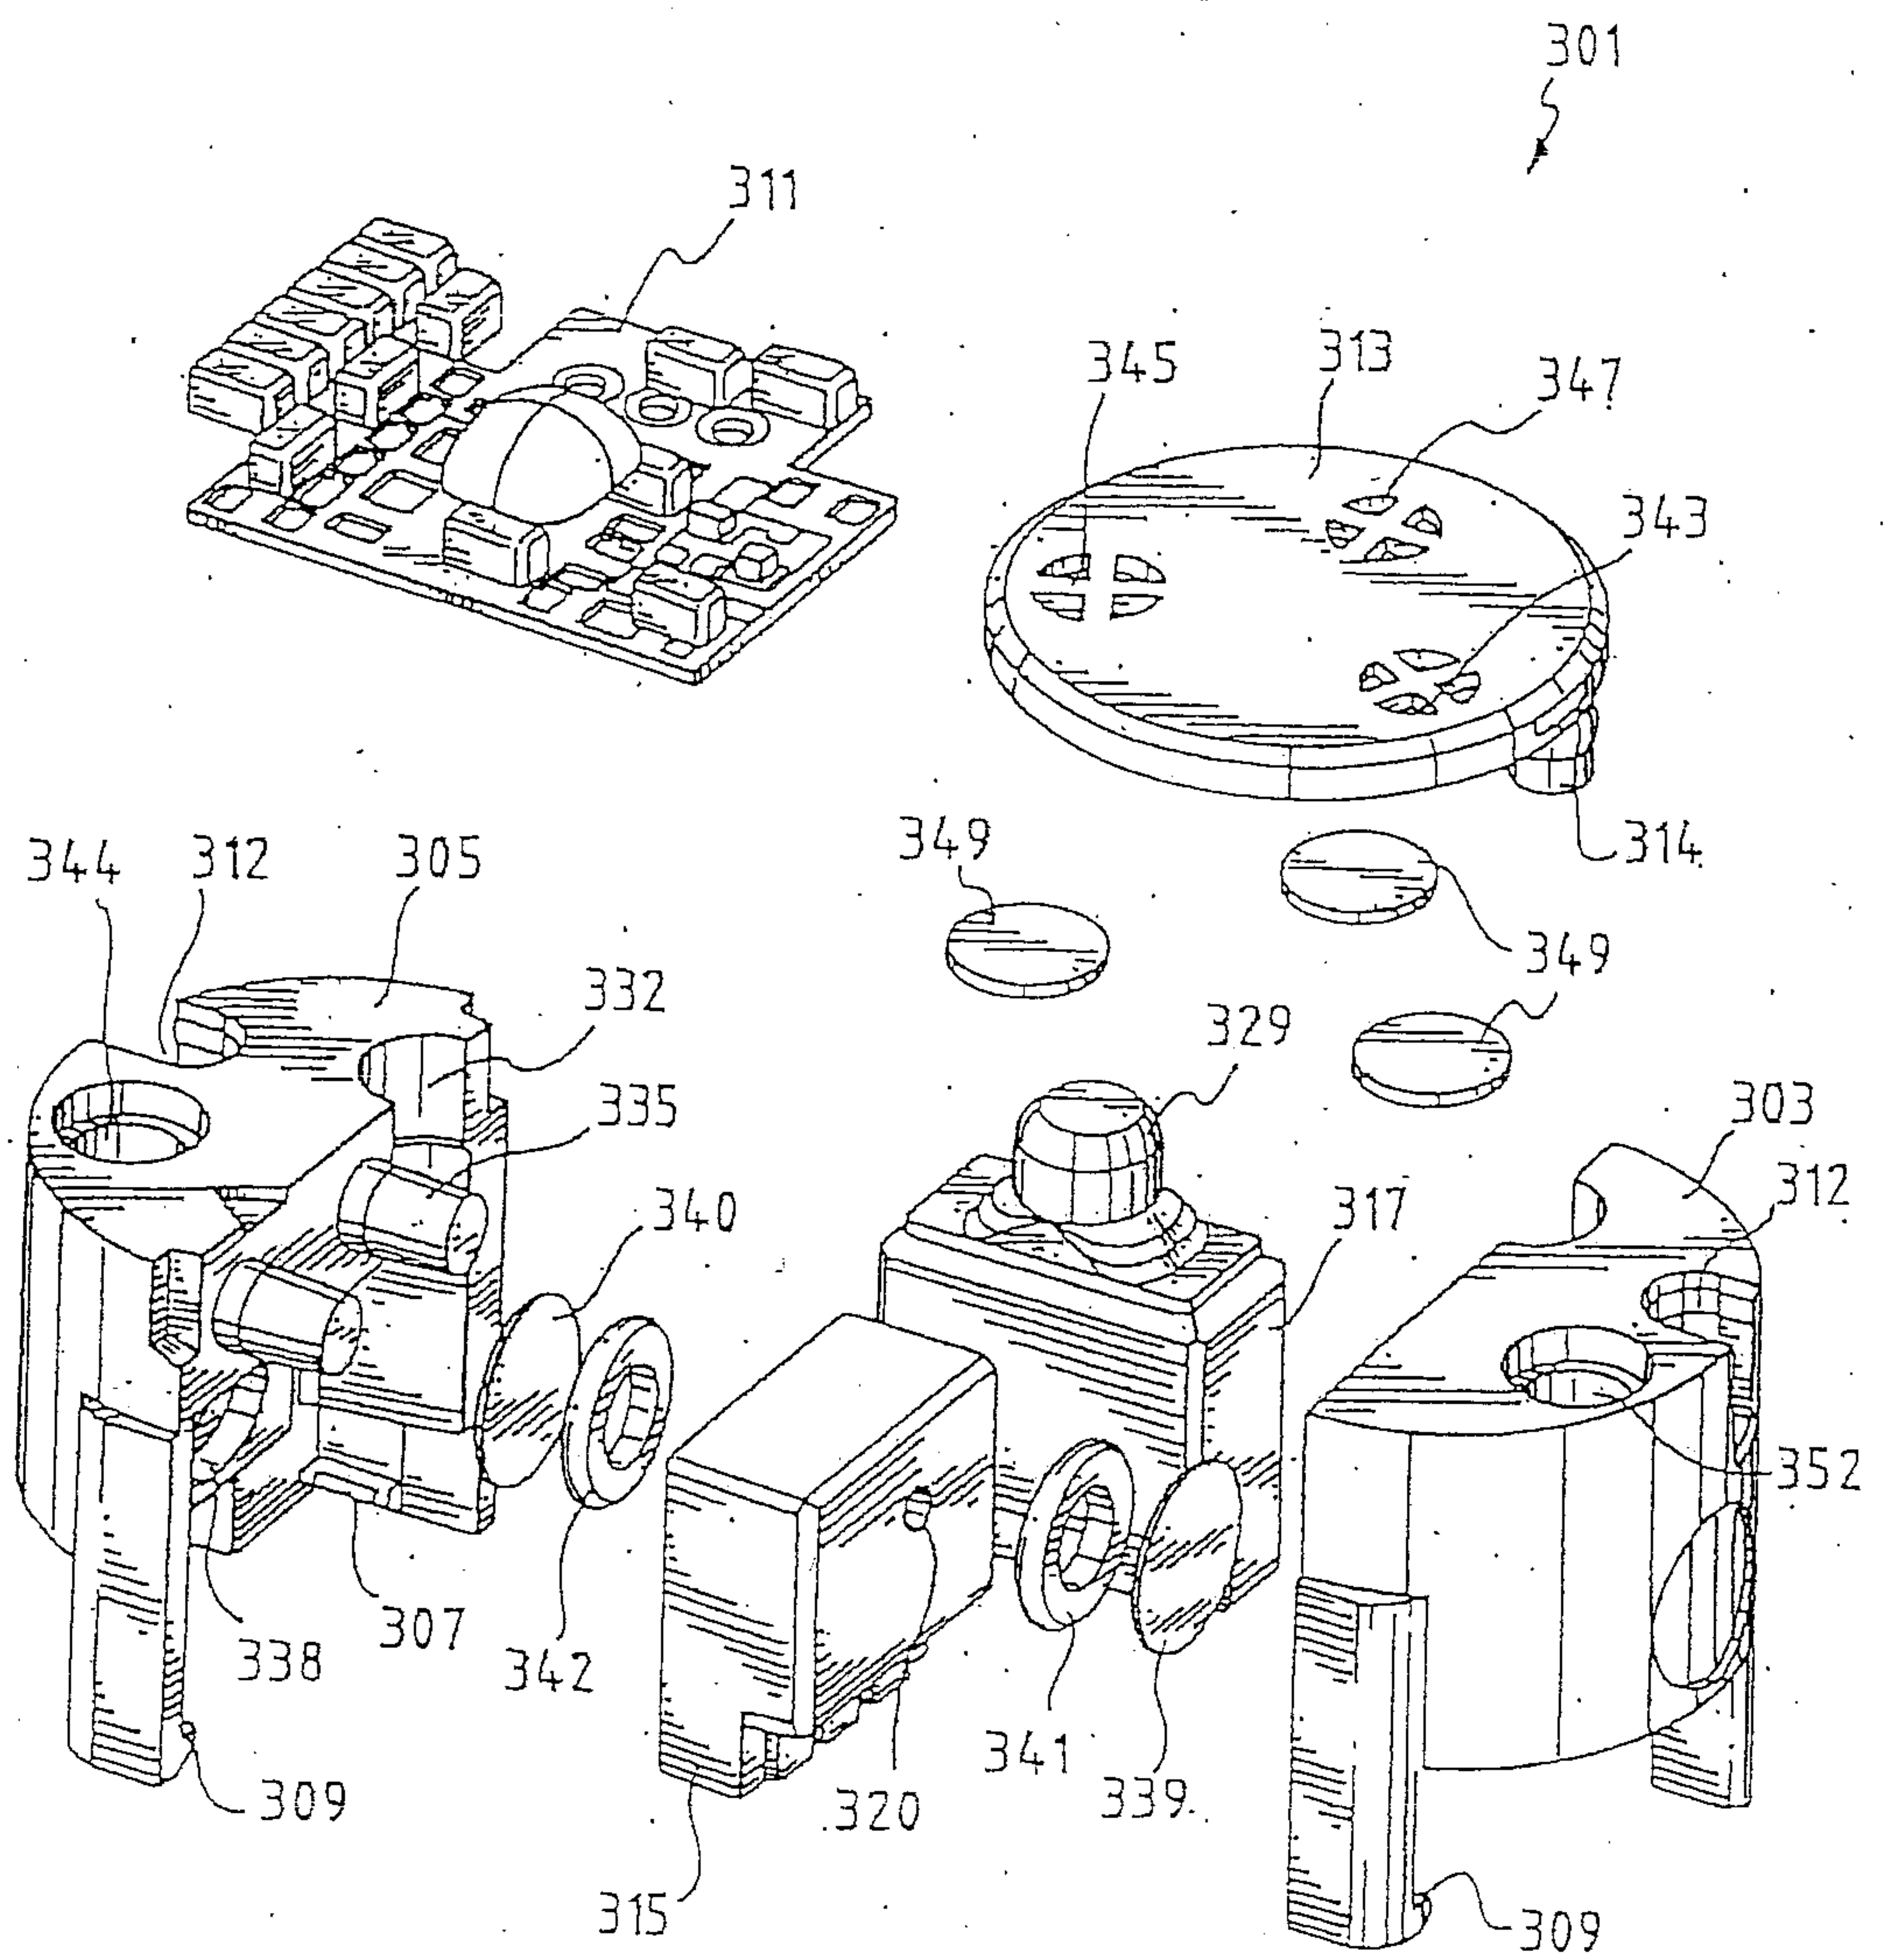

14/17

FIG. 14



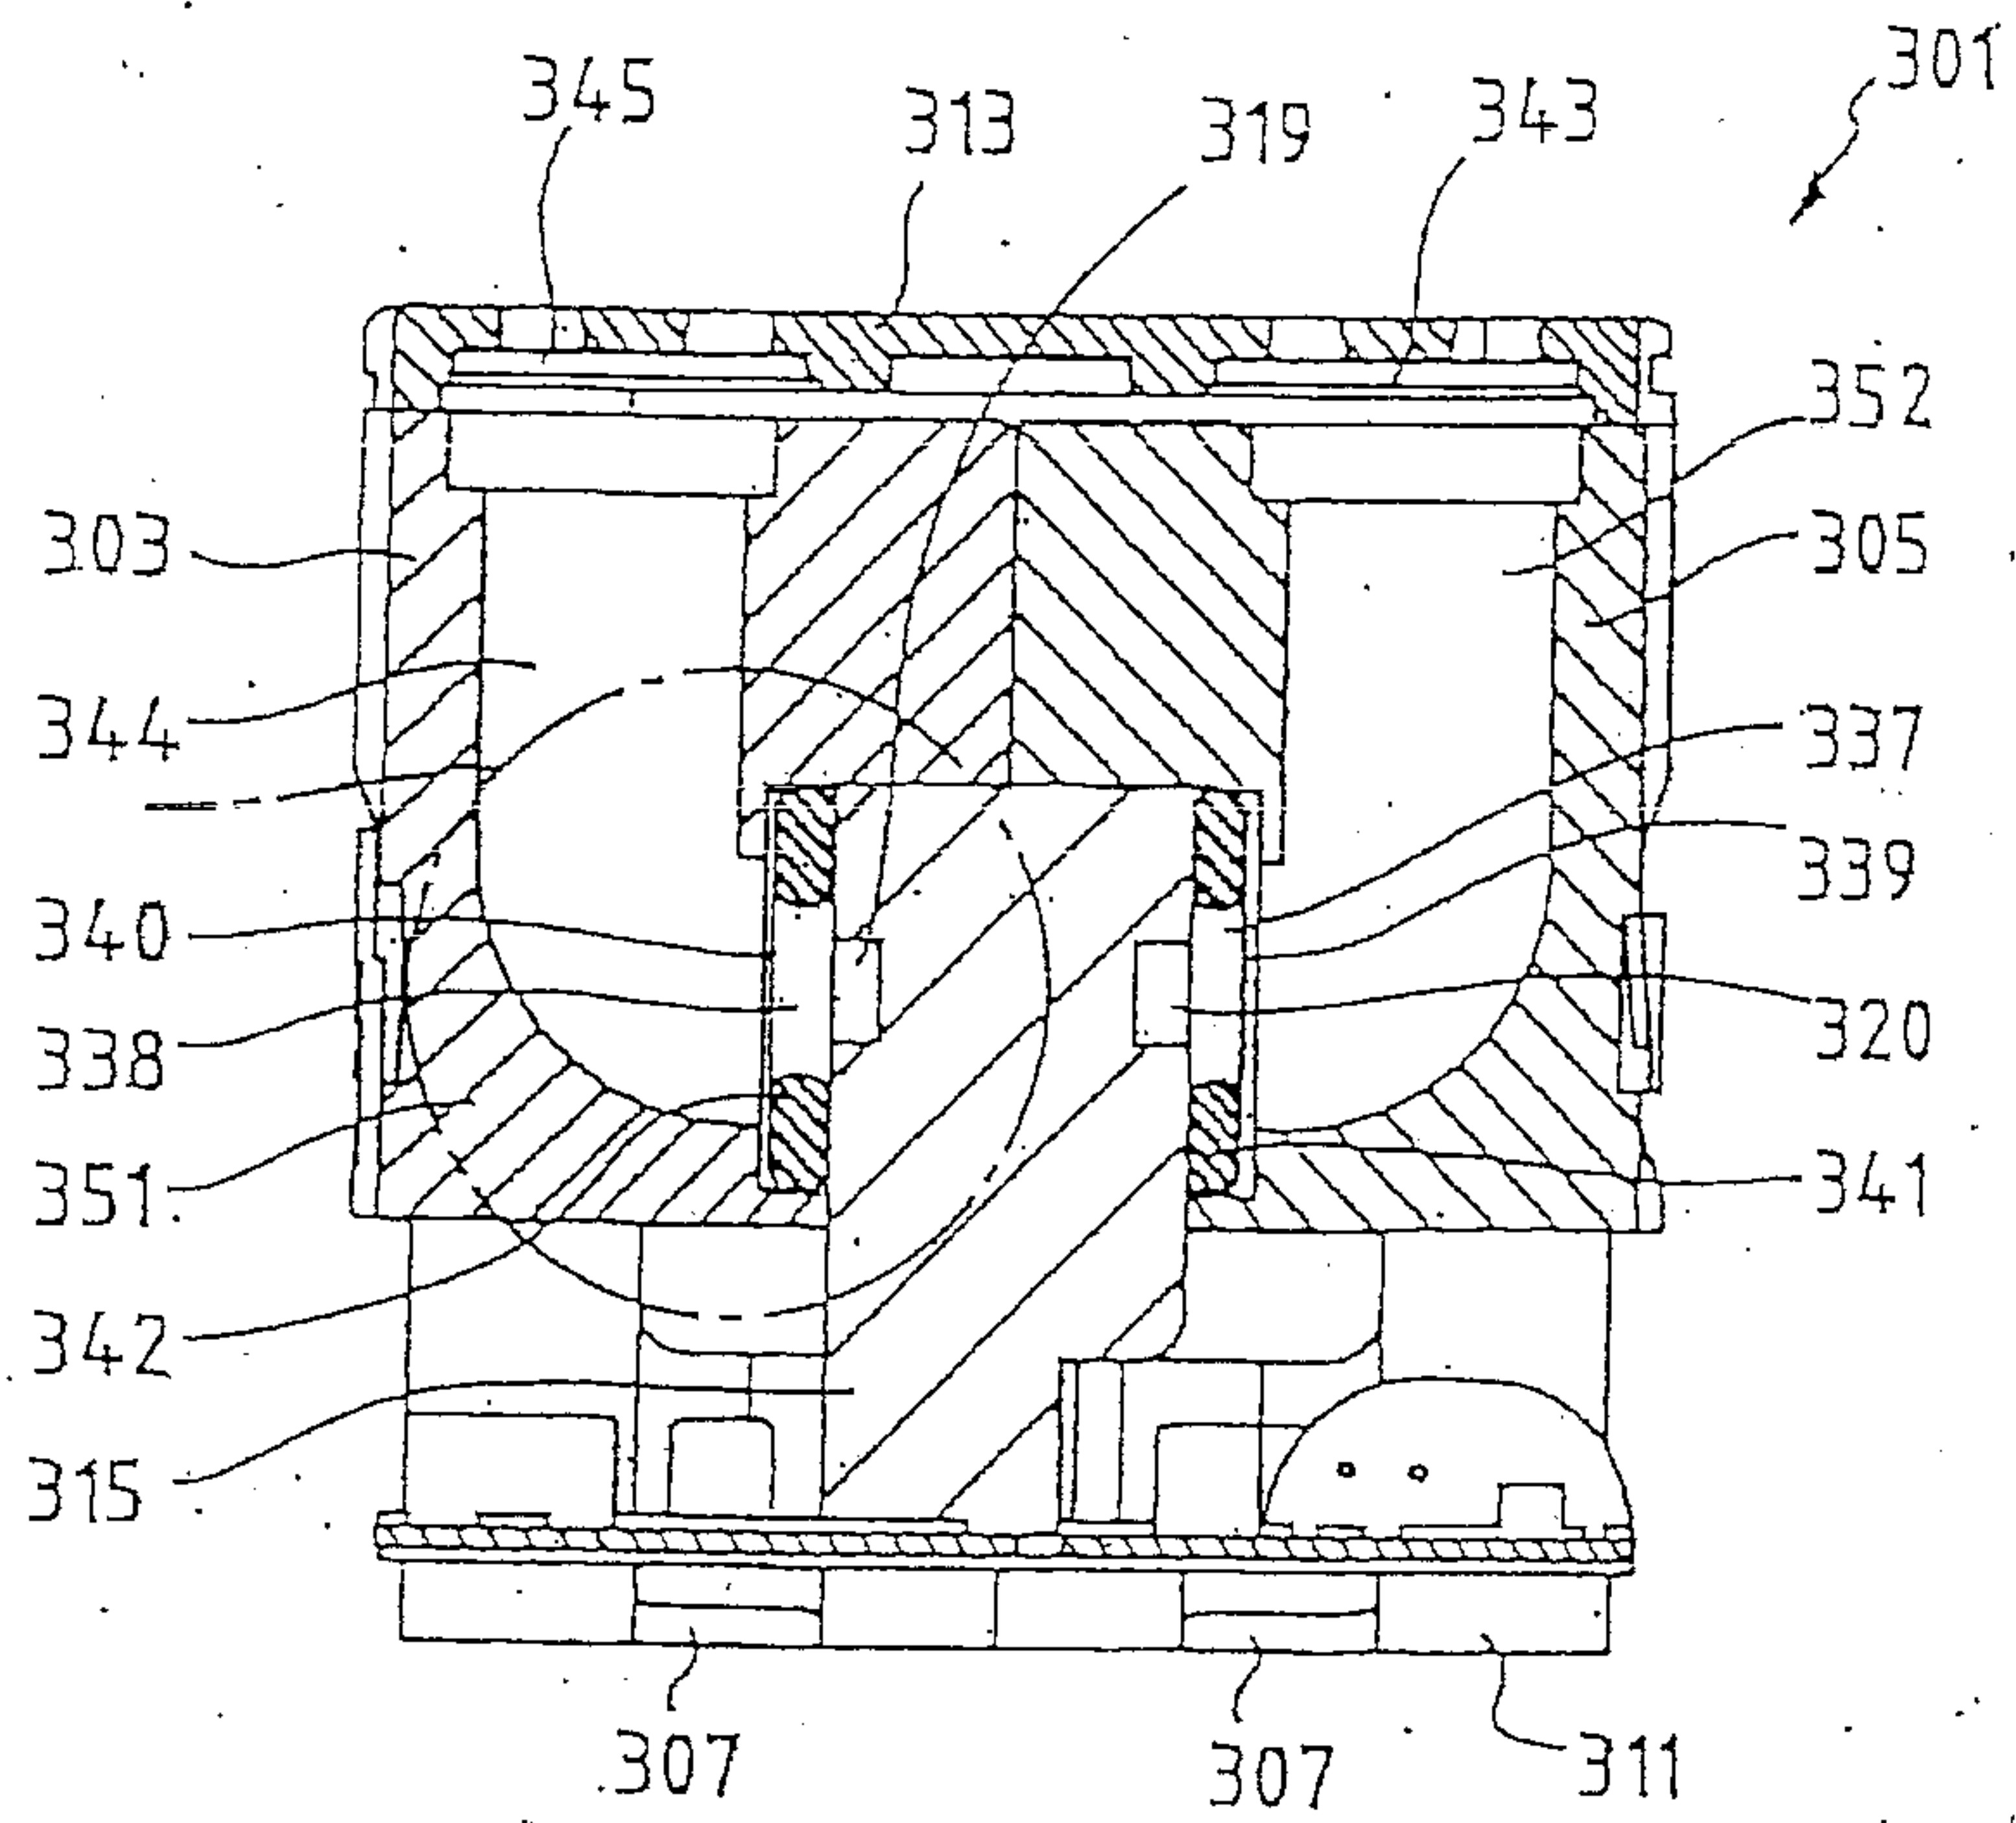



FIG. 15

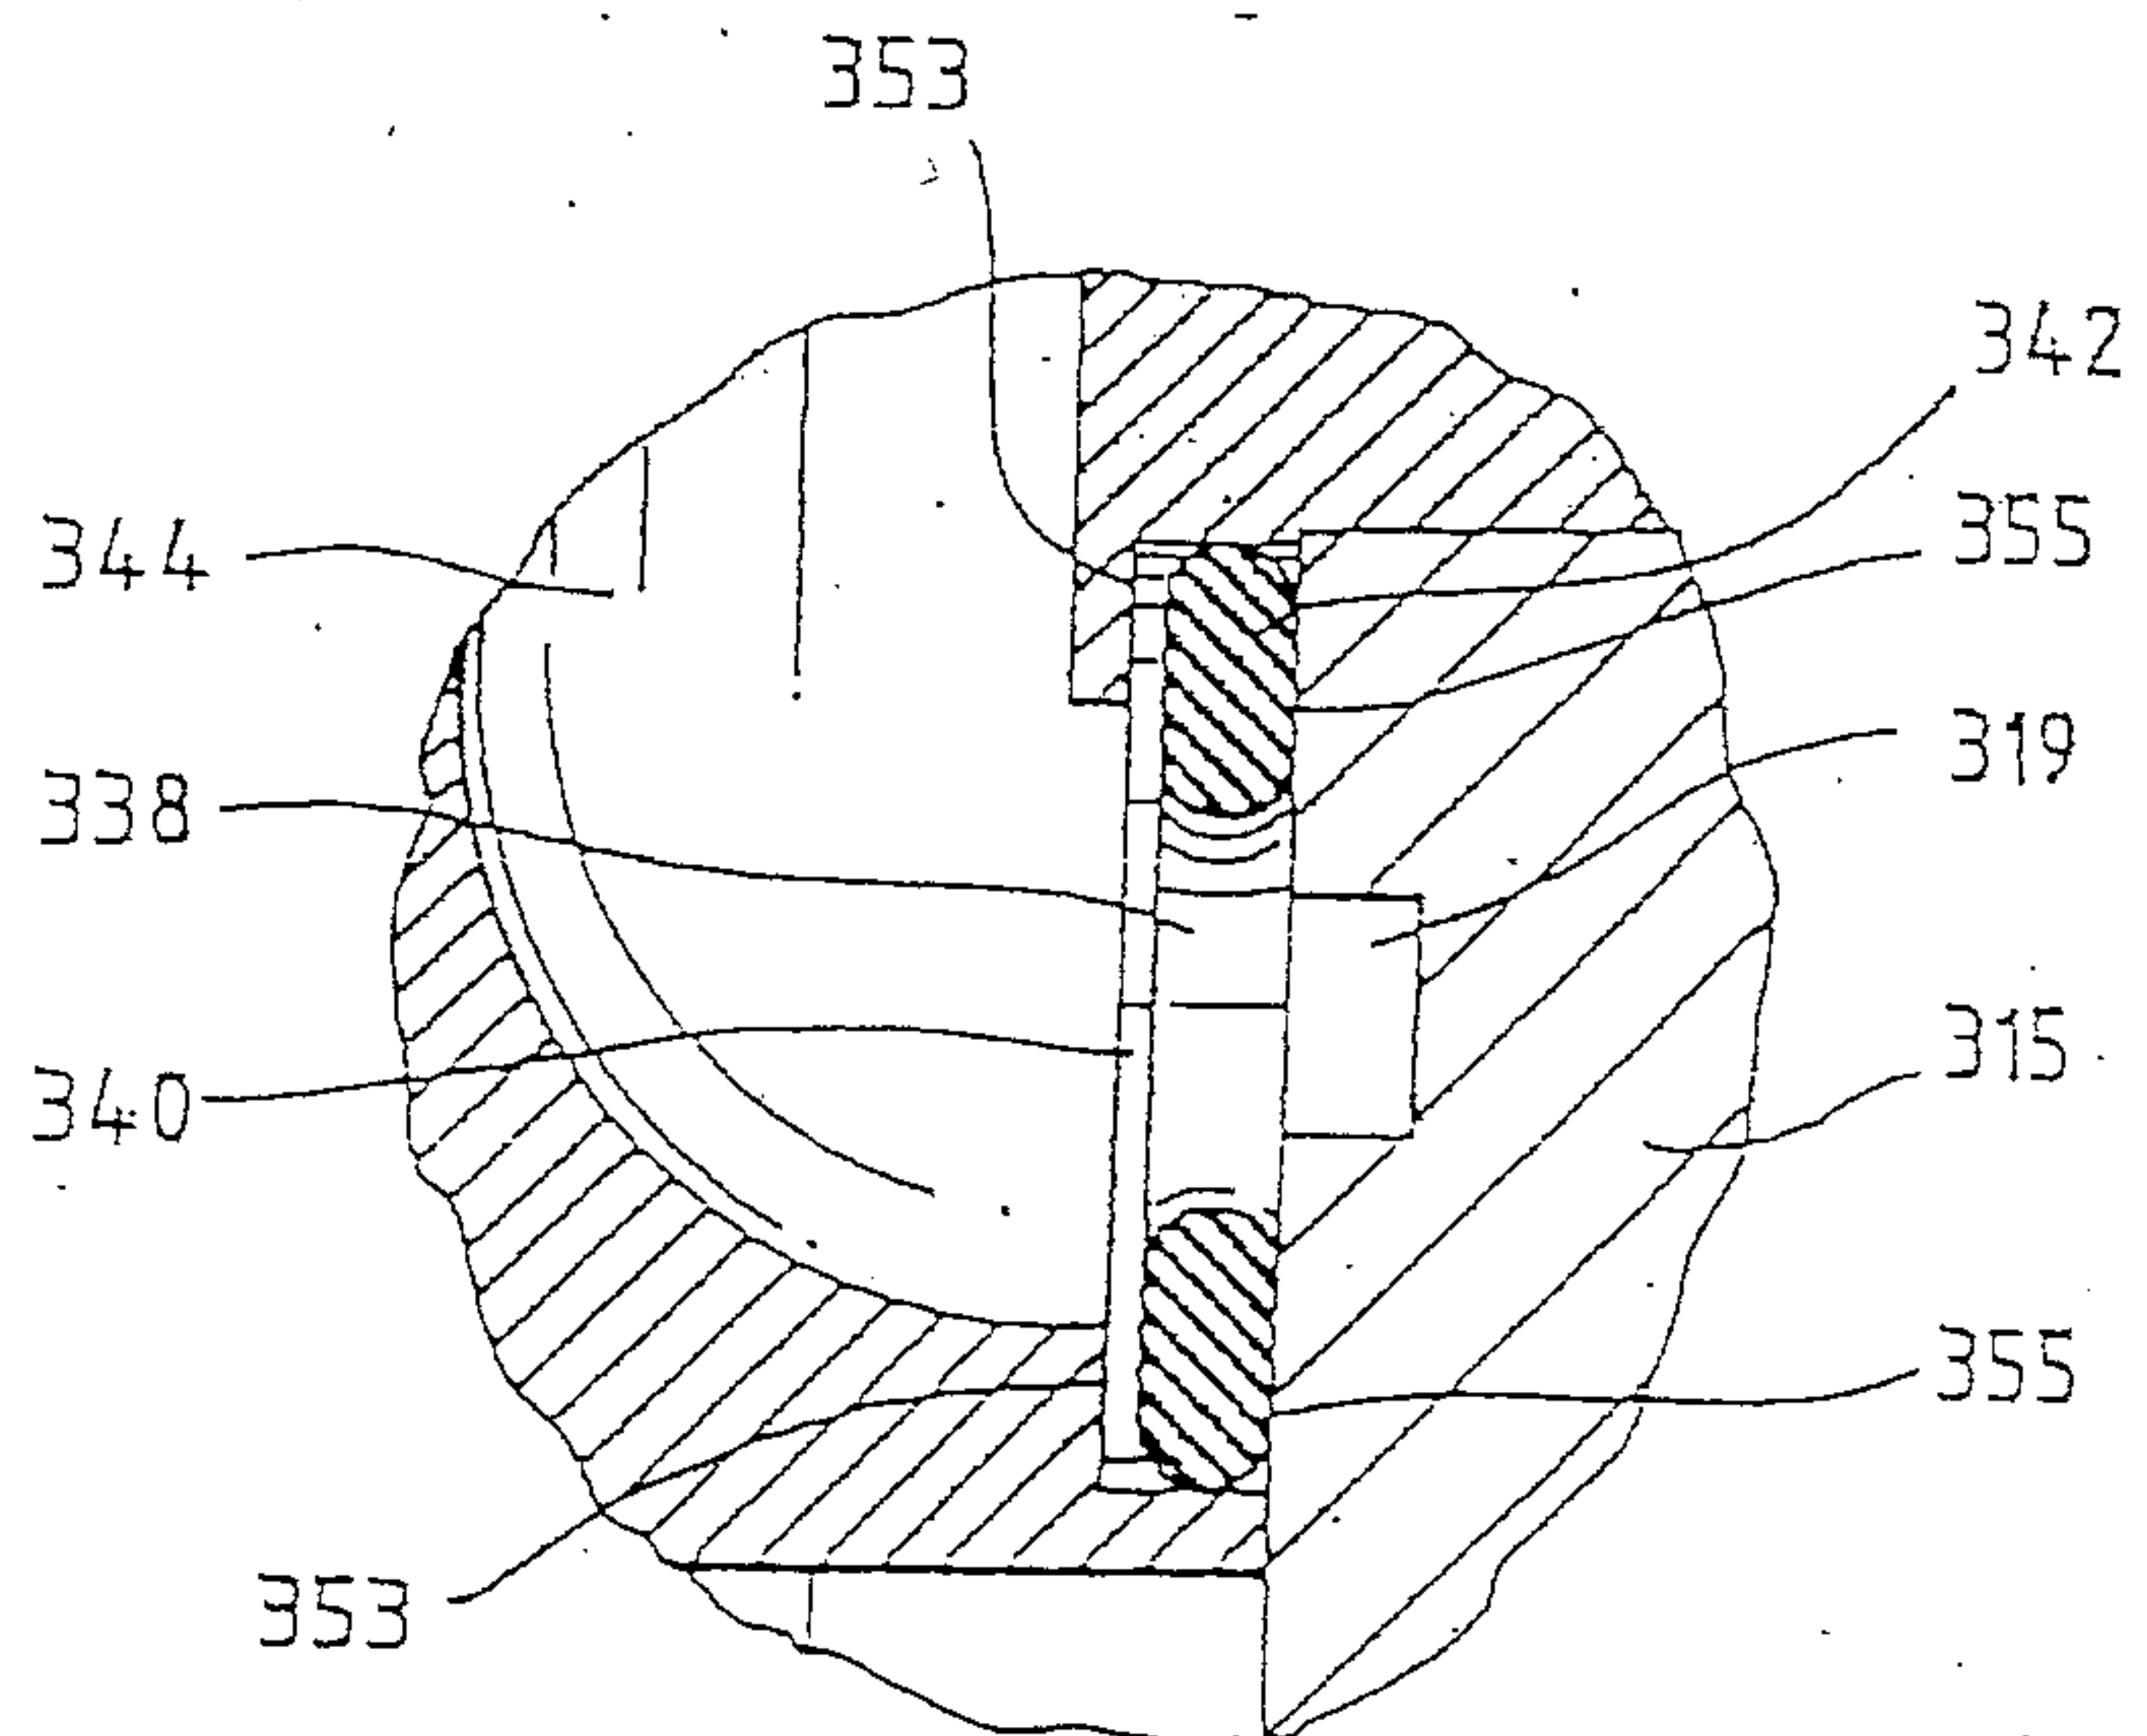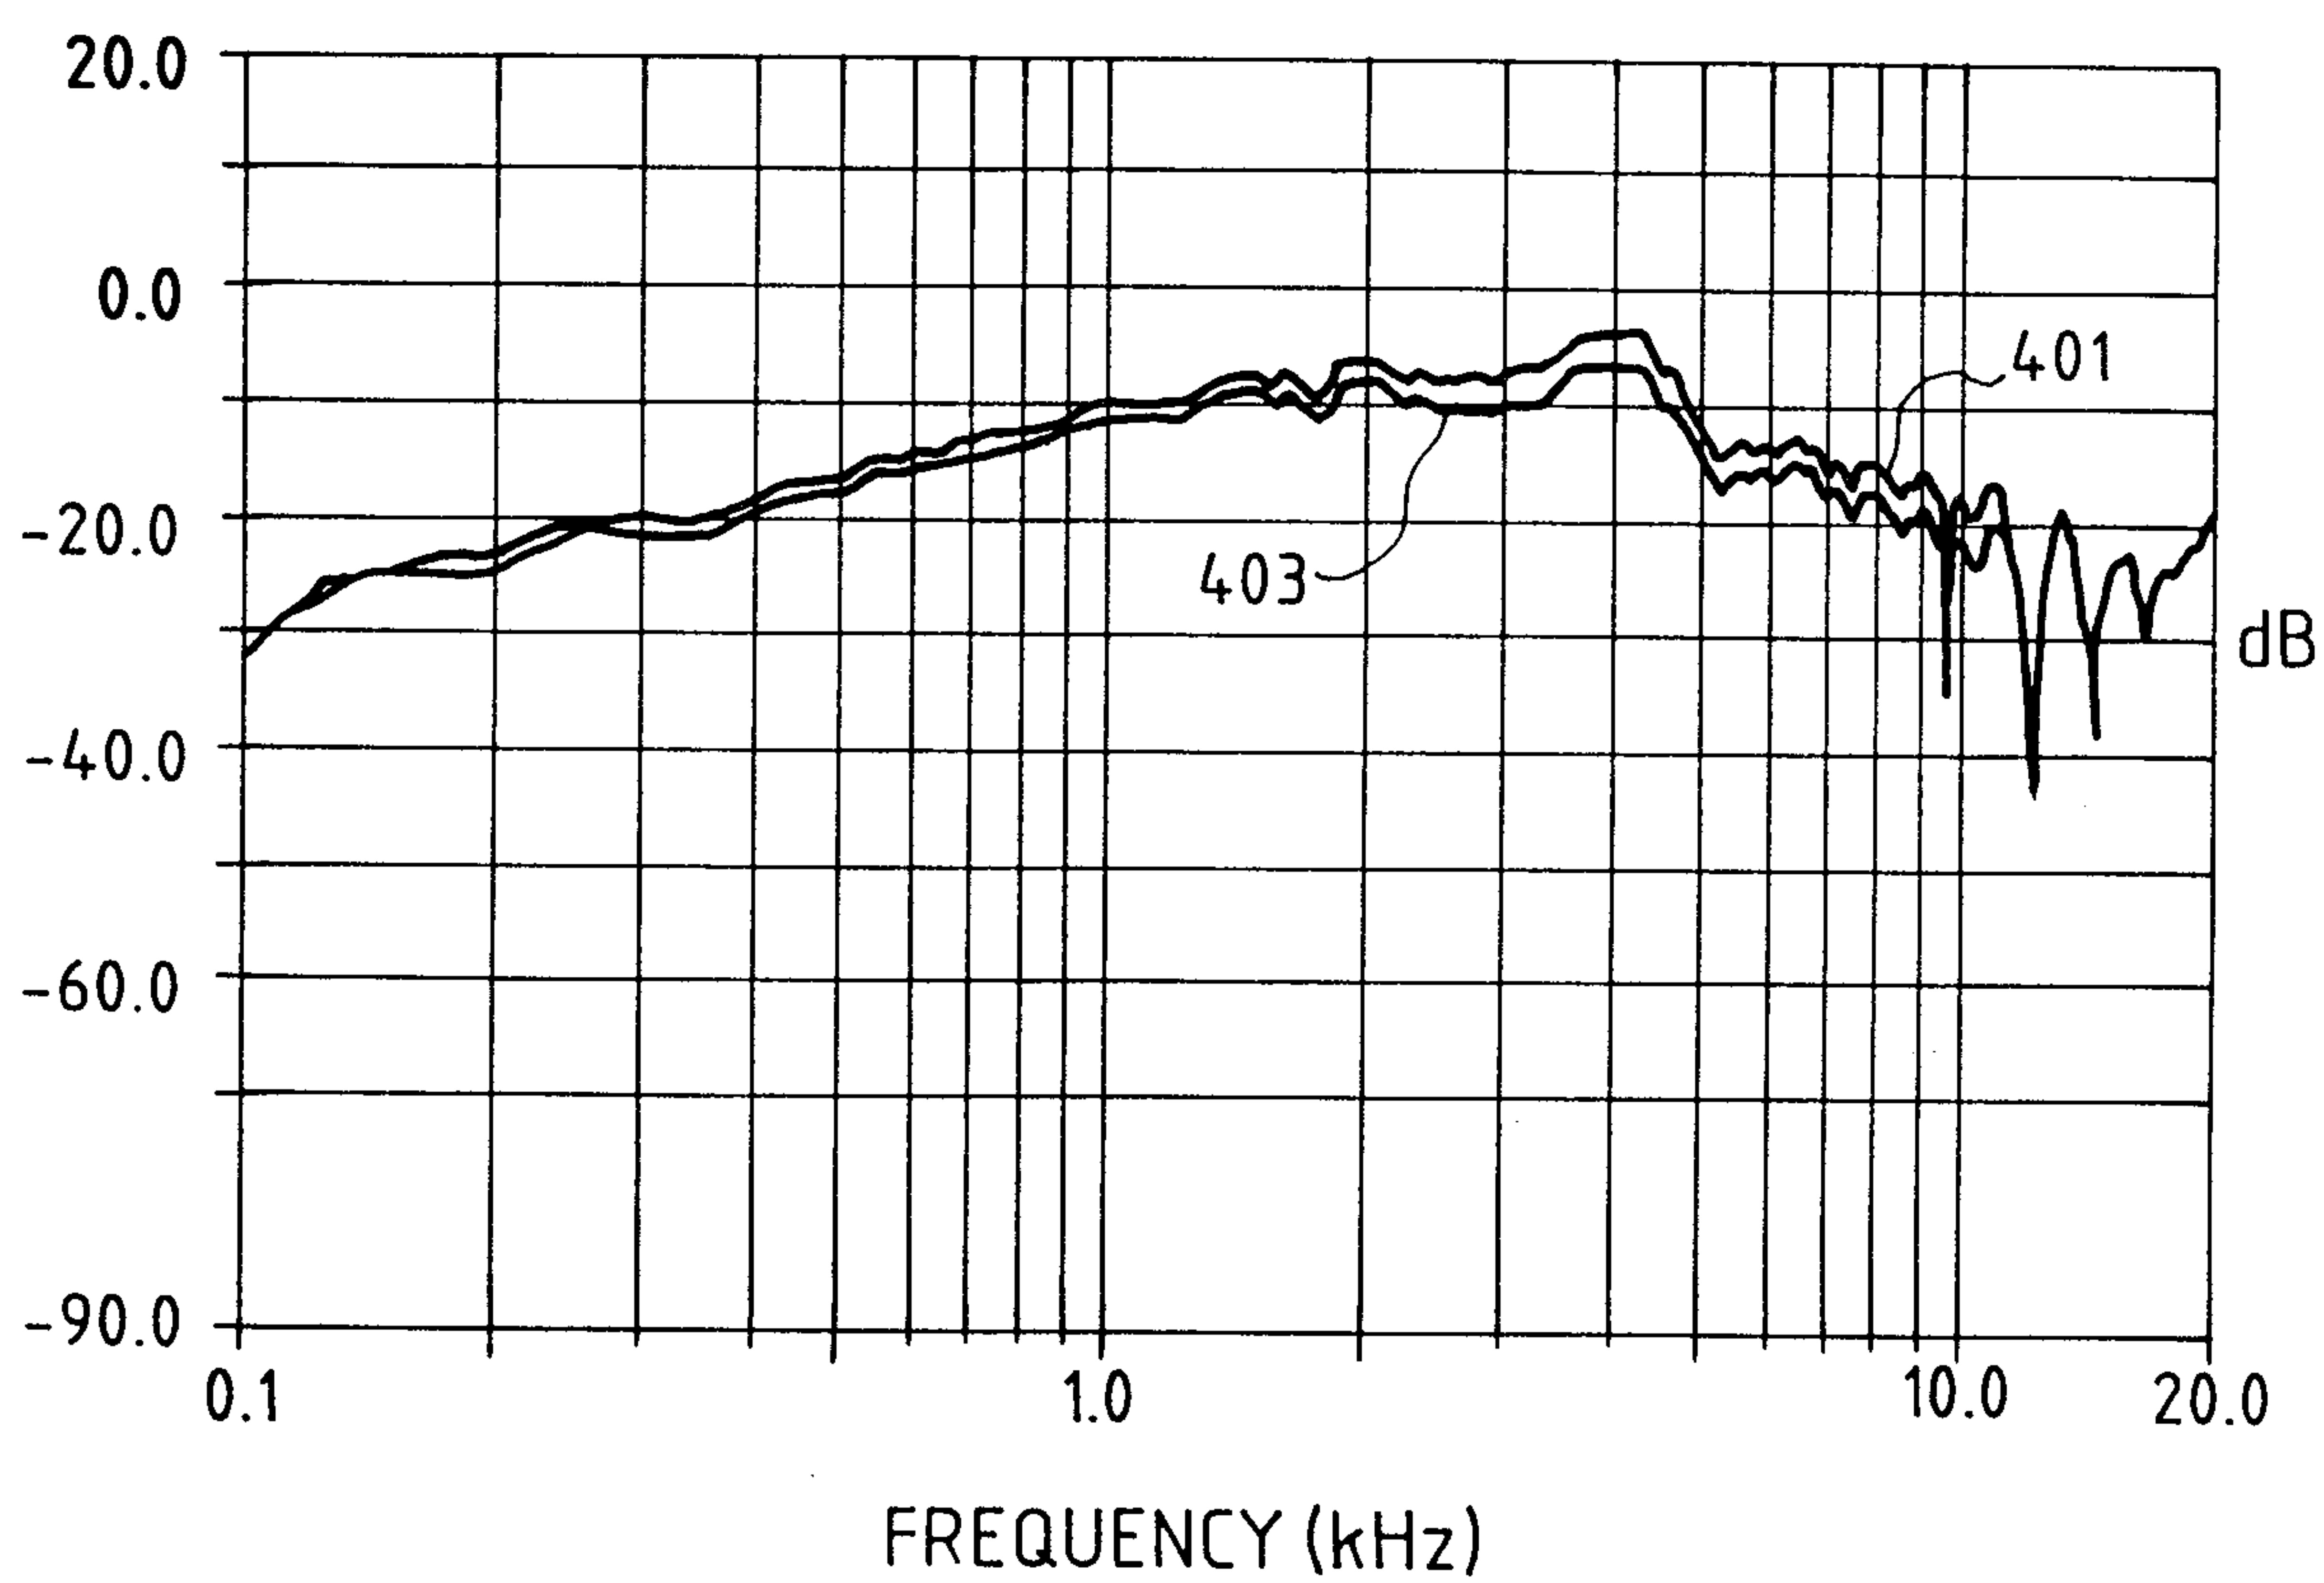

15/17


FIG. 16

16/17

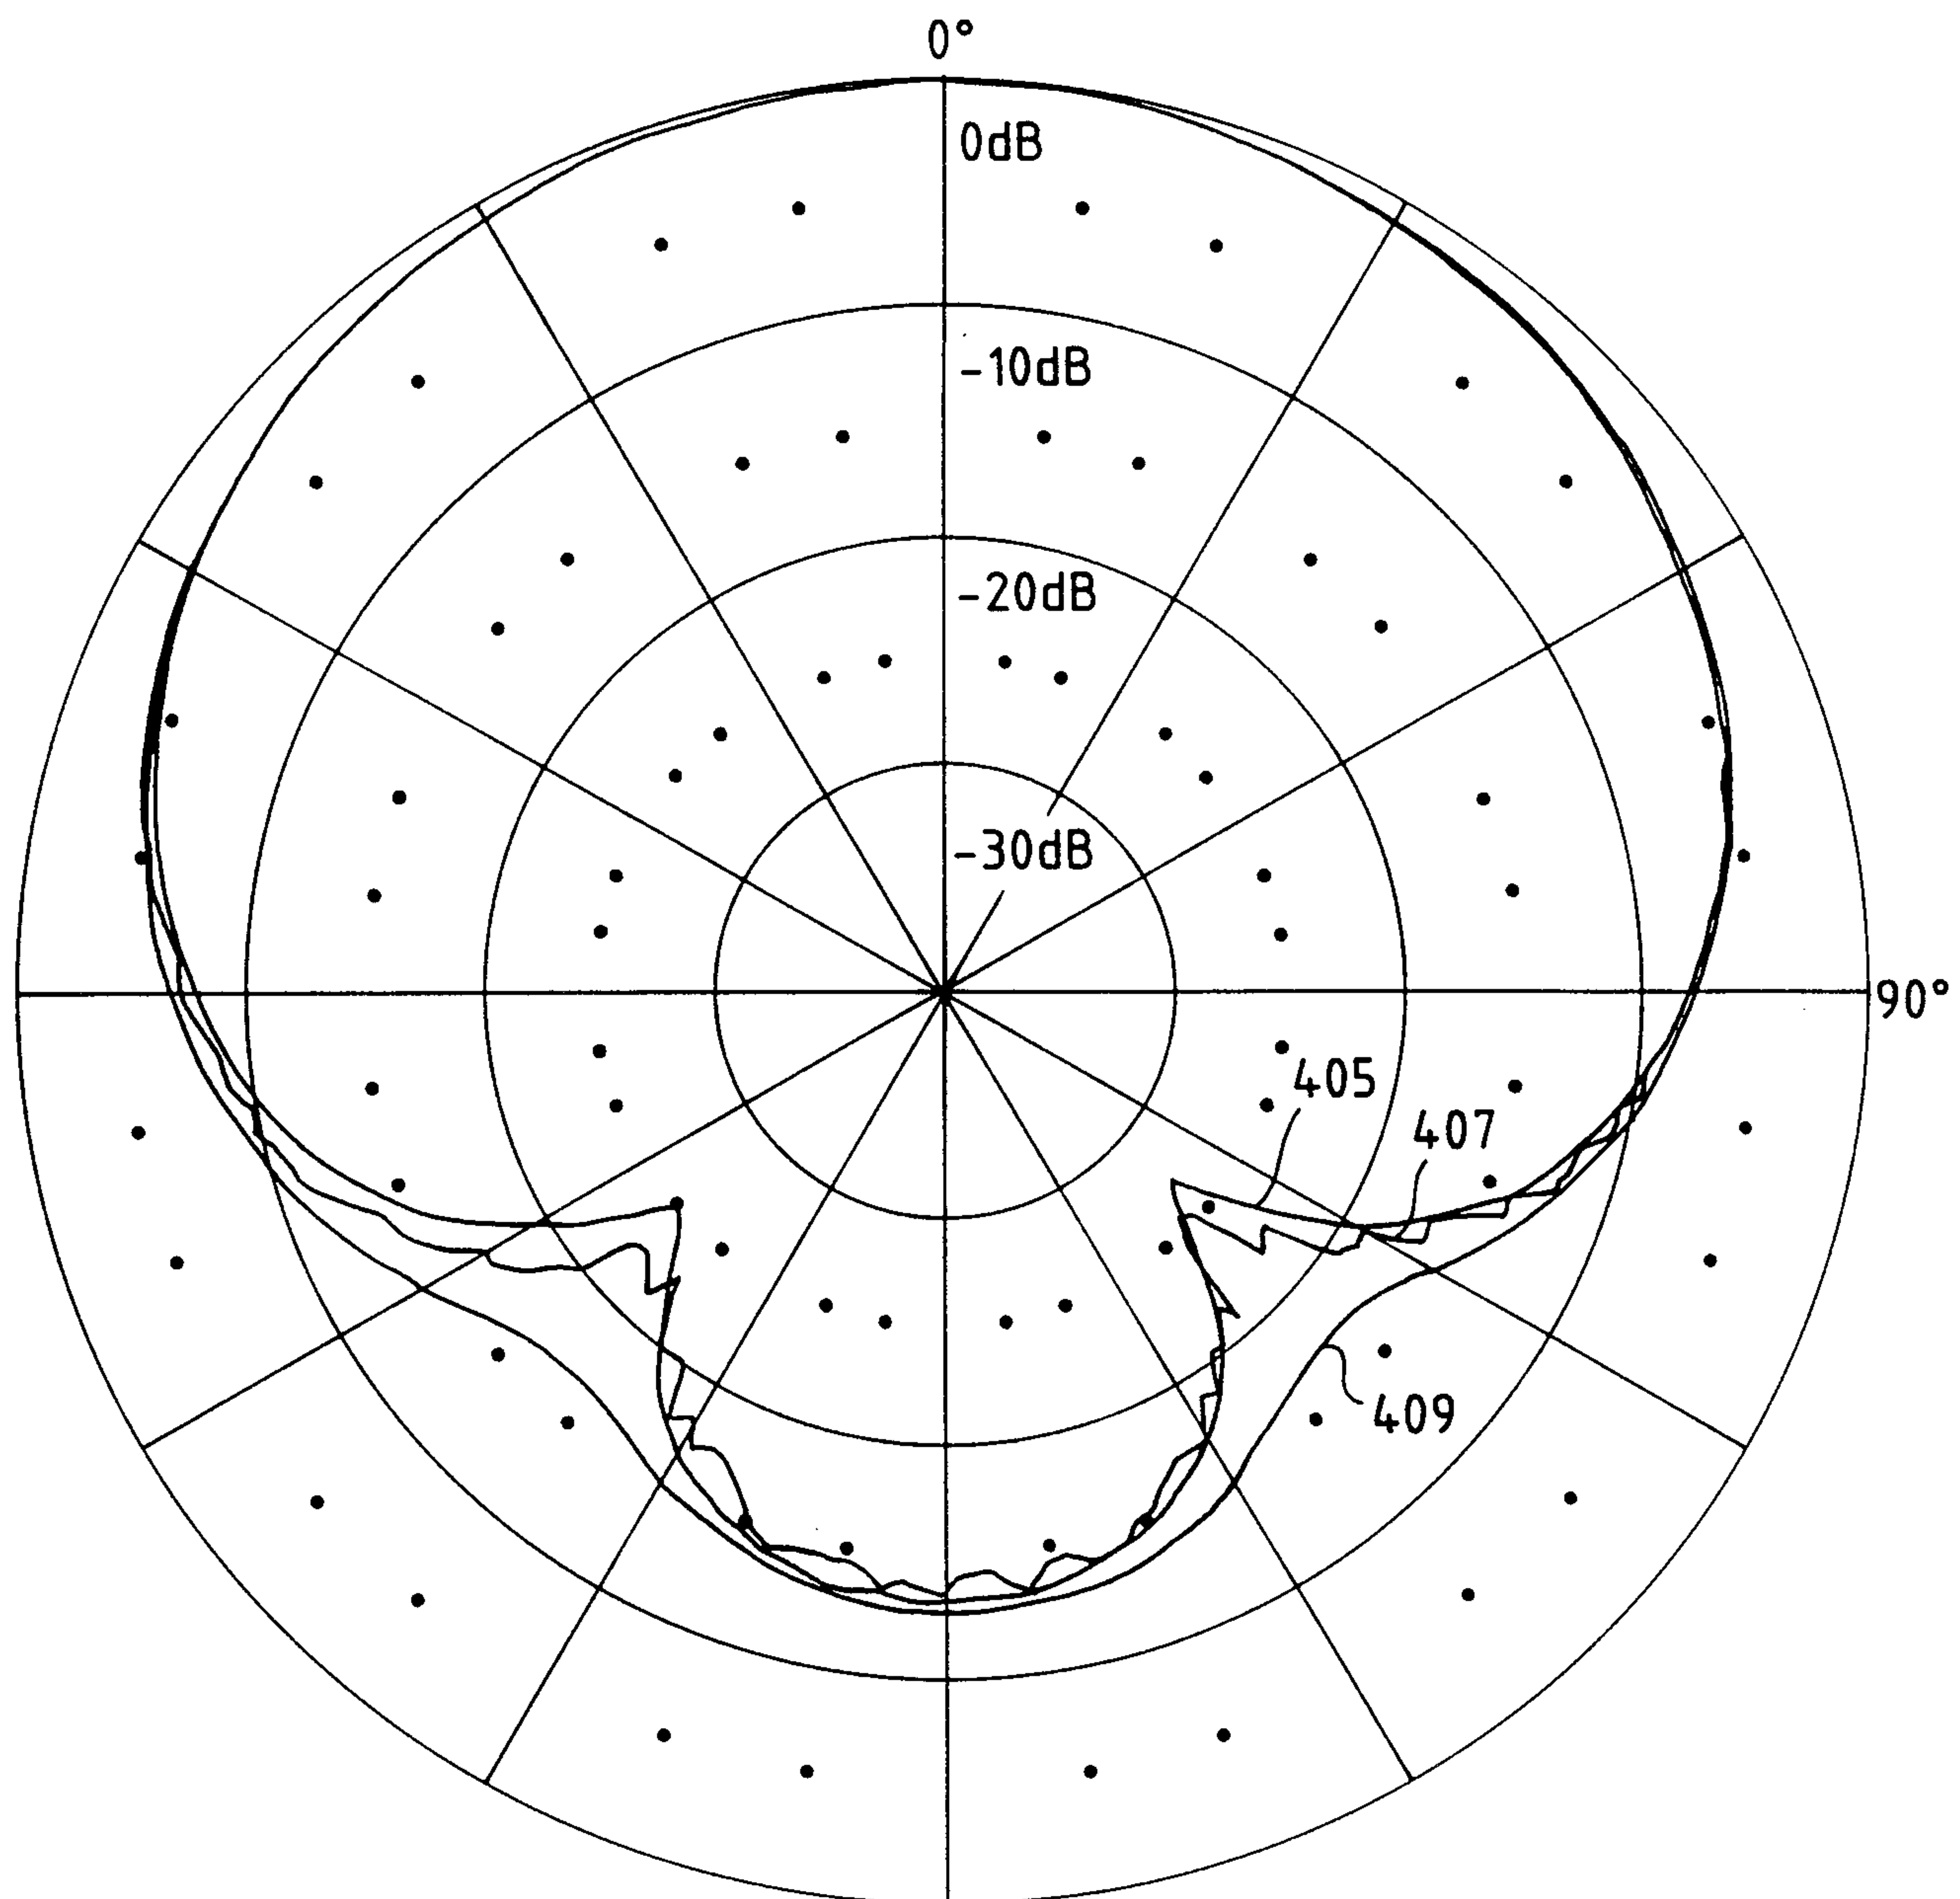FIG. 17

POLAR CHARACTERISTICS (10dB/MAJOR DIVISION)

17/17

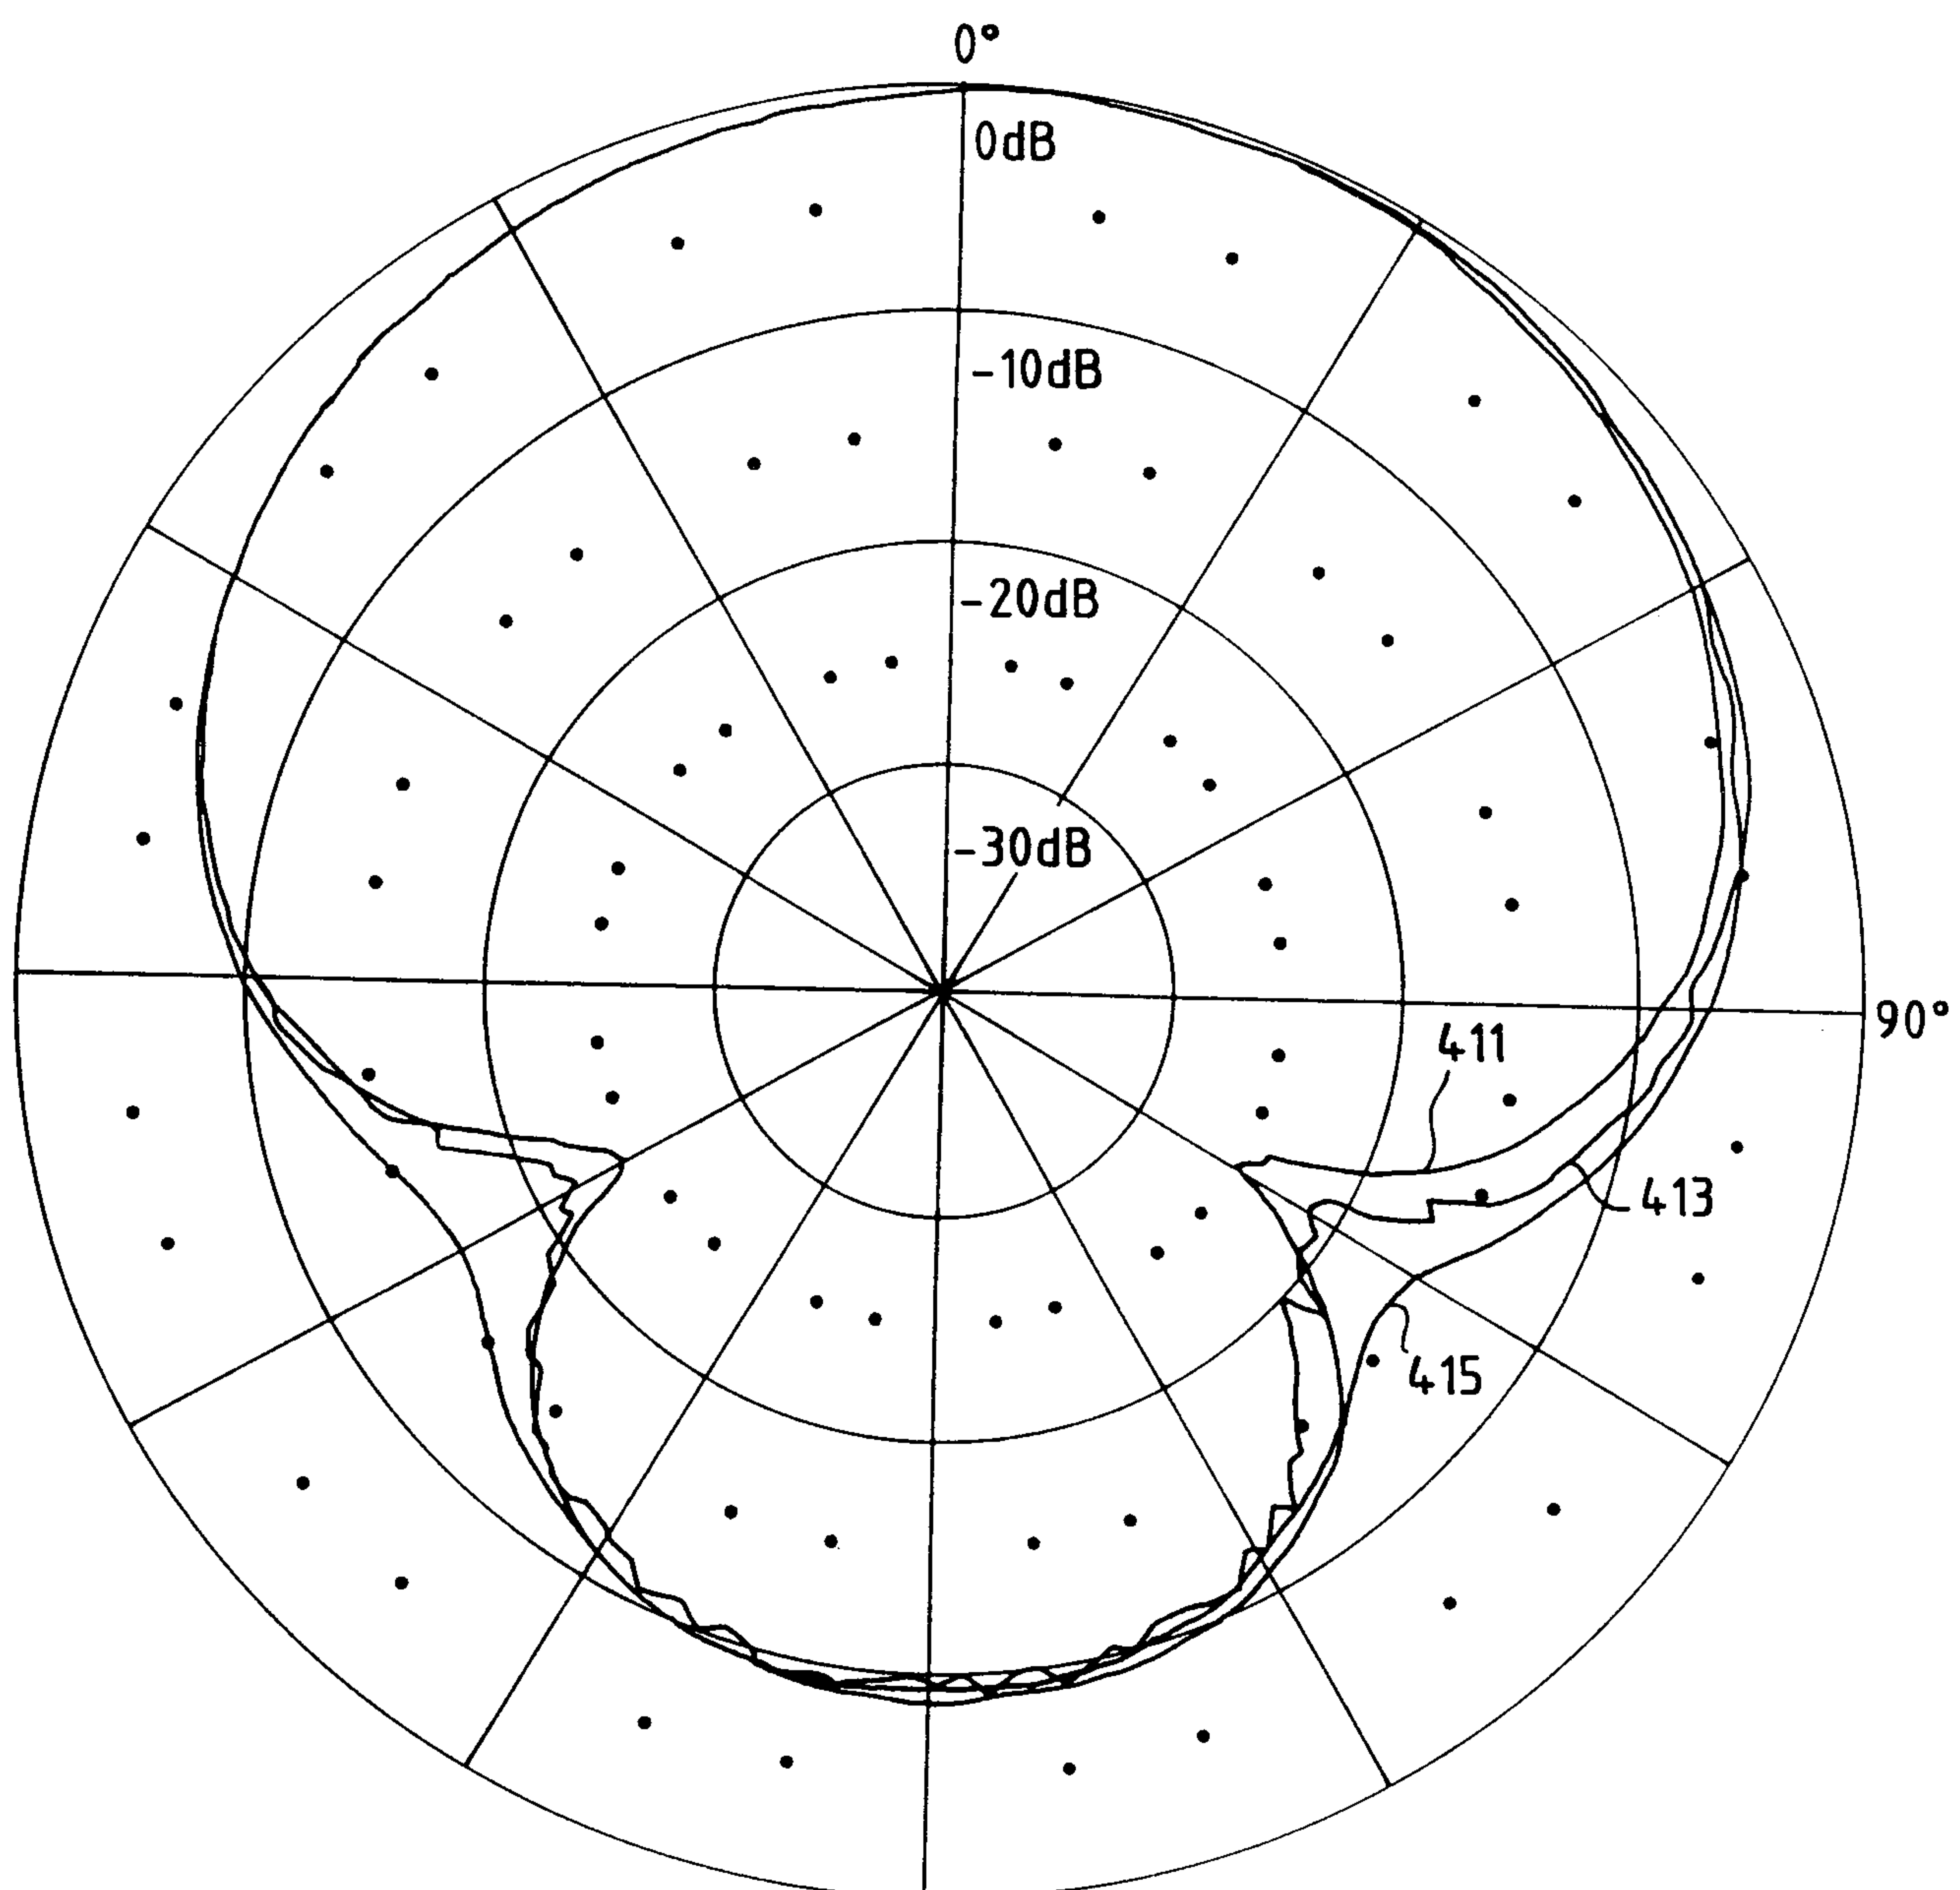FIG. 18

POLAR CHARACTERISTICS (10dB/MAJOR DIVISION)

45

FRONT

