

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2016/205506 A1

(43) International Publication Date
22 December 2016 (22.12.2016)

WIPO | PCT

(51) International Patent Classification:

B01J 23/847 (2006.01) *B01J 29/83* (2006.01)
B01J 35/00 (2006.01) *B01J 29/85* (2006.01)
B01J 23/42 (2006.01) *B01J 35/04* (2006.01)
B01D 53/94 (2006.01) *B01J 37/00* (2006.01)
B01J 29/06 (2006.01) *F01N 3/20* (2006.01)
B01J 29/76 (2006.01)

(21) International Application Number:

PCT/US2016/037861

(22) International Filing Date:

16 June 2016 (16.06.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/181,303 18 June 2015 (18.06.2015) US

(71) Applicant: **JOHNSON MATTHEY PUBLIC LIMITED COMPANY** [GB/GB]; 5th Floor, 25 Farringdon Street, London EC4A 4AB (GB).

(72) Inventor; and

(71) Applicant (for US only): **LU, Jing** [US/US]; c/o Johnson Matthey, 436 Devon Park Drive, Wayne, Pennsylvania 19087 (US).

(72) Inventors: **LARSSON, Mikael**; c/o Johnson Matthey, Victor Hasselblads gata 8, 42131 Gothenburg (SE). **MIC-ALLEF, David**; c/o Johnson Matthey, Orchard Road, Royton SG8 5HE (GB).

(74) Agent: **KOLESAR, Dana**; c/o Johnson Matthey Inc., 435 Devon Park Drive, Suite 600, Wayne, Pennsylvania 19087 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))



WO 2016/205506 A1

(54) Title: SINGLE OR DUAL LAYER AMMONIA SLIP CATALYST

(57) Abstract: A catalyst article having an extruded support having a plurality of channels through which exhaust gas flows during operation of an engine, and a single layer coating or a bi-layer coating on the support, where the extruded support contains a third SCR catalyst, the single layer coating and the bilayer-coating contain platinum on a support with low ammonia storage and a first SCR catalyst. The catalytic articles are useful for selective catalytic reduction (SCR) of NOx in exhaust gases and in reducing the amount of ammonia slip. Methods for producing such articles are described. Methods of using the catalytic articles in an SCR process, where the amount of ammonia slip is reduced, are also described.

SINGLE OR DUAL LAYER AMMONIA SLIP CATALYST

FIELD OF THE INVENTION

The invention relates to ammonia slip catalysts (ASC), articles containing ammonia slip catalysts and methods of manufacturing and using such articles to reduce ammonia slip.

BACKGROUND OF THE INVENTION

Hydrocarbon combustion in diesel engines, stationary gas turbines, and other systems generates exhaust gas that must be treated to remove nitrogen oxides (NO_x), which comprises NO (nitric oxide) and NO₂ (nitrogen dioxide), with NO being the majority of the NO_x formed. NO_x is known to cause a number of health issues in people as well as causing a number of detrimental environmental effects including the formation of smog and acid rain. To mitigate both the human and environmental impact from NO_x in exhaust gas, it is desirable to eliminate these undesirable components, preferably by a process that does not generate other noxious or toxic substances.

Exhaust gas generated in lean-burn and diesel engines is generally oxidative. NO_x needs to be reduced selectively with a catalyst and a reductant in a process known as selective catalytic reduction (SCR) that converts NO_x into elemental nitrogen (N₂) and water. In an SCR process, a gaseous reductant, typically anhydrous ammonia, aqueous ammonia, or urea, is added to an exhaust gas stream prior to the exhaust gas contacting the catalyst. The reductant is absorbed onto the catalyst and the NO_x is reduced as the gases pass through or over the catalyzed substrate. In order to maximize the conversion of NO_x, it is often necessary to add more than a stoichiometric amount of ammonia to the gas stream. However, release of the excess ammonia into the atmosphere would be detrimental to the health of people and to the environment. In addition, ammonia is caustic, especially in its aqueous form. Condensation of ammonia and water in regions of the exhaust line downstream of the exhaust catalysts can result in a corrosive mixture that can damage the exhaust system. Therefore the release of ammonia in exhaust gas should be eliminated. In many conventional exhaust systems, an ammonia oxidation catalyst (also known as an ammonia slip catalyst or "ASC") is installed downstream of the SCR catalyst to remove ammonia from the exhaust gas by converting it to nitrogen. The use of ammonia slip catalysts can allow for NO_x conversions of greater than 90% over a typical diesel driving cycle.

It would be desirable to have a catalyst that provides for both NO_x removal by SCR and for selective ammonia conversion to nitrogen, where ammonia conversion occurs over a wide range of temperatures in a vehicle's driving cycle, and minimal nitrogen oxide and nitrous oxide byproducts are formed.

5

SUMMARY OF THE INVENTION

In a first aspect, the invention relates to a catalyst article comprising: (a) an extruded support having an inlet, an outlet and a plurality of channels through which exhaust gas flows during operation of an engine, and (b) a single layer coating or a bi-layer coating on the support, 10 where the extruded support comprises a third SCR catalyst, the single layer coating comprises a blend of platinum on a support with low ammonia storage with a first SCR catalyst, and the bi-layer coating comprises a bottom layer and a top layer, where the bottom layer is located between the top layer and the extruded support, the bottom layer comprises a blend of platinum on a support with low ammonia storage with a first SCR catalyst, and the top layer comprises a 15 second SCR catalyst.

In another aspect, the invention relates to an exhaust system comprising a catalyst of the first aspect of the invention and a means for forming NH₃ in the exhaust gas.

In yet another aspect, the invention relates to a vehicle comprising an exhaust system comprising a catalyst of the first aspect of the invention and a means for forming NH₃ in the 20 exhaust gas.

In still another aspect, the invention relates to a method of improving the N₂ yield from ammonia in an exhaust gas at a temperature from about 250 °C to about 350 °C by contacting an exhaust gas comprising ammonia with a catalyst article of the first aspect of the invention.

In another aspect, the invention relates to a method of reducing N₂O formation from NH₃ 25 in an exhaust gas, the method comprising contacting an exhaust gas comprising ammonia with a catalyst article of the first aspect of the invention.

Brief Description of the Drawings

30 Fig. 1 is a diagram of a configuration in which a single layer blend of an ammonia slip catalyst is located on each side of a substrate containing a third SCR catalyst.

Fig. 2 is a diagram of a configuration in which a bi-layer coating having a bottom layer comprising a mixture of platinum on a low ammonia storage support and a first SCR catalyst with a top layer comprising a second SCR catalyst is located on each side of a substrate containing a third SCR catalyst.

5

DETAILED DESCRIPTION OF THE INVENTION

As used in this specification and the appended claims, the singular forms "a", "an" and "the" include plural referents unless the context clearly indicates otherwise. Thus, for example, reference to "a catalyst" includes a mixture of two or more catalysts, and the like.

10 As used herein, the term "ammonia slip", means the amount of unreacted ammonia that passes through the SCR catalyst.

The term "support" means the material to which a catalyst is fixed.

15 The term "a support with low ammonia storage" means a support that stores less than 0.001 mmol NH₃ per m³ of support. The support with low ammonia storage is preferably a molecular sieve or zeolite having a framework type selected from the group consisting of AEI, ANA, ATS, BEA, CDO, CFI, CHA, CON, DDR, ERI, FAU, FER, GON, IFR, IFW, IFY, IHW, IMF, IRN, IRY, ISV, ITE, ITG, ITN, ITR, ITW, IWR, IWS, IWW, JOZ, LTA, LTF, MEL, MEP, MFI, MRE, MSE, MTF, MTN, MTT, MTW, MVY, MWW, NON, NSI, RRO, RSN, RTE, RTH, RUT, RWR, SEW, SFE, SFF, SFG, SFH, SFN, SFS, SFV, SGT, SOD, SSF, 20 SSO, SSY, STF, STO, STT, SVR, SVV, TON, TUN, UOS, UOV, UTL, UWY, VET, VNI. More preferably, the molecular sieve or zeolite has a framework type selected from the group consisting of BEA, CDO, CON, FAU, MEL, MFI and MWW, even more preferably the framework type is selected from the group consisting of BEA and MFI.

25 The term "calcine", or "calcination", means heating the material in air or oxygen. This definition is consistent with the IUPAC definition of calcination. (IUPAC. Compendium of Chemical Terminology, 2nd ed. (the "Gold Book"). Compiled by A. D. McNaught and A. Wilkinson. Blackwell Scientific Publications, Oxford (1997). XML on-line corrected version: <http://goldbook.iupac.org> (2006-) created by M. Nic, J. Jirat, B. Kosata; updates compiled by A. Jenkins. ISBN 0-9678550-9-8. doi:10.1351/goldbook.) Calcination is performed to decompose a metal salt and promote the exchange of metal ions within the catalyst and also to adhere the

catalyst to a substrate. The temperatures used in calcination depend upon the components in the material to be calcined and generally are between about 400 °C to about 900 °C for approximately 1 to 8 hours. In some cases, calcination can be performed up to a temperature of about 1200 °C. In applications involving the processes described herein, calcinations are 5 generally performed at temperatures from about 400 °C to about 700 °C for approximately 1 to 8 hours, preferably at temperatures from about 400 °C to about 650 °C for approximately 1 to 4 hours.

The term “about” means approximately and refers to a range that is optionally \pm 25%, preferably \pm 10%, more preferably, \pm 5%, or most preferably \pm 1% of the value with which the 10 term is associated.

When a range, or ranges, for various numerical elements are provided, the range, or ranges, can include the values, unless otherwise specified.

The term “N₂ selectivity” means the percent conversion of ammonia into nitrogen.

15 In a first aspect of the invention, a catalyst article comprises: (a) an extruded support having an inlet, an outlet and a plurality of channels through which exhaust gas flows during operation of an engine, and (b) a single layer coating or a bi-layer coating on the support, where the extruded support comprises a third SCR catalyst, the single layer coating comprises a blend of platinum on a support with low ammonia storage with a first SCR catalyst, and the bi-layer 20 coating comprises a bottom layer and a top layer, where the bottom layer is located between the top layer and the extruded support, the bottom layer comprises a blend of platinum on a support with low ammonia storage with a first SCR catalyst, and the top layer comprises a second SCR catalyst. The support with low ammonia storage can be a siliceous support, where the siliceous support can comprise a silica or a zeolite with silica-to-D0XPLQD UDWLRI 100, preferably 200, 25 more preferably 250, even more preferably 300, especially 400, more especially 500, even more especially 750, DQG most preferably 1000. 7KH VLOLFRXV VXSSRUW SUHIHDEON\ FRPSULVHV BEA, CDO, CON, FAU, MEL, MFI or MWW. The catalyst article can provide an improvement in N₂ yield from ammonia at a temperature from about 250 °C to about 300 °C compared to a catalyst comprising a comparable formulation in which the first SCR catalyst is present as a first 30 layer and the platinum on a siliceous support is present in a second layer and gas comprising NH₃ passes through the first layer before passing through the second layer. The catalyst article

can protect the platinum from one or more substances present in the catalyst that can poison the platinum, such as vanadium. The catalytic article may protect platinum from other poisons such as potassium, sodium, iron and tungsten. When the first SCR catalyst comprises vanadium, the catalyst article can provide reduced deactivation compared to a catalyst comprising a comparable 5 formulation in which the first SCR catalyst is present as a first layer and the platinum on a siliceous support is present in a second layer and gas comprising NH₃ passes through the first layer before passing through the second layer.

The term “active component loading” refers to the weight of the support of platinum + the weight of platinum + the weight of the first SCR catalyst in the blend. Platinum can be present in 10 the catalyst in an active component loading from about 0.01 to about 0.3 wt. %, inclusive, preferably from about 0.03-0.2 wt. %, inclusive, more preferably, from about 0.05-0.17 wt. %, inclusive, most preferably, from about 0.07-0.15 wt. %, inclusive.

Additional catalysts such as palladium (Pd), gold (Au) silver (Ag), ruthenium (Ru) or rhodium (Rh) can be present with Pt, preferably in the blend with Pt.

15

SCR Catalysts

In various embodiments, the compositions can comprise one, two or three SCR catalysts. The first SCR catalyst, which is always present in the compositions, can be present either (1) in a blend with Pt on a support with low ammonia storage or (2) in a top layer when the catalysts are 20 present in a bilayer and Pt is present in a bottom layer. The first SCR catalyst is preferably a Cu-SCR catalyst, an Fe-SCR catalyst or a mixed oxide, more preferably a Cu-SCR catalyst or a mixed oxide, most preferably a Cu-SCR catalyst. The Cu-SCR catalyst comprises copper and a molecular sieve. The Fe-SCR catalyst comprises iron and a molecular sieve. Molecular sieves are further described below. The molecular sieve can be an aluminosilicate, an 25 aluminophosphate (AlPO), a silico-aluminophosphate (SAPO), or mixtures thereof. The copper or iron can be located within the framework of the molecular sieve and/or in extra-framework (exchangeable) sites within the molecular sieve.

The second and third SCR catalysts can be the same or different. The second and third SCR catalyst can be a base metal, an oxide of a base metal, a noble metal, a molecular sieve, a 30 metal exchanged molecular sieve or a mixture thereof. The base metal can be selected from the

group consisting of vanadium (V), molybdenum (Mo), tungsten (W), chromium (Cr), cerium (Ce), manganese (Mn), iron (Fe), cobalt (Co), nickel (Ni), and copper (Cu), and mixtures thereof. SCR compositions consisting of vanadium supported on a refractory metal oxide such as alumina, silica, zirconia, titania, ceria and combinations thereof are well known and widely used 5 commercially in mobile applications. Typical compositions are described in U.S. Pat. Nos. 4,010,238 and 4,085,193, the entire contents of which are incorporated herein by reference. Compositions used commercially, especially in mobile applications, comprise TiO_2 on to which WO_3 and V_2O_5 have been dispersed at concentrations ranging from 5 to 20 wt. % and 0.5 to 6 wt. %, respectively. The second SCR catalyst can comprise a promoted Ce-Zr or a promoted MnO_2 . 10 Preferably, the promoter comprises Nb. The noble metal can be platinum (Pt), palladium (Pd), gold (Au) silver (Ag), ruthenium (Ru) or rhodium (Rh), or a mixture thereof. These catalysts may contain other inorganic materials such as SiO_2 and ZrO_2 acting as binders and promoters.

When the SCR catalyst is a base metal, the catalyst article can further comprise at least one base metal promoter. As used herein, a "promoter" is understood to mean a substance that 15 when added into a catalyst, increases the activity of the catalyst. The base metal promoter can be in the form of a metal, an oxide of the metal, or a mixture thereof. The at least one base metal catalyst promoter may be selected from neodymium (Nd), barium (Ba), cerium (Ce), lanthanum (La), praseodymium (Pr), magnesium (Mg), calcium (Ca), manganese (Mn), zinc (Zn), niobium (Nb), zirconium (Zr), molybdenum (Mo), tin (Sn), tantalum (Ta), strontium (Sr) and oxides 20 thereof. The at least one base metal catalyst promoter can preferably be MnO_2 , Mn_2O_3 , Fe_2O_3 , SnO_2 , CuO , CoO , CeO_2 and mixtures thereof. The at least one base metal catalyst promoter may be added to the catalyst in the form of a salt in an aqueous solution, such as a nitrate or an acetate. The at least one base metal catalyst promoter and at least one base metal catalyst, e.g., copper, may be impregnated from an aqueous solution onto the oxide support material(s), may be 25 added into a washcoat comprising the oxide support material(s), or may be impregnated into a support previously coated with the washcoat.

The SCR catalyst can comprise a molecular sieve or a metal exchanged molecular sieve. As is used herein "molecular sieve" is understood to mean a metastable material containing tiny pores of a precise and uniform size that may be used as an adsorbent for gases or liquids. The 30 molecules which are small enough to pass through the pores are adsorbed while the larger

molecules are not. The molecular sieve can be a zeolitic molecular sieve, a non-zeolitic molecular sieve, or a mixture thereof.

A zeolitic molecular sieve is a microporous aluminosilicate having any one of the framework structures listed in the Database of Zeolite Structures published by the International Zeolite Association (IZA). The framework structures include, but are not limited to those of the CHA, FAU, BEA, MFI, MOR types. Non-limiting examples of zeolites having these structures include chabazite, faujasite, zeolite Y, ultrastable zeolite Y, beta zeolite, mordenite, silicalite, zeolite X, and ZSM-5. Aluminosilicate zeolites can have a silica/alumina molar ratio (SAR) defined as $\text{SiO}_2/\text{Al}_2\text{O}_3$ from at least about 5, preferably at least about 20, with useful ranges of from about 10 to 200.

Any of the SCR catalysts can comprise a small pore, a medium pore or a large pore molecular sieve, or a mixture thereof. A "small pore molecular sieve" is a molecular sieve containing a maximum ring size of 8 tetrahedral atoms. A "medium pore molecular sieve" is a molecular sieve containing a maximum ring size of 10 tetrahedral atoms. A "large pore molecular sieve" is a molecular sieve having a maximum ring size of 12 tetrahedral atoms. The second and/or third SCR catalysts can comprise a small pore molecular sieve selected from the group consisting of aluminosilicate molecular sieves, metal-substituted aluminosilicate molecular sieves, aluminophosphate (AlPO) molecular sieves, metal-substituted aluminophosphate (MeAlPO) molecular sieves, silico-aluminophosphate (SAPO) molecular sieves, and metal substituted silico-aluminophosphate (MeAPSO) molecular sieves, and mixtures thereof.

Any of the SCR catalysts can comprise a small pore molecular sieve selected from the group of Framework Types consisting of ACO, AEI, AEN, AFN, AFT, AFX, ANA, APC, APD, ATT, CDO, CHA, DDR, DFT, EAB, EDI, EPI, ERI, GIS, GOO, IHW, ITE, ITW, LEV, KFI, MER, MON, NSI, OWE, PAU, PHI, RHO, RTH, SAT, SAV, SIV, THO, TSC, UEI, UFI, VNI, YUG, and ZON, and mixtures and/or intergrowths thereof. Preferably the small pore molecular sieve is selected from the group of Framework Types consisting of CHA, LEV, AEI, AFX, ERI, SFW, KFI, DDR and ITE.

Any of the SCR catalysts can comprise a medium pore molecular sieve selected from the group of Framework Types consisting of AEL, AFO, AHT, BOF, BOZ, CGF, CGS, CHI, DAC, EUO, FER, HEU, IMF, ITH, ITR, JRY, JSR, JST, LAU, LOV, MEL, MFI, MFS, MRE, MTT,

MVY, MWW, NAB, NAT, NES, OBW, PAR, PCR, PON, PUN, RRO, RSN, SFF, SFG, STF, STI, STT, STW, -SVR, SZR, TER, TON, TUN, UOS, VSV, WEI, and WEN, and mixtures and/or intergrowths thereof. Preferably, the medium pore molecular sieve selected from the group of Framework Types consisting of MFI, FER and STT.

5 Any of the SCR catalysts can comprise a large pore molecular sieve selected from the group of Framework Types consisting of AFI, AFR, AFS, AFY, ASV, ATO, ATS, BEA, BEC, BOG, BPH, BSV, CAN, CON, CZP, DFO, EMT, EON, EZT, FAU, GME, GON, IFR, ISV, ITG, IWR, IWS, IWW, IWW, JSR, LTF, LTL, MAZ, MEI, MOR, MOZ, MSE, MTW, NPO, OFF, OKO, OSI, RON, RWY, SAF, SAO, SBE, SBS, SBT, SEW, SFE, SFO, SFS, SFV, SOF, 10 SOS, STO, SSF, SSY, USI, UWY, and VET, and mixtures and/or intergrowths thereof. Preferably, the large pore molecular sieve is selected from the group of Framework Types consisting of MOR, OFF and BEA.

The molecular sieves in the Cu-SCR and Fe-SCR catalysts are preferably selected from the group consisting of ACO, AEI, AEN, AFN, AFT, AFX, ANA, APC, APD, ATT, CDO, 15 CHA, DDR, DFT, EAB, EDI, EPI, ERI, GIS, GOO, IHW, ITE, ITW, LEV, KFI, MER, MON, NSI, OWE, PAU, PHI, RHO, RTH, SAT, SAV, SIV, THO, TSC, UEI, UFI, VNI, YUG, ZON, BEA, MFI and FER and mixtures and/or intergrowths thereof. More preferably, the molecular sieves in the Cu-SCR and Fe-SCR are selected from the group consisting of AEI, AFX, BEA, CHA, DDR, ERI, FER, ITE, KFI, LEV, MFI and SFW, and mixtures and/or intergrowths 20 thereof.

A metal exchanged molecular sieve can have at least one metal from one of the groups VB, VIB, VIIIB, VIIIB, IB, or IIB of the periodic table deposited onto extra-framework sites on the external surface or within the channels, cavities, or cages of the molecular sieves. Metals 25 may be in one of several forms, including, but not limited to, zero valent metal atoms or clusters, isolated cations, mononuclear or polynuclear oxycations, or as extended metal oxides. Preferably, the metals can be iron, copper, and mixtures or combinations thereof.

The metal can be combined with the zeolite using a mixture or a solution of the metal precursor in a suitable solvent. The term "metal precursor" means any compound or complex 30 that can be dispersed on the zeolite to give a catalytically-active metal component. Preferably the solvent is water due to both economics and environmental aspects of using other solvents.

When copper, a preferred metal is used, suitable complexes or compounds include, but are not limited to, anhydrous and hydrated copper sulfate, copper nitrate, copper acetate, copper acetylacetone, copper oxide, copper hydroxide, and salts of copper ammines (e.g.

[Cu(NH₃)₄]²⁺). This invention is not restricted to metal precursors of a particular type,

5 composition, or purity. The molecular sieve can be added to the solution of the metal component to form a suspension, which is then allowed to react so that the metal component is distributed on the zeolite. The metal can be distributed in the pore channels as well as on the outer surface of the molecular sieve. The metal can be distributed in ionic form or as a metal oxide. For example, copper may be distributed as copper (II) ions, copper (I) ions, or as copper oxide. The 10 molecular sieve containing the metal can be separated from the liquid phase of the suspension, washed, and dried. The resulting metal-containing molecular sieve can then be calcined to fix the metal in the molecular sieve. Preferably, the second and third catalysts comprise a Cu-SCR catalyst comprising copper and a molecular sieve, an Fe-SCR catalyst comprising iron and a molecular sieve, a vanadium based catalyst, a promoted Ce-Zr or a promoted MnO₂.

15 A metal exchanged molecular sieve can contain in the range of about 0.10% and about 10% by weight of a group VB, VIB, VIIIB, VIIIB, IB, or IIB metal located on extra framework sites on the external surface or within the channels, cavities, or cages of the molecular sieve. Preferably, the extra framework metal can be present in an amount of in the range of about 0.2% and about 5% by weight.

20 The metal exchanged molecular sieve can be a copper (Cu) or iron (Fe) supported small pore molecular sieve having from about 0.1 to about 20.0 wt. % copper or iron of the total weight of the catalyst. More preferably copper or iron is present from about 0.5 wt. % to about 15 wt. % of the total weight of the catalyst. Most preferably copper or iron is present from about 1 wt. % to about 9 wt. % of the total weight of the catalyst.

25 The first SCR catalyst can be a Cu-SCR catalyst comprising copper and a small pore molecular sieve or an Fe-SCR catalyst comprising iron and a small pore molecular sieve. The small pore molecular sieve can be an aluminosilicate, an aluminophosphate (AlPO), a silico-aluminophosphate (SAPO), or mixtures thereof. The small pore molecular sieve can be selected 30 from the group of Framework Types consisting of ACO, AEI, AEN, AFN, AFT, AFX, ANA, APC, APD, ATT, CDO, CHA, DDR, DFT, EAB, EDI, EPI, ERI, GIS, GOO, IHW, ITE, ITW,

LEV, KFI, MER, MON, NSI, OWE, PAU, PHI, RHO, RTH, SAT, SAV, SIV, THO, TSC, UEI, UFI, VNI, YUG, and ZON, and mixtures and/or intergrowths thereof. Preferably, the small pore molecular sieve can be selected from the group of Framework Types consisting of CHA, LEV, AEI, AFX, ERI, SFW, KFI, DDR and ITE. The ratio of the amount of the first SCR catalyst to 5 the amount of platinum on the support with low ammonia storage can be in the range of at least one of: (a) 0:1 to 300:1, (b) 3:1 to 300:1, (c) 7:1 to 100:1; and (d) 10:1 to 50:1, inclusive, based on the weight of these components. Platinum can be present from at least one of: (a) 0.01-0.3 wt. %, (b) 0.03-0.2 wt. %, (c) 0.05-0.17 wt. %, and (d) 0.07-0.15 wt. %, inclusive, relative to the weight of the support of platinum + the weight of platinum + the weight of the first SCR catalyst in the 10 blend.

The second SCR catalyst and the third SCR catalyst can, independent of each other, be a base metal, an oxide of a base metal, a molecular sieve, a metal exchanged molecular sieve or a mixture thereof. The base metal can be selected from the group consisting of vanadium (V), molybdenum (Mo), tungsten (W), chromium (Cr), cerium (Ce), manganese (Mn), iron (Fe), 15 cobalt (Co), nickel (Ni), and copper (Cu), and mixtures thereof. The catalyst article can further comprise at least one base metal promoter. The molecular sieve or the metal exchanged molecular sieve can be small pore, medium pore, large pore or a mixture thereof. The second and/or third SCR catalyst can comprise a small pore molecular sieve selected from the group consisting of aluminosilicate molecular sieves, metal-substituted aluminosilicate molecular 20 sieves, aluminophosphate (AlPO) molecular sieves, metal-substituted aluminophosphate (MeAlPO) molecular sieves, silico-aluminophosphate (SAPO) molecular sieves, and metal substituted silico-aluminophosphate (MeAPSO) molecular sieves, and mixtures thereof. The second and/or third SCR catalyst can comprise a small pore molecular sieve selected from the group of Framework Types consisting of ACO, AEI, AEN, AFN, AFT, AFX, ANA, APC, APD, 25 ATT, CDO, CHA, DDR, DFT, EAB, EDI, EPI, ERI, GIS, GOO, IHW, ITE, ITW, LEV, KFI, MER, MON, NSI, OWE, PAU, PHI, RHO, RTH, SAT, SAV, SIV, THO, TSC, UEI, UFI, VNI, YUG, and ZON, and mixtures and/or intergrowths thereof. The second and/or third SCR catalyst can preferably comprise a small pore molecular sieve selected from the group of Framework Types consisting of CHA, LEV, AEI, AFX, ERI, SFW, KFI, DDR and ITE. The 30 second and/or third SCR catalyst can comprise a medium pore molecular sieve selected from the group of Framework Types consisting of AEL, AFO, AHT, BOF, BOZ, CGF, CGS, CHI, DAC,

EUO, FER, HEU, IMF, ITH, ITR, JRY, JSR, JST, LAU, LOV, MEL, MFI, MFS, MRE, MTT, MVY, MWW, NAB, NAT, NES, OBW, -PAR, PCR, PON, PUN, RRO, RSN, SFF, SFG, STF, STI, STT, STW, -SVR, SZR, TER, TON, TUN, UOS, VSV, WEI, and WEN, and mixtures and/or intergrowths thereof. The second and/or third SCR catalyst preferably comprise a large 5 pore molecular sieve selected from the group of Framework Types consisting of AFI, AFR, AFS, AFY, ASV, ATO, ATS, BEA, BEC, BOG, BPH, BSV, CAN, CON, CZP, DFO, EMT, EON, EZT, FAU, GME, GON, IFR, ISV, ITG, IWR, IWS, IWW, JSR, LTF, LTL, MAZ, MEI, MOR, MOZ, MSE, MTW, NPO, OFF, OKO, OSI, -RON, RWY, SAF, SAO, SBE, SBS, SBT, SEW, SFE, SFO, SFS, SFV, SOF, SOS, STO, SSF, SSY, USI, UWY, and VET, and mixtures 10 and/or intergrowths thereof. The third SCR catalyst preferably comprises vanadium, an Fe zeolite, a Cu zeolite, or a Ce-Zr based catalyst doped with Fe, W or Nb.

The catalysts described herein can be used in the SCR treatment of exhaust gases from various engines. The engines can be on a vehicle, a stationary engine, an engine in a power 15 plant, or a gas turbine. One of the properties of a catalyst comprising a blend of platinum on a siliceous support with a first SCR catalyst, where the first SCR catalyst is a Cu-SCR or Fe-SCR catalyst, is that it can provide an improvement in N₂ yield from ammonia at a temperature from about 250 °C to about 350 °C compared to a catalyst comprising a comparable formulation in which the first SCR catalyst is present as a first layer and platinum is supported on a layer that 20 stores ammonia is present in a second layer and gas comprising NH₃ passes through the first layer before passing through the second layer. Another property of a catalyst comprising a blend of platinum on a support with low ammonia storage with a first SCR catalyst, where the first SCR catalyst is a Cu-SCR catalyst or an Fe-SCR catalyst, is that it can provide reduced N₂O formation from NH₃ compared to a catalyst comprising a comparable formulation in which the 25 first SCR catalyst is present as a first layer and platinum supported on a support that stores ammonia is present in a second layer and gas comprising NH₃ passes through the first layer before passing through the second layer.

The substrate for the catalyst may be any material typically used for preparing automotive catalysts that comprises a flow-through or filter structure, such as a honeycomb structure, an extruded support, a metallic substrate, or a SCRF. Preferably the substrate has a plurality of fine, parallel gas flow passages extending from an inlet to an outlet face of the substrate, such that passages are open to fluid flow. Such monolithic carriers may contain up to about 700 or more flow passages (or "cells") per square inch of cross section, although far fewer may be used. For example, the carrier may have from about 7 to 600, more usually from about 100 to 400, cells per square inch ("cpsi"). The passages, which are essentially straight paths from their fluid inlet to their fluid outlet, are defined by walls onto which the SCR catalyst is coated as a "washcoat" so that the gases flowing through the passages contact the catalytic material. The flow passages of the monolithic substrate are thin-walled channels which can be of any suitable cross-sectional shape such as trapezoidal, rectangular, square, triangular, sinusoidal, hexagonal, oval, circular, etc. The invention is not limited to a particular substrate type, material, or geometry.

Ceramic substrates may be made of any suitable refractory material, such as cordierite, cordierite- β DOXPLOD, β -alumina, silicon carbide, silicon nitride, zirconia, mullite, spodumene, alumina-silica magnesia, zirconium silicate, sillimanite, magnesium silicates, zircon, petalite, aluminosilicates and mixtures thereof.

Wall flow substrates may also be formed of ceramic fiber composite materials, such as those formed from cordierite and silicon carbide. Such materials are able to withstand the environment, particularly high temperatures, encountered in treating the exhaust streams.

The substrates can be a high porosity substrate. The term "high porosity substrate" refers to a substrate having a porosity of between about 40% and about 80%. The high porosity substrate can have a porosity preferably of at least about 45%, more preferably of at least about 50%. The high porosity substrate can have a porosity preferably of less than about 75%, more preferably of less than about 70%. The term porosity, as used herein, refers to the total porosity, preferably as measured with mercury porosimetry.

Preferably, the substrate can be cordierite, a high porosity cordierite, a metallic substrate, an extruded SCR, a filter or an SCRF.

A washcoat comprising a blend of platinum on a siliceous support and a first SCR catalyst, where the first SCR catalyst is preferably a Cu-SCR catalyst or an Fe-SCR catalyst, can be applied to the inlet side of the substrate using a method known in the art. After application of the washcoat, the composition can be dried and calcined. When the composition comprises a 5 second SCR, the second SCR can be applied in a separate washcoat to a calcined article having the bottom layer, as described above. After the second washcoat is applied, it can be dried and calcined as performed for the first layer.

The substrate with the platinum containing layer can be dried and calcined at a temperature within the range of 300°C to 1200°C, preferably 400°C to 700 °C, and more 10 preferably 450°C to 650 °C. The calcination is preferably done under dry conditions, but it can also be performed hydrothermally, i.e., in the presence of some moisture content. Calcination can be performed for a time of between about 30 minutes and about 4 hours, preferably between about 30 minutes and about 2 hours, more preferably between about 30 minutes and about 1 hour.

15

An exhaust system can comprise a catalyst of the first aspect of the invention and a means for forming NH₃ in the exhaust gas. An exhaust system can further comprise a second catalyst selected from the group consisting of a diesel oxidation catalyst (DOC), a diesel exotherm catalyst (DEC), a selective catalytic reduction on filter (SCRF) or a catalyzed soot 20 filter (CSF), where the second catalyst is located downstream of the catalyst of the first aspect of the invention. An exhaust system can further comprise a second catalyst selected from the group consisting of an SCR catalyst, a selective catalytic reduction on filter (SCRF), a diesel oxidation catalyst (DOC), a diesel exotherm catalyst (DEC), a NOx adsorber catalyst (NAC) (such as a lean NOx trap (LNT), a NAC, a passive NOx adsorber (PNA), a catalyzed soot filter (CSF), or a 25 Cold Start Concept (CSC) catalyst, where the second catalyst is located upstream of the catalyst of the first aspect of the invention.

An exhaust system can comprise a catalyst of the first aspect of the invention, an SCR catalyst and DOC catalyst, where the SCR catalyst is located between the catalyst of the first aspect of the invention and the DOC catalyst. The exhaust system can comprise a platinum 30 group metal before an SCR catalyst where the amount of the platinum group metal is sufficient

to generate an exotherm. The exhaust system can further comprise a promoted-Ce-Zr or a promoted-MnO₂ located downstream of the catalyst of the first aspect of the invention.

An engine can comprise an exhaust system as described above. The engine can be an engine on a vehicle, a stationary engine, an engine in a power plant, or a gas turbine.

5 A vehicle can comprise an exhaust system comprising a catalyst of the first aspect of the invention and a means for forming NH₃ in the exhaust gas. The vehicle can be a car, a light truck, a heavy duty truck or a boat.

10 A method of improving the N₂ yield from ammonia in an exhaust gas at a temperature from about 250 °C to about 300 °C comprises contacting an exhaust gas comprising ammonia with a catalyst of the first aspect of the invention. The improvement in yield can be about 10% to about 20% compared to a catalyst comprising a comparable formulation in which the first SCR catalyst is present as a first layer and the platinum on a siliceous support is present in a second layer and gas comprising NH₃ passes through the first layer before passing through the second layer.

15 A method of reducing N₂O formation from NH₃ in an exhaust gas comprises contacting an exhaust gas comprising ammonia with a catalyst of the first aspect of the invention. The reduction in N₂O formation can be about 20% to about 40% compared to a catalyst comprising a comparable formulation in which the first SCR catalyst is present as a first layer and the platinum on a siliceous support is present in a second layer and gas comprising NH₃ passes through the first layer before passing through the second layer.

The following examples merely illustrate the invention; the skilled person will recognize many variations that are within the spirit of the invention and scope of the claims.

EXAMPLES

Example 1: A Selective ASC on an Extruded SCR catalyst

An extruded SCR catalyst containing vanadium is coated from the outlet side with a
5 washcoat comprising a blend of platinum on a support with low ammonia storage with Cu-CHA.

Example 2: A Selective ASC on an Extruded SCR catalyst

An extruded SCR catalyst containing an Fe-zeolite is coated from the outlet side with a
washcoat comprising a blend of platinum on a support with low ammonia storage with Cu-CHA.

10 Compared with a conventional single layer ASC, where the single layer coating
comprises platinum on a support, such as an alumina, without any SCR catalyst in the coating,
the ASC described herein provides reduced selectivity of both N₂O and NOx. This results in
increased selectivity towards N₂ over the full temperature range.

15 Example 3: A Selective ASC on an Extruded SCR catalyst
An extruded SCR catalyst containing vanadium is coated from the outlet side with a
washcoat comprising platinum on a support with low ammonia storage to form a bottom layer.
A second washcoat comprising Cu-CHA is placed over the bottom layer to form a top layer.

20 Example 4: A Selective ASC on an Extruded SCR catalyst
An extruded SCR catalyst containing an Fe-zeolite is coated from the outlet side with a
washcoat comprising platinum on a support with low ammonia storage to form a bottom layer.
A second washcoat comprising Cu-CHA is placed over the bottom layer to form a top layer.

25 Compared with a conventional dual layer ASC, where the bottom coating comprises
platinum on e.g. alumina, and the top coating comprises an SCR catalyst, the ASC described
herein provides reduced selectivity of both N₂O and NOx. This results in increased selectivity
towards N₂ over the full temperature range. In addition, the back pressure will be reduced
30 because of an overall thinner coating layer.

In the above examples, platinum is on a support with low ammonia storage. The use of the support with low ammonia storage helps protect the platinum from exposure to materials, such as vanadium, that can poison, or negatively affect the platinum.

5 Example 5: SCRF with ASC

An SCRF filter is coated on the outlet face of the filter with a washcoat comprising platinum on a support with low ammonia storage to form a bottom layer. A second washcoat comprising Cu-CHA is placed over the bottom layer to form a top layer.

10 Example 6: SCRF with ASC

An SCRF filter is coated on the outlet face of the filter with a washcoat comprising a blend of platinum on a support with low ammonia storage and Cu-CHA.

15 The SCRF with ASC of Examples 5 and 6 provides the same results and benefits as described for Examples 1-4.

The preceding examples are intended only as illustrations; the following claims define the scope of the invention.

Claims

We claim:

1. A catalyst article comprising: (a) an extruded support having an inlet, an outlet and a plurality of channels through which exhaust gas flows during operation of an engine, and (b) a single layer coating or a bi-layer coating on the support, where, the single layer coating comprises a blend of platinum on a support with low ammonia storage with a first SCR catalyst, and the bi-layer coating comprises a bottom layer and a top layer, where the bottom layer is located between the top layer and the extruded support, the bottom layer comprises a blend of platinum on a support with low ammonia storage with a first SCR catalyst the top layer comprises a second SCR catalyst and the extruded support comprises a third SCR catalyst .
2. The catalyst of claim 1, where the support with low ammonia storage is a siliceous support.
3. The catalyst of claim 2, where the siliceous support comprises a silica or a zeolite with silica-to-alumina ratio of at least one of: (a) at least 100, (b) at least 200, (c) at least 250, at least 300, (d) at least 400, (e) at least 500, (f) at least 750 and (g) at least 1000.
4. The catalyst of claim 2, wherein the siliceous support comprises BEA, CDO, CON, FAU, MEL, MFI or MWW.
5. The catalyst of claim 1, where the ratio of the amount of the first SCR catalyst to the amount of platinum on the support with low ammonia storage is in the range of at least one of: (a) 0:1 to 300:1, (b) 3:1 to 300:1, (c) 7:1 to 100:1; and (d) 10:1 to 50:1, inclusive, based on the weight of these components.
6. The catalyst of claim 1, where the first SCR catalyst is a Cu-SCR catalyst comprising copper and a small pore molecular sieve, an Fe-SCR catalyst comprising iron and a small pore molecular sieve, or a mixed oxide.
7. The catalyst article of claim 6, where the small pore molecular sieve is an aluminosilicate, an aluminophosphate (AlPO), a silico-aluminophosphate (SAPO), or mixtures thereof.

8. The catalyst article of claim 6, where the small pore molecular sieve is selected from the group of Framework Types consisting of ACO, AEI, AEN, AFN, AFT, AFX, ANA, APC, APD, ATT, CDO, CHA, DDR, DFT, EAB, EDI, EPI, ERI, GIS, GOO, IHW, ITE, ITW, LEV, KFI, MER, MON, NSI, OWE, PAU, PHI, RHO, RTH, SAT, SAV, SIV, THO, TSC, UEI, UFI, VNI, YUG, and ZON, and mixtures and/or intergrowths thereof.
9. The catalyst article of claim 6, where the small pore molecular sieve is selected from the group of Framework Types consisting of CHA, LEV, AEI, AFX, ERI, SFW, KFI, DDR and ITE.
10. The catalyst of claim 1, where platinum is present from at least one of: (a) 0.01-0.3 wt. %, (b) 0.03-0.2 wt. %, (c) 0.05-0.17 wt. %, and (d) 0.07-0.15 wt. %, inclusive, relative to the weight of the support of platinum + the weight of platinum + the weight of the first SCR catalyst in the blend.
11. The catalyst article of claim 1, where the second SCR catalyst and the third SCR catalyst are, independent of each other, a base metal, an oxide of a base metal, a molecular sieve, a metal exchanged molecular sieve or a mixture thereof.
12. The catalyst article of claim 11, where the base metal is selected from the group consisting of vanadium (V), molybdenum (Mo), tungsten (W), chromium (Cr), cerium (Ce), manganese (Mn), iron (Fe), cobalt (Co), nickel (Ni), and copper (Cu), and mixtures thereof.
13. The catalyst article of claim 11, further comprising at least one base metal promoter.
14. The catalyst article of claim 11, where the molecular sieve or the metal exchanged molecular sieve is small pore, medium pore, large pore or a mixture thereof.
15. The catalyst article of claim 11, where the second and/or third SCR catalyst comprises a small pore molecular sieve selected from the group consisting of aluminosilicate molecular sieves, metal-substituted aluminosilicate molecular sieves, aluminophosphate (AlPO) molecular sieves, metal-substituted aluminophosphate (MeAlPO) molecular sieves, silico-aluminophosphate (SAPO) molecular sieves, and metal substituted silico-aluminophosphate (MeAPSO) molecular sieves, and mixtures thereof.

16. The catalyst article of claim 15, where the second and/or third SCR catalyst comprises a small pore molecular sieve selected from the group of Framework Types consisting of ACO, AEI, AEN, AFN, AFT, AFX, ANA, APC, APD, ATT, CDO, CHA, DDR, DFT, EAB, EDI, EPI, ERI, GIS, GOO, IHW, ITE, ITW, LEV, KFI, MER, MON, NSI, OWE, PAU, PHI, RHO, RTH, SAT, SAV, SIV, THO, TSC, UEI, UFI, VNI, YUG, and ZON, and mixtures and/or intergrowths thereof.
17. The catalyst article of claim 15, where the second and/or third SCR catalyst comprises a small pore molecular sieve selected from the group of Framework Types consisting of CHA, LEV, AEI, AFX, ERI, SFW, KFI, DDR and ITE.
18. The catalyst article of claim 15, where the second and/or third SCR catalyst comprises a medium pore molecular sieve selected from the group of Framework Types consisting of AEL, AFO, AHT, BOF, BOZ, CGF, CGS, CHI, DAC, EUO, FER, HEU, IMF, ITH, ITR, JRY, JSR, JST, LAU, LOV, MEL, MFI, MFS, MRE, MTT, MVY, MWW, NAB, NAT, NES, OBW, PAR, PCR, PON, PUN, RRO, RSN, SFF, SFG, STF, STI, STT, STW, -SVR, SZR, TER, TON, TUN, UOS, VSV, WEI, and WEN, and mixtures and/or intergrowths thereof.
19. The catalyst article of claim 15, where the second and/or third SCR catalyst comprises a large pore molecular sieve selected from the group of Framework Types consisting of AFI, AFR, AFS, AFY, ASV, ATO, ATS, BEA, BEC, BOG, BPH, BSV, CAN, CON, CZP, DFO, EMT, EON, EZT, FAU, GME, GON, IFR, ISV, ITG, IWR, IWS, IWW, JSR, LTF, LTL, MAZ, MEI, MOR, MOZ, MSE, MTW, NPO, OFF, OKO, OSI, RON, RWY, SAF, SAO, SBE, SBS, SBT, SEW, SFE, SFO, SFS, SFV, SOF, SOS, STO, SSF, SSY, USI, UWY, and VET, and mixtures and/or intergrowths thereof.
20. The catalyst article of claim 1, where the third SCR catalyst comprises vanadium, an Fe zeolite, a Cu zeolite, or a Ce-Zr based catalyst doped with Fe, W or Nb.
21. The catalyst article of claim 1, where the catalyst provides an improvement in N₂ yield from ammonia at a temperature from about 250 °C to about 300 °C compared to a catalyst comprising a comparable formulation in which the first SCR catalyst is present as a first layer

and the platinum on a siliceous support is present in a second layer and gas comprising NH₃ passes through the first layer before passing through the second layer.

22. The catalyst article of claim 1, where, when the first SCR catalyst comprises vanadium, the catalyst article provides reduced deactivation compared to a catalyst comprising a comparable formulation in which the first SCR catalyst is present as a first layer and the platinum on a siliceous support is present in a second layer and gas comprising NH₃ passes through the first layer before passing through the second layer.

23. The catalyst article of claim 1, where the platinum is protected from poisoning from one or more substances present in the catalyst that can poison the platinum.

24. The catalyst article of claim 23, where the substance that can poison platinum is vanadium.

25. An exhaust system comprising the catalyst article of claim 1 and a means for forming NH₃ in the exhaust gas.

26. An exhaust system of claim 25, further comprising a second catalyst selected from the group consisting of a diesel oxidation catalyst (DOC), a diesel exotherm catalyst (DEC), a selective catalytic reduction on filter (SCRF), or a catalyzed soot filter (CSF), where the second catalyst is located downstream of the catalyst of claim 1.

27. An exhaust system of claim 25, further comprising a second catalyst selected from the group consisting of an SCR catalyst, a diesel oxidation catalyst (DOC), a diesel exotherm catalyst (DEC), a NOx adsorber catalyst (NAC) (such as a lean NOx trap (LNT), a NAC, a passive NOx adsorber (PNA), a catalyzed soot filter (CSF), a selective catalytic reduction on filter (SCRF), or a Cold Start Concept (CSC) catalyst, where the second catalyst is located upstream of the catalyst of claim 1.

28. An exhaust system comprising the catalyst of claim 1, an SCR catalyst and DOC catalyst, where the SCR catalyst is located between the catalyst of claim 1 and the DOC catalyst.

29. The exhaust system of claim 25, where the exhaust system comprises a platinum group metal before an SCR catalyst and the amount of the platinum group metal is sufficient to generate an exotherm.

30. The exhaust system of claim 29, further comprising a promoted-Ce-Zr or a promoted- MnO_2 located downstream of the catalyst of claim 1.

31. An engine comprising an exhaust system of claim 25.

32. The engine of claim 31, where the engine is an engine on a vehicle, a stationary engine, an engine in a power plant, or a gas turbine.

33. A vehicle comprising an exhaust system of claim 25.

34. The vehicle of claim 33, where the vehicle is a car, a light truck, a heavy duty truck or a boat.

35. A method of improving the N_2 yield from ammonia in an exhaust gas at a temperature from about 250 °C to about 300 °C, the method comprising contacting an exhaust gas comprising ammonia with a catalyst of claim 1.

36. The method of claim 35, where the improvement in yield is about 10% to about 20% compared to a catalyst comprising a comparable formulation in which the first SCR catalyst is present as a first layer and the platinum on a siliceous support is present in a second layer and gas comprising NH_3 passes through the first layer before passing through the second layer.

37. A method of reducing N_2O formation from NH_3 in an exhaust gas, the method comprising contacting an exhaust gas comprising ammonia with a catalyst of claim 1.

38. The method of claim 37, where the reduction in N_2O formation is about 20% to about 40% compared to a catalyst comprising a comparable formulation in which the first SCR catalyst is present as a first layer and the platinum on a siliceous support is present in a second layer and gas comprising NH_3 passes through the first layer before passing through the second layer.

Fig. 1


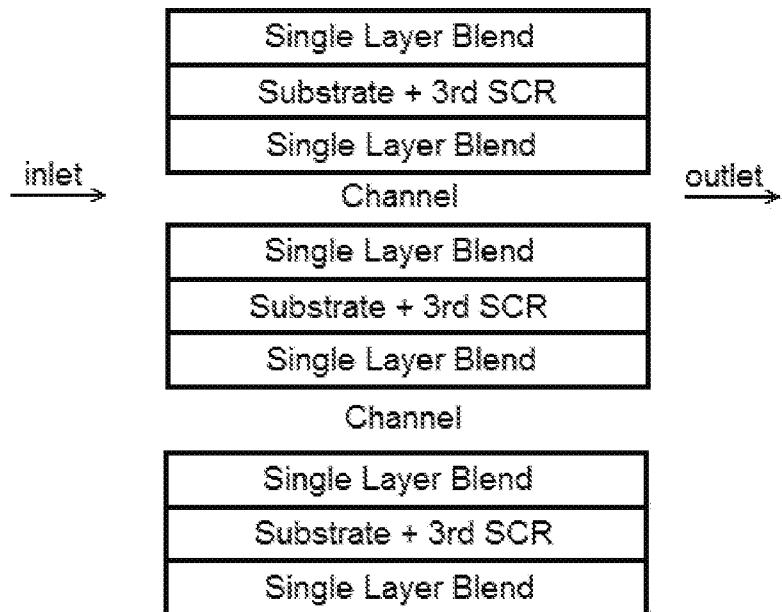


Fig. 2

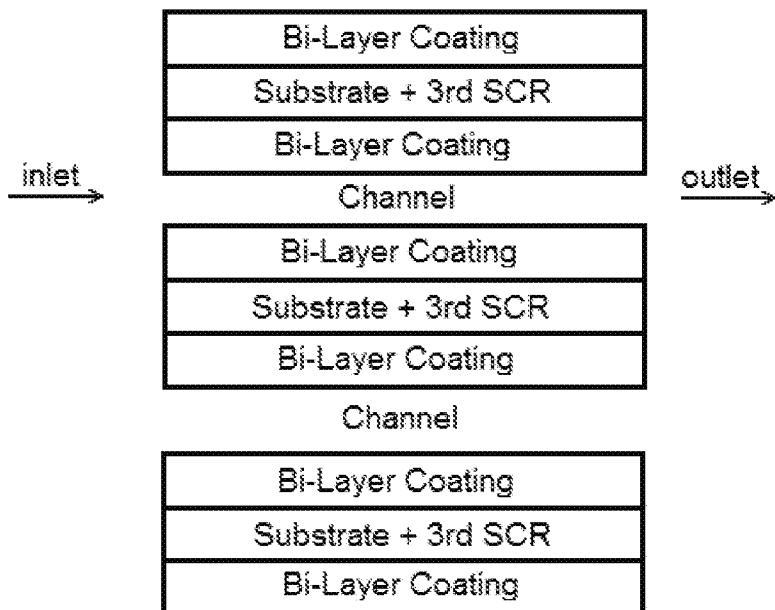

where

$$\text{Bi-Layer Coating} = \begin{array}{|c|} \hline \text{2nd SCR} \\ \hline \text{Pt on Support + 1st SCR} \\ \hline \end{array}$$

and Pt on Support = platinum on a support with low ammonia storage

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/037861

A. CLASSIFICATION OF SUBJECT MATTER

INV.	B01J23/847	B01J35/00	B01J23/42	B01D53/94	B01J29/06
	B01J29/76	B01J29/83	B01J29/85	B01J35/04	B01J37/00
	F01N3/20				

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B01J B01D F01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2008/292519 A1 (CAUDLE MATTHEW T [US] ET AL) 27 November 2008 (2008-11-27) paragraphs [0004], [0005], [0032], [0036], [0037], [0039] -----	1-38
Y	US 2014/212350 A1 (ANDERSEN PAUL JOSEPH [US] ET AL) 31 July 2014 (2014-07-31) paragraphs [0045], [0046], [0053] -----	1-38
Y	US 2014/157763 A1 (CHANDLER GUY RICHARD [GB] ET AL) 12 June 2014 (2014-06-12) claim 1 -----	1-38
Y	US 2015/037233 A1 (FEDEYKO JOSEPH MICHAEL [US] ET AL) 5 February 2015 (2015-02-05) claim 1 -----	1-38



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
6 September 2016	14/09/2016

Authorized officer

Zieba, Roman

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/037861

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2008292519	A1	27-11-2008	BR PI0807379 A2 CA 2679599 A1 CN 101711185 A CN 105251359 A EP 2117702 A2 JP 5761917 B2 JP 2010519039 A JP 2015166083 A KR 20090114480 A KR 20150065907 A KR 20160079935 A MY 151931 A RU 2009135861 A US 2008292519 A1 WO 2008106523 A2	06-05-2014 04-09-2008 19-05-2010 20-01-2016 18-11-2009 12-08-2015 03-06-2010 24-09-2015 03-11-2009 15-06-2015 06-07-2016 31-07-2014 10-04-2011 27-11-2008 04-09-2008
US 2014212350	A1	31-07-2014	CN 105358250 A DE 112014000588 T5 EP 2950925 A1 GB 2531640 A JP 2016511684 A KR 20150111979 A US 2014212350 A1 WO 2014120645 A1	24-02-2016 24-12-2015 09-12-2015 27-04-2016 21-04-2016 06-10-2015 31-07-2014 07-08-2014
US 2014157763	A1	12-06-2014	CN 103842076 A CN 105363497 A DE 102012213639 A1 EP 2739389 A1 GB 2493449 A GB 2504024 A GB 2506776 A JP 2014525833 A KR 20140044907 A RU 2014107900 A US 2014157763 A1 US 2016040576 A1 WO 2013017873 A1	04-06-2014 02-03-2016 07-02-2013 11-06-2014 06-02-2013 15-01-2014 09-04-2014 02-10-2014 15-04-2014 10-09-2015 12-06-2014 11-02-2016 07-02-2013
US 2015037233	A1	05-02-2015	CN 105555403 A DE 102014110811 A1 EP 3027309 A2 GB 2519403 A GB 2533468 A KR 20160038025 A US 2015037233 A1 WO 2015017516 A2	04-05-2016 05-02-2015 08-06-2016 22-04-2015 22-06-2016 06-04-2016 05-02-2015 05-02-2015