

(19) **DANMARK**

(10) **DK/EP 3027362 T3**



(12)

Oversættelse af europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **B 24 B 23/04 (2006.01)** **B 23 D 61/00 (2006.01)** **B 23 Q 3/12 (2006.01)**
B 24 B 45/00 (2006.01) **B 27 B 5/30 (2006.01)** **B 27 B 19/00 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2018-07-23**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2018-04-11**
- (86) Europæisk ansøgning nr.: **14747835.8**
- (86) Europæisk indleveringsdag: **2014-07-25**
- (87) Den europæiske ansøgnings publiceringsdag: **2016-06-08**
- (86) International ansøgning nr.: **EP2014002048**
- (87) Internationalt publikationsnr.: **WO2015014467**
- (30) Prioritet: **2013-08-01 DE 202013006920 U**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **C. & E. Fein GmbH, Hans-Fein-Strasse 81, 73529 Schwäbisch Gmünd-Bargau, Tyskland**
Robert Bosch GmbH, Wernerstrasse 1, 70469 Stuttgart, Tyskland
- (72) Opfinder: **Klabunde, Olaf, Hebelweg 2, 89537 Giengen/Brenz, Tyskland**
Blickle, Jürgen, Promenade Weg 38, 73035 Göppingen, Tyskland
THOMASCHEWSKI, Walter, Echterdinger Str. 17, 70794 Filderstadt, Tyskland
BEK, Fabian, Weidlestrasse 7, 73560 Böbingen, Tyskland
DELFINI, Stefano, Grenchenstrasse 34, 2544 Bettlach, Schweiz
FELLMANN, Willi, Meisenweg 6, 4500 Solothurn, Schweiz
LÜSCHER, Bruno, Ackerstrasse 22, 4800 Zofingen, Schweiz
BOZIC, Milan, Von Sury Weg 8, 4500 Solothurn, Schweiz
Mathys, Thomas, Schachweg 8, 3250 Lyss, Schweiz
Grolimund, Daniel, Rainstrasse 37, 4528 Zuchwil, Schweiz
- (74) Fuldmægtig i Danmark: **Plougmann Vingtoft A/S, Rued Langgaards Vej 8, 2300 København S, Danmark**
- (54) Benævnelse: **VÆRKTØJSINDRETNING**
- (56) Fremdragne publikationer:
EP-A1- 1 852 218
DE-U1- 29 605 728
DE-U1-202011 050 511
US-A1- 2012 169 018

DESCRIPTION

The present invention relates to a tool device, which is suited to be used with a machine tool, and in particular with a hand guided machine tool having a driving device moving around a driving axis.

5 The invention will be described below mainly using the example of a tool device, which is suited for the use with a machine tool, and in particular for the use with a hand guided machine tool that has a driving device rotating in an oscillatory manner around a driving axis. This limitation of the illustration is not intended to limit the possible uses of such a tool device.

10 Instead of the term "tool device", hereinafter will also be used in a more simple way the term "tool ". But this too, should not to be construed as a limitation.

A machine tool is a device which has one or more driving motors and possibly one or more transmission devices. The driving device of the tool device is
15 the component or the components, respectively, by which the torque is applied to the tool device, so usually a driving shaft / output shaft, a driving spindle / an output spindle or the like.

A hand guided machine tool comprises a holding device, especially handles and the like, by which the machine tool can be guided by an operator with the tool
20 attached thereto. Typically, the hand guided machine tools are equipped with an electric driving motor, but there are also other types known, such as hydraulically powered machine tools or pneumatically powered machine tools or machine tools driven by muscle power.

In the prior art, a variety of tools are known, which are intended to be used
25 with a machine tool having a circumferential driving device. Such tools are, for example drills, grinding discs, cutting discs, circular saws, and so on. These tools are attached to the output device, which - depending on the application, the tool and the machine - rotates with a speed between near 0 up to several 1000 revolutions per minute, and in extreme cases also at a significantly higher speed.
30 During the operation, the tool is brought in contact with a work piece by a more or less high pressure, where it then carries out the corresponding machining operation. The machining forces occurring in the distance from the pivot, for

example the cutting forces or the grinding forces result in a torque around the driving shaft, which is compensated for by the torque transmitted from the machine tool to the tool device. The transmission of the driving momentum to the tool is made via the attachment device of the tool by which it is fixed to the
5 driving device. For a tool, which during the machining always rotates essentially in the same direction, therefore, the forces acting on the attachment device occur essentially in the same direction, but are different in height.

In the prior art, machine tools having a rotating oscillating tool receiving device are also known. An oscillating drive of the tool device should here be
10 understood as no hub oscillating drive, like it is known from a hacksaw device in particular. A hacksaw device should here be understood in particular as a keyhole saw device, a saber saw device or drywall saw device or the like. A machine tool having an oscillating driving device should here be understood as a machine tool with a movement of the tool driving device, when the tool driving device starts
15 moving from a central position in a first rotational direction and it is braked to a stop, and then the direction of rotation is reversed again until the moving is stopped.

The angular distance from the central position to the respective end position may typically be up to 5 degrees. However, for the implemented
20 machines, usually, lower angles of 1 degree to 2.5 degrees are common, which corresponds to a total angular movement (1st to 2nd end position) from 2 degrees to 5 degrees. This oscillatory movement is typically carried out from 5,000 to 50,000 times per minute. However, there are also smaller and higher oscillation frequencies possible (here expressed as oscillations per minute).

25 The reversal of the direction of rotation causes that the machining forces of the tool also change their direction, wherein as known the machining forces act always against the direction of movement, or here against the rotational direction, respectively. From the machining forces changing their direction results a torque in correspondence to the lever arm, that is the distance of the processing point of
30 the tool to the rotational axis, wherein the torque reverses the direction by the oscillation. The torque resulting from the machining forces is superimposed with another momentum, which is effective both during the machining but also in the idle, namely from the momentum of inertia of the tool torque for the decelerating of the tool after its highest speed (for example, each maximum amplitude of the

sine curve for a sinusoidal rotational speed variation of the tool driving device) and the reacceleration of the tool in the opposite direction occurring after the rotation reversal.

The torques, that arise by the machining forces and by the kinematic
5 factors of the oscillation drive are applied by the machine tool and introduced via the driving device in the tool device.

The present invention has the object to design the tool device in such a manner that the torque, which has been introduced via the driving device, can be reliably absorbed.

10 This object is achieved by the subject matter of claim 1.

The preferred embodiments of the present invention are the subject matter of the dependent claims.

According to the present invention, the tool device comprises an attachment device by which the tool device can be fastened on the machine tool
15 in such a manner that its driving shaft and a tool axis of rotation are substantially coincident. The term "driving shaft" and "tool axis of rotation" denotes the geometrical axis of rotation of the machine tool and the geometrical axis of rotation of the tool device, respectively.

Furthermore, at least two driving area regions are provided, which are
20 spaced apart to this tool axis of rotation, each having a plurality of surface points. The term "driving area region" (hereinafter sometimes referred to as "driving area") refers to an area that directly or indirectly stands at least partially in contact with the output device of the machine tool to accommodate the torque from the machine tool. The term "surface point" here means points on the upper
25 side of the driving area region and it should be understood geometrically.

The term is used to characterize the geometric point at which a tangent plane abuts against the area. The vector on the surface perpendicular to the tangent point describes the orientation of the surface at this point in a space, which is defined by, for example, a three-dimensional coordinate system or by
30 other reference planes or reference surfaces.

A surface has an endless number of surface points because every point on the surface is also a surface point in the present sense. To describe a

unidirectional curved surface or a multidirectional curved surface for the practice, however, it is sufficient to have a finite number of surface points. The term unidirectionally curved should be understood as a cylindrical surface, which is curved at each point in only one direction, for example a cylindrical surface. The
5 term multidirectionally curved should be understood as a surface, which is curved at least in one point in several directions, for example a spherical surface.

A flat surface has only one tangent plane, which coincides with the surface itself. To characterize a flat surface, therefore a single surface point is sufficient, and this can be any point of the flat surface.

10 Since surface points are geometric points, they are not visible on the surface.

For the tangent planes to these surface points, special geometric conditions apply. The tangent planes, as usually in the geometry, are the planes which are formed perpendicular to the normal vectors of the surface points and which
15 contact the surface at the surface point. The term "normal vector" means a vector which is oriented in this surface point exactly perpendicular to the surface.

The tangent planes on this surface points are inclined in two directions. On the one hand, the tangent planes are inclined against an axial plane, which includes the output shaft. Further, these tangent planes are inclined in regard to a
20 radial plane, which extends perpendicular to the output shaft.

Thus, the arrangement of this driving area region differs compared with the known prior art tool devices for the oscillating machines.

For the known tool devices, as shown for example in the German patent application DE 10 2011 005 818 A1 and the German utility model application DE
25 296 05 728 U1, the tools in the connection region to the driving device of the machine tool are of a substantially planar design. That means that they extend in this area in a plane, which is perpendicular to the tool axis of rotation.

It should now already be noted that in a preferred embodiment, the driving area region is substantially flat, meaning that the normal vectors of all surface
30 points are aligned parallel to one another, and thus the driving area region only has a single tangent plane as a whole. However, within the scope of the present invention, is also possible that the driving area regions are curved in an

unidirectional manner or in a bidirectional manner. In this case, the normal vectors are then no longer parallel to each other.

The German utility model application DE 20 2011 050 511 U1, which forms the basis for the generic term of claim 1, discloses a working component for being
5 coupled to a variety of shaft ends of multi-purpose tools. The working component comprises a body portion and a clamping portion which is connected to the body portion and is suitable for mounting the working component to the shaft ends, whereby the body portion comprises a working portion for acting on a workpiece, the clamping portion comprising a mounting aperture with a longitudinal axis Y,
10 and the clamping portion comprising a support portion and a coupling portion, which overlap in the direction of the longitudinal axis Y.

The European patent application EP 1 852 218 A1 discloses an oscillatory drive having an output shaft that can be driven to perform a rotationally oscillating movement about its longitudinal axis and that comprises a free end, a
15 holding fixture at the free end of the output shaft comprising a contact surface for attachment of a tool, a mounting section on the holding fixture, which is raised relative to the contact surface and projects towards the outside in the direction of the longitudinal axis and which is formed for establishing a form-locking connection with a mounting aperture of a tool placed in contact with the contact
20 surface, and having a holding means for holding the tool with its mounting aperture on the holding fixture, wherein the holding means permits the tool to yield in axial direction under the action of a torque against a bias, and the mounting section permitting the tool to rotate by a certain angle of rotation when the tool yields axially.

25 The invention is based on the following considerations:

The region of the tool, onto which the torque is applied, is subjected to an alternating bending stress due to the oscillating moving. These are particularly problematic for the metallic materials from which the tools at issue here are usually made. The metals have a crystalline structure. If local overloads arise in a
30 region of a metal component, that means that the stresses acting on the component at this point are higher than the stresses that can be tolerated by the component, then micro cracks can occur between the individual grains of the metal microstructure. These micro cracks affect the strength of the component in two respects. On the one hand, in the region where micro cracks have been

incurred, no tensions are transmitted in the component. This means that the stresses within this region can be increased by the crack formation, which decreases the effective area for the force transmission.

On the other hand, a phenomenon arises that is commonly referred to as the "notch effect" in mechanical engineering. The name comes from the fact that in the region of a notch, especially when the notch is sharp edged, a local stress concentration occurs, which in the region of the surrounding notch material leads to shear stresses, which are higher than the shear stresses in the regions of the component which are not affected by such a geometry.

10 These increased stresses cause the crack formation to progress, and it eventually leads to a failure of the component.

This process, which for example is documented in the works of Palmgren and Miner, is called damage accumulation.

The properties of a material or a component to tolerate swinging loads and in particular alternating bending stresses, is usually represented by the so-called SN curve of this component. The SN curve is based on the finding that an alternating load, for the Wöhler fatigue test it is called load changes, in particular for a steel comprising component can be tolerated in many cases on a permanent basis if the component can incur between 2 million and 6 million (in dependence on the material) such load changes at this load without a damage. In mechanical engineering, one speaks then of the so-called fatigue strength of the material or the component.

25 An oscillating driven tool swings, as indicated above, for example with a frequency of 20,000 oscillations per minute. This means 20,000 load cycles per minute in the diction of the operation fixed component design or 1.2 million cycles per hour.

The lower fatigue limit of the stress-test of 2 million load cycles is thus exceeded already after 2 hours of operation of the machine tool or the tool.

30 Due to the inventive design, the torque load is increased that can be tolerated by the tool device. This is firstly achieved in that the driving areas are arranged at a distance to the axis of rotation. Since the force that be accommodated by the tool is determined as the ratio of the torque and the distance, it follows $F_r = M/r$ (M measured as a torque in Nm, F as a force at the

point r in N and r is the distance of the force application point away from the tool axis of rotation in m).

An enlargement of the force application point outwards, i.e. away from the tool axis of rotation, reduces the torque.

- 5 The inclination of the driving areas further results into that the force application point is as a whole increased, whereby the local load is reduced, and for an appropriate design, the introduction of the force in the remaining regions of the tool is improved.

- 10 A portion of the tool devices, which are commonly used at oscillating machines, has an operating region, which is arranged in the circumferential direction, such as sawing tools and cutting tools. The operating region of the tools thus extends substantially in a plane perpendicular to the axis of rotation of the tool.

- 15 For such tools, it is common in the prior art, that the attachment region is also planar constructed. The driving momentum is then initiated as a force in a direction perpendicular to the tool plane, for example by pins, a driving star or the like. In the tool plane, the tool is especially stiff, so that the introduction of the force is performed only over a relatively small region. In this region, it can then lead to higher local stresses, which lead to a reduction in the operational stability
20 of the tool.

According to the present invention the force transmission is performed for such a tool at first from the inclined area, whereby – for a respective construction – the force transmission area is increased, and thereby the local load is reduced.

- 25 It should be noted at this point that it is essential to reduce the peak loads. Because the wear or even the destruction of the tool is generated and further promoted just by the above described stress concentrations that lead to micro cracks. A reduction of the peak stress concentrations can achieve a significant extension of the life of the tool.

- 30 According to a preferred embodiment, there is at least one driving area region, for which at no surface point, the normal vector on this surface point passes on a straight line extending through that the tool axis of rotation. Therefore, such a driving area region is at no surface point oriented toward the tool axis of rotation, but the driving area region is "twisted" in regard to the tool

axis of rotation. Thereby, the driving forces of the machine tool are introduced tangentially on this driving area region at no point on the surface, so that the torque transmission is further improved.

As already explained above, the driving areas are preferably designed
5 substantially flat. This means that the driving areas have a planar region with essentially the same tangent plane, which may be limited by edges, single curved surfaces or multiple curved surfaces, and so on. Respectively, by edges or curved areas, they can pass over into other regions of the tool device.

The advantage of the planar driving areas is that by these a tool device can
10 be provided, which on the one hand, both can be secured without clearance on the driving device of the machine tool - if it is designed accordingly - and for which, when appropriate tolerances and material properties such as elasticity and so forth are provided, an area contact between the driving device of the machine tool and the tool device is possible, whereby the region of the force transmission
15 is increased.

According to a further preferred embodiment, the driving areas are curved, at least in sections. The curvature may be designed both unidirectional as well as bidirectional, convex or concave with a fixed radius of curvature or a variable radius of curvature.

20 The curved areas can also be designed such that by their shape and elasticity of the material, they are subjected to an elasticity, by which the curvature changes, and in particular by which the curvature disappears essentially from a certain load. That means that a substantially planar driving area is provided.

25 In a preferred embodiment, the tool device comprises in the region of the attachment device at least a first upper boundary plane and at least a second lower boundary plane. In this case, these boundary planes are disposed substantially perpendicular to said tool axis of rotation. Further, these two boundary planes are spaced apart. Each of these driving area regions is arranged
30 between one of these first upper boundary planes and one of these second lower boundary planes, preferably in such a manner that the driving area region contacts the respective boundary plane. However, it does not cut it. In particular, by the arrangement of at least one driving area region between these boundary

planes, a very large driving area region can be achieved and the stress on this driving area region is correspondingly low. Preferably, a first group of driving area regions, but at least one driving area region is arranged between one of said first upper boundary planes and one of said second lower limit levels, and more
5 preferably a second group of driving area regions is arranged between a further first upper boundary plane and a further second lower boundary plane. In particular, by the grouping of several driving area regions and by their assignment to the boundary planes, both a simple production of the tool device is possible, and secondly, a particularly homogeneous introduction of the torque on the tool
10 device can be achieved.

In a preferred embodiment, all of the driving area regions extend between a single first upper boundary plane and a single second lower boundary plane. In particular, by the extension of these driving area regions between one first upper boundary plane and one second lower boundary plane, a torque transmission area
15 with low space requirement can be achieved, and moreover, a lower necessary material usage can be achieved. It is also advantageous, in particular, by this type of design of the driving area regions, to achieve that the torque is transmitted in a particularly uniform and thus gentle manner to the material to the tool device.

In a preferred embodiment, at least a first boundary plane and a second
20 boundary plane are provided, which are spaced apart from each other by a distance T . Preferably, the tool device comprises, in particular in the region of the attachment device substantially a wall thickness t . Further preferably, the distance T is selected in relation to the wall thickness t from a defined range. It has proven to be advantageous to set the distance T and the wall thickness t in a relation. In
25 particular, by this, favorable stiffness ratios in the attachment region of the tool device can be achieved and thus a favorable torque introduction from the machine tool into the tool device can be achieved. Preferably, the distance T is selected from a range, wherein T is preferably larger than one times t , preferably t is larger than two times t , and more preferably it is larger than three times t , and
30 further preferably, the distance T is smaller than 20 times t , preferably it is smaller than 10 times t , and more preferably it is smaller than 5 times t . In particular, if the wall thickness t is in a range between 0.75 and 3 mm, preferably if it is in a range between 1 to 1.5 mm, the distance T is particularly preferably essentially 3.5 times t . For the present case, this is essentially ± 0.75 times t .

In particular, by having this relationship between the distance T and the wall thickness t, stiffness ratios in the range of the attachment device of the tool device can be achieved, by which particularly favorable torque introduction into the tool device can be achieved, and thus a long service life of the tool device can be achieved.

In a preferred embodiment, the torque transmission region comprises a plurality of driving area regions. Preferably, said plurality of driving area regions is arranged rotationally symmetrical around the tool axis of rotation.

"Rotationally symmetrical around the tool axis of rotation " in the sense of the present application should mean that the plurality of driving area regions merges – seen geometrically – into itself by rotating around the tool axis of rotation by at least an angle being greater than 0 degrees and smaller than 360 degrees - or also by any angle. In particular, one of these angles is $360 \text{ degrees} / n$, where n is a natural number greater than 1.

In particular, by a rotationally symmetrical arrangement of the driving surface regions, it is possible to reduce the additional stresses on the tool device and to evenly stress the driving area regions, respectively, and thus in particular to achieve an increased service life. Further preferably, for a rotationally symmetrical alignment of the driving area regions, the tool device can be accommodated in different angular positions in regard to the tool axis of rotation. Preferably, the tool device can be shifted by discrete angular steps around the tool axis of rotation and it can be accommodated on the machine tool.

In a preferred embodiment, at least two of these driving area regions are arranged symmetrically to a plane of symmetry. Preferably, more than two of these driving area regions are arranged symmetrically to the plane of symmetry, preferably four. Here, in particular the tool axis of rotation is in the plane of symmetry. Further preferably, these driving area regions are arranged substantially in an abutting manner. An abutting arrangement in the sense of the invention can be in particular understood as such an arrangement, when the driving area regions are connected by a transition region. Preferably, such a transition region may be formed by a curved area region or by an at least partially flat extending area region. More preferably, such a transition region abuts tangentially on at least one, preferably on both of these driving area regions. In particular, by a symmetrical and also abutting arrangement of the driving area

regions, a particularly high stability of the driving area regions can be achieved, and therefore a good force transmission to the tool device can be achieved.

In accordance with the invention, the attachment device has a side wall. This side wall extends radially spaced from the tool axis of rotation. Further, this
5 side wall extends between the first upper boundary plane and the second lower boundary plane. This side wall comprises the driving area regions. In particular, the design of the attachment region with a side wall results in a substantially hollow conical recess in the region of the attachment region, but this hollow conical recess has no circular cross section, but a cross section with a variable
10 spacing of the side wall to the tool axis of rotation in a direction orthogonal to the tool axis of rotation. In particular, by the described type of embodiment of the attachment region, a particularly stable attachment region, and thus a good introduction of the torque into the tool device can be achieved.

In a preferred embodiment, the side wall has substantially an average wall
15 thickness t_1 . Preferably, the average wall thickness corresponds substantially to the wall thickness t . Here, this wall thickness t_1 and t , respectively, is preferably selected from a defined range, wherein said wall thickness is preferably greater than or equal to 0.2 mm, preferably it is greater than 0.5 mm, and more preferably it is greater than 0.8 mm. Further preferably, the wall thickness is
20 smaller than or equal to 4 mm, preferably it is smaller than 2 mm, and more preferably it is smaller than 1.5 mm. More preferably, the wall thickness t is substantially 1 mm or 1.5 mm, or preferably it is also a dimension between 1 mm and 1.5 mm. In particular, by choosing a suitable wall thickness in the aforementioned range, it is possible to obtain one the hand a tool having a slight
25 and thus a low momentum of inertia, and on the other hand a tool being sufficiently stable.

In a preferred embodiment, this side wall extends essentially radially closed around the tool axis of rotation. In another embodiment, the side wall has recesses or interruptions on in its extension around the tool axis of rotation. In
30 particular, by a closed circumferential side wall, a particularly stable attachment region can be achieved; by a broken side wall or by a side wall having recesses, an attachment device can be achieved which has particularly light and low momentum of inertia.

In a preferred embodiment, the attachment device has a cover surface section. Preferably, this cover surface section attaches indirectly or indirectly to at least one of these driving area regions. In this case, indirect connection of cover surface section with one of driving area regions should be understood, in particular in that the surface section and the driving area region are connected by a connection region to each other. In this case, such a connection portion should be preferably understood as a curved wall or as a, at least in sections, straight extending wall. Preferably, the direct connection of cover surface section with at least one of these driving area regions should be understood in that this cover surface section is separated from the driving area region only by a production related intermediate section, or that it directly adjoins it. Such a production related intermediate section should be in particular understood as a bending radius, a slope form or the like. Preferably, the extension of this cover surface section has at least one area component perpendicular to the tool axis of rotation. Further preferably, the cover surface section extends at least in sections substantially perpendicular to the tool axis of rotation. Preferably, by this configuration of the cover surface section, an additional stabilization of the driving area regions can be achieved.

In a preferred embodiment, the cover surface section is arranged substantially in the region of one of these first upper boundary planes. Preferably, the attachment device has a particularly small radial extension in the region, in which the cover surface section is arranged. Further preferably, the cover surface section is substantially in the region of the first upper boundary planes, further preferably it is arranged between one of the first upper boundary planes and the lower boundary planes. In particular, the arrangement of cover surface section in the region of the first upper boundary plane is made easily, and it can in particular lead to an additional stabilization of the attachment device.

In a preferred embodiment, the cover surface section extends in the radial direction from radially outward toward the tool axis of rotation. Further preferably, the cover surface section has at least one recess. Further preferably, this cover surface section has several, preferably a plurality of recesses. In particular, by these recesses, the rotational inertia of the tool device can be reduced, and thus its stress can be reduced.

In a preferred embodiment, at least one of these recesses is arranged substantially in the region of the tool axis of rotation. Further preferably, a plurality of these recesses is arranged substantially in the range of this tool axis of rotation. Substantially in the range of this tool axis of rotation should be understood as in particular that one of these recesses includes the tool axis of rotation, or that at least one of these recesses immediately adjoins to the tool axis of rotation, or that it has only a small distance therefrom. In particular, by the one or the several recesses in the region of the tool axis of rotation, a simple attachment of the tool device on a machine tool can be achieved, and thus a good transmission of the force from the machine tool to the tool device can be achieved.

In a preferred embodiment, one of or several of these recesses are arranged rotationally symmetrically around the tool axis of rotation. Further preferably, all of these recesses are arranged rotationally symmetrical around the tool axis of rotation. In particular, by this type of alignment of the recesses, an unbalancing with the movement of said tool device can be avoided or reduced, so that an improved tool device can be achieved.

In preferred embodiment, one of the normal vectors on one of these tangent planes is oriented in the radial direction toward to the output shaft. Preferably, the normal vectors of several of, preferably of all of these tangent planes in the radial direction are oriented away from the tool axis of rotation. In particular, by this orientation of the tangent planes, the attachment device provides the shaft as compared to a conventional shaft hub connection. This configuration of the attachment region provides in particular the possibility of a simple production, and that the driving forces of the machine tool are can be transmitted particularly uniform on the tool device.

In a preferred embodiment, one of the normal vectors on one of these tangent planes is oriented in the radial direction to the tool axis of rotation. Preferably, the normal vectors of several of, preferably of all of the tangent planes are oriented in the radial direction to the tool axis of rotation. In particular, by this orientation of the tangent, the attachment device provides the hub portion in comparison with a conventional shaft hub connection. In such a configuration of the attachment region, the driving forces are transmitted by to internal surface

(hub portion), such surfaces are protected particularly well against dirt and damage.

In a preferred embodiment, the tool device comprises at least one operating region, at least one attachment region and at least one connection
 5 region. Preferably, the operating region is configured to act on a work piece arrangement or on a work piece. A work piece or a work piece arrangement should be in particular understood as a semi-finished product, a machine element, a component, an arrangement of several of these elements, a machine, preferably a component of a motor vehicle, a building material, a building or the like. A
 10 operating region should be preferably understood as a cutting device, a grinding device, a cutting device, a scraping, a lever device or the like. Further preferably, a connection region should be understood as a section of said tool device, through which the driving forces are transmitted from the attachment region to the operating region, wherein in attachment region the driving forces are introduced
 15 from the machine tool onto the tool device. Further preferably, the connecting portion is a flat section, a curved section, a corrugated section or a bent section. Further preferably, this connection region is integrally formed with at least this operating region, or at least with this attachment device. Preferably, this connection region can be made of the same or of a different material as that of
 20 the operating region or the attachment device, and it can be connected to them. Preferably, this connection is form fit connection, force fit connection or material fit connection or preferably a combination of several of these types of connection. Particularly preferably, it is welded, riveted, caulked or screwed. Further preferably, a single connection region is disposed between the attachment device
 25 and each of those operating regions. In particular, the described configuration of the tool device with the attachment device, the operating region and the connection region, an advantageous transmission of the driving forces from the connection device to the operating region can be achieved.

In a preferred embodiment, at least one of these connection regions is
 30 disposed in a certain region of the attachment device. Preferably, at least one of these connection regions is arranged substantially within the region of one of the second lower boundary planes, which is further away from a receiving machine tool than the second upper lower boundary planes. Preferably, it is arranged in the region of one of the first upper boundary planes, and more preferably it is

arranged between these boundary planes. Further preferably, at least one of these connection regions coincide substantially with this second lower boundary planes. Further preferably, all of the connection regions are arranged in the form described above. Further preferably, the cover surface section, and preferably one of, more preferably all of the connection regions are disposed diametrically opposed to the connection device. That is, the cover surface section is disposed in the region of the first upper boundary plane / at least one of or preferably all of connection regions are arranged in the area of the second boundary plane or vice versa. In particular, by the described type of construction and arrangement of the connection regions, a particularly stable tool device can be achieved, and thus a uniform introduction of the torque into the tool device can be achieved.

In a preferred embodiment, the angle α is included between one of these tangent planes and this radial plane, wherein said radial plane is perpendicular to the output shaft. Preferably, the angle α is selected from a certain range, wherein the angle α is preferably smaller than 90 degrees, in particular it is smaller than 80 degrees and most preferably it is smaller than 75 degrees. Further preferably, the angle α is greater than 0 degrees, in particular it is greater than 45 degrees, and most preferably it is greater than 60 degrees. More preferably, the angle α is in a range between 62.5 degrees and 72.5 degrees. Preferably, the angle α is selected in the above mentioned range due to the component properties (in particular the geometry, the wall thickness, the modulus of elasticity, the strength and the like) of the torque transmission region and / or the tool device and / or it is preferred because of the occurring forces. In particular, by the previously described selection of the angle α out of said range, a stable torque transmission region can be achieved, and on the other hand also a uniform introduction of the driving forces into the tool device. It is usually preferred to choose the angle α smaller than 70 degrees, since the risk of jamming is then lower. Here, the term "jamming" should be construed in such a way that the tool device can not be removed from the machine tool as scheduled, which means in particular without an additional force. Effects similar to this "jamming" are known in mechanics especially as a self-locking. As an advantage, an angle α , which has been selected from said range ($\alpha \geq 70$ degrees), results into a particularly low space requirement. As a further advantage, the tendency to the jamming of the tool device can be reduced in this torque transmission region by a smaller angle α ($\alpha < 70$ degrees). As a particularly preferred range for the angle α , the range of 60

degrees (+/- 5 degrees) has shown that in this way a relatively small installation space can be achieved and that an accidental jamming of the tool device can be reduced or avoided.

In a preferred embodiment, the angle β is enclosed between one of these
5 tangent planes and this axial plane, wherein the output shaft is located in this axial plane. Preferably, the angle β is selected from a certain range, wherein the angle β is preferably smaller than 90 degrees, in particular it is smaller than 70 degrees, and most preferably it is smaller than 65 degrees. Furthermore, preferably, the angle β is greater than 0 degrees, preferably it is greater than 15
10 degrees and most preferably it is greater than 30 degrees. More preferably, the angle β is substantially 30 degrees, 45 degrees or 60 degrees. More preferably, the angle β deviates only slightly from one of the aforementioned three values of the angle, wherein preferably slightly below a range should be understood as of preferably +/- 7.5 degrees, in particular of +/- 5 degrees and most preferably of
15 +/- 2,5 degrees. In particular, by the described selection of the angle β out of said range, a particularly stable torque transmission region can be achieved, and thus a uniform torque introduction from the machine tool to the tool device can be achieved. The transmittable torque increases in particular with a decreasing angle β . Preferably, for configurations which desire a high transmittable torque, the
20 angle β is selected from a range of $0 \text{ degree} < \beta < 30 \text{ degrees}$. In particular, the space requirements decrease with an increasing angle β . Preferably, for configurations that desire a small space requirement, the angle β is selected from a range from $60 \text{ degree} < \beta < 90 \text{ degrees}$. In a particularly preferred embodiment, in which a large torque is particularly transmittable and a low space
25 requirement is desired, the angle β is essentially 60 degrees.

In a preferred embodiment, the tool device has an even number of driving area regions. Preferably, the tool device has 4 or more driving area regions, in particular it has 8 or more driving area regions, and most preferably it has 16 or more driving area regions. Further preferably, the tool device has 64 or less
30 driving area regions, in particular it has 48 or less driving area regions and most preferably it has 32 or less driving area regions. Furthermore, preferably, the tool device has an odd number of driving area regions, and preferably it has even number of driving area regions. Preferably, the number of the driving area regions is a function of the size of the tool device. Further preferably, a tool device may

also have larger numbers of driving area regions than those specified here. Here, a large tool device should be understood in particular as a tool device, which has essentially a diameter exceeding 50 mm or more. Further preferably, the tool device has a diameter of substantially 30 mm. In particular, by the even number
5 of the driving area regions, the driving forces of the machine tool can be transmitted in pairs on the tool device. It has been found that a particularly durable and thus improved tool device can be achieved, in particular by this introduction in pairs of the driving forces on the tool device.

In a preferred embodiment, the driving area regions are substantially
10 arranged in a star-like manner. Preferably, the driving area regions are substantially arranged in a star-like manner around the tool axis of rotation. Further preferably, by the driving area regions, a three-dimensional body is described, which being cut by a plane orthogonal to the tool axis of rotation has essentially the base area of a star-shaped polygon.

15 In the sense of the present invention, the term polygon should not only be understood to be the mathematically exact form having obtuse angled corners or acute angled corners, but it should also be understood as a form in which the corners are rounded.

More preferably, the star-like disposed driving area regions appear similar
20 to a toothed shaft of a conventional shaft hub connection, wherein the shaft has a conical basic shape due to the double inclination of the driving area regions. In particular, by the star-shaped arrangement of the driving area regions it is possible to arrange a plurality of driving area regions in a small space and to transmit a large driving force from the machine tool securely to the tool device.

25 A series of tool devices according to the invention comprises at least two of said tool devices. In this case, such a tool device has in particular a reference plane. The reference plane is perpendicular to the tool axis of rotation. The reference plane has at least one reference diameter or another reference dimension of the driving area regions. In this case, a first distance Δ of a first
30 surface of the cover surface section for the reference plane for different tool devices of a series lies between a first lower limit and a second upper limit.

In the sense of the invention, a reference plane should be understood as a plane whose position is determined in the axial direction of the tool axis of

rotation, that it contains the same reference diameter for a first tool and at least one further tool of this series. In this case, the axial position of this reference plane in the axial direction may be different from at least a first and a second tool of this series, because of the double inclination of the driving area regions. By the
 5 reference plane, the axial position of the reference diameter for a tool device is particularly defined. This leads in particular in the axial direction to a fixed reference point for several tool devices of a common series. Figuratively speaking, this approach can be particularly understood that an imaginary ring (reference diameter, reference dimension) is threaded in the axial direction on the driving
 10 area region, and this defines a particular axial position, which may differ for different tool devices. In particular, by specifying a lower limit and an upper limit, it is possible to take account of unavoidable tolerances in the manufacture of the tool device. Preferably, these limits have been selected from a range of a few 10ths or of a few 100ths mm.

15 In a preferred embodiment of this series, the distance Δ for at least two different tool devices of the series is substantially constant. Preferably, constant should be understood in that the distance Δ of a first tool device and the at least one second tool device or the several second tool devices is at least within this limit. In particular, the fact that the distance Δ moves within a series of tools in a
 20 narrow tolerance band, it is possible that the tool devices of a series are positioned substantially equal in the axial direction, and thus a safe introduction of the torque can be ensured.

In a preferred embodiment of a series of at least two tool devices, at least two tool devices of the series have different average wall thickness t or t_i . In
 25 particular, by tool devices with different wall thicknesses, it is possible to make the tool device suitable to the load; because on the tools, which are intended for different uses, for example, sawing or grinding, act different forces, and these different forces can be taken into account, in particular by the different wall thicknesses.

30 In a preferred embodiment, a series comprises at least two tool devices, which have an encoding region, which is substantially equal arranged with respect to its position in regard to the tool axis of rotation and the driving areas. Further preferably, each tool device comprises such an encoding region and, preferably, each of these tools devices is characterized by at least one application parameter,

such as in particular a preferred driving power. Further preferably, such an application parameter may take into consideration the type of tool, the type of manufacturer or other parameters of the machine tool, or preferably it may take into consideration the power necessary for driving the tool device. Preferably, the
5 encoding region comprises at least one encoding device. Preferably, this encoding device is characteristic for at least one of these application parameters. In particular, by the described configuration of the encoding region, it is possible to keep different tools of a series for various areas of application; and thus to counter overloading the tool devices from the outset.

10 In a preferred embodiment of a series of at least two tool devices, at least a first tool device comprises a first encoding device. Preferably, this first encoding device is intended to cooperate with a first coding element, which is preferably arranged on a machine tool. Further preferably, at least one second tool device of the series comprises a second encoding device. Further preferably, the second
15 encoding device is provided to cooperate with a second encoding element. Preferably, a first encoding element is arranged on a first machine tool, and more preferably the second encoding element is arranged on a second machine tool. Preferably, the encoding devices and the encoding elements are designed so that the first encoding element can cooperate with the first encoding device and the
20 second encoding device. Preferably, the second encoding element is designed such that it does not cooperate with the first encoding device, but that it does cooperate with the second encoding device. In particular, by this configuration of the encoding devices, it is possible to restrict certain tools to specific machine tools. In this case, on the one hand, it can be achieved that in particular a tool
25 device having an attachment region, which is provided for small driving forces, will not be received on a machine tool, which provides driving forces that can damage this attachment region of the tool device. On the other hand, it can be achieved that the tool device which require high driving forces or have a high torque can not be received on a machine tool, which is not set up for this purpose.
30 Thus, damage to the machine tool can be prevented.

In a preferred embodiment of the series of at least two tool devices, the form of a basic area of at least one of, preferably of all of the encoding devices is selected from a group of shapes. Preferably, this group has at least one of the following elements:

- a polygon with a plurality of corners, preferably 3, 4, 5, 6, 7, 8 or more corners,

- a circle,

- an ellipse,

- 5 - an arc with a variable radius or a constant radius or
- a combination of several of the mentioned forms.

In particular by the design of this encoding device, it can be adapted to the respective requirements on the tool device, and thus is an improved series of tool devices can be achieved.

- 10 In a preferred embodiment, a series of at least two tool devices comprises at least two tool devices, each one of these having encoding devices, wherein the encoding devices have the same geometric shape, but different sizes. Preferably, all tool devices comprise an encoding device having the same geometric shape, but at least partially different sizes.

- 15 In a preferred embodiment, a series of at least two tool devices comprises at least one tool device, in which the encoding device is designed as raised portion compared to a encoding reference plane. Preferably, an encoding reference plane should be understood as a plane perpendicular to the tool axis of rotation. Further preferably, the encoding reference plane is disposed substantially in the region of
- 20 the cover surface section, or it coincides with the cover surface section. Further preferably, the series comprises a second tool device with a raised second encoding region. Preferably, at least one first extension of a encoding device is larger than the respective extension of the second encoding device. Preferably, the first tool device for the machine tools is provided with a high driving power,
- 25 and further preferably the second tool device for the machine tools is provided with a low driving power. In this case, a high driving power of the first machine tool should be understood in that this driving power is larger than the driving power of the second machine tool. Preferably, the similar first extension on the first tool device is larger than the same extension of the encoding device on the
- 30 second tool device. By this, high-performance tools can be reserved in particular for the machines, which are intended for professional use in industry and crafts enterprises (professional machines); and tool devices can be reserved for lower performance requirements, both on professional machines as well as on DIY (Do-

it-yourself) machines, which are intended for use in the private sector. This makes it possible in particular to adapt the tool devices to the respective driving power, thus is improved tool devices can be achieved.

In a preferred embodiment of a series of at least two tool devices, at least
 5 one of the encoding devices is constructed as a recess. Preferably, all of the encoding devices of the series are constructed as recesses. Further preferably, the encoding devices are arranged in the region of an encoding reference plane. Preferably, at least an extension of an encoding device is larger than the respective extension of the other encoding device. In particular, a tool device,
 10 which is intended for a professional machine with a high driving power has a small encoding device. A second tool device of the same series, which is provided in particular for a DIY-machine, has opposite to the first encoding device a large encoding device. For this applies in particular that a professional machine has a higher driving power in regard to a DIY machine. The tool device dedicated to the
 15 DIY machine thus fits both on the professional machine as well as the DIY machine, while the professional tool can not be mounted on a DIY machine. This prevents that DIY machines are damaged by the tool devices that are designed for higher power ratings. In particular, the fact that the encoding device (recess) for the professional machine is smaller than the encoding device for the DIY-machine,
 20 particularly stable tool devices can be achieved for a large driving power.

In a preferred embodiment, a series of at least two tool devices comprises encoding regions which are arranged in the region of this cover surface section. Particularly, if these cover surface section are arranged in the region of an upper boundary plane, the encoding regions are can be particularly easy accessed, and
 25 therefore is an improved tool device can be achieved.

A method for manufacturing a tool device according to the invention comprises for the manufacturing of at least one driving area region a primary shaping process step, or a reshaping process step, or a generative process step. Preferably, the process for the manufacturing of at least one driving area region
 30 comprises a combination of several of the aforementioned process steps. The process steps for the manufacturing of at least one driving area region are selected from a group of process steps comprising at least the following manufacturing method:

a forging, a pressing, a rolling, an extruding, a folding, a deep drawing, a beading, a flanging, a straightening, a bending, a stretching, a compressing, a sintering, a casting, a layer by layer coating or the like.

Preferably, a method for the manufacturing of a tool contour of the tool device has a separating process step. Preferably, it is a thermally separating process step, preferably a mechanically separating process step or a combination of several of these process steps. Further preferably, the process steps the manufacturing of the tool are selected from a group comprising at least the following process steps:

10 a sawing, a grinding, a milling, a punching, a shearing, a particle beam cutting, an electron beam cutting, a laser cutting, a plasma cutting, a flame cutting, and a spark erosion cutting.

Preferably, the tool device, but at least the outer form is generated completely or predominantly by a generative manufacturing method.

15 In particular, by the aforementioned manufacturing method, it is possible to produce a particularly precise driving area region, and thus ensure a uniform introduction of the driving forces in the tool device.

The following figures show various features and embodiments of the invention and they are partially in a schematic form, wherein a combination of the individual features and the embodiments beyond the figures is also possible.

In a preferred embodiment, the tool device is received in such a way on output spindle of the machine tool that a small distance δ is obtained between an end face of the output spindle and an opposite surface of the tool device, when the tool device is received on the machine tool. Preferably, this distance is

25 substantially equal in at least two points, lying symmetrically in regard to the tool axis of rotation, preferably at several points. Preferably, a small distance in this context should be understood as a distance δ , which is in a range which is preferably smaller than 5 mm, preferably smaller than 2.5 mm and more preferably smaller than 1.5 mm, and most preferably smaller than 0.8 mm, and

30 further preferably larger than 0.0 mm, preferably larger than 0.25 mm, and more preferably be larger than 0.5 mm. By a small distance δ , it can be advantageously be achieved that the tool device, in particular in the case of an overloading, is supported on the output spindle, and that a tilting of the tool device is avoided or

reduced. Further preferably, it can be achieved that in the insertion into the machine tool, the tool device can be received in not a particularly significant skew.

In a preferred embodiment, the tool device comprises stepped driving area regions, wherein the stepped driving area regions can be understood mutatis
 5 mutandis as driving area regions or tool driving area regions, and the explanations about these can be transferred to the stepped driving area regions. Preferably, stepped should be understood in the context of the invention in that this driving area regions are offset against the side wall of the tool device. In contrast to the non-recessed driving area regions, the driving area regions are
 10 preferably arranged not on or in the side wall of the tool device, but preferably offset to it, preferably radially offset, particularly radially spaced therefrom.

A connection device according to the invention is adapted for connecting a tool device with a machine tool, and in particular with hand guided machine tool. Preferably, a driving device of the machine tool drives the driving axis, in
 15 particular in a rotationally oscillating manner. The connection device comprises a first connection region and a second connection region. The first connection region is adapted for connecting the connection device to the machine tool, wherein the connection device can be connected to the machine tool in such a manner that the driving axis and a connection rotation axis substantially coincide. The second
 20 connection region is adapted for connecting the connection device with the tool device. Here, at least one of the connection regions has an attachment device, wherein the attachment device comprises at least two driving area region.

Furthermore, at least two driving area regions are provided, which are spaced apart from the connection axis of rotation, and which each has a plurality
 25 of surface points. The term "driving area" means an area that can at least partially be directly or indirectly in contact with the output device of the machine tool, to receive the torque from the machine tool. The term "surface point" means points on the surface of the driving surfaces in the sense with the given definition.

For the tangent planes to the surface points special geometric conditions
 30 apply. The tangent planes are, as shown in the geometry common practice, the layers that are formed perpendicular to the normal vectors of the surface points and contact the surface at the surface point. The term "normal vector" means a vector which is oriented in this surface point exactly perpendicular to the surface.

The tangent planes in the surface points are inclined in two directions. On the one hand, the tangent planes are inclined in regard to an axial plane, which includes the tool axis of rotation. Further, the tangential planes are inclined in regard to a radial plane which extends perpendicular to the tool axis of rotation.

- 5 The attachment device of the connection device and thus the driving areas or the driving area region of the connection device correspond therefore mutatis mutandis preferably to the driving area region of the tool device.

- In a preferred embodiment, the connection device comprises a first connection region which is arranged rotationally symmetrical to the connection
10 axis of rotation. Preferably, the connection axis of rotation should be understood in the sense of the tool device as the tool axis of rotation. Preferably, the connection device is received with its attachment device on the machine tool in such a manner that the connection device can be driven around the connection axis of rotation, preferably in an oscillating manner or in a rotating manner.
15 Further preferably, the connection axis of rotation and a first holding shaft coincide, and they are arranged parallel to one another or obliquely to one another. By such an arrangement of the connection region, a connection device having especially small imbalances can be achieved.

- In a preferred embodiment, the second connection region is disposed
20 rotationally asymmetrical to the connection axis of rotation. By such an arrangement, the connection region can be arranged, in particular at a small size, in a region of low stress.

- In a preferred embodiment, the second connection region is arranged rotationally symmetrical to the connection axis of rotation. By such an
25 arrangement, the tool device can be received at the connection device in such a manner that the axis of rotation of this tool means and the connecting axis of rotation are substantially coincident with each other and so small imbalances arise.

- In a preferred embodiment, the connection device comprises a first holding
30 device. Preferably, said the first holding device is adapted to cooperate with at least the first connection region and the machine tool. Preferably, the holding device comprises a screw device, more preferably a hook device, a snap fit device, or more preferably a latching device.

In particular by means of a holding device with a screw device, a particularly simple receiving of the connection device on the machine tool can be achieved.

In a preferred embodiment, the connection device comprises at least one
5 second holding device. Preferably, the second holding device is adapted to cooperate with the second connection region and the tool device. Preferably, the tool device is received on the connection device in a material fit manner, preferably a form fit manner and particularly preferably a force fit manner or in a combination of the types listed. Preferably, the second holding device comprises a
10 screw device, more preferably a hook device or a snap hook device, and particularly preferably a latching device.

In a preferred embodiment, the first holding device comprises a first holding shaft. In this case, the first holding shaft should be understood in the sense of the invention as the axis along which the direction of action of a holding
15 force extend, which can be applied by this holding device. Preferably, for a screw device, the line of symmetry of it should be understood as the holding axis. Further, the second holding device comprises on second holding shaft, wherein preferably the second holding shaft, mutatis mutandis corresponds to the first holding shaft. Preferably, this first holding shaft and this second holding shaft are
20 substantially parallel, in particular congruent to each other. Preferably, the connection rotation axis coincides with the first holding shaft. In the sense of the invention, congruent may be construed as coaxial. By such an arrangement of the holding device, it can be particularly achieved, that the connection device on the machine tool and the tool device at the connection device can be received
25 particularly easy, especially in a single operation.

In a preferred embodiment, the first holding device comprises a first holding shaft and the second holding device comprises a second holding shaft. Preferably, the first holding shaft and second holding shaft are arranged askew, particularly skewed to each other. In the sense of the invention, askew can be
30 understood in that the two holding shafts are not parallel to each other on the one hand and that they do not intersect the other in the space. By such an arrangement, a particularly stress tolerant design of the connection device can be achieved.

Here, the following are showed:

Figure 1 shows a side view (figure 1a) and a plan view (figure 1b) of a tool device with two driving area regions.

Figure 2 shows a side view of several driving area regions, which extend in each case between an upper boundary plane and a lower boundary plane.

- 5 Figure 3 shows a side view of several driving area regions, which extend between a common upper boundary plane and a common lower boundary plane.

Figure 4 shows a sectional view of a section of the tool device.

Figure 5 shows a plan view (figure 5a) and a side view (figure 5b) of two contiguously arranged driving area regions.

- 10 Figure 6 shows a plan view (figure 6a) and a side view (figure 6b) of a plurality of contiguously arranged driving area regions, these driving area regions being disposed circumferentially closed around the tool axis of rotation.

Figure 7 is a sectional view of a section of a tool device with a cover area section.

- 15 Figure 8 shows a plan view (figure 8a) and a side view (figure 8b) of a tool device with an operating region, a connection region and an attachment region.

Fig. 9 shows a sectional view of the tool device with a tangent plane on a surface point of the driving region with the angle of inclination α .

- 20 Figure 10 shows a plan view of a portion of the tool device having a tangent plane on a surface point of the driving region and the inclination angle β .

Figure 11 shows a sectional view (figure 11a) and a plan view (figure 11b) of a tool device with a reference plane and an encoding device.

- 25 Figure 12 shows a sectional view (figure 12a) and a plan view (figure 12b) of a tool device of the same series, as illustrated in the figure 11, but with a different encoding device.

Figure 13 shows two sectional views of different types of encoding devices of the tool device.

Figure 14 shows perspective views of differently curved driving area regions.

- 30 Figure 15 shows a side view of a machine tool with a tool device.

Figure 16 shows a plan view of a region of the tool device.

Figure 17 shows a sectional view of a region of the tool device.

Figure 18 shows a sectional view of a region of the output spindle and the tool device, which is accommodated in the machine tool.

5 Figure 19 shows a sectional view, respectively (figure 19 a / b) and a plan view (figure 19 c / d) of two embodiments of the tool devices with a stepped driving area region.

Figure 20 shows a sectional view (figure 20a) and a plan view (figure 20b) with a further tool device with the stepped driving area region.

10 Figure 21 shows a sectional view (figure 21a) and a plan view (figure 21b) of a tool device with a raised driving area region.

Figure 22 shows a sectional view of a tool device, the output spindle and a connection device with a first connection region and a second connection region.

15 Figure 23 shows a sectional view of a tool device, the output spindle and a further embodiment of a connection device.

Figure 24 shows a sectional view of another embodiment of a connection device, here with a frictional torque transmission from the connection device to the tool device.

20 Figure 25 shows two cross-sectional views of further embodiments of the connecting device with a form fit torque transmission (figure 25a, a hollow body; figure 25b, a solid body).

The figure 1 shows two views (figure 1a front view, figure 1b plan view) of a tool device 1. This tool device has two driving area regions 2. Here, a driving area region 2 has several surface points 3. A tangent plane 4 can be assigned to each of these surface points 3 in the driving area regions 2. These tangent planes 4 are inclined in regard to a radial plane 6 and in regard an axial plane 7. Here, the radial plane 6 is arranged orthogonally to a tool axis of rotation 5 and an axial plane 7 encloses the tool axis of rotation 5a. The tool device 1 is provided for a rotationally oscillating driving of a hand guided tool device (not shown). If the tool device 1 is driven by a suitable machine tool then the tool device 1 is put into a rotating oscillating motion around the tool axis of rotation 5. By the dual inclination of the driving area region 2, it can be achieved a holding free from

25

30

backlash of the tool device 1 in the machine tool. This is particularly advantageous for a sawing operation and a grinding operation or the like, since here varying loads act on the tool device 1 with respect to the tool axis of rotation 5, and a lost motion connection between the machine tool and the tool device 1 may result to the knocking out of the connection, and thus in particular it may result into a damaging of the tool device 1.

The figure 2 shows a view of the tool device 1, in which it can be seen that the driving area region 2 extends between each of an upper boundary planes 8a and a lower boundary planes 8b. These boundary planes 8 are preferably arranged orthogonally to the tool axis of rotation 5. In this case, in each case the driving area region 2 extends from the upper boundary plane 8a to the lower boundary plane 8b or vice versa. Preferably, here, the lower boundary plane 8b is located at the level of an operating region 13. Here, an operating region should be understood as an example as a saw tooth, as a saw blade or the like. Thereby, the lower boundary planes 8b is arranged substantially at the level of the operating region 13, a particularly deformation poor transmission of the driving forces of the driving area regions 2 on the operating region 13 is possible. By the different boundary planes 8, and thus by the different extensions of the driving area regions 2, a particularly good adaptability to the requirements of the tool device is provided, in particular with regard to the space requirements, to the backlash and to the torque transmission. In the present case, the lower boundary planes 8b coincides with a common lower boundary plane 8b. The upper boundary planes 8a do not coincide in this embodiment, resulting into driving area regions 2 of different heights.

The figure 3 shows a view of the tool device 1, in which all the driving area regions 2 are delimited by a single lower boundary plane 8b and a single upper boundary plane 8a. These boundary planes 8 are arranged perpendicular to the (fictional, geometric) tool axis of rotation 5. The lower boundary planes 8b is arranged substantially at the level of the operating region 13. In the direction of the tool axis of rotation 5, the upper boundary plane 8a is spaced away from the lower boundary plane 8b. If all of the driving area regions 2 extend between a single upper boundary plane 8a and a single lower boundary plane 8b, then a particularly simple manufacture of the tool device is possible, and further a

particularly uniform transfer of the forces from the machine tool (not shown) on the tool device 1 is possible.

The figure 4 shows a part of the tool device 1 in a sectional view. The tool device comprises a (fictional, geometric) tool axis of rotation 5. The tool device 1 can be driven rotationally oscillating around the tool axis of rotation 5. The driving area region 2 is arranged spaced apart to the tool axis of rotation 5, and it extends in the direction of the tool axis of rotation 5 between the lower boundary plane 8b and the upper boundary plane 8a. The upper 8a boundary plane and the lower boundary plane 8b are spaced apart by the distance T. Here, the distance T is depending on the thickness t of the wall, which also has the driving area region 2. By this dependence, a particularly favorable relationship between the stiffness of the driving area regions and their size is achieved.

The figure 5 shows different sectional views (figure 5a, top view; figure 5b front view) of the tool device 1. The tool device 1 has the tool axis of rotation 5. The driving area regions 2 are arranged symmetrically to a plane of symmetry 9. Here, the plane of symmetry 9 includes the tool axis of rotation 5. The driving area regions 2 are arranged contiguously and meet in a transition region 17. This transition region 17 is designed in dependence on the manufacturing process or on the stress in the force transmission to the tool device 1 and it may have a radius. The driving area regions 2 extend between the lower boundary plane 8b and the upper boundary plane 8a, and they are spaced apart from the tool axis of rotation 5. A symmetrical and in particular contiguous arrangement of the driving area regions 2 allows the design of a highly stable tool device 1, since the driving area regions 2 can support each other.

The figure 6 shows several partial views (figure 6a, top view; figure 6b front view) of the tool device 1. The tool device 1 has a tool axis of rotation 5, and a plurality of driving area regions 2, these driving area regions extend between the upper boundary plane 8a and the lower boundary plane 8b. The driving area regions 2 are each arranged contiguously to each other and form a radially closed side wall, which is circumferential around the tool axis of rotation 5. The driving area regions 2 are each inclined in regard to the radial plane 6 and in regard to the associated axial planes 7. By means of such a closed circumferential side wall, on the one hand, a particularly stable tool device can be achieved, and on the

other hand, a particularly uniform driving force transmission from the machine tool (not shown) on the tool device 1 can be achieved.

The figure 7 shows a detail of the tool device 1 in a sectional view. The tool device 1 has the tool axis of rotation 5, the driving area region 2, and a cover area section 10. The tool device 1 can be driven around the tool axis of rotation in a rotating oscillating manner. The figure 7 shows that the driving area region 2 is inclined in regard to the radial plane 6. The driving area region 2 extends between the upper boundary plane 8a and the lower boundary plane 8b. The driving area region 2 abuts substantially immediately to the cover area section 10 in the region of the upper boundary plane 8a. By means of a thus arranged cover area section 10, a further stabilization of the driving area regions 2 can be achieved, and for the same size of the driving area regions 2, larger driving forces can be transmitted as without the cover area section 10.

The figure 8 shows several partial views (figure 8a plan view; figure 8b front view) of the tool device 1. This tool device 1 has the (fictional, geometric) tool axis of rotation 5, a plurality of driving area regions 2, and the cover area section 10. The operating region 13 of the tool device 1 is intended to act on a work piece or on a work piece arrangement (not shown). In each case, two driving area regions 2 are positioned abutting one another and are connected with a further pair of driving area regions 2 by means of a connection region 11. The driving area regions 2 are arranged with rotational symmetry and they extend in the direction of the tool axis of rotation 5 between the upper boundary plane 8a and the lower boundary plane 8b. The driving area regions 2 are inclined in regard to the radial plane 6 and in regard to the assigned axial planes 7. By the connection regions 11, the driving area regions 2 form the closed side wall, which is circumferential around the tool axis of rotation 5. By means of the illustrated rotationally symmetrical arrangement of the driving area regions 2, the tool device 1 can be offset in the machine tool (not shown), provided of an appropriate design of these, so that the tool device can machine a work piece or a work piece arrangement (not shown), which is even difficult to access.

The figure 9 shows a detail of the tool device 1 in a sectional view. The tool device 1 has the tool axis of rotation 5 and the driving area region 2. This driving area region 2 has several surface points 3. To each of these surface points 3, a tangent plane 4 can be assigned. The radial plane 6 is arranged orthogonal to the

tool axis of rotation 5. The radial plane 6 includes an acute angle α with the tangent plane 4. By this angle α , and thus by the inclination of the tangent plane 4 against the radial plane 6, it is particularly easy to receive the tool device 1 without play on the machine tool, especially when the tool device 1 is held on the machine tool (not shown) with a clamping force 18 in the direction of the tool axis of rotation.

The figure 10 shows a detail of the tool device 1 in plan view, wherein the tool axis of rotation 5 can be seen merely as a point. The axial plane 7 includes the tool axis of rotation 5 and it can be seen as a straight line in the figure 10. To the surface point 3 of the driving area region 2, a tangent plane 4 can be assigned. The driving area regions 2 are positioned abutting one another and are spaced apart radially from the tool axis of rotation 5. The tangent plane 4 includes an acute angle β with the axial plane 7. By the angle β in conjunction with the angle α , it is possible that the tool device 1 is centered in regard to the machine tool (not shown) when it is received in the machine tool.

The figure 11 shows multiple views (figure 11a cross-sectional view; figure 11b top view) of the tool device 1. The tool device 1 has the tool axis of rotation 5 and a plurality of driving area regions 2, which are arranged radially spaced apart therefrom. The driving area regions 2 are substantially planar. Further, these driving area regions 2 are arranged contiguously, forming a closed side wall, which is circumferential around the tool axis of rotation. The driving area regions 2 extend toward the tool axis of rotation 5 between the upper boundary plane 8a and the lower boundary plane 8b. In the region of the upper boundary plane 8a, the cover area section 10 is arranged. The cover area section 10 preferably has an encoding device 16. The encoding device 16 is preferably arranged as a circular recess in the tool axis of rotation. This circular recess has a first encoding diameter Kd_1 . Other tool devices (not shown) of the same series, which, however, are provided for other drive ratings, may have further coding diameters (Kd_2 , and so on) that are different from the Kd_1 . The Kd_1 indicates for example a tool device 1 for a professional use, the Kd_2 (not shown) indicates a tool device for the do-it-yourself (DIY) use. Further, a lower section of the cover area section 10a has a distance Δ to the reference plane 14. The position of the reference plane 14 is defined in such a way that it contains a reference diameter 15 (nominal outer diameter, nominal middle diameter, nominal inner diameter or

the like). For different tool device of a series, in particular at different wall thicknesses t or also due to unavoidable tolerances in the manufacture of the tool device, different positions results based on the position in the direction of the tool axis of rotation 5, for nominally the same reference diameter 15. Starting from this position of the reference plane 14 in the direction of the tool axis of rotation 5, the tool device comprises a substantially constant distance Δ from the lower cover area section 10a to this reference plane 14. Thereby that a plurality of tool devices of a series have a substantially constant distance Δ between the lower cover area section 10a and the reference plane 14, a particular simple and safe accommodating is provided for the different tool devices 1 on the machine tool (not shown).

The figure 12 shows the same views of a tool device 1 as well as the figure 11. However, in the figure 12 another tool device 1 of the some series of tool device 1 is shown, which has been shown in the figure 11. Therefore, below are mainly discussed the differences between the tool device 1, which is shown in the figure 1, and the tool device 1, which is shown in the figure 12. In the cover area section 10 an encoding device 16 is arranged as a recess in the tool axis of rotation 5. This encoding device 16 includes an encoding diameter Kd_2 , while the encoding diameter Kd_2 is smaller than the encoding diameter Kd_1 (figure 11). The encoding device 16 is configured to cooperate with a second encoding element (not shown), which is arranged on the machine tool (not shown). By such a design of the encoding means 16 in a series of tool devices, it is possible to reserve specific tool devices 1 for certain machine tools, and thus to enable a safe operation.

The figure 13 shows various illustrations of the different tool devices 1, particularly with regard to the encoding device 16. The figure 13a shows a detail of a tool device 1 with a raised encoding device 16a. The figure 13b shows a tool device 1 with a encoding device 16b which is designed as a recess. For both encoding devices 16a/b it is common that they are arranged in the region of the cover area section 10 of the tool device 1. The tool device 1 comprises a plurality of driving area regions 2, which are arranged spaced apart from the tool axis of rotation 5.

The figure 14 shows different sections of a driving area region 2 of the tool device. Not shown is a planar driving area region, such a driving area region is

also preferably possible. The figure 14a shows a unidirectionally curved section of the driving area region 2. This section of the driving area region 2 can be described by the straight lines a and by the curved grid lines b_I . The curved grid lines b_I have a constant radius of curvature R_I . Such a driving area region 2 corresponds to, in sections, a cylinder jacket surface, as far as several different radii of curvature R_I are provided, it corresponds to a conical surface (not shown). In this case, the size of the radius of curvature R_I is selected in such a way that the driving area region 2 changes in sections during the transmission of the driving forces to a plane or that it adapts to the opposite surface (not shown) which cooperates with it to transmit the driving forces. The figure 14b shows a section of the driving area region 2 with a bidirectional curvature. This section of the driving area region 2 can be described by the curved grid lines b_I and by the curved grid lines b_{II} . The grid lines b_I have the constant radius of curvature R_I and the grid lines b_{II} have the constant radius of curvature R_{II} . Such a driving area region 2 corresponds to, for the special case that the first radius of curvature R_I and the second radius of curvature R_{II} are of the same size, a spherical surface. In the figure 14b a driving area region 2 with different radii of curvature R_I and R_{II} are shown. In this case, the size of the radii of curvature R_I and R_{II} can be selected such that the driving area region 2 at least partially changes during the transmission of the driving forces to a plane or that it adapts it to the counter surface (not shown) which cooperates with it to transmit the driving forces. The figure 14c shows a section of one driving area region 2 with the bidirectional curvature. This section of the drive surface area 2 can be described by the grid lines b_I having a constant radius of curvature R_I and by the grid lines b_{Ia} having a variable radius of curvature R_{Ia} . In such a driving area region 2, also all the grid lines can have a variable radius of curvature (not shown). The size of the radii of curvature R_{Ia} and R_{II} can be selected in such a way that the driving area region 2 changes during the transmission of the driving forces in sections to a plane or that it adapts it to the counter surface (not shown) which cooperates with it to transmit the driving forces. In the figure 14, a concave curved driving area region 2 is shown, the expressed considerations can be transferred to a convex curved driving area region, accordingly.

The figure 15 shows a tool device 1 which is accommodated in a machine tool 22. The tool device 1 comprises an attachment device 12, by which it is connected to the machine tool 22. The machine tool 22 has an output spindle 22a,

which introduces the driving forces into the tool device 1, in particular into its attachment device 12. The output spindle 22a moves around the machine tool axis of rotation 22c, in particular rotationally oscillating, thereby also the tool device 1 is brought in a similar motion. The tool device 1 has an operating region 5 13, which is adapted to act on a work piece or a work piece arrangement (not shown). The driving forces of the machine tool 22 are transmitted to the operating region 13 by the tool connection region 11 of the attachment device 12. The machine tool 22 has an operating lever 22b, which is adapted to permit a change of the tool device 1.

10 The figure 16 and the figure 17 show a tool device 1 in different views. The figure 16 shows a plan view and the figure 17 shows a sectional view of the tool device 1. The shown attachment device 12 of the tool device 1 is shown in the figures 16 and 17 as a star-shaped polygon with rounded corners (connection regions 11). Here, the below discussed interrelationships can be applied least 15 mutatis mutandis to other forms of such an attachment device 12.

In the plan view, figure 16, the rounded corners (connection regions 11) of the polygon can be seen. A so-called arm of the polygon is formed by two the driving area regions 2 and by the connection region 11. The individual arms are offset by an equidistant angle k_{12} to each other. Preferably, the, preferably 20 equidistant, angle k_{12} results from the relationship: Full circle / (number of arms) = k_{12} ; for the present case 360 degrees / 12 = 30 degrees. Preferably, by the equidistant angle k_{12} , it is possible to accommodate the tool device 1 in different rotational positions in the machine tool. In present case, the tool device (not shown) can be offset in discrete steps of 30 degrees in regard to the machine tool.

25 The tool device 1 has in its cover area section 10 a, preferably circular, recess with a diameter k_{10} . Further preferably, for this recess, forms are also possible differing from the circular shape.

Preferably, this recess has a substantially circular shape and it may have additionally recesses, preferably polygonal recesses or preferably spline-like 30 recesses, which extend starting from the circular recess, preferably extending radially outward. Preferably, by these recesses, a star-like polygon is obtained having preferably circular sections. Particularly advantageously, such recesses may be used for tool devices, which are intended particularly for high loads, especially in diving saw blades or the like.

Further preferably, the diameter k_{10} corresponds to one of the diameters k_{d_1} or k_{d_2} for the tool devices of a series of at least two tools. This recess in the cover area section 10 is preferably adapted such that the tool devices 1 is held on the machine tool. Preferably, this recess should be understood as a through-
 5 recess / through-hole of a holding device (not shown), in particular of a screw device. The choice of the diameter k_{10} can depend on various parameters, preferably on the dimension of the holding device (not shown) of the machine tool. This holding device is particularly dimensioned in such a way that the tool device 1 is held securely on the machine tool.

10 The diameters k_2 and k_3 describe the outer diameters of the attachment device. In a preferred embodiment, the outer diameter of k_2 is preferably selected from a range between 30 mm and 36 mm, preferably from 32 mm to 34 mm, particularly preferred the outer diameter k_2 is substantially 33.35 mm (± 0.1 mm).

15 In a preferred embodiment, the outer diameter k_3 is preferably selected from a range between 22 mm and 27 mm, preferably from 24 mm to 26 mm, particularly preferred the outer diameter k_3 is substantially 25 mm (± 0.1 mm).

The distance k_1 defines the distance of the two driving area regions 2,
 20 which are in this view parallel to each other (in a spatial view, the driving area regions 2 are inclined to each other). Compared with a screw head (for example, a hexagon or square) the distance k_1 corresponds to a key width.

In a preferred embodiment, this key width k_1 is preferably selected from a range between 26 mm and 30 mm, preferably from a range between 27 mm and
 25 29 mm, more preferably, the key length is substantially 28.4 mm (± 0.1 mm).

The diameter 15 indicates a reference diameter for the attachment device 12 of the tool device 1. In a preferred embodiment, the reference diameter 15 is preferably selected from a range between 31 mm and 33 mm, preferably from a range between 31.5 mm and 32.5 mm, and particularly preferred the reference
 30 diameter 15 is substantially 32 mm (± 0.1 mm). Here, the reference diameter 15 is further preferably characterized in that the at least two different tool devices of a series of tools – seen in the direction of the tool axis of rotation 5 – are substantially at the same level (± 0.1 mm).

In the sectional view (figure 17), in particular the cross-sectional area of the attachment device 12 is particularly well recognizable. In a preferred embodiment, the tool device 1 has in the region of its attachment means 12 a, preferably substantially constant, wall thickness t_1 . More preferably, this wall thickness t_1 is selected from a range between 0.75 mm and 1.75 mm, preferably it is selected from a range of 1 mm to 1.5 mm, and more preferably the wall thickness t_1 corresponds to substantially 1.25 mm (+/- 0.1 mm).

It has been found that especially a long service life for the tool device 1 can be achieved if certain transitions are rounded at the attachment device 12 of the tool device 1 (preferably, the radii: k_6 , k_7 , k_8 , k_9).

In a preferred embodiment, at least one of the radii k_6 , k_7 , k_8 , and k_9 , preferably several of them, more preferably all of them are oriented on the wall thickness t_1 . Here, preferably from a larger wall thickness t_1 follows an enlargement of these radii, preferably at least of the radii k_7 and k_9 .

In a preferred embodiment (wall thickness $t_1 = 1.25$ mm), the radius k_6 is preferably selected from a range between 1 mm and 2.5 mm, preferably it is selected from a range between 1.5 mm and 2.1 mm, and particularly preferably the radius k_6 is substantially 1.8 mm (+/- 0.1 mm).

In a preferred embodiment ($t_1 = 1.25$ mm), the radius k_7 is selected from a range between 0.5 mm and 1.5 mm, preferably it is selected from a range between 0.8 mm and 1.2 mm, and particularly preferably the radius k_7 is substantially 1 mm (+/- 0.1).

In a preferred embodiment ($t_1 = 1.25$ mm), the radius k_8 is selected from a range between 0.2 mm and 0.6 mm, preferably it is selected from a range between 0.3 mm and 0.5 mm, and particularly preferably the radius k_8 is substantially 0.4 mm (+/- 0.05 mm).

In a preferred embodiment ($t_1 = 1.25$ mm), the radius k_9 is selected from a range between 2 mm and 3.5 mm, preferably it is selected from a range between 2.4 mm and 3 mm, and particularly preferably the radius k_9 is substantially 2.7 mm (+/- 0.1 mm).

The driving area regions 2 are inclined in the illustration of the figure 17 by the angle k_{13} in regard to an imaginary vertical line (parallel to the tool axis of rotation 5). In a preferred embodiment, this angle is selected from a range

between 10 degrees and 30 degrees, preferably it is selected from a range between 17.5 degrees and 22.5 degrees, and more preferably the angle k_{13} is substantially 20 degrees (± 0.5 degrees).

Further preferably, the other dimensions of the tool device depend on the wall thickness t_1 , more preferably at least the radii k_6 , k_7 , k_8 , and k_9 , wherein a larger wall thickness t_1 tends to lead to larger radii k_6 , k_7 , k_8 , and k_9 , preferably at least to larger radii k_9 and k_6 .

The diameter k_2 preferably indicates the region of the driving area regions 2, from which it extends in a straight line. After this rectilinear extension, the driving area regions extend, preferably into the radius k_9 , and then into the cover area section 10.

Preferably, the measure k_5 and the radius k_7 are interdependent. More preferably, the measure k_5 is selected from a range between 0.1 mm and 1 mm, preferably it is selected from a range between 0.3 mm and 0.7 mm, and particularly preferably the measure k_5 is substantially 0.5 mm (± 0.1 mm).

The radius k_6 is preferably facing the radius k_7 and it is larger than this. Also the radius k_9 and the radius k_8 are facing each other preferably, more preferably, the radius k_8 is smaller than the radius k_9 .

In a preferred embodiment, the driving area regions 2 extend at a level (the direction is parallel to the tool axis of rotation) at least for the measure k_{14} substantially in straight line. Here, a straight line according to the invention should be understood in that it has no significant curvature, preferably standing in the unloaded condition, more preferably in a loaded condition. Preferably, the measure k_{14} is selected from a range between 1 mm and 3.5 mm, preferably it is selected from a range between 1.5 mm and 2.5 mm, and particularly preferred the dimension k_{14} is substantially 2 mm (± 0.25 mm). Preferably, the measure k_{14} should be understood as the shortest linear course of the driving area regions 2.

The recess in the cover area section, which is preferably adapted to cooperate with the holding device (not shown) of the machine tool (not shown) has the diameter k_{10} . The recess with the diameter k_{10} is not necessarily a circular recess as shown in the figure 16 and the figure 17, but this recess may,

independently from the remaining appearance of the tool device 1, also have a different shape (polygon or the like).

In a preferred embodiment, the attachment region 12 has a depth k11, more preferably, the depth k11 is selected from a range between 3.5 mm and 6 mm, preferably it is selected from a range between 4.5 mm and 5 mm, and particularly preferably the depth k11 is substantially 4.7 mm (+ 0.15 mm).

In a preferred embodiment, the attachment region 12 has a height k15, further preferably the height k15 is selected from a range between 4.5 mm and 7.5 mm, preferably it is selected from a range between 5.5 mm and 6.5 mm, and more preferably the height k15 is substantially 6 mm (+/- 0.2 mm).

The figure 18 shows a tool device 1, which by means of a screw device (fixing screw 9d, washer 9e, nut member 9f) is attached to the output spindle 22a of the machine tool. The tool device 1 has an operating region 13 to act on a work piece or on a work piece arrangement. From the tool driving area region 2, the driving forces are transmitted to the operating region 13. In this case, the tool device 1 is held by means of the fastening screw 9d, which exerts its force action by the washer 9e to the tool device 1 on of the machine tool. The transmission of the driving forces from the machine tool to the tool device 1 is achieved substantially by the form fit engagement of the driving area region 2 in the counter surfaces in the output spindle 22a. The output spindle 22a is rotationally driven by the oscillating machine tool rotation axis 22c, and transmits this motion to the tool device 1, so that this moves oscillating rotationally around the tool axis of rotation 5. The tool device 1 is held on the machine tool in such a way that the tool axis of rotation 5 and the machine tool axis of rotation 22c are substantially coincident.

The figure 19 shows two versions of a tool device 1 having with stepped driving area region 2a. This drive surface portions 2a are arranged above the cover area section 10, and preferably they are non-rotatably connected with it, preferably by a form fit locking or a material fit locking, and more preferably welded, riveted, screwed or the like. Here, the figure 19 a) and b) each shows a sectional illustration. The figures 19 c) and d) each show a plan view from above of such a tool device 1. The illustration of the tool device 1 in the figure 19 is based substantially on the illustration of the figure 18, but it is not limited to it. Therefore, below are addressed primarily the differences between them.

In a tool device 1, as it is shown in the figures 19 a) and c), the angle α is substantially equal to 90 degrees. Thereby, it advantageously allows an easy manufacture of the tool device. In the tool device 1, as this is illustrated in the figures 19 b) and d), the angle α is substantially less than 90 degrees. Thereby, advantageously, a larger transmission area for the torque transmission can be achieved.

Next, the figure 19 shows how the tool device 1 is attached to the output spindle 22a of the machine tool, preferably by means of a screw device (fixing screw 9d, washer 9e, nut member 9f). The tool device 1 has an operating region 13 to act on a work piece or on a work piece arrangement. By means of the fastening device between the tool device 1 and the output spindle 22a, here preferably designed as a screw device (mounting screw 9d, washer 9e, female connection 9f), the tool device 1 is received on the machine tool and a force is exerted in the direction of the tool axis of rotation 5.

If the tool device is received as scheduled in the machine tool, a small distance δ is obtained between one of the output spindle 22a facing surface of the tool device 1 and a front surface 22d of the output spindle 22a. Preferably, the small distance δ should be understood as a small distance which is in a range, preferably it is smaller than 5 mm, preferably it is smaller than 2.5 mm, and more preferably it is smaller than 1, 5 mm, and most preferably it is smaller than 0.8 mm. Further preferably, this range is larger than 0.0 mm, preferably it is larger than 0.25 mm, and most preferably it is larger than 0.5 mm.

From the stepped driving area regions 2a, the driving forces are transmitted to the operating region 13. In this case, the tool device 1 is held on the machine tool by means of the washer 9e, which exerts a force action by means of the fastening screw 9d on the tool device 1. The transmission of the driving forces of the machine tool on the tool device 1 is achieved primarily by the form fit engagement (form fit connection) to the stepped driving area region 2a in the opposite surfaces in the output spindle 22a. The output spindle 22a is rotationally driven by the oscillating machine tool rotation axis 22c, and transmits this motion to the tool device 1, so that it moves rotationally oscillating around the tool axis of rotation 5. The tool device 1 is held on the machine tool in such a way that the tool axis of rotation 5 and the machine tool axis of rotation 22c are substantially coincident.

The figure 20 shows a further variant of a tool device 1 with the stepped driving area regions 2a. The stepped driving area regions 2a are preferably substantially above, preferably directly above the operating region 13 in the direction of the output spindle 22a, and respectively preferably they are arranged on a surface of the tool device 1. Further preferably, this surface of the tool device is adapted to lie opposite to the end face 22d of the output spindle 22a, when the tool device is received by the machine tool. The driving area regions 2a are preferably rotationally fixedly connected to the tool device 1, preferably by a form fit locking or a material fit locking, more preferably welded, riveted, screwed or the like, or particularly preferably configured integral. The figure 20 a) shows a sectional view, the figure 20 b) shows a plan view from above of such a tool device 1. It can be seen in the plan view (figure 20b) that the stepped driving area regions 2a are distributed in a star-shaped manner around the tool axis of rotation. The illustration of the tool device 1 in the figure 20 is based primarily on the illustration of the figure 18 and the figure 19, but it should be not limited to these. Therefore, below are addressed primarily the differences between them.

Next, the figure 20 shows how the tool device 1 is attached to the output spindle 22a of the machine tool, preferably by means of a screw device (fixing screw 9d, washer 9e, nut member 9f). The tool device 1 has an operating range 13 to act on a work piece or on a work piece arrangement. By means of the fastening device, here preferably configured as a screw device (fixing screw 9d, washer 9e, female connection 9f) between the tool device 1 and the output spindle 22a, the tool device 1 is received in the machine tool, and a force is exerted in the direction of the tool axis of rotation 5.

When the tool device is received as scheduled in the machine tool, a small distance δ is obtained between one of the output shaft 22a facing surface of the tool device 1 and the end face 22d of the output shaft 22a. Preferably, the small distance δ is in the range as it is proposed in the embodiment of the figure 19.

The holding of the the tool device as well as the transmission of the driving forces on the tool device is performed in the same manner as in the embodiment shown the figure 19.

In a further embodiment, at least one stepped driving area region 2a can be arranged below the top surface section (figure 19) and the above tool surface (figure 20), which faces the machine tool in the area of the output spindle 22c,

preferably it the stepped driving area region 2a is spaced both below from the cover area section and above from the aforementioned range of the tool surface. This embodiment can be visually perceived as an intermediate variant compared to the embodiments shown in the figure 19 and the figure 20. Further preferably, 5 the stepped driving area region 2a can be formed integrally with at least a portion of the tool device 1 or, preferably, as a separate component, as shown in the figure 19 and the figure 20, be connected to the tool device 1. The stepped driving area region and the tool device are preferably cohesively, non-positively or positively at such a connection, preferably welded, soldered, riveted, screwed or 10 glued.

The figure 21 shows an embodiment of a tool device 1 having raised driving area regions 2b. The figure 21 a) shows a sectional view of such a tool device, the figure 21 b) shows the corresponding top view of the tool device 1. These raised driving area regions 2b can preferably have cylindrical portions, as shown in the 15 figure 21. Further preferably, it can be carried out alternatively as truncated cones or else preferably as sections with a polygon-shaped cross-section. The shape of the raised driving area regions 2b is preferably independent of the rest of the design of the tool device.

This drive surface areas 2b are preferably arranged substantially above the 20 operating region 13 in the direction of the output spindle 22a, or on a surface of the tool device 1. Further preferably, this surface of the tool device is adapted to lie opposite to the end face 22d of the output spindle 22a, if the tool device 1 is received in the machine tool. The driving area regions 2b are preferably rotatably connected to the tool device 1, preferably form fit or material fit, especially 25 preferably welded, riveted, screwed or the like, or most preferably configured integral. In this case (figure 21b), it can be seen in plan view that the raised driving area regions 2b are distributed preferably rotationally symmetrical, more preferably at an equidistant distance or an integer multiple of an equidistant distance, around the tool axis of rotation. The illustration of the tool device 1 in 30 the figure 21 is based primarily on the illustration of the figure 18 to figure 20, but it should be not limited to this.

Next, the figure 21 shows how the tool device 1 is attached to the output spindle 22a of the machine tool, preferably by means of a screw device (fixing screw 9d, washer 9e, nut member 9f). The tool device 1 has an operating region

13 to act on a work piece or on a work piece arrangement. By means of the fastening device, here preferably as a screw device (fixing screw 9d, washer 9e, female connection 9f) configured between the tool device 1 and the output spindle 22a, the tool device 1 is received on the machine tool and a force is exerted in the
5 direction of the tool axis of rotation 5.

When the tool device is received as scheduled in the machine tool, a small clearance δ is obtained between the output spindle 22a facing surface of the tool device 1 and the end face 22d of the output spindle 22a. The distance δ is preferably in the range as it is proposed in the embodiment of the figure 19.

10 The holding of the tool device is performed in the same manner as in the embodiment shown in the figure 19. In the embodiment (figure 21) with raised driving surface regions 2b these engage in corresponding mating surfaces on the machine tool, and the transmission of the driving forces on the tool device is performed in a form fit manner.

15 The figure 22 shows a sectional view of a connection device 1a for the connecting of a third tool device 1b with an output spindle 22a of the machine tool. The connection device 1a is held to the output spindle 22a and thus to the machine tool by means of a first holding device 30. The holding device 30 preferably has a fastening screw 9d and a washer 9e, a nut member 9f is disposed
20 in the output spindle 22a. The connection device 1a is received at the output spindle 22a in such a way that a small distance θ is obtained between an end face 22d of the output spindle 22a and a surface of the connection device facing of the tool device, preferably the surface opposite to the end face 22d. By the short distance, it can be achieved a secure receiving of the connection device 1a at the
25 output spindle 22a. At the connection device 1a, a third tool device 1 b can be attached by means of a second holding device 31. The second holding device 31 comprises a second holding shaft 31a, the first holding device 30a has a first holding shaft 30a. The first holding shaft 30a substantially coincides with the connection axis of rotation. The first holding shaft 30a and the second holding
30 shaft 31a are arranged obliquely to each other. The third tool device 1b has a operating region 13, this operating region 13 is adapted to act on a work piece arrangement.

For a form fit torque transmission, the connection device 1a comprises an attachment device with driving area regions 2. The driving area regions 2 are

engaged with the output spindle 22a in counter surfaces. By this form fit engagement, the driving forces are safely transmitted from the output spindle 22a driven by the machine tool axis of rotation 22c in a rotating-oscillating manner to the connection device 1a, and thus to the second tool device.

- 5 The connecting device 1a is connected in a first connection region 32a with the machine tool, and a holding force acting on the connection device 1a is preferably applied in the direction of the first holding shaft 30a, or respectively a movement of the connection device 1a in the direction of the first holding shaft is, at least partially, prevented. Further, the third tool device 1b can be connected in
- 10 a second connection region 32b of the connection device 1a. In this case, this connection can be a form fit connection, preferably a material fit connection, or more preferably a force fit connection. Preferably, in the direction of the second holding shaft 31a, a holding force is exerted on the tool device 1b or on the connection device 1a, respectively. Preferably, the second holding device 31
- 15 comprises a screw device, more preferably for applying the holding force effect.

The figure 23 shows a sectional view of a connection device 1 a, which is similar to the connection device shown in the figure 22. Therefore, below are addressed primarily the differences between these two connection devices.

- The third tool device 1b is held on the connection device 1a by means of
- 20 the second holding device 31. The second holding device 31 exerts in the direction of the second holding shaft 31a a holding force effect of the third tool device 1b, and preferably also on the connection device 1a. The tool device 1 we connected via the second connection portion 32b to the connecting means 1 a. In this case, this connection can be preferably a form fit connection, preferably a material fit
- 25 connection, or more preferably a force fit connection. The second support shaft 31 a is oriented substantially parallel to the first support shaft 30a, more preferably, the first and second supporting shaft spaced from each other.

- The figure 24 shows a sectional view of a connecting device, which essentially corresponds to that of Figure 22 and also of the connecting device
- 30 shown in Figure 23. The following will therefore focus on the differences between these embodiments.

The third tool device 1b is held by means of the first holding device 30 and the second connection region 32b of the connection device 1a. The first holding

device 30 exerts in the direction of the first holding shaft 30a of a holding force on the third tool device 1b, and preferably also on the connection device 1a. This connection may be preferably a form fit connection, preferably a material fit connection, or more preferably a force fit connection. Further preferably, said
 5 third tool device and said connecting device comprise raised recesses sections, preferably, these raised sections are in connection with these recesses for a form fit torque transmission from the connecting device 1a to the third tool device 1b.

The figure 25a shows a sectional view of a connection device with form fit torque transmission from the connection device on the tool device. The connecting
 10 device is at least partially formed as a hollow body, and thereby it has, in particular a low moment of inertia. Both the embodiments illustrated in the figure 25a and in the figure 25b are similar to the previously described embodiments of the connection device. Therefore, below are addressed primarily the differences between these two connection devices.

15 The tool device 1 is held on the output shaft 22a of the machine tool by means of a first holding device 30, in particular a fastening screw 9d, a washer 9e and nut member 9f. The torque transmission from the connection device on the tool device 1 is at least partly achieved by means of the form fitting elements 33rd. The form fitting elements 33 may preferably be integrally formed with the
 20 connection device, or preferably as own components inserted into these, or fixed to these.

The connection device is received in the axial direction, i.e. in the direction of the machine tool axis of rotation 22c in such a manner that a small distance ϑ is obtained. Thereby, it can be achieved that the connection device can be held on
 25 the machine tool, as far as the tool device is severely stressed, in particular by bending momentums perpendicular to the tool axis of rotation. In particular, by this holding, a tilting of the tool device can be counteracted, and the connection device and with it the tool device can be particularly securely received on the machine tool.

30 The connection device may preferably be composed of several parts, particularly preferably the base body is composed of the two parts 34 and 35. Thereby, it can be achieved that the connection device has on the one hand a low weight (hollow body), and that on the other hand it consist of parts which are relatively simple to produce.

Further preferably, these several parts can be connected to one another at one or several connection points 36 in a material fit manner. By such a configuration of the connection device, a particularly easy connection device can be achieved, which in particular due to low forces of inertia only a low stress
5 induce.

Next, the tool device 1 is accommodated on the output spindle 22a by means of the connection device in such a way that the tool axis of rotation 5 and the machine tool axis of rotation 22c are substantially coincident. The connecting device is connected in a first connecting portion 32a with the output spindle 22a
10 of the machine tool. Furthermore, the tool device 1 is connected in a second connection region 32b to the connection device. In this case, the drive torque is transmitted to the connection device (first connection portion 32a) from the machine tool by means of the driving area region 2 in form fit matter.

The form fitting elements 33 (figure 25a / b) are preferably spaced apart to
15 the tool axis of rotation 5. Furthermore, these are offset around the tool axis of rotation preferably by an equidistant angle or, preferably, by an integer multiple of such an angle. Further preferably, the form fitting elements 33 or a plurality of groups of the form fitting elements are arranged with rotational symmetry around the tool axis of rotation.

20 The tool device 1 has an operating region 13, which is adapted to act on a work piece or on a work piece arrangement (not shown).

The figure 25b shows a sectional view of a connection device with form fit torque transmission from the connection device on the tool device 1 (second connection portion 32b). Here, the connection device is, unlike for the
25 embodiment shown in the figure 25a, formed essentially as a solid body and it has, in particular a high form stability, and it is particularly easy to manufacture. The embodiment illustrated in the figure 25b corresponds essentially to the embodiment shown in the figure 25a. Therefore, below are addressed primarily the differences between these embodiments.

30 The tool device 1 is held on the output spindle 22a of the machine tool by means of a first holding device 30, which has in particular a fastening screw 9d, a washer 9e, and a nut member 9f. The torque transmission from the connection

device to the tool device 1 is at least partly achieved by means of the form fitting elements 33.

The connection device is received in the axial direction, i.e. in the direction of the machine tool axis of rotation 22c in such a way that a small distance δ is
5 obtained, whereby a particularly secure receiving of the tool device on the machine tool can be achieved.

The connection device, in particular its base body, may preferably be formed integral, preferably at least the base body of the connection device is produced by a primary shaping manufacturing method or by a reshaping
10 manufacturing method such as these have already been described also for the manufacturing of the tool device, preferably a forging, a sintering, generative manufacturing processes and the like.

By means of the connection device, the tool device 1 so received on the output spindle 22a, that the tool axis of rotation and the machine tool axis of
15 rotation substantially coincide. The connecting device is connected in a first connecting portion 32a with the output shaft 22a. Further, the tool device 1 is connected in a second connection region 32b to the connection device. In this case, also the driving torque is transmitted from the machine tool to the connection device by the driving area regions 2 in a form fit manner.

20 The tool device 1 has an operating region 13, which is adapted to act on a work piece or on work piece arrangement (not shown).

List of reference signs

- 1 tool device
- 1a connection device
- 1b second tool device
- 5 2 driving area region / tool driving area region
- 2a stepped driving area region
- 2b raised driving area region
- 3 surface point
- 4 tangent plane
- 10 5 tool axis of rotation
- 6 radial plane
- 7 axial plane
- 8 boundary plane
- 8a upper boundary plane
- 15 8b lower boundary plane
- 9 plane of symmetry
- 9d fastening screw
- 9e washer
- 9f nut member
- 20 9g tie bar device
- 10 cover surface section
- 10a lower section of the cover surface section
- 11 connection region
- 12 attachment device
- 25 13 operating region
- 14 reference plane
- 15 reference diameter
- 16 encoding device
- 16a raised encoding device
- 30 16b encoding device having a recess
- 17 transition region
- 22 machine tool
- 22a output spindle
- 22b operating lever
- 35 22c machine tool axis of rotation

- 22d end face of the output spindle
- 30 first holding device
- 30a first holding shaft
- 31 second holding device
- 5 31a second holding shaft
- 32a first connection region
- 32b second connection region
- 33 form fit element
- 34 first subcomponent of the connection device
- 10 35 second subcomponent of the connection device
- 36 connecting region between 34 and 35
- α first inclination angle
- β second inclination angle
- t thickness of the side wall
- 15 T extension of a driving area region
- R_I first radius of curvature of a driving area region
- R_{Ia} variable radius of curvature of a driving area region
- R_{II} second radius of curvature of a driving area region
- a straight extending grid line of a driving area region
- 20 b_I first curved grid line of a driving area region
- b_{II} second curved grid line of a driving area region
- b_I a third grid line with variable curvature of a driving area region
- Δ distance to 14
- δ distance from tool device to output spindle in the direction of 5
- 25 k_1 key width, spacing of parallel driving surface areas
- k_2 first outside diameter of the attachment device
- K_3 second outer diameter of the attachment device
- k_4 reference diameter
- K_5 rounding region
- 30 k_6 first radius of curvature
- K_7 second rounding radius
- K_8 third radius of curvature
- k_9 fourth radius of curvature
- k_{10} diameter of the recess
- 35 k_{11} deep attachment device

k12 polygon angle
k13 inclination angle

Patentkrav

- 1.** Værktøjsindretning (1, 1b) der er egnet til anvendelse med et maskinværktøj (22), og især egnet til anvendelse med et manuelt betjent maskinværktøj, der har en drivindretning der bevæger sig rundt om en drivakse, og især oscillerende
- 5 rundt om drivaksen,
- og som har en fastgørelsesindretning (12) ved hjælp af ved hjælp af hvilken den kan fastgøres til et maskinværktøj (22) på en sådan måde at drivakselen og en værktøjsdrejelse (5) er i det væsentlige sammenfaldende,
- 10 hvor, til at modtage en drivkraft, fastgørelsesindretningen (12) omfatter mindst to drivområdereioner (2, 2a, 2b) hver med en flerhed af overfladepunkter (3) og hver adskilt fra denne værktøjsdrejelse (5),
- kendetegnet ved at** tangentialplaner (4) ved disse overfladepunkter (3) hælder i forhold til aksialplan (7), der omfatter værktøjsdrejelsen (5),
- 15 hvor tangentialplanet (4) skråner i forhold til radialplanet (6), der strækker sig vinkelret til værktøjsdrejelsen (5),
- hvor fastgørelsesindretningen (12) omfatter en sidevæg,
- hvor sidevæggen strækker sig adskilt fra værktøjsdrejelsen (5),
- hvor sidevæggen strækker sig mellem en første, øvre begrænsningsplan
- 20 (8a) og et andet, nedre begrænsningsplan (8b), og
- hvor sidevæggen omfatter drivområdereionerne (2, 2a, 2b),
- hvor en i det væsentlige hul konisk sektion er dannet i regionen af fastgørelsesindretningen ved hjælp af sidevæggen, hvilken sektion har et tværsnit med en variabel afstand til sidevæggen til værktøjsdrejelsen i et
- 25 plan ortogonalt med værktøjsdrejelsen.

2. Værktøjsindretningen ifølge krav 1, **kendetegnet ved at** mindst en af de, fortrinsvis en flerhed af dem, og især fortrinsvis alle drivområderegionerne (2, 2a, 2b) er, mindst i sektioner, i det væsentlige plane, mindst i sektioner, buede.

5 **3.** Værktøjsindretningen ifølge et hvilket som helst af de foregående krav, **kendetegnet ved**

at disse **begrænsningsplaner** (8, 8a, 8b) er anbragt i det væsentlige vinkelret til værktøjsdrejeaksen (5),

10 **at** disse begrænsningsplaner (8, 8a, 8b) er adskilt med afstand fra hinanden;

at hver af disse drivområderegioner (2, 2a, 2b) er anbragt mellem et af de første, øvre begrænsningsplaner (8a) og et af de andet, nedre begrænsningsplaner (8b),

15 **at** fortrinsvis en flerhed af dem, fortrinsvis alle af drivområderegionerne strækker sig mellem et enkelt af første øvre begrænsningsplan (8a) og enkelt andet nedre begrænsningsplan (8b).

4. Værktøjsindretningen ifølge et hvilket som helst af de foregående krav, **kendetegnet ved**

20 **at** denne værktøjsindretning (1, 1b), især i regionen af fastgørelsesindretningen (12), i det væsentlige har en vægtykkelse t ,

at mindst et første begrænsningsplan (8a) og et andet begrænsningsplan (8b) er adskilt med en afstand T fra hinanden; og

25 **at** denne afstand T fortrinsvis er større end 1 gange t , fortrinsvis at den er større end 2 gange t , og især fortrinsvis at den er større end eller lig med 3 gange t , og yderligere fortrinsvis at den er mindre end 20 gange t , fortrinsvis at den er mindre end 10 gange t , og især fortrinsvis at den er mindre end eller lig med 5 gange t , og mere fortrinsvis at T i det væsentlige svarer til 3,5 gange t +/- 0,75 gange t .

5. Værktøjsindretningen ifølge et hvilket som helst af de foregående krav,
kendetegnet ved

at den har en flerhed af drivområdere regioner (2, 2a, 2b), der fortrinsvis er
5 indrettet drejeligt symmetrisk rundt om værktøjsdrejeaksen (5).

6. Værktøjsindretningen ifølge et hvilket som helst af de foregående krav,
kendetegnet ved

at mindst to af de, fortrinsvis adskillige af disse drivområdere regioner (2, 2a,
10 2b) er indrettet symmetrisk i forhold til et symmetriplan (9),

at værktøjsdrejeaksen (5) er anbragt i dette symmetriplan (9); og mere
fortrinsvis, at disse drivområdere regioner (2, 2a, 2b) er indrettet i det
væsentlige sammenhængende.

15 **7.** Værktøjsindretningen ifølge et hvilket som helst af de foregående krav,
kendetegnet ved at denne sidevæg i det væsentlige har en
gennemsnitstværgs tykkelse (t_1), der fortrinsvis er større end eller lig med 0,2 mm,
fortrinsvis større end 0,5 mm, og især fortrinsvis større end 0,8 mm, og
yderligere fortrinsvis at den er mindre end eller lig med 4 mm, fortrinsvis mindre
20 end 2 mm og især fortrinsvis mindre end 1,5 mm, yderligere særlig fortrinsvis er
den i det væsentlige 1 mm eller 1,5 mm, eller fortrinsvis mellem 1 mm og 1,5
mm; og/eller at sidevæggen strækker sig radialt lukket rundt om
værktøjsdrejeaksen (5).

25 **8.** Værktøjsindretningen ifølge et hvilket som helst af de foregående krav,
kendetegnet ved

at fastgørelsesindretning (12) omfatter et dækfladeafsnit (10, 10a),

at dækoverfladearealsektion er direkte eller indirekte forbundet til mindst
en af disse drivområdere regioner (2, 2a, 2b),

30 **at** dets omfang har mindst en komponent vinkelret på værktøjsdrejeaksen
(5), og

at dækfladeafsnittene (10, 10a) er deponeret i det væsentlige i regionen af et af disse første, øvre begrænsningsplaner (8a)

og fortrinsvis at dækfladeafsnittene (10, 10a) strækker sig radialt mod værktøjsdrejeaksen (5); og

5 **at** dækfladeafsnittene (10, 10a) har mindst en udsparring,

hvor denne udsparring eller flere af disse udsparringer fortrinsvis er indrettet i det væsentlige i regionen af værktøjsdrejeaksen (5),

hvor yderligere fortrinsvis en af disse eller flere af disse udsparringer er indrettet drejeligt symmetrisk i forhold til værktøjsdrejeaksen (5).

10

9. Værktøjsindretningen ifølge et hvilket som helst af de foregående krav, **kendetegnet ved at** en normalvektor af en af disse tangentialplaner (4) er orienteret væk fra værktøjsdrejeaksen (5) i radial retning, og især at normalvektorerne af disse tangentialplaner (4) er orienteret væk fra

15 værktøjsdrejeaksen (5) i radial retning; eller

at en normalvektor af en af disse tangentialplaner (4) er orienteret i radial retning mod værktøjsdrejeaksen (5), og især at normalvektorerne af disse tangentialplaner (4) er orienteret i radial retning mod værktøjsdrejeaksen (5).

20 **10.** Værktøjsindretningen ifølge et hvilket som helst af de foregående krav, **kendetegnet ved**

at denne værktøjsindretning (1, 1b) omfatter mindst en driftsregion (13), mindst en fastgørelsesindretning (12) og mindst en tilslutningsregion (11, 32a, 32b);

25 **at** denne driftsregion (13) er indrettet til at virke på et arbejdsstykkeanordning eller på et arbejdsstykke; og

at en forbindelsesregion (11, 32a, 32b) er anbragt mellem denne fastgørelsesindretning (12) og hver af disse driftsregioner (13); og

især **kendetegnet ved at** den mindst ene af tilslutningsregionerne (11, 32a, 32b), og fortrinsvis alle tilslutningsregionerne (11, 32a, 32b) er indrettet i det væsentlige i regionen af et af disse anden, nedre begrænsningsplaner (8b), og fortrinsvis at de i det væsentlige falder sammen.

11. Værktøjsindretningen ifølge et hvilket som helst af de foregående krav, **kendetegnet ved**

at vinklen α er lukket mellem en af disse tangentialplaner (4) og radialbanen (6), hvor radialbanen (6) er indrettet vinkelret til værktøjsdrejeaksen (5),

at vinklen α er mindre end 90 grader, fortrinsvis at den er mindre end 80 grader, og især fortrinsvis at den er mindre end 75 grader, og

yderligere fortrinsvis at vinklen α er større end 0 grader, fortrinsvis at den er større end 45 grader, og især fortrinsvis at den er større end 60 grader, og

yderligere fortrinsvis at vinklen α ligger i et område fra 62,5 grader til 72,5 grader.

12. Værktøjsindretningen ifølge et hvilket som helst af de foregående krav, **kendetegnet ved**

at vinklen β er lukket mellem en af disse tangentialplaner (4) og denne aksialbane (7), hvor værktøjsdrejeaksen (5) er indrettet i denne aksialbane (7), at vinklen β er mindre end 90 grader, fortrinsvis at den er mindre end 70 grader, og især fortrinsvis at den er mindre end 65 grader, og

yderligere fortrinsvis at vinklen β er større end 0 grader, fortrinsvis at den er større end 15 grader, og især fortrinsvis at den er større end 30 grader, og

yderligere fortrinsvis at vinklen β er i det væsentlige 30 grader, 45 grader eller 60 grader.

13. Værktøjsindretningen ifølge et hvilket som helst af de foregående krav,

5 kendetegnet ved

at fastgørelsesindretning (12) omfatter et lige antal drivområdere regioner (2, 2a, 2b), fortrinsvis 4 eller derover, fortrinsvis 8 eller derover, og især fortrinsvis 16 eller derover, og yderligere fortrinsvis 64 eller derunder, fortrinsvis 48 eller derunder, og især fortrinsvis 32 eller derunder, mest fortrinsvis 24,

hvor disse drivområdere regioner (2, 2a, 2b) er indrettet i det væsentlige stjerne-agtig, fortrinsvis indrettet i det væsentlige i form af en stjerne-formet polygon, fortrinsvis rundet ved overgangsregionerne mellem de individuelle drivområdere regioner.

15

14. Værktøjsindretningen ifølge et hvilket som helst af de foregående krav,

kendetegnet ved at tangentialplanet (4) skråner i forhold til en lige linje der strækker sig parallelt med værktøjsdrejeaksen (5).

20 15. Forbindelsesindretning (1a) der er egnet til at forbinde en værktøjsindretning (1, 1b) med et maskinværktøj (22), især med et manuelt betjent maskinværktøj (22), der har en drivindretning der bevæger sig rundt om en drivakse, og især oscillerende rundt om drivaksen,

hvor forbindelsesindretningen (1a) omfatter en første forbindelsesregion (32a) og en anden forbindelsesregion (32b),

hvor den første forbindelsesregion (32a) er indrettet til at forbinde forbindelsesindretningen (1a) med maskinværktøjet (22), hvor forbindelsesindretningen (1a) kan forbindes til maskinværktøjet (22) på en sådan måde at drivakselen og en forbindelsesdrejelse i det væsentlige falder sammen,

30

hvor den anden forbindelsesregion (32b) er indrettet til at forbinde forbindelsesindretningen (1a) med værktøjsindretningen (1, 1b),

kendetegnet ved that

- 5 at mindst en af forbindelsesregionerne (32a, 32b) omfatter en fastgørelsesindretning (12), hvor, til at modtage en drivkraft, fastgørelsesindretning (12) omfatter mindst til drivområdereioner (2, 2a, 2b) hver med en flerhed af overfladepunkter (3) og er adskilt fra forbindelsesdrejeaksen, hvor tangentialplaner (4) ved disse overfladepunkter (3) hælder i forhold til aksialplan (7), der omfatter
- 10 forbindelsesdrejeaksen,
- hvor tangentialplanet (4) skråner i forhold til radialplanet (6), der strækker sig vinkelret til forbindelsesdrejeaksen,
- hvor fastgørelsesindretning (12) omfatter en sidevæg,
- hvor sidevæggen strækker sig adskilt radialt fra forbindelsesdrejeaksen,
- 15 hvor sidevæggen strækker sig mellem en første, øvre begrænsningsplan (8a) og et andet, nedre begrænsningsplan (8b), og
- hvor sidevæggen omfatter drivområdereionerne (2, 2a, 2b),
- hvor en i det væsentlige hul konisk sektion er dannet i regionen af fastgørelsesindretning ved hjælp af sidevæggen, hvilken sektion har et
- 20 tværsnit med en variabel afstand til sidevæggen til forbindelsesdrejeaksen i et plan ortogonalt med forbindelsesdrejeaksen.

- 16.** Forbindelsesindretningen ifølge krav 15, **kendetegnet ved at** den første forbindelsesregion (32a) er indrettet drejeligt symmetrisk til
- 25 forbindelsesdrejeaksen og/eller at det andet forbindelsesregion (32b) er indrettet drejeligt symmetrisk eller asymmetrisk til forbindelsesdrejeaksen.

17. Forbindelsesindretningen ifølge et hvilket som helst af kravene 15 til 16,
kendetegnet ved

at forbindelsesindretningen (1a) omfatter en første holdeindretning (30);
og

5 **at** den første holdeindretning (30) er tilpasset til at samarbejde med
mindst første forbindelsesregion (32a) og maskinværktøjet (22); og/eller

kendetegnet ved at forbindelsesindretningen (1a) omfatter mindst en
anden holdeindretning (31); og

10 **at** den anden holdeindretning (31) er indrettet til at samarbejde med den
anden forbindelsesregion (32b) og en værktøjsindretning (1, 1b).

18. Forbindelsesindretningen ifølge et hvilket som helst af kravene 15 til 17,
kendetegnet ved

at den første holdeindretning (30) har en første holdeakse (30a),

15 **at** den anden holdeindretning (31) har en anden holdeakse (31a); og

at den første holdeakse og den anden holdeakse (30a, 31a) er indrettet i
det væsentlige parallel, især kongruent, eller skævt, især vind-skævt, i
forhold til hinanden.

20 **19.** Serier af mindst to værktøjsindretninger (1, 1b) ifølge et hvilket som helst af
kravene 1 til 14, **kendetegnet ved**

at hver værktøjsindretning (1, 1b) af serierne har et referenceplan (14),

at referenceplanet (14) er indrettet vinkelret på værktøjsdrejeaksen (5),

25 **at** dette referenceplan (14) har en referencediameter (15, k4) for
drivområdere regionerne (2, 2a, 2b); og

at, for forskellige typer af værktøjsindretninger (1, 1b) af en serie, en afstand Δ af en første flade af dækfladeafsnittene (10, 10a) til dette referenceplan (14) er mellem en første, nedre grænse og en anden, øvre grænse, hvor den første, nedre grænse er større end 0,01 mm, fortrinsvis større end 0,05 mm, og den anden, øvre grænse er mindre end 0,5 mm, fortrinsvis mindre end 0,1 mm,

hvor fortrinsvis afstanden Δ er i det væsentlige konstant for forskellige værktøjsindretninger (1, 1b) af serierne.

10 **20.** Serierne ifølge krav 19, **kendetegnet ved at** forskellige typer af værktøjsindretninger af serierne med forskellige vægtykkelser t.

21. Serier ifølge et hvilket som helst af kravene 19 eller 20, **kendetegnet ved**

15 **at** hver værktøjsindretning (1, 1b) har en koderegion der er indrettet på i det væsentlige den samme måde som vedrører dets position i forhold til værktøjsdrejeaksen (5) og til drivområderegionerne (2, 2a, 2b),

at hver værktøjsindretning (1, 1b) er kendetegnet ved mindst en anvendelsesparameter, såsom især en foretrukket drivenergi; og

20 at denne koderegion omfatter mindst en kodeindretning (16, 16a, 16b) der er karakteristisk for den mindst ene anvendelsesparameter, hvor serierne af mindst to værktøjsindretninger (1, 1b) er fortrinsvis **kendetegnet ved**

at mindst et første værktøjsindretning (1) har en første kodeindretning (16, 16a, 16b) der er tilvejebragt til at samarbejde med et første kodeelement, der fortrinsvis er indrettet på et maskinværktøj (22),

25 **at** mindst en anden værktøjsindretning (1b) har en anden kodende kodeindretning der er tilvejebragt til at samarbejde med et andet kodende element, der fortrinsvis er indrettet på et maskinværktøj (22),

at disse kodende indretninger (16, 16a, 16b) og disse kodende elementer er udformet på en sådan måde at det første kodende element kan

samarbejde med den første kodeindretning og den anden kodeindretning (16, 16a, 16b); og

- at** det andet kodende element kan samarbejde kun med den anden kodeindretning (16, 16a, 16b) men at den ikke kan samarbejde med den første kodeindretning (16, 16a, 16b).

22. Serierne ifølge krav 21, **kendetegnet ved at** formen af et basisområde af mindst en, fortrinsvis alle kodende indretninger (16, 16a, 16b) er valgt fra en gruppe af former omfattende mindst én eller flere af følgende former:

- 10 - en polygon med en flerhed af hjørner, fortrinsvis 3, 4, 5, 6, 7, 8 eller flere hjørner, der fortrinsvis er rundede,
- en cirkel,
- en ellipse,
- en bue med variabel radius eller en konstant radius eller
- 15 - en kombination af flere af de nævnte former.

23. Serier ifølge et hvilket som helst af kravene 21 eller 22, **kendetegnet ved at** mindst to af disse kodende indretninger (16, 16a, 16b) har den samme geometriske form, men en forskellig størrelse.

20

- 24.** Serier ifølge et hvilket som helst af kravene 21 til 23, **kendetegnet ved at** mindst en af, og fortrinsvis alle af de kodende indretninger (16, 16a, 16b) er dannet som hævede regioner i forhold til et kodende referenceplan; og mindst et omfang af den ene kodeindretning (16, 16a, 16b) er større end det
- 25 respektive omfang af den anden kodeindretning (16, 16a, 16b) eller **at** mindst en af de, fortrinsvis alle af de kodende indretninger (16, 16a, 16b) er dannet som udsparinger (16b); og mindst et omfang af den ene kodeindretning (16b) er større end den respektive

forlængelse af den anden kodeindretning (16, 16a, 16b).

25. Serier ifølge et hvilket som helst af kravene 21 til 24, **kendetegnet ved at** de kodende regioner (16, 16a, 16b) er indrettet i regionen af disse dækfladeafsnit 5 (10, 10a).

26. Fremgangsmåde til fremstilling af en værktøjsindretning ifølge et hvilket som helst af kravene 1 til 14, **kendetegnet ved**

10 **at** denne fremgangsmåde, med henblik på fremstilling af en drivområderegion (2, 2a, 2b) omfatter et primær formningsfremgangsmåde step, eller et opretningsfremgangsmådetrin, eller et generativfremgangsmådetrin eller en kombination af flere af disse fremgangsmådetrin, der er valgt fra en gruppe omfattende især et
15 smednings-, presnings-, valsnings-, ekstruderings-, foldnings-, dybtræknings-, valesikrings-, sænkebertlings-, retnings-, bøjnings-, stræknings-, komprimerings-, sintrings-, støbnings-, og et lag-på-lag-coatningstrin; og

20 **at** denne fremgangsmåde, med henblik på fremstilling af en værktøjskontur, omfatter et separeringsfremgangsmådetrin, fortrinsvis et termisk separeringsfremgangsmådetrin og/eller et mekanisk separeringsfremgangsmådetrin eller en kombination af flere af sådanne fremgangsmådetrin, der er valgt fra en gruppe omfattende især afklipnings-, formalings-, rivnings-, udstansnings-, opskærings-, partikelstråleskærings-, elektronstråleskærings-, laserskærings-,
25 plasmaskærings-, flammeskærings-, og gnisterosionsskæringstrin.

1/20

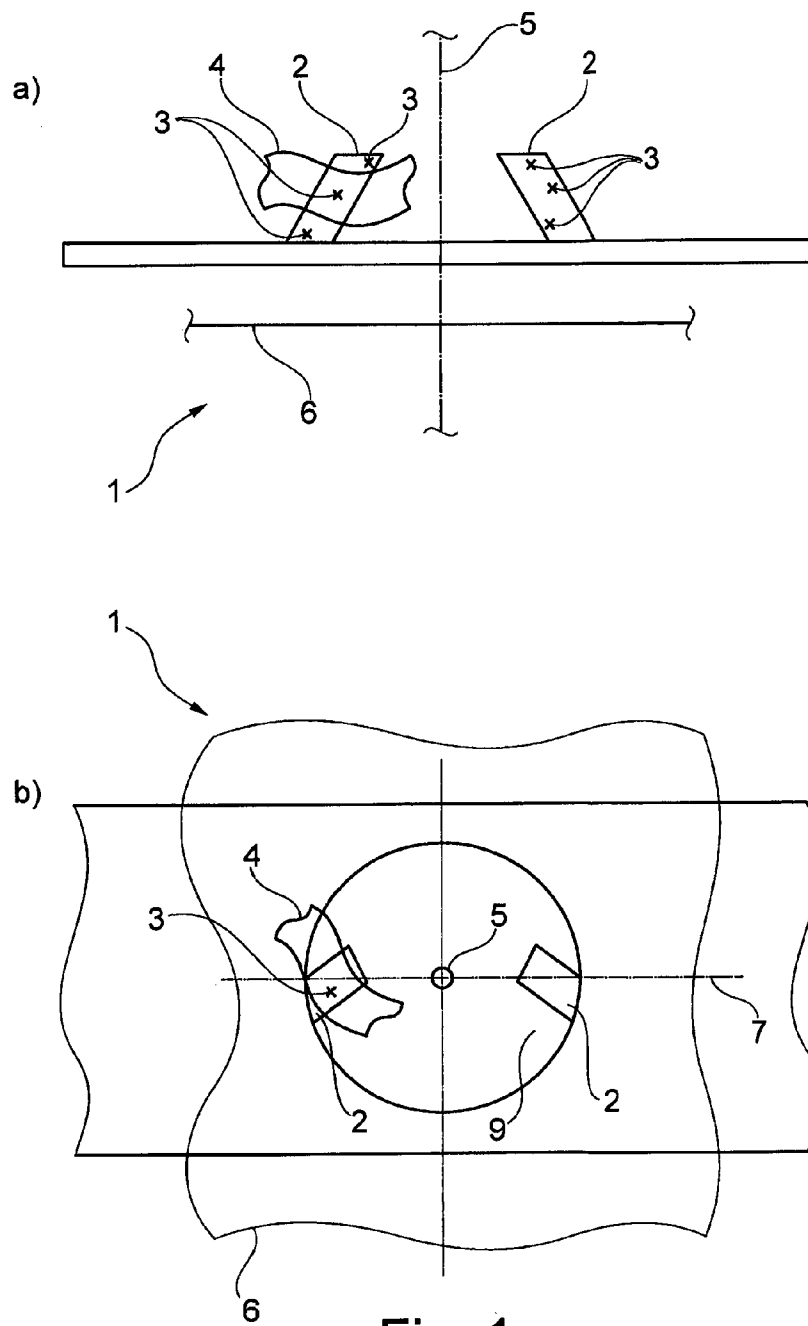


Fig. 1

2/20

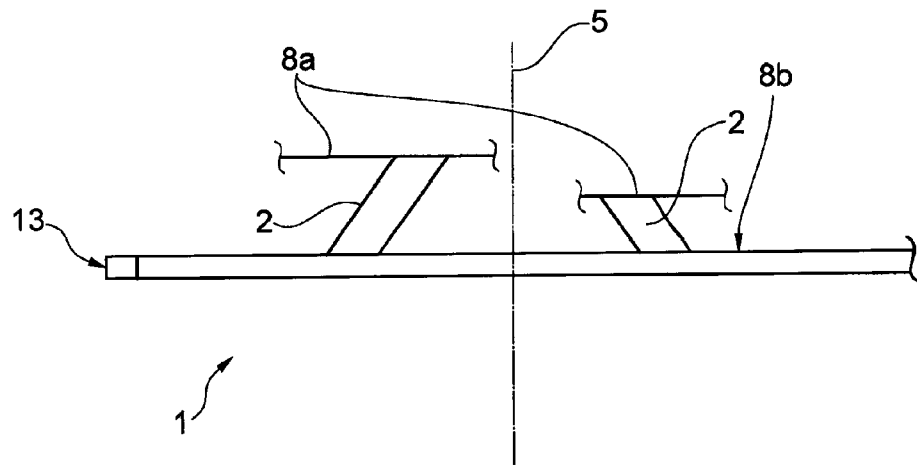


Fig. 2

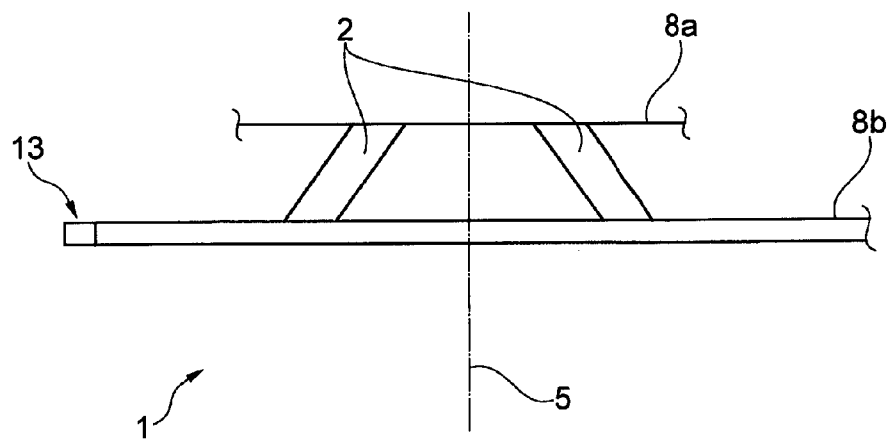


Fig. 3

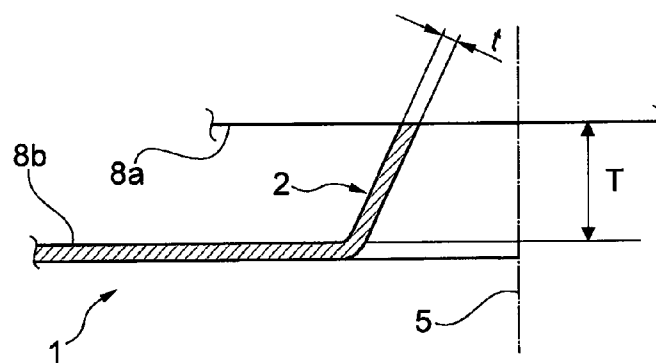


Fig. 4

3/20


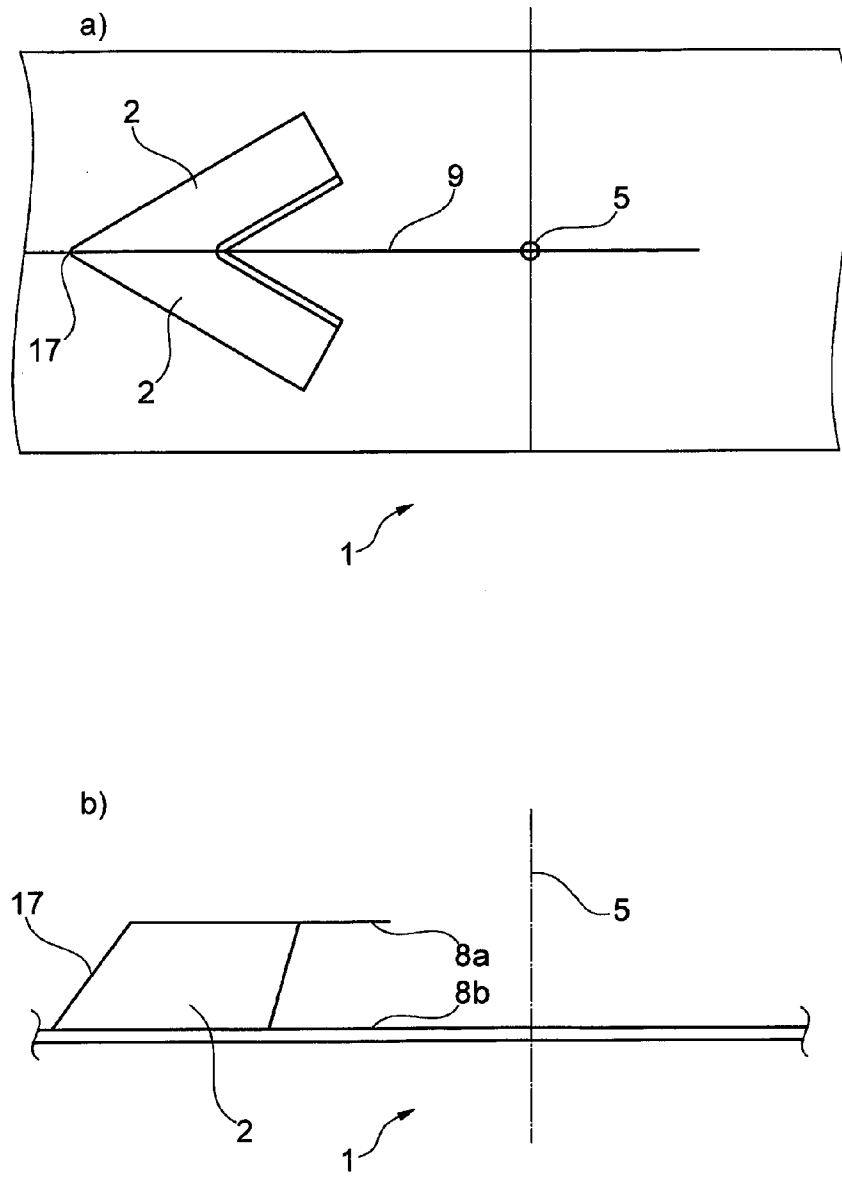


Fig. 5

4/20

a)

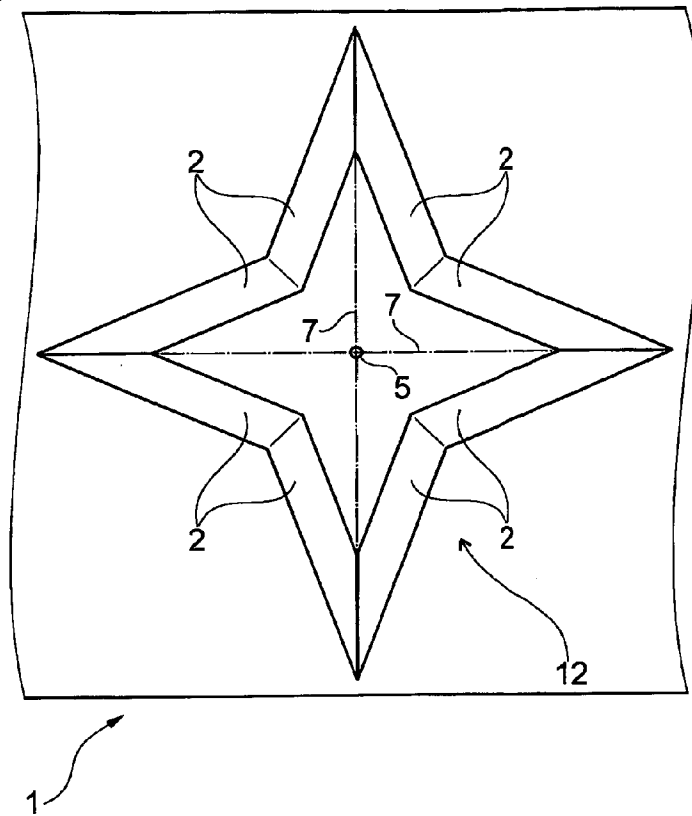

b)

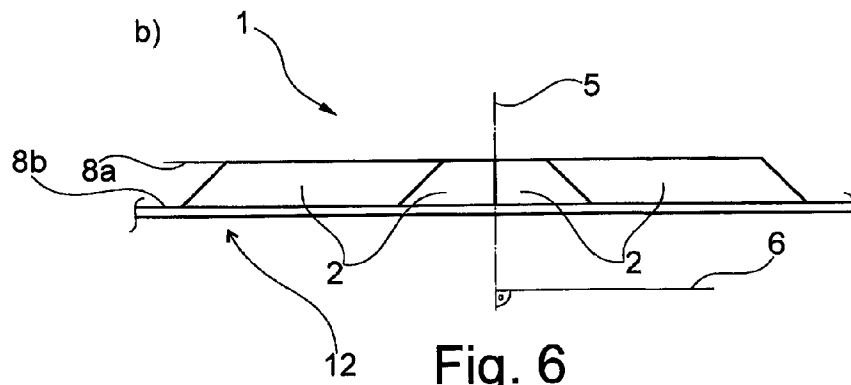


Fig. 6

5/20

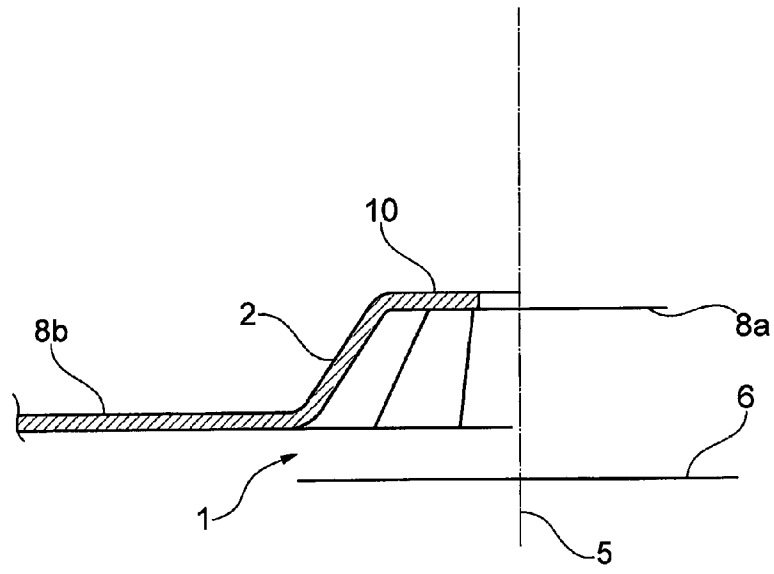


Fig. 7

6/20

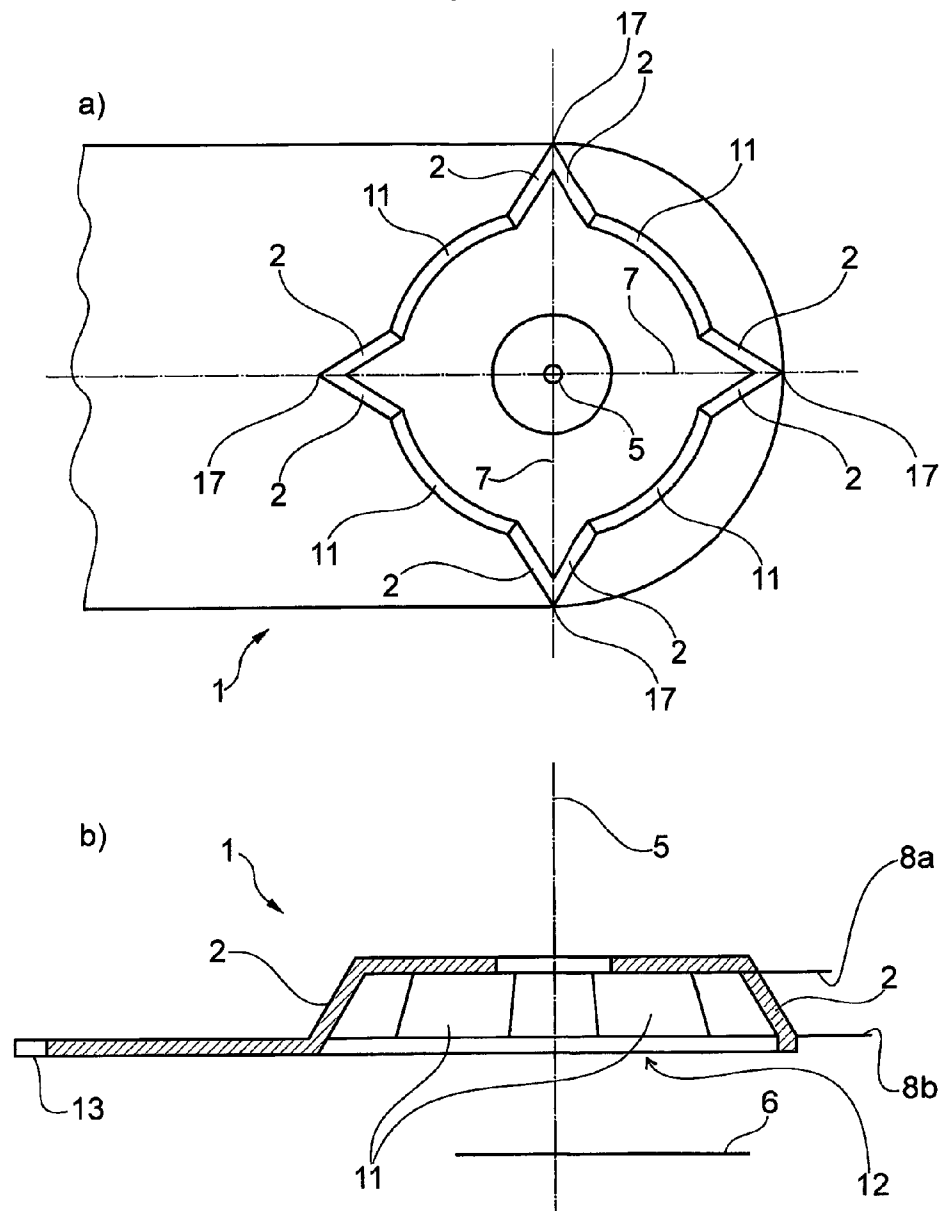


Fig. 8

7/20

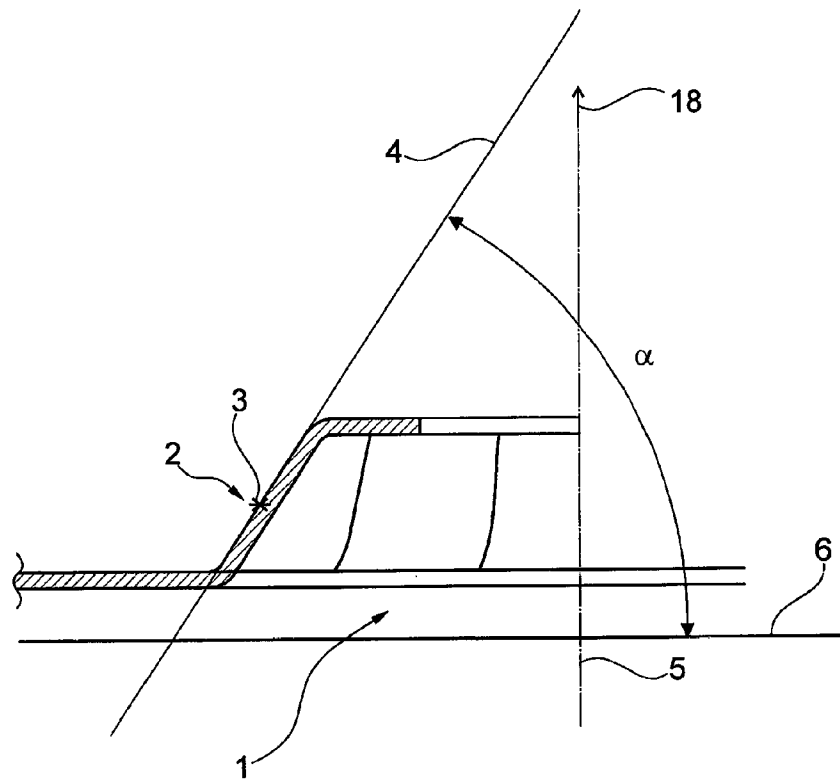


Fig. 9

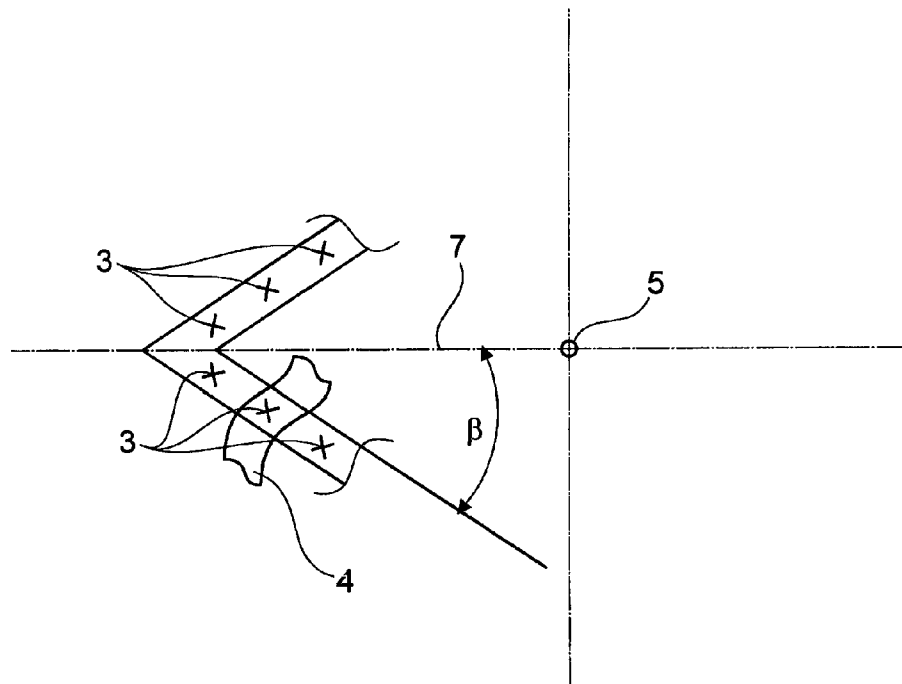


Fig. 10

8/20

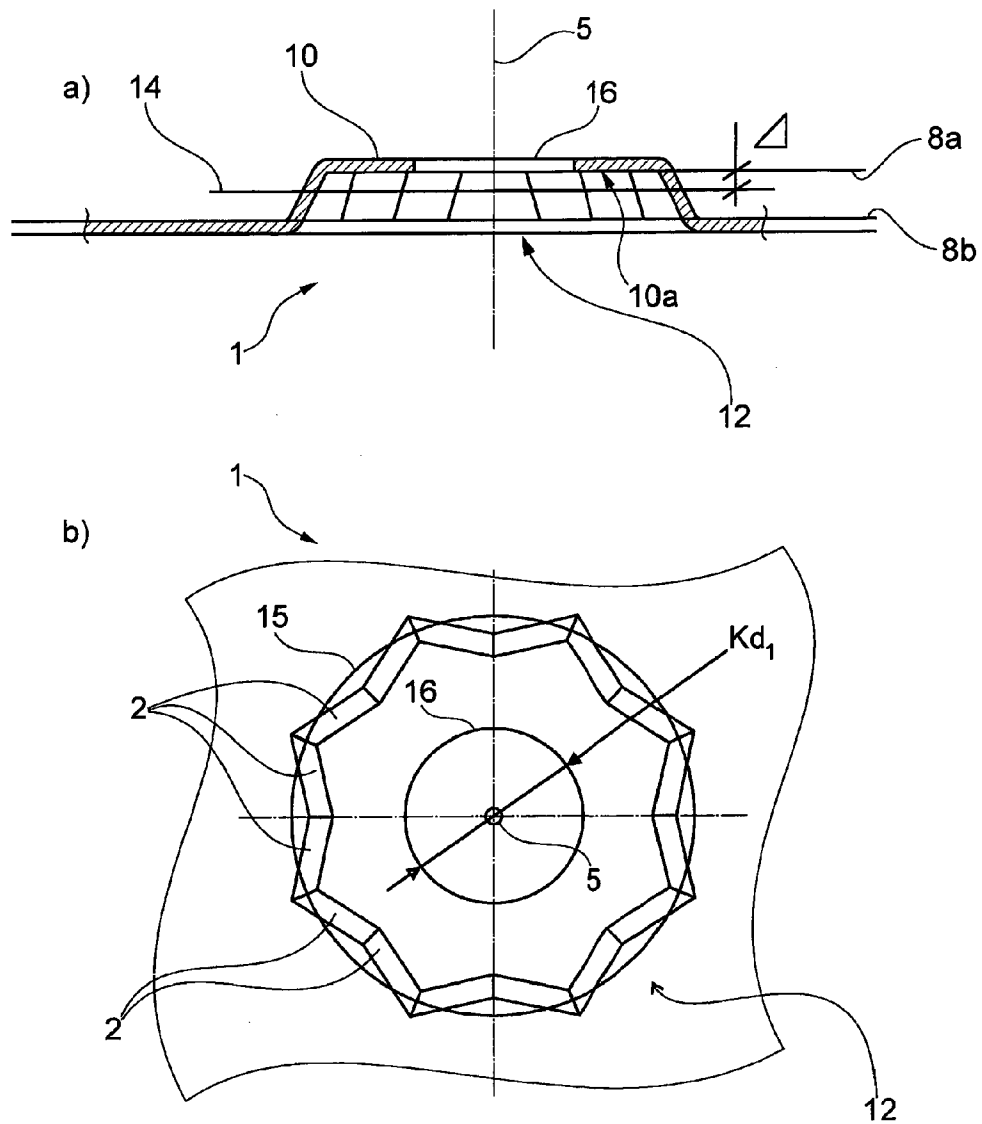


Fig. 11

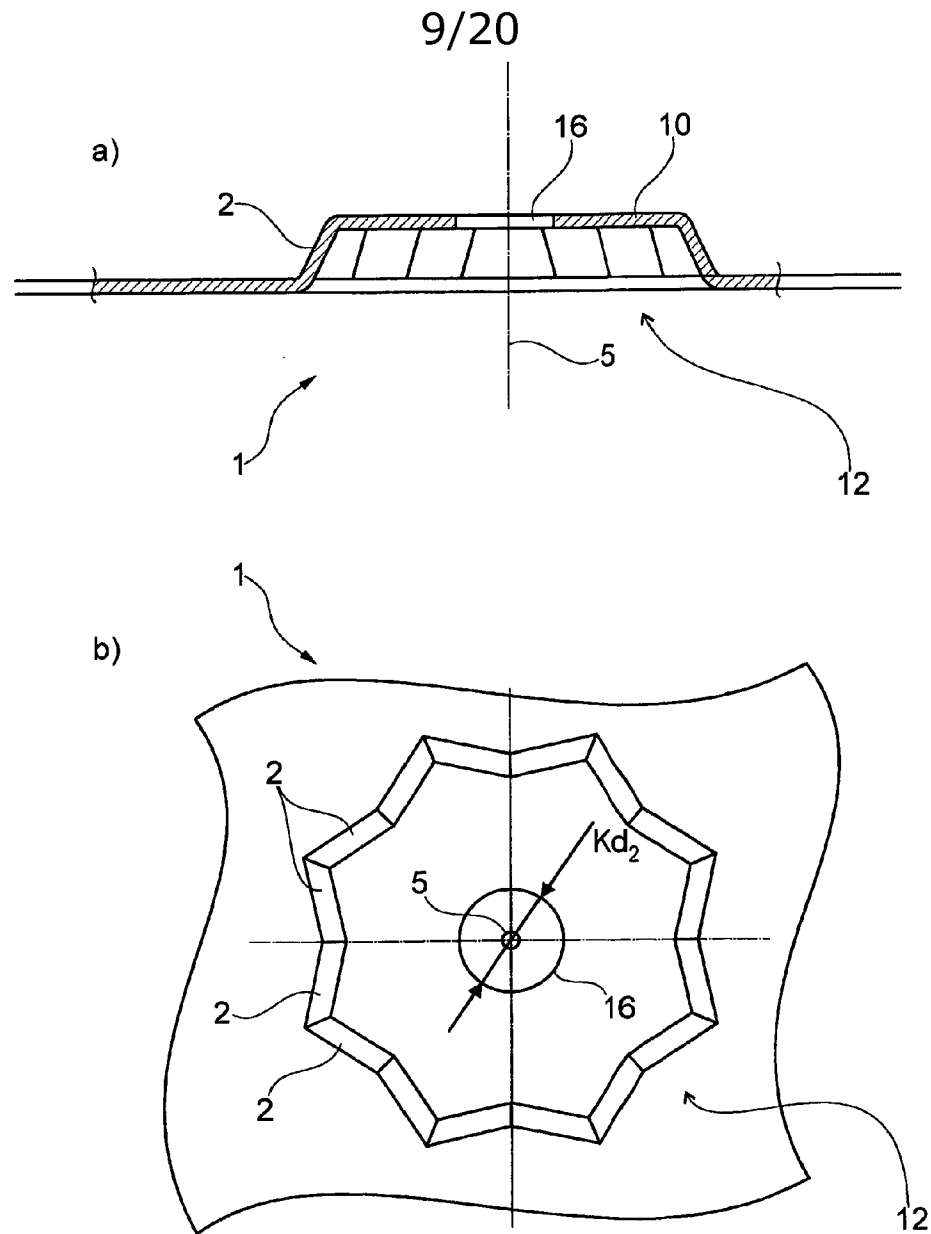


Fig. 12

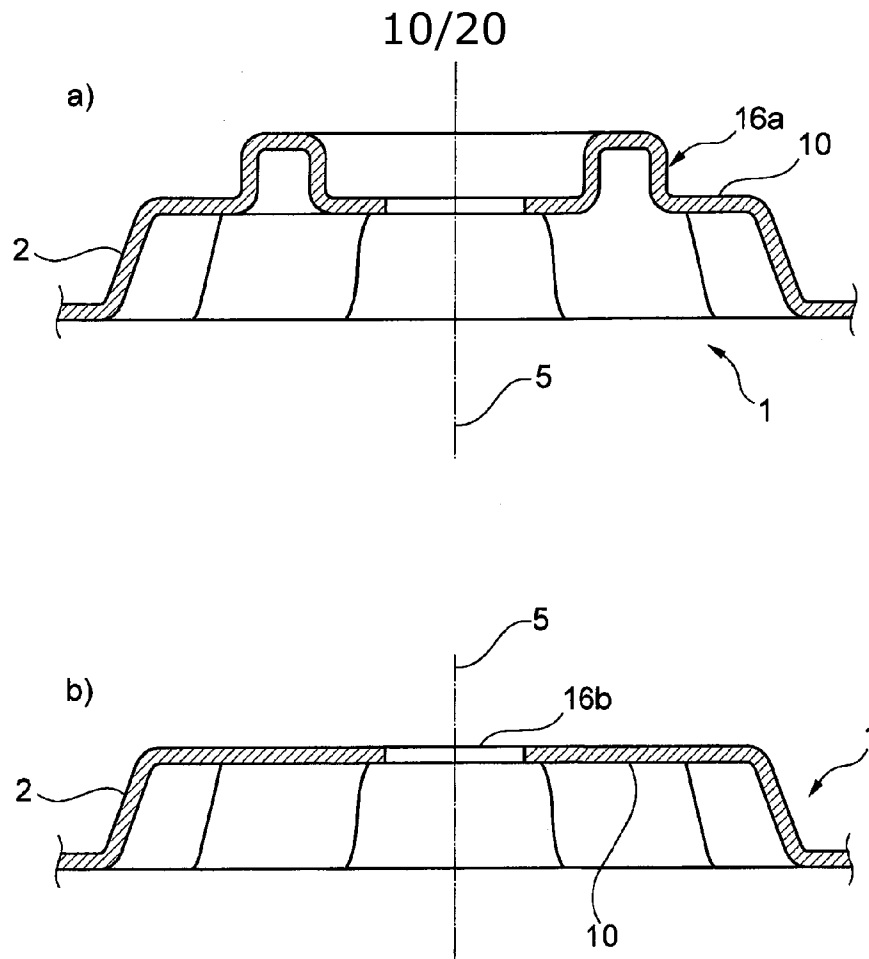


Fig. 13

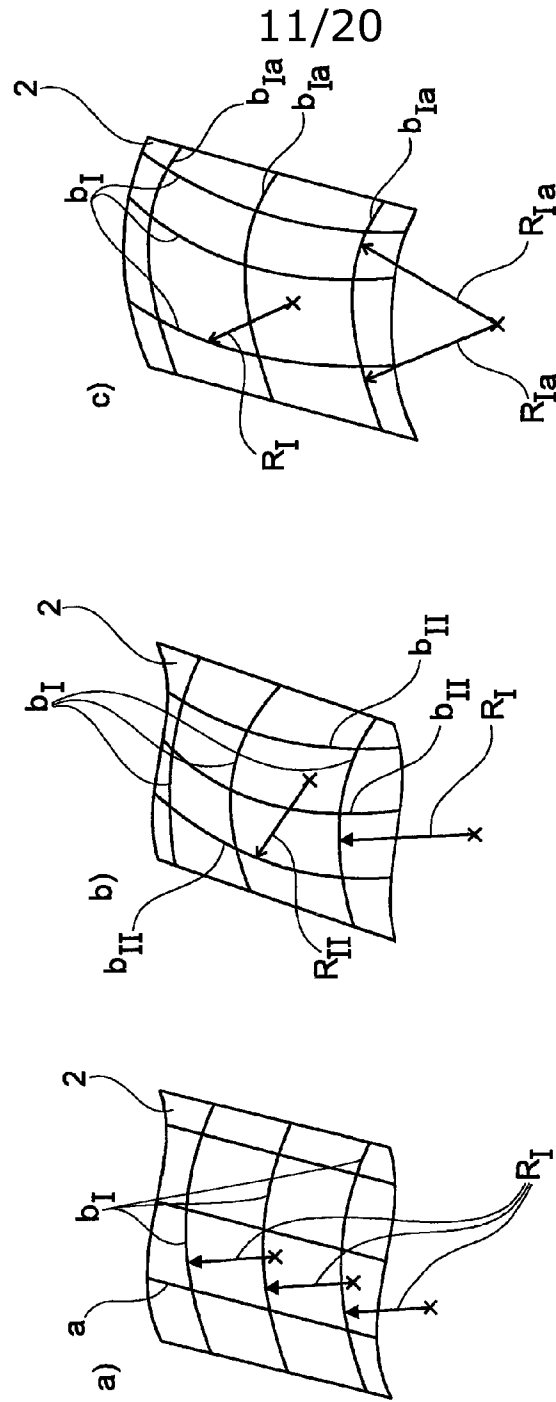


Fig. 14

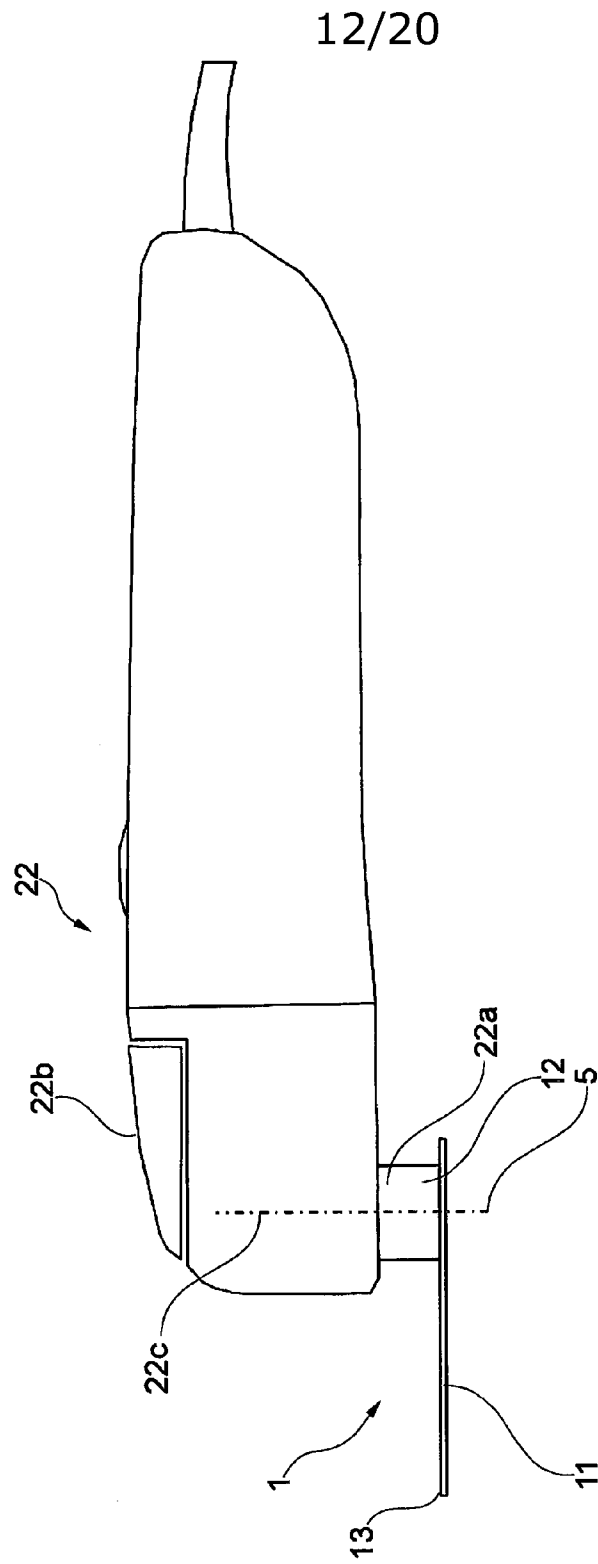


Fig. 15

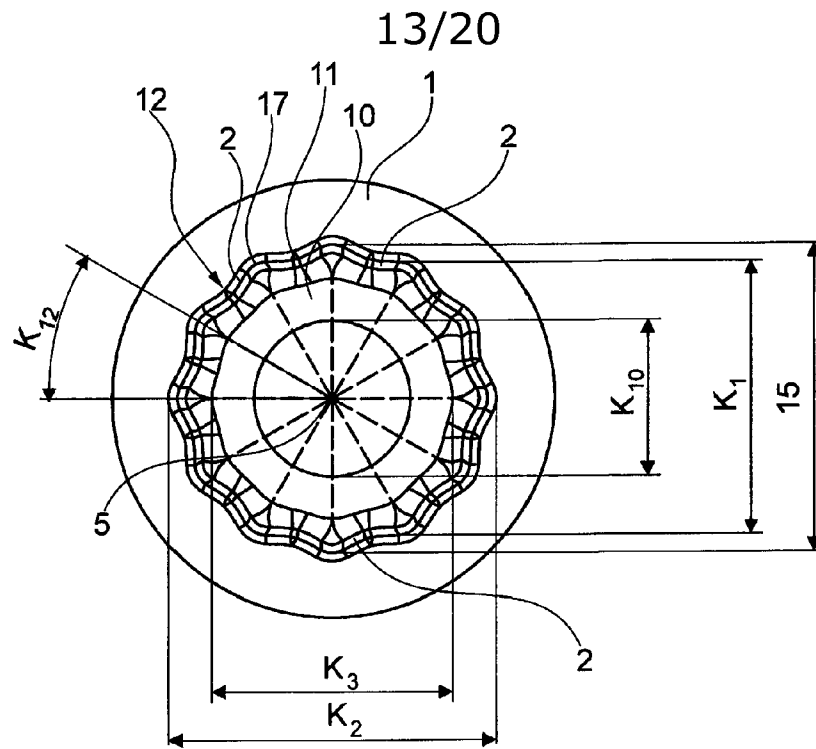


Fig. 16

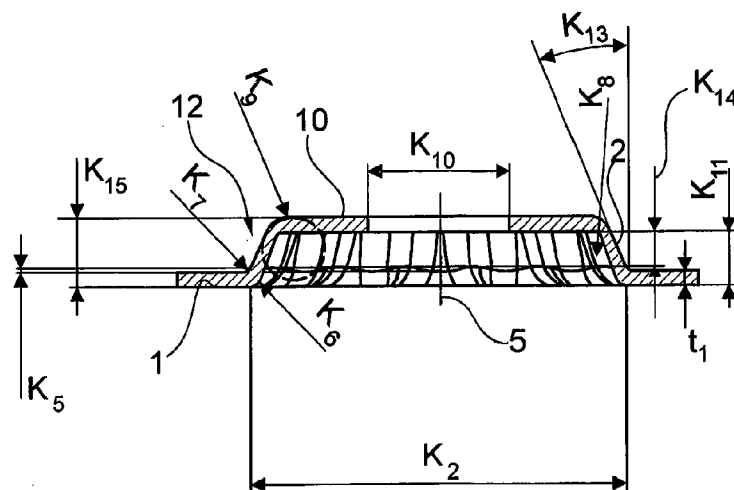


Fig. 17

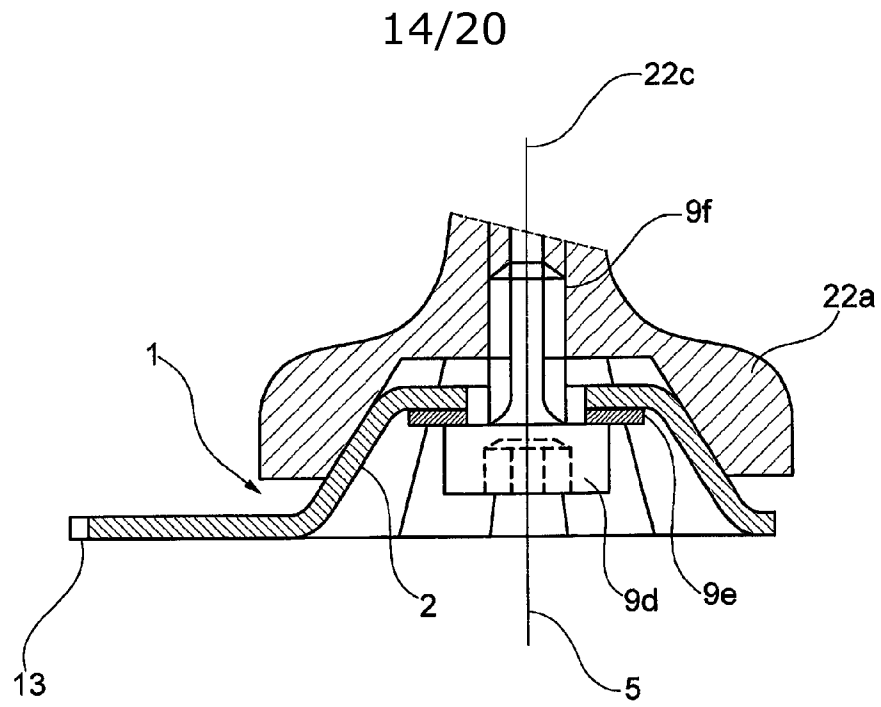
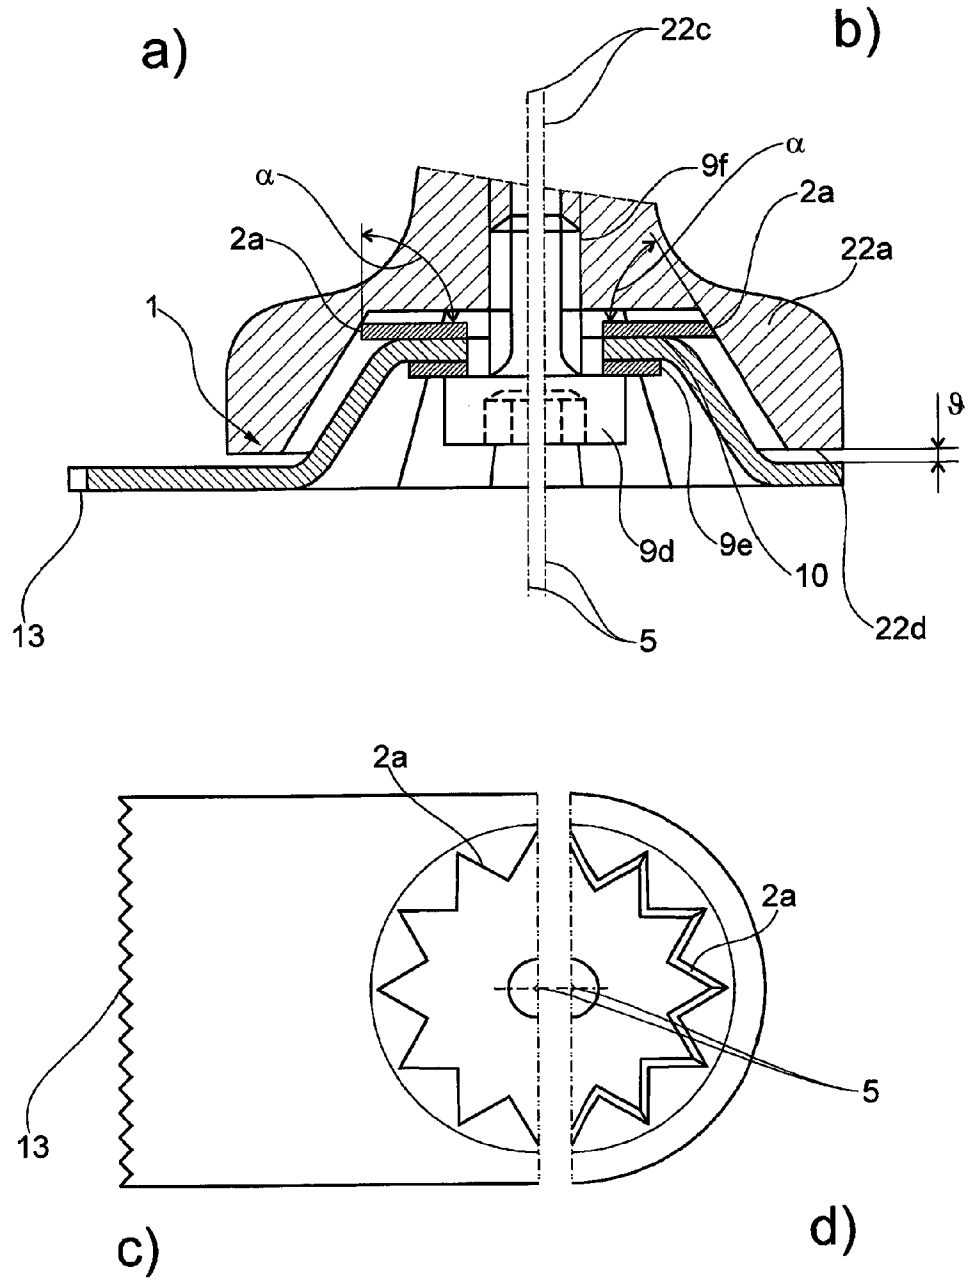


Fig. 18

15/20

Fig. 19



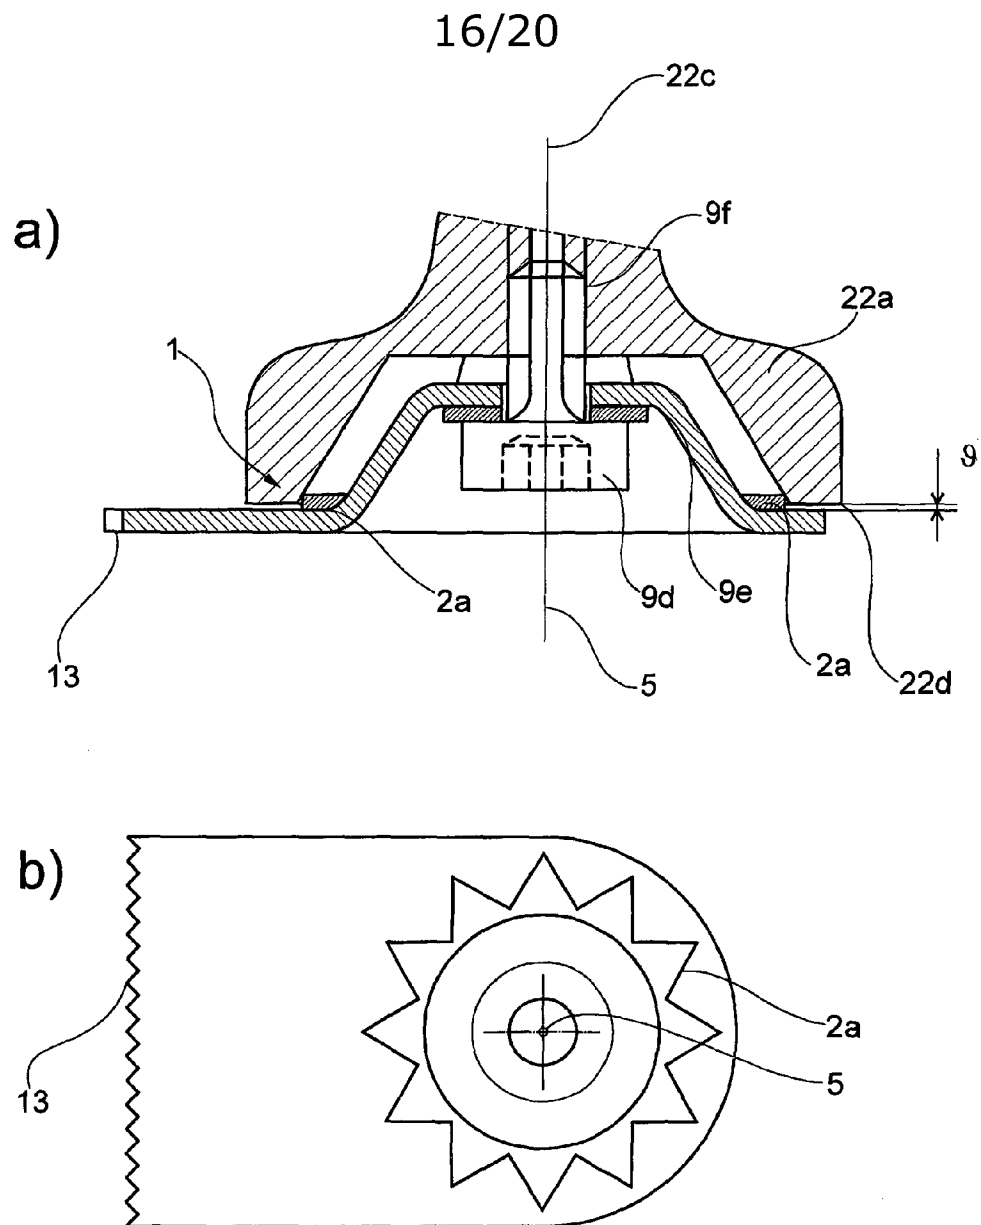


Fig. 20

17/20

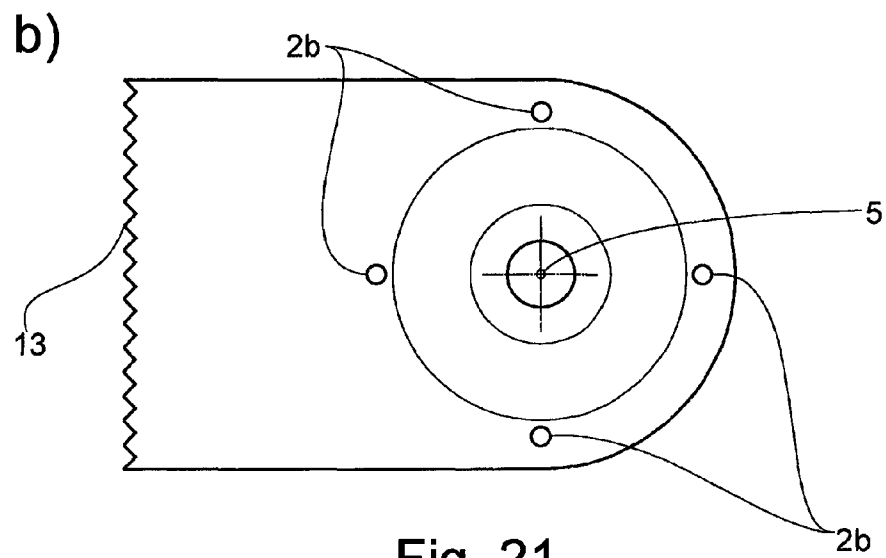


Fig. 21

18/20

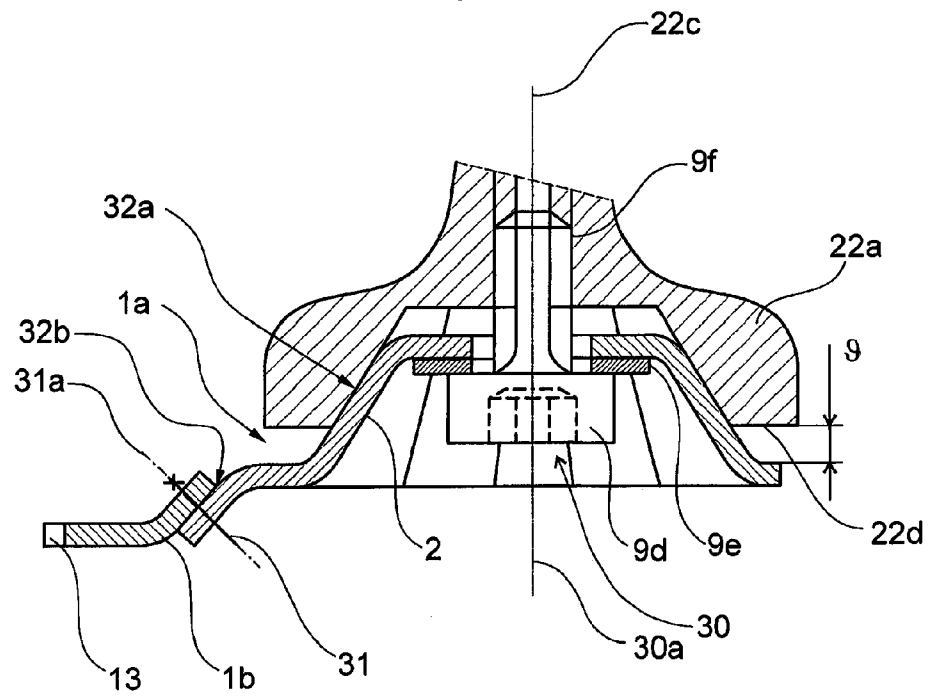


Fig. 22

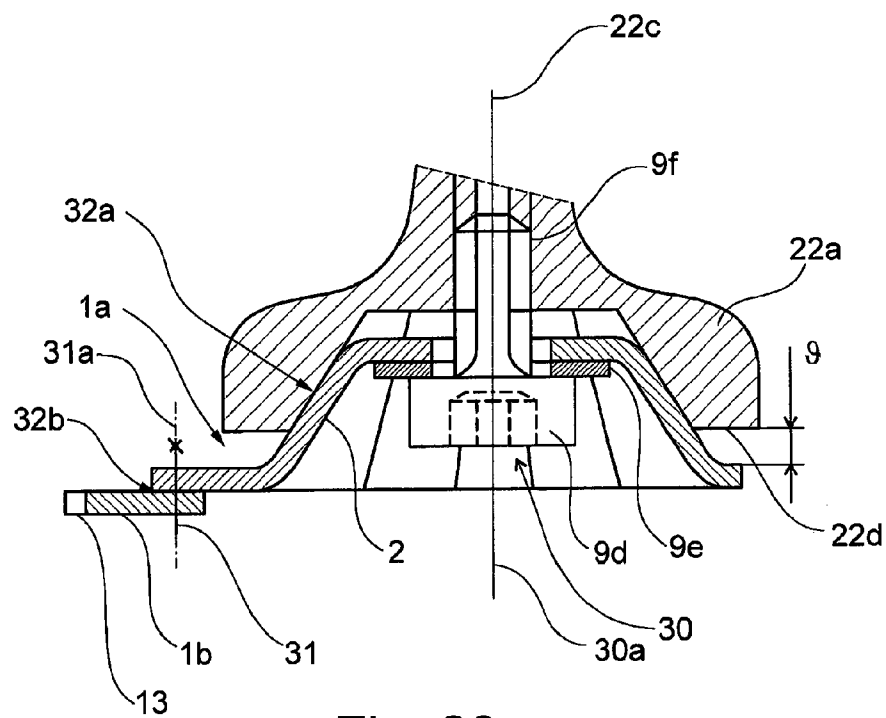


Fig. 23

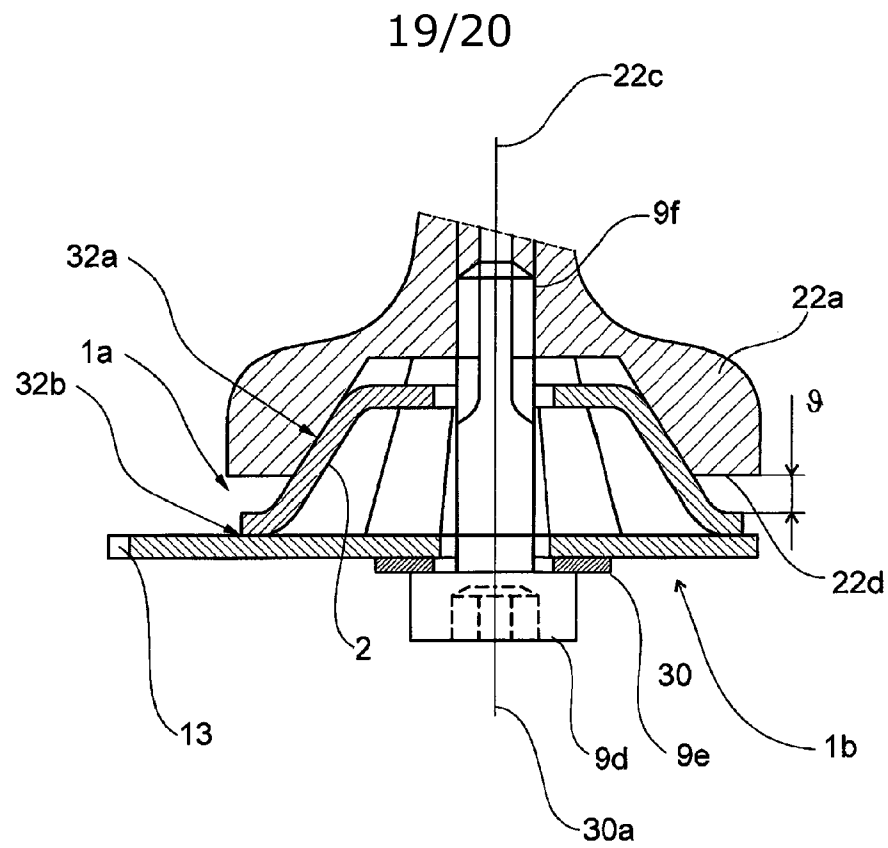


Fig. 24

