



(11)

EP 3 922 158 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
28.08.2024 Bulletin 2024/35

(51) International Patent Classification (IPC):
A47L 13/10 ^(2006.01) **A46B 5/00** ^(2006.01)
A47L 13/52 ^(2006.01)

(21) Application number: **21178921.9**

(52) Cooperative Patent Classification (CPC):
A47L 13/52; A46B 9/025; A46B 9/028;
A47L 13/10; A46B 2200/302

(22) Date of filing: **11.06.2021**

(54) **BEVELED BROOM AND STEP-ON DUSTPAN CLEANING SYSTEM**

ABGESCHRÄGTE BÜRSTE UND TRITT-KEHRSCHAUFEL-REINIGUNGSSYSTEM

SYSTÈME DE NETTOYAGE AVEC BALAI BISEAUTÉ ET PELLE À POUSSIÈRE À PÉDALE

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **12.06.2020 US 202016900415**

(43) Date of publication of application:
15.12.2021 Bulletin 2021/50

(73) Proprietor: **Carl Freudenberg KG**
69469 Weinheim (DE)

(72) Inventors:
• **METZEL, Doug**
Lombard, 60148 (US)

• **ANCHETA, Robert**
Aurora, 60503 (US)

(74) Representative: **Zimmermann & Partner**
Patentanwälte mbB
Postfach 330 920
80069 München (DE)

(56) References cited:
WO-A1-2007/068026 WO-A1-2019/089079
DE-A1- 102013 000 501 FR-A1- 3 043 317
US-A- 1 908 730 US-A1- 2012 260 453

EP 3 922 158 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

[0001] Conventional brooms have uniform length bristles that contact the floor while sweeping. While the bristles can be pressed against the floor, most bristles contact the floor at an angle such that a lateral surface of each bristle, especially those that are bent, rather than and end of the bristle, sweeps against the floor as the broom is moved. Moreover, when sweeping, almost half of the bristles fail to touch or impact the dirt or debris being swept and only touch air while sweeping. For example, WO 2007/068026 A1 describes a brush adapted for scrubbing along grooves such as grouted or mortared joints in tiled surfaces. The brush comprises an elongated body portion having an upper-side and an under-side, and a main plane which extends in the direction of said elongation and at an angle to said under-side.

[0002] Additionally, conventional dustpans require a user to bend over or kneel to reach the dustpan while collecting swept dirt and debris. Most users also hold the dustpan at an angle that biases the edge of the collection area against the floor to facilitate swiping of dirt and debris into the dustpan. Such use requires the user to bend and stress their body, which may be uncomfortable for some users. For example, US 2012/0260453 A1 describes an apparatus and methods for collecting swept waste material. The apparatus includes a dustpan having a base and a wall, a handle, and a plurality of protrusions.

[0003] One solution that has been proposed in the past to address potential challenges with using a waste receptacle such as a dustpan can be seen in U.S. Patent No. 8,875,339 to Dobson. Dobson describes a dustpan that includes a blade (20, FIG. 1) that is pressed against the floor, as shown in FIGS. 6-8, when the user steps and applies a force a foot-pedal (14, FIG. 1) that is integrated with a handle (16) on the rear of a dustbin (26). While Dobson's device provides some improvement over conventional dustpans, the location of the foot-pedal decreases the overall capacity of the dustbin (26), and while the dustpan is pressed against the floor, the dustbin's flat underside (see 30, FIG. 5) may prevent an effective seal to be created under the blade (20) when the dustpan is used on an uneven surface, or if there is debris present in the area of contact between the dustpan and the floor.

BRIEF SUMMARY OF THE INVENTION

[0004] The invention provides a system including a step-on dustpan configured to include a step-on portion, a handle, a lip, a handle clip, a pan surface and side panels. The system also includes a broom configured to include a broom handle, a broom block and beveled bristles. The beveled bristles are disposed in the broom block to form a v-shape in a transverse direction with respect to the broom block. When the step-on portion is engaged by a user, the lip is configured to form a seal against a

floor surface.

[0005] In one aspect, the present disclosure describes a dustpan that includes a receptacle, which is enclosed on four sides by a bottom pan, two sidewalls and a back panel, and includes a lip at a free end of the bottom pan opposite the back panel. The dustpan further includes a handle connected to the back panel and extending opposite the receptacle. The handle has a curved shape that terminates at a floor pad. The dustpan is configured to only contact a flat floor surface along the floor pad and the lip when in an at-rest position. The dustpan further includes at least one foot disposed on an exterior surface of the receptacle. A step-on portion is defined on the handle and is angled with respect to the flat floor surface and configured to provide a pedal for a user to apply a force. When the force is applied to the pedal, the dust pan transitions from the at-rest position to an operating position in which the handle deforms to permit the at least one foot to further contact the flat floor surface and to decrease an angle between the lip and the flat floor surface. In a particular aspect, the handle is deformable between the at-rest position (for example without force to the step-on portion) and the operating position (for example when the force is applied to the step-on portion).

[0006] In another aspect, the disclosure describes a broom having an elongate handle having a first end and a second end. A broom block is connected to the first end of the elongate handle, and a first plurality of bristles is connected to a first section of the broom block. The first plurality of bristles defines a broom head, which has a sweeping end. The sweeping end includes two planar sections, each having an elongate shape, wherein the two planar sections are disposed at an angle relative to one another and intersect a bottom edge to define a bevel along the sweeping end of the broom head.

[0007] In yet another aspect, the disclosure describes a cleaning system that includes a broom and a dustpan. The broom has an elongate handle and a broom block connected at one end of the elongate handle. The broom head comprises a first plurality of bristles connected to the broom block, which define a broom head having a sweeping end opposite the broom block. The sweeping end includes two planar sections disposed at an angle relative to one another to define a bevel. The dustpan has a receptacle connected to a handle, which includes a cylindrical channel with locking nubs that is releasably attachable to the elongate handle of the broom. The handle further includes a floor pad opposite its connection to the receptacle, and a lip disposed opposite its connection to the handle such that, when the dustpan is detached from the broom and sits on a flat floor surface in an at-rest position, the dustpan contacts the flat floor surface only along the floor pad and the lip, and remaining portions of the handle and receptacle are suspended above the flat floor surface.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

[0008]

Figure 1 is a front perspective view of a step-on dustpan according to an embodiment of the disclosure. Figure 2 is a rear perspective view of the step-on dustpan according to an embodiment of the disclosure.

Figure 3 is a top plan view of the step-on dustpan according to an embodiment of the disclosure.

Figure 4 is a bottom plan view of the step-on dustpan according to an embodiment of the disclosure.

Figure 5 is a side plan view of one side of the step-on dustpan according to an embodiment of the disclosure.

Figure 6 is a side plan view of another side of the step-on dustpan according to an embodiment of the disclosure.

Figure 7 is a front perspective view of a step-on dustpan according to another embodiment of the disclosure.

Figure 8 is a rear perspective view of the step-on dustpan according to another embodiment of the disclosure.

Figure 9 is a top plan view of the step-on dustpan according to another embodiment of the disclosure.

Figure 10 is a perspective view of a beveled broom according to an embodiment of the disclosure.

Figure 11 is a side plan view of the beveled broom according to an embodiment of the disclosure.

Figure 12 is a top plan view of the beveled broom according to an embodiment of the disclosure.

Figure 13 is a bottom plan view of the beveled broom according to an embodiment of the disclosure.

Figure 14 is a perspective view of the step-on dustpan and the beveled broom according to an embodiment of the disclosure.

Figure 15 is an enlarged perspective view of the beveled broom of FIG. 11 according to an embodiment of the disclosure.

Figure 16 is a compound side view of the beveled broom showing a sweep contact angle according to an embodiment of the disclosure.

DETAILED DESCRIPTION OF THE INVENTION

[0009] Reference will now be made in detail to specific embodiments or features, examples of which are illustrated in the accompanying drawings. Wherever possible, corresponding or similar reference numbers will be used throughout the drawings to refer to the same or corresponding parts. Moreover, references to various elements described herein, are made collectively or individually when there may be more than one element of the same type. However, such references are merely exemplary in nature. It may be noted that any reference to

elements in the singular may also be construed to relate to the plural and vice versa without limiting the scope of the disclosure to the exact number or type of such elements unless set forth explicitly in the appended claims.

5 [0010] The present disclosure is directed to a floor cleaning system that includes a step-on dustpan 100 and beveled broom 300 combination. The combination of the step-on dustpan 100 and the beveled broom 300 provides an effective and more efficient system to collect floor debris than traditional broom and dustpan combinations in that the dustpan can be used on uneven or unclean surfaces while still maintaining ease of use and a good seal at the blade of the dustbin. Further, cleaning effectiveness of the floor cleaning system is improved by providing beveled bristles on the broom, which increases contact area between the broom and the floor and, also, the ability of the broom to push debris past the blade of the dustbin and into the collection cavity of the dustpan. In certain embodiments, the step-on dustpan 100 includes a hands-free feature to assist a user in debris collection without the user bending or kneeling when in use.

[0011] Referring now to Figure 1, there is a front perspective view of a step-on dustpan 100 according to an embodiment of the disclosure. In certain embodiments, the step-on dustpan 100 comprises a handle 135 that includes an angled step-on portion 136 (shown in Figure 2). The handle 135 includes a floor pad 137 that contacts the floor 145 (shown in Figure 5). The floor pad 135 is adjacent the angled step-on portion 136, which also includes ridges 138 that increase contact friction when a user steps on the step-on portion 136. In an alternative embodiment, the ridges 138 may be omitted in favor of a textured surface, for example, a diamond-plate pattern surface, which includes protruding, 3-dimensional features that increase friction between the step-on portion 136 and the bottom of a user's foot. One such pattern may be a molding texture commonly referred to as MT-11620, which includes a staggered arrangement of raised diamond or rhombic features that extend 0.003in. or 75 μ m from the surface. Such embodiment is shown in FIG. 2, where the step-on portion 136 is shown occupying a top or ridge surface of the handle 130.

[0012] The floor pad 137 contact with the floor is configured to hold the dustpan 100 in place when a user steps onto the step-on portion 136. A force, F, applied by the user while stepping onto the step-on portion 136 is disposed at an angle, gamma-sub-alpha (γ_α), as shown in FIG. 6, relative to the floor, which acts as a foot-pedal to both press the floor pad 136 against the floor and also deform a body portion of the handle 130 such that feet 140 (two shown, as can be seen in Figure 2) also contact the floor while the body portion 130 of the handle is deformed under the force of the user's foot.

55 [0013] The dustpan 100 further includes a pan or debris receptacle 111 that is closed on four sides and open on two sides. The receptacle 111 is defined between a bottom pan surface 110, two side panels 115 and a back

panel 116. The bottom pan surface 110 includes a lip or blade 105 along its leading edge opposite the back panel 116 that contacts the floor and has a triangular or beveled edge that terminates in a line edge 113 to facilitate the sweeping of debris into the receptacle 111.

[0014] In some embodiments, the action by a user of stepping on the handle step-on portion 136 of the dustpan 100 applies the force F , which causes various other forces to be applied at various locations tending to bias certain portions of the dustpan 100 against the floor and also deform the handle body portion 130 in a direction tending to straighten the handle. More specifically, and as shown in Figure 6, the user applied force F applied at the angle γ causes two vertical reaction forces F_1 and F_2 applied, respectively, at the floor pad 137 and at the line edge 113. A horizontal reaction force F_3 , which opposes a horizontal component of the force F , is countered by friction between the floor pad 137 and the floor 145. Due to the relatively small contact area between the line edge 113 and the floor, the friction F_3 is larger than any friction between the floor and the line edge 113, which results in a sliding of the line edge 113 against the floor. This sliding, in addition a vertical component F_4 of the force F applied close to a junction between the body 130 of the handle and the receptacle 111 causes the receptacle 111, which is generally rigid compared to the body 130 of the handle, to move as the area between the body of the handle 130 and the receptacle 111 to bend.

[0015] Bending of the dustpan 100 in this way augments the biasing force that pushes the lip 105 against a floor 145 and an angle, α between the lip 105 and the floor 145 to decrease, which facilitates entry of debris into the receptacle 111 and also provides a better seal against dust or debris passing under the lip 105 rather than into the receptacle 111 when swept in past the line edge 113. In this position, the bottom surface of the receptacle may be at an angle of 3 to 5 degrees relative to the floor, which can be reduced to zero when the user steps on the step-on portion 136 and applies a downward force. As can be appreciated, any other angle can also be used. At the lip 105, the angle α will also assume an inclination when the dustpan is at an at-rest condition, and reduce while the user pushes down on the step-on portion 136. In some embodiments, the lip 105 is disposed within or integral to a pan entry lip portion 107 (Figure 1) where lip portion 107 is angled apart from pan surface 110 to further facilitate entry of debris into the receptacle 111.

[0016] As can be seen in Figure 6, when the dustpan 100 is in the operating position with the force F applied and the body 130 of the handle 135 deflected or disposed into its deformed, biased position, the bottom of the feet 140 contact the floor 145, which is now disposed at dashed line 145'. At this position, the feet 140 maintain a distance, d , between the bottom of the pan surface 110 that permits proper alignment and continuous contact between the line edge 113 and the floor 145 (or 145') on floors that are uneven and/or in instances where debris

is trapped or present in an area, A (shown in Figure 5), between the receptacle 111 and the floor 145 (or 145').

[0017] In some embodiments, the dustpan 100 comprises a large cleaning comb 120 for removing hair from the broom 300 shown in Figure 10. In the illustrated embodiment, the comb 120 includes a plurality of triangular fins connected to the back panel 116 and extending, generally perpendicularly relative to the back panel 116, into the area of the receptacle 111. Each fin 126 from the plurality of fins 126 has a generally triangular shape (isosceles, in the embodiment of Figure 1), having its base connected to the back panel 116 and its sides extending into the receptacle 111 such that the tip 127 is suspended above the bottom pan 110. A lower edge or side of each fin 126 may include serrations 129 to facilitate removal of debris. During use, and as shown in Figure 14, the tips 127 cut into and separate groups of broom bristles such that hair or other elongate debris that engages more than one group of bristles simultaneously can be engaged by a bottom edge of one or more fins 126 and be retained thereby while the broom passes over the comb 120. Elongate debris thus combed out of the broom then falls into the receptacle 111.

[0018] The body 130 of the handle 135 further includes a handle clip 125, which in the illustrated embodiment is shown as a channel extending at least partially along a middle portion of the body 130. The channel 125 is defined between two ribs 124 (shown in FIG. 3) and includes a cylindrical section 128 into which a portion of a broom handle can be retained, for example, the broom handle 305 shown in FIG. 10. The cylindrical section 128 further includes locking nubs 123, also shown in FIG. 3, which interlock and engage the broom handle 305 to lock and retain the same engaged within the handle clip 125 to pair the dustpan 100 with the broom 300 when not in use. In the illustrated embodiment, the dustpan 100 is made from an elastically flexible plastic material and, optionally, the lip 105 is made from a soft, thermoplastic elastomer (TPE) material to provide improved compliance with a rough floor surface 145, which in turn provides a better seal between the lip 105 and the floor 145. In the illustrated embodiment, the handle 135 further includes an opening 122 formed in the floor pad 135, and a strengthening rib 121 extending within the channel 125 and forming one of the locking nubs 123.

[0019] Referring now to Figures 2, 3 and 4, various views of the dustpan 100 are shown including is a top and bottom plan view, respectively, of the step-on dustpan 100 according to an embodiment of the disclosure. In some embodiments, dustpan 100 comprises cleaning combs 120 disposed orthogonal to the pan entry lip portion 107 and lip 105, as shown. Also, dustpan 100 includes a pan bottom surface 112 disposed opposite pan surface 110 that faces the surface of floor 145, as shown in Figures 5 and 6.

[0020] Referring now to Figures 5 and 6, there are side plan views of the step-on dustpan 100 according to an embodiment of the disclosure. In certain embodiments,

dustpan 100 operates by a user engaging or stepping on step-on portion 135 after placing dustpan 100 upon floor 145 as shown. This step-on action causes lip 105 to engage floor 145 at the angle α to create a seal between lip 105 and floor 145 during a sweeping and collecting of debris by a user.

[0021] Referring now to Figures 7 and 8, there are front and rear perspective views of an alternative embodiment of a dustpan 200 according to the disclosure. In some embodiments, dustpan 200 comprises a handle 235 configured to hold the dustpan 200 in place without the user having to bend or kneel to sweep debris into the pan surface 210 surrounded by side panels 215. In this embodiment, structures and features that are the same or similar to corresponding structures and features of the dustpan 100 described above are denoted by the same reference numerals as previously used for simplicity. In some embodiments, the action by a user of stepping on the handle step-on portion 235 of the dustpan 100 will deform the handle 230 to provide a biasing force that pushes a lip 205 (the leading edge of pan 210) against a floor 145 at an angle α to provide a better seal against dust or debris passing under the lip 205 rather than into the pan surface 210 when swept in past a pan entry lip portion 207. In certain embodiments, the angle α is between 20 to 30 degrees. In some embodiments, lip 205 is disposed within or integral to pan entry lip portion 207 where lip portion 207 is angled apart from pan surface 210.

[0022] Referring now to Figure 9, there is a top plan view of the step-on dustpan 200 according to another embodiment of the disclosure. In some embodiments, the dustpan 200 includes a handle clip 225 for storage or attachment to a broom handle 305 and a Thermoplastic elastomers (TPE) lip 205 for sealed contact with the floor 145. In one aspect, the dustpan 200 is similar in function to the dustpan 100 but omits the comb 120.

[0023] Referring now to Figures 10 and 11, there are a perspective view and a side plan view of a beveled broom 300 according to an embodiment of the disclosure. In certain embodiments, the beveled broom 300 comprises a handle 305, a broom block 310 having a variety of bristles 315 disposed therein. In some embodiments, the bristles 315 are grouped in sections comprising different types of bristles. For example, a first section 325 is made from a first fiber at 0.75mm diameter, and a second section 326 is made from a second fiber at 0.65mm. As can be seen in Figure 10, the first section 325 is disposed between two second sections 326, for a total of three sections, each spanning about the same length along the broom block 310. The broom 300 further comprises a beveled or chamfered broom head 320 having angled trimming and flagging, β , on both sides. In certain embodiments, the broom head 320 provides increased floor contact as shown in Figure 16 with flagged fiber versus conventional broom heads thereby collecting more debris while sweeping.

[0024] Referring now to Figures 12 and 13, there is a

top plan view and a bottom plan view of the beveled broom 300 according to an embodiment of the disclosure. In certain embodiments, the dual beveled or chamfered broom head 320 is configured to be at an angle β of about 30 to 45 degrees for maximum surface contact area to the floor surface or ground 335 during use, as shown in Figure 16. In certain embodiments, the broom 300 comprises a beveled broom head 320 including dual beveled or chamfered floor contact edges 340. As shown, also in Figure 11, the chamfered broom head 320 defines two planar sections 321, each planar section defined by bristles that are cut such that their free ends all terminate at or about each planar section 321. Each of the planar sections 321 has an elongate shape that extends along the broom block 310 and is generally rectangular or trapezoidal defined between a bottom edge 322, along which the two planar sections 321 meet at the angle β , and two lateral edges 323, which coincide with the outer surface 327 defined by the bristles, as shown in Figure 10. Side edges 324 are defined by the ends of the bristles at each end of the broom.

[0025] Referring now to Figure 14, there is a perspective view of the step-on dustpan 100 and the beveled broom 300 according to an embodiment of the disclosure. In certain embodiments, the combination of the dustpan 100 and the broom 300 creates an advantage over conventional brooms and dustpans by the aspects discussed above with respect to more efficiently and effectively collecting debris in use. As can be seen here, the comb 120 passes through bristles to remove debris that may be lodged or caught in the bristles. As the debris, which is generally denoted as 329, gets dislodged from the bristles, it falls within the receptacle 111.

[0026] Referring now to Figure 15, there is an enlarged perspective view of the beveled broom 300 of FIG. 11 according to an embodiment of the disclosure. In some embodiments, broom 300 comprises dual bristles at 325 and at 320 to better capture and sweep debris of differing sizes which may pass through one set of bristles but get captured by the second set of bristles as discussed above.

[0027] Referring now to Figure 16, there is a compound side view of the beveled broom 300 showing a sweep contact angle β according to an embodiment of the disclosure. In certain embodiments, broom 300 in use is configured to engage a floor surface 335 at an optimal angle, β' , of about 30 to 45 degrees to effectively capture the maximum floor debris while sweeping in a direction 330 at a sweep contact surface 340 of bristles 315 of broom head 320 as shown. Advantageously, the beveled edge allows for use of the broom while sweeping in both forward and reverse directions (right and left in the orientation shown in FIG. 16).

[0028] All references, including publications, patent applications, and patents, cited herein are hereby incorporated by reference to the same extent as if each reference were individually and specifically indicated to be incorporated by reference and were set forth in its entirety

herein.

[0029] The use of the terms "a" and "an" and "the" and "at least one" and similar referents in the context of describing the invention (especially in the context of the following claims) are to be construed to cover both the singular and the plural, unless otherwise indicated herein or clearly contradicted by context. The use of the term "at least one" followed by a list of one or more items (for example, "at least one of A and B") is to be construed to mean one item selected from the listed items (A or B) or any combination of two or more of the listed items (A and B), unless otherwise indicated herein or clearly contradicted by context. The terms "comprising," "having," "including," and "containing" are to be construed as open-ended terms (i.e., meaning "including, but not limited to,") unless otherwise noted. Recitation of ranges of values herein are merely intended to serve as a shorthand method of referring individually to each separate value falling within the range, unless otherwise indicated herein, and each separate value is incorporated into the specification as if it were individually recited herein. All methods described herein can be performed in any suitable order unless otherwise indicated herein or otherwise clearly contradicted by context. The use of any and all examples, or exemplary language (e.g., "such as") provided herein, is intended merely to better illuminate the invention and does not pose a limitation on the scope of the invention unless otherwise claimed. No language in the specification should be construed as indicating any non-claimed element as essential to the practice of the invention.

[0030] Preferred embodiments of this invention are described herein, including the best mode known to the inventors for carrying out the invention. Variations of those preferred embodiments may become apparent to those of ordinary skill in the art upon reading the foregoing description. The inventors expect skilled artisans to employ such variations as appropriate, and the inventors intend for the invention to be practiced otherwise than as specifically described herein. Accordingly, this invention includes all modifications and equivalents of the subject matter recited in the claims appended hereto as permitted by applicable law. The scope of the invention is set out in the appended set of claims. Moreover, any combination of the above-described elements in all possible variations thereof, which is within the scope of the invention, is encompassed by the invention unless otherwise indicated herein or otherwise clearly contradicted by context.

Claims

1. A broom (300), comprising:

an elongate handle (305) having a first end and a second end;
a broom block (310) connected to the first end of the elongate handle;

a first plurality of bristles (315) connected to a first section of the broom block;
wherein the first plurality of bristles defines a broom head (320), the broom head having a sweeping end, **characterized in that** the sweeping end comprising:

two planar sections (321), each having an elongate shape,
wherein the two planar sections (321) are disposed at an angle relative to one another and intersect a bottom edge (322) to define a bevel along the sweeping end of the broom head (320).

2. The broom (300) of claim 1, further comprising a second plurality of bristles connected to a second section of the broom block (310), wherein portions of the second section are disposed on either side of the first section along the broom block.

3. The broom (300) of claim 2, wherein the broom head (320) is further defined by the second plurality of bristles.

4. The broom (300) of any one of claims 1 to 3, wherein the two planar sections (321) are further defined between two lateral edges, which coincide with two corresponding outer surfaces of the broom head (320).

5. A cleaning system, comprising:

a broom (300) according to any of claims 1-4;
a dustpan (100, 200) having a receptacle (111) connected to a handle (130, 235), the handle (130, 235) having a cylindrical channel (125) with locking nubs (123, 225) that is releasable attachable to the elongate handle (305) of the broom (300);
wherein the handle (130, 235) further includes a floor pad (137) opposite its connection to the receptacle (111), and wherein the receptacle includes a lip (105, 205) disposed opposite its connection to the handle (130, 235) such that, when the dustpan (100, 200) is detached from the broom (300) and sits on a flat floor surface in an at-rest position, the dustpan (100, 200) contacts the flat floor surface only along the floor pad (137) and the lip (105, 205), and remaining portions of the handle (130, 235) and the receptacle (111) are suspended above the flat floor surface.

6. The cleaning system of claim 5, wherein the receptacle (111) is enclosed on four sides by a bottom pan (110, 210), two sidewalls (115, 215) and a back panel (116), and wherein the lip (105, 205) at a free end of the bottom pan (110, 210) opposite the back panel (116).

7. The cleaning system of any one of claims 5 and 6, further comprising at least one foot (140) disposed on the exterior surface of the receptacle (111), the cleaning system preferably further comprising: a step-on portion (136) defined on the handle (130, 235), the step-on portion (136) configured to provide a pedal for a user to apply a force; wherein, when the force is applied to the pedal, the dust pan transitions from the at-rest position to an operating position in which the handle (130, 235) deforms to permit the at least one foot (140) to further contact the flat floor surface and to decrease an angle between the lip (105, 205) and the flat floor surface.
8. The cleaning system of any one of claims 5 to 7, wherein the dustpan (100, 200) is configured such that, when a user applies a force on the step-on portion (136) of the handle (130, 235), the dustpan (100, 200) transitions from the at-rest position to an operating position in which the handle (130, 235) deforms to permit at least one foot (140) connected to the receptacle (111) and extending below a bottom surface (110, 210) of the receptacle (111) to further contact the flat floor surface and to decrease an angle between the lip (105, 205) and the flat floor surface.
9. The cleaning system of claim 5, wherein
- the receptacle (111) of the dustpan (100, 200) is enclosed on four sides by a bottom pan (110, 210), two sidewalls (115, 215) and a back panel (116), the receptacle (111) including a lip (105, 205) at a free end of the bottom pan (110, 210) opposite the back panel (116);
- the handle (130, 235) being connected to the back panel (116) and extending opposite the receptacle, the handle (130, 235) having a curved shape that terminates at the floor pad (137), the dustpan (100, 200) being configured to only contact the flat floor surface along the floor pad (137) and the lip (105, 205) when in an at-rest position; at least one foot (140) disposed on an exterior surface of the receptacle (111);
- a step-on portion (136) defined on the handle (130, 235), the step-on portion (136) configured to provide a surface for a user to apply a force; wherein, when the force is applied to the step-on portion (136), the dust pan transitions from the at-rest position to an operating position in which the handle (130, 235) deforms to permit the at least one foot (140) to further contact the flat floor surface and to decrease an angle between the lip (105, 205) and the flat floor surface.

Patentansprüche

1. Besen (300), umfassend:

einen länglichen Stiel (305) mit einem ersten Ende und einem zweiten Ende;
einen Besenblock (310), der mit dem ersten Ende des länglichen Stiels verbunden ist;
eine erste Vielzahl von Borsten (315), die mit einem ersten Abschnitt des Besenblocks verbunden sind;
wobei die erste Vielzahl von Borsten einen Besenkopf (320) definiert, wobei der Besenkopf ein Kehrende aufweist, **dadurch gekennzeichnet, dass** das Kehrende umfasst:

zwei ebene Abschnitte (321), die jeweils eine längliche Form haben,
wobei die beiden ebenen Abschnitte (321) in einem Winkel relativ zueinander angeordnet sind und eine Unterkante (322) schneiden, um eine Abschrägung entlang des Kehrendes des Besenkopfes (320) zu definieren.

2. Besen (300) nach Anspruch 1, ferner umfassend eine zweite Vielzahl von Borsten, die mit einem zweiten Abschnitt des Besenblocks (310) verbunden sind, wobei Teile des zweiten Abschnitts auf beiden Seiten des ersten Abschnitts entlang des Besenblocks angeordnet sind.
3. Besen (300) nach Anspruch 2, wobei der Besenkopf (320) ferner durch die zweite Vielzahl von Borsten definiert ist.
4. Besen (300) nach einem der Ansprüche 1 bis 3, wobei die beiden ebenen Abschnitte (321) ferner zwischen zwei seitlichen Kanten definiert sind, die mit zwei entsprechenden Außenflächen des Besenkopfes (320) übereinstimmen.
5. Reinigungssystem, umfassend:
- einen Besen (300) nach einem der Ansprüche 1-4;
eine Kehrschaufel (100, 200) mit einem Behälter (111), der mit einem Stiel (130, 235) verbunden ist, wobei der Stiel (130, 235) einen zylindrischen Kanal (125) mit Verriegelungsnoppen (123, 225) aufweist, der lösbar an dem länglichen Stiel (305) des Besens (300) befestigt werden kann;
wobei der Griff (130, 235) ferner ein Bodenpolster (137) gegenüber seiner Verbindung mit dem Behälter (111) aufweist, und wobei der Behälter eine Lippe (105, 205) aufweist, die gegenüber seiner Verbindung mit dem Griff (130, 235) angeordnet ist, so dass, wenn die Kehrschaufel (100, 200) vom Besen (300) abgenommen wird und in einer Ruheposition auf einer flachen Bodenoberfläche steht, die Kehrschaufel (100,

- 200) die flache Bodenoberfläche nur entlang des Bodenpolsters (137) und der Lippe (105, 205) berührt und die übrigen Teile des Griffs (130, 235) und des Behälters (111) über der flachen Bodenoberfläche aufgehängt sind. 5
6. Reinigungssystem nach Anspruch 5, wobei der Behälter (111) an vier Seiten von einer Bodenwanne (110, 210), zwei Seitenwänden (115, 215) und einer Rückwand (116) umschlossen ist, und wobei die Lippe (105, 205) an einem freien Ende der Bodenwanne (110, 210) gegenüber der Rückwand (116) liegt. 10
7. Reinigungssystem nach einem der Ansprüche 5 und 6, ferner umfassend mindestens einen Fuß (140) umfasst, der an der Außenfläche des Behälters (111) angeordnet ist, 15
- wobei das Reinigungssystem vorzugsweise ferner umfasst: einen Teil zum Drauftreten (136), der auf dem Griff (130, 235) definiert ist, wobei der Teil zum Drauftreten (136) so konfiguriert ist, dass er ein Pedal für einen Benutzer zum Aufbringen einer Kraft bereitstellt; wobei, wenn die Kraft auf das Pedal aufgebracht wird, die Kehrschaufel von der Ruheposition in eine Betriebsposition übergeht, in der sich der Griff (130, 235) verformt, um es dem mindestens einen Fuß (140) zu ermöglichen, die flache Bodenoberfläche weiter zu berühren und einen Winkel zwischen der Lippe (105, 205) und der flachen Bodenoberfläche zu verringern. 20
8. Reinigungssystem nach einem der Ansprüche 5 bis 7, wobei die Kehrschaufel (100, 200) so konfiguriert ist, dass die Kehrschaufel (100, 200) aus der Ruheposition in eine Betriebsposition übergeht, in der sich der Griff (130, 235) verformt, wenn ein Benutzer eine Kraft auf den Trittteil (136) des Griffs (130, 235) aufbringt, um es dem mindestens einen Fuß (140) zu ermöglichen, der mit dem Behälter (111) verbunden ist und sich unter eine Bodenfläche (110, 210) des Behälters (111) erstreckt, die flache Bodenfläche weiter zu berühren und einen Winkel zwischen der Lippe (105, 205) und der ebenen Bodenfläche zu verringern. 25
9. Reinigungssystem nach Anspruch 5, wobei 30
- der Behälter (111) der Kehrschaufel (100, 200) an vier Seiten von einer Bodenwanne (110, 210), zwei Seitenwänden (115, 215) und einer Rückwand (116) umschlossen ist, wobei das Gefäß (111) eine Lippe (105, 205) an einem freien Ende der Bodenwanne (110, 210) gegenüber der Rückwand (116) aufweist; 35
- wobei der Griff (130, 235) mit der Rückwand (116) verbunden ist und sich gegenüber dem Behälter erstreckt, wobei der Griff (130, 235) eine gekrümmte Form hat, die am Bodenpolster 40
- 50
- 55

(137) endet, wobei die Kehrschaufel (100, 200) so konfiguriert ist, dass sie die flache Bodenoberfläche nur entlang des Bodenpolsters (137) und der Lippe (105, 205) berührt, wenn sie sich in einer Ruheposition befindet; 5

mindestens einen Fuß (140), der an einer Außenfläche des Behälters (111) angeordnet ist; einen Teil zum Drauftreten (136), der auf dem Griff (130, 235) definiert ist, wobei der Trittabschnitt (136) so konfiguriert ist, dass er eine Oberfläche für einen Benutzer zum Aufbringen einer Kraft bereitstellt; 10

wobei, wenn die Kraft auf den Teil zum Drauftreten (136) ausgeübt wird, die Kehrschaufel von der Ruheposition in eine Betriebsposition übergeht, in der sich der Griff (130, 235) verformt, um es dem mindestens einen Fuß (140) zu ermöglichen, die flache Bodenoberfläche weiter zu berühren und einen Winkel zwischen der Lippe (105, 205) und der flachen Bodenoberfläche zu verringern. 15

Revendications

1. Balai (300), comprenant :

un manche allongé (305) ayant une première extrémité et une deuxième extrémité ;
un bloc de balai (310) raccordé à la première extrémité du manche allongé ;
une première pluralité de poils (315) raccordée à une première section du bloc de balai ;
dans lequel la première pluralité de poils définit une tête de balai (320), la tête de balai ayant une extrémité de balayage, **caractérisé en ce que** l'extrémité de balayage comprend :

deux sections planes (321), chacune ayant une forme allongée,
dans lequel les deux sections planes (321) sont disposées selon un angle l'une par rapport à l'autre et coupent un bord inférieur (322) pour définir un biseau le long de l'extrémité de balayage de la tête de balai (320). 25

2. Balai (300) selon la revendication 1, comprenant en outre une deuxième pluralité de poils raccordée à une deuxième section du bloc de balai (310), dans lequel des parties de la deuxième section sont disposées de part et d'autre de la première section le long du bloc de balai. 30

3. Balai (300) selon la revendication 2, dans lequel la tête de balai (320) est en outre définie par la deuxième pluralité de poils. 35

4. Balai (300) selon l'une des revendications 1 à 3, dans 40

lequel les deux sections planes (321) sont en outre définies entre deux bords latéraux qui coïncident avec deux surfaces externes correspondantes de la tête de balai (320).

5. Système de nettoyage, comprenant :

un balai (300) selon l'une des revendications 1 à 4 ;

une pelle à poussière (100, 200) ayant un récipient (111) raccordé à un manche (130, 235), le manche (130, 235) ayant un canal cylindrique (125) avec des tenons de verrouillage (123, 225) qui peut être fixé de façon amovible au manche allongé (305) du balai (300) ;

dans lequel le manche (130, 235) comporte en outre un patin de sol (137) à l'opposé de son raccordement au récipient (111), et dans lequel le récipient comporte une lèvre (105, 205) disposée à l'opposé de son raccordement au manche (130, 235) de telle sorte que lorsque la pelle à poussière (100, 200) est détachée du balai (300) et repose sur une surface de sol plate dans une position au repos, la pelle à poussière (100, 200) touche la surface de sol plate uniquement le long du patin de sol (137) et de la lèvre (105, 205), et les parties restantes du manche (130, 235) et du récipient (111) soient suspendues au-dessus de la surface de sol plate.

6. Système de nettoyage selon la revendication 5, dans lequel le récipient (111) est entouré de quatre côtés par un bac inférieur (110, 210), deux parois latérales (115, 215) et un panneau arrière (116), et dans lequel la lèvre (105, 205) est à une extrémité libre du bac inférieur (110, 210), à l'opposé du panneau arrière (116).

7. Système de nettoyage selon l'une des revendications 5 et 6, comprenant en outre au moins un pied (140) disposé sur la surface extérieure du récipient (111),

le système de nettoyage comprenant en outre de préférence : une partie à pédale (136) définie sur le manche (130, 235), la partie à pédale (136) étant configurée pour fournir une pédale afin de permettre à un utilisateur d'appliquer une force ; dans lequel lorsque la force est appliquée sur la pédale, la pelle à poussière passe de la position au repos à une position de fonctionnement dans laquelle le manche (130, 235) se déforme pour permettre à l'au moins un pied (140) de toucher davantage la surface de sol plate et de réduire un angle entre la lèvre (105, 205) et la surface de sol plate.

8. Système de nettoyage selon l'une des revendications 5 à 7, dans lequel la pelle à poussière (100, 200) est configurée de telle sorte que lorsqu'un uti-

lisateur applique une force sur la partie à pédale (136) du manche (130, 235), la pelle à poussière (100, 200) passe de la position au repos à une position de fonctionnement dans laquelle le manche (130, 235) se déforme pour permettre à au moins un pied (140) raccordé au récipient (111) et s'étendant au-dessous d'une surface inférieure (110, 210) du récipient (111) de toucher davantage la surface de sol plate et de réduire un angle entre la lèvre (105, 205) et la surface de sol plate.

9. Système de nettoyage selon la revendication 5, dans lequel

le récipient (111) de la pelle à poussière (100, 200) est entouré des quatre côtés par un bac inférieur (110, 210), deux parois latérales (115, 215) et un panneau arrière (116), le récipient (111) comportant une lèvre (105, 205) à une extrémité libre du bac inférieur (110, 210), à l'opposé du panneau arrière (116) ;

le manche (130, 235) étant raccordé au panneau arrière (116) et s'étendant à l'opposé du récipient, le manche (130, 235) ayant une forme incurvée qui se termine au patin de sol (137), la pelle à poussière (100, 200) étant configurée pour toucher la surface de sol plate uniquement le long du patin de sol (137) et de la lèvre (105, 205) lorsqu'elle est dans une position de repos ; au moins un pied (140) disposé sur une surface extérieure du récipient (111) ;

une partie à pédale (136) définie sur le manche (130, 235), la partie à pédale (136) étant configurée pour fournir une pédale afin de permettre à un utilisateur d'appliquer une force ;

dans lequel lorsque la force est appliquée sur la partie à pédale (136), la pelle à poussière passe de la position au repos à une position de fonctionnement dans laquelle le manche (130, 235) se déforme pour permettre à l'au moins un pied (140) de toucher davantage la surface de sol plate et de réduire un angle entre la lèvre (105, 205) et la surface de sol plate.

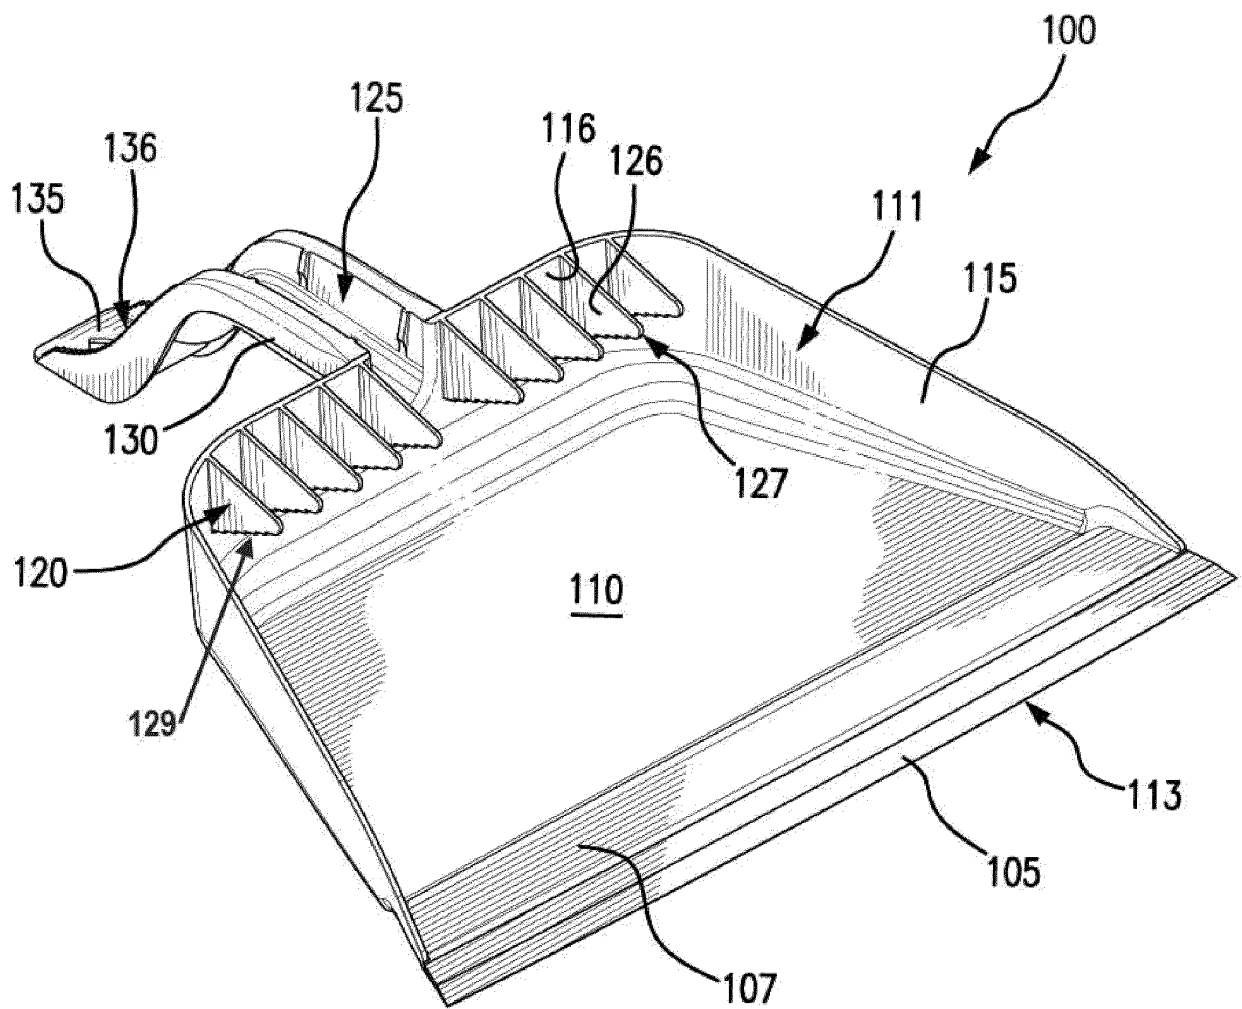


FIG. 1

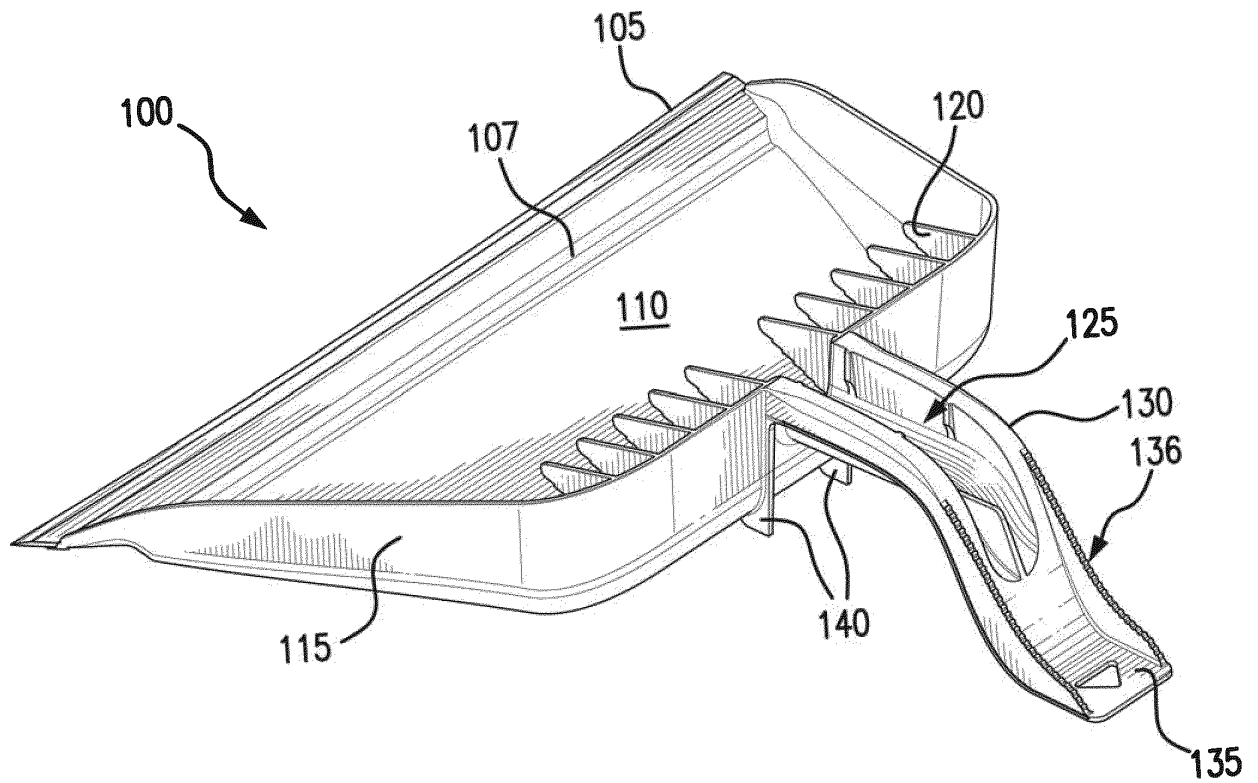
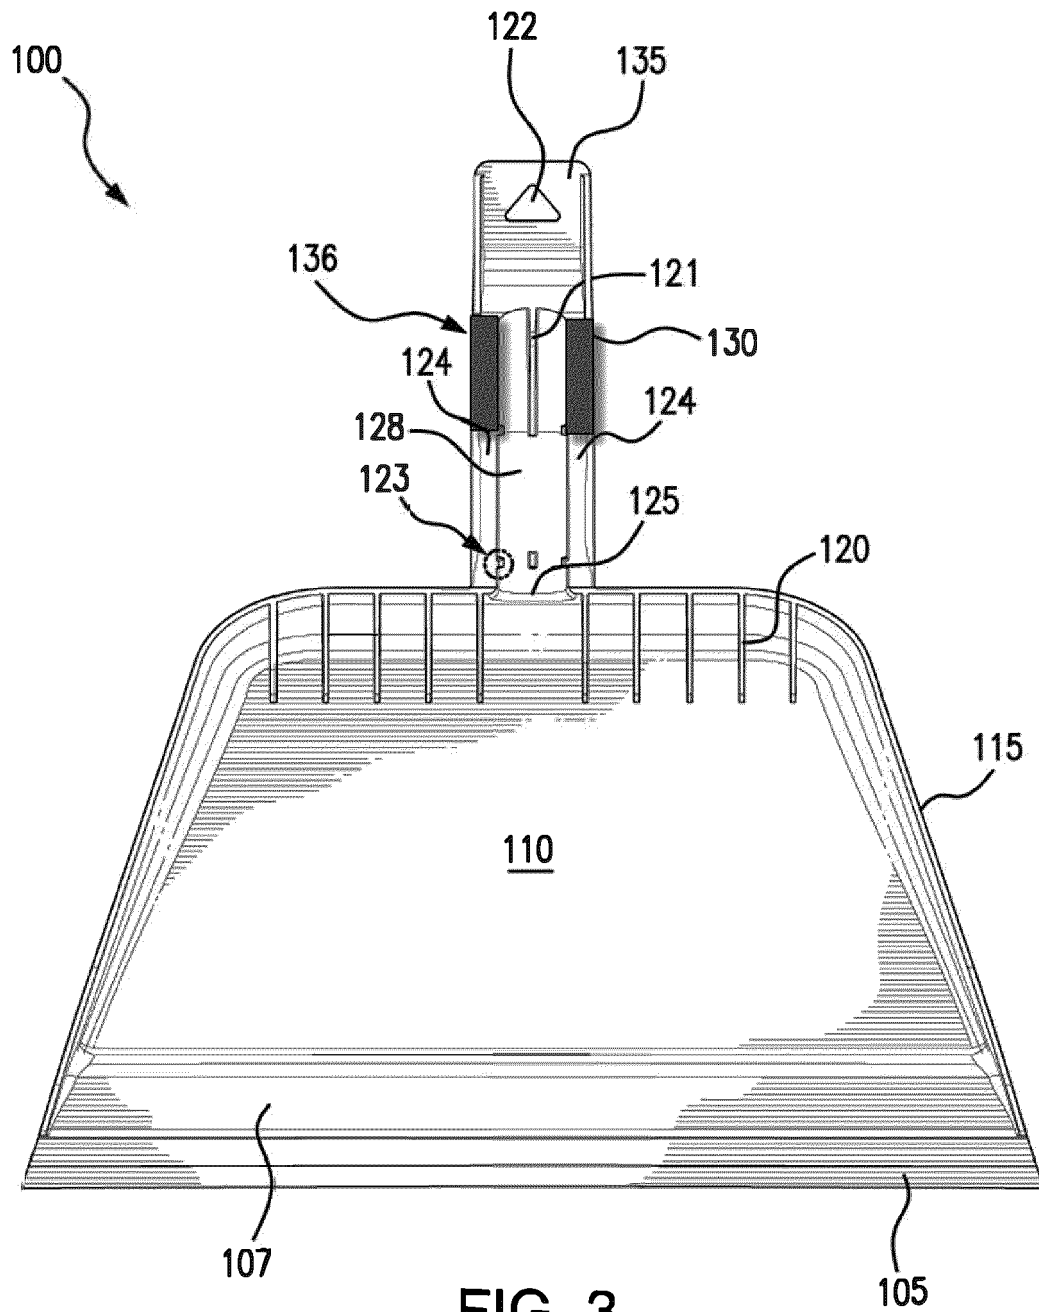
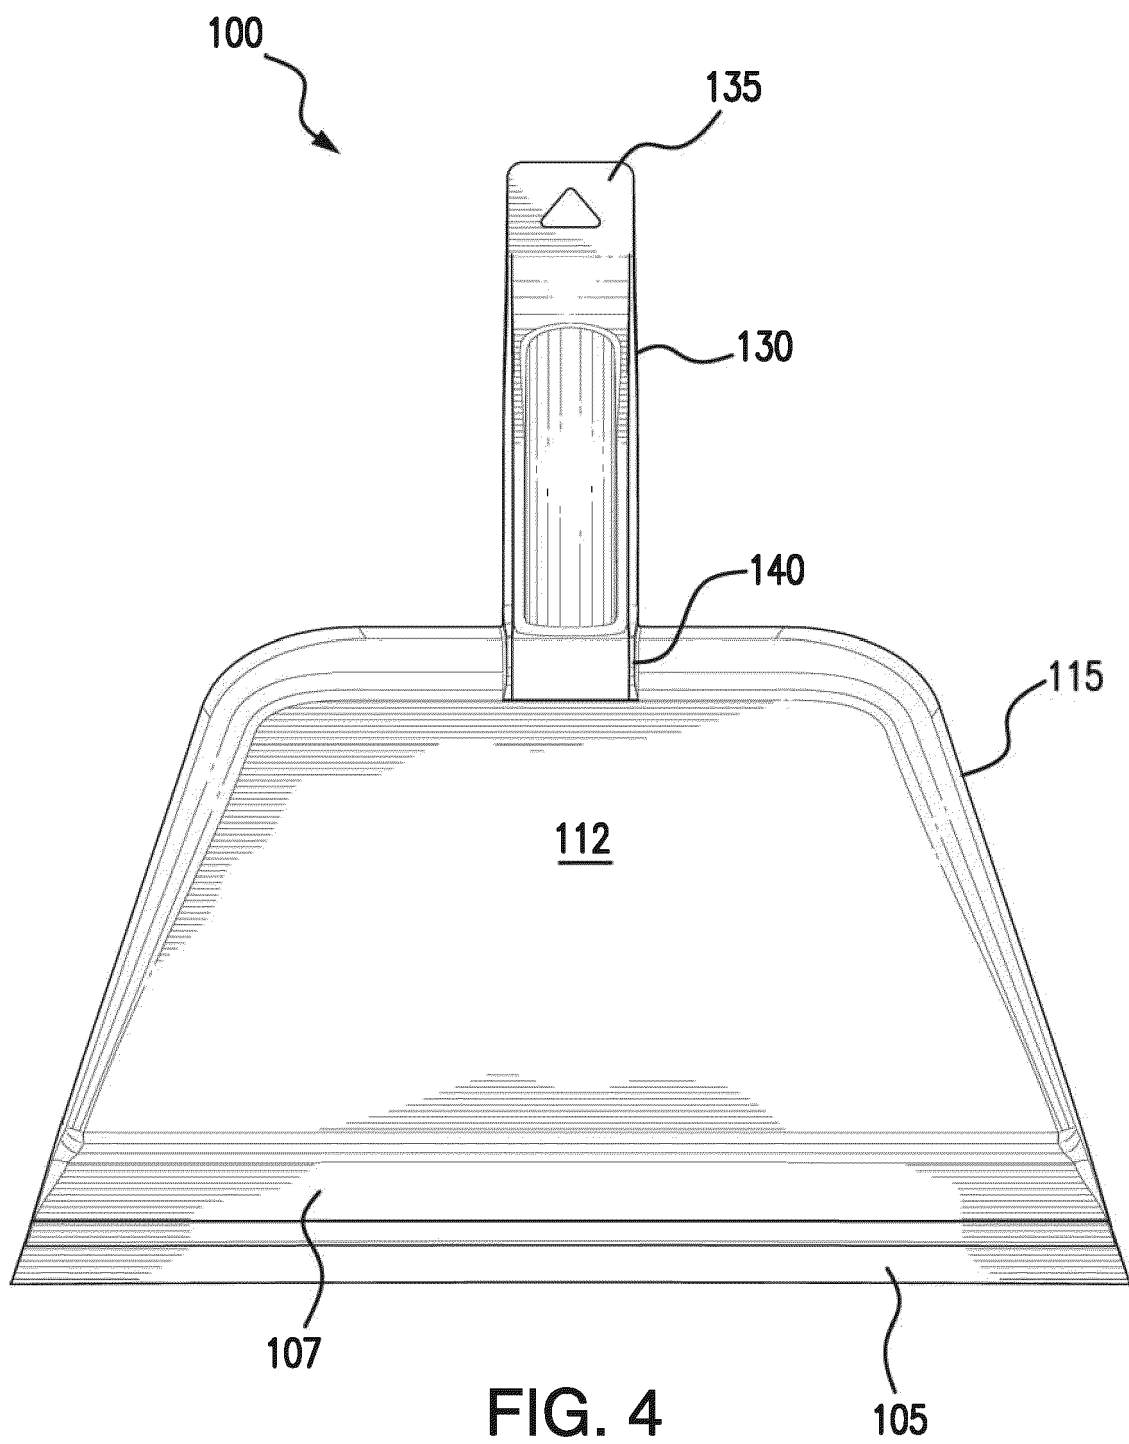


FIG. 2





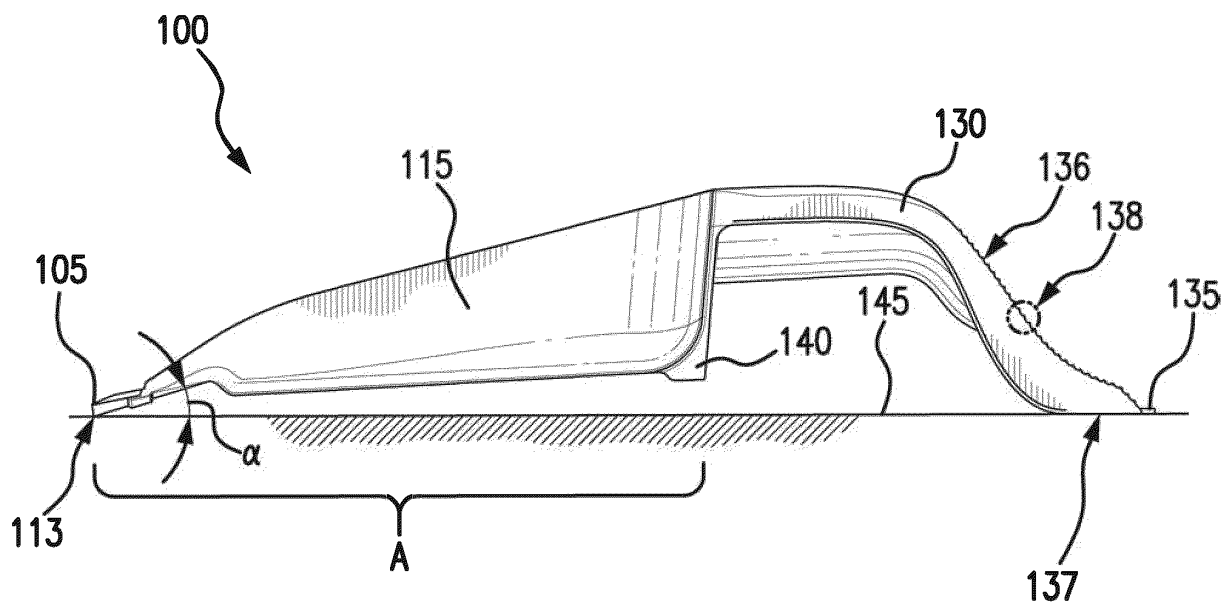


FIG. 5

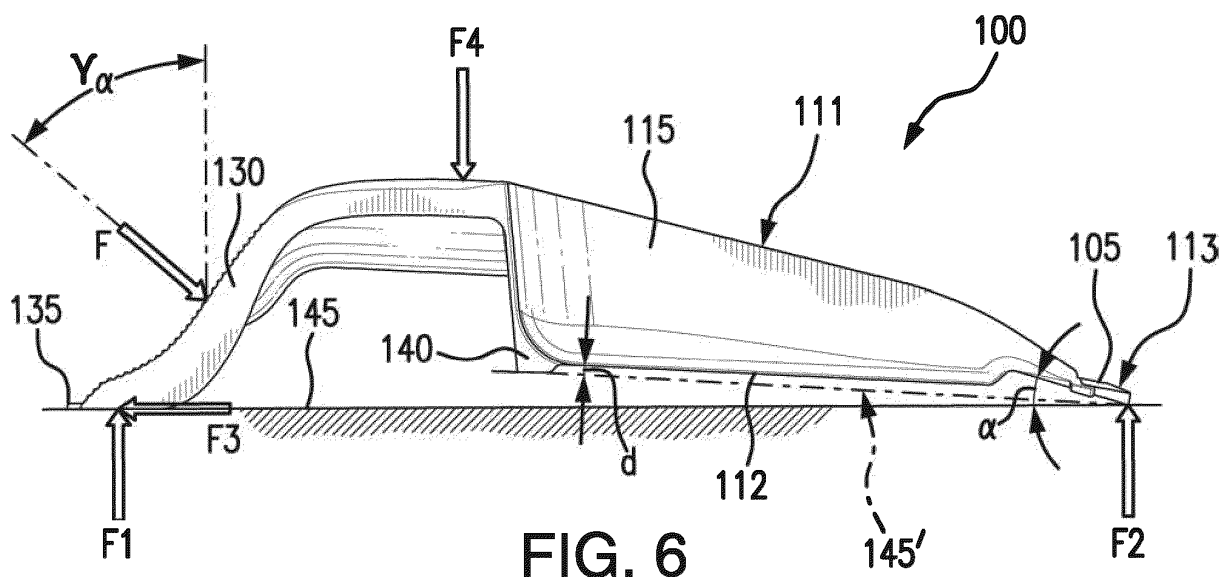


FIG. 6

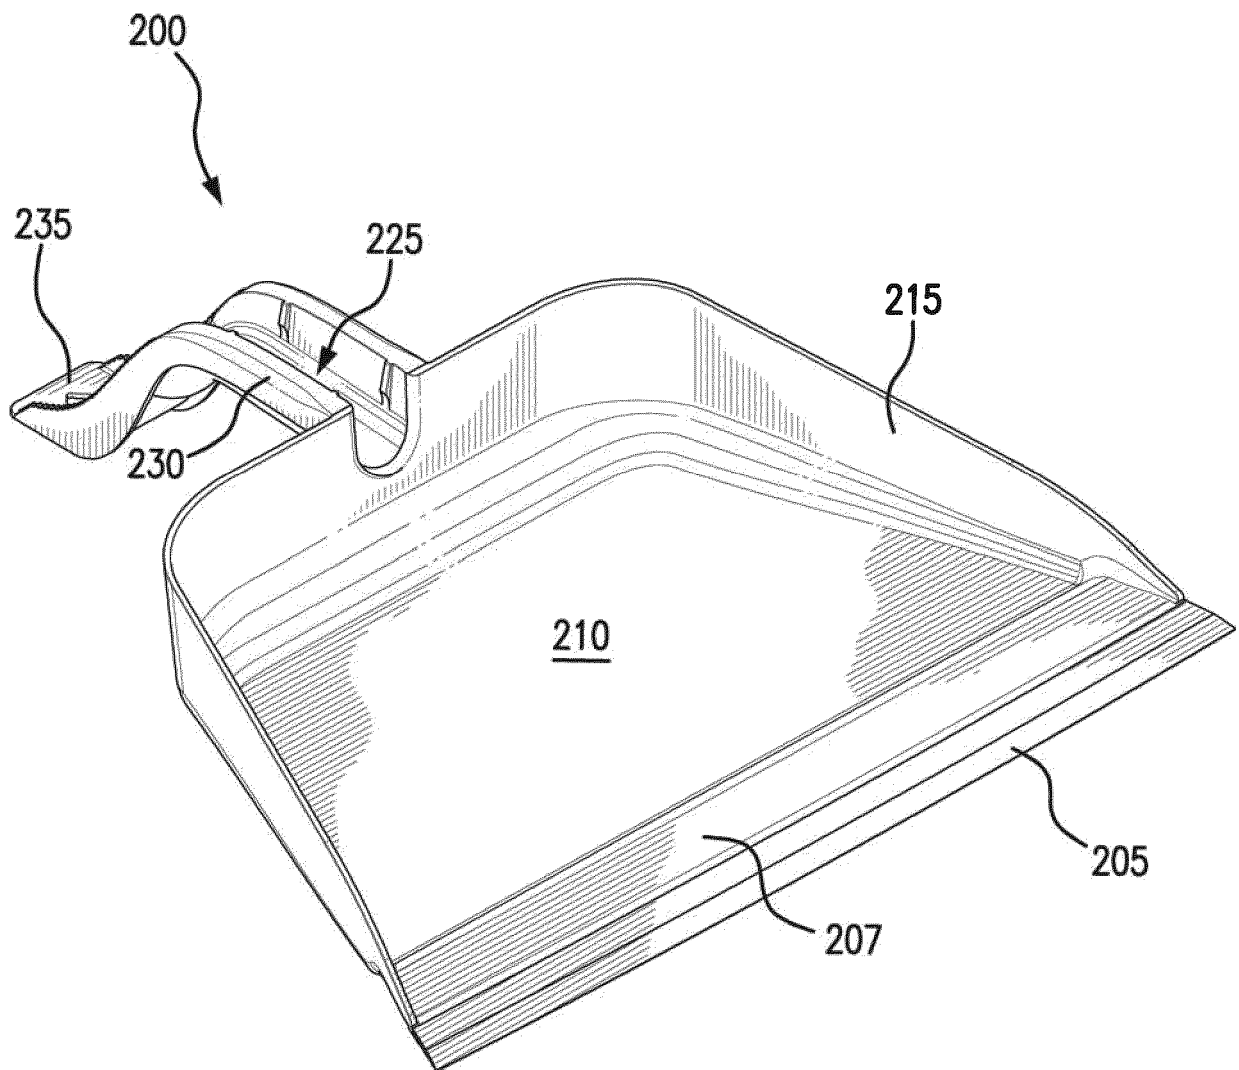


FIG. 7

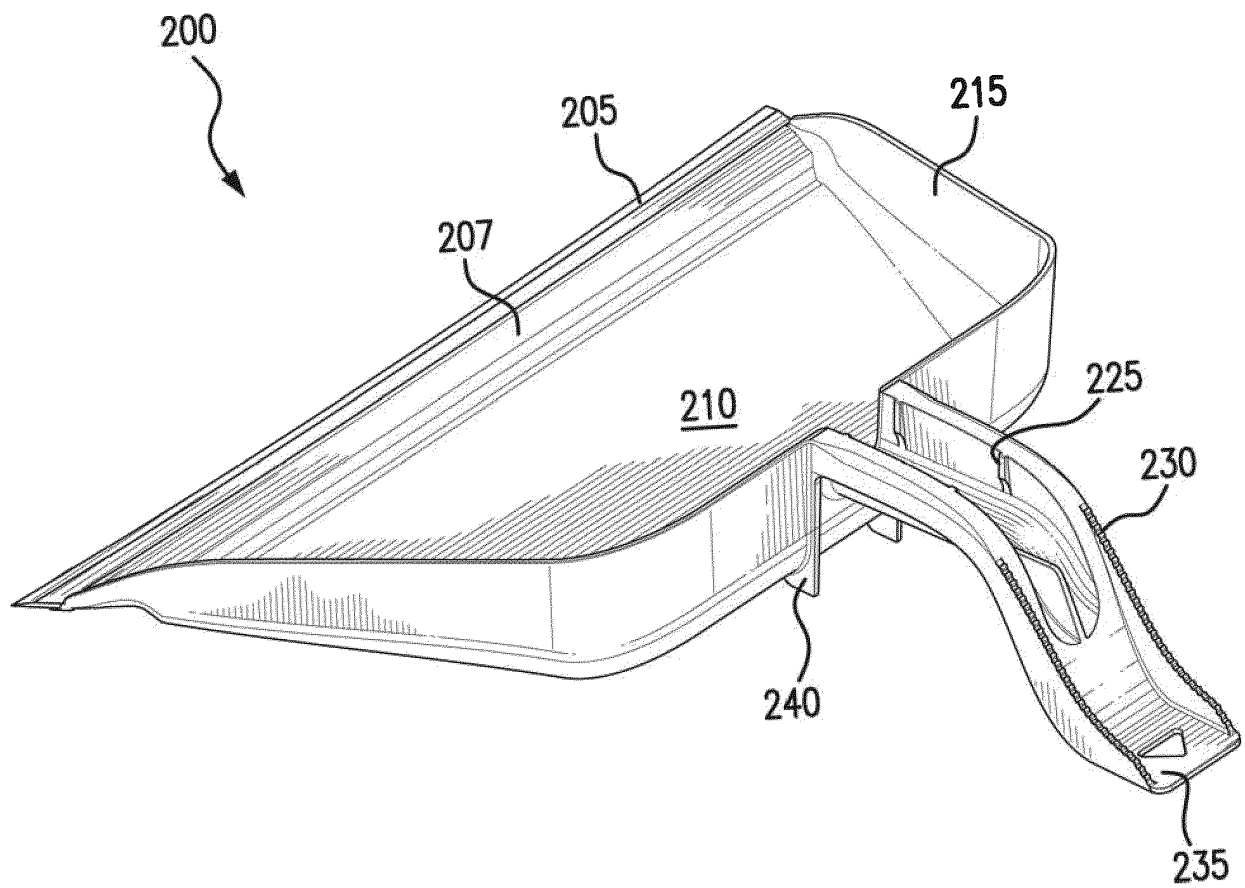


FIG. 8

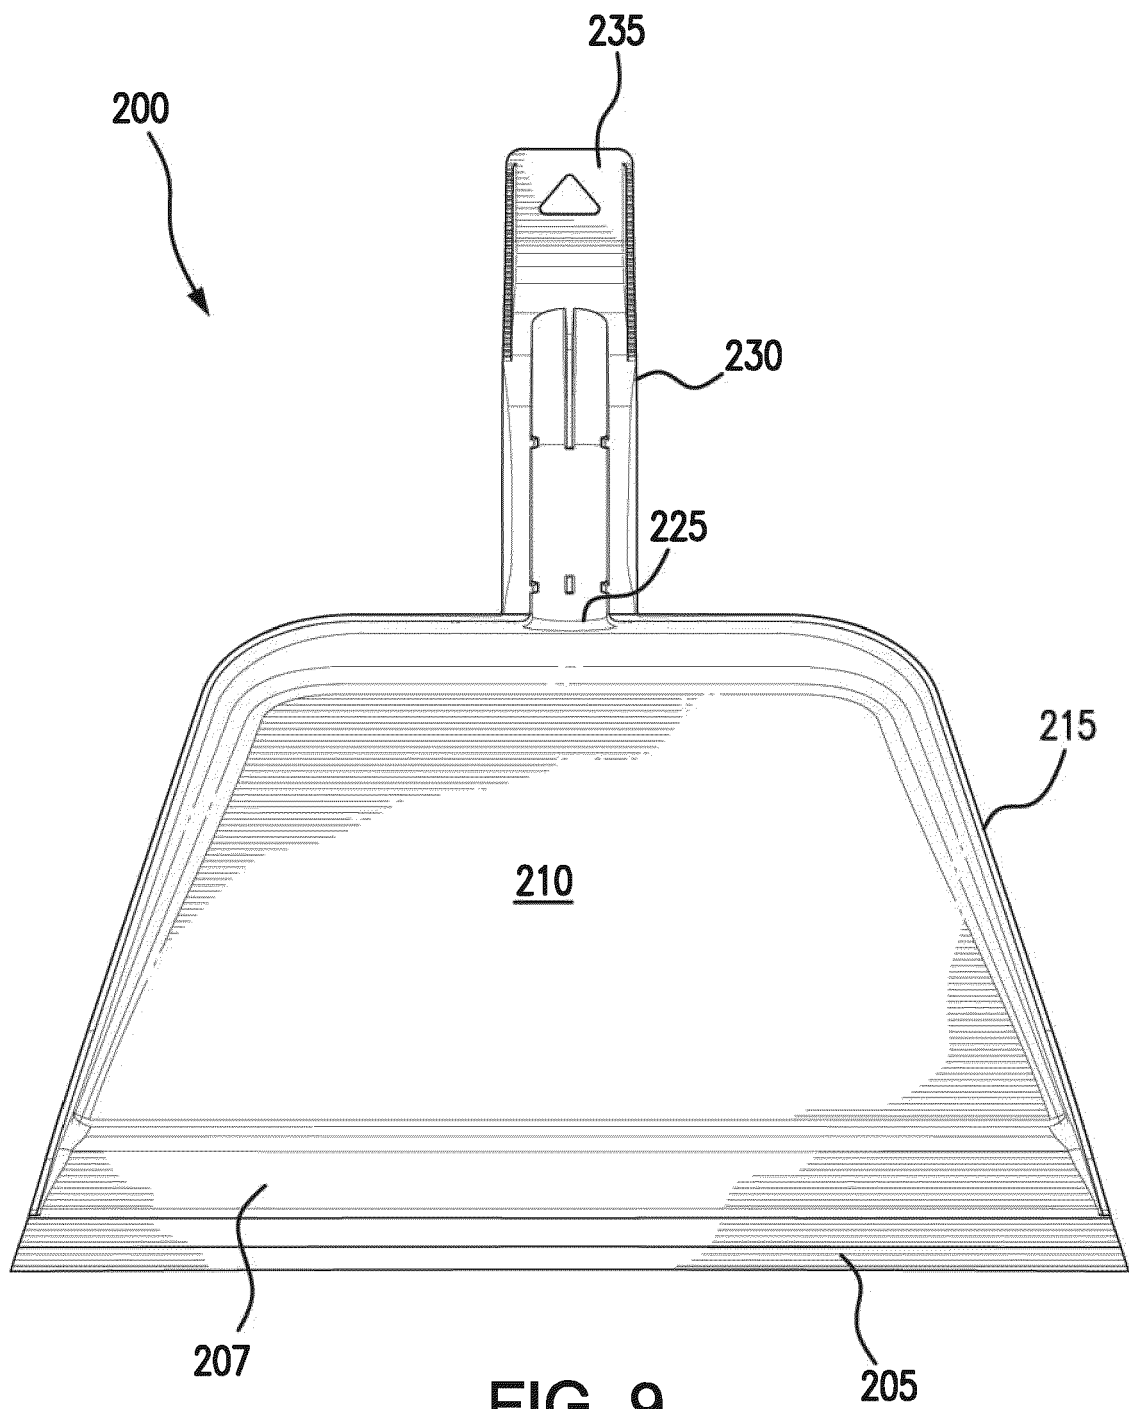


FIG. 9

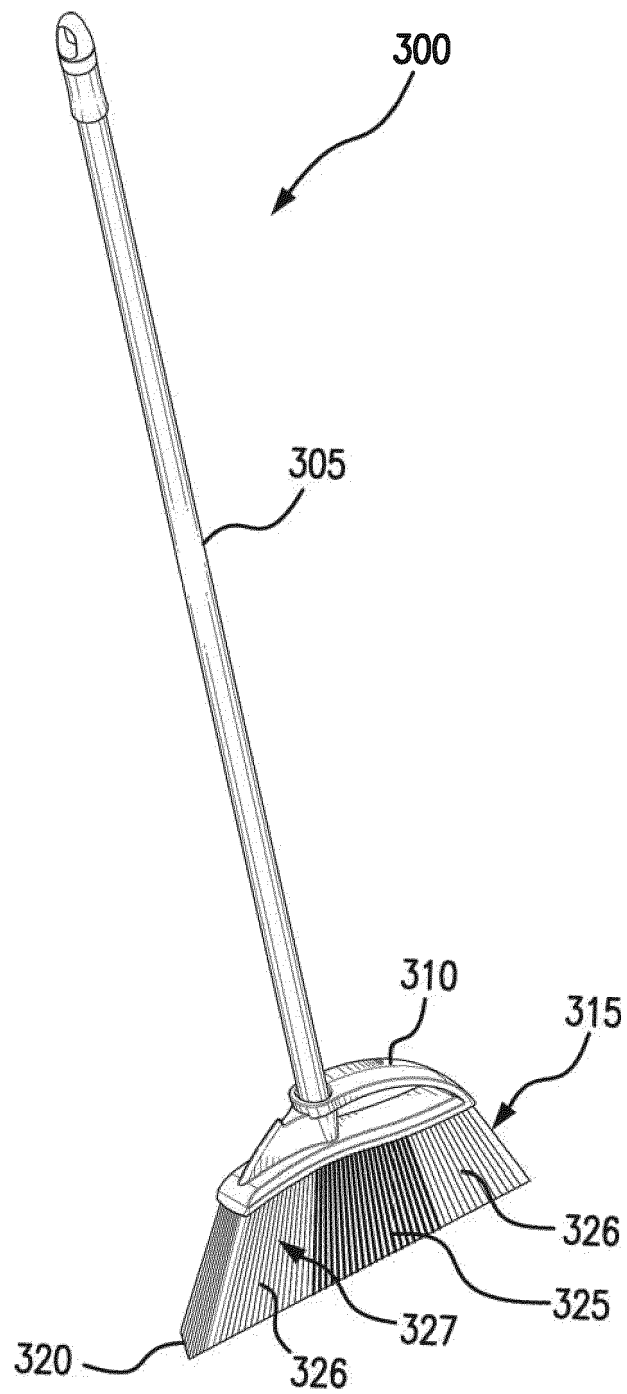
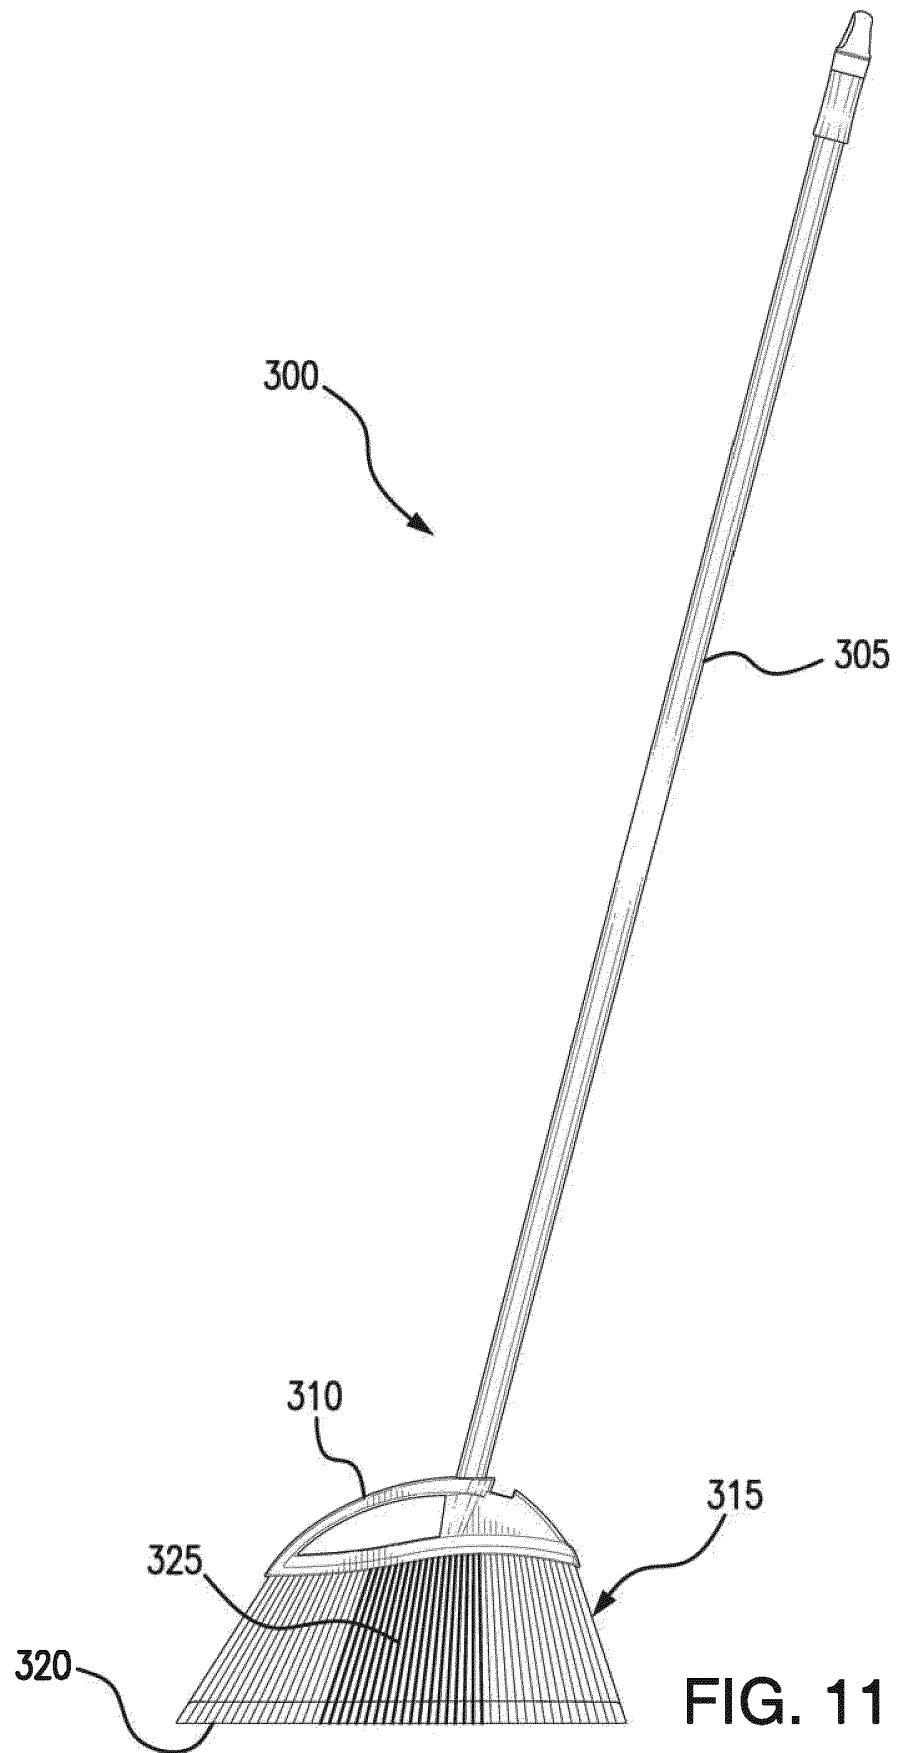
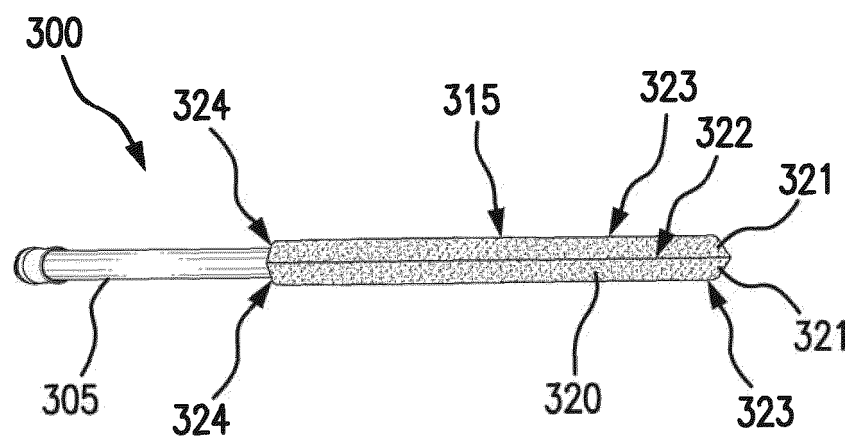
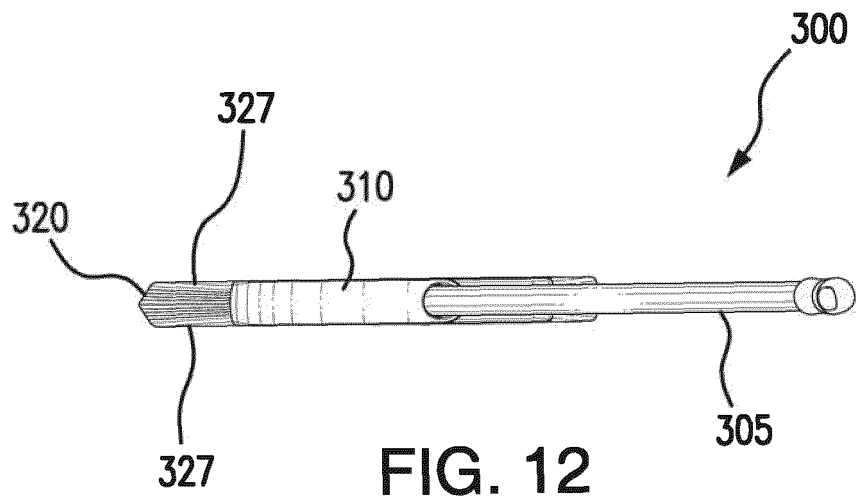


FIG. 10







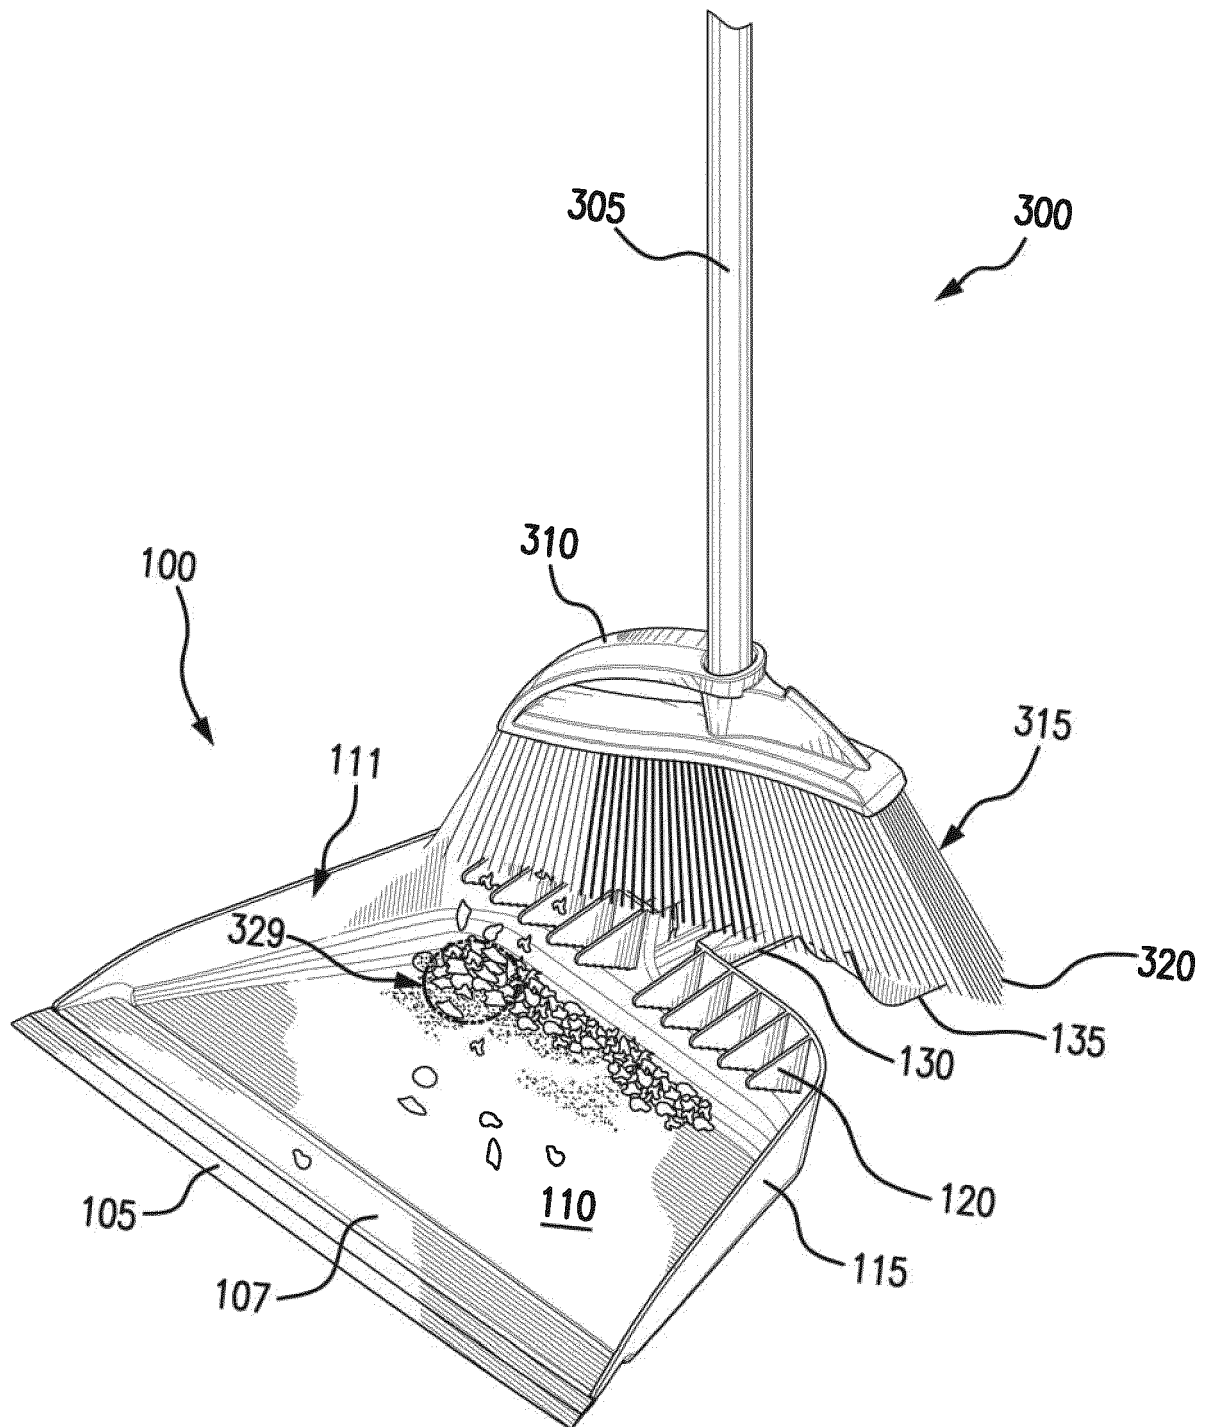


FIG. 14

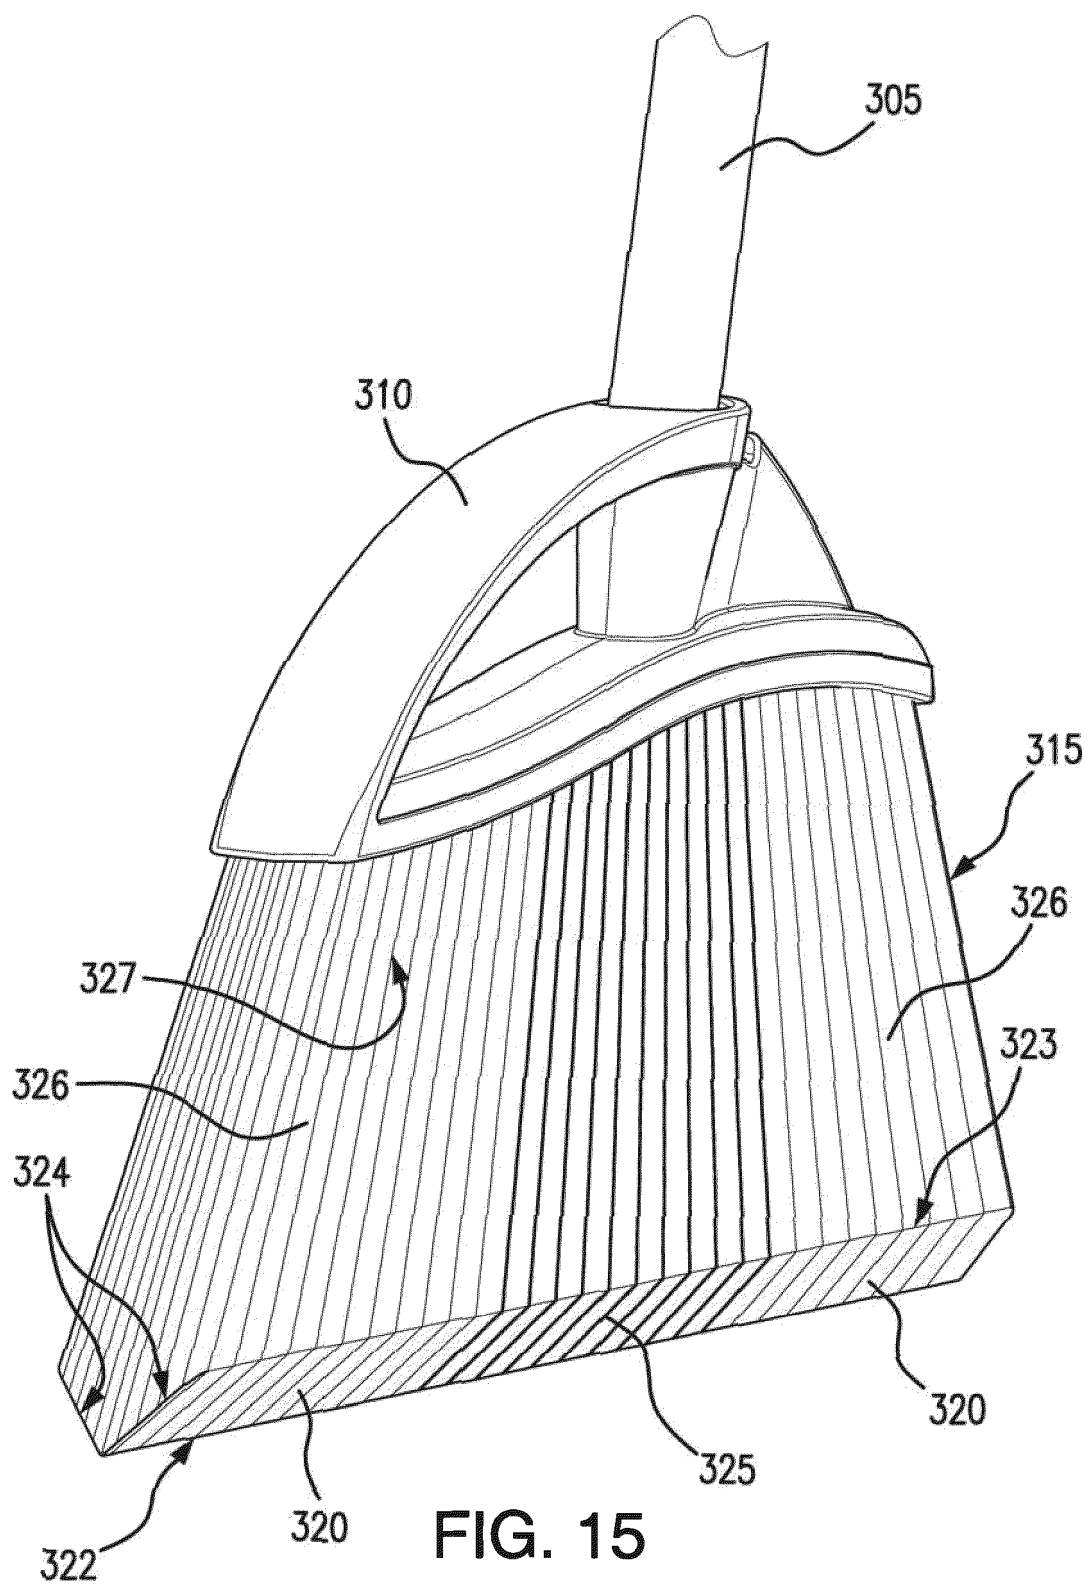

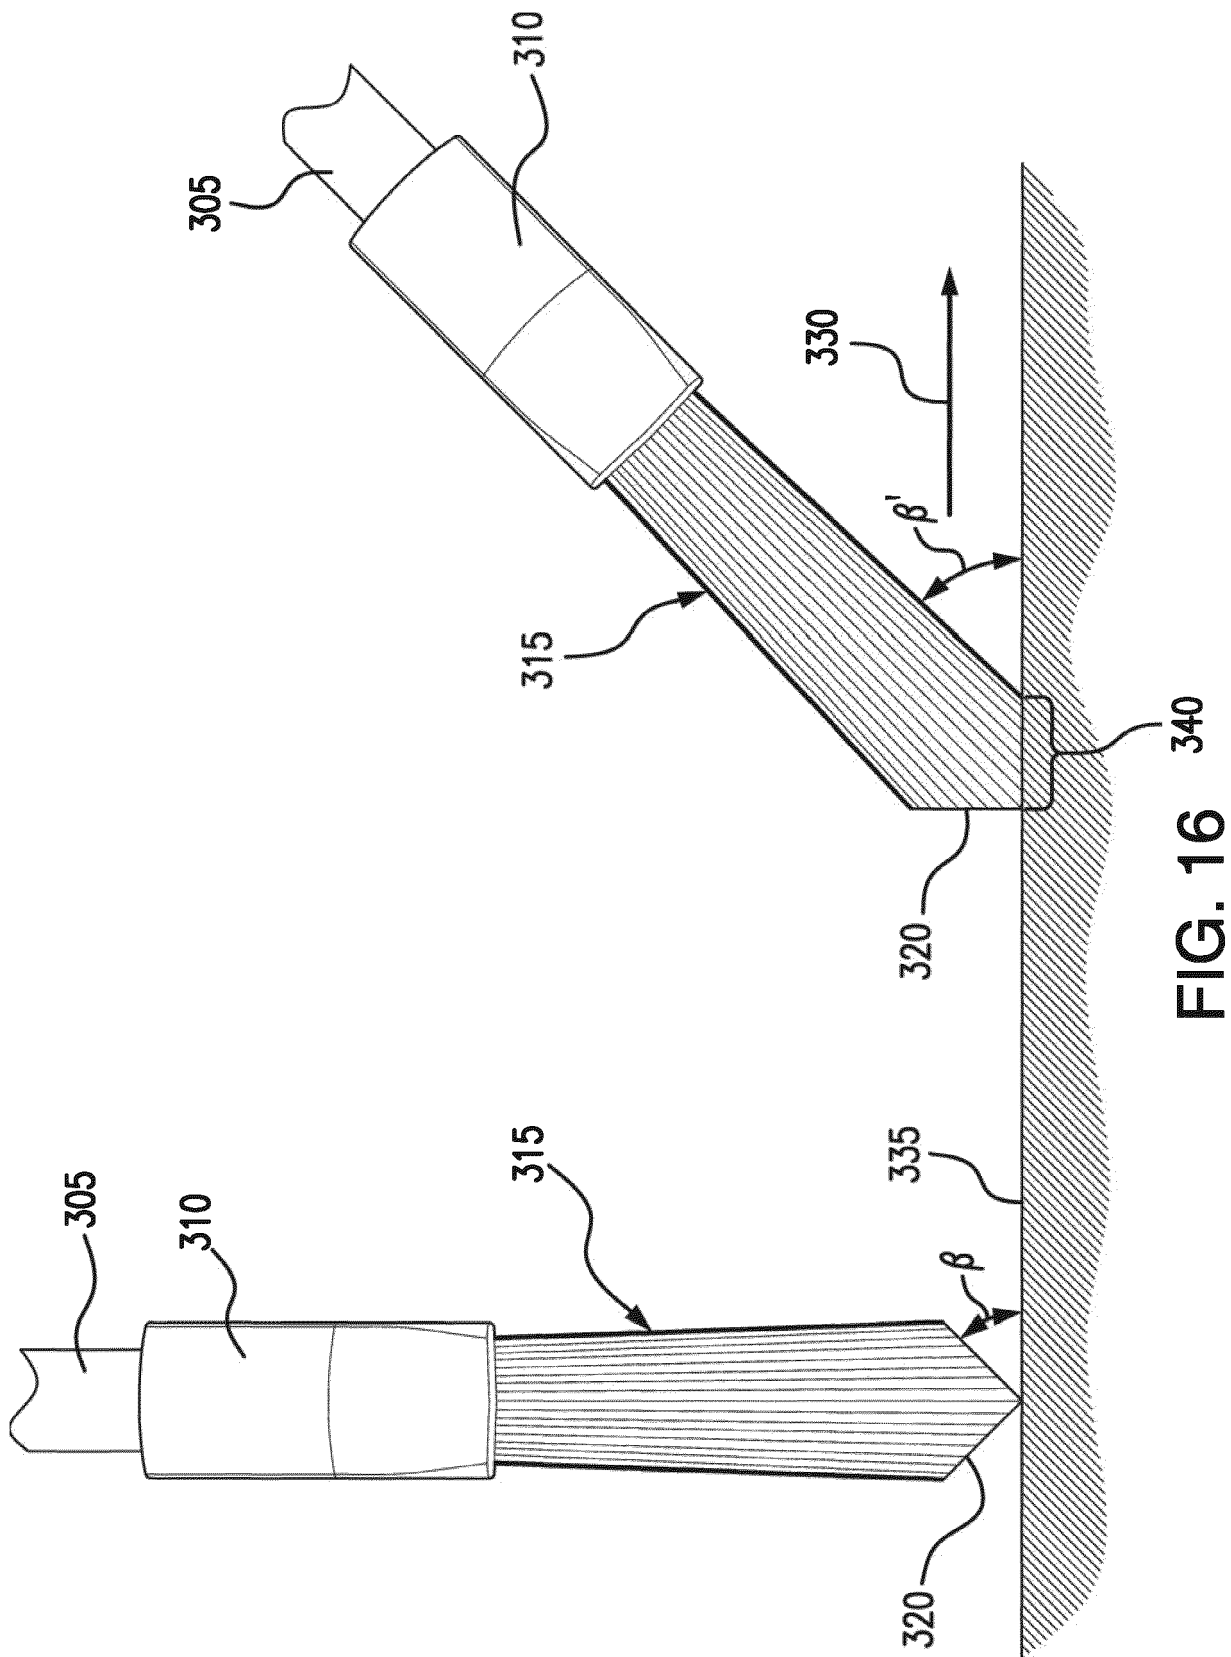

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2007068026 A1 **[0001]**
- US 20120260453 A1 **[0002]**
- US 8875339 B, Dobson **[0003]**