

(19)



(11)

EP 3 202 525 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.08.2020 Bulletin 2020/33

(51) Int Cl.:
B23K 26/342 ^(2014.01) **B29C 67/00** ^(2017.01)

(21) Application number: **16167723.2**

(22) Date of filing: **29.04.2016**

(54) **THREE-DIMENSIONAL OBJECT GENERATING APPARATUS AND METHOD FOR CALIBRATING THEREOF**

VORRICHTUNG ZUR ERZEUGUNG EINES DREIDIMENSIONALEN OBJEKTS UND VERFAHREN ZUR KALIBRIERUNG DAVON

APPAREIL DE GÉNÉRATION D'OBJET TRIDIMENSIONNEL ET PROCÉDÉ D'ÉTALONNAGE DE CELUI-CI

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **02.02.2016 CN 201610072685**

(43) Date of publication of application:
09.08.2017 Bulletin 2017/32

(73) Proprietors:
• **XYZprinting, Inc.**
New Taipei City 22201 (TW)
• **Kinpo Electronics, Inc.**
New Taipei City 22201 (TW)

(72) Inventors:
• **CHOU, Ching-Yuan**
22201 Shenkeng Dist., New Taipei City (TW)
• **DING, Min-Hsiung**
22201 Shenkeng Dist., New Taipei City (TW)

(74) Representative: **2K Patentanwälte Blasberg
Kewitz & Reichel
Partnerschaft mbB
Schumannstrasse 27
60325 Frankfurt am Main (DE)**

(56) References cited:
US-A- 6 129 884 US-A1- 2015 145 177

EP 3 202 525 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to an optical apparatus and a method for calibrating the optical apparatus. More particularly, the present disclosure relates to a three-dimensional (3D) object generating apparatus and a method for calibrating the 3D object generating apparatus.

Description of Related Art

[0002] Additive manufacturing, three-dimensional (3D) printing, and rapid prototyping are technologies for rapidly generating 3D object. The 3D information for generating 3D object may be made by software (such as CAD) or 3D object scanner.

[0003] Stereolithography is a method and apparatus for making 3D object by successively printing thin layers of a curable material one on top of the other. A programmed movable beam shining on a surface or layer of UV curable liquid is used to form a solid cross-section of the object at the surface of the liquid. The object is then moved, in a programmed manner, away from the liquid surface by the thickness of one layer, and the next cross-section is then formed and adhered to the immediately preceding layer defining the object. This process is continued until the entire object is formed.

[0004] US 2015/145177 A1 discloses a three-dimensional (3D) object generating apparatus according to the preamble of claim 1. Measures for stabilizing the optical power in the flat-field scanning route are not disclosed.

[0005] US 6 129 884 A discloses a three-dimensional (3D) object generating apparatus, wherein the optical power of a laser power source is controlled based on the signal of a photo detector sensing the optical power in the flat-field scanning route. Control of laser output occurs based on a combination of supplying a regulated amount of voltage to an acusto-optic modulator (AOM) located between the laser power source and a downstream frequency conversion element.

SUMMARY OF THE INVENTION

[0006] It is an object of the present invention to enable a three-dimensional (3D) object generating apparatus to generate a three-dimensional (3D) object more precisely, particularly under more constant conditions.

[0007] This problem is solved by a method as claimed by claim 1 and by a three-dimensional (3D) object generating apparatus as claimed by claim 5. Further advantageous embodiments are the subject-matter of the dependent claims.

[0008] According to one aspect of the present disclosure, a method for calibrating an optical power adapted

to be performed by a three-dimensional (3D) object generating apparatus comprising a laser light generator for generating a linear beam and a flat-field convergent lens, wherein a flat-field scanning route is formed when the linear beam passes through the flat-field convergent lens, the method comprising: providing a flat-field optical sensor, a photo detector and a controller, wherein the flat-field optical sensor is positioned on the flat-field scanning route, the photo detector is positioned between the laser light generator and the flat-field convergent lens, and the controller is electrically connected to the flat-field optical sensor, the photo detector and the laser light generator; using the flat-field optical sensor to sense an optical power of the linear beam having passed through the flat-field convergent lens and send a sensed signal based on the sensed optical power to the controller; using the photo detector to detect an optical power of the linear beam that does not pass through the flat-field convergent lens and send a detected signal based on detected optical power to the controller; and using the controller to calibrate or adjust an optical power of the laser light generator based on the sensed signal from the flat-field optical sensor and the detected signal from the photo detector, particularly to provide a constant optical power.

[0009] According to a related aspect of the present disclosure, a three-dimensional (3D) object generating apparatus includes an optical-transparent component, a laser light generating module and a controller. The optical-transparent component includes a working region. The laser light generating module includes a light emitter for outputting a spot beam, a polygon mirror, a flat-field convergent lens, and a flat-field optical sensor. The polygon mirror is rotatable around an axis for (re)directing the spot beam into a linear beam. The flat-field convergent lens is positioned between the laser light generating module and the optical-transparent component, and a flat-field scanning route is formed by the linear beam which has passed through the flat-field convergence lens, and the working region is within coverage of the flat-field scanning route. The flat-field optical sensor is disposed between the flat-field convergent lens and the optical-transparent component and is positioned on the flat-field scanning route, wherein the flat-field optical sensor is configured to sense an optical power of the linear beam and generates a sensed signal based on the optical power of the linear beam having passed the flat-field convergent lens. Furthermore, a photo detector is positioned between the laser light generating module and the flat-field convergent lens, wherein the photo detector is configured to detect an optical power of the linear beam that does not pass the flat-field convergent lens and to generate a detected signal. The controller is electrically connected to the laser light generating module, the flat-field optical sensor and the photo detector, and the controller receives the sensed signal from the flat-field optical sensor and the detected signal from the photo detector and calibrates or adjusts the optical power of the spot beam based on the sensed signal from the flat-field optical sen-

sor and the detected signal from the photo detector.

BRIEF DESCRIPTION OF DRAWING

[0010] The features of the invention believed to be novel are set forth with particularity in the appended claims. The invention itself, however, may be best understood by reference to the following detailed description of the invention, which describes an exemplary embodiment of the invention, taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a schematic view of a three-dimensional (3D) object generating apparatus according to the present disclosure;

FIG. 2 is a sectional view of the 3D object generating apparatus according to the present disclosure;

FIG. 3 is a top view of the 3D object generating apparatus according to the present disclosure;

FIG. 4 is a sectional view of the of the 3D object generating apparatus according to the present disclosure; and

FIG. 5 is a circuit block diagram of the 3D object generating apparatus according to the present disclosure.

DETAILED DESCRIPTION OF THE INVENTION

[0011] A preferred embodiment of the present invention will be described with reference to the drawings.

[0012] Reference is made to FIG. 1 and FIG. 2; FIG 1 is a schematic view of a schematic view of a three-dimensional (3D) object generating apparatus according to the present disclosure; FIG. 2 is a sectional view of the 3D object generating apparatus according to the present disclosure. The 3D object generating apparatus (its reference numeral is omitted) includes an optical-transparent component 100, a laser light generating module 160, a flat-field optical sensor 20, and a housing 4. The housing 4 has an accommodating space 40 and an opening 42 communicating with the accommodating space 40. The optical-transparent component 100 is placed on the opening 42. More particularly, the 3D object generating apparatus may further include an adhesive placed between the optical-transparent component 100 and the housing 4 for fastening the optical-transparent component 100 on the housing 4. The housing 4 further includes at least one sliding rail 44, as can be seen in FIG. 1, wherein the sliding rail 44 is positioned on an inner surface facing the optical-transparent component 100, and the laser light generating module 160 is assembled with the sliding rail 44, so that the laser light generating module 160 can move along the sliding rail 44.

[0013] The optical-transparent component 100 includes a working region 102 and a periphery region 104 surrounding the working area 102. A fluid medium 5 (such as photocurable resin) for producing a 3D object is arranged on the optical-transparent component 100 and in

the work region 102. The periphery region 104 of the optical-transparent component 100 is, for example, connected to the housing 4.

[0014] Reference is made to FIG 4. The laser light generating module 160 includes a photo detector 110, a focusing lens 112, a laser light generator 120, a flat-field convergent lens 140, and a reflector 150. The laser light generator 120 is configured to generate a linear beam. The flat-field convergent lens 140 positioned between the laser light generator 120 and the optical-transparent component 100 allows the linear beam passing there through and then a flat-field scanning route is formed. The working region 102 is within a coverage of the flat-field scanning route, thus the 3D object can be generated within the fluid medium 20 which is selectively cured by the linear beam generated by the laser light generator 120 brought to selective focus prescribed by a 3D model information entering the 3D object generating apparatus.

[0015] The laser light generator 120 includes a light emitter 122 and a light adjusting unit 124. The light emitter 122 is, for example, a laser diode, and is configured to emit a spot beam (a light beam which can be focused to very tiny spot). The light adjusting unit 124 includes a collimator 1240, a converging component 1242, and a polygon mirror 1244. The light adjusting unit 124 receives the spot beam emitted from the light emitter 122, and transmits the beam which is collimated (by the collimator 1240) and converged (by the converging component 1242) to the polygon mirror 1244. The polygon mirror 1244 is positioned in the optical path of the adjusted beam and is rotatable around an axis 1246 for directing the adjusted beam onto the flat-field convergent lens 140 and the reflector 150 and producing the linear beam. The light emitter 122, the collimator 1240 and the converging component 1242 may be assembled within a barrel 130 fixed onto a shell of the laser light generating module 160.

[0016] The flat-field optical sensor 20 is, for example, placed on the optical-transparent component 100, and the flat-field optical sensor 20 and the laser light generator 120 are arranged at the same side of the optical-transparent component 100. The flat-field optical sensor 20 may be placed within the working region 102 or the periphery region 104, and is configured to sense the optical power (also called laser power) of the linear beam passed through the flat-field convergent lens 140. The flat-field optical sensor 20 is, for example, made of a charge-coupled device (CCD) or a complementary metal-oxide-semiconductor device (CMOS).

[0017] The photo detector 110, the focusing lens 112, and the reflector 150 are positioned between the laser light generator 120 and the flat-field convergent lens 140. The reflector 150 and the focusing lens 112 are positioned between the polygon mirror 1244 and the photo detector 110 for forming an optical path to sense the optical power of the linear beam that does not pass through the flat-field convergent lens 140. More particularly, the reflector 150 may be mounted on the shell of the laser light generating module 160, and the focusing lens 112

is disposed between the reflector 150 and the photo detector 110 and may be positioned such that the focal point of the focusing lens 112 is on the photo detector 110 for deriving the laser power at a higher accuracy. In practice, the reflector 150 redirects a part of the linear beam from the polygon mirror 1244 to the focusing lens 112 positioned upstream from the photo detector 110, and the linear beam is then focused onto the photo detector 110. The photo detector 110 senses the optical power of the linear beam that does not pass through the flat-field convergent lens 140, and then generates a detected signal based on the sensed optical power of the linear beam that does not pass through the flat-field convergent lens 140.

[0018] Reference is made to FIG. 5, the photo detector 110 and the flat-field optical sensor 20 are electrically connected to the controller 40. The controller 40 is further electrically connected to the light emitter 122. The controller 40 may control the optical power of the spot beam emitted from the light emitter 122 based on the optical power of the linear beam sensed by the flat-field optical sensor 20. However, the controller 40 may also control the optical power of the spot beam emitted from the light emitter 122 based on a difference between the optical power of the linear beam sensed by the flat-field optical sensor 20 and that detected by the photo detector 110.

[0019] The controller 30 may have a lookup table providing related data for setting the optical power of the spot beam emitted from the light emitter 122 based on the optical power(s) of the linear beam sensed by the flat-field optical sensor 20 or/and detected by the photo detector 110; thus the controller 30 can obtain the optical power of the spot beam emitted from the light emitter 122 according to the lookup table while the optical power of the linear beam is sensed by the flat-field optical sensor 20 or/and detected by the photo detector 110.

[0020] It should be noted that the flat-field convergent lens 140 changes its transmittance and refractive properties with age. The controller 30 can determine whether the flat-field convergent lens 140 ages or not based on the optical power sensed by the flat-field optical sensor 20 and that detected by the photo detector 110 since the flat-field optical sensor 20 is configured to sense the optical power of the linear beam passing through the flat-field convergent lens 140 and the photo detector 110 is configured to detect the optical power of the linear beam that does not pass through the flat-field laser convergent lens 140. More particularly, when the flat-field convergent lens 140 ages, the optical power of the linear beam that has passed through the flat-field convergent lens 140 is less than that that does not pass through the flat-field convergent lens 140 since the material properties and refractive coefficient of the flat-field convergent lens 140 is changed. Thus the controller 40 may determine whether the flat-field convergent lens 140 ages or not based on the difference between the sensed signal and the detected signal. If the flat-field convergent lens 140 ages, the controller 30 may calibrate the optical power of the

spot beam emitted from the light emitter 122 to make the optical power of the linear beam that has passed through the aged flat-field convergent lens 140 to be constant for stabilizing the quality of the 3D object.

[0021] Besides, the controller 30 may generate a warning signal when the optical power of the linear beam that has passed through the flat-field laser convergent lens 20 is lower than a preset optical power to indicate to the user that the flat-field convergent lens 140 is inadequate to transmit a linear beam.

[0022] The calibrating procedure for calibrating the optical power of the linear beam of the 3D object generating apparatus may be performed before a 3D object generating procedure is performed; however, the calibrating procedure may also be performed while the 3D object generating procedure is performed or after the 3D object generating procedure has been performed.

[0023] The calibrating procedure for calibrating optical power of the 3D object generating apparatus starts with driving the laser light generator 120 to generate the linear beam by a controller 30, the linear beam is projected to the working region 102. The flat-field optical sensor 20 then senses the optical power of the linear beam and sends the sensed signal based on the sensed optical power to the controller 30.

[0024] Thereafter, the controller 30 obtains the optical power of the spot beam emitted from the light emitter 122 based on the lookup table and the sensed signal. When the optical power of the linear beam sensed by the flat-field optical sensor 20 is lower than the preset optical power for curing the fluid medium 5 and the optical power of the spot beam emitted from the light emitted 122 is higher than a normal operating optical power, the controller 30 increases the optical power of the spot beam emitted from the light emitter 122. On the contrary, when the optical power of the linear beam sensed by the flat-field optical sensor 20 is higher than the preset power and the optical power of the spot beam emitted from the light emitted 122 is higher than the normal operation optical power, the controller 30 decreases the optical power of the spot beam emitted from the light emitter 122. Therefore, the optical power of the linear beam that has passed through the flat-field convergent lens 120 can be calibrated to be constant, and the quality for generating the 3D object is stabilized.

[0025] Moreover, the controller 30 may output a warning signal when the photo power of the spot beam emitted from the light emitted 122 is lower than the normal operating photo power to indicate to the user that the fluid medium 5 cannot be well cured.

[0026] Furthermore, the controller 30 may calibrate the optical power of the spot beam emitted from the light emitter 122 based on the sensed signal generated by the flat-field optical sensor 20 and the detected signal generated by the photo detector 110.

[0027] To sum up, the present invention provides a method for calibrating the optical power of a 3D object generating apparatus that includes the optical-transpar-

ent component 100, the flat-field convergent lens 120, and laser light generator including a light emitter 112. The method starts with providing the flat-field optical sensor 20 and the controller 30; the flat-field optical sensor 20 is positioned on the optical-transparent component 100, and the controller 30 is electrically connected to the flat-field optical sensor 20 and the light emitter 122. The flat-field optical sensor 20 senses the optical power of the linear beam generated by the laser light generator 120 and passed through the flat-field convergent lens 140 and generates a sensed signal. The controller 30 calibrates the optical power of the spot beam emitted by the light emitter 122 based on the sensed signal when the optical power of the linear beam passed through the flat-field convergent lens 140 is different from the preset optical power to make the optical power of the linear beam passed through the flat-field convergent lens 140 for curing the fluid medium 5 to be constant.

Claims

1. A method for calibrating an optical power adapted to be performed by a three-dimensional (3D) object generating apparatus comprising a laser light generator (120) for generating a linear beam and a flat-field convergent lens (140), and a flat-field scanning route is formed when the linear beam passing through the flat-field convergent lens (140), the method comprising:

providing a flat-field optical sensor (20), a photo detector (110) and a controller (30), wherein the flat-field optical sensor (20) is positioned on the flat-field scanning route, the photo detector (110) is positioned between the laser light generator (120) and the flat-field convergent lens (140), and the controller (30) is electrically connected to the flat-field optical sensor (20), the photo detector (110) and the laser light generator (120);

using the flat-field optical sensor (20) to sense an optical power of the linear beam having passed through the flat-field convergent lens (140) and send a sensed signal based on sensed optical power to the controller (30);

using the photo detector (110) to detect an optical power of the linear beam that does not pass through the flat-field convergent lens (140) and send a detected signal based on detected optical power to the controller (30); and

using the controller (30) to calibrate an optical power of the laser light generator (120) based on the sensed signal from the flat-field optical sensor (20) and the detected signal from the photo detector (110).

2. The method of claim 1, further comprising:

using the controller (30) to increase the optical power of the linear beam generated by the laser light generator (120) when the optical power based on the sensed signal is higher than a normal operating optical power and lower than a preset optical power.

3. The method of claim 2, wherein the controller (30) senses a warning signal when the optical power based on the sensed signal is smaller than the normal operating optical power.

4. The method of any of the preceding claims, wherein the controller (30) makes the optical power of the linear beam be a constant.

5. A three-dimensional (3D) object generating apparatus comprising:

an optical-transparent component (100) comprising a working region (102);
a laser light generating module (160) comprising:

a light emitter (122) for outputting a spot beam;

a polygon mirror (1244) rotatable around an axis for directing the spot beam into a linear beam;

a flat-field convergent lens (140) positioned between the laser light generating module (160) and the optical-transparent component (100), wherein a flat-field scanning route is formed after the linear beam has passed through the flat-field convergence lens (140), and the working region (102) is within a coverage of the flat-field scanning route,

characterized in that

a flat-field optical sensor (20) is disposed between the flat-field convergent lens (140) and the optical-transparent component (100) and positioned on the flat-field scanning route, wherein the flat-field optical sensor (20) is configured to sense an optical power of the linear beam having passed the flat-field convergent lens (140) and to generate a sensed signal based on the optical power of the linear beam having passed the flat-field convergent lens (140);

a photo detector (110) positioned between the laser light generating module (160) and the flat-field convergent lens (140), wherein the photo detector (110) is configured to detect an optical power of the linear beam that does not pass the flat-field convergent lens (140) and to generate a detected signal; and
a controller (30) electrically connected to the laser light generating module (160), the

flat-field optical sensor (20) and the photo detector (110),
 wherein the controller (30) receives the sensed signal from the flat-field optical sensor (20) and the detected signal from the photo detector (110) and calibrates the optical power of the spot beam based on the sensed signal from the flat-field optical sensor (20) and the detected signal from the photo detector (110).

6. The apparatus of claim 5, further comprising:

a reflector (150) positioned between the laser light generating module (160) and the photo detector (110) for redirecting a part of the linear beam from the polygon mirror (1244) toward the photo detector (110); and
 a converging component (112) positioned between the reflector (150) and the photo detector (110) so that a focal point of the converging component (112) is on the photo detector (110).

7. The apparatus of claim 5 or 6, wherein the flat-field optical sensor (20) is made of charge-coupled device or complementary metal-oxide-semiconductor.

Patentansprüche

1. Verfahren zum Kalibrieren einer optischen Leistung, zur Ausführung durch eine Vorrichtung zum Erzeugen eines dreidimensionalen (3D) Objekts, die einen Laserlicht-Erzeuger (120) zum Erzeugen eines linearen Strahls und eine Flachfeld-Konvergenzlinse (140) umfasst, und wobei eine Flachfeld-Abtaststrecke gebildet wird, wenn der lineare Strahl die Flachfeld-Konvergenzlinse (140) durchläuft, wobei das Verfahren umfasst:

Prüfen eines optischen Flachfeldsensors (20), eines Fotodetektors (110) und einer Steuerung (30), wobei der optische Flachfeldsensor (20) auf der Flachfeld-Abtaststrecke positioniert ist, der Fotodetektor (110) zwischen dem Laserlicht-Erzeuger (120) und der Flachfeld-Konvergenzlinse (140) positioniert ist, und die Steuerung (30) elektrisch mit dem optischen Flachfeldsensor (20), dem Fotodetektor (110) und dem Laserlicht-Erzeuger (120) verbunden ist;
 Verwenden des optischen Flachfeldsensors (20), um eine optische Leistung des linearen Strahls, der die konvergente Flachfeldlinse (140) durchlaufen hat, abzutasten und ein erfasstes Signal, das auf der abgetasteten optischen Leistung basiert, an die Steuerung (30) zu senden;
 Verwenden des Fotodetektors (110), um eine

optische Leistung des linearen Strahls, der die Flachfeld-Konvergenzlinse (140) nicht durchlaufen hat, zu erfassen und ein erfasstes Signal basierend auf der erfassten optischen Leistung an die Steuerung (30) zu senden; und
 Verwenden der Steuerung (30) zum Kalibrieren einer optischen Leistung des Laserlicht-Erzeugers (120) auf der Grundlage des erfassten Signals von dem optischen Flachfeldsensor (20) und dem erfassten Signal von dem Fotodetektor (110).

2. Verfahren nach Anspruch 1, weiter umfassend:
 Verwenden der Steuerung (30), um die optische Leistung des linearen Strahls zu erhöhen, der durch den Laserlicht-Erzeuger (120) erzeugt wird, wenn die optische Leistung auf der Grundlage des erfassten Signals höher als eine normale optische Betriebsleistung und niedriger als eine voreingestellte optische Leistung ist.

3. Verfahren nach Anspruch 2, wobei die Steuerung (30) ein Warnsignal erfasst, wenn die optische Leistung auf der Grundlage des erfassten Signals kleiner als die normale optische Betriebsleistung ist.

4. Verfahren nach einem der vorhergehenden Ansprüche, wobei die Steuerung (30) die optische Leistung des linearen Strahls konstant macht.

5. Vorrichtung zum Erzeugen eines dreidimensionalen (3D) Objekts, umfassend:

eine optisch-durchlässige Komponente (100) mit einem Arbeitsbereich (102);
 ein Laserlicht-Erzeugungsmodul (160), umfassend:

einen Lichtemitter (122) zum Ausgeben eines Lichtpunktstrahls;
 einen Polygonspiegel (1244), der um eine Achse drehbar ist, um den Lichtpunktstrahl in einen linearen Strahl abzulenken;
 eine Flachfeld-Konvergenzlinse (140), die zwischen dem Laserlicht-Erzeugungsmodul (160) und der optisch transparenten Komponente (100) angeordnet ist, wobei eine Flachfeld-Abtaststrecke gebildet wird, nachdem der lineare Strahl die Flachfeld-Konvergenzlinse (140) durchlaufen hat, und wobei der Arbeitsbereich (102) innerhalb eines abgedeckten Bereichs der Flachfeld-Abtaststrecke liegt,
dadurch gekennzeichnet, dass
 ein optischer Flachfeldsensor (20) zwischen der Flachfeld-Konvergenzlinse (140) und der optisch transparenten Komponente (100) angeordnet und auf der Flachfeld-Ab-

taststrecke angeordnet ist, wobei der optische Flachfeldsensor (20) so konfiguriert ist, dass er eine optische Leistung des linearen Strahls, der die Flachfeld-Konvergenzlinse (140) durchlaufen hat, erfasst und ein erfasstes Signal basierend auf der optischen Leistung des linearen Strahls, der die Flachfeld-Konvergenzlinse (140) durchlaufen hat, erzeugt;
 einen Fotodetektor (110), der zwischen dem Laserlicht-Erzeugungsmodul (160) und der Flachfeld-Konvergenzlinse (140) angeordnet ist, wobei der Fotodetektor (110) so konfiguriert ist, dass er eine optische Leistung des linearen Strahls, der die Flachfeld-Konvergenzlinse (140) nicht durchlaufen hat, erfasst und ein erfasstes Signal erzeugt; und
 eine Steuerung (30), die elektrisch mit dem Laserlicht-Erzeugungsmodul (160), dem optischen Flachfeldsensor (20) und dem Fotodetektor (110) verbunden ist, wobei die Steuerung (30) das erfasste Signal von dem optischen Flachfeldsensor (20) und das erfasste Signal von dem Fotodetektor (110) empfängt und die optische Leistung des Lichtpunktstrahls auf der Grundlage des erfassten Signals von dem optischen Flachfeldsensor (20) und des erfassten Signals von dem Fotodetektor (110) kalibriert.

6. Vorrichtung nach Anspruch 5, weiter umfassend:

einen Reflektor (150), der zwischen dem Laserlicht-Erzeugungsmodul (160) und dem Fotodetektor (110) angeordnet ist, um einen Teil des linearen Strahls von dem Polygonspiegel (1244) zu dem Fotodetektor (110) umzulenken; und
 eine konvergierende Komponente (112), die zwischen dem Reflektor (150) und dem Fotodetektor (110) so positioniert ist, dass ein Brennpunkt der konvergierenden Komponente (112) auf dem Fotodetektor (110) liegt.

7. Vorrichtung nach Anspruch 5 oder 6, wobei der optische Flachfeldsensor (20) aus einem ladungsgekoppelten Bauelement oder einem komplementären Metalloxid-Halbleiter besteht.

Revendications

1. Procédé pour calibrer une puissance optique adapté pour être réalisé par un appareil de génération d'objets tridimensionnels (3D) comprenant un générateur de lumière laser (120) pour générer un faisceau linéaire et une lentille convergente à champ plat

(140), et un trajet de balayage à champ plat est formé lorsque le faisceau linéaire passe à travers la lentille convergente à champ plat (140), le procédé comprenant :

mettre la disposition d'un capteur optique à champ plat (20), d'un photodétecteur (110) et d'un contrôleur (30), dans lequel le capteur optique à champ plat (20) est positionné sur le trajet de balayage à champ plat, le photodétecteur (110) est positionné entre le générateur de lumière laser (120) et la lentille convergente à champ plat (140), et le contrôleur (30) est connecté électriquement au capteur optique à champ plat (20), au photodétecteur (110) et au générateur de lumière laser (120) ;
 utiliser le capteur optique à champ plat (20) pour détecter une puissance optique du faisceau linéaire ayant traversé la lentille convergente à champ plat (140) et envoyer un signal détecté basé sur la puissance optique détectée au contrôleur (30) ;
 utiliser le photodétecteur (110) pour détecter une puissance optique du faisceau linéaire qui ne passe pas à travers la lentille convergente à champ plat (140) et envoyer un signal détecté basé sur la puissance optique détectée au contrôleur (30) ; et
 utiliser le contrôleur (30) pour calibrer une puissance optique du générateur de lumière laser (120) sur la base du signal détecté par le capteur optique à champ plat (20) et du signal détecté par le photodétecteur (110).

2. Le procédé selon la revendication 1, comprenant en outre :
 utiliser le contrôleur (30) pour augmenter la puissance optique du faisceau linéaire généré par le générateur de lumière laser (120) lorsque la puissance optique basée sur le signal détecté est supérieure à une puissance optique de fonctionnement normal et inférieure à une puissance optique préréglée.
3. Le procédé selon la revendication 2, dans lequel le contrôleur (30) détecte un signal d'avertissement lorsque la puissance optique basée sur le signal détecté est inférieure à la puissance optique de fonctionnement normal.
4. Le procédé selon quelconque des revendications précédentes, dans lequel le contrôleur (30) fait en sorte que la puissance optique du faisceau linéaire soit une constante.
5. Un appareil de génération d'objets tridimensionnels (3D) comprenant :

un composant optique-transparent (100) com-

prenant une zone de travail (102) ;
un module générateur de lumière laser (160)
comprenant :

un émetteur de lumière (122) pour émettre 5
un faisceau ponctuel ;
un miroir polygonal (1244) pouvant tourner
autour d'un axe pour diriger le faisceau
ponctuel en un faisceau linéaire ;
une lentille de convergence à champ plat 10
(140) positionnée entre le module de géné-
ration de lumière laser (160) et le compo-
sant optiquement transparent (100), dans
lequel un trajet de balayage à champ plat
est formé après que le faisceau linéaire a 15
traversé la lentille de convergence à champ
plat (140), et la zone de travail (102) se trou-
ve dans une couverture du trajet de balaya-
ge à champ plat,

caractérisé en ce que 20

un capteur optique à champ plat (20) est
disposé entre la lentille convergente à
champ plat (140) et le composant optique-
ment transparent (100) et positionné sur le
trajet de balayage à champ plat, dans lequel 25
le capteur optique à champ plat (20) est con-
figuré pour détecter une puissance optique
du faisceau linéaire ayant passé la lentille
convergente à champ plat (140) et pour gé-
nérer un signal détecté basé sur la puissan- 30
ce optique du faisceau linéaire ayant passé
la lentille convergente à champ plat (140) ;
un photodétecteur (110) positionné entre le
module de génération de lumière laser
(160) et la lentille convergente à champ plat 35
(140) , dans lequel le photodétecteur (110)
est configuré pour détecter une puissance
optique du faisceau linéaire qui ne passe
pas par la lentille convergente à champ plat
(140) et pour générer un signal détecté ; et 40
un contrôleur (30) connecté électriquement
au module générateur de lumière laser
(160), au capteur optique à champ plat (20)
et au photodétecteur (110),
dans lequel le contrôleur (30) reçoit le signal 45
détecté du capteur optique à champ plat
(20) et le signal détecté du photodétecteur
(110) et calibre la puissance optique du fais-
ceau ponctuel en fonction du signal détecté
du capteur optique à champ plat (20) et du 50
signal détecté du photodétecteur (110).

6. L'appareil selon la revendication 5, comprenant en
outre :

un réflecteur (150) positionné entre le module
de génération de lumière laser (160) et le pho-
todétecteur (110) pour rediriger une partie du

faisceau linéaire du miroir polygonal (1244) vers
le photodétecteur (110) ; et
un élément convergent (112) placé entre le ré-
flecteur (150) et le photodétecteur (110) de sorte
qu'un point focal de l'élément convergent (112)
se trouve sur le photodétecteur (110).

7. L'appareil selon la revendication 5 ou 6, dans lequel
le capteur optique à champ plat (20) est constitué
d'un dispositif à couplage de charges ou d'un semi-
conducteur à oxyde métallique complémentaire.

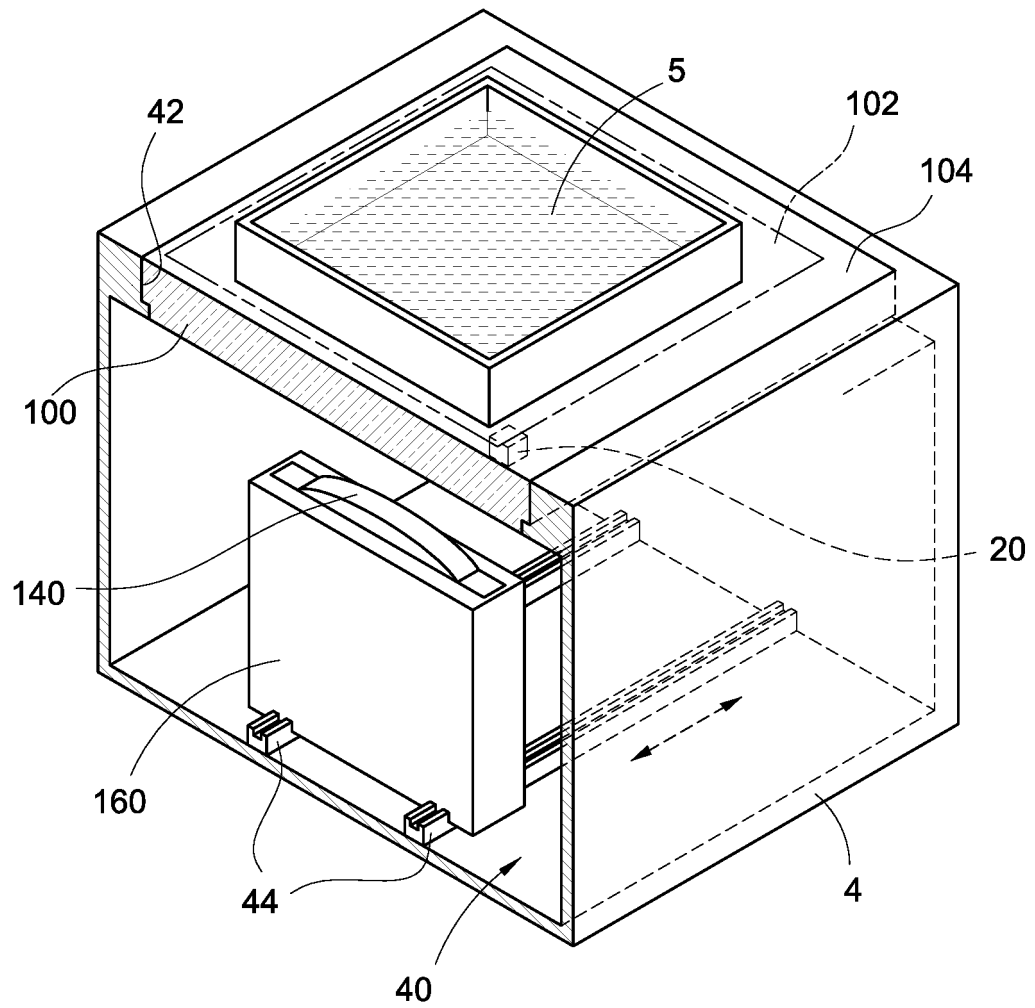


FIG.1

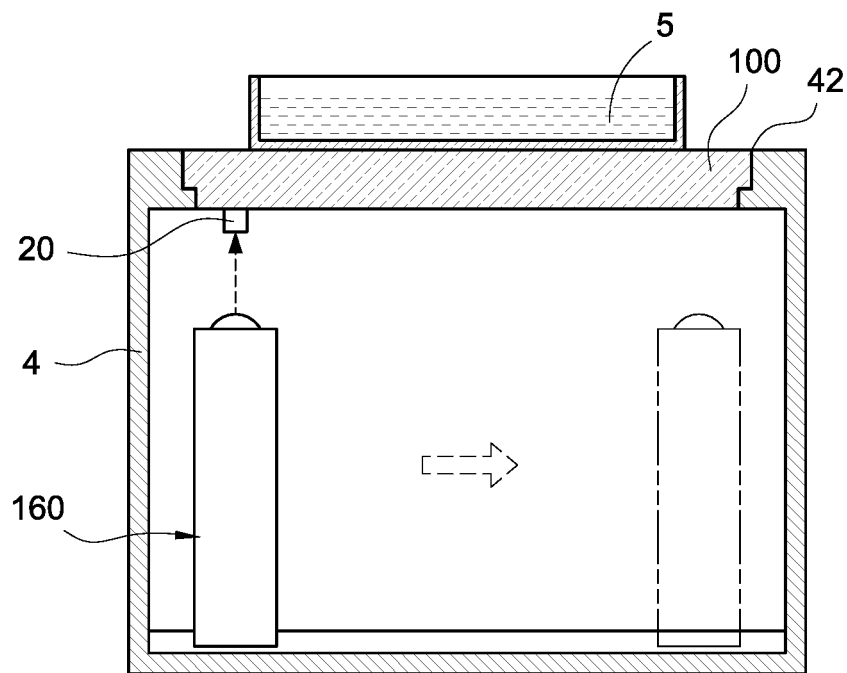


FIG.2

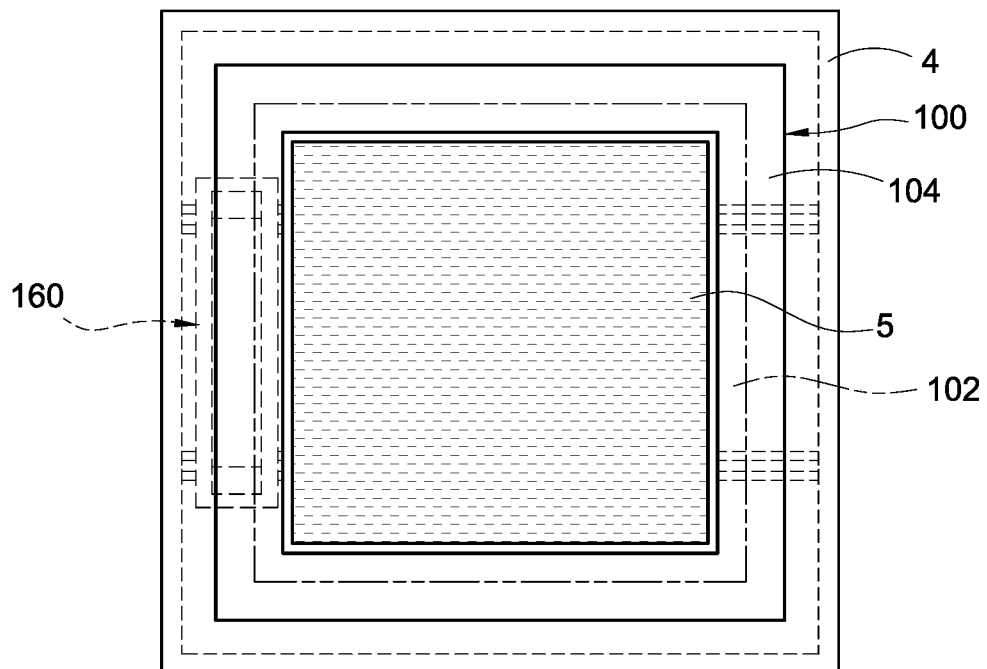


FIG.3

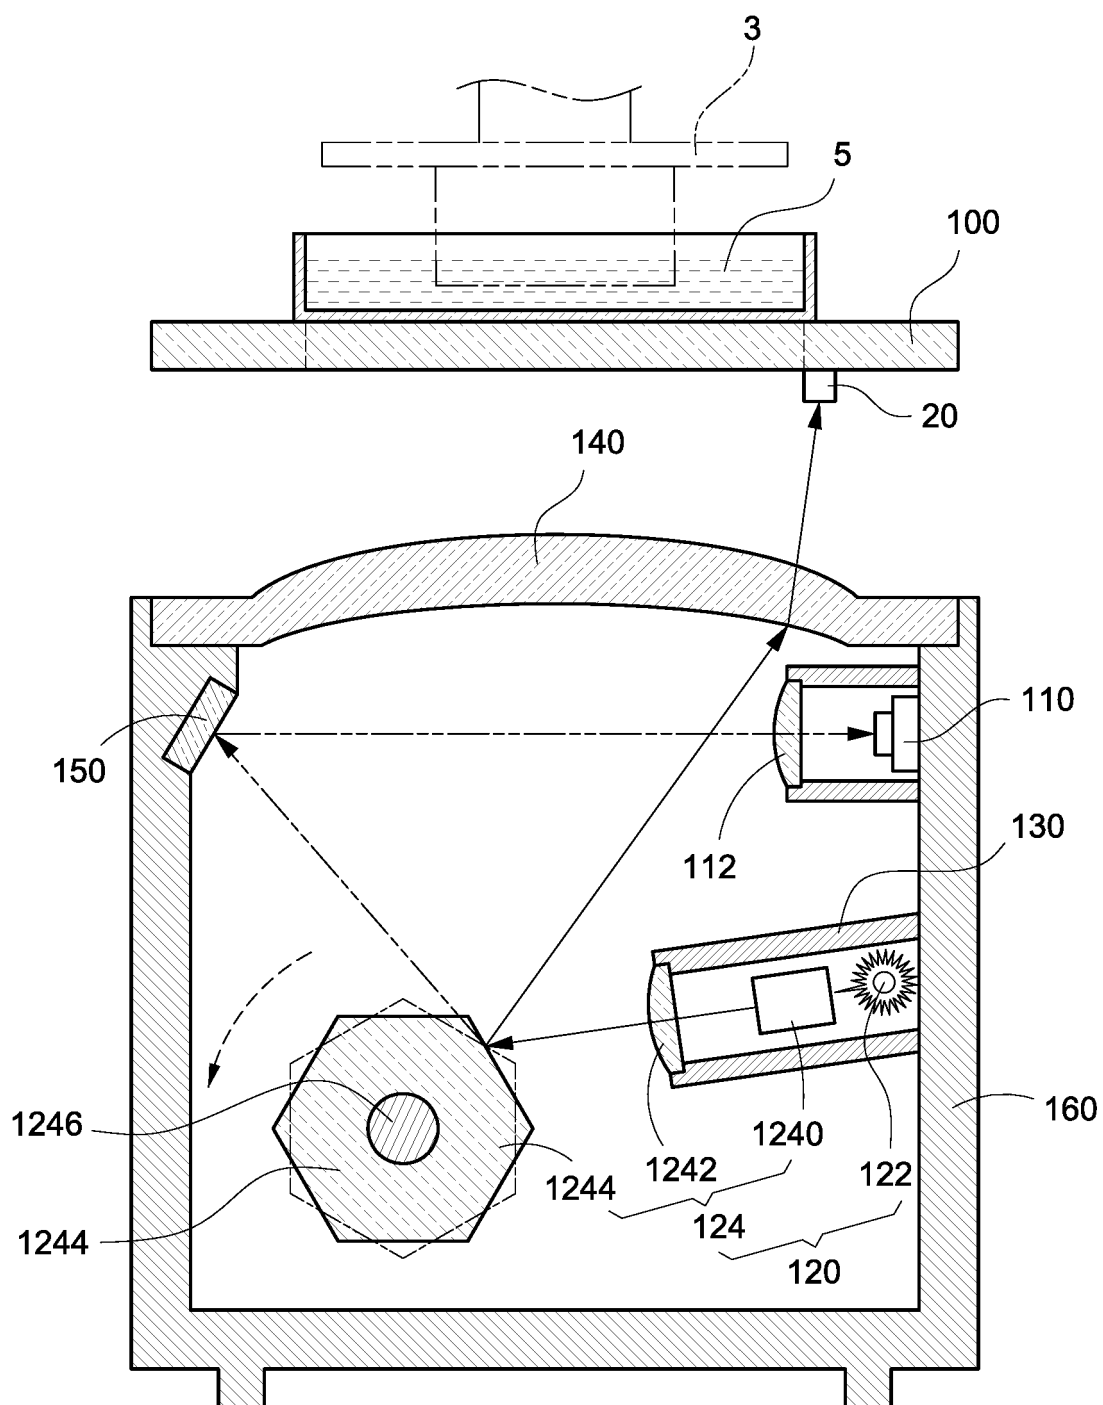


FIG.4

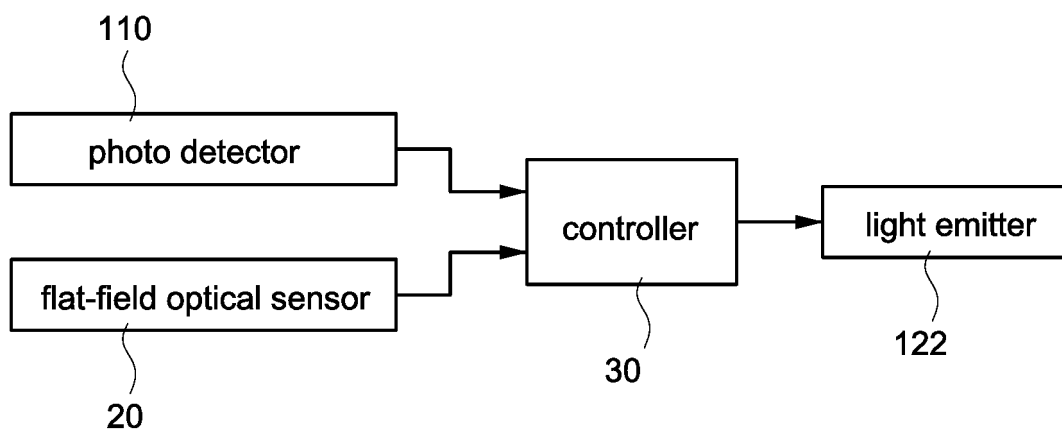


FIG.5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2015145177 A1 [0004]
- US 6129884 A [0005]