




(86) **Date de dépôt PCT/PCT Filing Date:** 2006/09/08
(87) **Date publication PCT/PCT Publication Date:** 2007/03/22
(45) **Date de délivrance/Issue Date:** 2015/01/27
(85) **Entrée phase nationale/National Entry:** 2008/03/06
(86) **N° demande PCT/PCT Application No.:** US 2006/035109
(87) **N° publication PCT/PCT Publication No.:** 2007/033024
(30) **Priorité/Priority:** 2005/09/13 (US60/716,612)

(51) **Cl.Int./Int.Cl.** *E21B 44/00* (2006.01)
(72) **Inventeur/Inventor:**
NEWMAN, FREDERIC M., US
(73) **Propriétaire/Owner:**
KEY ENERGY SERVICES, INC., US
(74) **Agent:** BERESKIN & PARR LLP/S.E.N.C.R.L., S.R.L.

(54) **Titre : PROCÉDE ET SYSTÈME D'ÉVALUATION DE DONNÉES DE POIDS D'UNE PLATEFORME DE MAINTENANCE**
(54) **Title: METHOD AND SYSTEM FOR EVALUATING WEIGHT DATA FROM A SERVICE RIG**

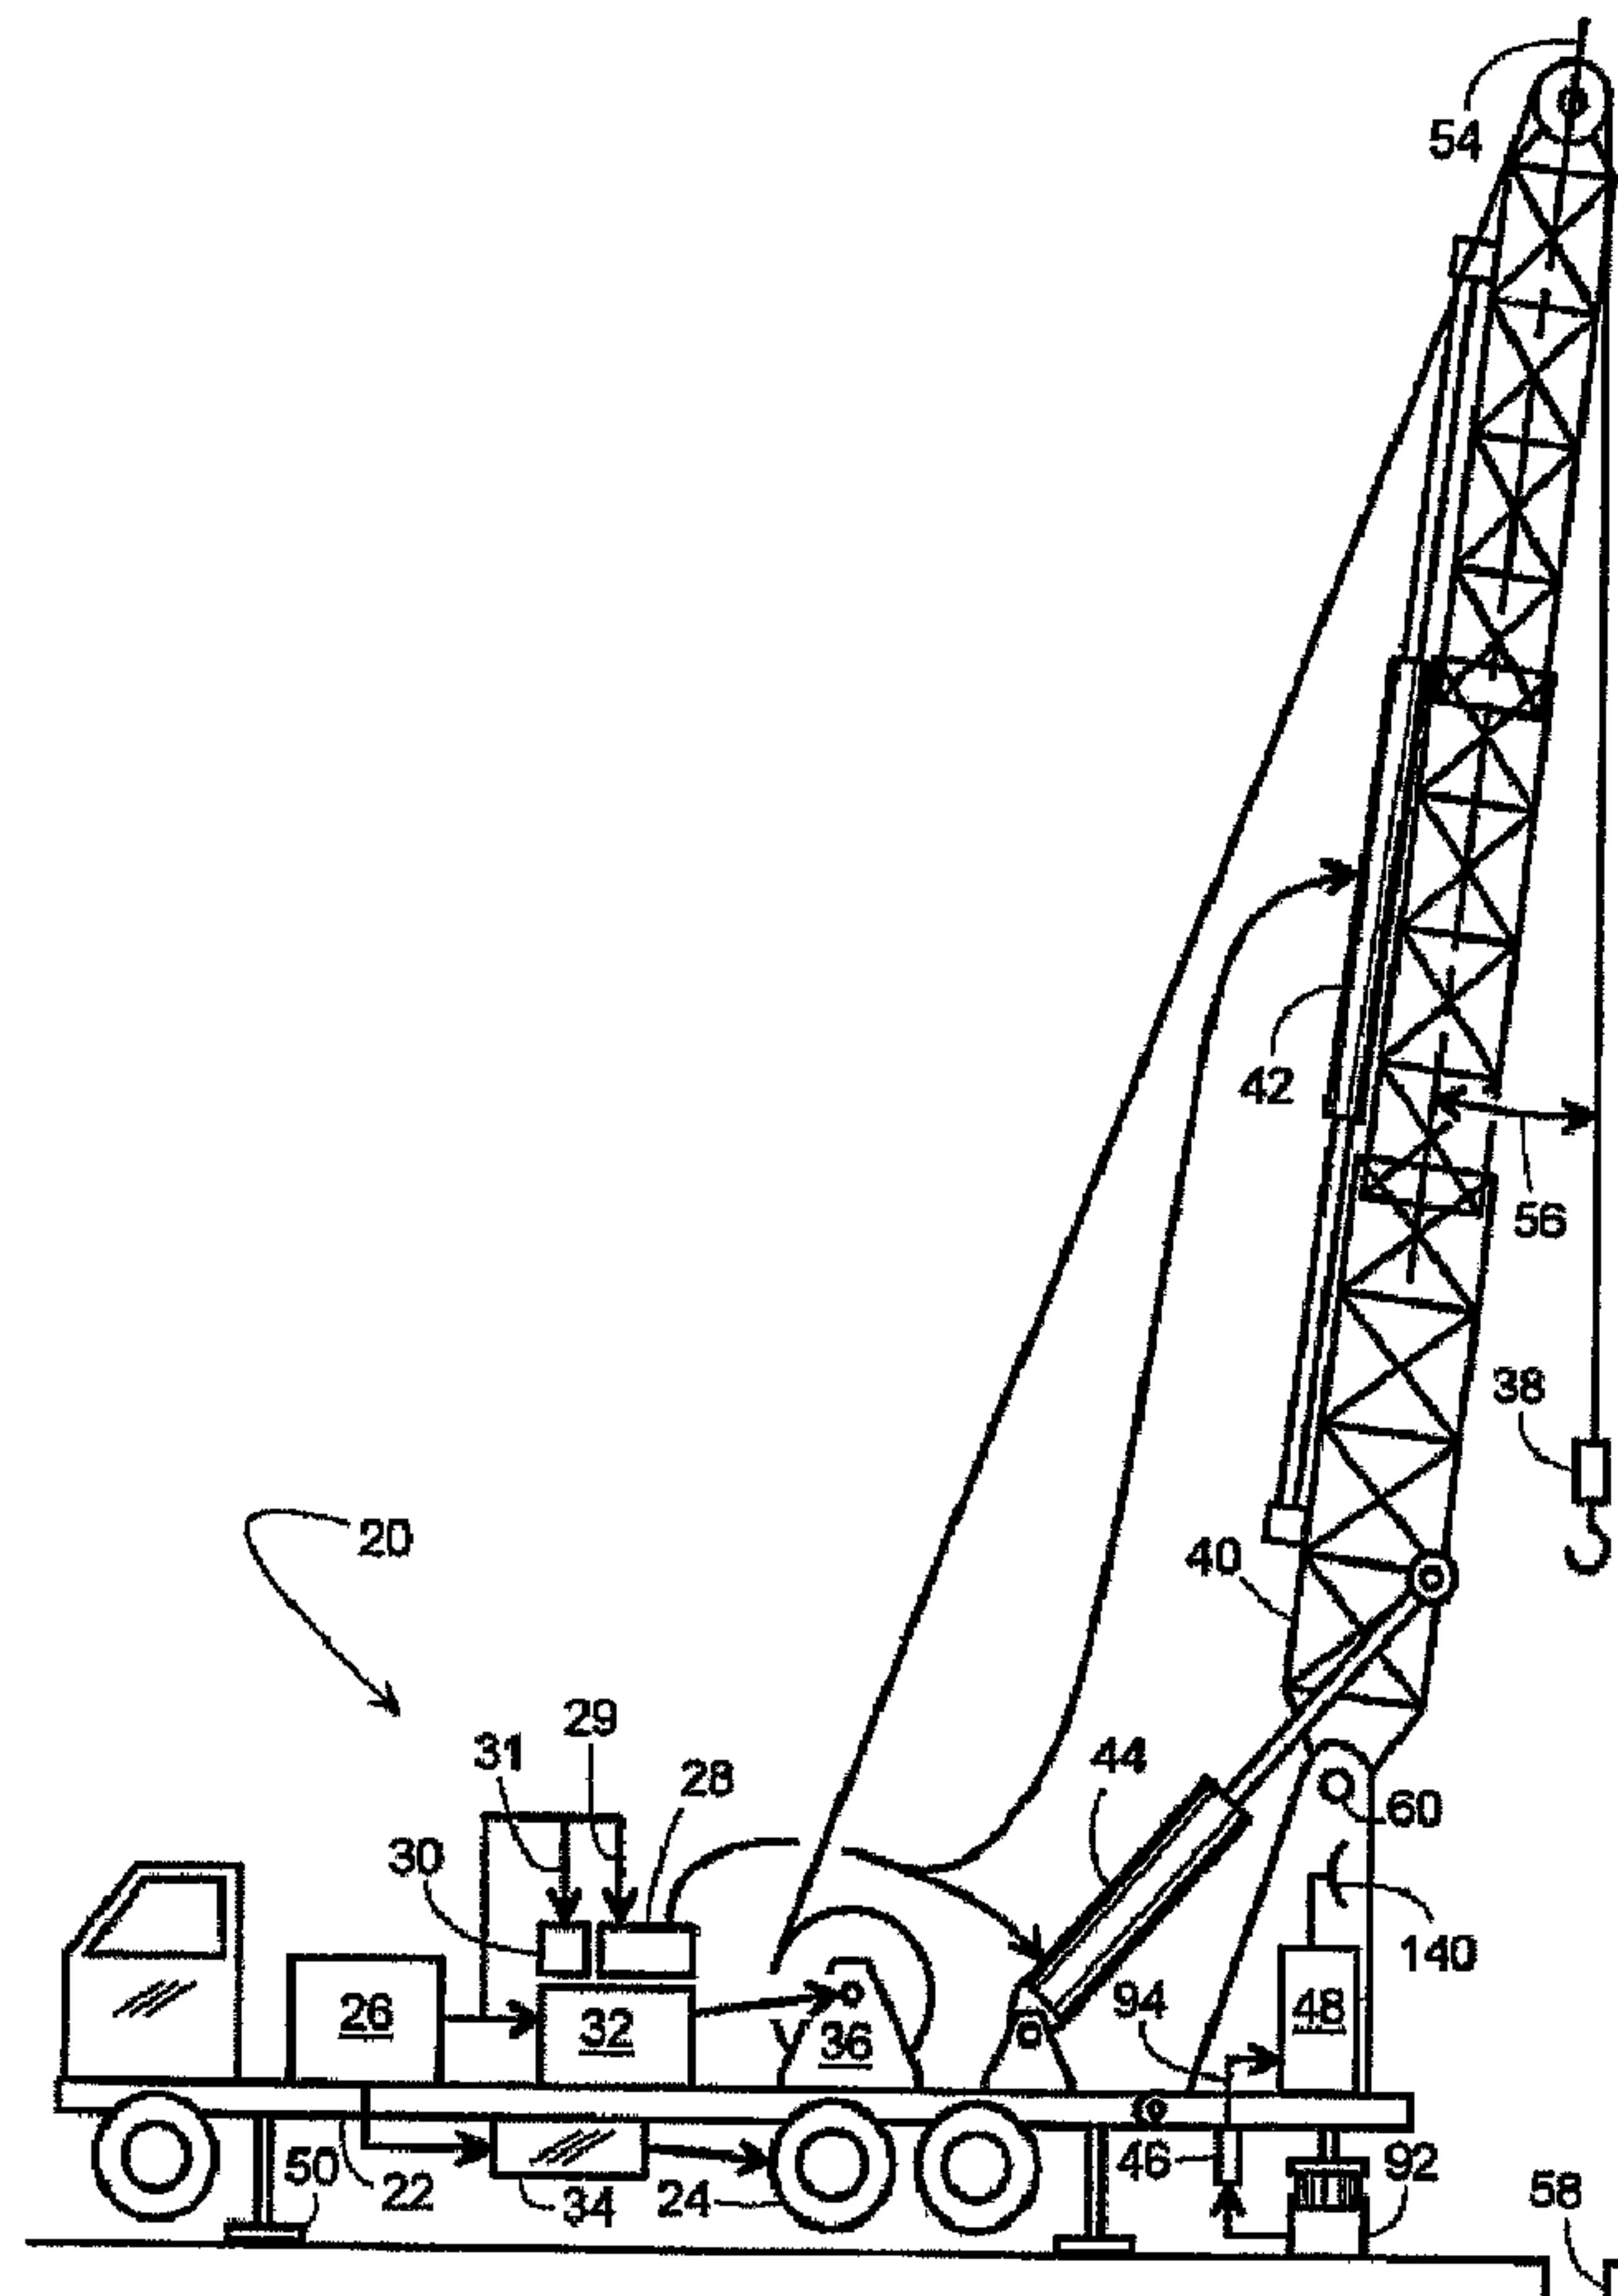

(57) **Abrégé/Abstract:**

The present invention is directed to methods for an off-site supervisor or well owner to evaluate the rig load data provided by a well service rig at a well site by evaluating charts of sensor data obtained from sensors on or associated with the well service rig. A rig



(57) Abrégé(suite)/Abstract(continued):

load data chart can be reviewed and activities completed by the rig identified based on the data curves on the rig load data chart. In addition the hook load carried by the service rig can be determined by evaluating the rig load data charts of sensor data. Furthermore, well bore and tubing conditions in the well can be analyzed based on the rig load data in the rig load data charts while tubing and rods are being pulled from the well or well bore.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2007 (22.03.2007)

PCT

(10) International Publication Number
WO 2007/033024 A3

(51) International Patent Classification:
E21B 44/00 (2006.01)

(21) International Application Number:

PCT/US2006/035109

(22) International Filing Date:

8 September 2006 (08.09.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/716,612 13 September 2005 (13.09.2005) US

(71) Applicant (for all designated States except US): **KEY ENERGY SERVICES, INC.** [US/US]; 1301 MCKINNEY STREET, Suite 1800, Houston, TX 77010 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NEWMAN, Frederick, M.** [US/US]; 8201 Dunblane Drive, Midland, TX 79707 (US).


(74) Agent: **McWHIRTER, Julie, A. 'jill'**; KING & SPALDING LLP, 1100 LOUISIANA STREET, Suite 4000, Houston, TX 77002-5213 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR EVALUATING WEIGHT DATA FROM SERVICE RIG

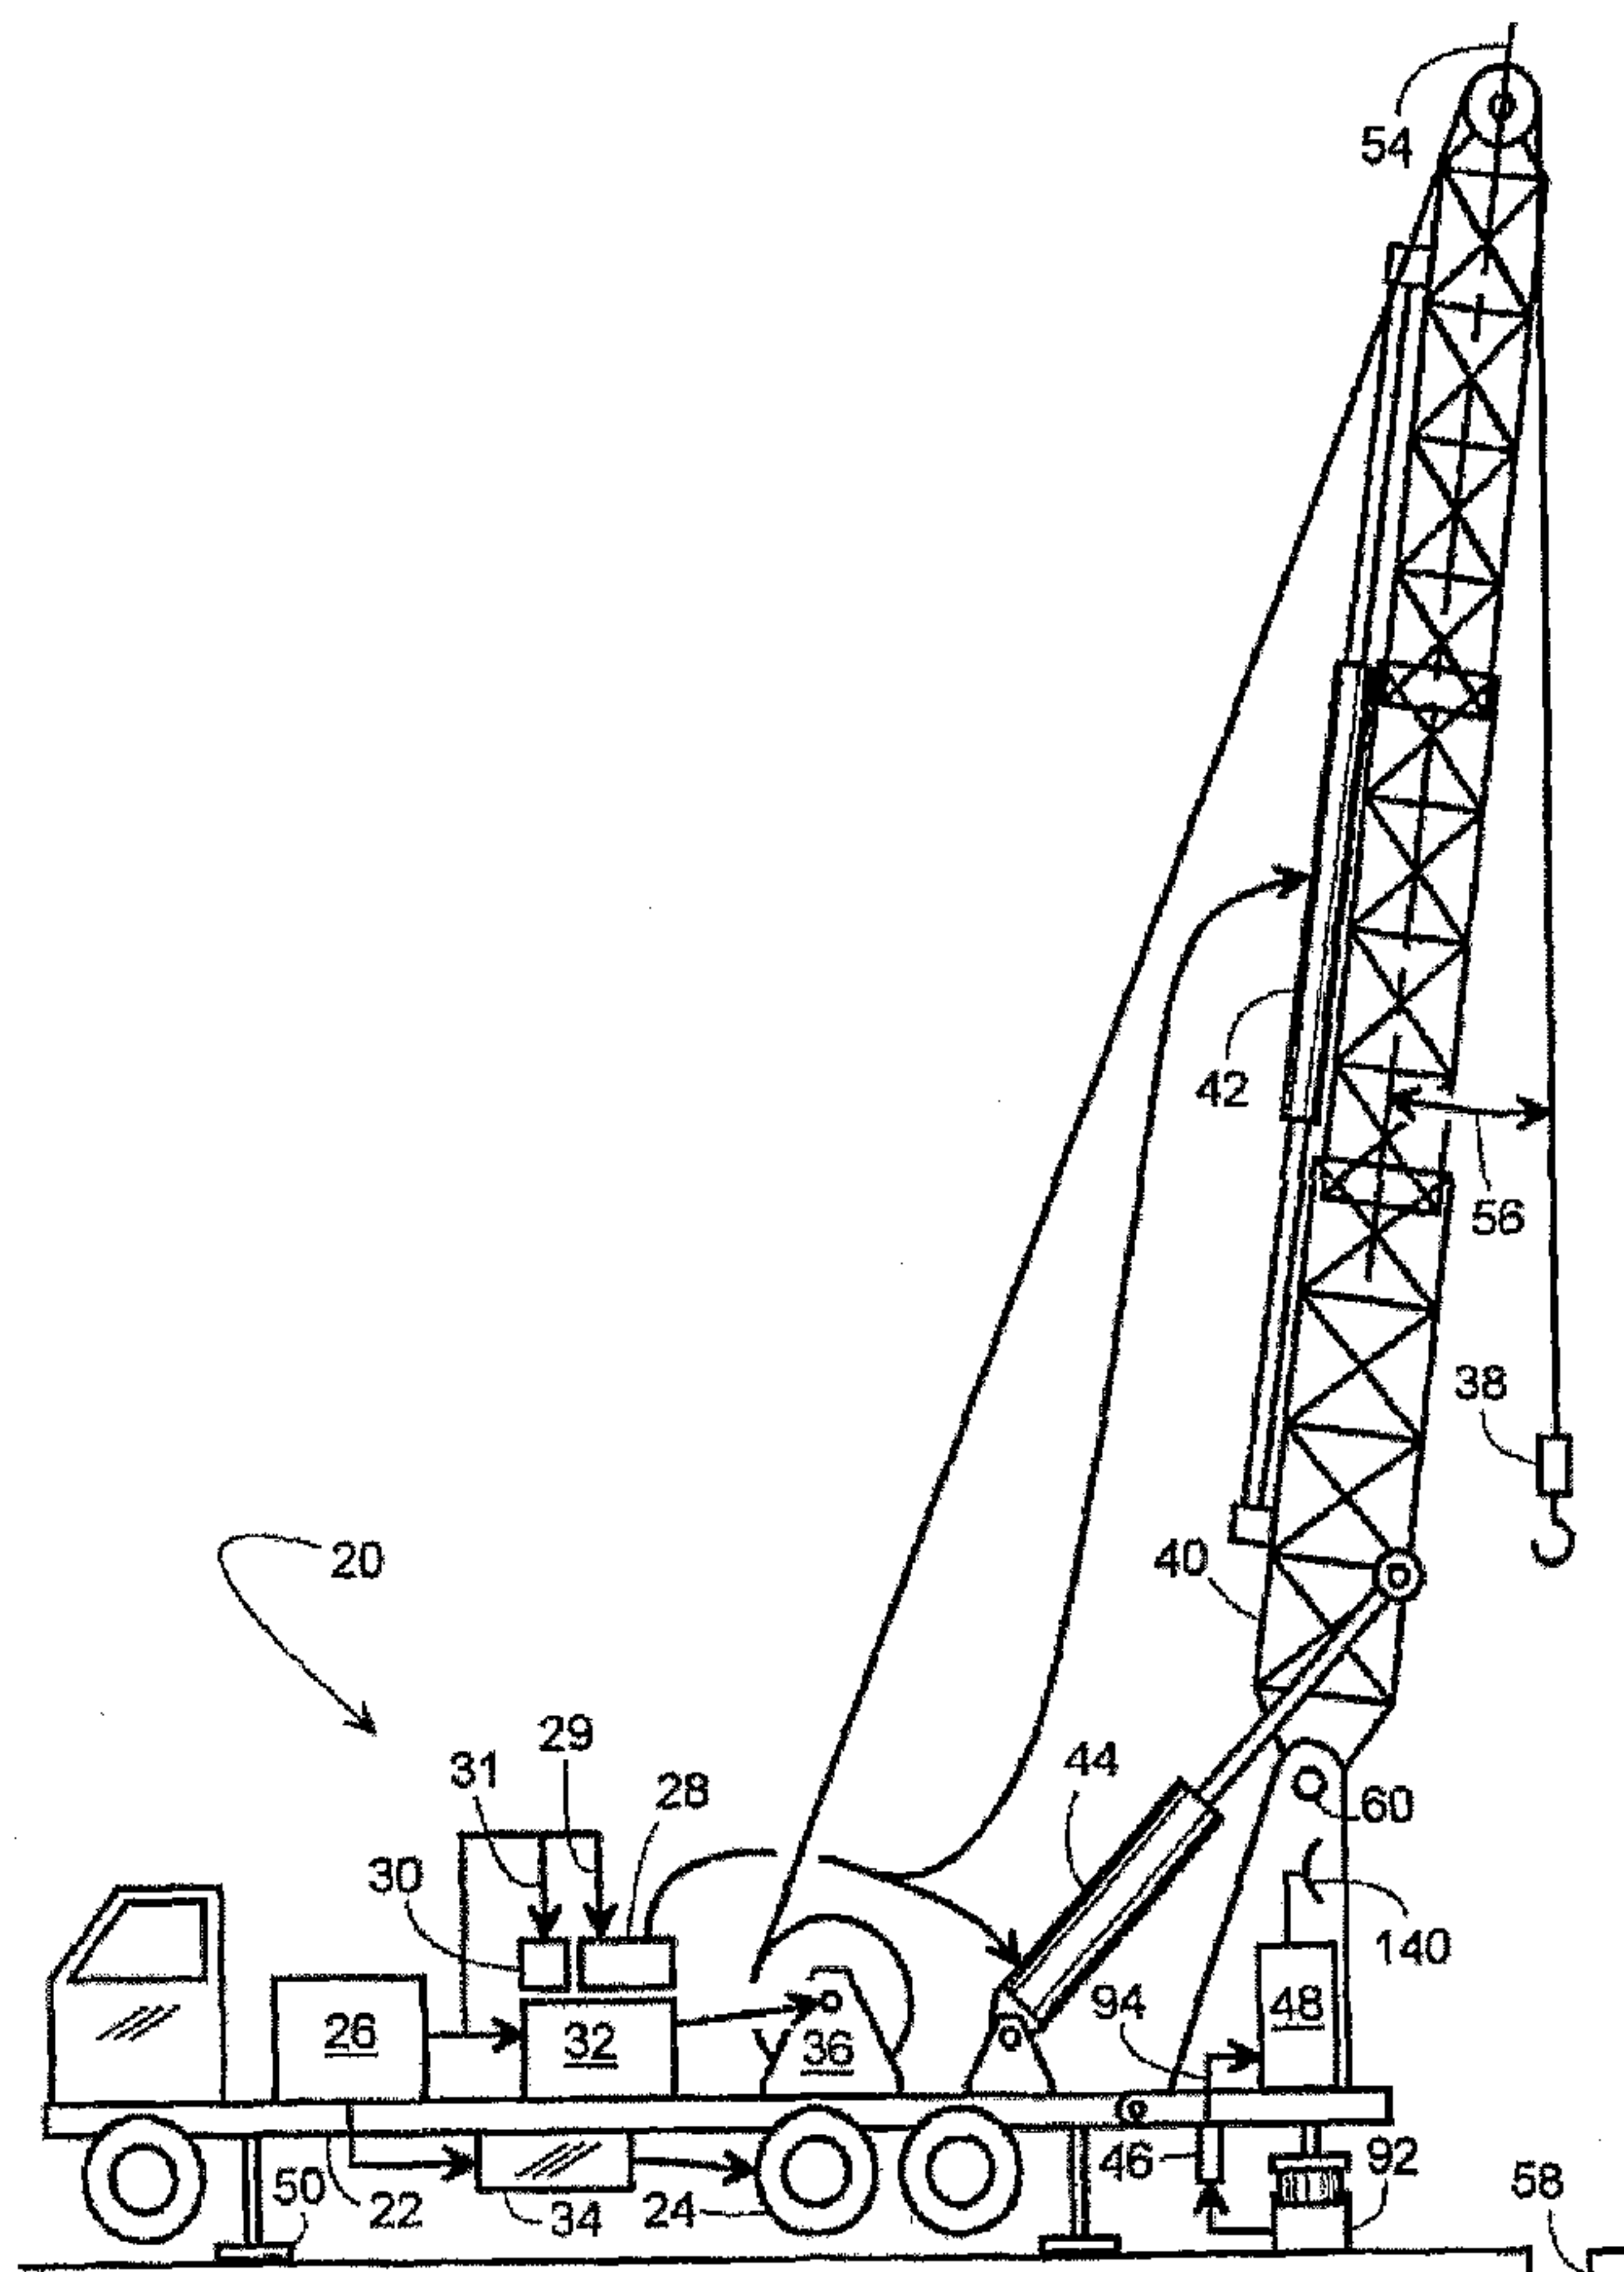

(57) Abstract: The present invention is directed to methods for an off-site supervisor or well owner to evaluate the rig load data provided by a well service rig at a well site by evaluating charts of sensor data obtained from sensors on or associated with the well service rig. A rig load data chart can be reviewed and activities completed by the rig identified based on the data curves on the rig load data chart. In addition the hook load carried by the service rig can be determined by evaluating the rig load data charts of sensor data. Furthermore, well bore and tubing conditions in the well can be analyzed based on the rig load data in the rig load data charts while tubing and rods are being pulled from the well or well bore.

WO 2007/033024 A3

WO 2007/033024 A3



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
28 June 2007

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD AND SYSTEM FOR EVALUATING WEIGHT DATA FROM A SERVICE RIG

STATEMENT OF RELATED PATENT APPLICATION

[0001] This non-provisional patent application claims priority under 35 U.S.C. § 119 to U.S. Provisional Patent Application No. 60/716,612, titled *Interpretive Techniques Using Sensor Data*, filed September 13, 2005.

FIELD OF THE INVENTION

[0002] The subject invention generally pertains to equipment used for repairing wells that have already been drilled. More specifically the present invention pertains to an analysis of rig load data received from well service rigs to determine different aspects of the service provided.

BACKGROUND OF THE INVENTION

[0003] After a well has been drilled, it must be completed before it can produce gas or oil. Once completed, a variety of events may occur to the formation causing the well and its equipment to require a "work-over." For purposes of this application, "work-over" and "service" operations are used in their very broadest sense to refer to any and all activities performed on or for a well to repair or rehabilitate the well, and also includes activities to shut in or cap the well. Generally, work-over operations include such things as replacing worn or damaged parts (e.g., a pump, sucker rods, tubing, and packer glands), applying secondary or tertiary recovery techniques, such as chemical or hot oil treatments, cementing the well bore, and logging the well bore, to name just a few. Service operations are usually performed by or involve a mobile work-over or well service rig (collectively hereinafter "service rig" or "rig") that is adapted to, among other things, pull the well tubing or rods and also to run the tubing or rods back in. Typically, these mobile service rigs are motor vehicle-based and have an extendible, jack-up derrick complete with draw works and block. In addition to the service rig, additional service companies and equipment may be involved to provide specialized operations. Examples of such specialized services include: a

chemical tanker, a cementing truck or trailer, a well logging truck, perforating truck, and a hot-oiler truck or trailer.

[0004] It is conventional for a well owner to contract with a service company to provide all or a portion of the necessary work-over operations. For example, a well owner, or customer, may contract with a service rig provider to pull the tubing from a specific well and contract with one or more service providers to provide other specific services in conjunction with the service rig company, so that the well can be rehabilitated according to the owner's direction.

[0005] It is typical for the well owner to receive individual invoices for services rendered from each company that was involved in the work-over. For example, if the portable service rig spent thirty hours at the well site, the customer well owner will be billed for thirty rig hours at the prevailing hourly rate. The customer is rarely provided any detail on this bill as to when the various other individual operations were started or completed, the speed at which the operations took place, how much material was used, or whether any problems were encountered in the well. Occasionally, the customer might be supplied with handwritten notes from the rig operator, but such is the exception, not the rule. Similarly, the customer will receive invoices from the other service companies that were involved with working over the well. The customer is often left with little to no indication of whether the service operations for which it is billed were done properly, and in some cases, even done at all. Further, most well owners own more than one well in a given field and the invoices from the various companies may confuse the well name with the services rendered. Also, if an accident or some other notable incident occurs at the well site during a service operation, it may be difficult to determine the root cause or who was involved because there is rarely any documentation of what actually went on at the well site. Of course, a well owner can have one of his agents at the well site to monitor the work-over operations and report back to the owner, but such "hands-on" reporting is often times prohibitively expensive.

[0006] The present invention is directed to evaluating rig load data provided to a chart in a display from sensors on the service rig to determine the activities accomplished by the service rig, the hook load carried during an activity by the service rig and well bore conditions evaluated by reviewing the rig load data during the removal of tubes and rods from a well or well bore.

SUMMARY OF THE INVENTION

[0007] The present invention is directed to incrementing a well service rig in such a manner that activity-based and/or time-based data for the well site is recorded and evaluated. The invention contemplates that the acquired data can be transmitted in near real-time or periodically via wired, wireless, satellite or physical transfer such as by memory module to a data center preferably controlled by the service rig owner, but alternately controlled by the well owner or another.

[0008] For one aspect of the present invention, a method of determining the activity completed by a service rig at a well site can be achieved by analyzing a rig load chart comprising rig load data. The rig load chart can be displayed on a monitor or provided in hard copy and can be evaluated by a rig operator, supervisor, rig owner, well owner, or other interested party. A grouping of rig load data can be identified and determined to be a first activity. The first activity on the rig load data chart can be evaluated to determine what the activity is. Once determined the activity can be recorded in a computer storage medium, such as a hard drive, compact disc, floppy disc or other storage medium known to those of ordinary skill in the art.

[0009] For another aspect of the present invention, a method of determining well bore conditions can be achieved by analyzing rig load data on a rig load data chart. The rig load chart can be displayed on a monitor or provided in hard copy and can be evaluated by a rig operator, supervisor, rig owner, well owner, or other interested party. A grouping of rig load data can be identified and determined to be a first activity. The first activity on the rig load data chart can be evaluated to determine what the activity is. If the first activity is determined to be pulling at least one string of tubing from the well bore, and evaluation can be conducted to determine if there are any rig load data points on the rig load chart that are abnormally high. In one exemplary embodiment, a determination of whether a rig load data value is abnormally high is based on a determination of whether the rig load data value is substantially above an average upper value for the rig loads during that activity. If there are not abnormally high rig load data values, the well bore status can be designated as normal.

[0010] For yet another aspect of the present invention, a method of determining the hook load on a well service rig can be achieved by analyzing rig load data curves on a rig load data chart. The rig load chart can be displayed on a monitor or provided in hard copy and can be evaluated by a rig operator, supervisor, rig owner, well owner, or other interested

party. A first rig load level can be selected from a data point that is substantially along a peak of the rig load data curve on the display. A second rig load level can be selected from a data point that is substantially along a trough of the rig load data curve immediately preceding or subsequent to the peak of the first rig load level. The hook load can then be calculated by taking the difference of the first rig load level and the second rig load level.

BRIEF DESCRIPTION OF DRAWINGS

[0011] For a more complete understanding of the exemplary embodiments of the present invention and the advantages thereof, reference is now made to the following description in conjunction with the accompanying drawings in which:

[0012] Figure 1 is a side view of an exemplary mobile repair unit with its derrick extended according to one exemplary embodiment of the present invention;

[0013] Figure 2 is a side view of the exemplary mobile repair unit with its derrick retracted according to one exemplary embodiment of the present invention;

[0014] Figure 3 is an electrical schematic of a monitor circuit according to one exemplary embodiment of the present invention;

[0015] Figure 4 is an exemplary end view of an imbalanced derrick according to one exemplary embodiment of the present invention;

[0016] Figure 5 illustrates the raising and lowering of an inner tubing string with an exemplary mobile repair unit according to one exemplary embodiment of the present invention;

[0017] Figures 6 and 7 are exemplary displays of rig load data charts according to one exemplary embodiment of the present invention;

[0018] Figure 8 is a flowchart of an exemplary process for identifying an activity based on an evaluation of the rig load chart according to one exemplary embodiment of the present invention;

[0019] Figures 9 and 10 are exemplary displays of rig load charts for determining hook load on a mobile repair unit according to one exemplary embodiment of the present invention;

[0020] Figure 11 is a flowchart of an exemplary process for measuring hook load on a mobile repair unit by evaluating the exemplary electronic display of readings from sensors on the mobile service rig according to one exemplary embodiment of the present invention;

[0021] Figure 12 is a comparative display of exemplary rig load charts for evaluating well bore conditions according to one exemplary embodiment of the present invention;

[0022] Figure 13 is a flowchart of an exemplary process for determining well bore conditions by evaluating the exemplary rig load data charts according to one exemplary embodiment of the present invention; and

[0023] Figure 14 is a comparative display of exemplary rig load charts for evaluating well bore condition according to one exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

[0024] Referring to Figure 1, a retractable, self-contained mobile repair unit **20** is shown to include a truck frame **22** supported on wheels **24**, an engine **26**, a hydraulic pump **28**, an air compressor **30**, a first transmission **32**, a second transmission **34**, a variable speed hoist **36**, a block **38**, an extendible derrick **40**, a first hydraulic cylinder **42**, a second hydraulic cylinder **44**, a first transducer **46**, a monitor **48**, and retractable feet **50**.

[0025] The engine **26** selectively couples to the wheels **24** and the hoist **36** by way of the transmissions **34** and **32**, respectively. The engine **26** also drives the hydraulic pump **28** via the line **29** and the air compressor **30** via the line **31**. The compressor **30** powers a pneumatic slip (Not Shown), and pump powers a set of hydraulic tongs (Not Shown). The Pump **28** also powers the cylinders **42** and **44** which respectively extend and pivot the derrick **40** to selectively place the derrick **40** in a working position, as shown in Figure 1, and in a lowered position, as shown in Figure 2. In the working position, the derrick **40** is pointed upward, but its longitudinal centerline **54** is angularly offset from vertical as indicated by the angle **56**. The angular offset provides the block **38** access to a well bore **58** without interference with the derrick pivot point **60**. With the angular offset **56**, the derrick framework does not interfere with the typically rapid installation and removal of numerous inner pipe segments (known as an inner pipe string, rods, or tubing **62**).

[0026] Individual pipe segments (of string **62**) and sucker rods are screwed to themselves using hydraulic tongs. The term "hydraulic tongs" used herein and below refer to any hydraulic tool that can screw together two pipes or sucker rods. An example would include those provided by B. J. Hughes company of Houston, Tex. In operation, the pump

28 drives a hydraulic motor (Not Shown) forward and reverse by way of a valve. Conceptually, the motor drives the pinions which turn a wrench element relative to a clamp. The element and clamp engage flats on the mating couplings of a sucker rod or inner pipe string **62** of one conceived embodiment of the invention. However, it is well within the scope of the invention to have rotational jaws or grippers that clamp on to a round pipe (i.e., no flats) similar in concept to a conventional pipe wrench, but with hydraulic clamping. The rotational direction of the motor determines assembly or disassembly of the couplings.

[0027] While not explicitly shown in the figures, when installing the inner pipe string segments **62**, the pneumatic slip is used to hold the pipe string **62** while the next segment of pipe string **62** is screwed on using tongs. A compressor **30** provides pressurized air through a valve to rapidly clamp and release the slip. A tank helps maintain a constant air pressure. Pressure switch provides monitor **48** (Figure 3) with a signal that indirectly indicates that rig **20** is in operation.

[0028] Referring back to Figure 1, weight applied to the block **38** is sensed by way of a hydraulic pad **92** that supports the weight of the derrick **40**. The hydraulic pad **92** is basically a piston within a cylinder (alternatively a diaphragm) such as those provided M. D. Totco company of Cedar Park, Tex. Hydraulic pressure in the pad **92** increases with increasing weight on the block **38**. In Figure 3, the first transducer **46** converts the hydraulic pressure to a 0-5 VDC signal **94** that is conveyed to the monitor **48**. The monitor **48** converts signal **94** to a digital value, stores it in a memory **96**, associates it with a real time stamp, and eventually communicates the data to a remote computer **100** by way of a modem **98**, T1 line, WiFi or other device or method for transferring data known to those of ordinary skill in the art.

[0029] In the embodiment of Figure 4, two pads **92** associated with two transducers **46** and **102** are used. An integrator **104** separates the pads **92** hydraulically. The rod side of the pistons **106** and **108** each have a pressure exposed area that is half the full face area of the piston **108**. Thus, the chamber **110** develops a pressure that is an average of the pressures in the pads **92**. One type of integrator **104** is provided by M. D. Totco company of Cedar Park, Tex. In one embodiment of the present invention, just one transducer **46** is used and it is connected to the port **112**. In another embodiment of the present invention, two transducers **46** and **102** are used, with the transducer **102** on the right side of the rig **20**

coupled to the port 114 and the transducer 46 on the left side coupled to the port 116. Such an arrangement allows one to identify an imbalance between the two pads 92.

[0030] Returning to Figure 3, transducers 46 and 102 are shown coupled to the monitor 48. The transducer 46 indicates the pressure on the left pad 92 and the transducer 102 indicates the pressure on the right pad 92. A generator 118 driven by the engine 26 provides an output voltage proportional to the engine speed. This output voltage is applied across a dual-resistor voltage divider to provide a 0-5 VDC signal at point 120 and then passes through an amplifier 122. A generator 118 represents just one of many various tachometers that provide a feedback signal proportional to the engine speed. Another example of a tachometer would be to have engine 26 drive an alternator and measure its frequency. The transducer 80 provides a signal proportional to the pressure of hydraulic pump 28, and thus proportional to the torque of the tongs.

[0031] A telephone accessible circuit 124, referred to as a "POCKET LOGGER" by Pace Scientific, Inc. of Charlotte, N.C., includes four input channels 126, 128, 130 and 132; a memory 96 and a clock 134. The circuit 124 periodically samples inputs 126, 128, 130 and 132 at a user selectable sampling rate; digitizes the readings; stores the digitized values; and stores the time of day that the inputs were sampled. It should be appreciated by those skilled in the art that with the appropriate circuit, any number of inputs can be sampled and the data could be transmitted instantaneously upon receipt.

[0032] An supervisor at a computer 100 remote from the work site at which the service rig 20 is operating accesses the data stored in the circuit 124 by way of a PC-based modem 98 and a cellular phone 136. The phone 136 reads the data stored in the circuit 124 via the lines 138 (RJ11 telephone industry standard) and transmits the data to the modem 98 by way of antennas 140 and 142. In an alternative embodiment the data is transmitted by way of a cable modem or WiFi system (Not Shown). In one exemplary embodiment of the present invention, the phone 136 includes a CELLULAR CONNECTION.TM. provided by Motorola Incorporated of Schaumburg, Ill. (a model S1936C for Series II cellular transceivers and a model S1688E for older cellular transceivers).

[0033] Some details worth noting about the monitor 48 is that its access by way of a modem makes the monitor 48 relatively inaccessible to the crew at the job site itself. However the system can be easily modified to allow the crew the capability to edit or amend the data being transferred. The amplifiers 122, 144, 146 and 148 condition their

input signals to provide corresponding inputs **126**, **128**, **130** and **132** having an appropriate power and amplitude range. Sufficient power is needed for RC circuits **150** which briefly (e.g., 2-10 seconds) sustain the amplitude of inputs **126**, **128**, **130** and **132** even after the outputs from transducers **46**, **102** and **80** and the output of the generator **118** drop off. This ensures the capturing of brief spikes without having to sample and store an excessive amount of data. A DC power supply **152** provides a clean and precise excitation voltage to the transducers **46**, **102** and **80**; and also supplies the circuit **124** with an appropriate voltage by way of a voltage divider **154**. A pressure switch **90** enables the power supply **152** by way of the relay **156**, whose contacts **158** are closed by the coil **160** being energized by the battery **162**. Figure 5 presents an exemplary display representing a service rig **20** lowering an inner pipe string **62** as represented by arrow **174** of Figure 5.

[0034] Processes of exemplary embodiments of the present invention will now be discussed with reference to Figures 8, 11, and 13. Certain steps in the processes described below must naturally precede others for the present invention to function as described. However, the present invention is not limited to the order of the steps described if such order or sequence does not alter the functionality of the present invention in an undesirable manner. That is, it is recognized that some steps may be performed before or after other steps or in parallel with other steps without departing from the scope and spirit of the present invention.

[0035] Turning now to Figures 6 and 7, an illustration of exemplary displays **600** and **700** of rig load data charts in accordance with an exemplary embodiment of the present invention are shown and described within the exemplary operating environment of Figures 3 and 5. Now referring to Figures 3, 5, 6, and 7, the exemplary display **600** includes a rig load data chart **600**. The X-axis of the rig load data chart **600** represents time and the Y-axis represents rig load in pounds. Rig load can be measured at several places on the rig **20**. For instance, rig load can be measured on each individual rig pad **92**, on a transducer or sensor on the output side of the integrator on the pad weight indicator (Not Shown), on a strain gage placed on the mast of the rig **20** to measure compression in a derrick leg, on a dead line, line sensor, line diaphragm, sending diaphragm or cylinder (Not Shown). The rig load displayed in the rig load charts is based on the total weight on the pads **92**, not the load on the hook **38**.

[0036] Figure 6 presents the general patterns for rig load data curves during activities for pulling rods and tubing out of a hole. The exemplary rig load chart 600 includes three activities 605-615. In the first activity 605, the rig 20 is pulling rods out of the well 58. During this activity, the baseline 620 of the rig load is increasing. In one exemplary embodiment, activities accomplished by the service rig 20 and other third party crews and vehicles include, but are not limited to, activity is selected from a group consisting of rigging up a service rig, pulling rods, laying down rods, pulling tubing, laying down tubing, picking up tubing, running tubing, picking up rods, running rods, rigging down the work-over rig, rigging up an auxiliary service unit, rigging down an auxiliary service unit, longstroke, cut paraffin, nipple up a blow out preventer, nipple down a blow out preventer, fishing, jarring, swabbing, flowback, drilling, clean out, well control activities, killing a well, circulating fluid within a well, unseating pumps, setting a release tubing anchor, releasing a tubing anchor, setting a packer, releasing a packer, picking up drill collars, laying down drill collars, picking up tools, laying down tools, rigging up third party servicing equipment, well stimulation, cementing, logging, perforating, inspecting the well, and traveling to the well site. The rig 20 is hanging rods 62 in the basket (Not Shown) of the rig 20. Since the rig is on pads 92, each stand of rods 62 makes the derrick 40 appear to have an increased rig load as presented in the baseline 620. The upper level of the weight data for the first activity 605 is substantially consistent.

[0037] In the third activity, the rig 20 is pulling tubing 62 out of the well 58. Since tubing is not hung, but is instead racked or stacked on the ground, the tubing pull does not exhibit the increasing baseline 630 like in the first activity 605. Each joint of tubing is pulled and stacked so the mast loses the weight of each stand after it has been pulled out of the well 58. The upper level of the rig load data for the third activity 615 is steadily decreasing. This is caused because after each stand of tubing 62 is removed, the rig load of the next stand is less.

[0038] The second activity 610 represents the unseating of the tubing anchor catcher ("TAC"). Unseating of the TAC typically occurs between pulling rods out of a well 58 and pulling tubing out of the well 58. This activity 610, typically displays data on the rig load chart 600 that includes a baseline rig load 625 that is substantially constant and upper level rig loads that are random in nature and do not show a steady increase or decline.

[0039] Figure 7 presents the general patterns for exemplary rig load data curves during activities for inserting rods and tubing into a well 58. The exemplary rig load chart 700 includes three activities 705-715. In the first activity 705, the rig 20 is inserting tubing 62 into the well 58. During this activity, the baseline 725 of the rig load is substantially flat because the tubing 62 was stacked on the ground. The upper level of the rig load data for the first activity 705 is increasing steadily because the addition of each successive stand of tubing 62 being inserted into the well 58 makes the entire weight being born by the pads 92 increase.

[0040] In the third activity, the rig 20 is inserting rods 62 into the well 58. Since the rods 62 were hanging in the derrick 40, each stand of rods 62 inserted into the well 58 reduces the total weight on the pads 92 thereby causing the baseline 720 to steadily decline. In addition, when inserting rods 62 into the well, the upper level of the rig load data for the third activity 715 is substantially constant.

[0041] The second activity 710 represents setting the TAC. Setting the TAC typically occurs between inserting tubing into the well 58 and inserting rods into the well 58. This activity 710, typically displays data on the rig load chart 700 that includes a baseline rig load 730 that is substantially constant and upper level rig loads that are random in nature and do not show a steady increase or decline.

[0042] Figure 8 is a logical flowchart diagram illustrating an exemplary method 800 for identifying an activity of a service rig 20 based on an evaluation of the rig load chart. Referencing Figs. 1, 3, 5, 6, 7, and 8, the exemplary method 800 begins at the START step and continues to step 802, where a request is received to display the rig load chart 600 on the monitor 48 of the computer 100. In step 804, the rig load chart 600 is displayed on the monitor 48. A rig operator or rig owner, well owner or supervisor (collectively "supervisor") evaluates the data in the data curves of the rig load chart 600 on the monitor 48 in step 806. In an alternative embodiment, the supervisor evaluates the data of the rig load chart 600 in hard-copy form printed out by a printer, copier, plotter, or other printing or display device known to those of ordinary skill in the art.

[0043] In step 808, counter variable X is set equal to one. In one exemplary embodiment, counter variable X represents an activity completed by a rig 20 during which time the rig load chart 600 was collecting and displaying data on the monitor 48. The supervisor identifies the first activity on the rig load chart 600 in step 810. In one

exemplary embodiment, the supervisor identifies an activity by viewing data on the rig load chart **600** and determining how certain portions of the data may likely represent an activity being accomplished by the rig **20**.

[0044] In step **812**, an inquiry is conducted to determine if the upper level of the rig load data on the rig load chart **600** is substantially flat for the first activity. In Figure 6, the first activity **605** has an upper level of rig load data that is substantially flat (the load in pounds is substantially the same). If the upper level of the rig load data is not substantially flat for the first activity, the "NO" branch is followed to step **820**. Otherwise the "YES" branch is followed to step **814**. In step **814**, an inquiry is conducted to determine if the baseline of the rig load data on the rig load chart **600** is increasing or decreasing for the first activity **605**. Returning to the example in Figure 6, the baseline **620** for the first activity **605** is increasing as time progresses. If the baseline **620** is decreasing, the "Decreasing" branch is followed to step **816**, where the supervisor identifies and records the activity as inserting rods into a well **58**. Figure 7 provides an example of a decreasing base line **720** for the third activity **715**. On the other hand, if the baseline **620** is increasing, as it is in the first activity **605** of Figure 6, the "Increasing" branch is followed to step **818**, where the supervisor identifies the activity as pulling rods out of a well **58** and records the activity in the computer **100**. The process then continues from step **816** or **818** to step **838**.

[0045] In step **820**, an inquiry is conducted to determine if the baseline for the rig load data on the rig load chart **600** is substantially flat for the first activity. In Figure 6, the baseline **625** for the third activity **615** is substantially flat. In Figure 7, the baseline **725** for the first activity **705** is also substantially flat. If the baseline **625** for the rig load data is not substantially flat, the "NO" branch is followed to step **836**, where the activity is not identified. Otherwise, the "YES" branch is followed to step **822**.

[0046] In step **822**, an inquiry is conducted to determine if the upper level of the rig load data for the first activity is increasing or decreasing over time. As seen in Figure 6, the third activity **615** has an upper level of rig load data that is decreasing over time. On the other hand, in Figure 7, the first activity **705** has an upper level of rig load data that is increasing over time. In addition, the second activity **610**, **710** in both Figures 6 and 7 have an upper level of rig load data that is randomly increasing and decreasing. If the upper level of the rig load data is increasing, the "Increasing" branch is followed to step **824**, where the first activity is identified as running tubing **62** into a well **58** and recorded in the computer

100. If, on the other hand, the upper level of the rig load data is decreasing, the “Decreasing” branch is followed to step 826, where the first activity is identified as pulling tubing 62 out of a well 58 and recorded in the computer 100. The process continues from step 824 or 826 to step 838.

[0047] If the upper level of the rig load data on the rig load chart 600 is neither substantially increasing nor decreasing, the “NO” branch is followed to step 828. In step 828, an inquiry is conducted to determine if the first activity is positioned between activities for pulling rods and tubing or inserting rods and tubing. As can be seen in Figure 6, the second activity 610, has a substantially flat baseline, an upper level of data that is neither increasing nor decreasing (it is mainly random) and it is positioned between the first activity 605 of pulling rods 62 out of a well 58 and the third activity 615 of pulling tubing 62 out of the well 58. If it is not between those activities, the “NO” branch is followed to step 836, where the activity is not identified. Otherwise, the “YES” branch is followed to step 830.

[0048] In step 830, an inquiry is conducted to determine if the first activity is between a pair of pulling or insertion activities. If the first activity is between activities of the rods and tubing being pulled, the “Pulling” branch is followed to step 832, where the activity is identified as unseating the TAC and recorded in the computer 100. The process then continues from step 832 to step 838. If the first activity is between activities of the rods and tubing being inserted into the well 58, the “Inserting” branch is followed to step 834, where the supervisor identifies the activity as setting the TAC and records it in the computer 100. The process then continues to step 838.

[0049] In step 838, an inquiry is conducted to determine if there is another activity to evaluate on the rig load chart 600. If so, the “YES” branch is followed to step 840, where the counter variable X is incremented by one. The process then returns from step 840 to step 810. On the other hand, if the rig load chart 600 does not have any additional activities, the “NO” branch is followed to the END step.

[0050] Turning now to Figures 9 and 10, an illustration of exemplary displays 900 and 1000 of rig load data charts in accordance with an exemplary embodiment of the present invention are shown and described within the exemplary operating environment of Figures 3 and 5. Now referring to Figures 3, 5, 9, and 10, the exemplary display 900 includes a rig load data chart 900 of rig load data while rods 62 are being pulled out of the well 58. The first data point 905 and the third data point 915 represent the rig load on the

pad 92 and typically includes the hook load, a portion of the weight of the rig 20, and the load of the rods 62 hanging on the derrick 40.

[0051] When the rods 62 are resting on the rod elevators on the wellhead (Not Shown) during the rod pull, the hook load is substantially zero, or nulled because in one exemplary embodiment the operator nulls or offsets the empty rig weight so that the chart will read substantially near zero when the rig is not bearing rod or tubing loads. This time in the rod pull provides the baseline 925 for the rig load of this activity and is generally represented by the trough portion of the data, such as the second data point 910 and the fourth data point 920. These data points 910, 920 typically include a portion of the weight of the rig 20 and the load of the rods 62 hanging on the derrick 40. Thus the hook load can be calculated by subtracting the second data point 910 from the first data point 905 or the fourth data point 920 from the third data point 915.

[0052] The exemplary display 1000 of Figure 10 includes a rig load data chart 1000 of rig load data while rods 62 are being pulled out of the well 58. The data displayed on the chart 1000 illustrates a rig 20 pulling rods 62 out of the well 58 and hanging them in the derrick 40. As can be seen in Figure 10, the baseline 1015 of the rig load data is steadily increasing as the weight of each rod 62 is pulled out of the well 58. The number of peaks of data can be counted to determine the number of stands of rods 62 that have been pulled from the well 58. In this exemplary embodiment, the rig load chart 1000 includes 52 peaks of data representing 52 stands of rods 62 pulled from the well 58. The additional load carried by the rig 20 can also be calculated by taking the lowest baseline data point 1005 and subtracting that from the highest baseline data point 1010, which in this example is approximately 59,250 pounds minus 52,000 pounds or 7,250 pounds of rods 62 pulled from the well 58.

[0053] Figure 11 is a logical flowchart diagram illustrating an exemplary method 1100 for measuring hook load on a service rig 20 by evaluating the rig load chart 900. Referencing Figs. 1, 3, 5, 9, and 11, the exemplary method 1100 begins at the START step and continues to step 1105, where a request is received to display the rig load chart 900 on the monitor 48 at the computer 100. In step 1110, the rig load chart 900 is displayed on the monitor 48. A supervisor evaluates the data in the data curves of the rig load chart 900 on the monitor 48 in step 1115. In an alternative embodiment, the supervisor evaluates the data

of the rig load chart **900** in hard-copy form printed out by a printer, copier, plotter, or other printing or display device known to those of ordinary skill in the art.

[0054] In step **1120**, the supervisor determines the first rig load at a data point on a data curve. In Figure 9, the first rig load can be represented by the first data point **905** or the third data point **915** on the rig load chart **900**. The supervisor determines a second load level at a data point on the trough of the data curve that is immediately preceding or subsequent to the selected first load level. Returning to Figure 9, the second load level can be represented by the second data point **910** or the fourth data point **920** on the rig load chart **900**. In step **930**, the supervisor determines the difference between the first load level **905** and the second load level **910** by subtracting the second load level **910** from the first load level **905**. In Figure 9, the hook load for the first **905** and second **910** data points is approximately **14,500** pounds, while the hook load for the third **915** and fourth **920** data points is approximately **13,000** pounds. The process continues from step **1130** to the END step.

[0055] Figure 12, illustrates a comparative display of three exemplary rig load charts **1205**, **1210**, **1215** of rig load data charts for evaluating well bore conditions while pulling tubing **62** out of the well **58** according to one exemplary embodiment of the present invention. Now referring to Figures 3, 5, and 12, the exemplary display on the monitor **48** includes a first rig load data chart **1205**. The first rig load data chart **1205** displays rig load data for a normal or "trouble-free" pull of tubing **62** out of the well **58**. The baseline of the rig load data is substantially constant and the upper level of the rig load data is decreasing at a substantially steady pace over time. When an average load level decline **1220** line is positioned along the rig load chart **1205** for the upper level loads during the tubing pull, none of the rig load data is substantially above the average load level decline **1220**.

[0056] The second rig load data chart **1210** also displays rig load data during the removal of tubing **62** from the well **58**. By positioning an average load level decline **1230** line on the second rig load chart **1210** it can be determined that there is a single area **1235** where rig load data was substantially above the average load level decline. When there is a single area of the data representing a load level that is abnormal, as is the data at **1235**, the problem is typically diagnosed as a bad or narrow spot in the well **58**. To determine the position of the bad or narrow spot in the well **58**, the supervisor can count the peaks of data after the abnormal peak **1235** on the monitor **48** until all the tubing has been removed from

the well **58** and multiply that number by the length of each stand of tubing **62** to determine the depth of the bad or narrow spot in the well **58**.

[0057] The third rig load data chart **1215** also displays rig load data during the removal of tubing **62** from the well **58**. The chart **1215** further includes an average load level decline **1240** line. A view of the rig load data on the monitor **48** at the computer **100** alerts the supervisor that there are several data points that are substantially above the average load level decline **1240**, including data points **1245**, **1250**, and **1255**. When the abnormal spikes in rig load data occur several times at random intervals, it is unlikely that the well **58** would have this many tight spots in the casing **186**. Instead, the activity causing this type of data typically occurs when the TAC does not properly release and the rig operator is dragging it out of the well **58** with the dogs of the TAC not fully retracted.

[0058] Figure 14, illustrates a comparative display on the monitor **48** of two exemplary rig load charts **1405**, **1410** of rig load data for evaluating well bore conditions while pulling rods out of the well **58** according to one exemplary embodiment of the present invention. Now referring to Figures 3, 5, and 14, the exemplary display includes a first rig load data chart **1405**. The first rig load data chart **1405** displays rig load data for a normal or "trouble-free" pull of rods **62** out of the well **58**. The baseline of the rig load data is steadily increasing and the upper level of the rig load data is increasing at a slow but steady rate because of the buoyancy effect in the well system, because rods weigh less in the well fluid due to displacement. When an average load level increase **1415** line is positioned along the rig load chart **1405** for the upper level loads during the rod pull, none of the rig load data is substantially above the average load level increase **1415**.

[0059] The second rig load data chart **1410** also displays rig load data during the removal of rods **62** from the well **58**. The chart **1410** further includes an average load level increase **1420** line. A view of the rig load data on the monitor **48** of the computer **100** alerts the supervisor that there are several data points that are substantially above the average load level decline **1420**, including data points **1425**. This rig load data indicates that the rods **62** are dragging in the tubing **186**. When the abnormal spikes in rig load data occur in a relatively small area and are tightly bunched, as shown in the second rig load data chart **1410**, it is likely that the pump (Not Shown) is being pulled into a paraffin buildup interval within the tubing and the pump is acting as a paraffin swab.

[0060] Paraffin is temperature sensitive and typically remains in solution until the oil cools off as it travels from downhole in the well 58 to the surface. At some temperature associated with the geothermal gradient, paraffin drops out and adheres to the tubing 62. The supervisor can determine the location of the paraffin by reviewing rig load data on the monitor 48 and counting the number of peaks of rig load data that occur after the abnormal data caused by the paraffin and multiplying that number by the length of a stand of rods 62.

[0061] Figure 13 is a logical flowchart diagram illustrating an exemplary method 1300 for determining well bore conditions by evaluating the exemplary rig load data charts. Referencing Figs. 1, 3, 5, 12, 13, and 14, the exemplary method 1300 begins at the START step and continues to step 1302, where a request is received to display the rig load chart on the monitor 48 at the computer monitor 100. In step 1304, the rig load chart is displayed on the monitor 48. A supervisor evaluates the data in the data curves of the rig load chart on the monitor 48 at the computer 100 in step 1306. In an alternative embodiment, the supervisor evaluates the data of the rig load chart in hard-copy form printed out by a printer, copier, plotter, or other printing or display device known to those of ordinary skill in the art.

[0062] In step 1308, counter variable X is set equal to one. In one exemplary embodiment, counter variable X represents an activity completed by the service rig 20. In step 1310, the supervisor views the monitor 48 and identifies an activity on the rig load chart. In one exemplary embodiment, the supervisor identifies the activity on the chart in the manner described in Figures 6-8 hereinabove. In step 1312, an inquiry is conducted to determine if the first activity is the pulling of rods or tubing from a well 58. If tubing is being pulled from the well 58, the "Tubing" branch is followed to step 1314, where the supervisor evaluates the data on the monitor 48 and determines an average rate of load decline along the slope of peak load data on the rig load chart. For example, in Figure 12, the average rate of load decline is represented by the lines 1220, 1230, and 1240 in rig load charts 1205, 1210, and 1215 respectively. While the exemplary embodiment shows an actual line displayed in the rig load charts 1205-1215, those of ordinary skill in the art will recognize that an operator or supervisor is capable of viewing the load data on the monitor 48 and "eyeballing" where an average load decline line 1220, 1230, 1240 would be without actually having it placed on the chart.

[0063] In step 1316, an inquiry is conducted by the supervisor to determine if there are any data points on the chart 1205-1215 that represent abnormal load levels that are

substantially above the average load decline **1220**, **1230**, **1240**. If not, the “NO” branch is followed to step **1316** to continue looking for abnormal rig load levels. Otherwise, the “YES” branch is followed to step **1318**. In the example of Figure 12, rig load chart **1210** presents an abnormal load level at data point **1235**. In addition, rig load chart **1215** presents abnormal load levels at several data points, including data points designated **1245-1255**.

[0064] In step **1318**, an inquiry is conducted by the supervisor to determine if there are several data spikes above the average load decline. In Figure 12, rig load chart **1215** presents several data spikes **1245-1250** above the average load decline **1240** while rig load chart **1210** only has a single data spike **1235** above the average load decline **1230** and rig load chart **1205** does not have any data spikes above the average load decline **1220**. In one exemplary embodiment, evaluating whether there are several spikes, the supervisor typically evaluates whether several different stands of tubing **62** show higher than normal load levels, not if a single pull of string **62** happens to display multiple data points above the average load decline levels. If there are not several spikes above the average load decline, the “NO” branch is followed to step **1320**, where the supervisor identifies the problem as a tight or bad spot in the well **58**.

[0065] In step **1322**, the supervisor determines the location of the tight or bad spot in the well. In one exemplary embodiment, the supervisor evaluates the monitor **48** to determine the location by counting the number of peaks in the data chart **1210** that occur after the abnormally high rig load data spike **1235** until all the tubing is pulled from the well **58**. The supervisor then multiplies that number by the length of the tubing **62** being pulled from the well **58** to determine where the tight or bad spot is located. In step **1324**, the supervisor records the location of the tight or bad spot in the well **58** and, if not previously identified, schedules service for that section of the well **58**.

[0066] Returning to step **1318**, if there are several data spikes above the average load decline, the “YES” branch is followed to step **1326**. In step **1326**, an inquiry is conducted by the supervisor to determine if the abnormal load spikes are occurring at random intervals. As shown in the rig load chart **1215** of Figure 12, the abnormal load spikes **1245-1255** in this exemplary chart **1215** are occurring at random intervals. If the spikes are not occurring at random intervals, the “NO” branch is followed to step **1342**. Otherwise, the “YES” branch is followed to step **1328**, where the supervisor identifies the problem as the TAC being improperly released and dragging in the well **58** as the tubing **62**

is being pulled out and records the problem in the computer **100**. The process continues from step **1328** to step **1342**.

[0067] Returning to step **1312**, if the activity is determined by the supervisor to be pulling rods, the “Rod” branch is followed to step **1330** to determine the average upper load level for the charted load data. For example, in Figure 14, the first rig load chart **1405** has an average upper load level represented by the line **1415**, while the second rig load chart **1410** has an average upper load level represented by the line **1420**. In step **1332**, an inquiry is conducted to determine if there is any rig load data at a level substantially above the average load level. If not, the “NO” branch is followed back to step **1332** to continue the search for abnormal rig load levels on the monitor **48**. Otherwise, the “YES” branch is followed to step **1334**.

[0068] In step **1334**, an inquiry is conducted to determine if the abnormally high load levels are generally confined to one area of the rod pull data. As shown in Figure 14, the exemplary rig load chart **1410** shows abnormally high rig load data **1425** that is generally confined to a small portion of the rod pull activity while the remaining data is generally below the average load level **1420**. If the abnormally high load levels are generally confined to one area of the rod pull data on the rig load chart, then the “YES” branch is followed to step **1336**, where the supervisor identifies the problem as the paraffin level in the tubing and records the problem in the computer **100**.

[0069] In step **1338**, the supervisor views the monitor **48** and counts the remaining number of load peaks for this activity that are subsequent to the abnormally high load peaks caused by the paraffin **1425**. In step **1340**, the supervisor calculates the paraffin level by multiplying the number of load peaks subsequent to the peaks caused by the paraffin level **1425** by the length of the rods **62** being pulled from the well **58**. In step **1342**, an inquiry is conducted to determine if there is another activity to analyze on the rig load chart. If so, the “YES” branch is followed to step **1344**, where counter variable X is incremented by one. The process returns from step **1344** to step **1310** to identify the next activity. If the rig load chart does not contain any additional activities to analyze, the “NO” branch is followed to the END step.

[0070] Figure 15 represents an exemplary method **1500** for determining the speed of the removal of tubing or rods from a well based on an evaluation of the rig load data chart according to one exemplary embodiment of the present invention. Now referring to Figures

1, 10, and 15, the exemplary method **1500** begins at the START step and continues to step **1505**, where a time period **1020** is selected on chart of the display **1000**. In one exemplary embodiment, Figure 10 shows a selection of an approximately twenty-six minute time period **1020** between 8:58 and 9:24. In step **1510**, the sum of the data peaks **1025** (and others peaks not specifically pointed out) on the display **1000** within that time period **1020** is determined. In one exemplary embodiment, the number of data peaks **1025** is determined by the remote computer **100**; however other methods known to those of ordinary skill in the art, including having the operator count the number of data peaks **1025** within the selected time range **1020**, are within the scope of the present invention.

[0071] In step **1515**, the sum of the data peaks **1025** on the display **1000** within the time period **1020** is divided by the number of minutes selected in the time period **1020**. In the exemplary embodiment shown in Figure 10, the number of data peaks, fifty-five, is divided by the number of minutes within the time period **1020**, twenty-six minutes, to arrive at a rod removal speed of approximately 2.1 stands per minute. Those of ordinary skill in the art will recognize that the method described in Figure 15 can be used to also determine rod insertion speed as well as tubing insertion and removal speeds by analyzing charts representing those activities. In addition, those of ordinary skill in the art will recognize that the method described in Figure 15 can be modified to sum the troughs in the rig weight data curve, instead of the data peaks, in step **1510** to determine the removal or insertion speeds of rods or tubing. The process continues from step **1515** to the END step.

[0072] Although the invention is described with reference to a preferred embodiments, it should be appreciated by those skilled in the art that various modifications are well within the scope of the invention. Therefore, the scope of the invention is to be determined by reference to the claims that follow. From the foregoing, it will be appreciated that an embodiment of the present invention overcomes the limitations of the prior art. Those skilled in the art will appreciate that the present invention is not limited to any specifically discussed application and that the embodiments described herein are illustrative and not restrictive. From the description of the exemplary embodiments, equivalents of the elements shown therein will suggest themselves to those of ordinary skill in the art, and ways of constructing other embodiments of the present invention will suggest themselves to practitioners of the art. Therefore, the scope of the present invention is to be limited only by any claims that follow.

CLAIMS

I claim:

1. A method for determining an activity completed by a service rig at a well site by analyzing a rig load chart comprising rig load data, comprising:
 - displaying the rig load data on the rig load chart at a monitor comprising a display;
 - evaluating the rig load data with a computer communicably coupled to the monitor;
 - identifying with the computer a plurality of rig load data on the rig load chart as a first activity;
 - determining with a computer the first activity by evaluating the plurality of rig load data; and
 - recording the first activity in a computer storage medium.
2. The method of claim 1, wherein determining the first activity by evaluating the plurality of rig load data comprises:
 - evaluating with the computer the rig load data to determine if an upper level of the rig load data in the plurality of rig load data is substantially flat;
 - evaluating with the computer the rig load data to determine if a baseline for the rig load data is substantially increasing based on a positive determination that the upper level of the rig load data is substantially flat; and
 - identifying with the computer the first activity as pulling rods out of a well based on a positive determination that the baseline for the rig load data is substantially increasing.
3. The method of claim 1 or 2, further comprising:
 - evaluating with the computer the rig load data to determine if a baseline for the rig load data is substantially decreasing based on a positive determination that an upper level of the rig load data is substantially flat; and
 - identifying with the computer the first activity as inserting rods into a well based on a positive determination that the baseline of the rig load data is substantially decreasing.

4. The method of any one of claims 1 to 3, wherein determining the first activity by evaluating the plurality of rig load data comprises:

evaluating with the computer the rig load data to determine if a baseline of the rig load data in the plurality of rig load data is substantially flat;

evaluating with the computer the rig load data to determine if an upper level of the rig load data is substantially increasing based on a positive determination that the baseline of the rig load data is substantially flat; and

identifying with the computer the first activity as running tubing into a well based on a positive determination that the upper level of the rig load data is increasing.

5. The method of any one of claims 1 to 4, further comprising:

evaluating with the computer the rig load data to determine if an upper level of the rig load data is substantially decreasing based on a positive determination that the baseline of the rig load data is substantially flat; and

identifying with the computer the first activity as removing tubing from a well based on a positive determination that the upper level of the rig load data is substantially decreasing.

6. The method of any one of claims 1 to 5, further comprising:

evaluating with the computer the rig load data to determine if an upper level of the rig load data is neither substantially increasing nor substantially decreasing based on a positive determination that the baseline of the rig load data is substantially flat; and

determining with the computer if the first activity is positioned between a second activity preceding the first activity and a third activity subsequent to the first activity, wherein the second activity is identified as removing rods from the well and the third activity is identified as removing tubing from the well, based on a positive determination that the upper level of the rig load data is neither substantially increasing nor substantially decreasing; and

identifying with the computer the first activity as unseating a tubing anchor catcher in the well based on a positive determination that the first activity is positioned between the second activity preceding the first activity and the third activity subsequent to the first

activity, wherein the second activity is identified as removing rods from the well and the third activity is identified as removing tubing from the well.

7. The method of claim 6, further comprising:

determining with the computer if the first activity is positioned between the second activity preceding the first activity and the third activity subsequent to the first activity, wherein the second activity is identified as inserting tubing into the well and the third activity is identified as inserting rods into the well, based on a positive determination that the upper level of the rig load data is neither substantially increasing nor substantially decreasing; and

identifying with the computer the first activity as setting the tubing anchor catcher in the well based on a positive determination that the first activity is positioned between the second activity preceding the first activity and the third activity subsequent to the first activity, wherein the second activity is identified as inserting rods into the well and the third activity is identified as inserting tubing into the well.

8. The method of any one of claims 1 to 7, wherein the first activity is selected from a group consisting of rigging up a service rig, pulling rods, laying down rods, pulling tubing, laying down tubing, picking up tubing, running tubing, picking up rods, running rods, rigging down the work-over rig, rigging up an auxiliary service unit, rigging down an auxiliary service unit, longstroke, cut paraffin, nipple up a blow out preventer, nipple down a blow out preventer, fishing, jarring, swabbing, flowback, drilling, clean out, well control activities, killing a well, circulating fluid within a well, unseating pumps, setting a release tubing anchor, releasing a tubing anchor, setting a packer, releasing a packer, picking up drill collars, laying down drill collars, picking up tools, laying down tools, rigging up third party servicing equipment, well stimulation, cementing, logging, perforating, inspecting the well, and traveling to the well site.

9. The method of any one of claims 1 to 8, wherein the rig load data is obtained from a hydraulic pad at the service rig.

10. A method of determining well bore conditions by analyzing a rig load chart comprising rig load data, the method comprising:

displaying the rig load data on the rig load chart at a monitor comprising a display;

evaluating the rig load data with a computer communicably coupled to the monitor;

identifying with the computer a first activity by evaluating with the computer a plurality of rig load data on the rig load chart;

determining with the computer if the first activity is pulling at least one string of tubing from the well bore;

determining with the computer if there is at least one abnormally high rig load data point on the rig load chart based on a positive determination that the first activity is pulling at least one string of tubing from the well bore, wherein the abnormally high rig load data point is substantially above an average load decline for the rig load data on the rig load chart; and

identifying with the computer the well bore condition as normal based on a negative determination that there is at least one abnormally high rig load data point on the rig load chart.

11. The method of claim 10, further comprising:

determining with the computer if there are several abnormally high rig load data points on the rig load chart based on a positive determination that there is at least one abnormally high rig load data point on the rig load chart; and

identifying with the computer the well bore condition as having a tubing anchor catcher being improperly released and dragging in the well bore based on a positive determination that there are several abnormally high rig load data points on the rig load chart.

12. The method of claim 10 or 11, further comprising identifying with the computer the well bore condition as comprising a tight spot based on a negative determination that there are several abnormally high rig load data points on the rig load chart.

13. The method of claim 12, further comprising calculating with the computer a position of the tight spot in the well bore.

14. The method of claim 13, wherein calculating the position of the tight spot in the well bore comprises:

calculating with the computer a sum of the number of peaks of rig load data subsequent to the abnormally high rig load data points on the rig load chart; and

determining with the computer the product of the sum of the number of peaks and a length of a stand of tubing.

15. The method of any one of claims 10 to 14, further comprising:

determining with the computer if the first activity is pulling at least one stand of rods from the well bore;

determining with the computer if there are a plurality of successive abnormally high rig load data points on the rig load chart based on a positive determination that the first activity is pulling at least one stand of rods from the well bore, wherein the abnormally high rig load data point is substantially above an average upper load level for the rig load data on the rig load chart; and

identifying with the computer the well bore condition as a paraffin level in the well bore based on a positive determination that there are a plurality of successive abnormally high rig load data points on the rig load chart.

16. The method of claim 15, further comprising calculating with the computer a position of the paraffin level in the well bore.

17. The method of claim 16, wherein calculating the position of the paraffin level in the well bore comprises:

calculating with the computer a sum of the number of peaks of rig load data subsequent to the last successive abnormally high rig load data point on the rig load chart; and

determining with the computer the product of the sum of the number of peaks and a length of a stand of rods.

18. The method of any one of claims 10 to 17, wherein identifying a first activity by evaluating a plurality of rig load data on the rig load chart comprises:

evaluating with the computer the rig load data for the first activity to determine if an upper level of the rig load data in the plurality of rig load data is substantially flat;

evaluating with the computer the rig load data to determine if the baseline for the rig load data is substantially increasing based on a positive determination that the upper level of the rig load data is substantially flat; and

identifying with the computer the first activity as pulling rods out of the well bore based on a positive determination that the baseline for the rig load data is substantially increasing.

19. The method of any one of claims 10 to 18, wherein identifying a first activity by evaluating a plurality of rig load data on the rig load chart comprises:

evaluating with the computer the rig load data for the first activity to determine if a baseline of the rig load data in the plurality of rig load data is substantially flat;

evaluating with the computer the rig load data to determine if an upper level of the rig load data is substantially increasing based on a positive determination that the baseline of the rig load data is substantially flat; and

identifying with the computer the first activity as removing tubing from the well bore based on a positive determination that the upper level of the rig load data is substantially decreasing.

20. The method of any one of claims 10 to 19, wherein the rig load data is obtained from a hydraulic pad at the service rig.

21. The method of any one of claims 10 to 20, further comprising recording the first activity in a computer storage medium.

22. A method for determining the hook load on a service rig at a well site by analyzing a rig load chart comprising a rig load data curve, comprising the steps of:

displaying the rig load data curve on the rig load chart at a monitor comprising a display;

evaluating the rig load data curve with a computer communicably coupled to the monitor;

selecting at the monitor a first rig load level on the rig load data curve, wherein the first rig load level is positioned substantially along a peak on the rig load data curve;

selecting at the monitor a second rig load level on the rig load data curve, wherein the second rig load level is positioned substantially in a trough along the rig load data curve;

calculating with the computer the difference between the first rig load level and the second rig load level; and

determining with the computer the hook load on the service rig based on the calculation.

23. The method of claim 22, wherein the second rig load level is positioned substantially in a trough immediately preceding the peak of the first rig load level along the rig load data curve.

24. The method of claim 22, wherein the second rig load level is positioned substantially in a trough immediately subsequent to the peak of the first rig load level along the rig load data curve.

25. The method of any one of claims 22 to 24, wherein the rig load data is obtained from a hydraulic pad at the service rig.

26. The method of any one of claims 22 to 25, further comprising recording the hook load on the service rig in a computer storage medium.

27. A system for determining an activity completed by a service rig at a well site by analyzing a rig load chart comprising rig load data, the system comprising:

a monitor comprising a display, the monitor configured to display the rig load data from the service rig on the rig load chart; and

a computer communicably coupled to the monitor, the computer configured to evaluate the rig load data, identify a plurality of rig load data on the rig load chart as a first activity, and determine the first activity by evaluating the plurality of rig load data; and
 a computer storage medium configured to record the first activity.

28. The system of claim 27, wherein the computer is configured to determine the first activity by:

evaluating the rig load data to determine if an upper level of the rig load data in the plurality of rig load data is substantially flat;

evaluating the rig load data to determine if the baseline for the rig load data is substantially increasing based on a positive determination that the upper level of the rig load data is substantially flat; and

identifying the first activity as pulling rods out of a well based on a positive determination that the baseline for the rig load data is substantially increasing.

29. The system of claim 27 or 28, wherein the computer is further configured to evaluate the rig load data to determine if the baseline for the rig load data is substantially decreasing based on a positive determination that an upper level of the rig load data is substantially flat; and

identify the first activity as inserting rods into a well based on a positive determination that the baseline of the rig load data is substantially decreasing.

30. The system of any one of claims 27 to 29, wherein the computer is configured to determine the first activity by:

evaluating the rig load data to determine if a baseline of the rig load data in the plurality of rig load data is substantially flat;

evaluating the rig load data to determine if an upper level of the rig load data is substantially increasing based on a positive determination that the baseline of the rig load data is substantially flat; and

identifying the first activity as running tubing into a well based on a positive determination that the upper level of the rig load data is increasing.

31. The system of any one of claims 27 to 30, wherein the computer is further configured to:

evaluate the rig load data to determine if an upper level of the rig load data is substantially decreasing based on a positive determination that the baseline of the rig load data is substantially flat; and

identify the first activity as removing tubing from a well based on a positive determination that the upper level of the rig load data is substantially decreasing.

32. The system of any one of claims 27 to 30 wherein the computer is further configured to:

evaluate the rig load data to determine if an upper level of the rig load data is neither substantially increasing nor substantially decreasing based on a positive determination that the baseline of the rig load data is substantially flat;

determine if the first activity is positioned between a second activity preceding the first activity and a third activity subsequent to the first activity, wherein the second activity is identified as removing rods from the well and the third activity is identified as removing tubing from the well, based on a positive determination that the upper level of the rig load data is neither substantially increasing nor substantially decreasing; and

identify the first activity as unseating a tubing anchor catcher in the well based on a positive determination that the first activity is positioned between the second activity preceding the first activity and the third activity subsequent to the first activity, wherein the second activity is identified as removing rods from the well and the third activity is identified as removing tubing from the well.

33. The system of claim 32, wherein the computer is further configured to:

determine if the first activity is positioned between the second activity preceding the first activity and the third activity subsequent to the first activity, wherein the second activity is identified as inserting tubing into the well and the third activity is identified as inserting rods into the well, based on a positive determination that the upper level of the rig load data is neither substantially increasing nor substantially decreasing; and

identify the first activity as setting the tubing anchor catcher in the well based on a positive determination that the first activity is positioned between the second activity

preceding the first activity and the third activity subsequent to the first activity, wherein the second activity is identified as inserting rods into the well and the third activity is identified as inserting tubing into the well.

34. The system of any one of claims 27 to 33, wherein the computer is configured to selected the first activity from a group consisting of rigging up a service rig, pulling rods, laying down rods, pulling tubing, laying down tubing, picking up tubing, running tubing, picking up rods, running rods, rigging down the work-over rig, rigging up an auxiliary service unit, rigging down an auxiliary service unit, longstroke, cut paraffin, nipple up a blow out preventer, nipple down a blow out preventer, fishing, jarring, swabbing, flowback, drilling, clean out, well control activities, killing a well, circulating fluid within a well, unseating pumps, setting a release tubing anchor, releasing a tubing anchor, setting a packer, releasing a packer, picking up drill collars, laying down drill collars, picking up tools, laying down tools, rigging up third party servicing equipment, well stimulation, cementing, logging, perforating, inspecting the well, and traveling to the well site.

35. The system of any one of claims 27 to 34, wherein the rig load data is obtained from a hydraulic pad at the service rig.

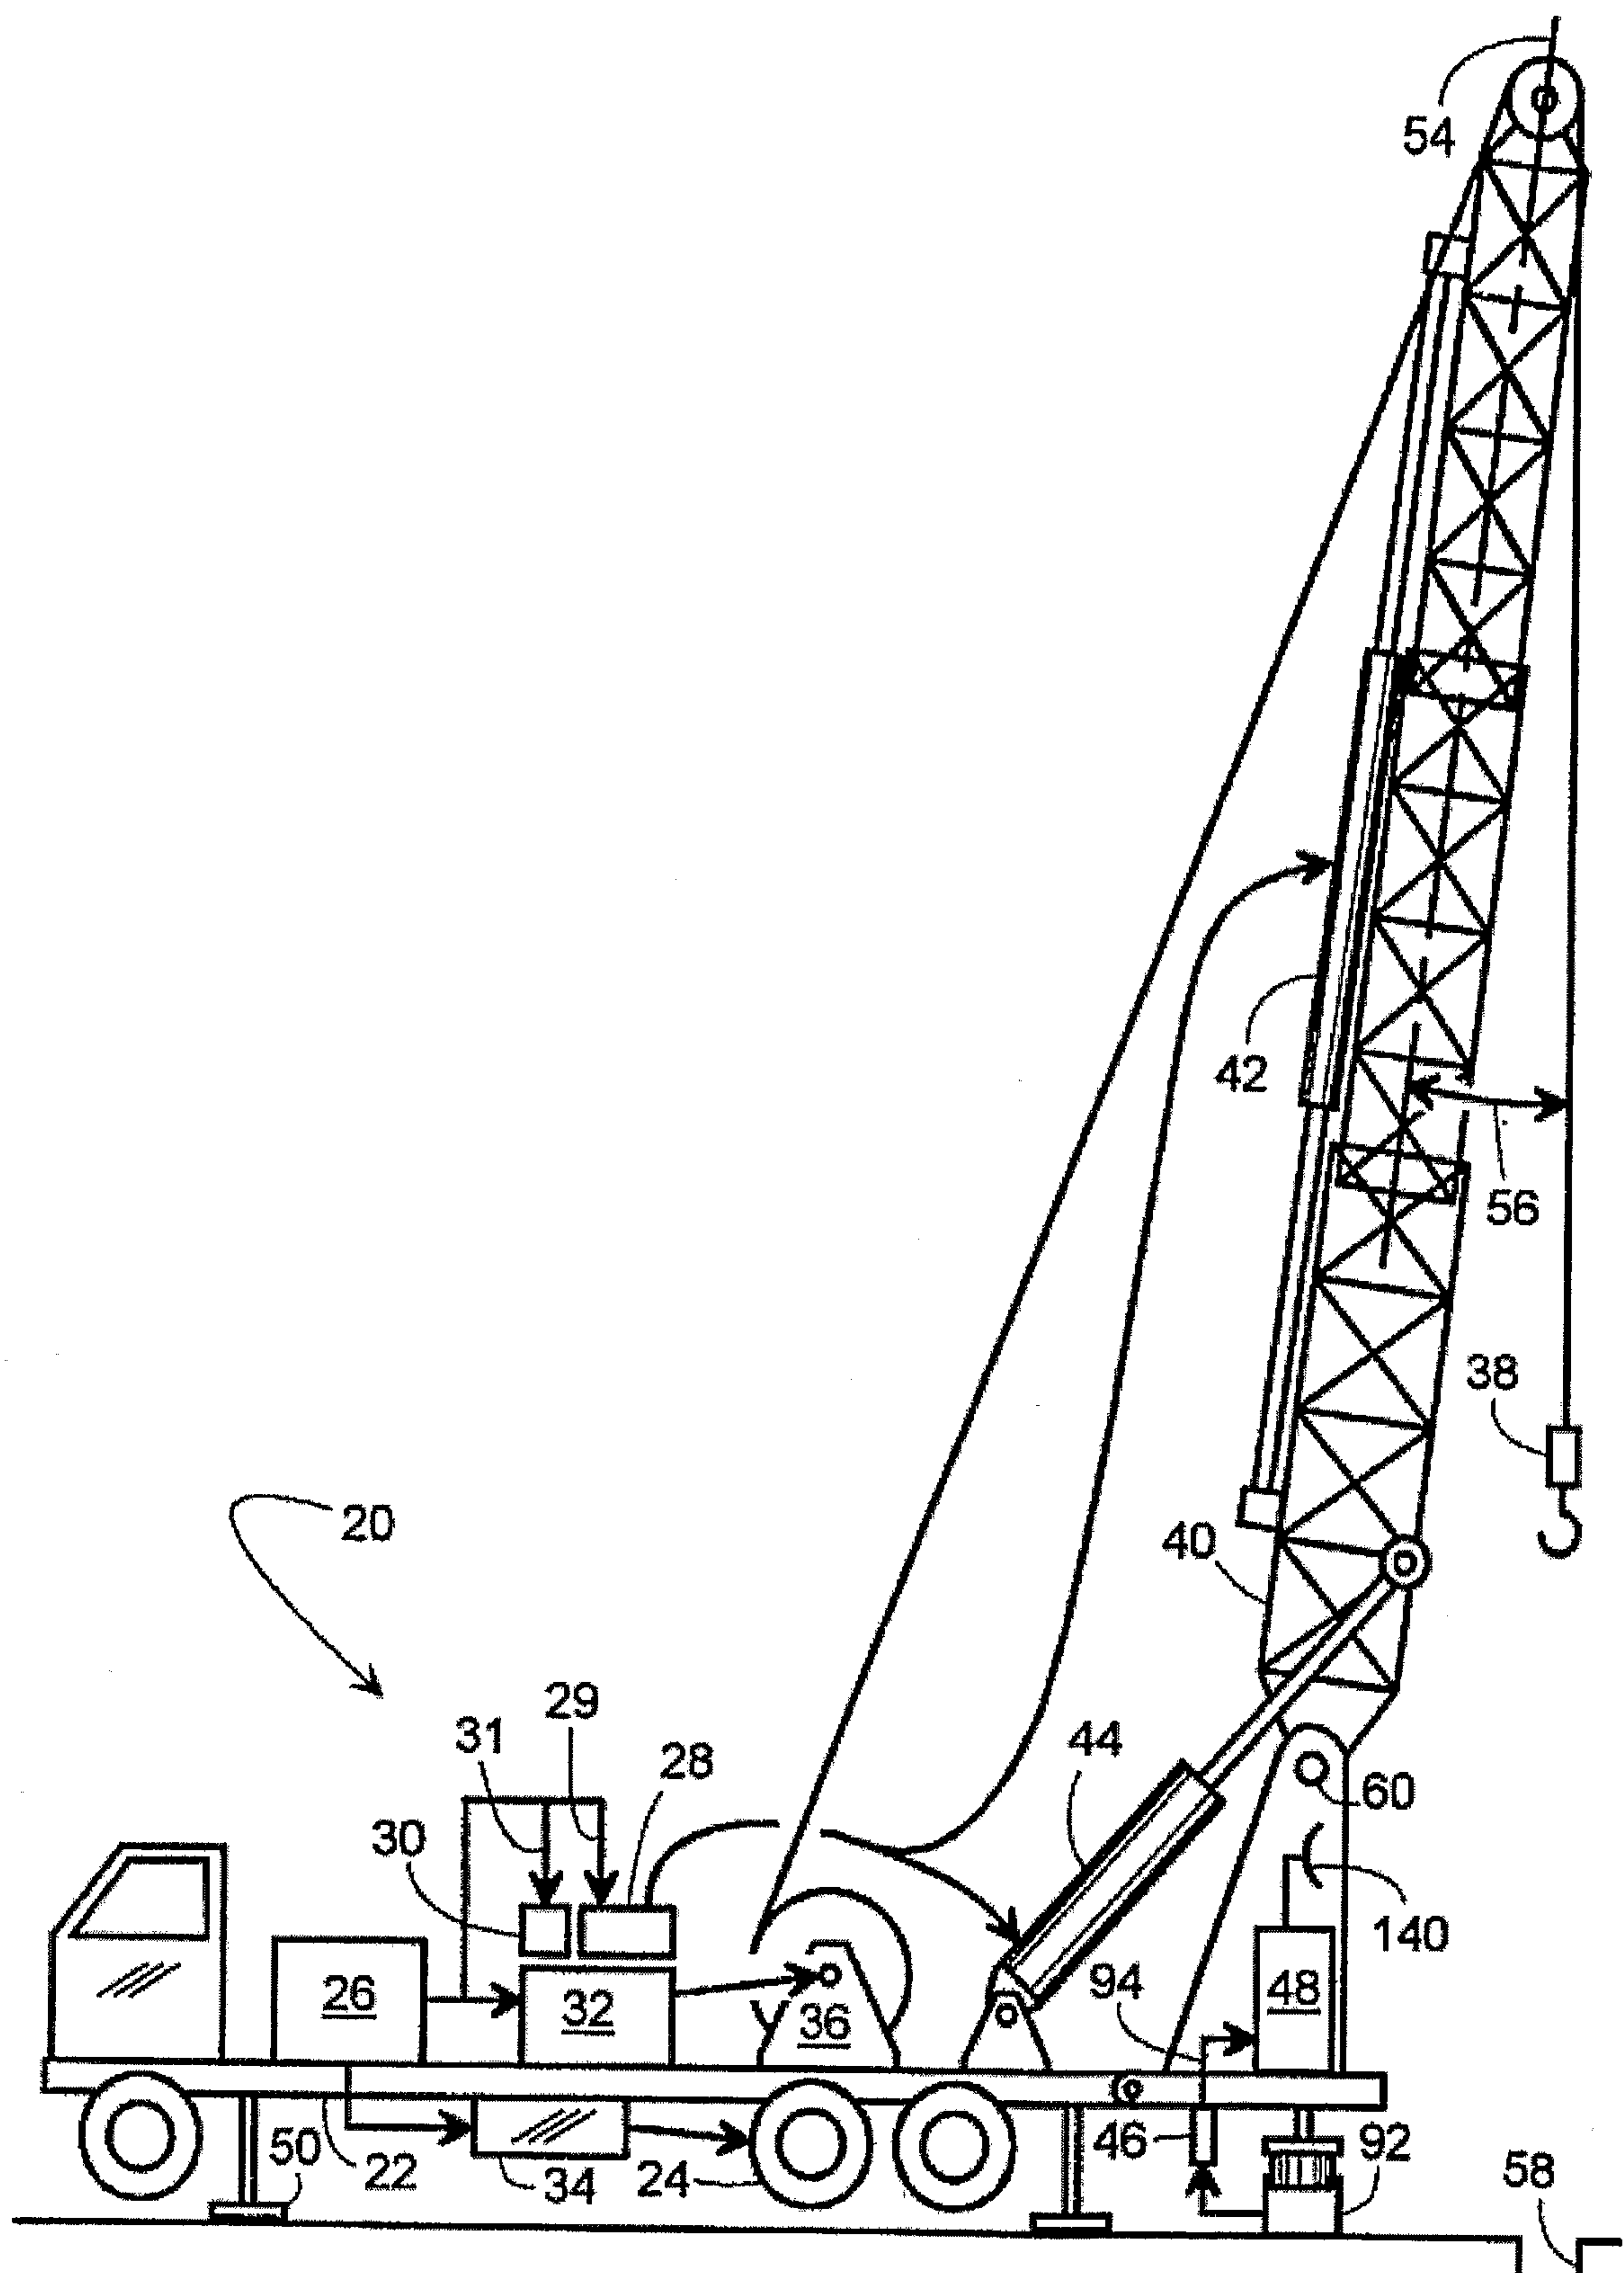


Figure 1

Figure 2/15

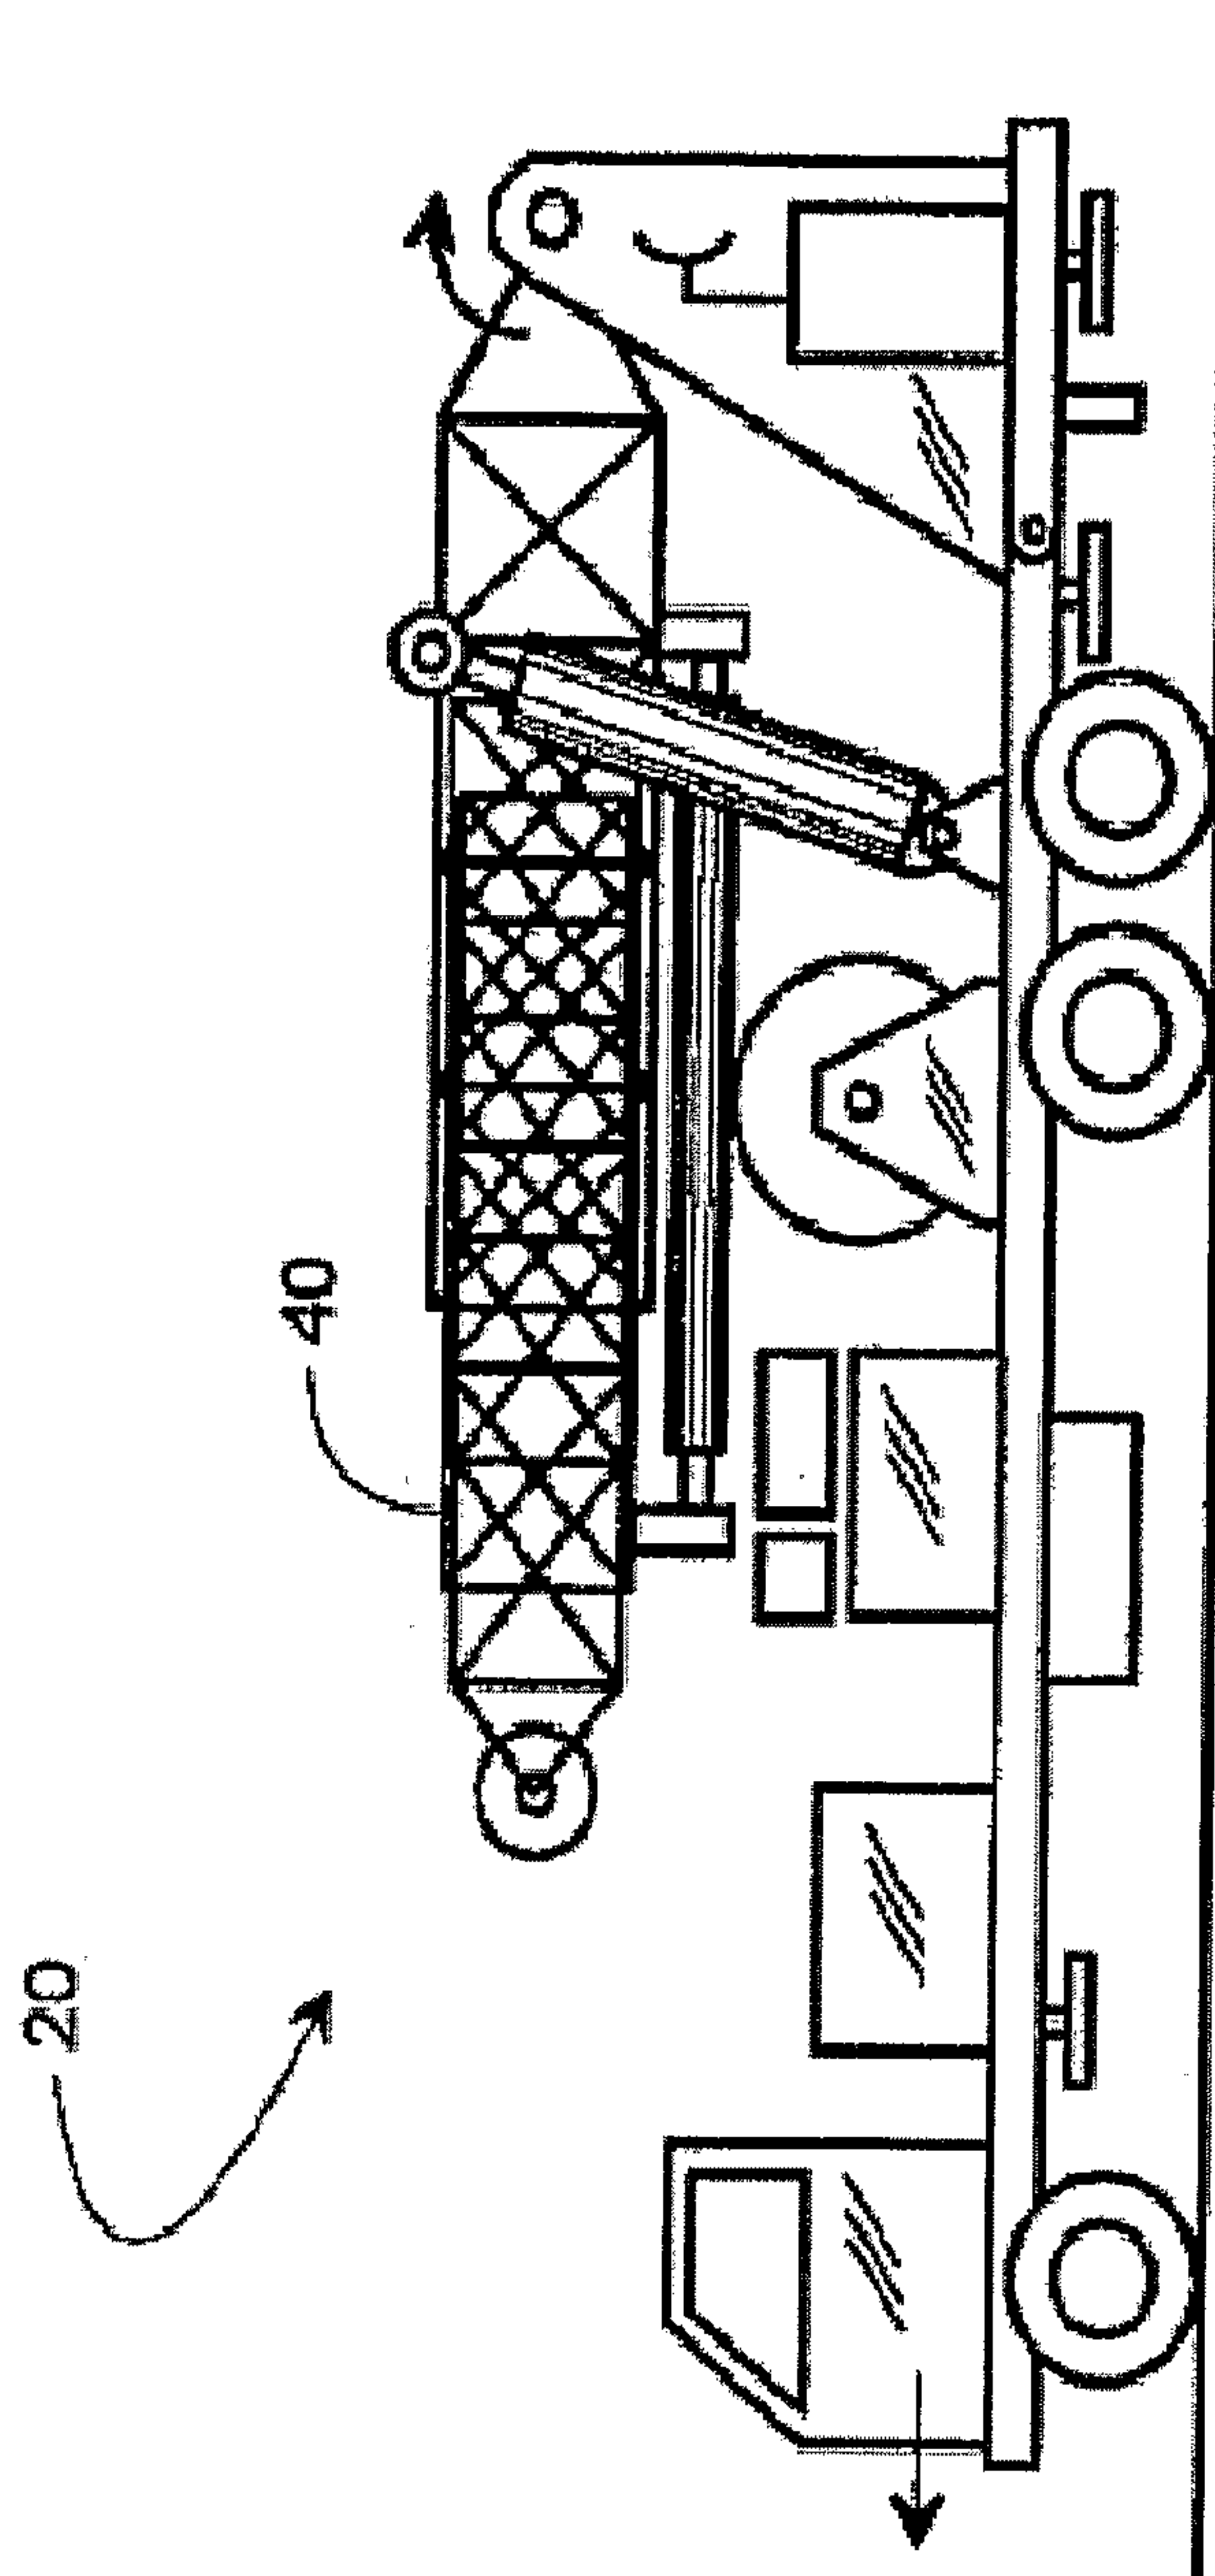


Figure 2

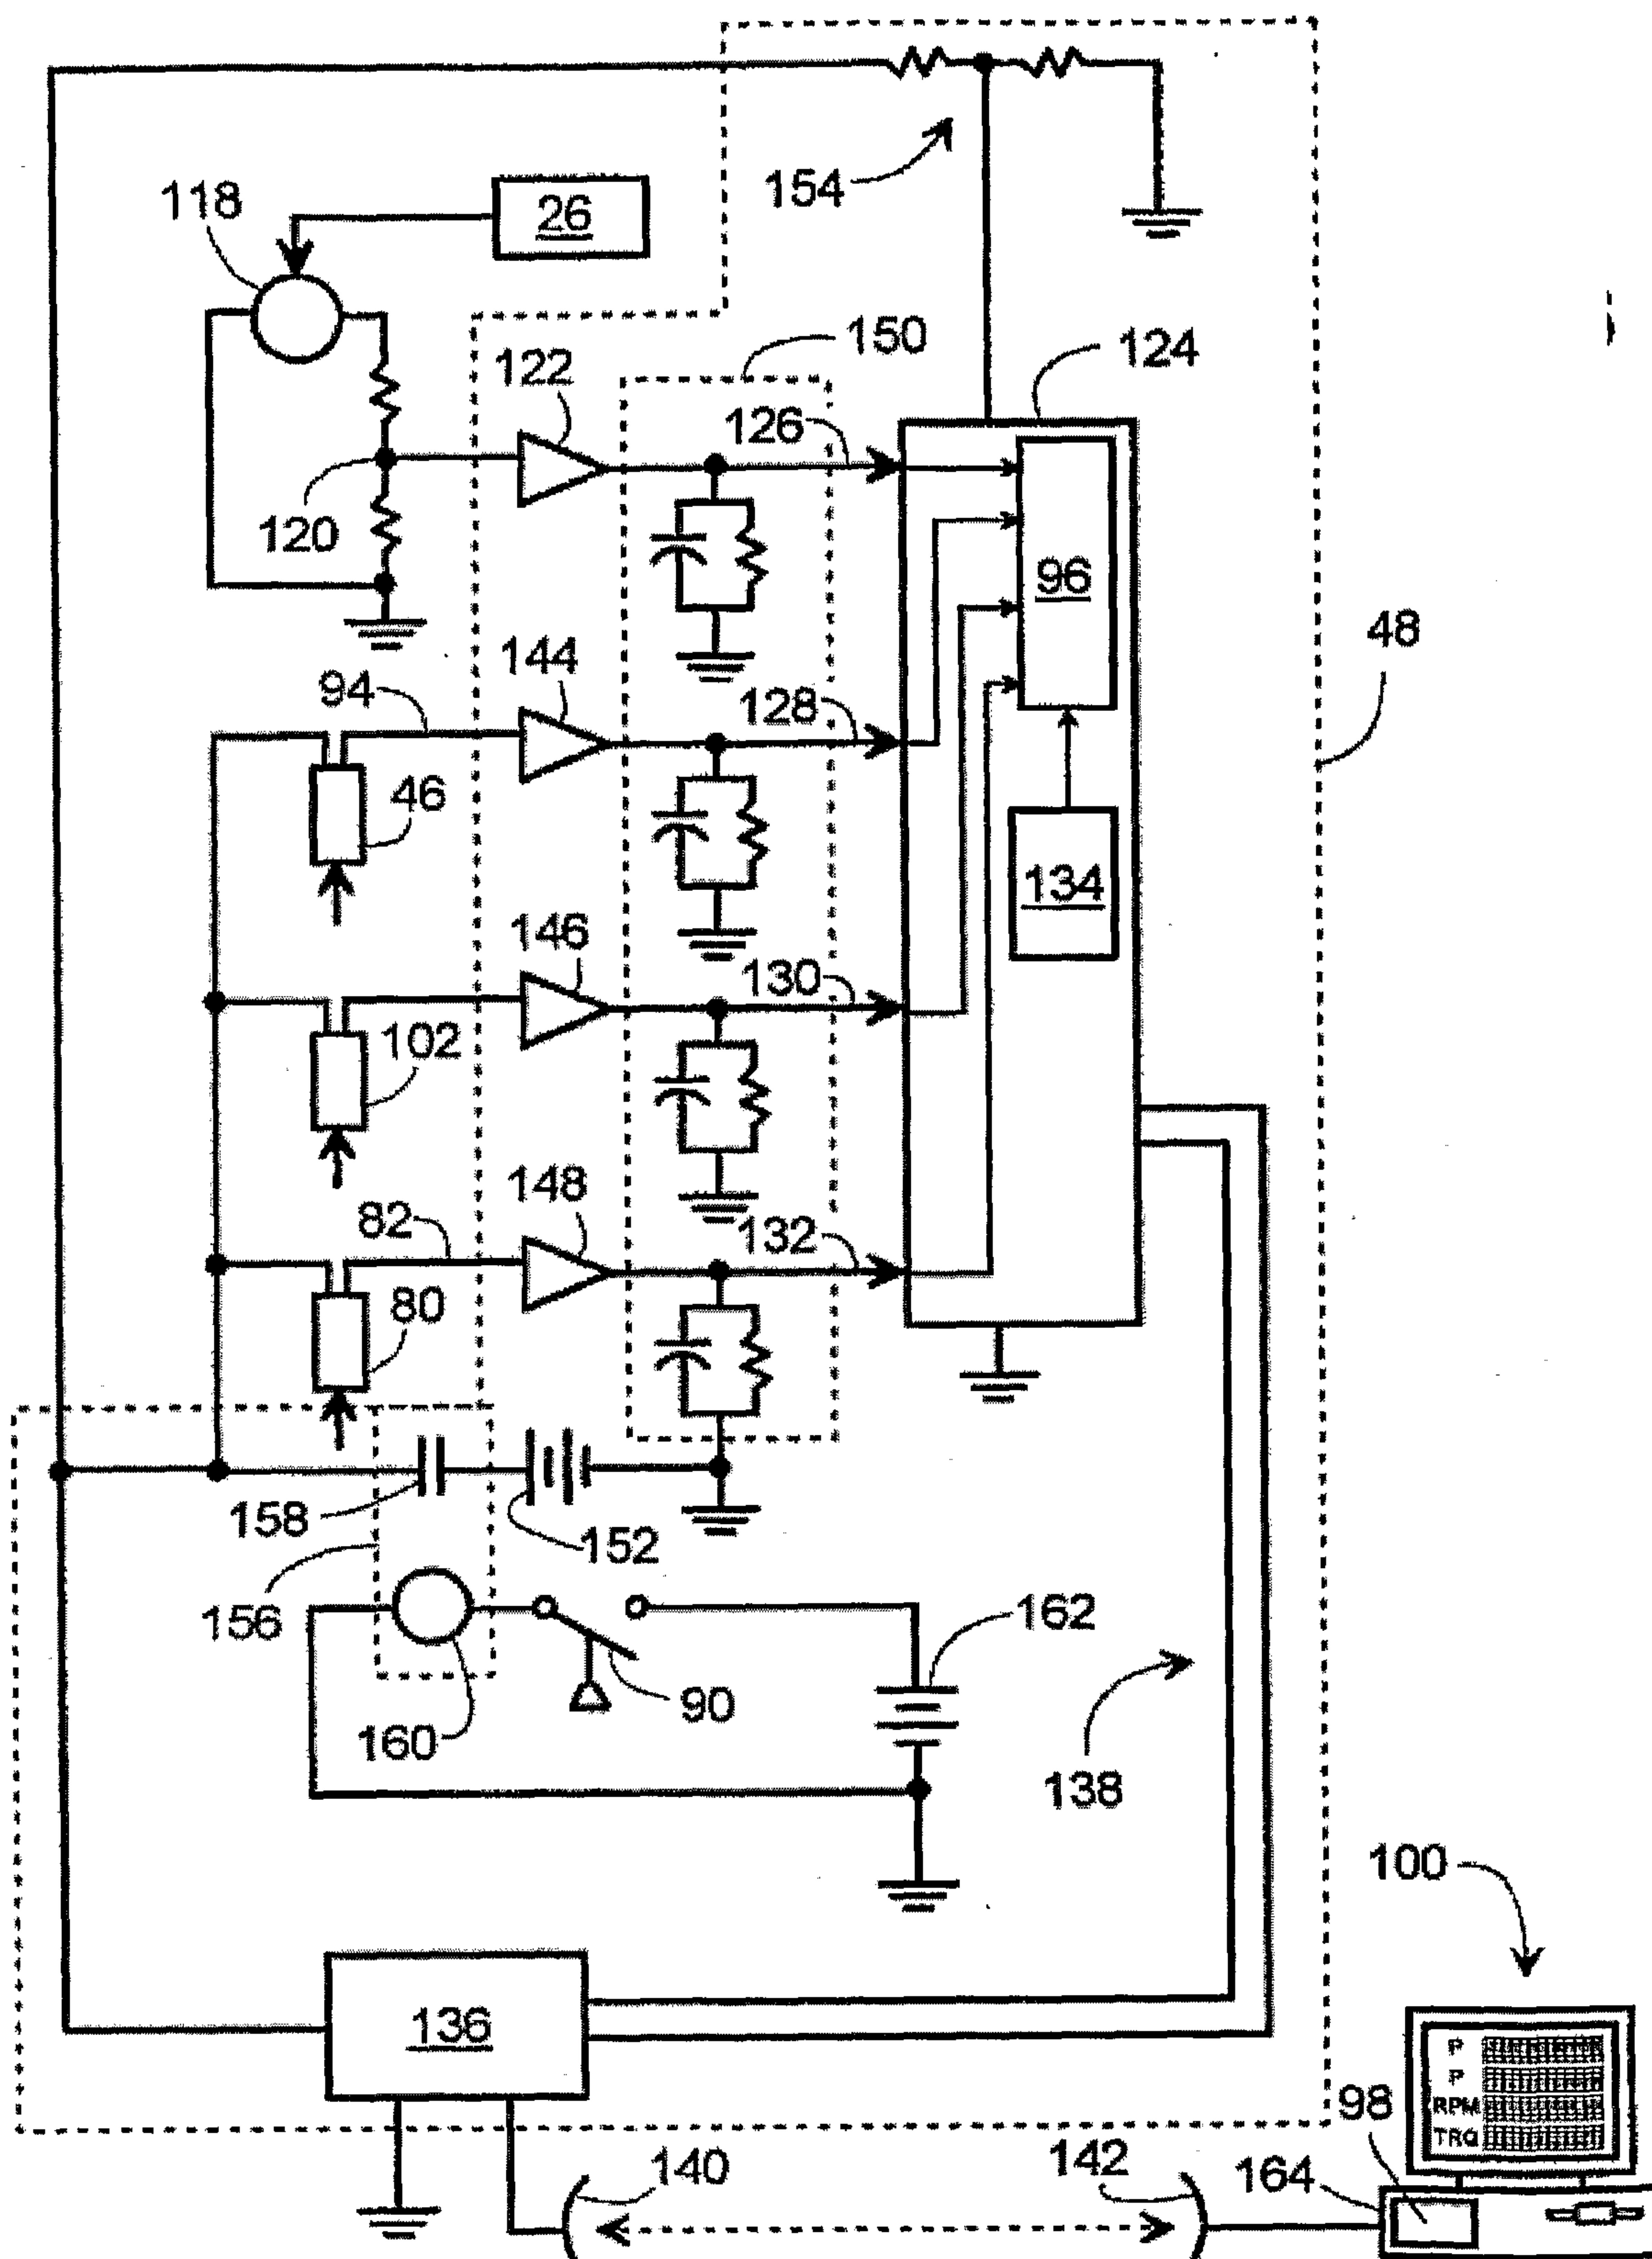


Figure 3

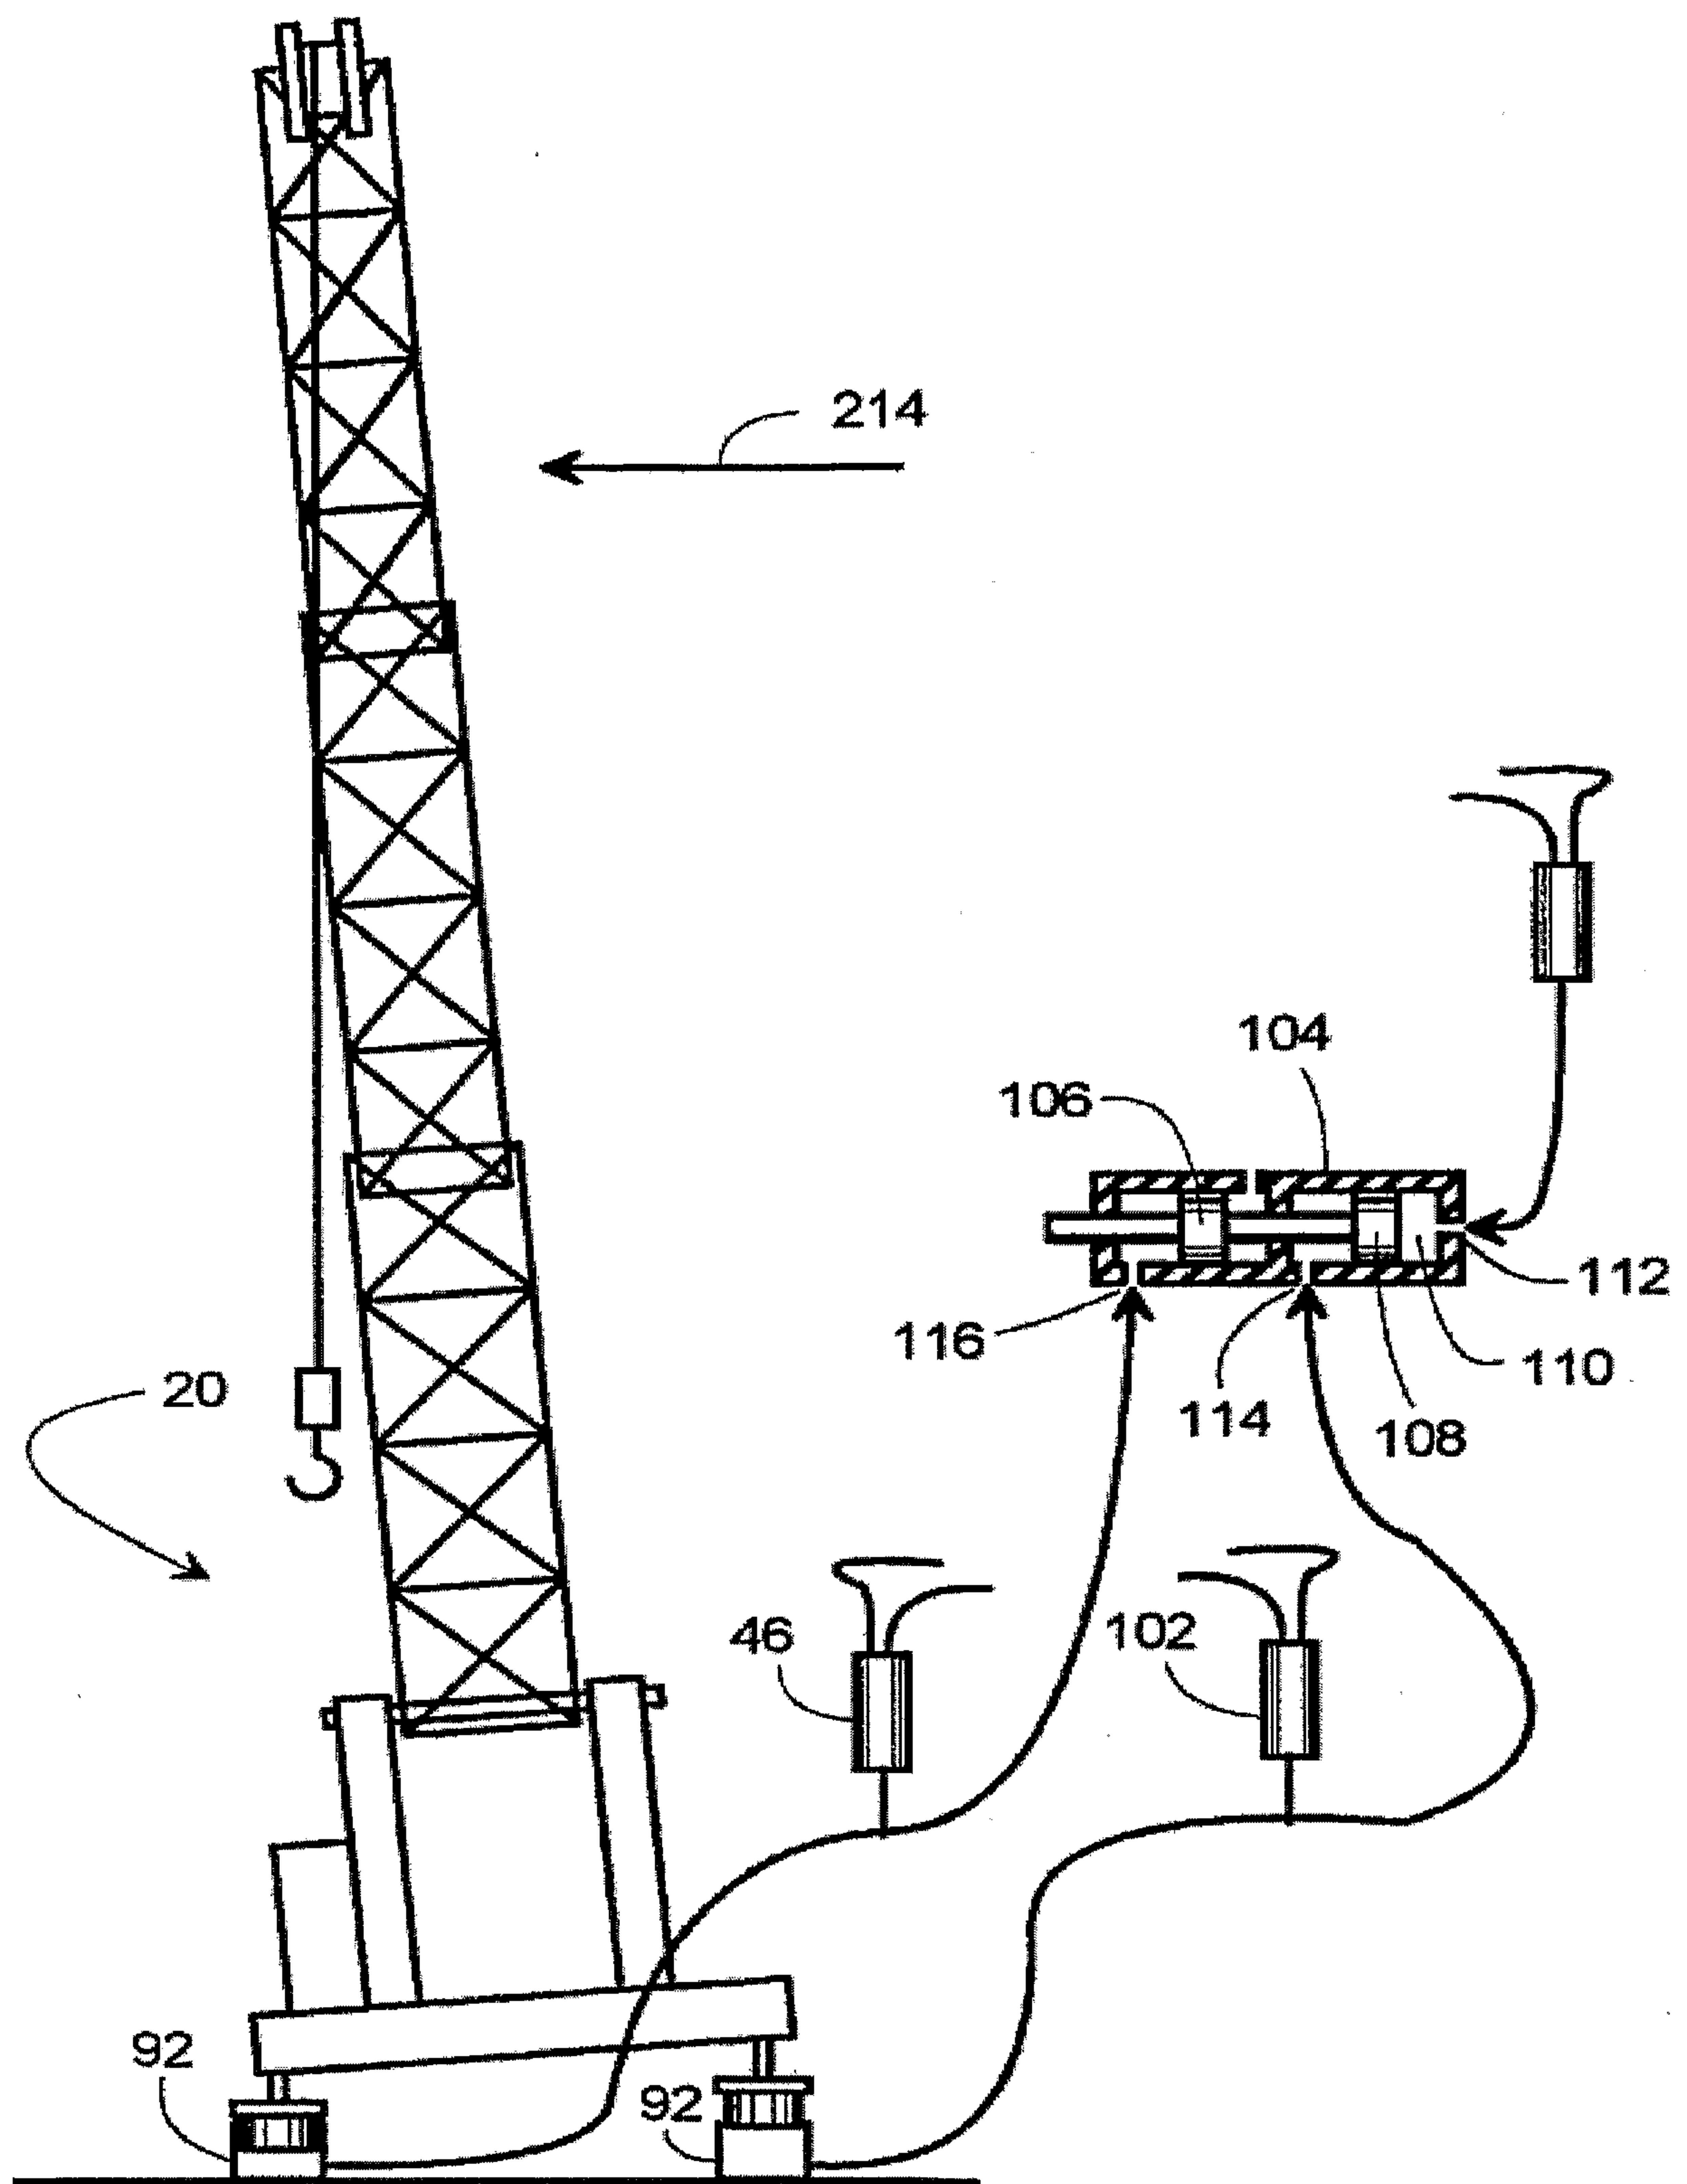


Figure 4

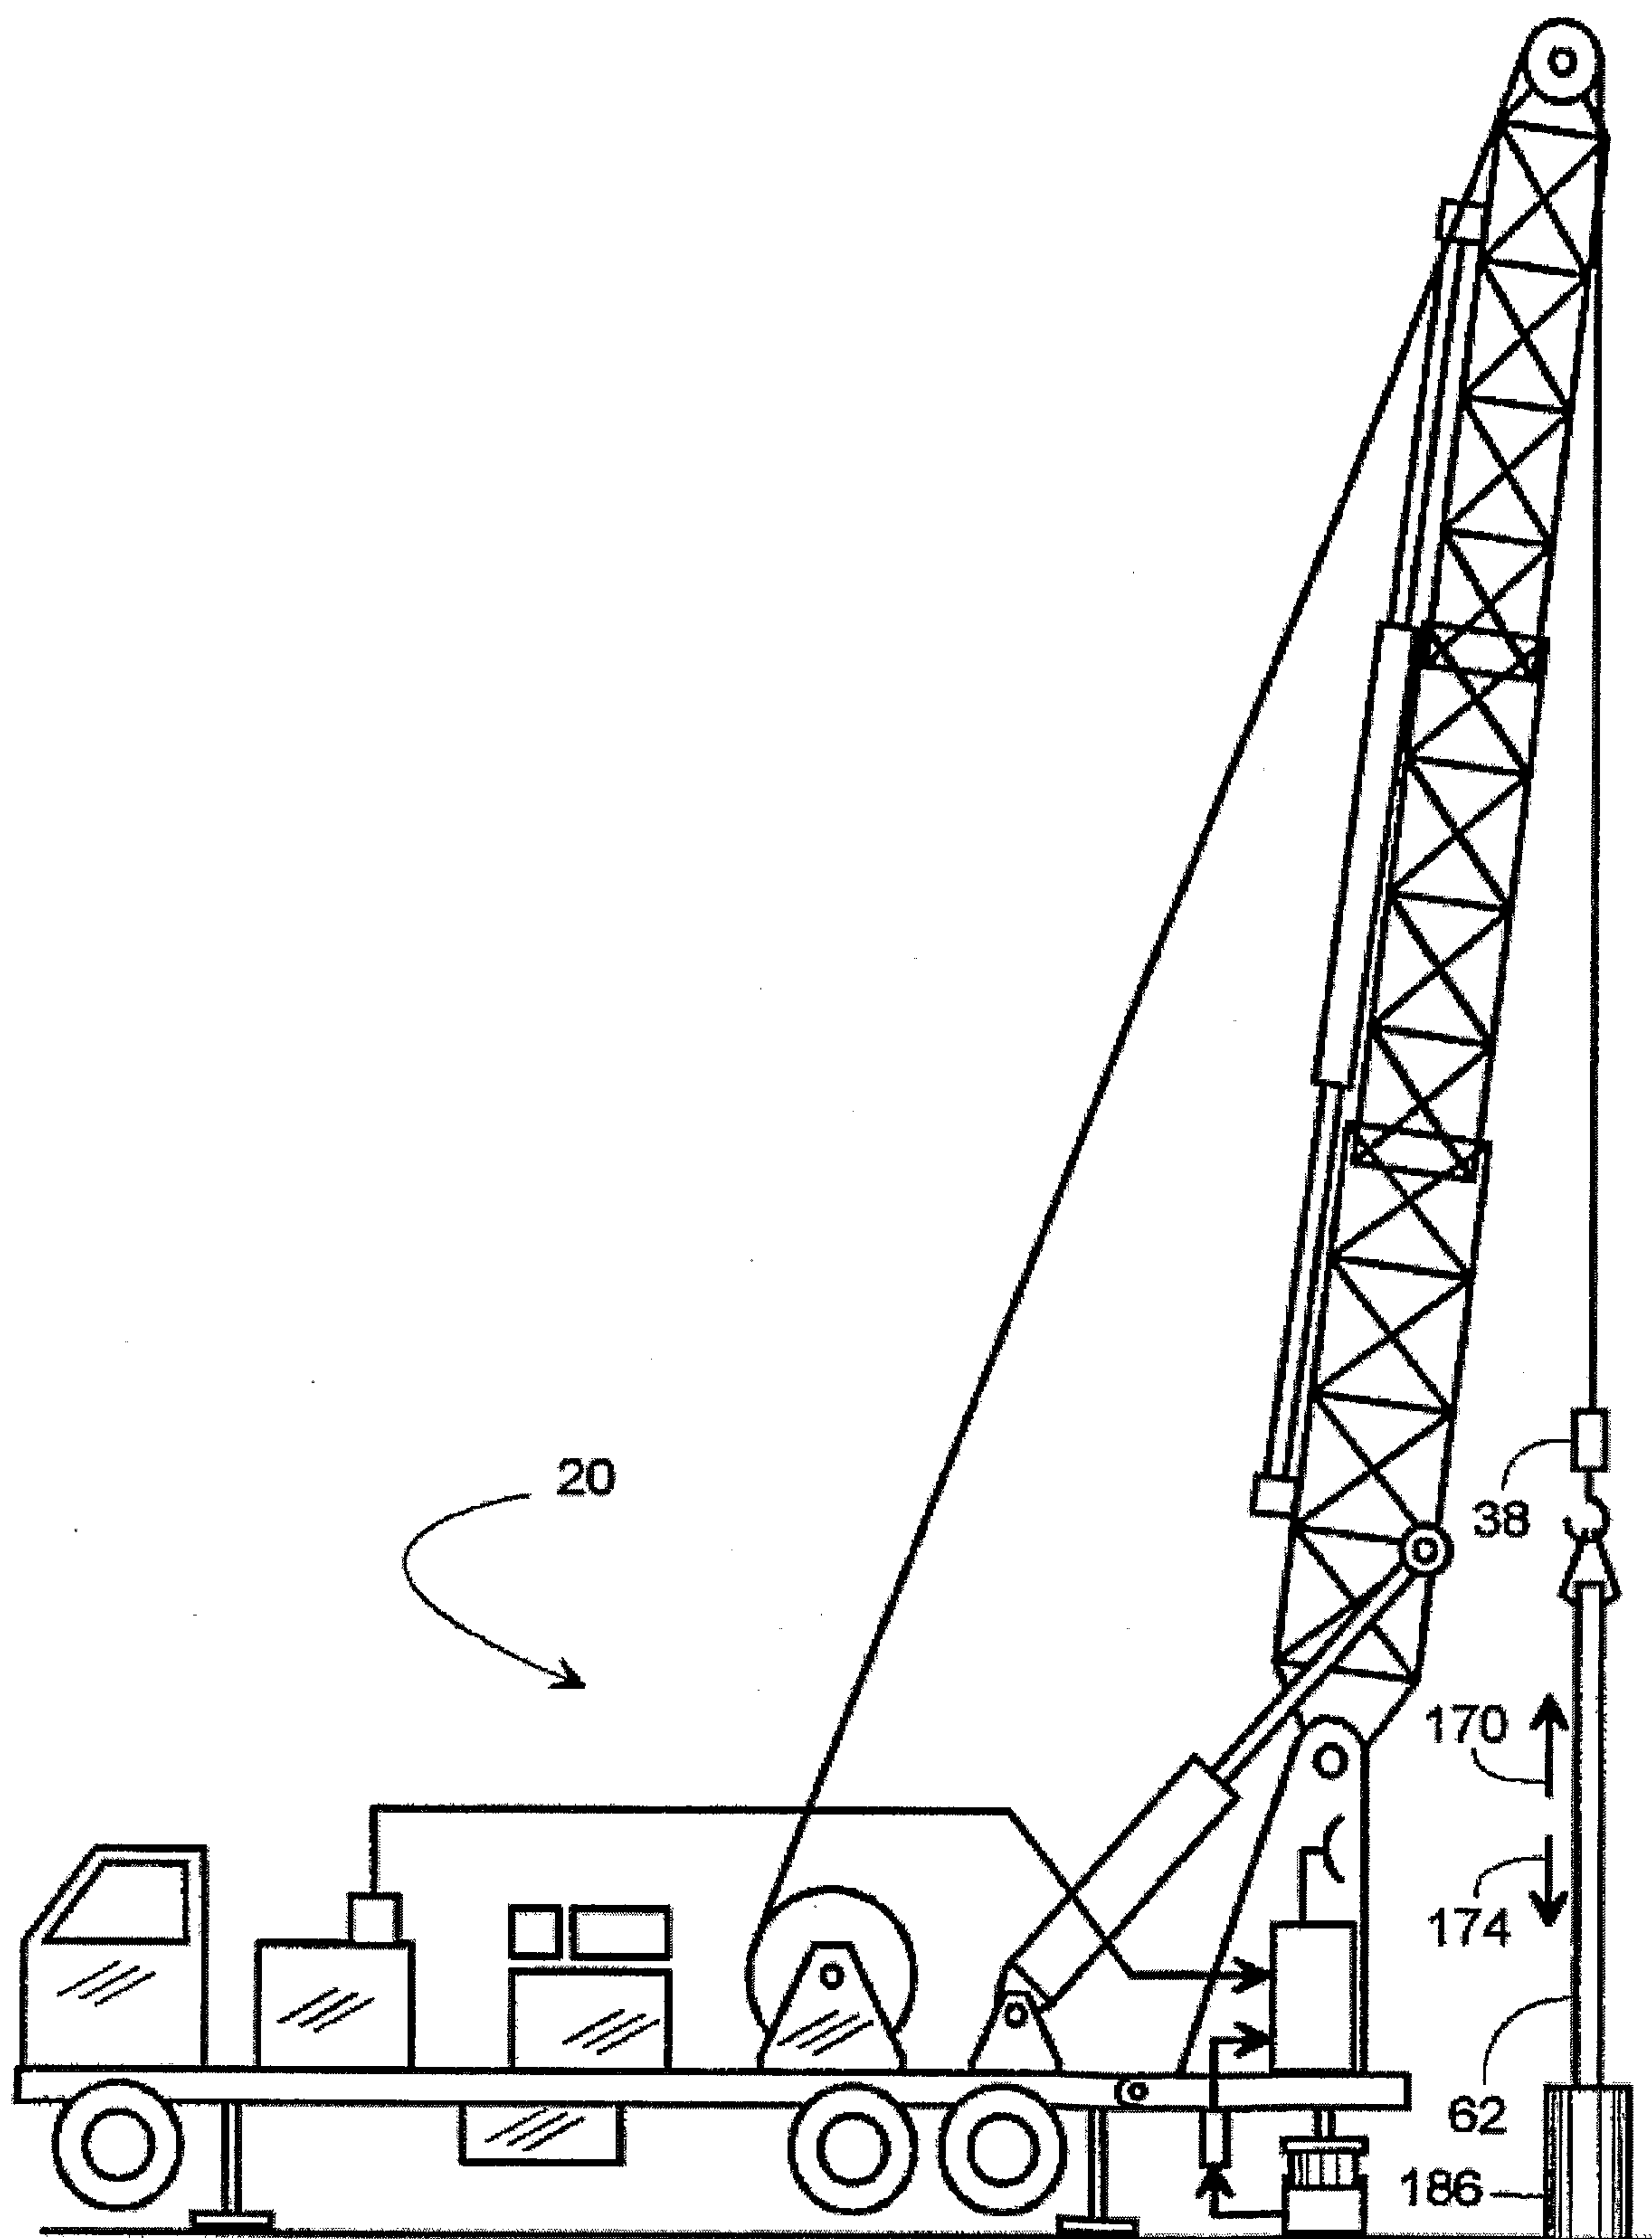


Figure 5

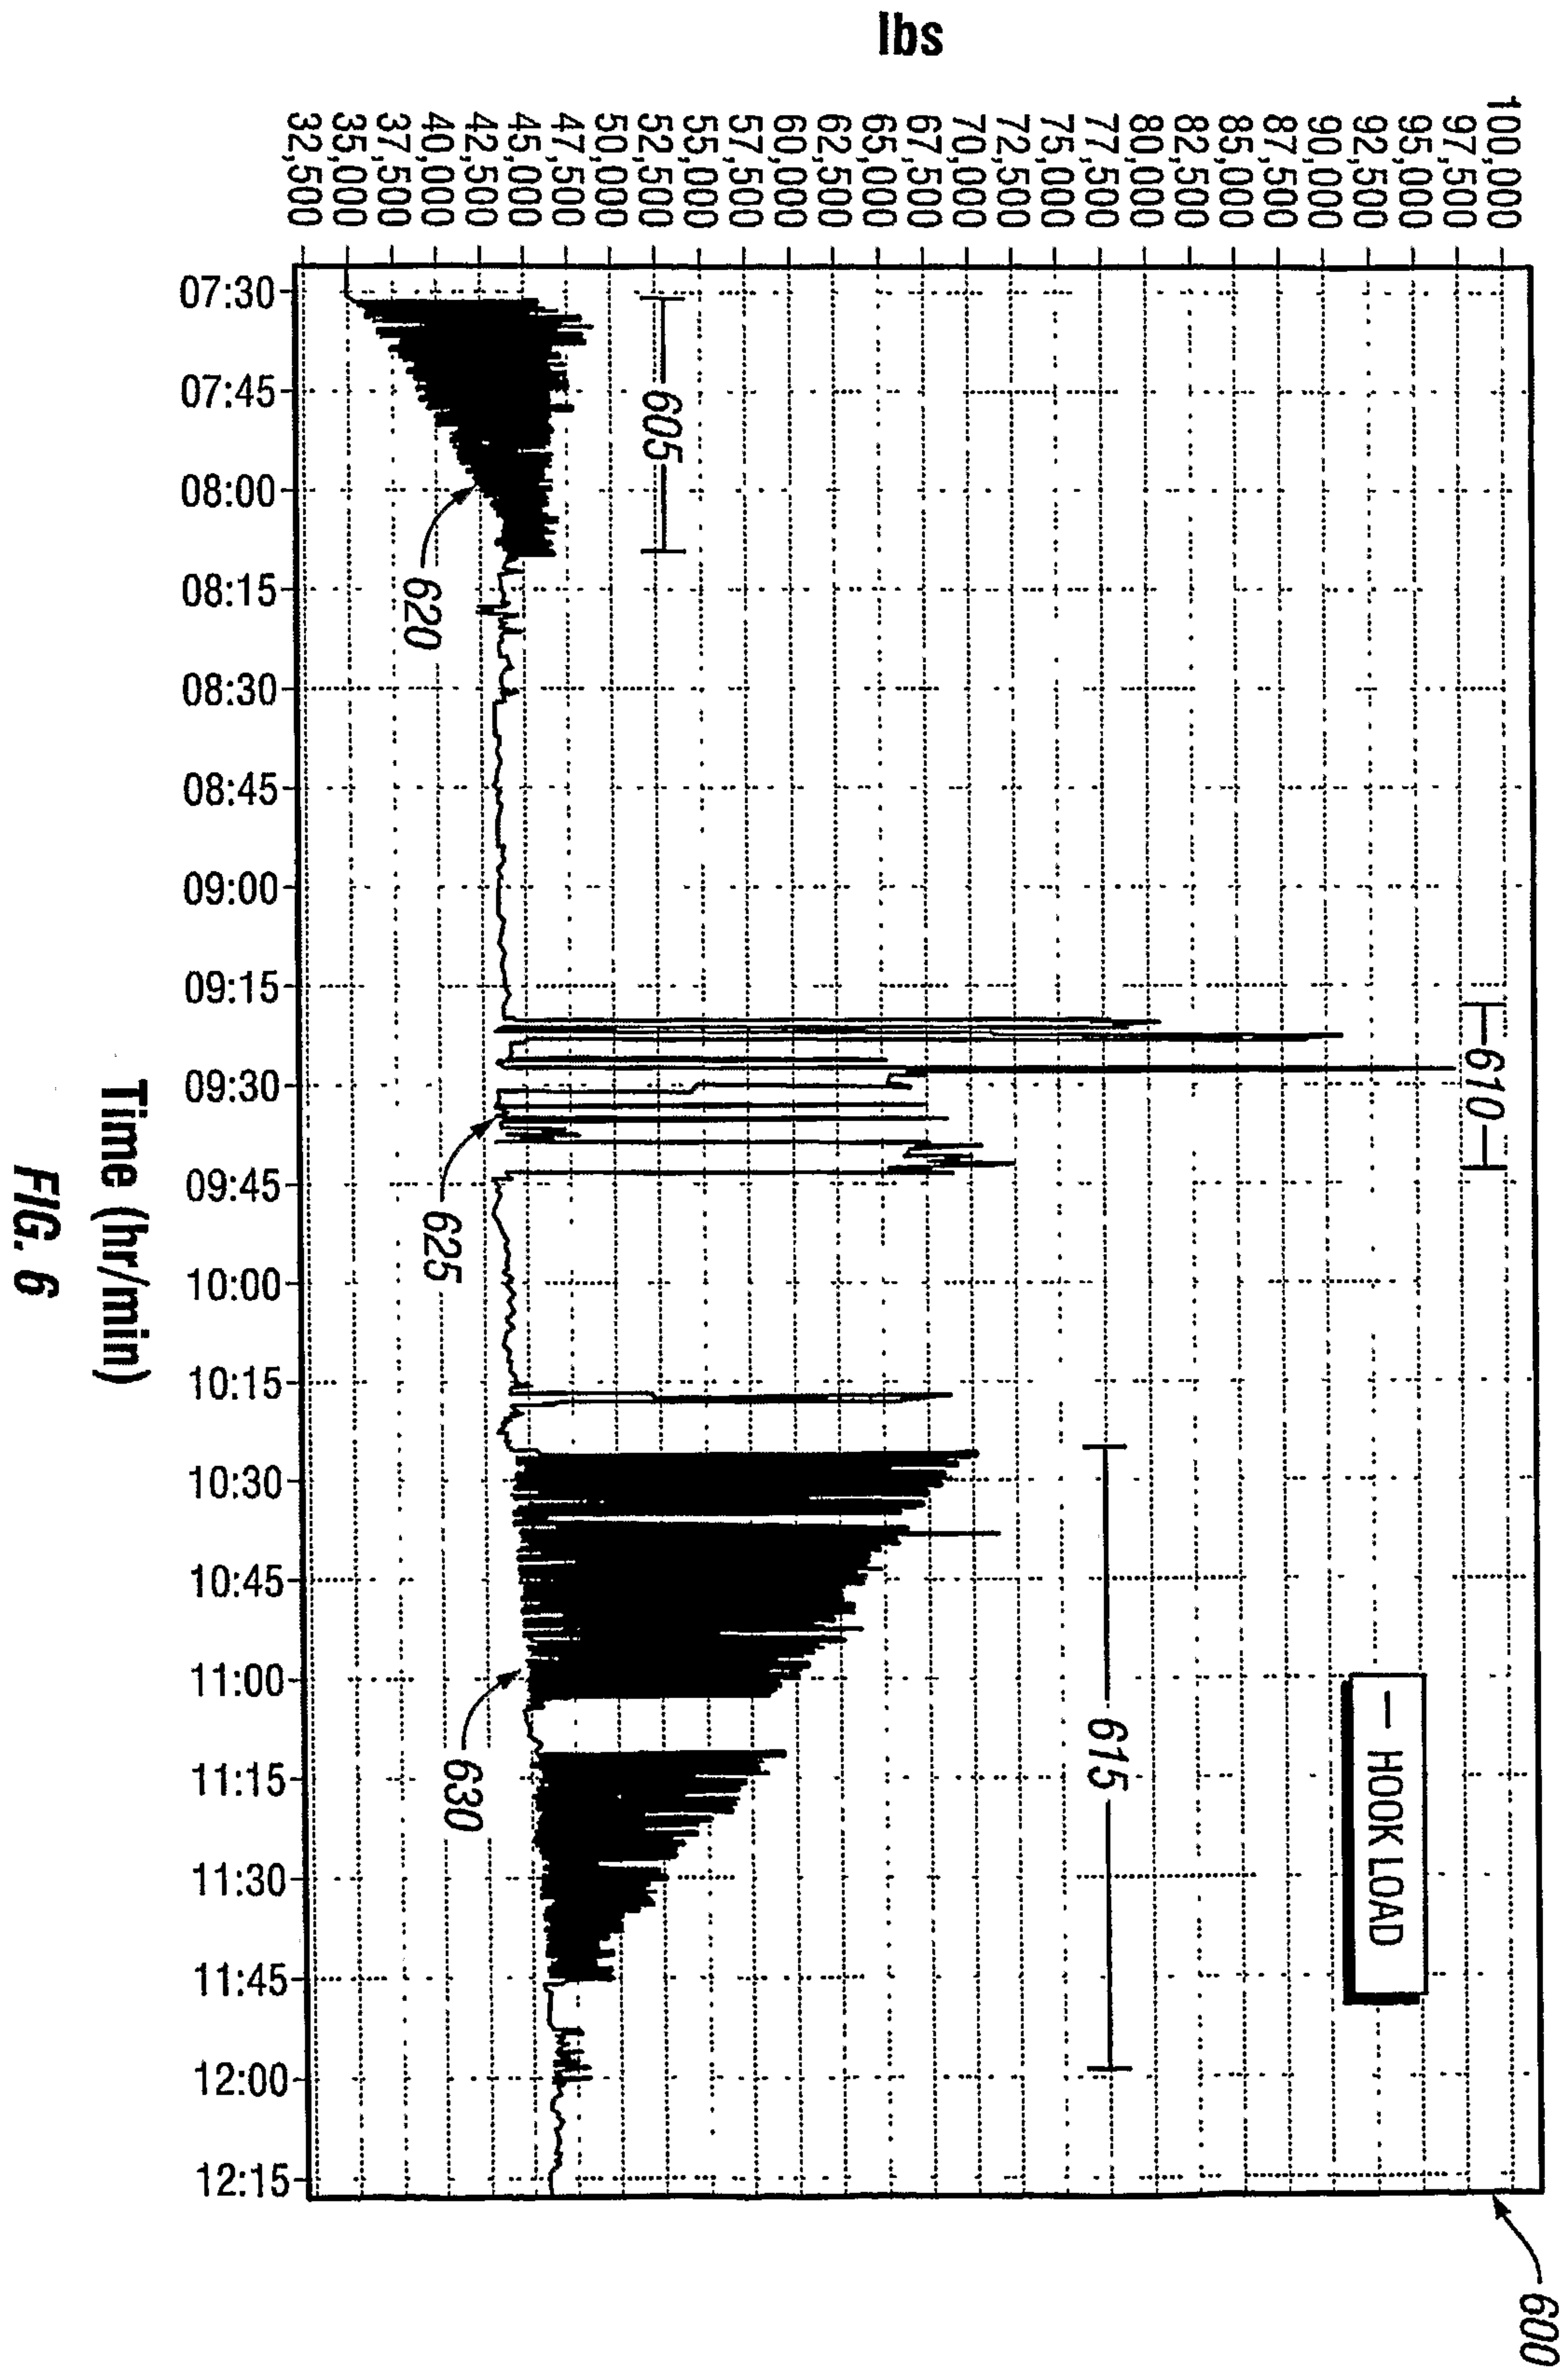


Figure 6/15

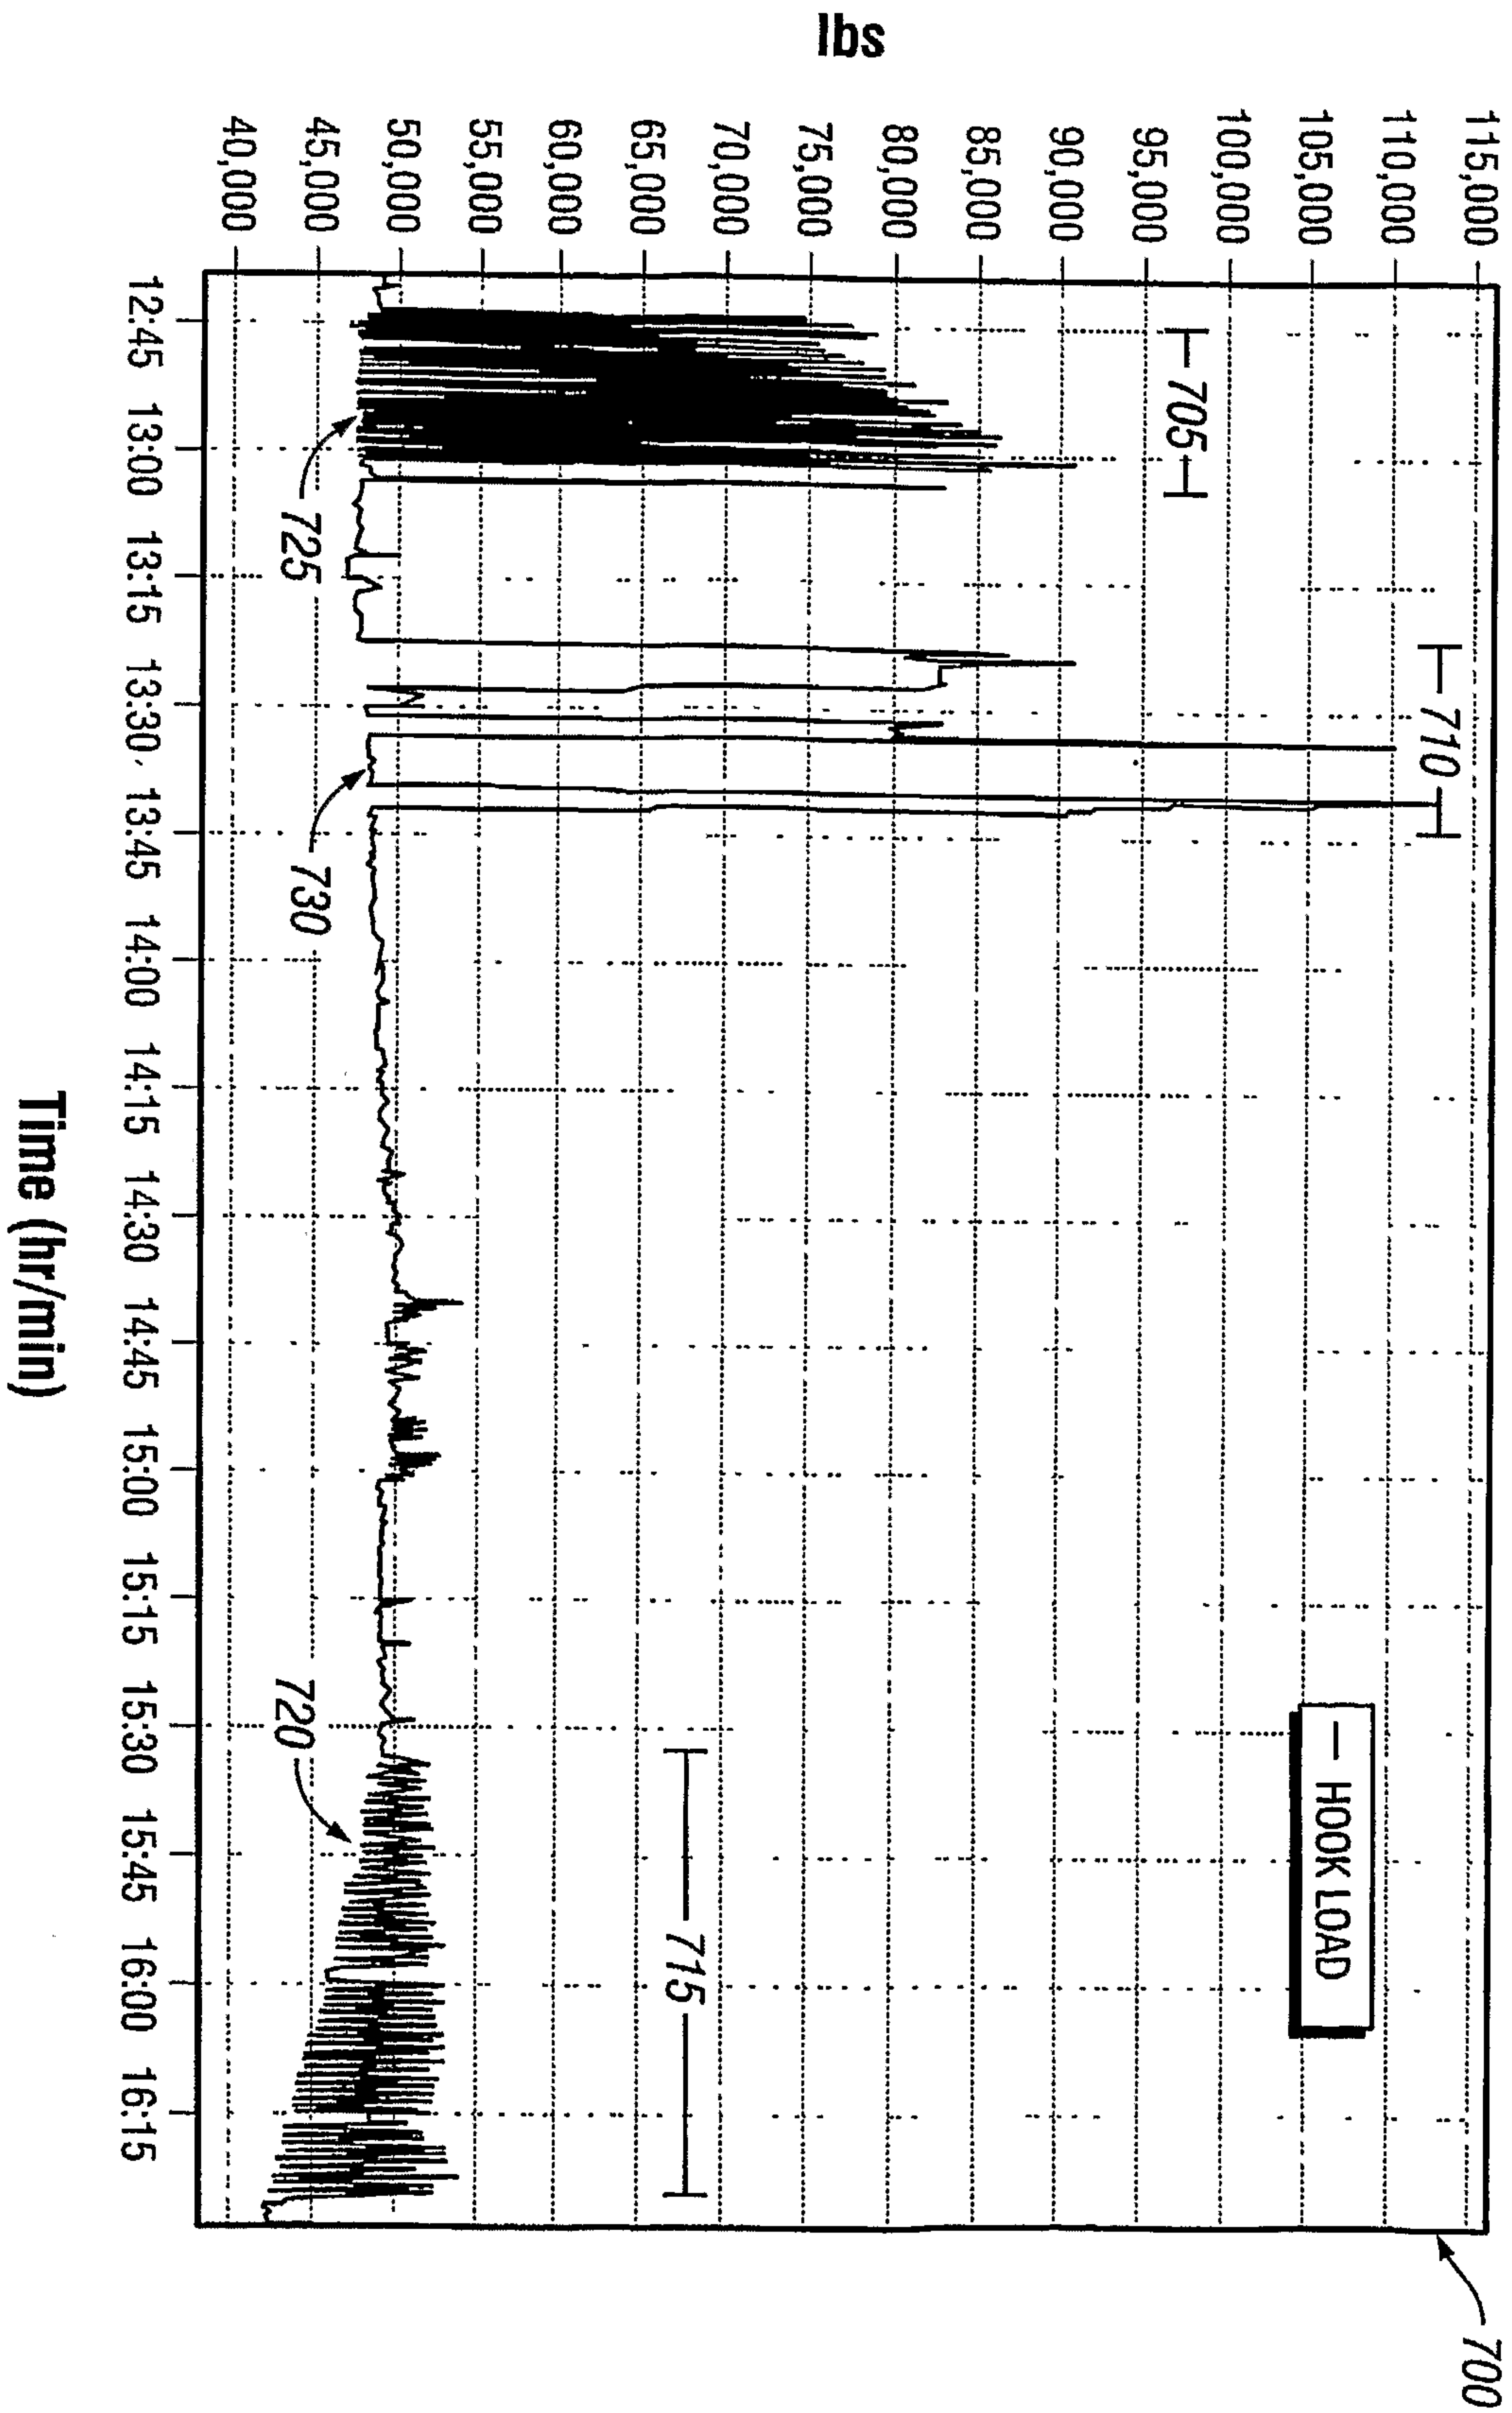


FIG. 7

Figure 7/15

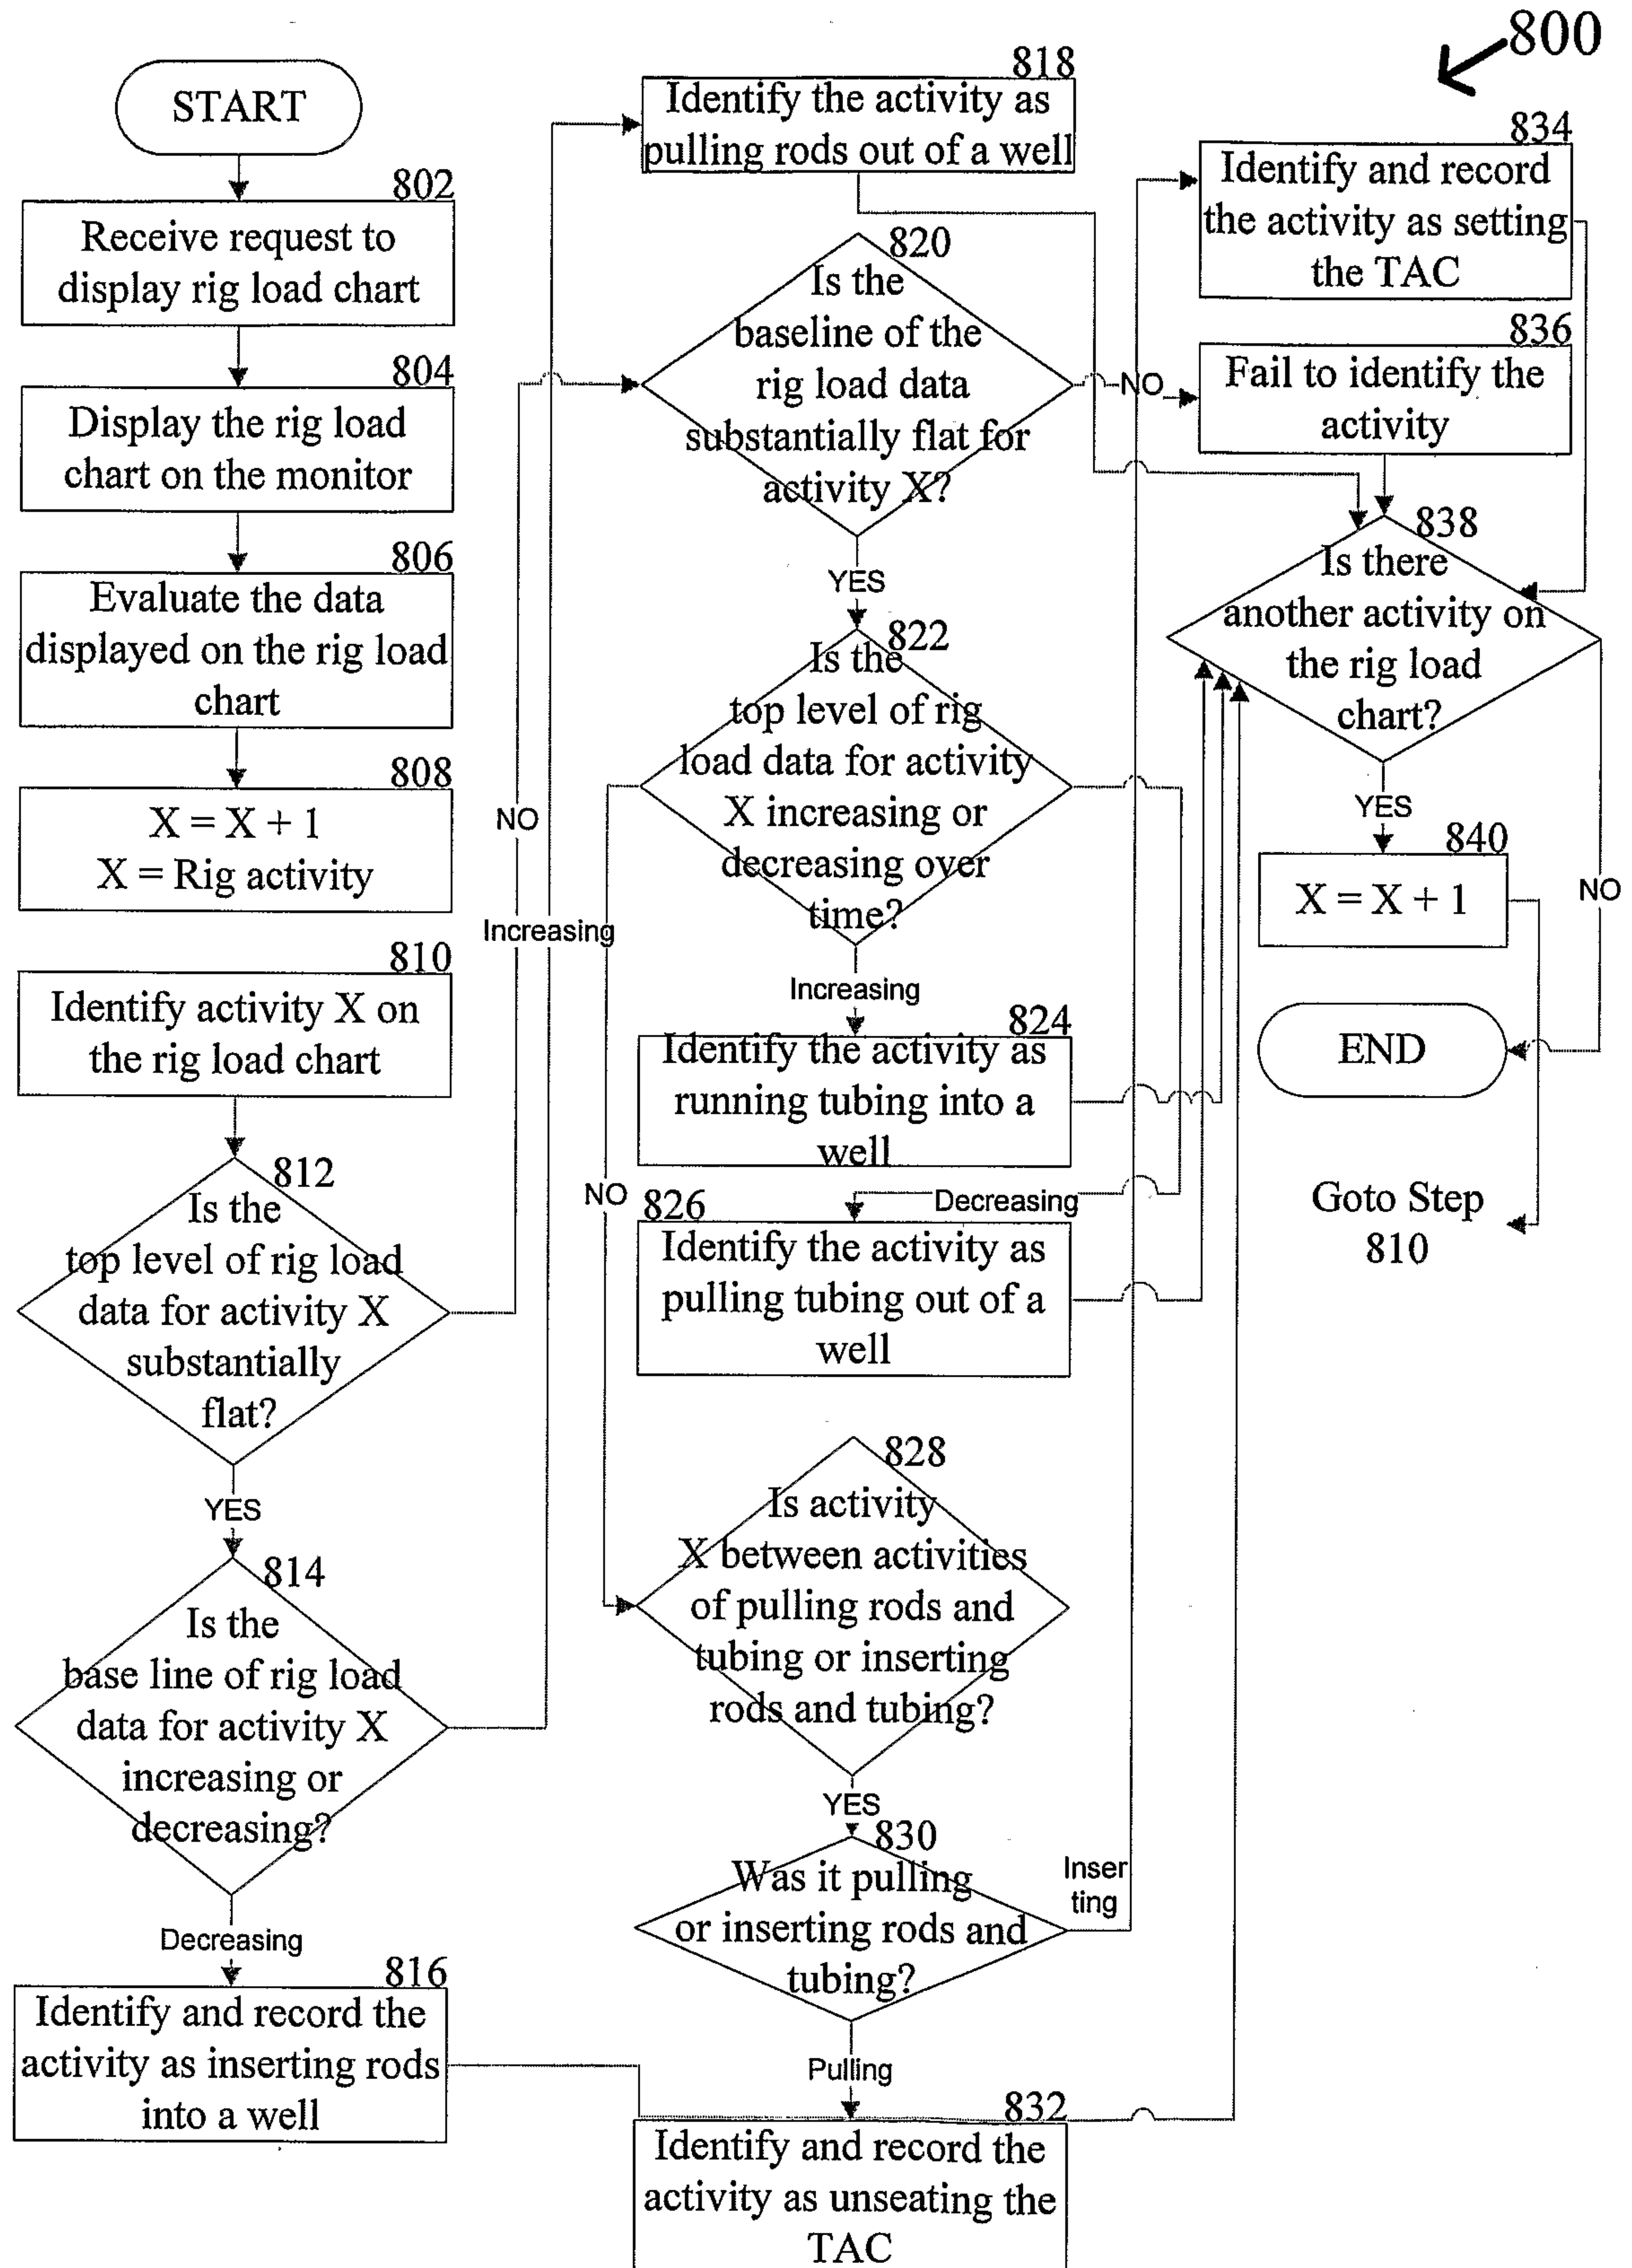


Figure 8

Figure 9/15

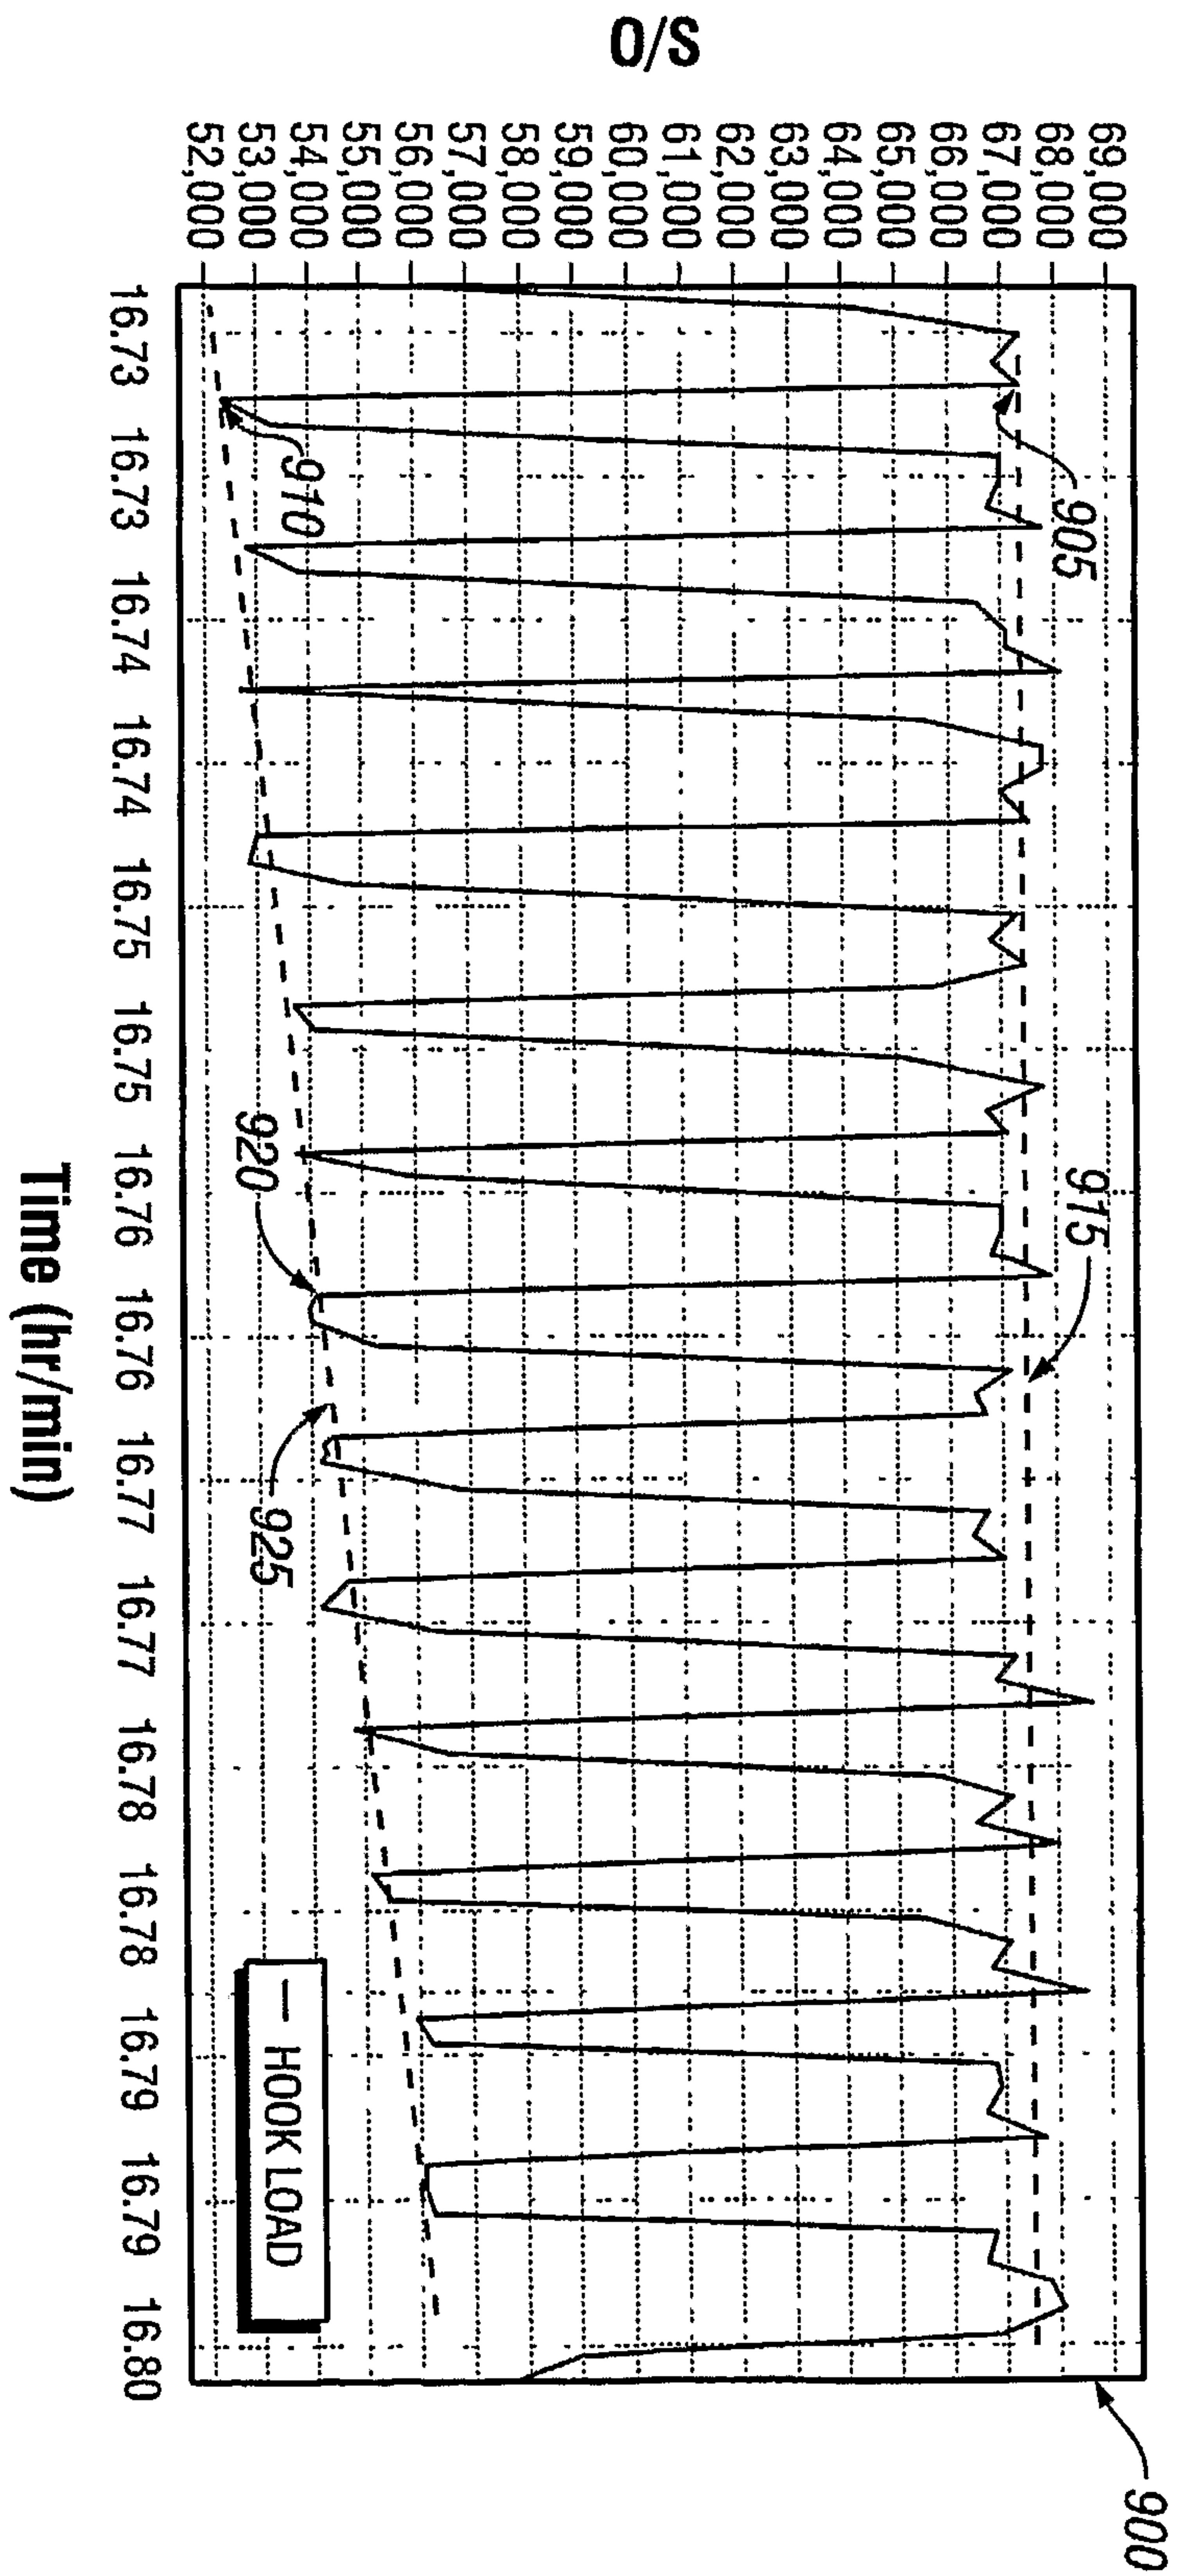


FIG. 9

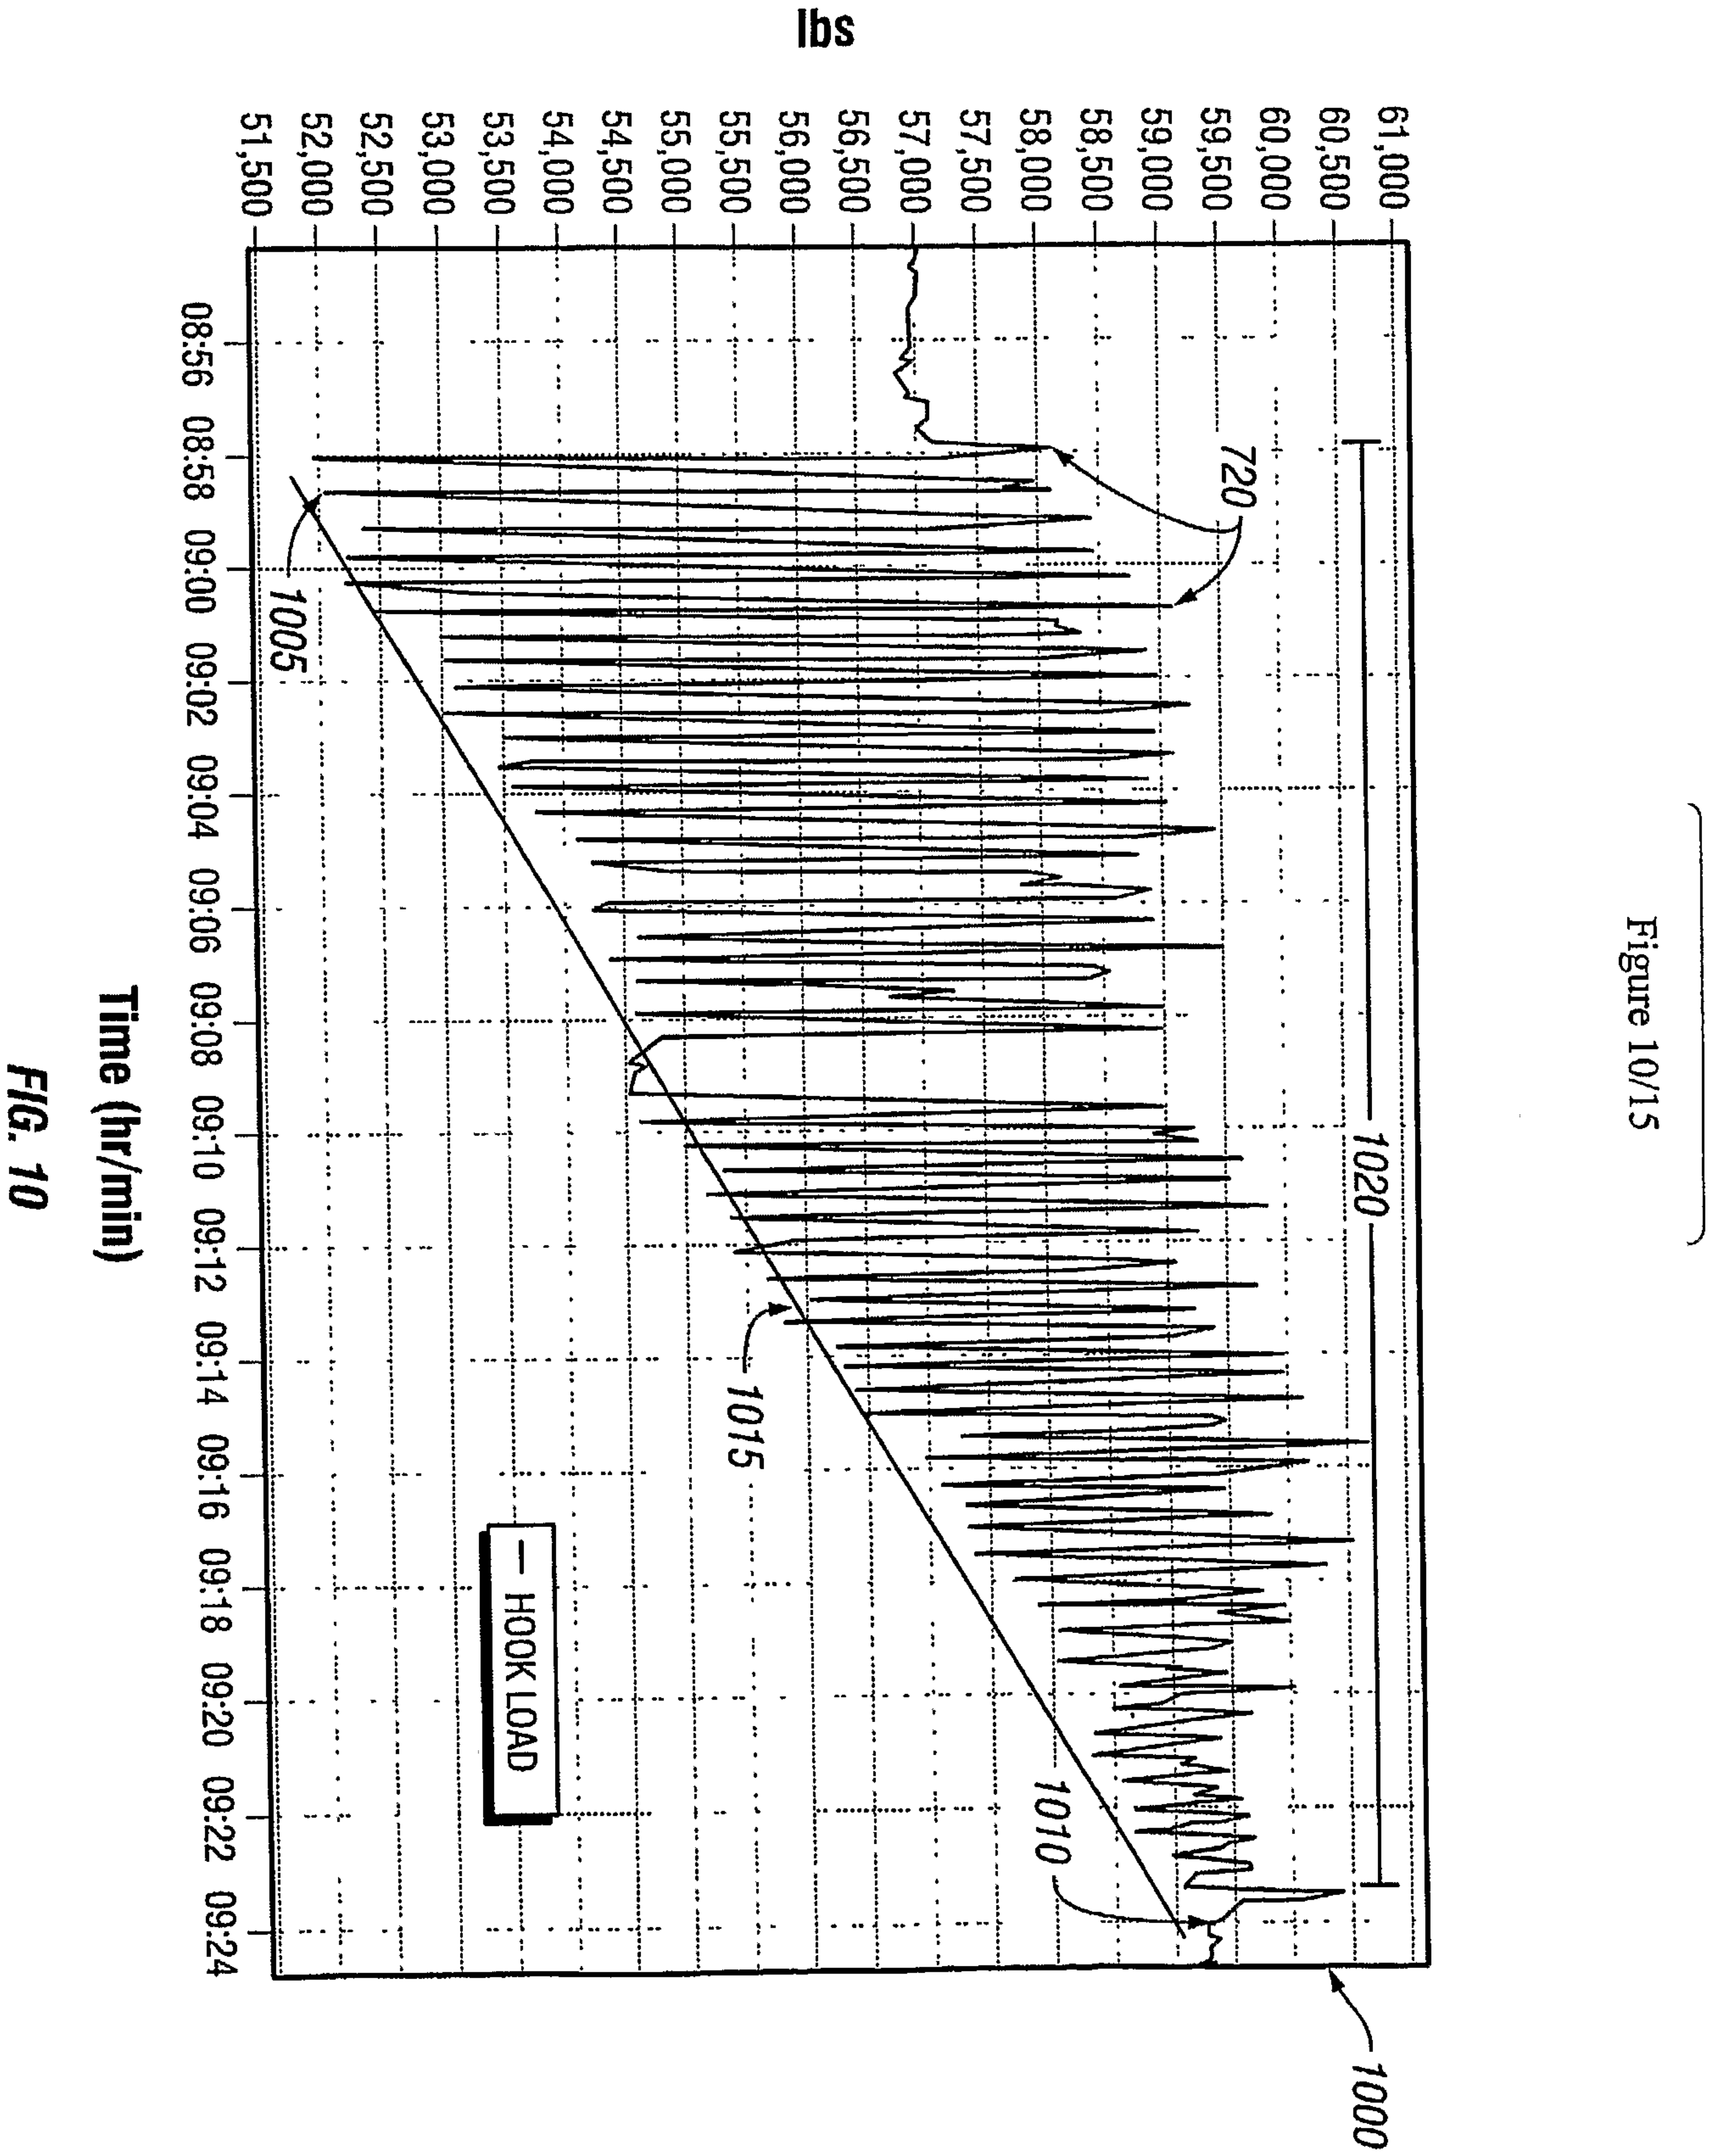


FIG. 10

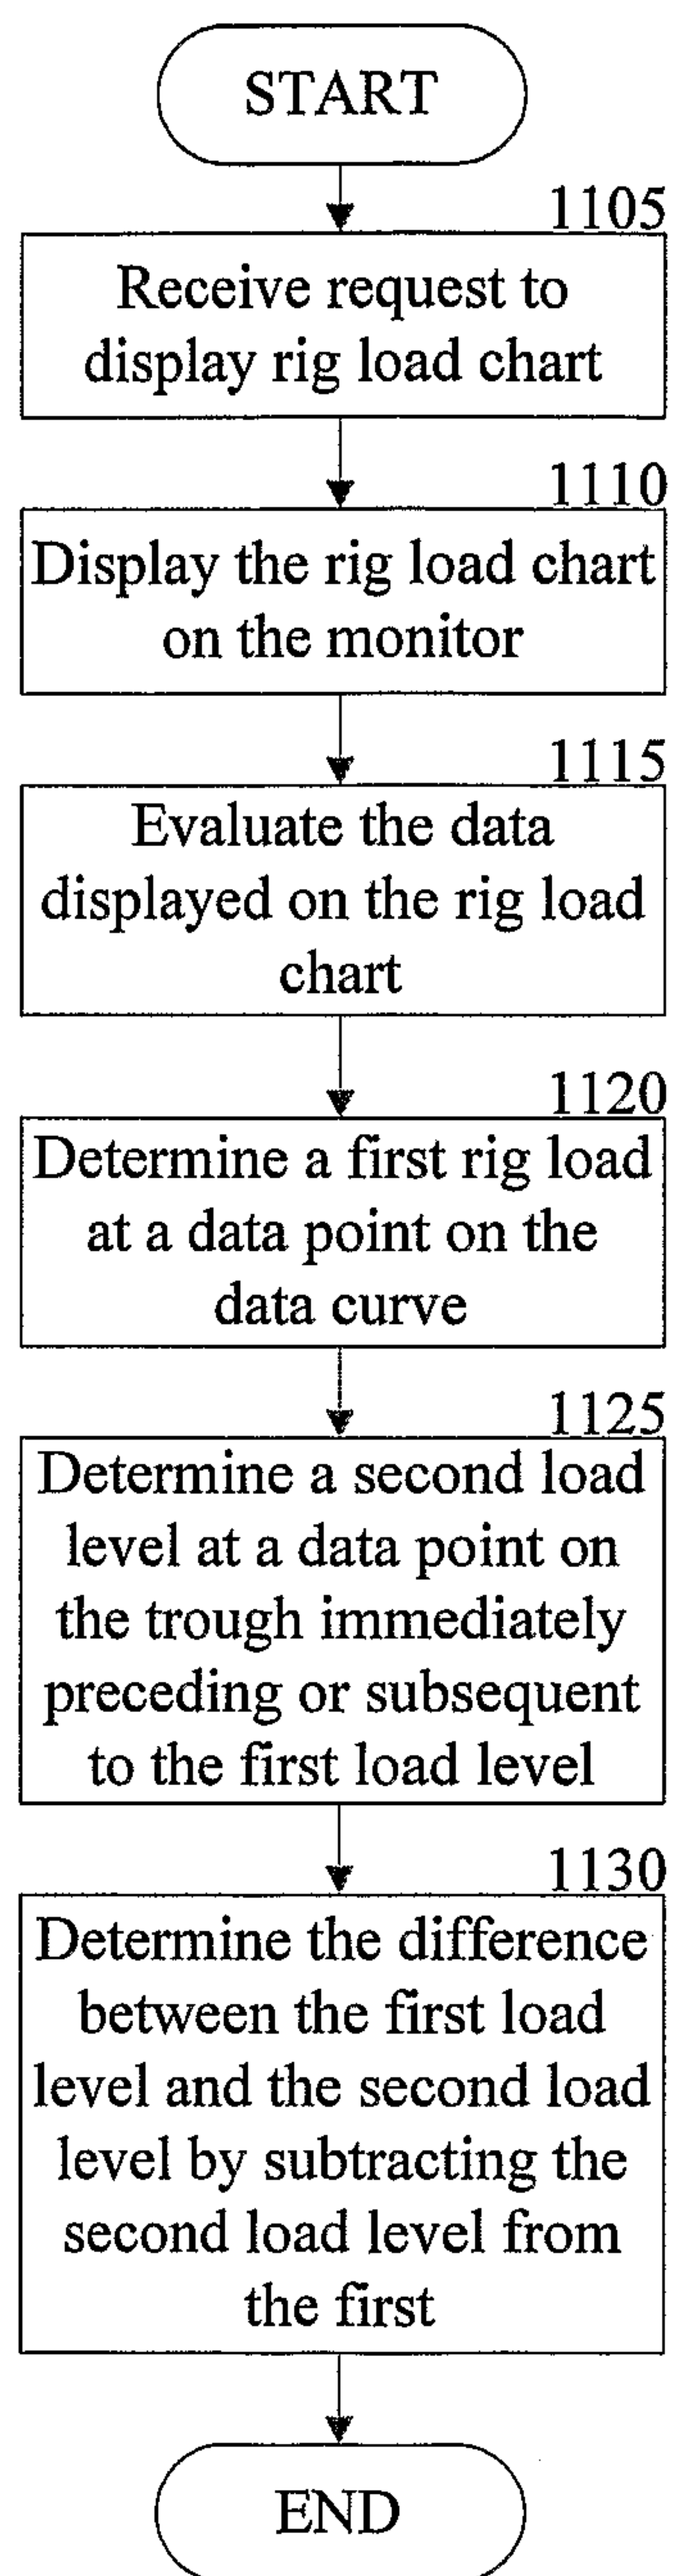
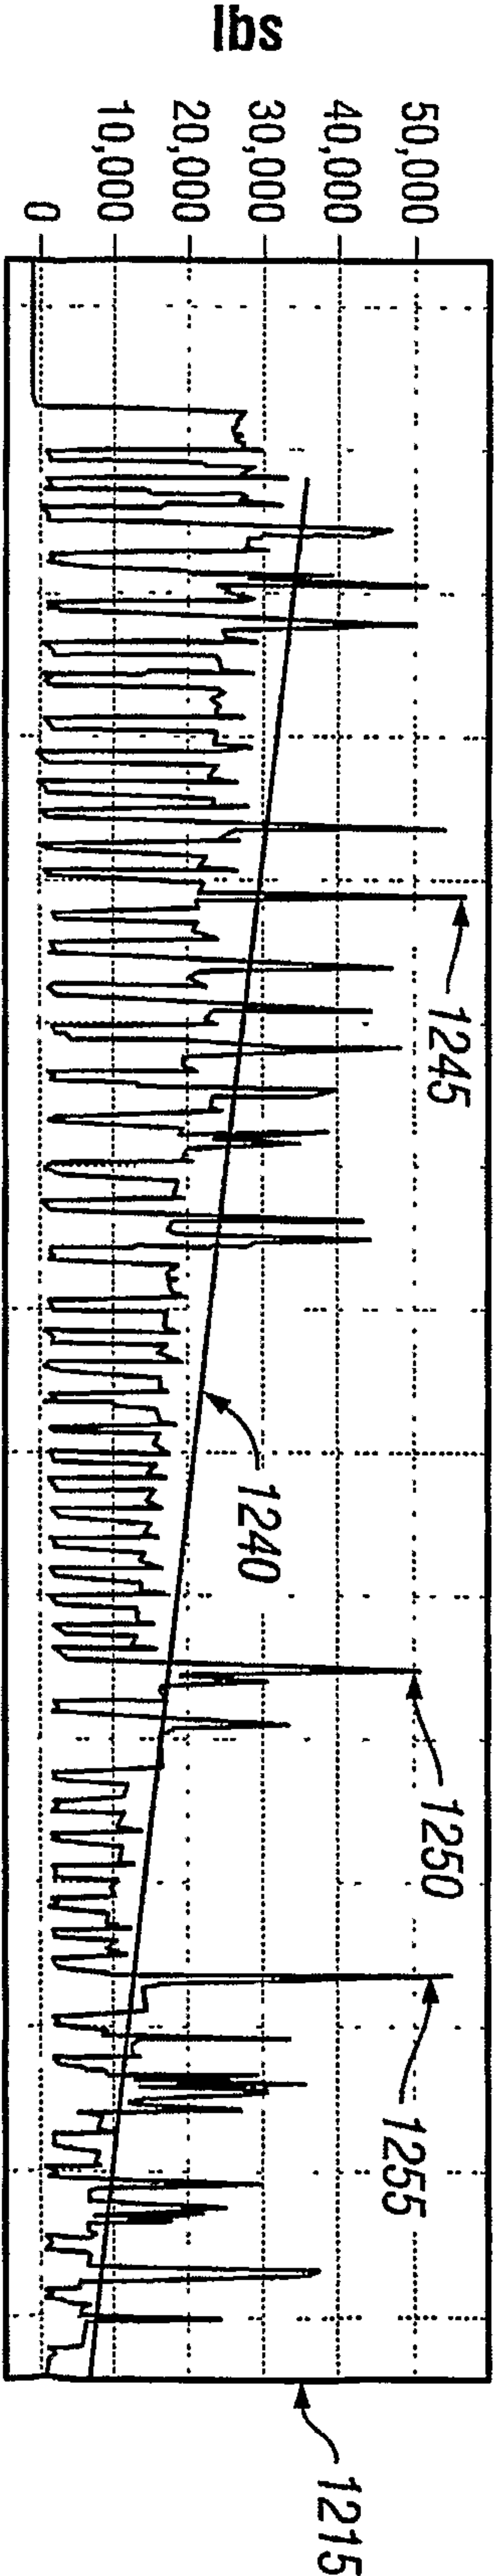
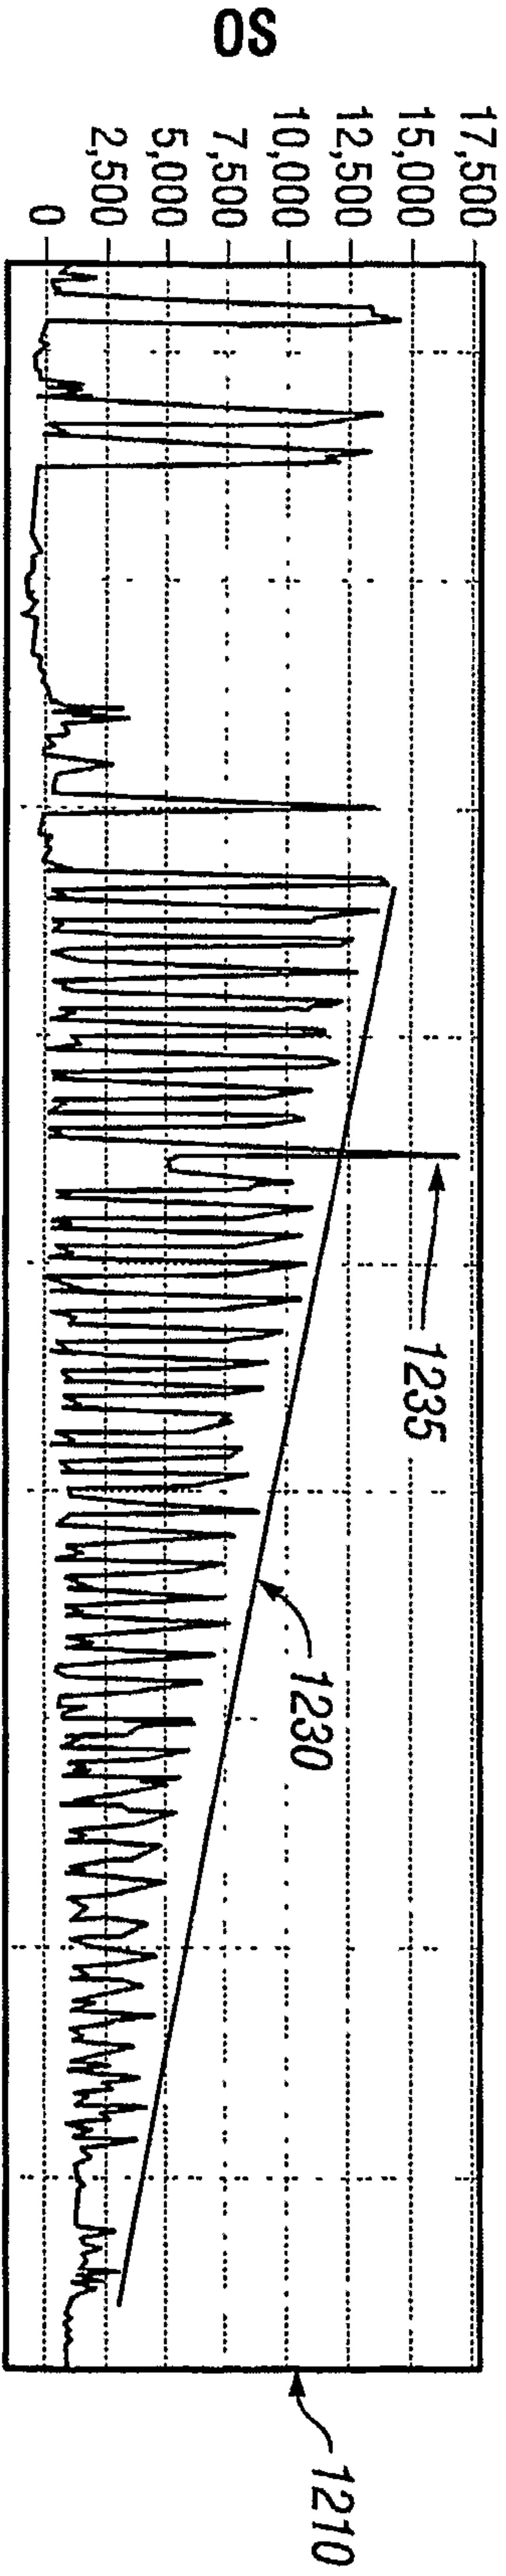
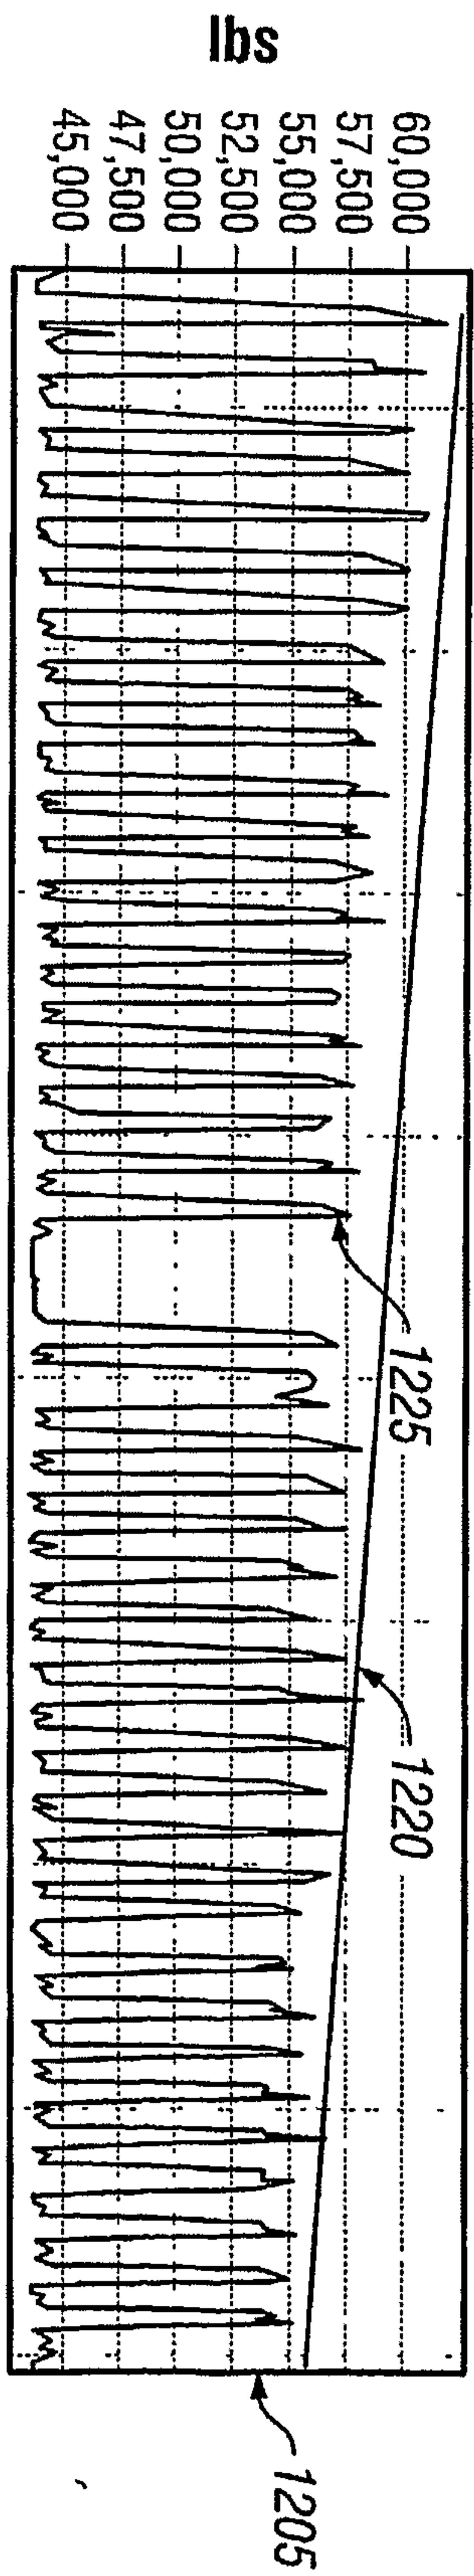


Figure 11

Figure 12/15



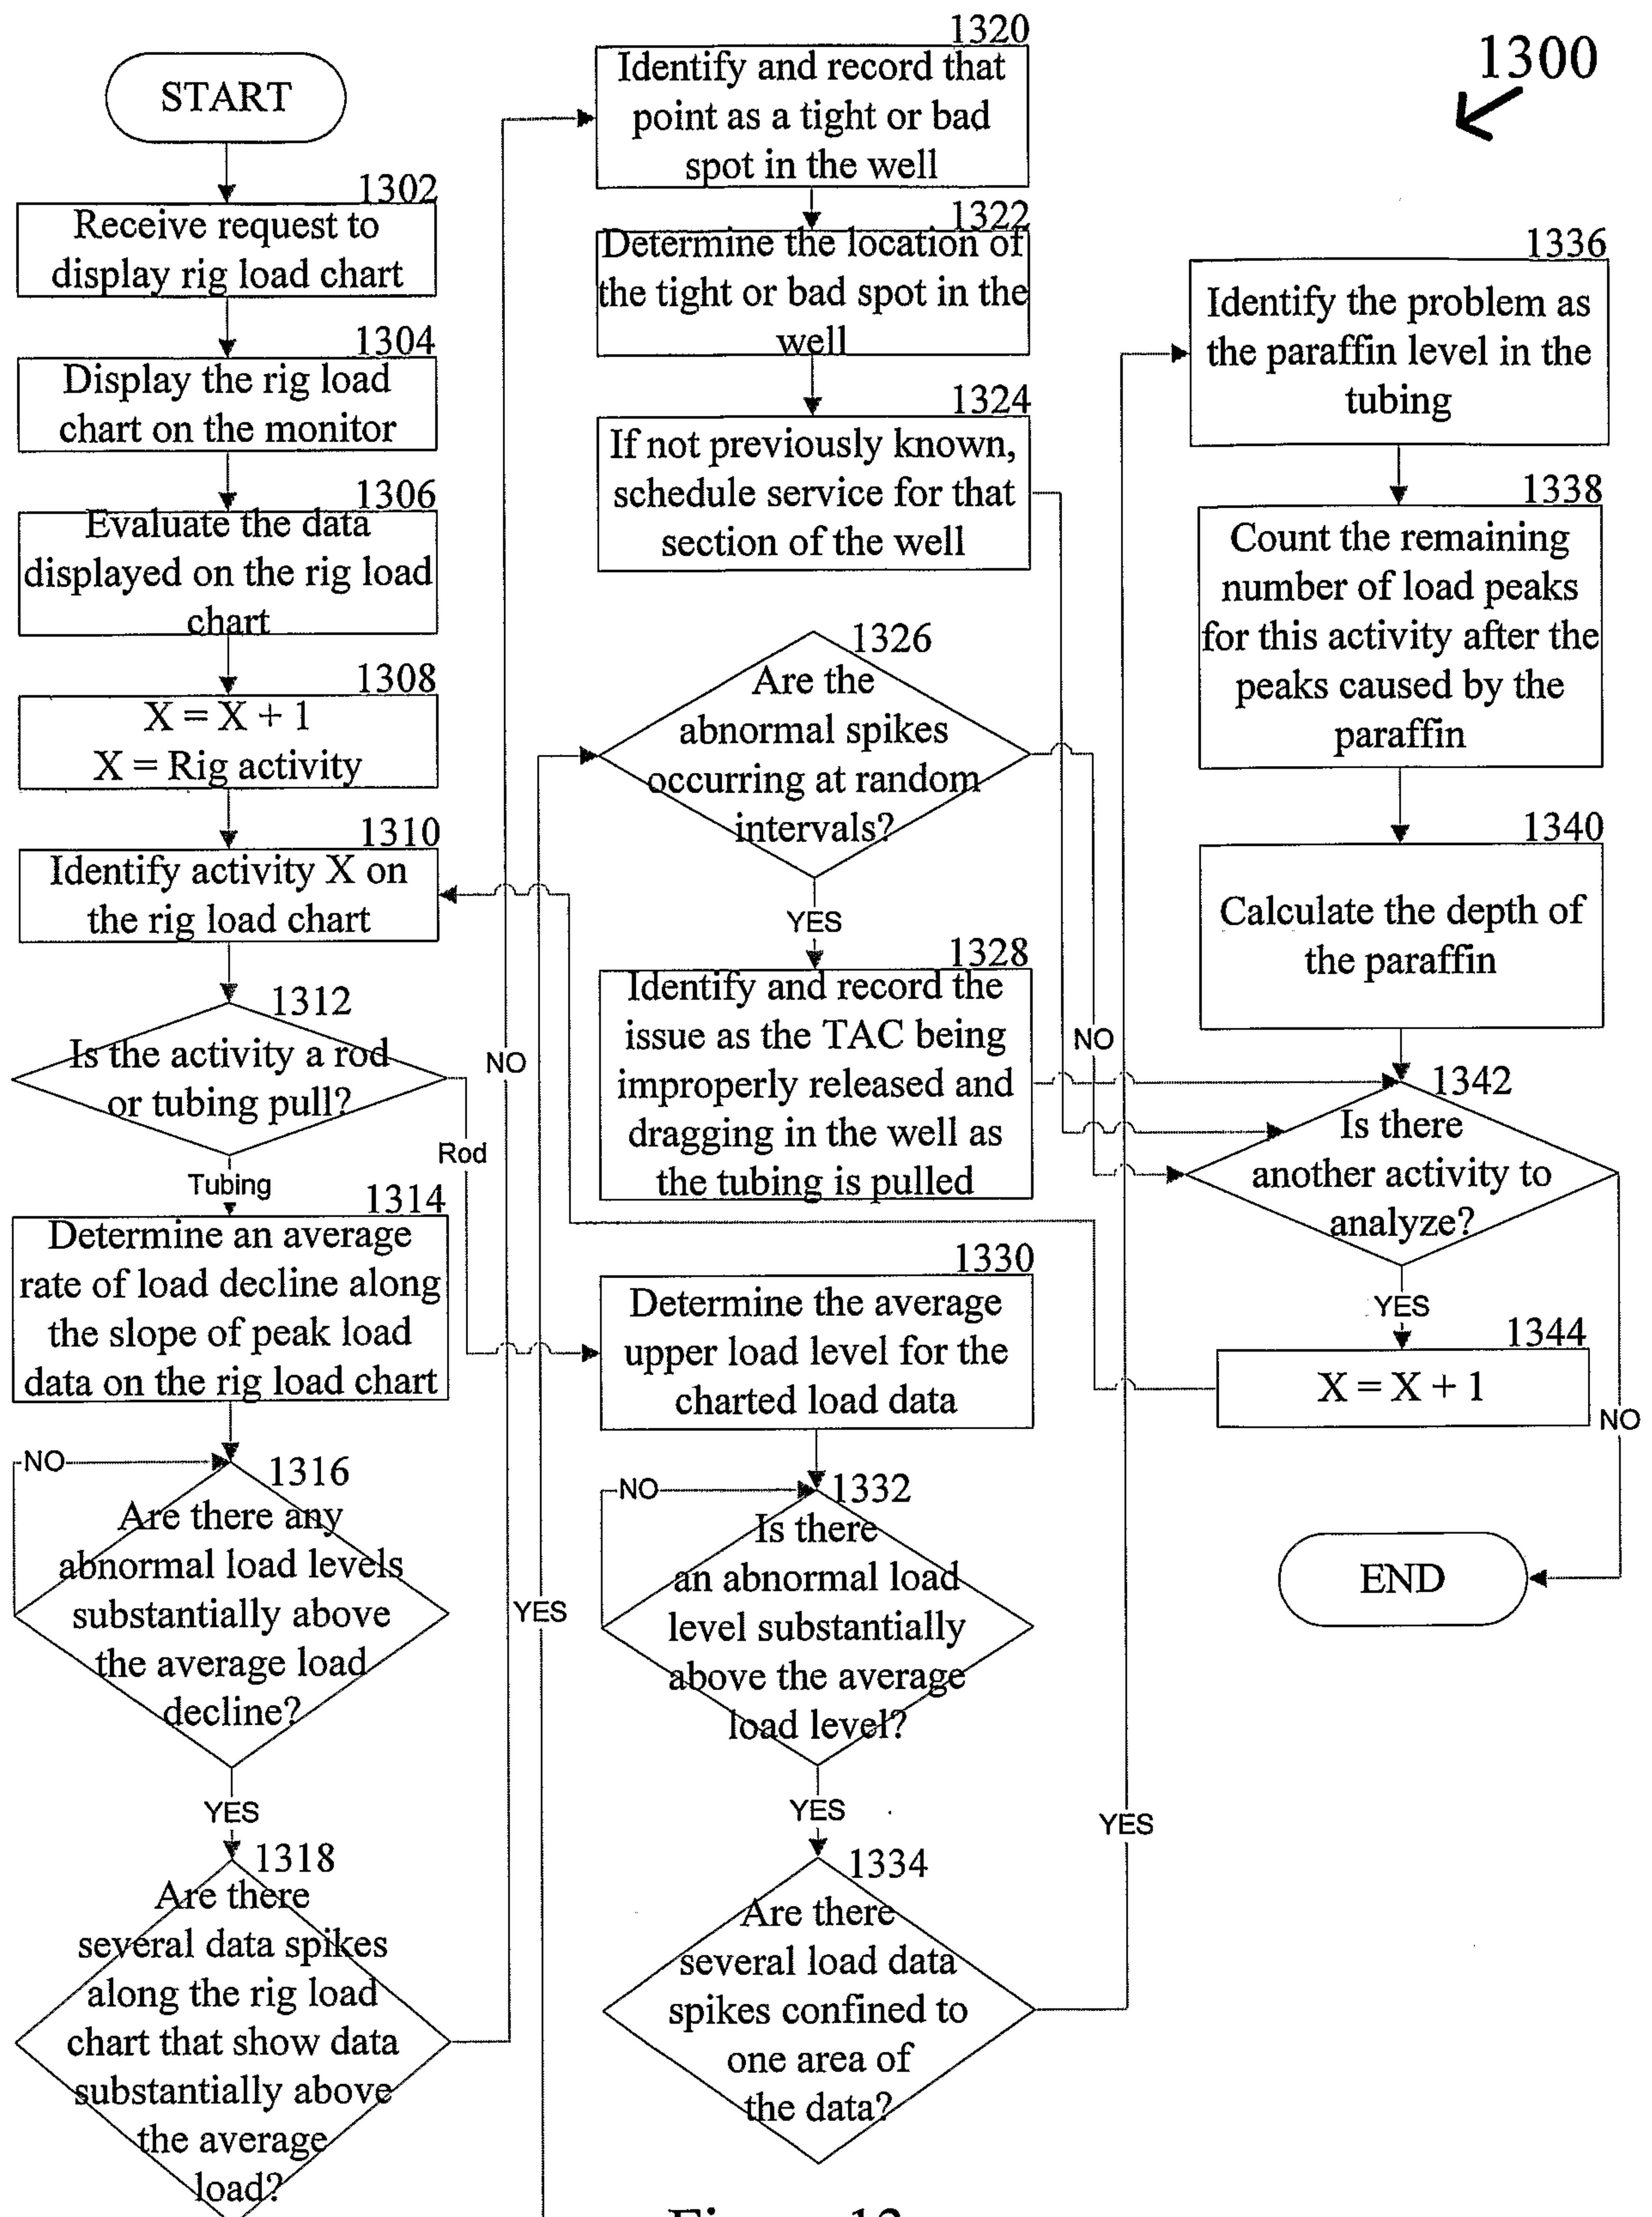


Figure 13

Figure 14/15

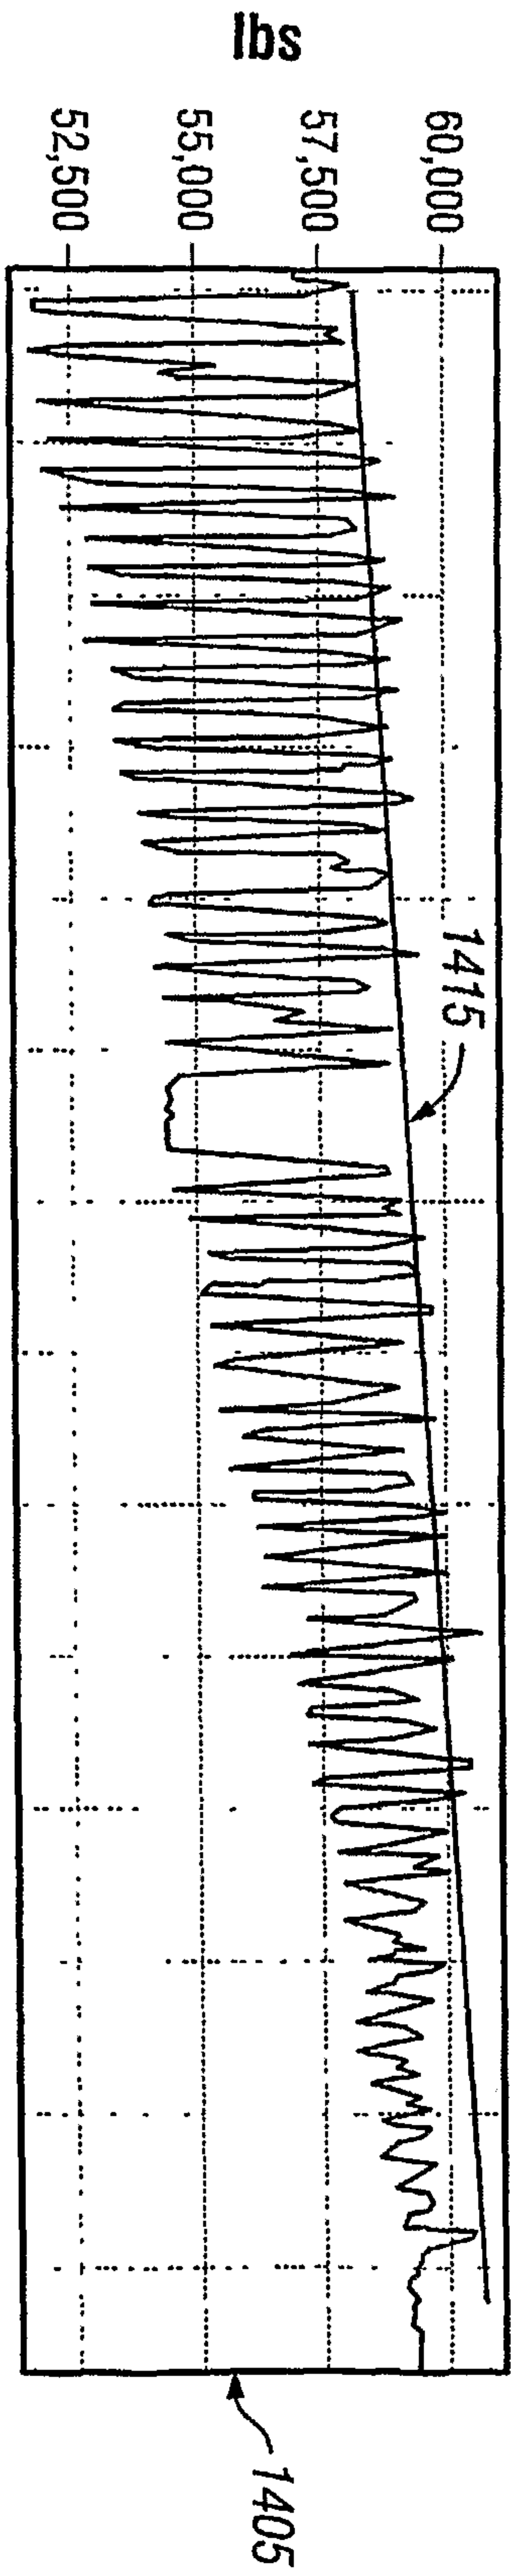


FIG. 14A

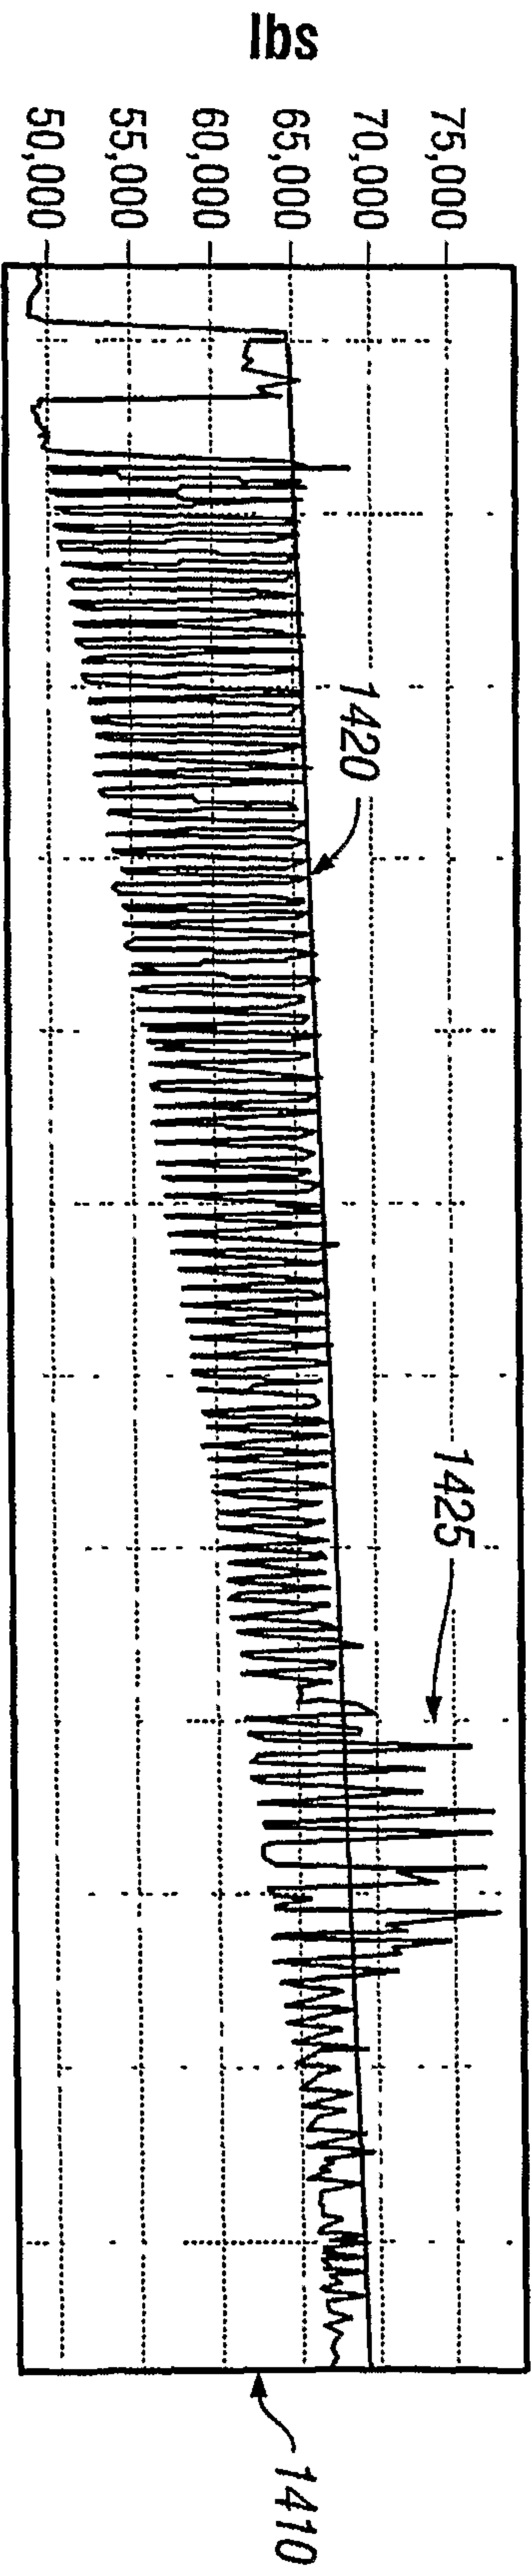


FIG. 14B

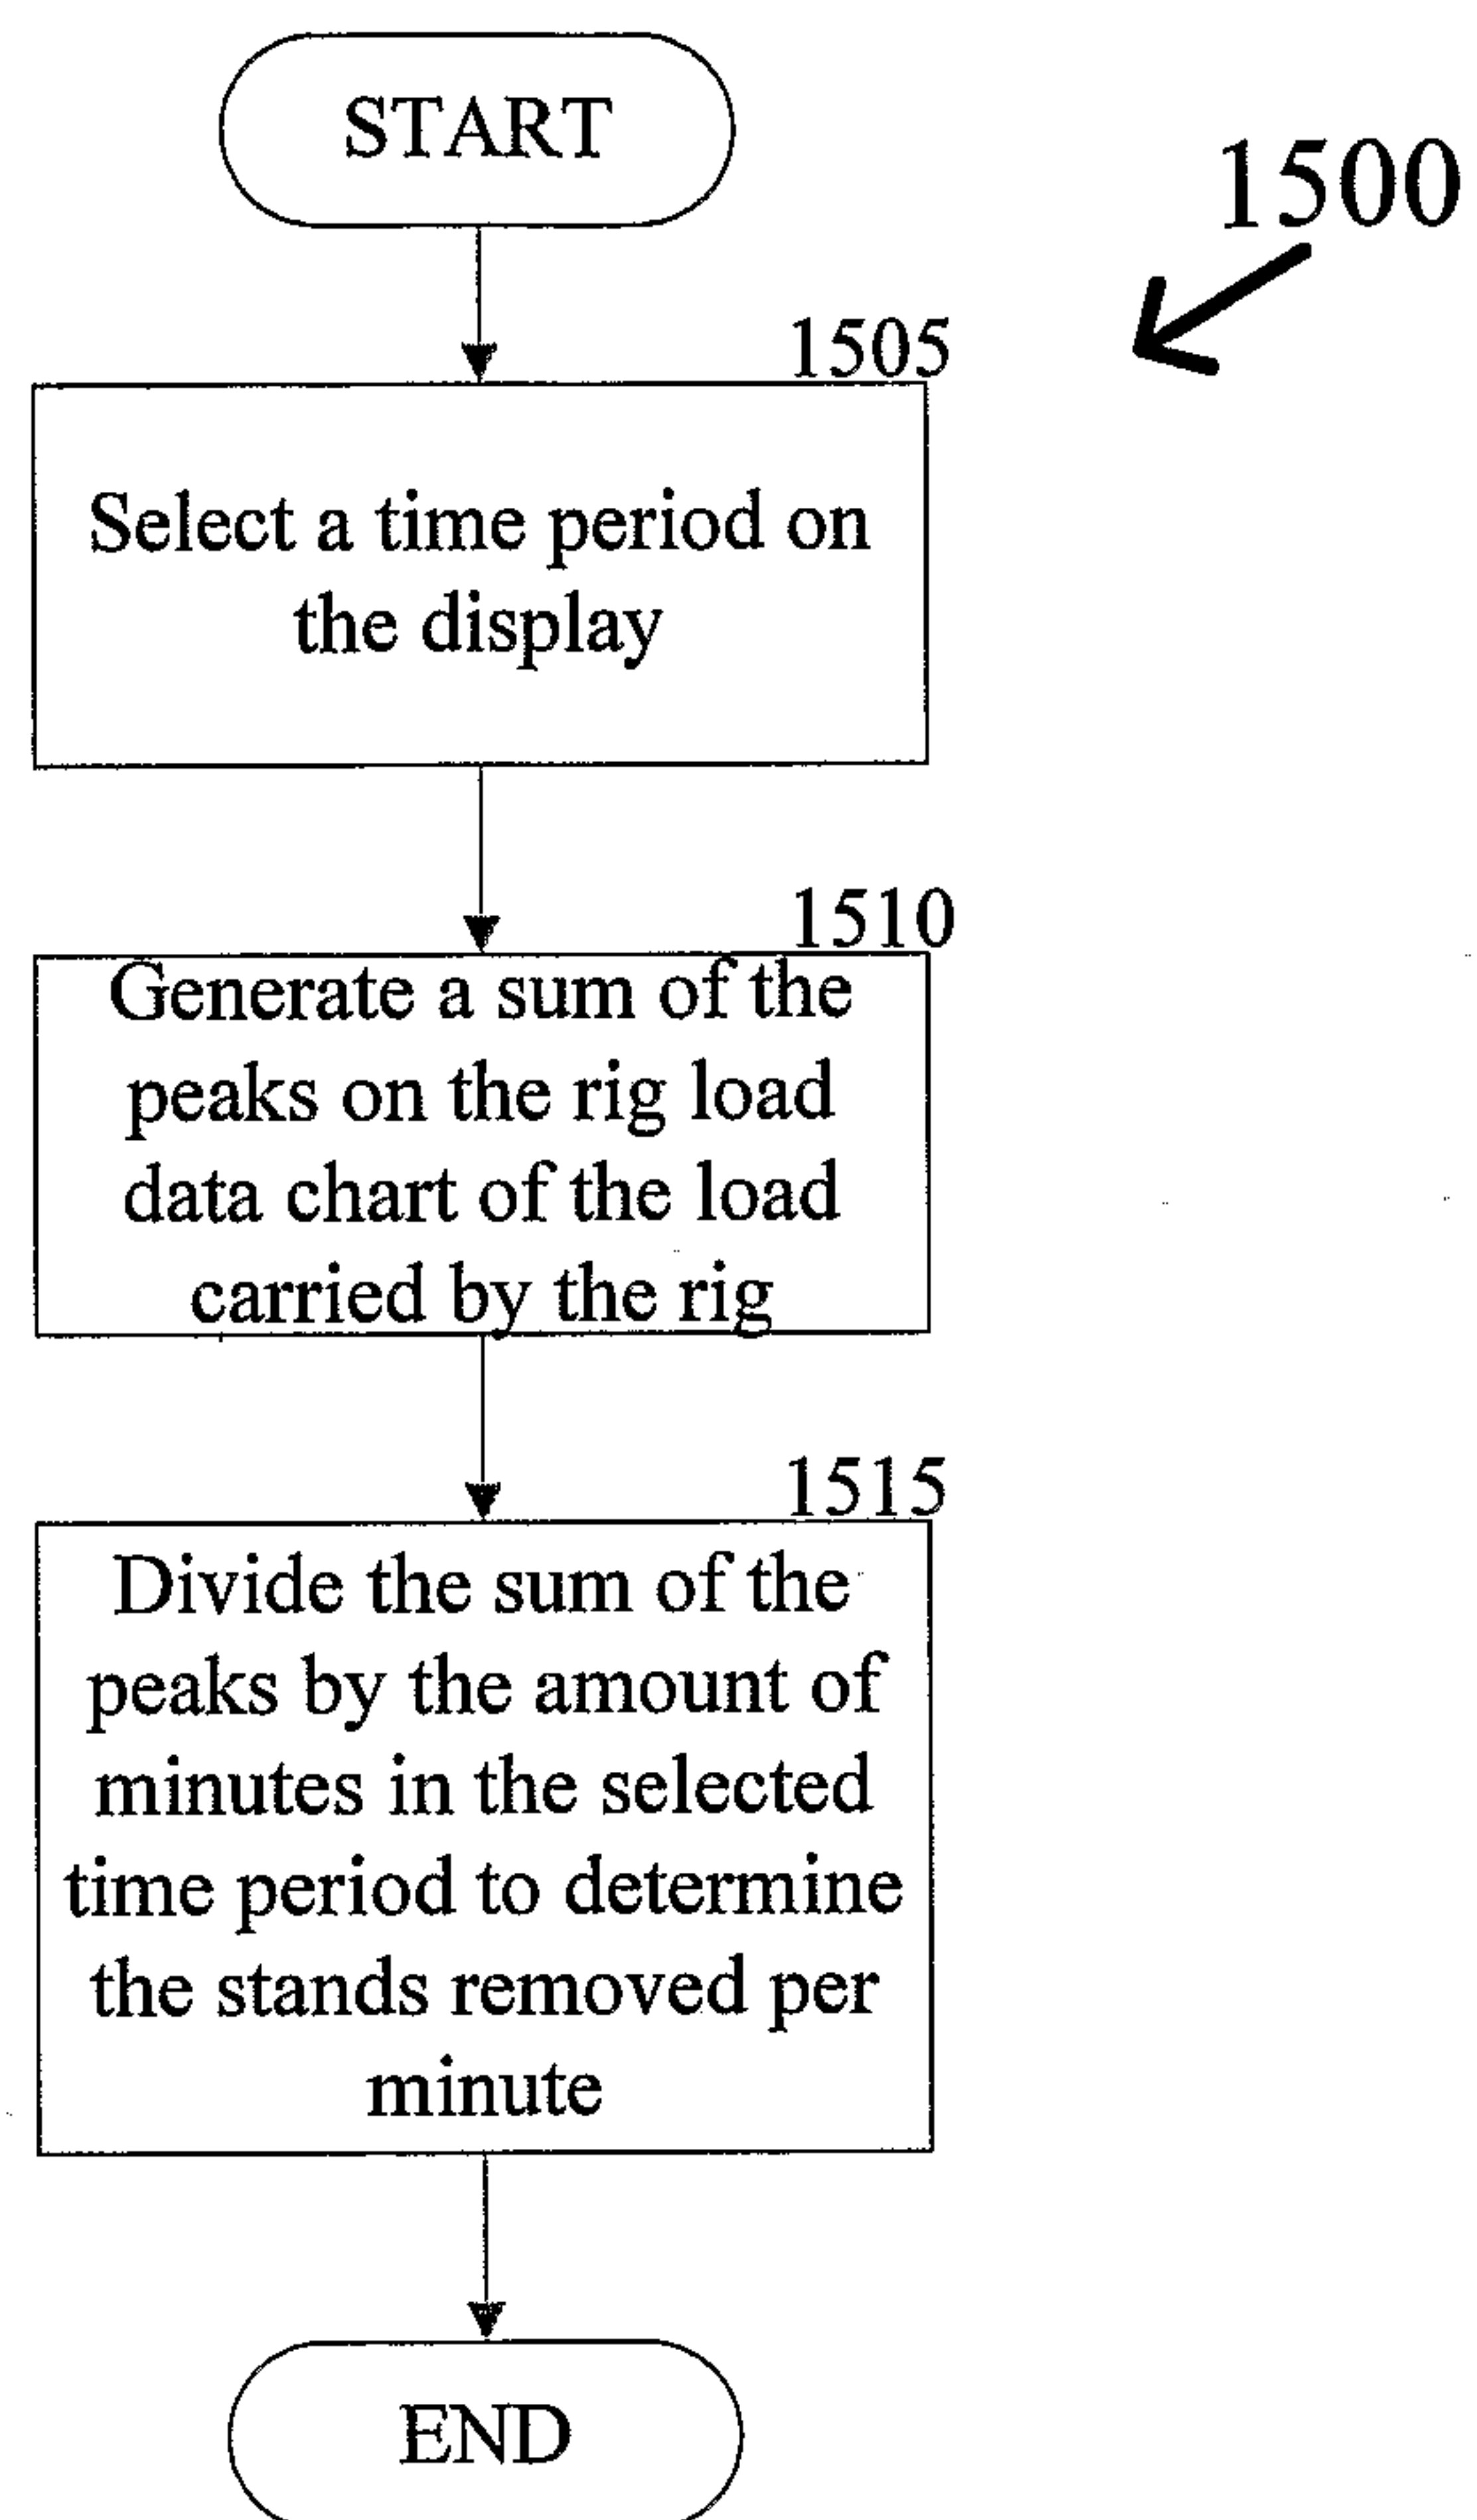


Figure 15

