



(11) (21) (C) **2,082,843**
(22) 1992/11/13
(43) 1993/06/05
(45) 2000/02/01


(72) Webster, Ronald B., US
(72) Boisvert, David P., US
(72) Baron, Michael, US
(72) MacQueen, Raymond J., Jr., US
(72) Smith, K. Scott, US
(72) Gordon, Thomas A., US
(72) Raczkowski, Michael L., US
(72) Evans, Robert, US
(73) FINGRAF AG, CH

(51) Int.Cl.⁶ B41F 15/36, B41F 27/04, B41F 17/00

(30) 1991/12/04 (07/803,126) US

(54) **SUPPORT PLAN POUR MATERIAU MONTE SUR UN CHASSIS
ET METHODE D'UTILISATION**

(54) **PLANAR SUPPORT FOR MATERIAL MOUNTED TO A FRAME
AND METHOD OF USE**

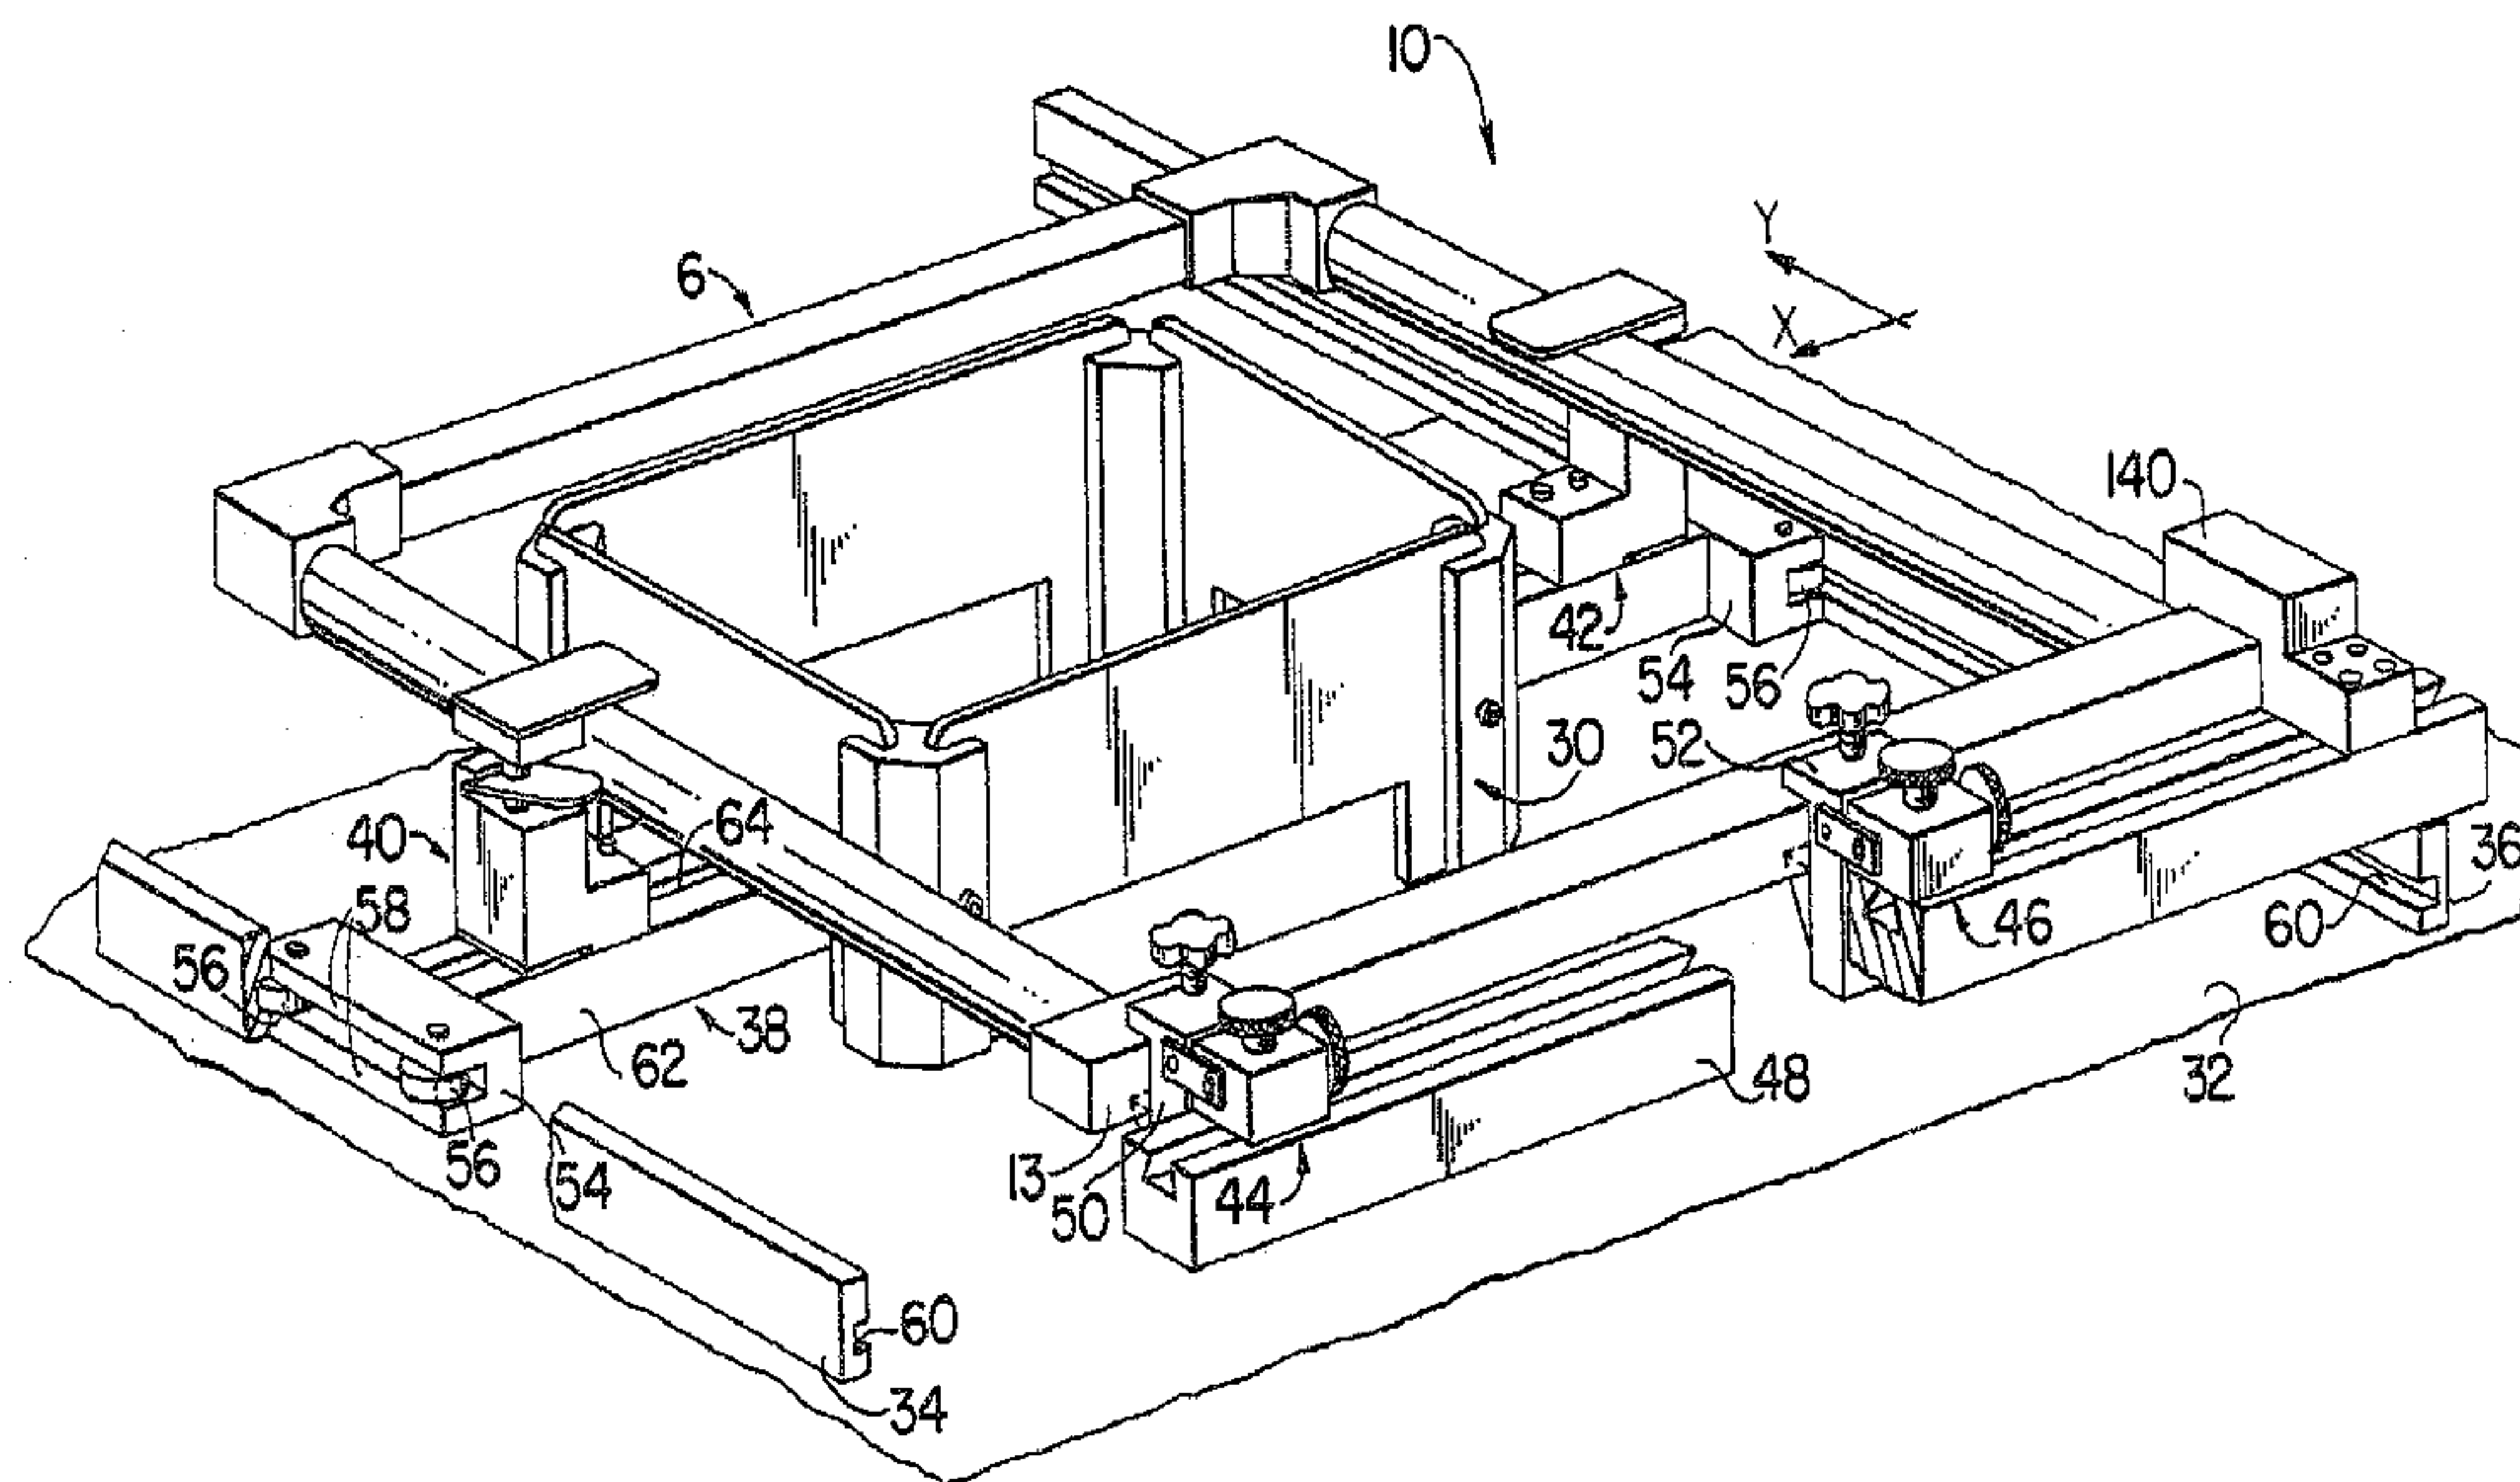

(57) A sheet material support system includes a floating box having upwardly extending leading edges defining a plane (P) extending parallel to a base in which plane sheet material is caused to conform to by applying downward pressure to it and causing the sheet material to become tautly drawn over the box upper edges. The system includes a locating block and clamps which allow frames to be located uniformly along X and Y coordinate axes so that successive frames can be loaded in uniform registration in the system.



ABSTRACT

A sheet material support system includes a floating box having upwardly extending leading edges defining a plane (P) extending parallel to a base in which plane sheet material is caused to conform to by applying downward pressure to it and causing the sheet material to become tautly drawn over the box upper edges. The system includes a locating block and clamps which allow frames to be located uniformly along X and Y coordinate axes so that successive frames can be loaded in uniform registration in the system.

2082843

PLANAR SUPPORT FOR MATERIAL MOUNTED TO

5

A FRAME AND METHOD OF USE

BACKGROUND OF THE INVENTION

10

The present invention resides in a system for supporting a layer of material in a given plane and deals more particularly with a material hold down and support system for use in an apparatus wherein an image is automatically drawn on a surface in a silk screen printing process in which apparatus is provided a means for supporting a printing surface of the screen in a given plane.

15

20

25

In the creation of images in a silk screen printing process an emulsion is formed on the screen so that a desired resist is created to provide a backdrop upon which an image can be formed. Recently, as disclosed in U.S. Patent No. 5,156,089 entitled PRINTING SCREEN AND METHOD AND APPARATUS FOR ITS MANUFACTURE, it has been contemplated to use a single apparatus for generating a plurality of masks each setting

out a pattern piece or pieces of the design to be printed in a designated color. This is done by passing a print head over the emulsion to print directly on it and ultimately cause a negative image to be developed in the emulsion. Subsequently, the developed emulsion is used to print the image onto an article. However, in such a system the emulsion is spaced only about 40 thousandths of an inch below the print head during a plotting operation and therefore it is extremely important to maintain this spaced relationship in order to avoid damaging or impairing the plotting operation that occurs during this process. Also, in the silk screen printing art, often it is found that the screen is stapled to a frame and such fasteners have damaged the print head as well. Further, the frames upon which the screens are mounted are usually warped and this also undesirably contributes to the non-planar printing surface presented by the screen.

Accordingly, it is an object of the present invention to provide a low cost highly applicable means whereby a screen upon which an emulsion is held in a planar relationship relative to a print head moveable above it is disposed such that the screen presents a planar printing surface while the frame itself is located out of the path of travel of the print head thus avoiding problems hitherto known in the damage of the print head as it is driven during a printing operation.

It is a further object of the present invention to provide a system whereby a silk screen frame is loaded into a support system in registration with two orthogonally oriented axes such that all frames used are capable of having a common registration point in the machine.

Further objects and advantages of the present invention will become apparent with reference to the following disclosure and the appended claims.

SUMMARY OF THE INVENTION

A system for supporting in a given plane a thin layer of material mounted to a frame includes a base having an accurately disposed upwardly facing surface defining the plane to which the material conforms, a first coordinate axis and a second coordinate axis each of which axes being orthogonally oriented relative to one another and disposed relative to the base. A means referencing the planar dimension of said base provides a planar support for supporting a layer of material above the base in a given plane. The system further includes first clamp means for holding a portion of the mounting frame and being disposed along one of the first and second coordinate axes in registration therewith; and second clamp means for holding the frame and drawing it below the given plane and for causing the layer of material overlain on the support means to conform to the generally planar dimension provided by the support means. Locating means is provided and is fixed relative to the

1 base and associated with the other of the first and second
coordinate axes for locating the layer of material in reg-
istration therewith. The system may be used in combina-
tion with a coordinate controlled printing head disposed
5 for movement in a plane located above and parallel to the
given plane.

The invention further resides in a method of
using the system as disclosed above to create a planar
surface in material mounted to a frame.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a fragmentary perspective view showing
the apparatus for automatically making a printing screen
by a direct imaging process with its cover removed.

15 Fig. 2 is a perspective view of a screen used in
the apparatus of Fig. 1.

Fig. 3 is a perspective view of the support sys-
tem employed in the apparatus of Fig. 1.

Fig. 4 is a partial fragmentary perspective view
of a Y support carriage clamping assembly.

20 Fig. 5 is a partial fragmentary front eleva-
tional view of the assembly of Fig. 4.

Fig. 6 is a partial fragmentary perspective view
of an X carriage clamping assembly.

25 Fig. 7 is a front elevational view of the assem-
bly of Fig. 6.

Figs. 8a is a perspective view of the floating

box support.

Fig. 8b is a partially fragmentary view of a corner connection in the box of Fig. 8a.

5 Fig. 9 is a perspective view of the support system of Fig. 3, in this case showing a frame on which is provided an emulsion layer overlay.

Fig. 10 is a vertical sectional view taken through a screen as it is supported in the system
10 embodying the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Figure 1 illustrates an apparatus 1 according to the invention for making a printing screen. The apparatus includes a controller which may be an integral stand alone device or may be a separate computer such
15 as shown at 9, a support assembly 10 which supports a screen 14 within the apparatus 1, and an ink jet printing head 16 which is supported above the screen 14 for movement in a plane generally parallel thereto. The
20 printing head 16 is supported on a pen carriage 28 for movement along the illustrated X and Y-coordinate printing axes. The carriage 28 is slidably mounted on a guide rail 29 which extends across the frame 18 and is in turn slidably mounted at each of its ends for movement
25 along ways 27, 27. An X direction drive motor 33 is driveably connected to the pen carriage 28 by means of a drive belt 26 and pulleys 25, 25 to move the carriage in the X-coordinate direction while in the same

1 manner the guide rail 29 is moved in the Y-coordinate di-
rection.

As illustrated in Figure 1, the apparatus 1
prints an image, such as the graphic 19 directly onto a
5 light-sensitive emulsion layer 21 before exposing it to
light. Thereafter, the emulsion is exposed such that
those portions of the emulsion that are not covered by ink
or other opaque substance harden. A dissolving solution
is then applied to the emulsion and the portions of the
10 emulsion which were covered by the opaque material are
dissolved. This process is important to the appreciation
of the present invention in that it should be understood
that several screens are usually used to create a painting
on an article surface with each screen being used as a
15 mask through which a given color is deposited. As such,
it is highly important that each screen be capable of be-
ing held in the apparatus 1 in precisely the same regis-
tration as the preceding and following ones thus effecting
automatic superposition of the printing material by locat-
20 ing a common reference point.

Referring now to Fig. 2 and to the screen 14, it
should be seen that the screen 14 is mounted to a frame 6
and is comprised of a woven fabric 41, generally of
polyester or nylon although silk is sometimes still used,
25 stretched tightly over and affixed to a wooden or metal
frame 6 to define a printing surface S. The frame 6 may

take many different forms, but in the preferred embodiment, it has a leading edge 13 suitably sized and configured to be received within an appropriately sized and shaped holder provided in accordance with the invention. An unexposed light-sensitive emulsion layer 21 is applied to the printing surface S of the screen. The emulsion layer may be applied to the surface S in many different forms, such as, for example, a viscous liquid which is subsequently allowed to dry and harden. For a more complete description of the manner in which the emulsion layer is formed, and other methods of its formation, reference may be had to the aforementioned U.S. Patent No. 5,156,089 entitled PRINTING SCREEN AND METHOD AND APPARATUS FOR ITS MANUFACTURE. In one mode or practicing the invention, the emulsion layer 21 is preferably formed on the screen 14 such that it leaves exposed a perimeter area collectively defined by margins M,M having, for example, a width equalling about 2 inches. As will hereinafter become apparent, the margins of exposed screen may be used to aid in deflecting the frame below the travel path of the head 16.

The printing head 16 is controllably activated in conjunction with the movement generated by the drive motors in response to the print commands generated and transmitted by the control computer in accordance with data entered into the computer. In this manner, the

1 printing head is translated over the entire surface of the
screen to print the graphic 19 directly on the emulsion
layer 21 and to precisely and automatically position the
graphic with respect to the screen. The printing head 16
5 is an ink jet printing head, but the apparatus for practicing the invention is in no way limited in this regard.
For example, a thermal printing head and an associated thermal printing ribbon may be employed instead. In the
case where an ink jet printing head is used to print the
10 graphic on the emulsion layer it has been found particularly advantageous to provide the emulsion layer with an ink receptive material prior to printing the graphic.

In accordance with the invention, the support
assembly 10 for supporting the screen 14 includes a float-
15 ing box 30, a base 32 having a highly accurate planar surface on which the box rests defines the plane ultimately presented to the screen 14, first and second ways 34 and
36 disposed along axes extending parallel to the Y-coordinate direction and spaced from each other generally
20 widthwise of the apparatus 1, and a Y support carriage 38 carrying first and second clamping assemblies 40 and 42 disposed at opposite ends thereof and extending transversely between the first and second ways 34 and 36. The
support assembly 10 further includes first and second X-
25 support carriage assemblies 44 and 46 slidably received within a way 48 fixed to the base 32 and disposed in the X

1 coordinate direction and along which each of the first and
second X support carriage assemblies is selectively posi-
tionable. The first and second Y-coordinate direction
ways 34 and 36 extend lengthwise along the base 32 of the
5 apparatus 1, while the X-coordinate direction way 48 ex-
tends widthwise thereof to present a work area sufficient
to accept different frame sizes which may be used in the
creating of a printing screen. The support assembly fur-
ther includes a locating block 140 which provides a point
10 for registering the frame 6 along the X coordinate direc-
tion. This feature taken in conjunction with a similar
feature provided in the X-support carriage assemblies 44
and 46 is important as will hereinafter become apparent in
that it provides a means by which uniform registration
15 with the apparatus 1 between different screens can be
achieved.

The Y-support carriage 38 includes an elongate
transverse member 62 connected at its ends to an elongate
block 54,54 in which are housed two tracking wheels 56,56
20 disposed at opposite ends thereof. The tracking wheels
56,56 extend outwardly of the end faces 58,58 of each of
the blocks and the member 62 is sized sufficiently length-
wise so as to cause an extending portion of each of the
tracking wheels 56,56 to be received within a correspond-
25 ingly sized and shaped longitudinally extending channel
60,60 which defines each of the ways 34 and 36. The Y-

1 support carriage 38 is thus seated within the ways 34,36
against skewing, yet is capable of moving freely in the
illustrated Y coordinate direction.

Referring now to Figs. 4 and 5, it should be
5 seen that formed along the upwardly extending face of the
transverse member 62 is a T-shaped retaining groove 64
correspondingly sized and shaped to receive a mating por-
tion 63 depending from each of the first and second clamp-
ing assemblies 40,42 thereby effecting free sliding move-
10 ment within the groove 64 yet constraining the assemblies
from being moved upwardly. Each of the first and second
clamping assemblies 40 and 42 is further comprised of a
base or a block portion 70,70, having an opening 74 formed
through the top end thereof and being suitably sized for
15 journalling a shaft 76 received therein. The shaft 76 is
freely rotatably journalled within the block 70 but is
biased upwardly by an internal spring 78 acting between
the shaft 76 and a lower plate 80 and has an upper limit
stop 82 defining its upper travel limit. At the free end
20 of the shaft 76 is disposed a holding plate 84 can-
tilevered therefrom to coact with a juxtaposed portion of
the frame 6.

For causing the holding plate 84 to be selec-
tively held at a desired height against the upward urging
25 of the internally housed spring 78 and against other
forces acting on it as will hereinafter become apparent,

1 the clamping assemblies 40,42 further include a limit
mechanism 88 for limiting the upward travel of the shaft
76 above the block portion 70,70. The limit mechanism 88
includes a lever 90 having a slightly oversized opening 92
5 formed therein, a spring member 94 supported on the base
portion 70 and acting against the lever 90. As such, the
spring 94 acting in an upward direction against the bottom
surface of the lever 90 taken in conjunction with the
opening 92 being slightly oversized relative to the shaft
10 diameter, causes a portion of the lever opening 92 to bite
on the outer surface of the shaft 76 when the shaft is
urged upwardly while nevertheless allowing the holding
plates 84,84 to be readily depressed and maintained at a
given height depending on where along the path of travel
15 the downward pressure on the shaft 76 is released. This
feature provides a means whereby a portion of the frame
may be held at a determined position by the mere applica-
tion of a downward pressing force on the holding plates
84,84 by the user.

20 Each of the first and second X-support carriage
assemblies 44,46 shown in detail in Figs. 6 and 7 includes
a block portion 102,102 and an associated clamp 50,52 for
engaging with and holding portions of the leading edge 13
of the frame 6 in the manner which will become apparent.
25 The clamp block portions 102,102 are adapted to be freely
separately slidable along the way 48 while nevertheless

1 being capable of being locked in a selected position
therealong. For this purpose, each of the X support
carriage assemblies includes a separate locking part 51,51
inserted within a correspondingly shaped dovetail groove
5 98 making up the way 48 and being threadably connected to
an associated one of the blocks 102,102 through the
intermediary of a locking bolt 104 having a turn knob 105
for easy locking of the block portion relative to the way
48.

10 In addition to being slidably adjustable along
the way 48, each of the clamps 50 and 52 is both verti-
cally and pivotally adjustable relative to its associated
block. To this end, a locking means 106 is provided in
accordance with the invention and includes two spaced
15 apart plates 108,108 each having vertical slots 110,110
formed therein at ends proximate the block 102, a pin 112
and a threaded shaft 114 each fixed respectively to oppo-
site sides of an associated block and being slidably re-
ceived in a respective one of the slots 110,110 formed in
20 each plate pair. The plates are fixed to the clamp 50,52
associated with it and are spaced relative to one another
to allow a slight clearance between the inner surfaces
thereof and the block 102,102 associated with them thereby
allowing a certain play to exist to effect both vertical
25 and pivotal movement. Cooperating with the threaded shaft
114 is a correspondingly threaded knob 116 which upon ap-

1 appropriate turning thereof causes the first and second
clamps 50 and 52 to be independently locked relative their
respective block portions 102,102 by drawing the inner
face of a plate pair into gripping contact with the con-
5 fronting face of the block portion. Thus, it should be
seen that the assemblies 44 and 46 are capable of accommo-
dating any skewing found in a frame shape by allowing
adjustments in both the vertical direction indicated by
the arrow V and for any needed pivotal movement along the
10 path indicated at PV.

For gripping the leading edge 13 of the frame 6
along a portion of its length, the first and second clamp-
ing assemblies 50 and 52 include a cantilevered abutment
126, a moveable jaw 122 cooperative with the abutment and
15 being disposed within a generally rectangular vertically
oriented cavity 120 formed within each of the assemblies
50 and 52 actuated by a vertically disposed lead screw 118
journalled at the top and bottom of the clamping assembly.
The jaw 122 has a given width dimension W and the cavity
20 120 is dimensioned widthwise as defined by frontal faces
123,123 so as to be slightly larger than the width dimen-
sion W to provide a track along which the jaw 122 slides.
A threaded opening 124 is formed in the jaw for receiving
the corresponding sized and gauged lead screw 118 such
25 that the jaw 122 is capable of being positively moved in a
vertical direction to cause it to clamp a portion of the

1 frame 6 between it and the abutment member 126.

Referring now to Fig. 8a and in particular to the construction of the floating box 30, it will be seen that the box 30 is comprised of four corner 128,128 having longitudinal recesses 130,130 disposed at 90 degree angles to one another suitable sized and configured to receive one end of the panels 136, 136 which define the box 30. The panels 136,136 are equal heightwise as measured between the footings 129,129 and their upwardly extending edges 131,131. Precise alignment of the edges 131,131 to locate them in a common plane P is effected by the footings 129,129 which are caused to rest on the base 32. In this way, the panels 136,136 are referenced relative to the base 32 and therefore cause the edges 131,131 to lie commonly in plane P. The panels are connected to the corners only to the extent that they create an enclosed shape and such that the corners do not interfere with the even seating of all footings on the base 32. This may be accomplished as shown in Fig. 8b by forming openings 139,139 in the corners 128 which communicate with each recess 130,130 and which are threaded only along the outwardly disposed portion T to secure holding screws 132,132 therein. Additionally, generally coincident oversized openings 133,133 are formed in the panels and receive respective ones of the screws 132,132. The panels 136,136 each have a cutout bottom portion 138 which allows the Y-

1 support carriage 38 to extend through the box while nevertheless allowing the box to seat securely on the base 32.

5 In use, as shown in Figs 9 and 10, it should be seen that the screen 14 mounted to a frame 6 is initially placed down onto the box 30 such that the area onto which the graphic is to be created is circumscribed by the upwardly extending edges 131,131 of the box 30. In addition, the leading edge 13 of the frame 6 is placed within each of the X-carriage clamping assemblies 50 and 52 in
10 their loosened condition such that this edge abuts the frontal faces 123,123 thereof and that its corner abuts the locating block 140. In this way, uniform registration of any frame can be achieved automatically such that the controller 9 may begin marking a plot relative to the
15 frame edges precisely with reference to the machine axes.

Once the screen 14 is placed flushly within the clamps 50 and 52 it is locked therein and the Y-support carriage clamps 40 and 42 are then moved, and if necessary, swivelled into position along the lateral sides of
20 the frame 6. Subsequently the holding plates 84,84 are depressed slightly drawing the frame below the plane P. It being herein noted that the X-support clamp slots 110,110 are disposed relative to the base 32 so as to generally include the plane P and that it is the downward
25 force caused by the Y support carriage clamps 40 and 42 which is responsible for drawing the screen over the box

1 30. The screen provides sufficient deflection necessary
to allow the frame to be drawn slightly below the plane P
in order to force the material to assume the planar orientation set by the upper edges of the box 30.

5 Once this is done, the user then applies a
straight edge over the screen surface to insure that there
is nothing which protrudes into the plane P, such as for
example a staple or other fastener used to secure the
screen. Subsequently, the controller 9 is caused to move
10 the print head over the screen without interference or any
obstruction and to create the desired artwork.

From the foregoing a system has been described
whereby a material mounted on a frame is caused to assume
an orientation in a given plane, but other modifications
15 and substitutions may be had without departing from the
spirit of the invention. For example, while the system
disclosed herein contemplates use in an apparatus wherein
a marking head prints directly onto an emulsion layer
formed on the screen, it is nevertheless well within the
20 purview of the invention to use the system in a process in
which no emulsion layer is used on the screen. Also, it
is disclosed that downward force is applied to the frame
by the Y-support carriage clamps 40 and 42, but this force
may alternatively be provided by an appropriate carriage
25 along the frame edge which opposes the leading edge 13.

Accordingly, the invention has been described by way of illustration rather than limitation.

Claims

1. A system for supporting in a given plane (P) fixed relative to a base a thin layer of material mounted to a frame, said system of the type comprising a base, said base having an upwardly facing surface defining the plane to which a material is to assume, said base having disposed thereon a first coordinate axis (X) and a second coordinate axis (Y), each of which axes is orthogonally oriented relative to the other; said system being characterized by: support means for referencing the planar dimension of said base and for supporting a layer of material above said base and in a spatial relationship relative to said base upwardly facing surface so as to dispose the layer of material in a given plane (P) parallel to that defined by said upper surface of said base, first clamp means for holding a portion of said frame to said base with reference to one of the first and second coordinate axes, and second clamp means for holding the frame and drawing it below said given plane and for causing said layer of material overlaid on said support means to conform to said generally planar dimension provided by said support means, and locating means fixed relative to said base and associated with the other (Y) of said first and second coordinate axes for locating said frame in registration with reference to the other of said first and second coordinate axes.

2. A system as defined in claim 1 further characterized in that said first clamp means includes means providing both vertical and pivotal movement relative to said one coordinate axis.

3. A system as defined in claim 2 further characterized in that said first clamp means is comprised of two separate clamping assemblies each slidably received within a first way coextensive with one of said coordinate axes.

4. A system as defined in claim 3 further characterized in that each of said two clamping assemblies is comprised of two clamping parts one of which parts is slidably lockable relative to said first way and said second part having frontal faces for causing said frame mounting said material to abut against and be held in registration along said first coordinate axis.

5. A system as defined in claim 4 further characterized in that said support means includes a floating box resting on said base and underlying said material to be worked on.

6. A system as defined in claim 5 further characterized in that said second clamp means is comprised of at least two clamp assemblies one of which assemblies is associated with said other of said two orthogonally oriented coordinate axes (Y).

7. A system as defined in claim 6 further characterized by each of said assemblies of second clamping means being slidably disposed along a support carriage moveable in a direction parallel to said other (Y) of said first and second orthogonally disposed coordinate axes.

8. A system as defined in claim 7 further characterized in that said support carriage includes a transverse member extending parallel to the one (X) of said first and second coordinate axes and includes a means for providing a way along which each of said second clamping assemblies slide.

9. A system as defined in claim 8 further characterized in that each of said assemblies of said second clamping means includes a holding plate cantilevered outwardly therefrom; and each of said holding plates being associated with a vertical adjustment locking means for holding said plate at a height above said base.

10. A system as defined in claim 9 further characterized in that said floating box has upwardly extending edges disposed in a common plane (P) with one another and defining said plane in which said material is to be conformed, said common plane being referenced to the upwardly facing planar surface of said base; and each of said holding plates comprising said second clamp assemblies being moveably supported intermediate the base and said common plane such that said holding plates are

capable of being depressed and held at locations below said plane.

11. A system as defined in claim 10 further characterized in that said transverse member comprising said support carriage is connected at opposite ends thereof to block members having tracking wheels disposed therein and cooperating with first and second ways disposed above said base for positioning said second clamping means assemblies at locations disposed transversely to said one (X) of said first and second orthogonally oriented axes.

12. A system as defined in claim 11 further characterized in that said locating means is a block having a surface extending parallel with said other of said first and second coordinate axes.

13. A system as defined in claim 12 further characterized in that said box is comprised of corner joints having grooves formed therein for receiving correspondingly sized side panels; each of said side panels comprising said box having a cutout formed along its bottom for allowing said transverse member of said support carriage to extend transversely across said base when said box is supported thereon.

14. A system as defined in claim 2 further characterized in that said layer of material is a limp screen material mounted tautly to a frame, said material

having a mesh-like quality onto which an emulsion is applied and allowed to harden; and wherein said emulsion is applied to said mesh-like material such that portions of said material are left exposed along margins (M,M) such that when said second clamping means applies a downward pressure to said frame the deflection of said mesh-like material occurs in the area delimited by said margins.

10 15. A system as defined in claim 14 further characterized in that said support means has dimensions taken relative to said first and second orthogonally disposed coordinate axes (X,Y) so as to generally underlie said emulsion formed on said mesh-like material.

15 16. A system as defined in claim 15 further characterized in that said support means is comprised of a plurality of panels having footings and connecting corners so assembled that the corners do not interfere with the even seating on the base of all of said footings associated with each panel.

20 17. A method of forming a planar surface in a sheet of material (14) of the type comprising the steps of providing a base (32) having a support surface referencing a plane to which material is to conform, providing a support means (30) having means for defining a plane referenced to said base support surface and oriented above said base, providing said sheet material such that it is mounted on a frame having one edge and another edge, positioning said material above said

support means and orienting said material in registry with a first (X) and a second (Y) coordinate axis, said method being further characterized by: drawing said material over said support means by pulling said material at said edges tautly over said support means thereby causing the material to be conformed coincidentally with said plane (P) defined by said support means; and holding one edge of said frame along said first coordinate axis and holding the other edge of the frame generally orthogonally disposed thereto relative to said second orthogonal axis and subsequently performing said drawing step by drawing said frame down on support means at at least one point disposed along or parallel to said second orthogonally oriented axis.

18. A method as defined in claim 17 further characterized by providing said support means as a box member having four sides with upwardly extending edges commonly disposed in a single plane; and applying pressure along points of said frame outwardly disposed of said box member and spaced therefrom by marginal edge portions (M,M).

19. A method as defined in claim 18 further characterized by providing said sheet material as a mesh screen-like material and applying an emulsion to said screen-like material such that said marginal edge portions (M,M) are defined by portions thereon on which said emulsions do not exist.

20. A method as defined in claim 17 further characterized by providing holding members along one of said first and second coordinate axes capable of both vertical and pivotal movement therealong; and drawing said material tautly down over said support means by applying pressure at points located outwardly of said box.

21. In combination with a plotting apparatus having a marking implement moveable in a plotting plane, a system for supporting in a given plane (P) fixed relative to a base parallel to said plotting plane a thin layer of material mounted to a frame, said system comprising: a base, said base having an upwardly facing surface defining the given plane to which a material is to conform, said base having disposed thereon a first coordinate axis (X) and a second coordinate axis (Y), each of which axes is orthogonally oriented relative to the other; the combination further characterized by: support means for referencing the planar dimension of said upwardly facing surface of said base and for supporting a layer of material above said base in a given plane (P) parallel to that defined by said upper surface of said base; first clamp means for holding a portion of said frame to said base with reference to one of the first and second coordinate axes, and second clamp means for holding the frame and drawing it below said given plane and for causing said layer of material overlaid on said support

means to conform to said generally planar dimension
provided by said support means; and locating means fixed
relative to said base and associated with the other of
5 said first and second coordinate axes for locating said
frame in registration with reference to the other (Y) of
said first and second coordinate axes.

22. The combination as set forth in claim 21
further characterized in that said support means is
10 comprised of a box having a plurality of panels and
connecting corners so assembled such that the corners do
not interfere with the even seating of all footings
associated with each panel on the base.

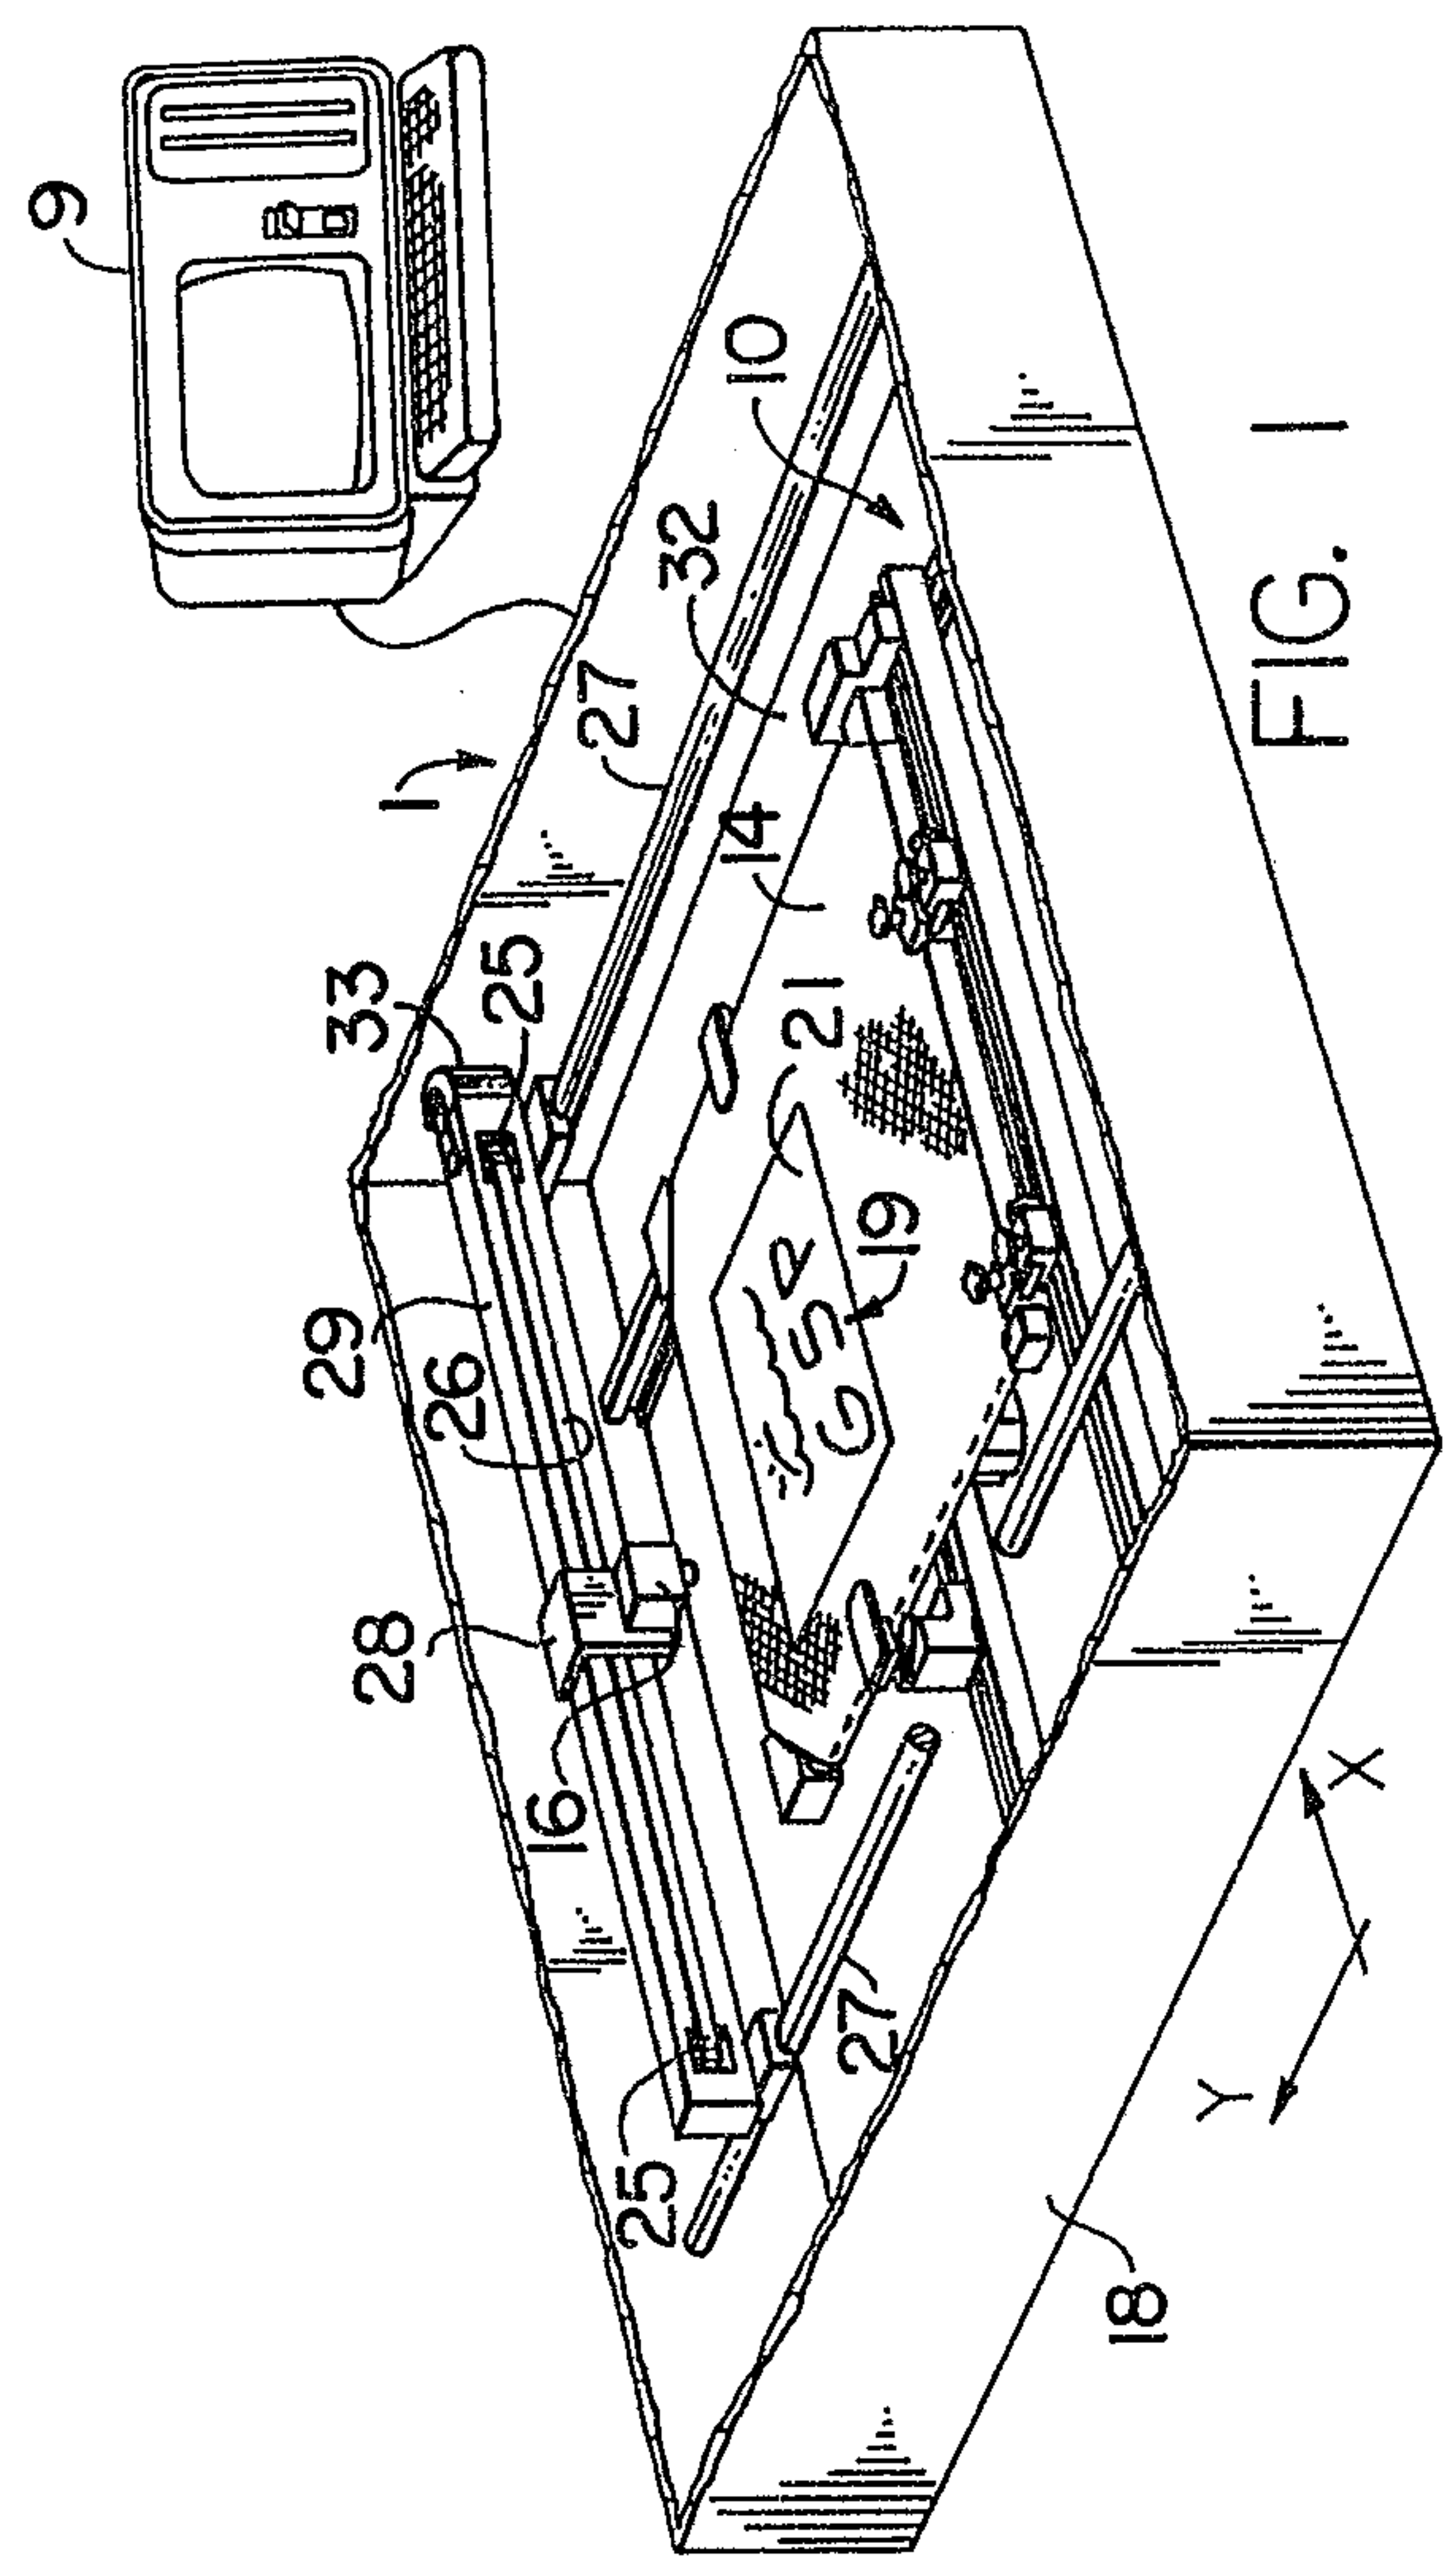


FIG. 1

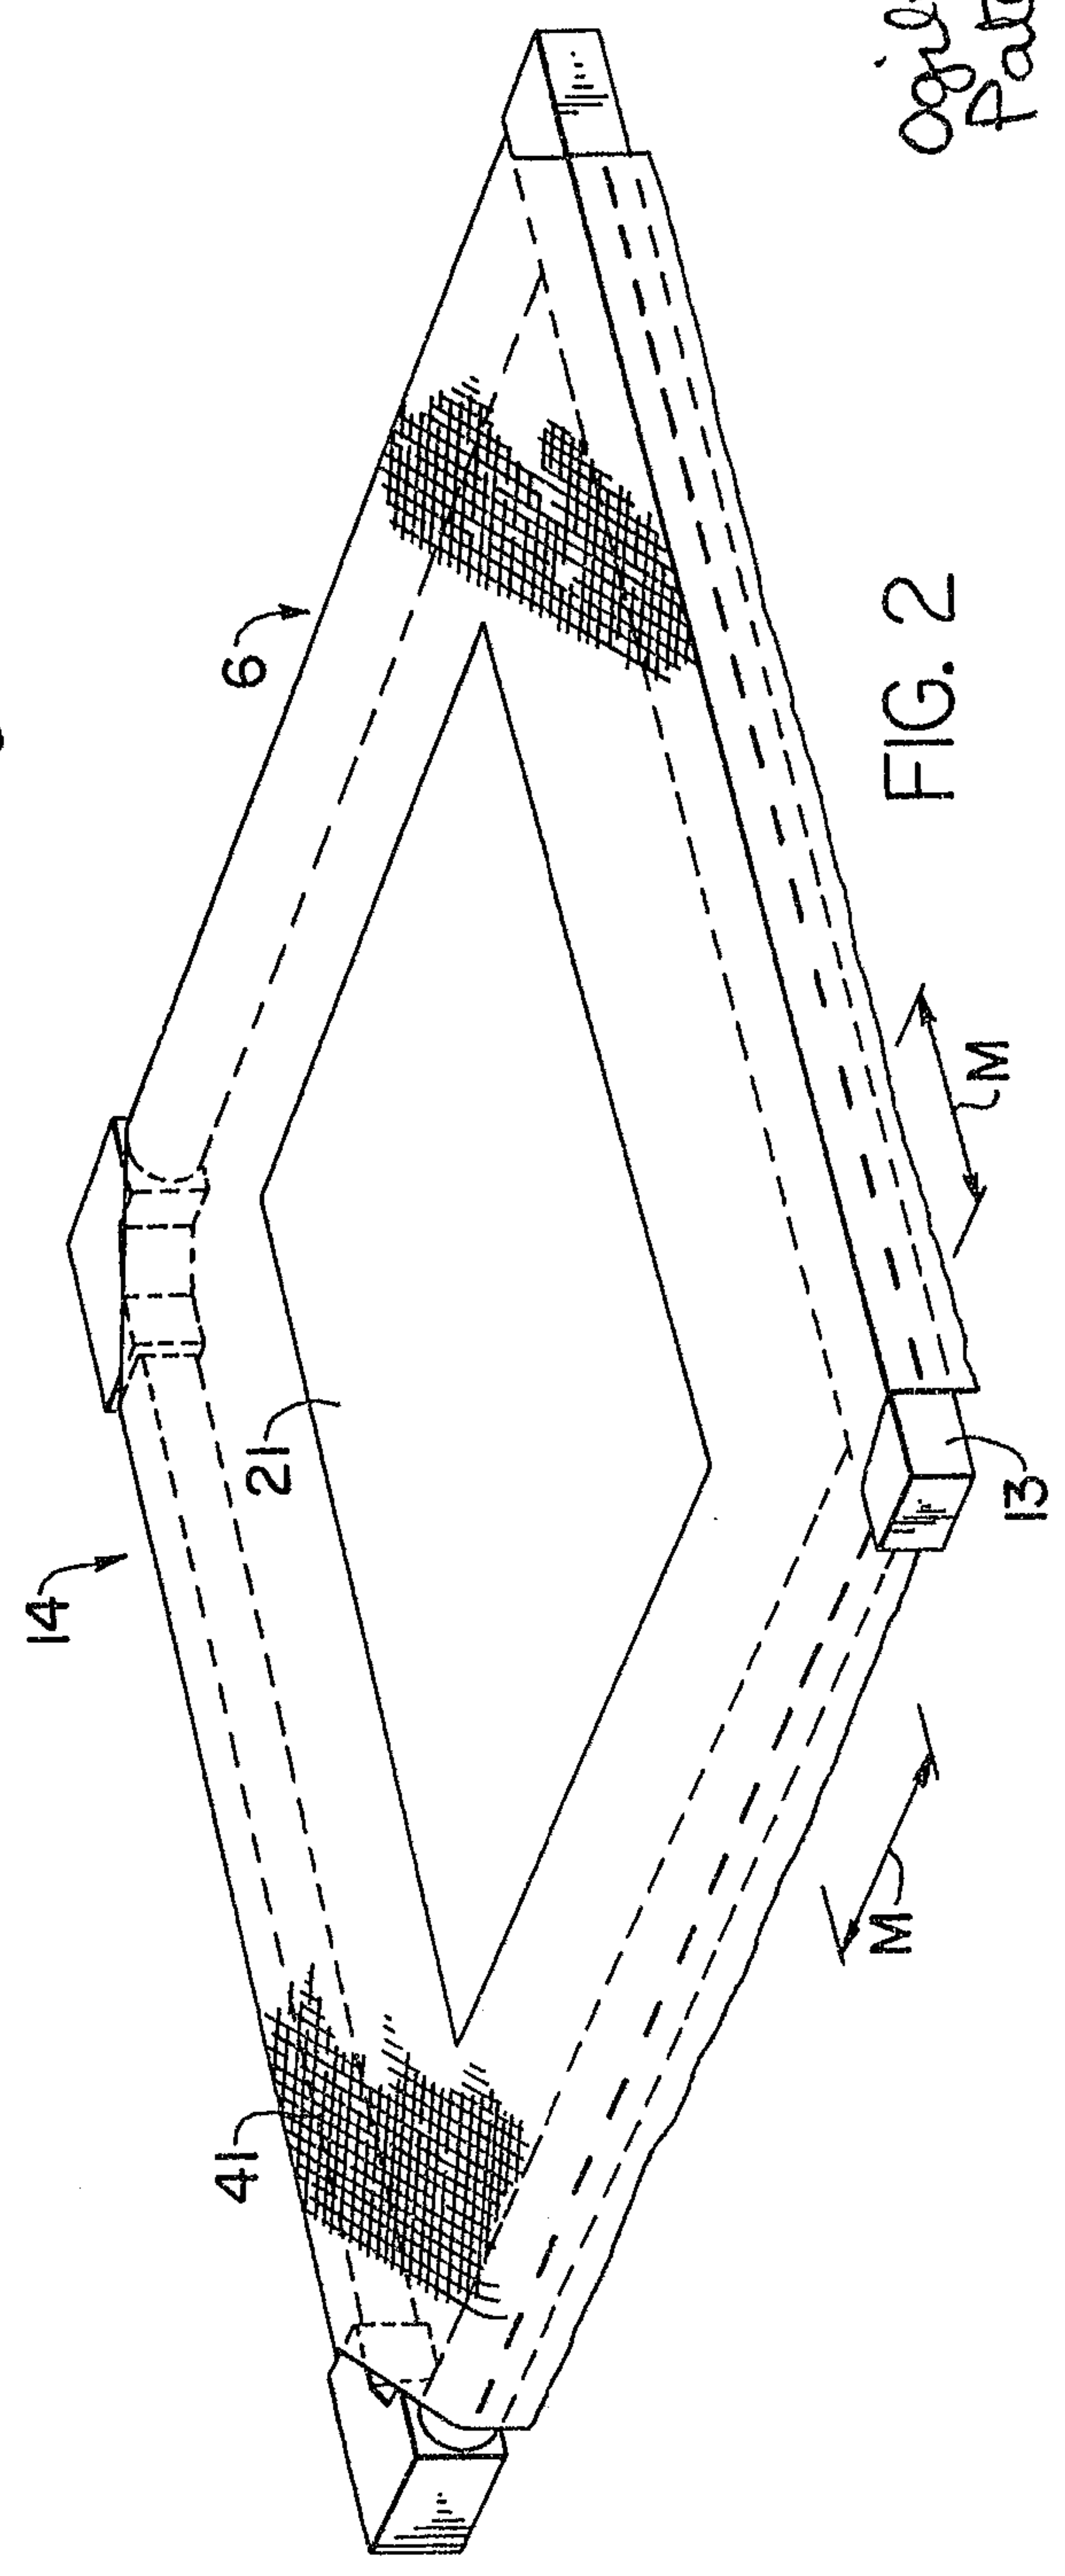


FIG. 2

Ogilvy Renault
Patent Agents



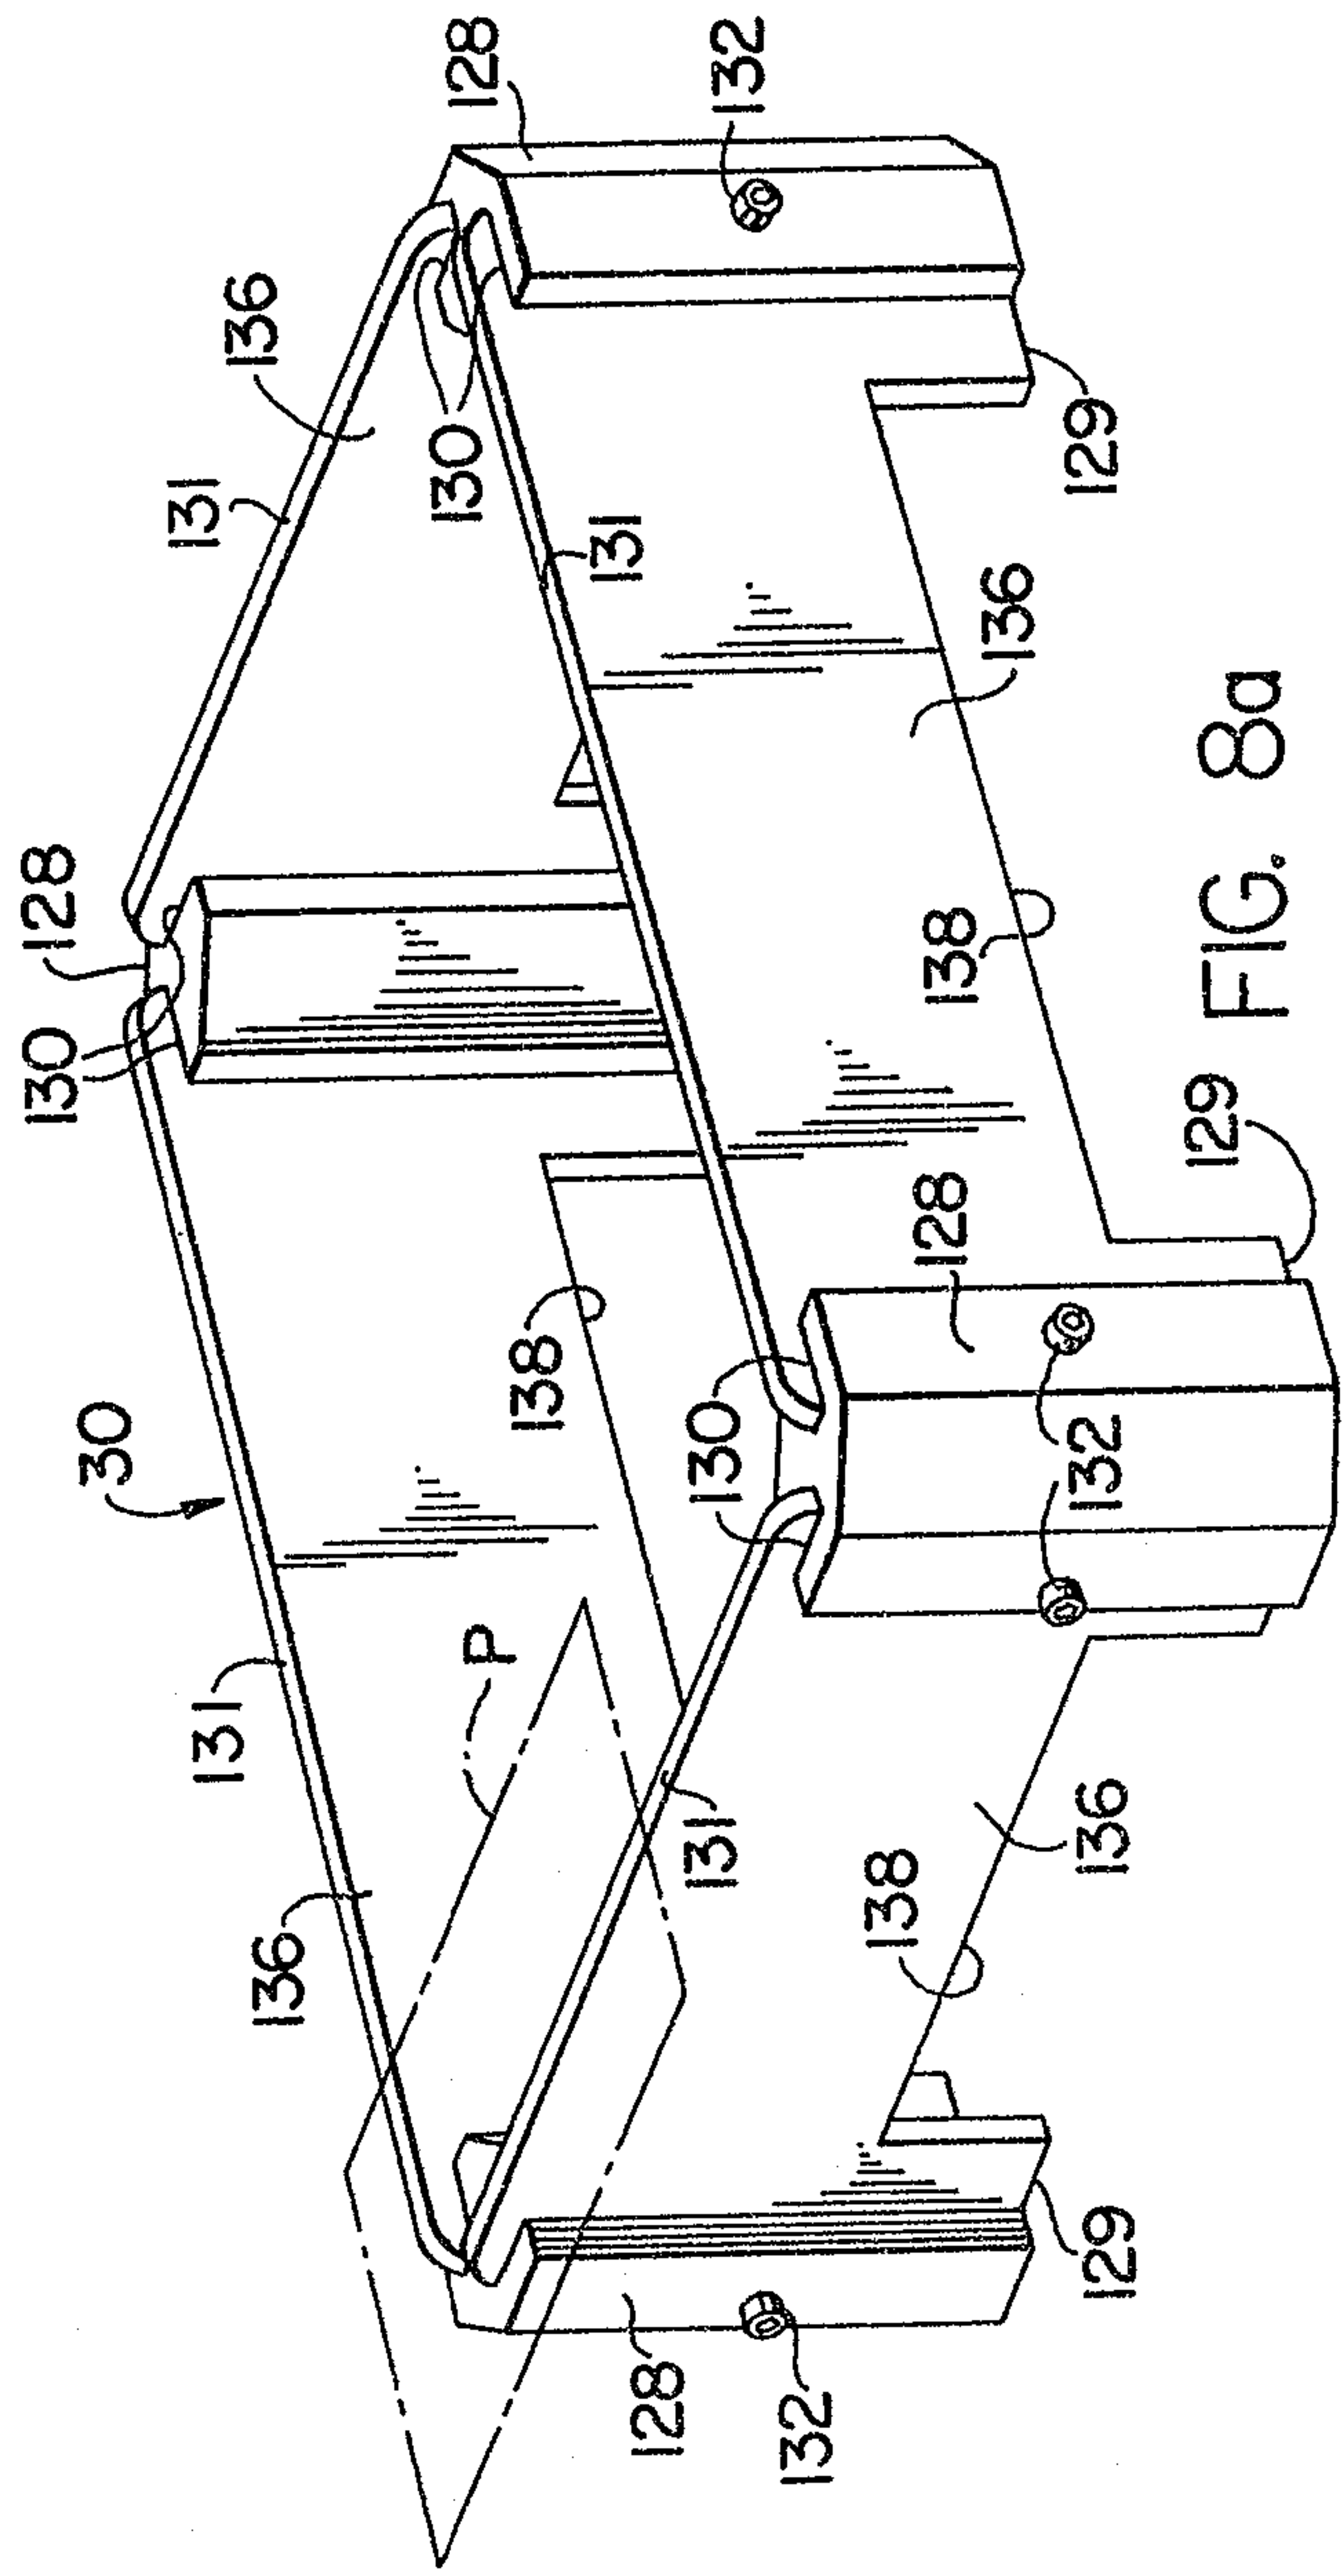


FIG. 8a

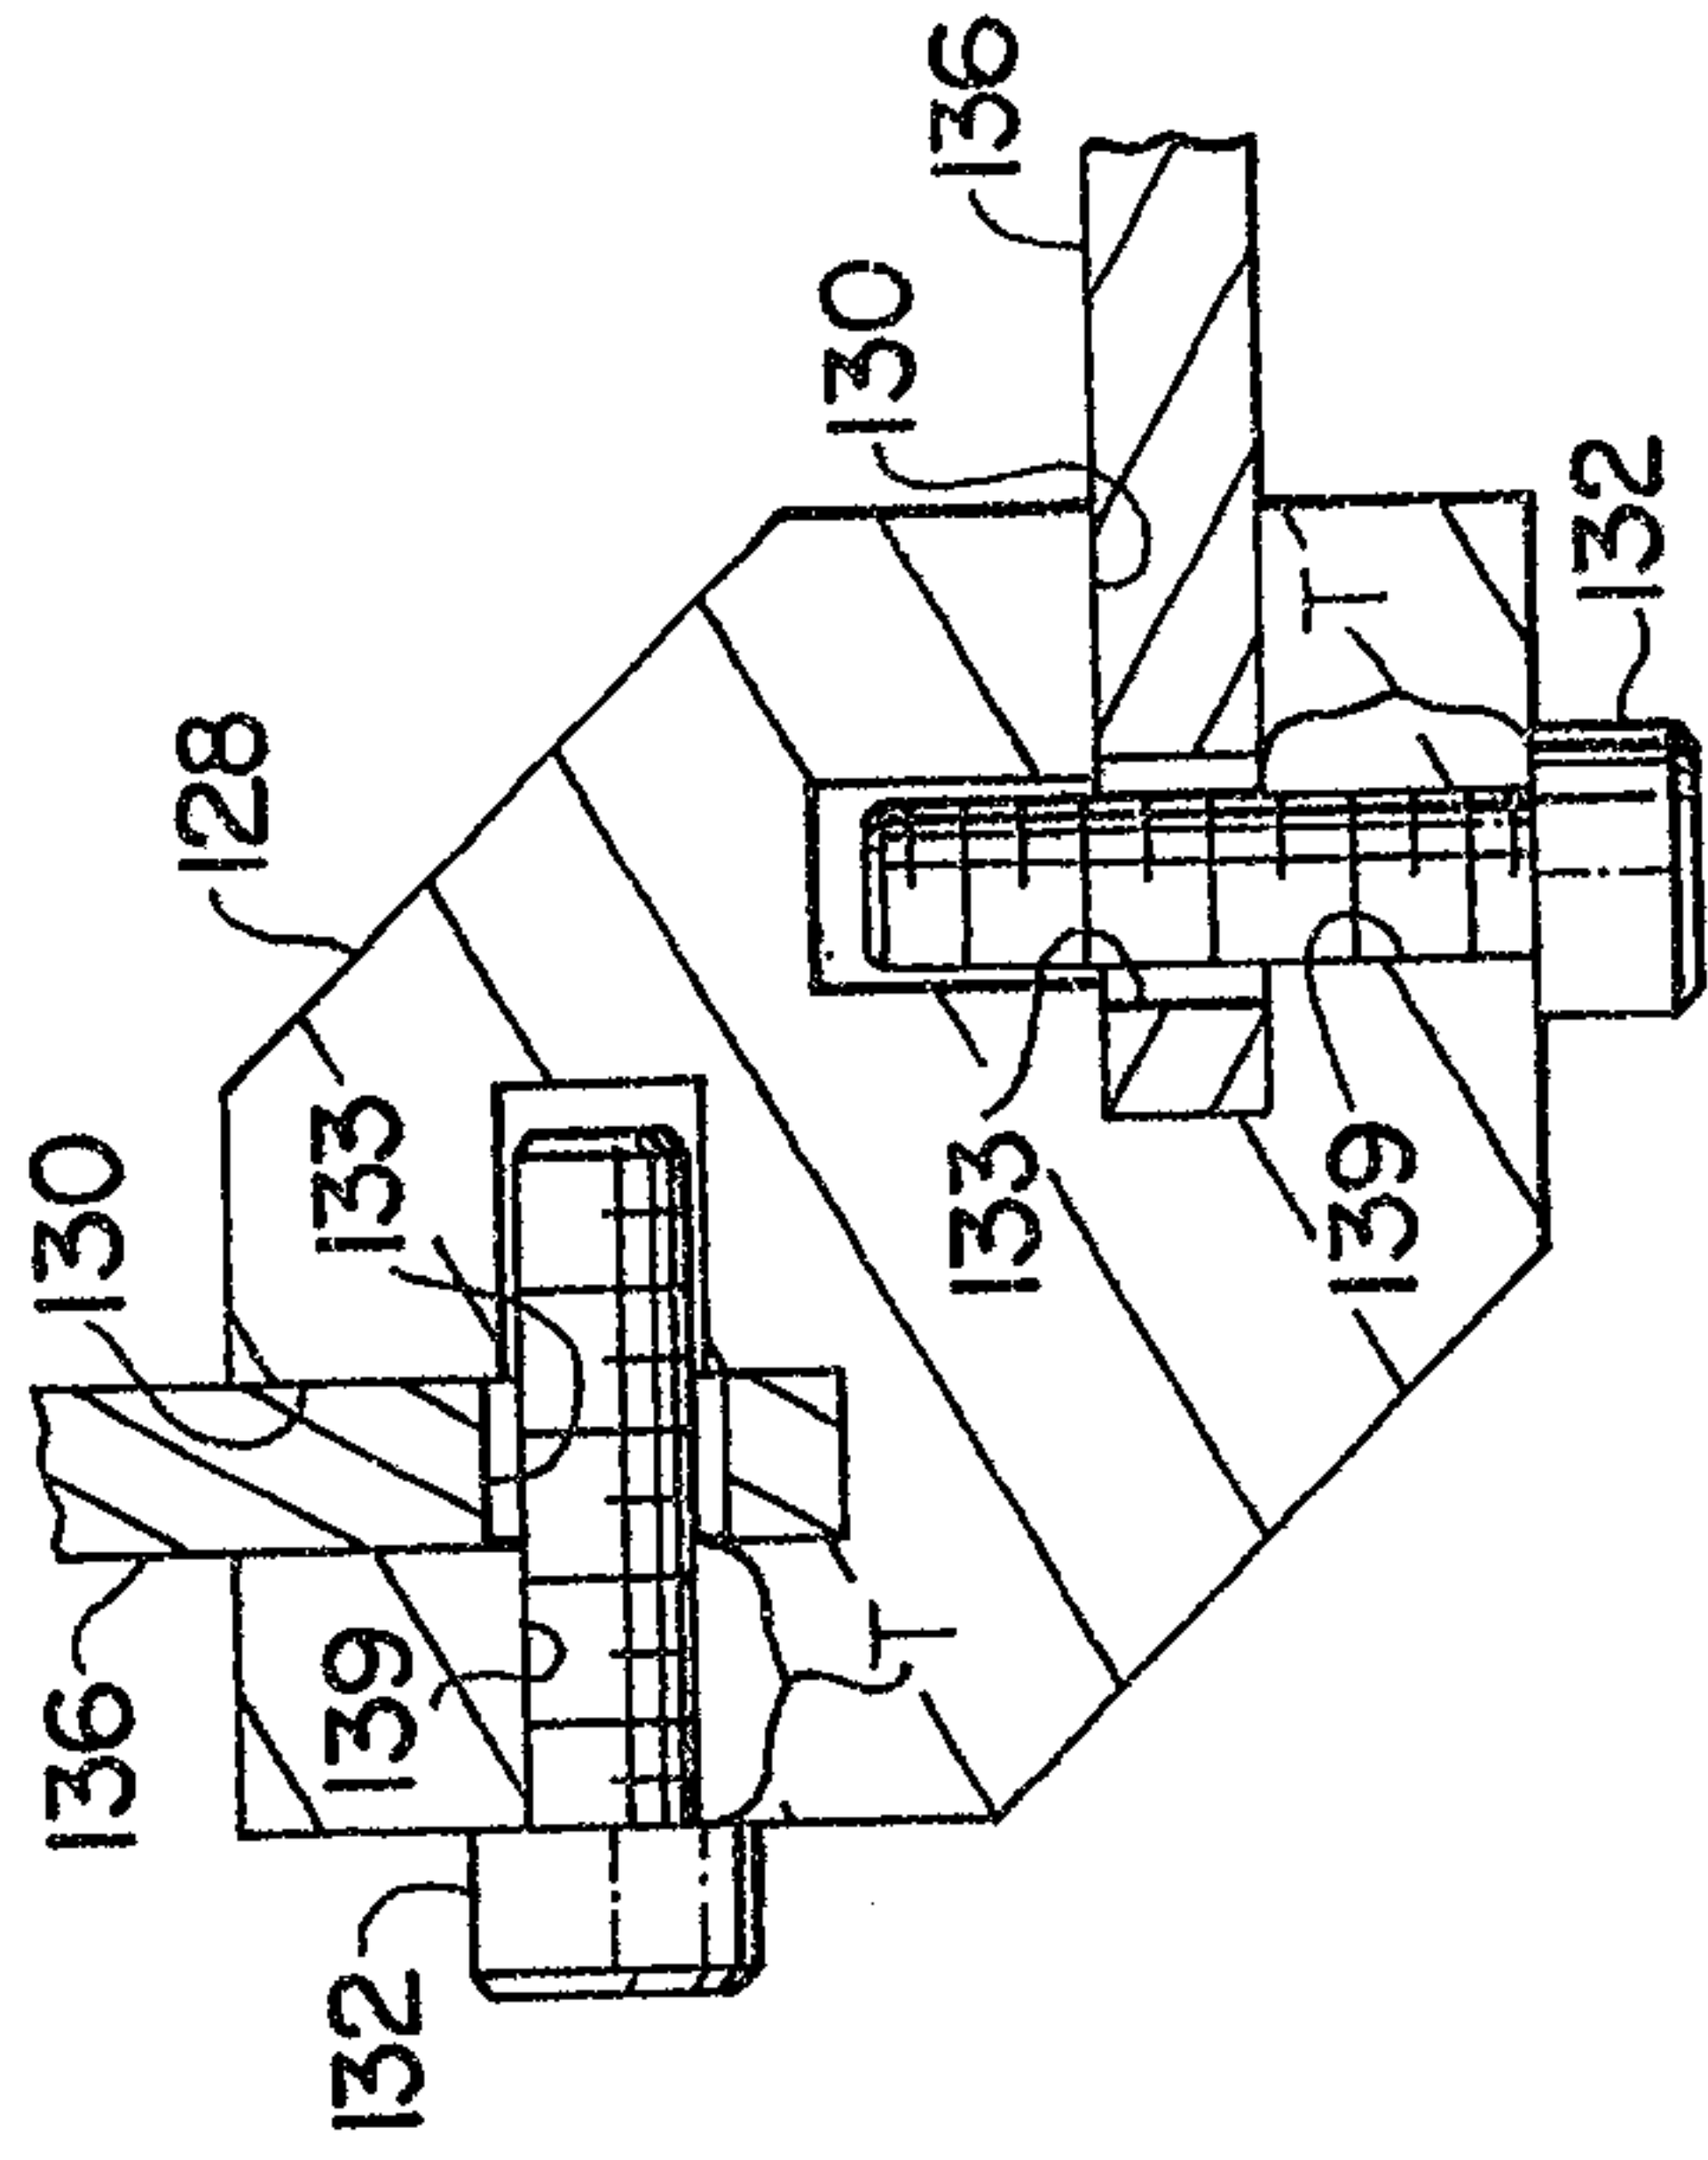


FIG. 8b

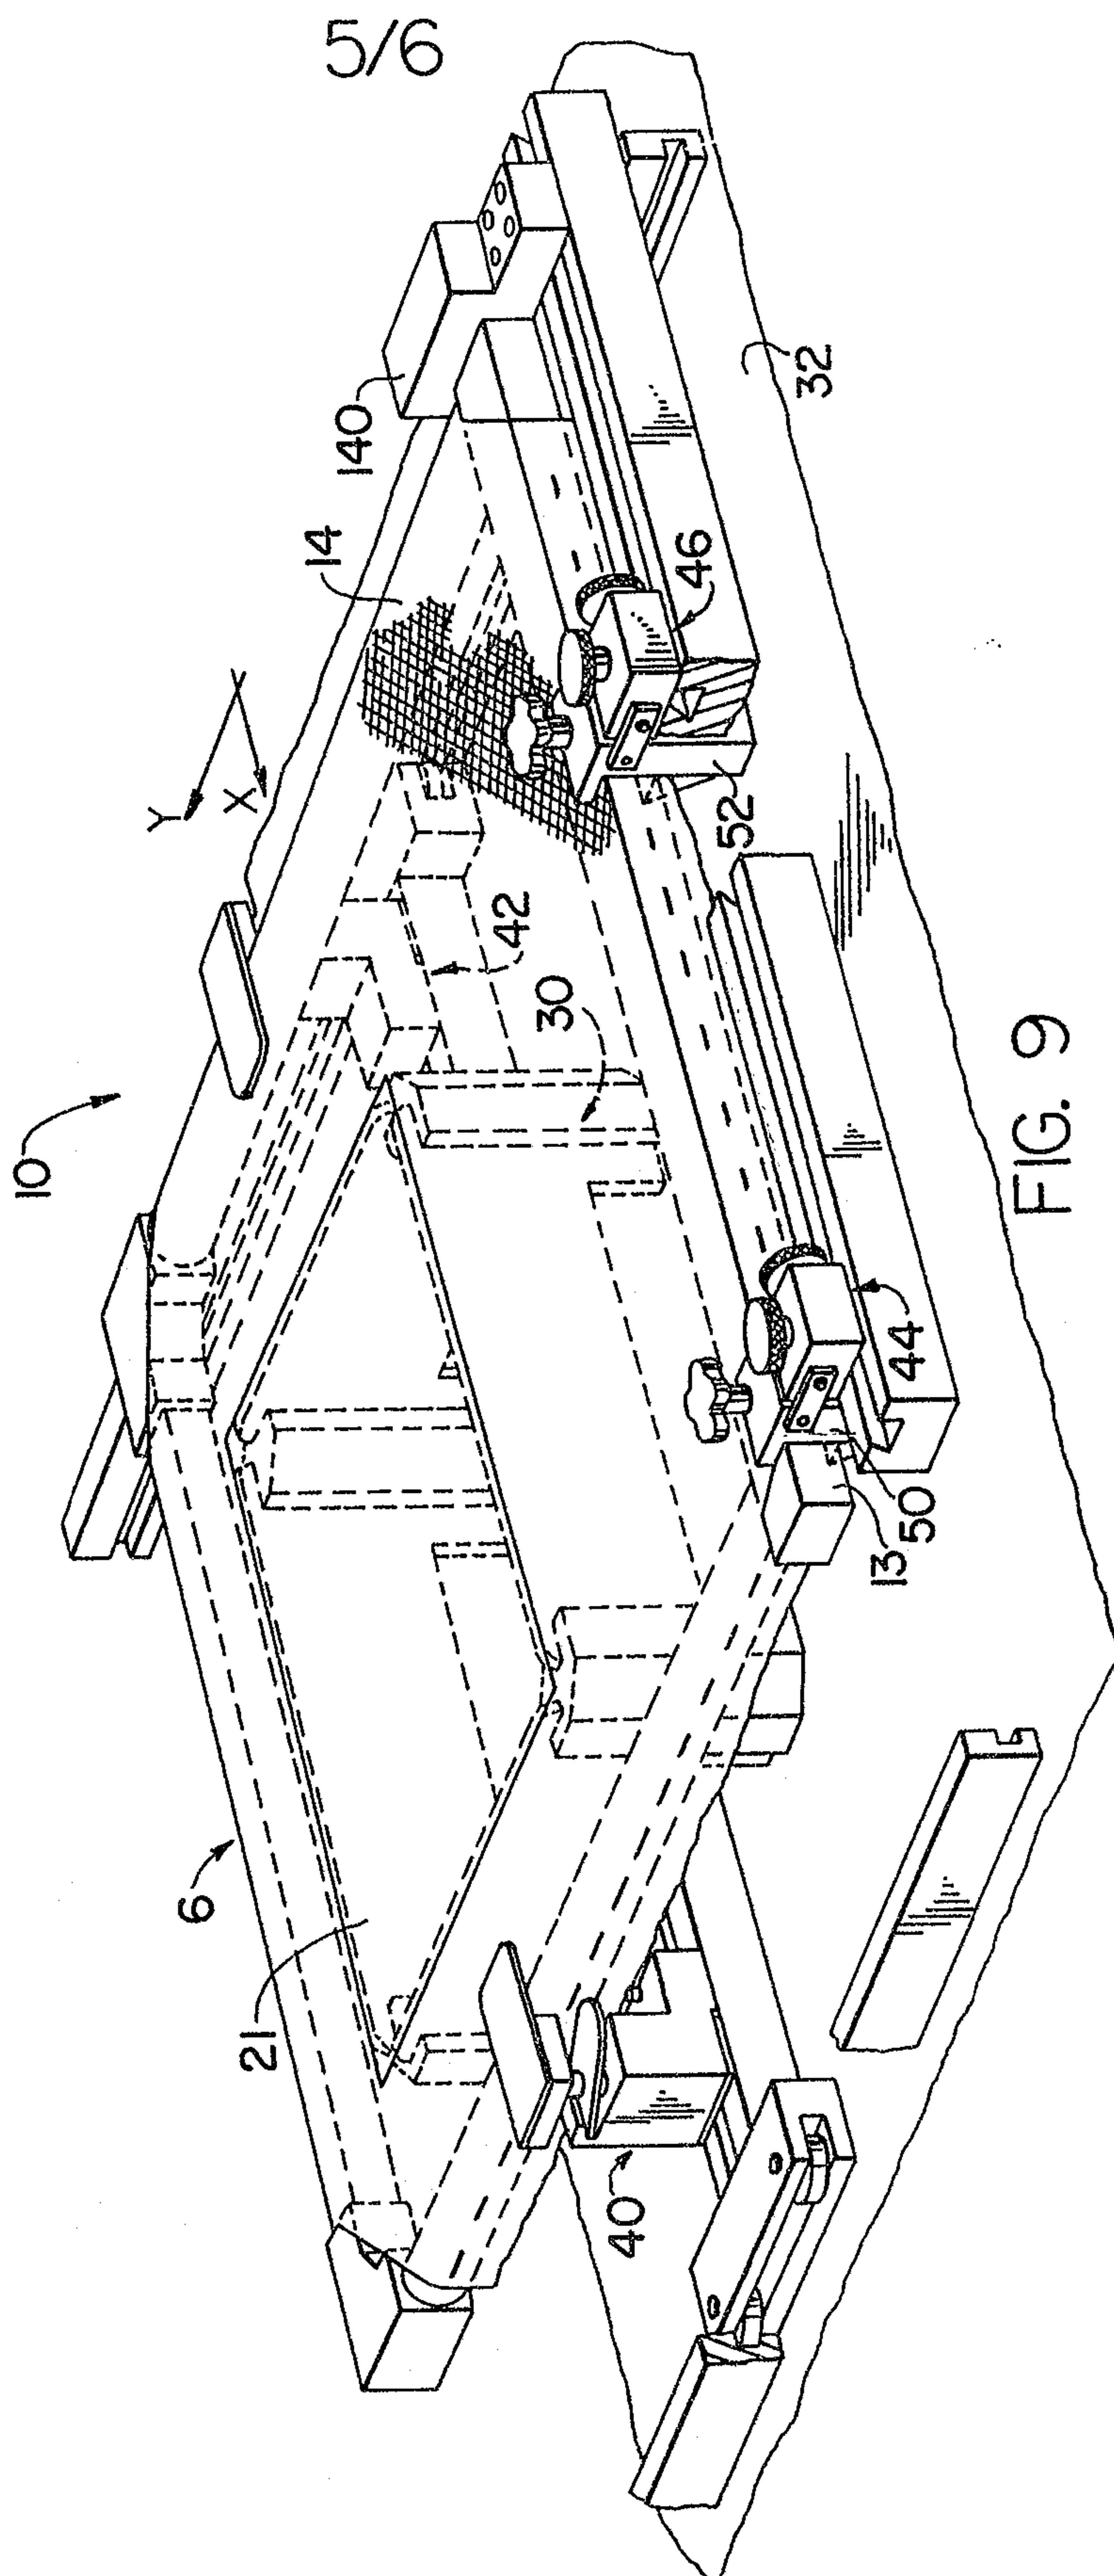


FIG. 9

Ogilvy Renault
Patent Agents

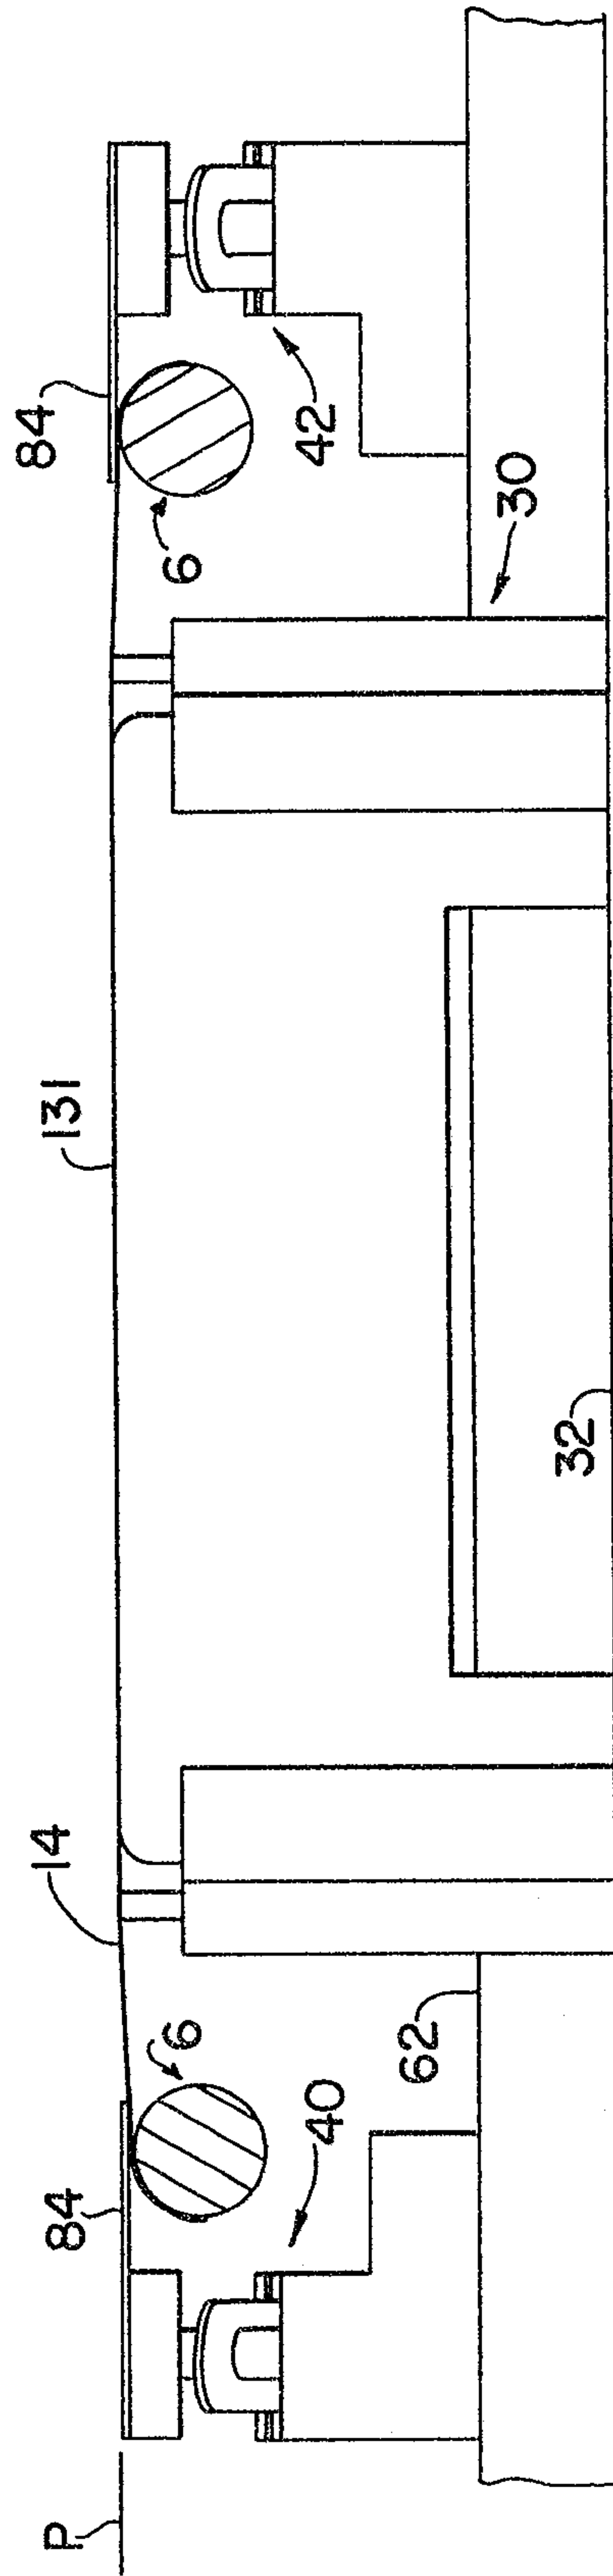


FIG. 10

*Cajiw Renault
Patent Agents*