



(22) Date de dépôt/Filing Date: 2018/04/05

(41) Mise à la disp. pub./Open to Public Insp.: 2018/10/11

(45) Date de délivrance/Issue Date: 2022/12/13

(30) Priorité/Priority: 2017/04/11 (US15/484288)

(51) Cl.Int./Int.Cl. *C22C 21/12*(2006.01),
C22C 1/02(2006.01), *C22C 21/00*(2006.01)

(72) Inventeurs/Inventors:

MANN, AUSTIN E., US;
BAKER, ANDREW H., US;
MISHRA, RAJIV, US;
PALANIVEL, SIVANESH, US

(73) Propriétaire/Owner:

THE BOEING COMPANY, US

(74) Agent: SMART & BIGGAR LP

(54) Titre : ALLIAGE D'ALUMINIUM AVEC AJOUTS DE CUIVRE, DE LITHIUM ET D'AU MOINS UN METAL ALCALIN OU DE TERRE RARE ET SON PROCEDE DE FABRICATION

(54) Title: ALUMINUM ALLOY WITH ADDITIONS OF COPPER, LITHIUM AND AT LEAST ONE ALKALI OR RARE EARTH METAL, AND METHOD OF MANUFACTURING THE SAME

(57) Abrégé/Abstract:

An aluminum alloy including aluminum, about 1.8 to about 5.6 percent by weight copper, about 0.6 to about 2.6 percent by weight lithium, and at least one of lanthanum up to about 1.5 percent by weight, strontium up to about 1.5 percent by weight, cerium up to about 1.5 percent by weight and praseodymium up to about 1.5 percent by weight.

ABSTRACT

An aluminum alloy including aluminum, about **1.8** to about **5.6** percent by weight copper, about **0.6** to about **2.6** percent by weight lithium, and at least one of lanthanum up to about **1.5** percent by weight, strontium up to about **1.5** percent by weight, cerium up to about **1.5** percent by weight and praseodymium up to about **1.5** percent by weight.

ALUMINUM ALLOY WITH ADDITIONS OF COPPER, LITHIUM AND AT LEAST
ONE ALKALI OR RARE EARTH METAL, AND METHOD OF MANUFACTURING
THE SAME

5

FIELD

The present application relates to aluminum alloys and, more particularly, to aluminum alloys with additions of copper, lithium and at least one alkali or rare earth metal.

10

BACKGROUND

Friction stir welding (FSW) is a solid-state joining process that uses a non-consumable tool to join two facing workpieces without melting the workpiece material. Friction stir welding, while categorically a solid state joining process, typically generates enough heat input to coarsen and even dissolve the main 15 strengthening phases in many aluminum alloys. The coarsening and dissolution of primary precipitates ultimately results in a measurable drop in strength across the weld, often epitomized by a classic W-shaped hardness profile.

Accordingly, those skilled in the art continue with research and development efforts in the field of aluminum alloys.

20

SUMMARY

In one embodiment, the disclosed aluminum alloy includes aluminum, about 1.8 to about 5.6 percent by weight copper, about 0.6 to about 2.6 percent by weight lithium, and at least one of lanthanum up to about 1.5 percent by weight, strontium

up to about **1.5** percent by weight, cerium up to about **1.5** percent by weight, and praseodymium up to about **1.5** percent by weight.

In another embodiment, the disclosed aluminum alloy includes aluminum, about **1.8** to about **5.6** percent by weight copper, about **0.6** to about **2.6** percent by weight lithium, at least one of lanthanum, strontium, cerium and praseodymium in a non-zero quantity up to about **1.5** percent by weight, each, magnesium in a non-zero quantity up to about **1.9** percent by weight, zirconium in a non-zero quantity up to about **0.16** percent by weight, and silver in a non-zero quantity up to about **0.7** percent by weight.

10 In yet another embodiment, the disclosed aluminum alloy includes aluminum, about **1.8** to about **5.6** percent by weight copper, about **0.6** to about **2.6** percent by weight lithium, at least one of lanthanum, strontium, cerium and praseodymium in a non-zero quantity up to about **1.5** percent by weight, each, magnesium in a non-zero quantity up to about **1.9** percent by weight, zirconium in a non-zero quantity up to about **0.16** percent by weight, silver in a non-zero quantity up to about **0.7** percent by weight, manganese in a non-zero quantity up to about **0.6** percent by weight, zinc in a non-zero quantity up to about **1.0** percent by weight, and titanium in a non-zero quantity up to about **0.15** percent by weight.

20 In one embodiment, the disclosed method for manufacturing an aluminum alloy includes the steps of: (1) weighing out starting materials to achieve a mass of material that includes aluminum, about **1.8** to about **5.6** percent by weight copper, about **0.6** to about **2.6** percent by weight lithium, and at least one of lanthanum up to about **1.5** percent by weight, strontium up to about **1.5** percent by weight, cerium up to about **1.5** percent by weight and praseodymium up to about **1.5** percent by weight; (2) loading the materials into a crucible; (3) inserting the crucible into a chamber; (4) evacuating the chamber to a predetermined vacuum level; (5) melting the materials to form a molten mass; and (6) casting the molten mass into a mold.

In one embodiment, there is provided an article including a friction stir welded joint, the friction stir welded joint including an aluminum alloy. The aluminum alloy includes: aluminum; about **1.8** to about **5.6** percent by weight copper; about **0.6** to about **2.6** percent by weight lithium; lanthanum in a non-zero quantity up to about **1.5** percent by weight; strontium in a non-zero quantity up to about **1.5** percent by weight; cerium in a non-zero quantity up to about **1.5** percent by weight; and praseodymium in a non-zero quantity up to about **1.5** percent by weight. The aluminum alloy is T1 phase precipitated during a friction stir welding of the friction stir welded joint.

In another embodiment, there is provided a method for making an aluminum alloy involving steps of: weighing out starting materials to achieve a mass of material having the composition described above; loading the starting materials into a crucible; inserting the crucible into a chamber; evacuating the chamber to a predetermined vacuum level; melting the starting materials to form a molten mass; and casting the molten mass into a mold.

In another embodiment, there is provided a method of joining. The method involves friction stir welding an aluminum alloy. The aluminum alloy includes: aluminum; about **1.8** to about **5.6** percent by weight copper; about **0.6** to about **2.6** percent by weight lithium; lanthanum present in a non-zero quantity up to about **1.5** percent by weight; strontium present in a non-zero quantity up to about **1.5** percent by weight; cerium present in a non-zero quantity up to about **1.5** percent by weight; and praseodymium present in a non-zero quantity up to about **1.5** percent by weight. The aluminum alloy T1 phase precipitates during the friction stir welding.

In another embodiment, there is provided a method for making an aluminum alloy which T1 phase precipitates during a solid-state joining process. The method comprises a step of weighing out starting materials to achieve a mass of material having a composition comprising: aluminum; about **1.8** to about **5.6** percent by weight copper; about **0.6** to about **2.6** percent by weight lithium; lanthanum in a non-zero quantity up to about **1.5** percent by weight; strontium in a non-zero quantity up to

about **1.5** percent by weight; cerium in a non-zero quantity up to about **1.5** percent by weight; and praseodymium in a non-zero quantity up to about **1.5** percent by weight. The method further comprises steps of: loading said starting materials into a crucible; inserting said crucible into a chamber; evacuating said chamber to a predetermined
5 vacuum level; melting said starting materials to form a molten mass; and casting said molten mass into a mold.

In another embodiment, there is provided a method for manufacturing an aluminum article. The method comprises a step of subjecting an aluminum alloy to a solid-state joining process. The aluminum alloy comprises: aluminum; about **1.8** to
10 about **5.6** percent by weight copper; about **0.6** to about **2.6** percent by weight lithium; lanthanum in a non-zero quantity up to about **1.5** percent by weight; strontium in a non-zero quantity up to about **1.5** percent by weight; cerium in a non-zero quantity up to about **1.5** percent by weight; and praseodymium in a non-zero quantity up to about
15 **1.5** percent by weight. The aluminum alloy T1 phase precipitates during the solid-state joining process.

Other embodiments of the disclosed aluminum alloy composition and method will become apparent from the following detailed description, accompanying drawings and the appended claims.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a flow diagram of an aircraft manufacturing and service methodology; and

Fig. 2 is a block diagram of an aircraft.

10

DETAILED DESCRIPTION

Disclosed are aluminum alloys that have been improved by the addition of lanthanum (La), cerium (Ce), strontium (Sr), praseodymium (Pr), other rare or alkali earth metals, other lanthanides, and rare earth metal in the form of mischmetal, along with various other elements traditionally used in aluminum alloys. For 15 example, aluminum alloys from the 2xxx series Al-Cu-Li alloys registered by the Aluminum Association have been improved by the addition La, Ce, Sr, Pr, other rare or alkali earth metals, and rare-earth ore in the form of mischmetal. The disclosed aluminum alloys are designed to generate a dynamic response of the material to the friction stir welding (FSW) process. Without being limited to any particular theory, it 20 is believed that the additional elements have three primary thermodynamic and physical criteria that improve the property of the disclosed aluminum alloy, set forth below.

The T1 phase (the primary strengthening phase in the Al-Cu-Li system) favors distorted lattice sites for nucleation. Thus, the high degree of strain misfit 25 generated by these additional elements will spur nucleation of the T1 phase. In

combination, the criteria described herein create an ideal scenario for nucleation and subsequent re-precipitation of the T1 phase during the FSW process. The resulting effect will be a marked improvement in strength and other inherent material properties in the weld zone. Finally, the additional elements would eliminate the 5 measurable drop in strength typically observed across weld zones. This would result in a new class of aluminum alloys that could be implemented in more critical design spaces, and more amenable to a desirable and efficient fabrication process (e.g., FSW).

One general example of the disclosed aluminum alloy has the composition 10 shown in Table 1.

TABLE 1

Element	Quantity (wt.%)
Copper	1.8 – 5.6
Lithium	0.6 – 2.6
At least one of La, Sr, Ce and Pr	Non-zero – 1.5 each
Other elements	Zero to 6.0
Aluminum	Balance

Thus, the aluminum alloy of Table 1 comprises about **1.8** to about **5.6** percent by weight copper, about **0.6** to about **2.6** percent by weight lithium, at least one of lanthanum, strontium, cerium, and praseodymium in a non-zero quantity up 15 to about **1.5** percent by weight, wherein each of the at least one of the lanthanum, strontium, cerium, and praseodymium can be present at the non-zero quantity up to about **1.5** percent by weight, and the balance is substantially aluminum. The at least one of La, Sr, Ce, and Pr could be sourced from mischmetal. Mischmetal is a rare-earth metal ore mixture, typically predominately Ce and La with smaller 20 amounts of Pr, Sr, and neodymium (Nd), but potentially containing other

lanthanides. Accordingly, low levels of other lanthanides may also be present in the disclosed aluminum alloy.

The aluminum alloy of the first embodiment may further include silicon in a non-zero quantity up to about **0.20** percent by weight or about **0.05** to about **0.20** percent by weight. The aluminum alloy of the first embodiment may further include iron in a non-zero quantity up to about **0.30** percent by weight or from about **0.07** to about **0.30** percent by weight. The aluminum alloy of the first embodiment may further include manganese in a non-zero quantity up to about **0.6** percent by weight or about **0.03** to about **0.6** percent by weight. The aluminum alloy of the first embodiment may further include magnesium in a non-zero quantity up to about **1.9** percent by weight or about **0.05** to about **1.9** percent by weight. The aluminum alloy of the first embodiment may further include chromium in a non-zero quantity up to about **0.10** percent by weight. The aluminum alloy of the first embodiment may further include zinc in a non-zero quantity up to about **1.0** percent by weight or about **0.03** to about **1.0** percent by weight. The aluminum alloy of the first embodiment may further include titanium in a non-zero quantity up to about **0.15** percent by weight or about **0.07** to about **0.15** percent by weight. The aluminum alloy of the first embodiment may further include silver in a non-zero quantity up to about **0.7** percent by weight or about **0.05** to about **0.7** percent by weight. The aluminum alloy of the first embodiment may further include zirconium in a non-zero quantity up to about **0.16** percent by weight or about **0.04** to about **0.16** percent by weight. The aluminum alloy of the first embodiment may further include at least one of nickel, gallium, and vanadium in a non-zero quantity up to about **0.05** percent by weight each.

Those skilled in the art will appreciate that various impurities, which do not substantially affect the physical properties of the aluminum alloy of the first embodiment, may also be present, and the presence of such impurities will not result in a departure from the scope of the present disclosure.

Another general example of the disclosed aluminum alloy has the composition shown in Table 2.

TABLE 2

Element	Quantity (wt.%)
Si	0.05 - 0.20
Cu	1.8 - 5.6
Fe	0.07 - 0.30
Mn	0.03 - 0.6
Mg	0.05 - 1.9
Cr	0 - 0.10
Ni	0 - 0.05
Zn	0 - 1.0
Ti	0 - 0.15
Ag	0 - 0.7
Li	0.6 - 2.6
Zr	0 - 0.16
La	0 - 1.5
Sr	0 - 1.5
Ce	0 - 1.5
Pr	0 - 1.5
Al	Substantially balance

The aluminum alloy of Table 2 includes the elements listed and the balance
5 is either aluminum or substantially aluminum along with various impurities. In the
general example of Table 2, at least one of La, Sr, Ce, and Pr must be present in a
non-zero quantity.

One specific, non-limiting example of the disclosed aluminum alloy has the
composition shown in Table 3.

TABLE 3

Element	Target (wt.%)
Copper	4.0
Lithium	1.0
Magnesium	0.4
Zirconium	0.13
Silver	0.35
Strontium	0.5
Aluminum	93.62

Another specific, non-limiting example of the disclosed aluminum alloy has the composition shown in Table 4.

TABLE 4

Element	Target (wt.%)
Cu	4.07
Fe	0.07
Mn	0.04
Mg	0.37
Zn	0.04
Ti	0.08
Zr	0.13
Ag	0.24
Li	0.94
Sr	0.30
La	<0.01
Al	Balance

Yet another specific, non-limiting example of the disclosed aluminum alloy has the composition shown in Table 5.

TABLE 5

Element	Target (wt.%)
Cu	4.0
Fe	0.07
Mn	0.04
Mg	0.36
Zn	0.04
Ti	0.08
Zr	0.13
Ag	0.23
Li	0.93
La	0.13
Sr	<0.01
Al	Balance

The disclosed aluminum alloy can be made by a variety of techniques. One
5 method for manufacturing the disclosed aluminum alloy includes the steps of: (1) weighing out starting materials to achieve a mass of material within the composition of an aluminum alloy comprising about **1.8** to about **5.6** percent by weight copper, about **0.6** to about **2.6** percent by weight lithium, at least one of lanthanum, strontium, cerium, and praseodymium in a non-zero quantity up to about **1.5** percent
10 by weight, each, and aluminum; (2) loading the materials into a crucible; (3) inserting the crucible into a chamber; (4) evacuating the chamber to a predetermined vacuum level wherein said chamber is optionally backfilled with an inert gas; (5) melting the materials to form a molten mass; and (6) casting the molten mass into a mold. Once the molten mass is cast into a mold, the molten

mass is cooled to form a solid mass, the solid mass is homogenized and water quenched to yield an ingot, the ingot is scalped and hot rolled, and the ingot is solution treated and water quenched, cold-rolled or stretched, and artificially or otherwise naturally aged to yield the aluminum alloy.

5 The weighing out of starting materials step may include the use of mischmetal as the source of at least one of lanthanum, strontium, cerium, and praseodymium in a non-zero quantity up to about **1.5** percent by weight, each. Mischmetal is a rare-earth metal ore mixture, typically predominately Ce and La with smaller amounts of Pr, Sr, and Nd, but potentially containing other lanthanides.

10 Mischmetals are cost-effective rare-earth elements one could use in the embodiments described herein to decrease the cost. The rare-earth elements are relatively expensive because a larger contributor to the cost of the rare-earth elements is the step of isolating rare earth elements. By utilizing mischmetals, the isolation step is avoided, thus the final product will be less expensive yet similarly effective.

15

In one specific, non-limiting example of the disclosed method, charge materials are weighed out and loaded in a graphite crucible. The chamber is then evacuated to a vacuum level below about **0.05** Torr and backfilled with an inert gas (e.g., argon) to a partial pressure of about **760** Torr. The charge is melted and cast into a graphite mold and allowed to air cool. The as-cast ingot can then be homogenized at about **840** °F for about **24** hours and water quenched. The ingot can then be scalped and hot rolled at about **900** °F to thickness. It will then be solution treated at **950** °F for about **1** hour and water quenched. Finally, it will be cold-rolled with about a **5%** reduction and artificially aged. It can be artificially aged at about **310** °F for about **32** hour, yielding an aluminum alloy of the type described herein.

Examples of the disclosure may be described in the context of an aircraft manufacturing and service method **100**, as shown in Fig. 1, and an aircraft **102**, as

shown in Fig. 2. During pre-production, the aircraft manufacturing and service method 100 includes, for example, specification and design 104 of the aircraft 102 and material procurement 106. During production, component/subassembly manufacturing 108 and system integration 110 of the aircraft 102 takes place.

- 5 Thereafter, the aircraft 102 may go through certification and delivery 112 in order to be placed in service 114. While in service by a customer, the aircraft 102 is scheduled for routine maintenance and service 116, which may also include modification, reconfiguration, refurbishment and the like.

Each of the processes of method 100 may be performed or carried out by a system integrator, a third party, and/or an operator (e.g., a customer). For the purposes of this description, a system integrator includes, without limitation, any number of aircraft manufacturers and major-system subcontractors; a third party includes, without limitation, any number of vendors, subcontractors, and suppliers; and an operator may be an airline, leasing company, military entity, service organization, and so on.

As shown in Fig. 2, the aircraft 102 produced by example method 100 includes, for example, an airframe 118 with a plurality of systems 120 and an interior 122. Examples of the plurality of systems 120 include one or more of a propulsion system 124, an electrical system 126, a hydraulic system 128, and an environmental system 130. Any number of other systems may be included.

The disclosed aluminum alloy composition and article formed therefrom may be employed during any one or more of the stages of the aircraft manufacturing and service method 100. As one example, components or subassemblies corresponding to component/subassembly manufacturing 108, system integration 110, and/or maintenance and service 116 may be fabricated or manufactured using the disclosed aluminum alloy composition. As another example, the airframe 118 may be constructed using the disclosed aluminum alloy composition. Also, one or more apparatus examples, method examples, or a combination thereof may be

utilized during component/subassembly manufacturing **108** and/or system integration **110**, for example, by substantially expediting assembly of or reducing the cost of an aircraft **102**, such as the airframe **118** and/or the interior **122**. Similarly, one or more of system examples, method examples, or a combination thereof may 5 be utilized while the aircraft **102** is in service, for example and without limitation, to maintenance and service **116**.

The disclosed aluminum alloy composition and article formed therefrom is described in the context of an aircraft; however, one of ordinary skill in the art will readily recognize that the disclosed aluminum alloy composition and article formed 10 therefrom may be utilized for a variety of applications. For example, the disclosed aluminum alloy composition and article formed therefrom may be implemented in various types of vehicles including, for example, helicopters, passenger ships, automobiles, marine products (boat, motors, etc.) and the like.

Although various embodiments of the disclosed aluminum alloy composition 15 and article formed therefrom have been shown and described, modifications may occur to those skilled in the art upon reading the specification. The present application includes such modifications and is limited only by the scope of the claims.

**EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS
CLAIMED ARE DEFINED AS FOLLOWS:**

1. An article comprising:

5 a friction stir welded joint, the friction stir welded joint comprising an aluminum alloy, the aluminum alloy comprising:

aluminum;

about **1.8** to about **5.6** percent by weight copper;

about **0.6** to about **2.6** percent by weight lithium;

10 lanthanum in a non-zero quantity up to about **1.5** percent by weight;

strontium in a non-zero quantity up to about **1.5** percent by weight;

cerium in a non-zero quantity up to about **1.5** percent by weight; and

15 praseodymium in a non-zero quantity up to about **1.5** percent by weight, and

wherein the aluminum alloy is **T1** phase precipitated during a friction stir welding of the friction stir welded joint.

2. The article of claim 1, the aluminum alloy further comprising silicon in a non-20 zero quantity up to about **0.20** percent by weight.

3. The article of claim 2, wherein the aluminum alloy comprises the silicon in a quantity of about **0.05** to about **0.20** percent by weight.

4. The article of any one of claims 1 to 3, the aluminum alloy further comprising iron in a non-zero quantity up to about **0.30** percent by weight.
5. The article of claim 4, wherein the aluminum alloy comprises the iron in a quantity up of about **0.07** to about **0.30** percent by weight.
- 5 6. The article of any one of claims 1 to 5, the aluminum alloy further comprising manganese in a non-zero quantity up to about **0.6** percent by weight.
7. The article of claim 6, wherein the aluminum alloy comprises the manganese in a quantity of about **0.03** to about **0.6** percent by weight.
8. The article of any one of claims 1 to 7, the aluminum alloy further comprising 10 magnesium in a non-zero quantity up to about **1.9** percent by weight.
9. The article of claim 8, wherein the aluminum alloy comprises the magnesium in a quantity of about **0.05** to about **1.9** percent by weight.
10. The article of any one of claims 1 to 9, the aluminum alloy further comprising chromium in a quantity up to about **0.10** percent by weight.
- 15 11. The article of claim 10, wherein the aluminum alloy comprises the chromium in a non-zero quantity.
12. The article of any one of claims 1 to 11, the aluminum alloy further comprising zinc in a non-zero quantity up to about **1.0** percent by weight.
13. The article of claim 12, wherein the aluminum alloy comprises the zinc in a 20 quantity up of about **0.03** about **1.0** percent by weight.
14. The article of any one of claims 1 to 13, the aluminum alloy further comprising titanium in a non-zero quantity up to about **0.15** percent by weight.

the silver in a quantity of about **0.05** to about **0.7** percent by weight.

23. The article of claim **1**, the aluminum alloy further comprising:

magnesium in a non-zero quantity up to about **1.9** percent by weight;

zirconium in a non-zero quantity up to about **0.16** percent by weight;

5 silver in a non-zero quantity up to about **0.7** percent by weight;

manganese in a non-zero quantity up to about **0.6** percent by weight;

zinc in a non-zero quantity up to about **1.0** percent by weight; and

titanium in a non-zero quantity up to about **0.15** percent by weight.

24. The article of claim **23**, wherein the aluminum alloy comprises:

10 the magnesium in a quantity of about **0.05** to about **1.9** percent by weight;

the zirconium in a quantity of about **0.04** to about **0.16** percent by weight;

the silver in a quantity of about **0.05** to about **0.7** percent by weight;

15 the manganese in a quantity of about **0.03** to about **0.6** percent by weight;

the zinc in a quantity up of about **0.03** about **1.0** percent by weight; and

the titanium in a quantity of about **0.07** to about **0.15** percent by weight.

25. The article of any one of claims **1** to **24**, the aluminum alloy further comprising one or more other lanthanides.

26. The article of any one of claims 1 to 25, the aluminum alloy further comprising balance aluminum.

27. The article of any one of claims 1 to 26, wherein the elements other than the aluminum, the copper, the lithium, the lanthanum, the strontium, the cerium and the praseodymium are present at a total amount up to 6.0 percent by weight.

28. A method for making an aluminum alloy, the method comprising steps of:

weighing out starting materials to achieve a mass of material having the composition of claim 1;

10 loading said starting materials into a crucible;

inserting said crucible into a chamber;

evacuating said chamber to a predetermined vacuum level;

melting said starting materials to form a molten mass; and

casting said molten mass into a mold.

15 29. The method of claim 28, wherein said predetermined vacuum level is at most 0.05 Torr, and wherein said chamber is backfilled with an inert gas.

30. The method of claim 28 or 29 further comprising:

after casting said molten mass into the mold, cooling said molten mass to form a solid mass;

20 homogenizing and water quenching said solid mass to yield an ingot;

scalping and hot rolling said ingot;

at least one of solution treating, cold-rolling and stretching said ingot;
and

aging said ingot.

31. The method of claim 30, wherein aging said ingot comprising artificially aging
5 said ingot at about 300°F to about 320°F for about 29 hours to about 35 hours.

32. The method of any one of claims 28 to 31, wherein weighing out said starting
material comprises weighing a mischmetal as a source of said at least one of
said lanthanum, said strontium, said cerium and said praseodymium.

33. A method of joining comprising:

10 friction stir welding an aluminum alloy, the aluminum alloy comprising:

aluminum;

about 1.8 to about 5.6 percent by weight copper;

about 0.6 to about 2.6 percent by weight lithium;

lanthanum present in a non-zero quantity up to about 1.5 percent
15 by weight;

strontium present in a non-zero quantity up to about 1.5 percent
by weight;

cerium present in a non-zero quantity up to about 1.5 percent by
weight; and

20 praseodymium present in a non-zero quantity up to about 1.5
percent by weight, and

wherein the aluminum alloy T1 phase precipitates during the friction stir welding.

34. The method of claim 33, the aluminum alloy further comprising silicon in a non-zero quantity up to about **0.20** percent by weight.
- 5 35. The method of claim 33 or 34, the aluminum alloy further comprising iron in a non-zero quantity up to about **0.30** percent by weight.
36. The method of any one of claims 33 to 35, the aluminum alloy further comprising manganese in a non-zero quantity up to about **0.6** percent by weight.
- 10 37. The method of any one of claims 33 to 36, the aluminum alloy further comprising magnesium in a non-zero quantity up to about **1.9** percent by weight.
38. The method of any one of claims 33 to 37, the aluminum alloy further comprising chromium in a non-zero quantity up to about **0.10** percent by weight.
- 15 39. The method of any one of claims 33 to 38, the aluminum alloy further comprising zinc in a non-zero quantity up to about **1.0** percent by weight.
40. The method of any one of claims 33 to 39, the aluminum alloy further comprising titanium in a non-zero quantity up to about **0.15** percent by weight.
- 20 41. The method of any one of claims 33 to 40, the aluminum alloy further comprising silver in a non-zero quantity up to about **0.7** percent by weight.
42. The method of any one of claims 33 to 41, the aluminum alloy further comprising nickel in a non-zero quantity up to about **0.05** percent by weight.

43. The method of any one of claims 33 to 42, the aluminum alloy further comprising gallium in a non-zero quantity up to about **0.05** percent by weight.

44. The method of any one of claims 33 to 43, the aluminum alloy further comprising vanadium in a non-zero quantity up to about **0.05** percent by weight.

5 45. A method for making an aluminum alloy which T1 phase precipitates during a solid-state joining process, the method comprising steps of:

weighing out starting materials to achieve a mass of material having a composition comprising:

10 aluminum;

about **1.8** to about **5.6** percent by weight copper;

about **0.6** to about **2.6** percent by weight lithium;

lanthanum in a non-zero quantity up to about **1.5** percent by weight;

15 strontium in a non-zero quantity up to about **1.5** percent by weight;

cerium in a non-zero quantity up to about **1.5** percent by weight;
and

20 praseodymium in a non-zero quantity up to about **1.5** percent by weight;

loading said starting materials into a crucible;

inserting said crucible into a chamber;

evacuating said chamber to a predetermined vacuum level;

melting said starting materials to form a molten mass; and

casting said molten mass into a mold.

46. The method of claim **45**, wherein said predetermined vacuum level is at most
5 **0.05** Torr, and wherein said chamber is backfilled with an inert gas.

47. The method of claim **45** or **46** further comprising:

cooling said molten mass is cooled to form a solid mass;

homogenizing and water quenching said solid mass to yield an ingot;

scalping and hot rolling said ingot;

10 at least one of solution treating, cold-rolling and stretching said ingot;
and

aging said ingot.

48. The method of claim **47**, wherein aging said ingot comprises artificially aging
said ingot at about **300** F to about **320**°F for about **29** hours to about **35** hours.

15 49. The method of any one of claims **45** to **48**, wherein weighing out said starting
materials comprises weighing a mischmetal as a source of said at least one of
said lanthanum, said strontium, said cerium and said praseodymium.

50. The method of any one of claims **45** to **49** further comprising subjecting the
aluminum alloy to the solid-state joining process, wherein the aluminum alloy
20 T1 phase precipitates during the solid-state joining process.

51. A method for manufacturing an aluminum article comprising steps of:
subjecting an aluminum alloy to a solid-state joining process, wherein
the aluminum alloy comprises:
aluminum;
about 1.8 to about 5.6 percent by weight copper;
about 0.6 to about 2.6 percent by weight lithium; and
lanthanum in a non-zero quantity up to about 1.5 percent by
weight;
strontium in a non-zero quantity up to about 1.5 percent by weight;
cerium in a non-zero quantity up to about 1.5 percent by weight;
and
praseodymium in a non-zero quantity up to about 1.5 percent by
weight, and
wherein the aluminum alloy T1 phase precipitates during the solid-state
joining process.

52. The method of claim 51 further comprising aging the aluminum alloy before the
subjecting the aluminum alloy to the solid-state joining process.

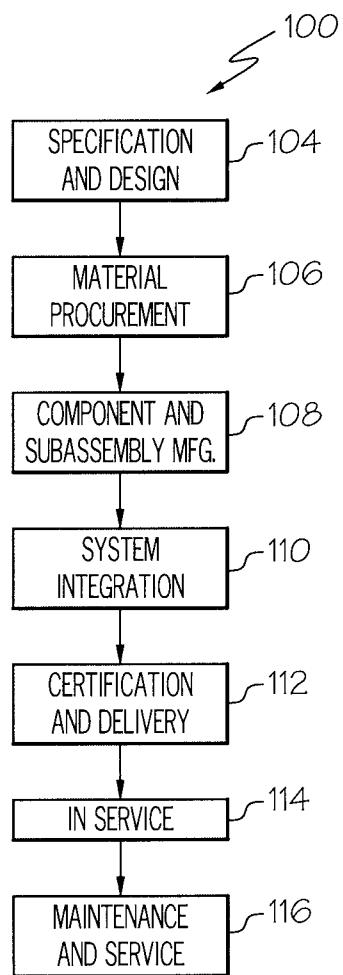


Fig. 1

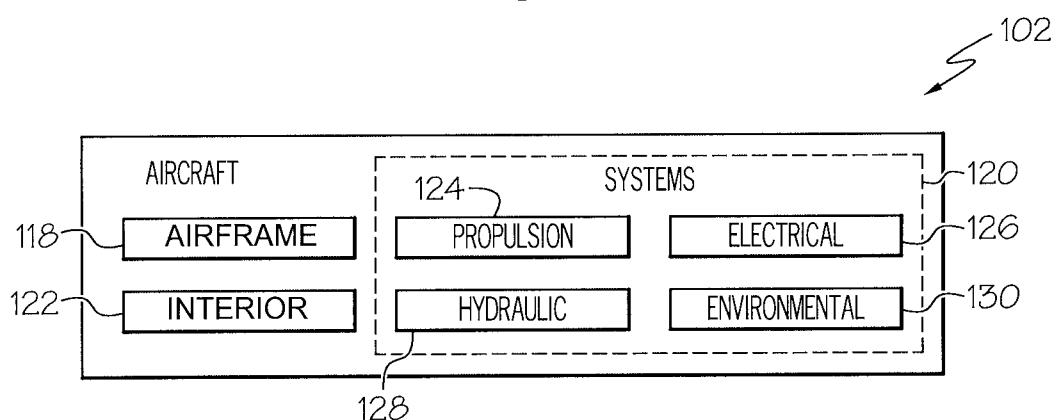


Fig. 2