

ORGANISATION AFRICAINE DE LA PROPRIETE INTELLECTUELLE  
(O.A.P.I.)



11 N° 010461

51 Inter. Cl.<sup>6</sup>

B65B 15/04

12 BREVET D'INVENTION

21 Numéro de dépôt: 60875

22 Date de dépôt: 09.08.1996

30 Priorité(s): U.S.A.  
10.02.1994 N° 08/194.354

24 Délivré le: 19.05.1998

45 Publié le: 3 AVR 2002

73 Titulaire(s):  
RECOT, INC.  
7701 Legacy Drive  
Plano,  
Texas 75024-5099  
(U.S.A.)


72 Inventeur(s):  
1) ALI GUR  
Gelincik Sok.  
5/5 Yenikoy  
Istanbul (Turkey)  
2) Thomas E. BROWN (U.S.A.)

74 Mandataire: CABINET MPONDO SARL  
B.P. 129  
YAOUNDE - Cameroun

54 Titre: Automated method and apparatus for detachably securing flexible packages to a display strip.

57 Abrégé:

A method and apparatus for removably securing flexible packages (70) to a display carrier strip (18) so that the packages can be removed therefrom without damaging the sealed condition of the packages. The apparatus includes sealing jaws (52, 53) which form transverse seals on a package preform that is separated into two packages. The sealing jaws have attached to the underside thereof sealing blocks which carry sealing elements that heat-seal the display carrier strip to the top of each filled sealed package simultaneously with the forming of the transverse seals by the sealing jaws. The attachment of the packages to the carrier strip is greatly simplified compared with prior art attachment systems.

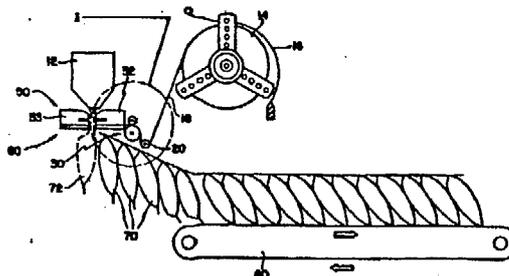

AUTOMATED METHOD AND APPARATUS FOR DETACHABLY SECURING  
FLEXIBLE PACKAGES TO A DISPLAY STRIP

BACKGROUND OF THE INVENTION

Field of the Invention

5           The present invention relates generally to systems  
for affixing packages to a carrier strip and, more  
particularly, to a method and apparatus for detachably  
securing flexible packages to a display carrier strip  
and simultaneously forming a sealed end of each  
10           package.

Description of Background Art

          It is known in the art to form flexible packages  
of various products, e.g., snack food products, and  
affix the packages to a carrier strip which may be  
15           displayed in a grocery store or the like. The customer  
can remove a package from the carrier without damaging  
the package, i.e., without adversely affecting the  
sealed condition of the package. One of the primary  
attributes of such display strip systems is their  
20           suitability for use in a retail establishment with  
limited space. The display strips are considerably  
smaller than conventional product display racks, which  
racks may not fit in particular establishments due to  
space limitations or may not be justified in view of  
25           limited sales volume. The display strip and attached  
packages require little space and may be positioned on  
a counter or other suitable support.

U.S. Patent No. 4,422,552 to Palmer et al. and  
U.S. patent No. 4,476,619 to Palmer disclose methods  
and apparatus for folding the end seal or flange of a  
bag into the slot of a display card. The steps of  
5 folding and tucking the end seals of numerous packages  
into a slotted display card are often performed  
manually and consume considerable time and expense.  
The prior art, however, includes alternative methods of  
attaching flexible packages to a display card.

10 For example, U.S. Patent No. 2,272,623 to Runner  
discloses a display card with packages removably  
attached thereto by adhesive. In U.S. Patent No.  
4,003,782 to Farrelly, manufactured bags are applied to  
two lines of pressure sensitive adhesive and then  
15 stored in a carton or the like. It is also known to  
attach empty packages to a display or mounting support  
base and then fill and seal the packages. See U.S.  
Patent No. 3,331,182 to Hannon. Several problems arise  
with the aforementioned methods of securing packages to  
20 a display strip. One problem that often occurs when  
the packages are adhesively attached to the display  
strip is that the packages cannot easily be removed  
from the strip without damaging the sealed condition of  
the packages. Additional problems arose in attempts to  
25 automate the attachment of the carrier strip to the  
flexible packages due to the limited space available  
below the sealing jaws of a conventional bagmaking  
apparatus. In other words, there was little or no room  
below the seal jaws to accommodate automatic attachment  
30 equipment.

It is apparent that there is a need in the art for  
a method and apparatus for removably securing flexible  
packages to a display strip which are free of the  
problems present in prior art systems.

## SUMMARY OF THE INVENTION

The present invention provides a method and apparatus for detachably securing flexible packages to a display carrier strip while simultaneously sealing an end of each package. In its preferred form, the present invention includes a novel sealing jaw assembly which permits the display carrier strip to be fed therethrough into close proximity with the package preform. The sealing jaws place a transverse seal in the package preform which forms the top seal of a filled package extending below the jaws, and the bottom seal of an empty package extending above the jaws. The top seal of the filled package is detachably secured to the carrier display strip simultaneously with the forming of the transverse seal. The continuous display strip and attached packages then may be transported by a suitable conveyor device to a packaging area or the like and prepared for shipment.

## BRIEF DESCRIPTION OF THE DRAWINGS

Additional features and advantages of the present invention will become apparent from the following detailed description taken in conjunction with the accompanying drawings wherein:

FIG. 1 is a somewhat schematic view of an automated assembly apparatus for detachably securing flexible packages to a display strip;

FIG. 2A is a perspective view of a sealing jaw according to the present invention;

FIG. 2B is an end elevation view of the sealing jaw shown in FIG. 2A looking in the direction of arrows b-b in FIG. 2A;

FIG. 2C is a sectional view of the sealing jaw shown in FIG. 2A looking in the direction of arrows c-c in FIG. 2A;

5 FIG. 3A is an enlarged view of the encircled portion in FIG. 1;

FIG. 3B is a front elevational view of the portion shown in FIG. 3 looking in the direction of arrows a in FIG. 3;

10 FIG. 4A is a front elevational view of the finished display strip and attached packages;

FIG. 4B is a side elevational view of the display strip and attached packages shown in FIG. 3A; and

15 FIG. 4C is a front elevational view of the display strip and attached packages shown in FIG. 3A with some of the packages removed.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 1, an automated apparatus for detachably securing flexible packages to a display strip is indicated generally by the reference numeral 10. A bagmaking apparatus, e.g., a vertical form, fill, and seal apparatus (VFFS), is shown schematically at 12. Bagmaking apparatus such as VFFS machines are known in the art and will not be described in detail in the present application.

25 Bagmaking apparatus 12 forms packaging material into package preforms which are advanced in consecutive fashion through the apparatus 12. In particular, a preform is transversely sealed by sealing jaws at a sealing station disposed below the filling tube of the bagmaking apparatus. The seal constitutes the top edge of a filled package extending below the sealing station and the bottom edge of a yet to be filled package extending above the sealing station. A knife mechanism

30

cuts the preform at the transverse seal to separate  
same into two separate packages; the lower package  
being filled and sealed at both ends and the upper  
package being empty and sealed at its lower end. After  
5 separating the packages by cutting the transverse seal  
on the preform, the empty package is advanced and  
filled to bring its top edge to the sealing station  
where it is sealed and separated from the next package,  
i.e., the package now extending above the sealing  
10 station.

The sealing station is indicated generally at 50  
in FIG. 1 and includes sealing jaws 52, 53 for forming  
the aforementioned transverse seals. A lower sealing  
assembly for removably attaching the packages to the  
15 display strip is indicated generally at 60 in FIG. 1  
and includes lower sealing blocks or bars 62, 63. As  
best seen in FIGS. 2A-2C, lower sealing blocks or bars  
62, 63 preferably are respectively secured to sealing  
jaws 52, 53. Sealing jaw 52 has a cut-out portion 66  
20 which defines a slot 68 extending through the jaw for  
reasons that will be described below.

With attention directed to FIG. 1, a supply reel  
14 of display carrier strip material has a strip web 18  
extending therefrom toward bagmaking apparatus 12. A  
25 reel friction brake 16 controls the speed of rotating  
supply reel 14. The display carrier strip is  
preferably manufactured from a material that is  
flexible but yet stiff enough to support a plurality of  
packages as seen in FIG. 4A which shows the final  
30 product. The display strip material is selected so  
that it does not melt and/or deform before the  
attachment of the packages to the strip, i.e., as the  
strip is fed through the sealing jaw which typically  
reaches 375°F during operation. For example, the

display carrier strip may be manufactured from suitable plastic materials, such as paper laminated to coextruded metallized polyethylene to 40 micron polypropylene.

5           The carrier strip web 18 passes from supply reel 14 to a strip drive mechanism indicated generally at reference numeral 30 and enclosed in circle I in FIG. 1. The strip drive mechanism 30 advances carrier web 18 in a controlled manner relative advancement of the package preforms. The strip drive mechanism 30 can be  
10 any device which suitably advances the carrier strip web 18 through the sealing station 50, 60.

          The circled portion I of FIG. 1 is enlarged in FIGS. 4A and 4B and shows a preferred embodiment of a  
15 strip drive mechanism 30 that includes a stepper motor 32 having a shaft 34 which drives a stepper wheel 36. The stepper wheel 36 rotates to advance strip web 18 into an elongated slot formed in sealing jaw 52 as described in detail below. A back-up roller 38 is  
20 disposed next to stepper wheel 36 and the strip web 18 passes between the back-up roller 38 and the stepper wheel 36. The back-up roller 38 may be rotatably mounted on a bracket 40 as shown in FIG. 3B. The  
25 stepper motor can be precisely controlled to permit the carrier strip web to be properly positioned relative the package preforms advanced by the bagmaking apparatus. In addition, the strip drive mechanism 30 can be programmed such that the stepper motor 32 will be automatically controlled, e.g., by a microprocessor.  
30 The stepper wheel preferably includes a rubber wheel having, e.g., a 2 inch diameter and a 3 inch width. The rubber wheel frictionally engages the strip material web 18 and cooperates with back-up roller 38 to advance the web.

Those skilled in the art will recognize, of course, that means for advancing the carrier strip web other than the above-described stepper motor may be used. For example, an air cylinder device which advances the strip web with air powered mechanical movements may be used in lieu of the stepper motor mechanism.

With attention directed to FIGS. 2A-2C, sealing jaw 52 of sealing station 50 and sealing block 62 of lower sealing assembly 60 are shown therein in detail. Sealing jaw 52 includes an upper sealing portion 54 and a lower sealing portion 56 separated by a groove 58. The groove 58 extends a limited distance from adjacent the outer surface of sealing portions 54, 56 into the interior of sealing jaw 52. See FIG. 2C. Groove 58 preferably contains a knife mechanism (not shown) which severs the package preform into a lower filled package and an upper empty package as described above. Specifically, upper sealing portion 54 forms the lower transverse seal of the upper package and lower sealing portion 56 forms the upper transverse seal of the filled lower package. After the knife mechanism separates the packages, the upper package, the bottom edge of which now has been sealed, may be filled and advanced downward, wherein further actuation of the sealing jaws 52, 53 seals the top of the same package.

The present invention attaches the filled sealed packages to the display strip 18 simultaneously with the forming of transverse seals as described above. Attached to the sealing jaws 52, 53 by any suitable means are, respectively, sealing blocks 62, 63 of lower sealing assembly 60. As seen in FIGS. 1 and 2C, display carrier web 18 passes from take-up spool 20, past strip drive mechanism 30, through sealing jaw 52,

and into engagement with the package. For this purpose, sealing jaw 52 is provided with an elongated slot 68 extending therethrough. A cut-out portion 66 of sealing jaw 52 cooperates with sealing block 62 to define slot 68. In particular, sealing block 62 preferably is secured to sealing jaw 52 so as to cover cut-out portion 66. See FIG. 2B. Sealing block 62 also preferably has a width that is slightly greater than the width of cut-out portion 66 but less than the overall width of sealing jaw 52.

Lower sealing blocks 62, 63 have mating seal elements 64 disposed thereon as best seen in FIGS. 2A and 2B. The sealing elements 64 of each block 62, 63 are aligned so as to engage each other when the sealing jaws 52, 53 are brought together. The display carrier strip web 18 passes into slot 68 of sealing jaw 52 and then downward from the slot over the sealing elements 64 of sealing block 62. See FIGS. 1, 2A and 2C. This positions the display carrier strip 18 in close proximity with the unsealed top edge of a filled package 72, shown in phantom in FIG. 1. In addition to sealing the top edge of the filled package 72 (and the bottom edge of an overlying empty package), actuation of the sealing jaws 52, 53 detachably secures the top edge of filled package 72 to the display carrier strip 18.

Lower sealing blocks 62, 63 preferably have a plurality of sealing elements 64 disposed thereon which secure the filled package to the display carrier strip 18 at locations corresponding to the position and number of sealing elements 64. In a preferred embodiment, three sealing elements 64 are included on each sealing block 62, 63. However, those skilled in the art will recognize that different numbers and

configurations of sealing elements may be used without departing from the present invention.

5 Sealing blocks 62, 63 heat-seal the top edge of the filled package to the display carrier strip 18 upon actuation of the sealing jaws 52, 53. The sealing elements 64 securely affix the package to the strip 18 such that the package may be easily removed from the carrier strip without damaging the sealed condition of the filled, sealed package. The material from which display carrier strip 18 is formed adheres to the packaging material by point heat and pressure applied by sealing blocks 62, 63. Thus, the actuating motion of sealing jaws 52, 53 seals the top edge of the filled package and seals the package to the display carrier strip. This arrangement greatly simplifies the overall procedure and is a significant improvement over prior art systems.

10 The carrier strip 18, with the filled, sealed packages 70 attached thereto, is carried by a conveyor mechanism 80 to a location where the strip and packages are prepared for distribution. The flexibility of the display carrier strip permits the same to be case packed with the packages attached thereto for easy storage and/or transportation.

15 FIGS. 4A-4C show a display strip produced according to the present invention and having a plurality of packages secured thereto in removable fashion. The display carrier strip 100 includes an adhesive hanger member 110 which serves to secure the entire assembly to a suitable support surface. Of course, any other support or hanger means may be used. The strip 100 has packages 120 removably attached thereto by heat seal connections 130 formed by the strip seal bars or blocks 62, 63 as described above.

20

25

30

FIGS. 4A and 4B show a display carrier strip 100 fully covered with packages 120. FIG. 4C shows the product display strip of FIGS. 4A and 4B with several packages removed. The releasable heat seal connections 130, which permit removal of the packages 120 without damaging their sealed condition, are visible on the portion of the display carrier strip 100 from which packages have been removed.

It is apparent that the method and apparatus of the present invention permit the removable attachment of filled, sealed flexible packages to a display carrier strip without the problems present in prior art systems. The attachment of the packages to the display carrier strip is carried out using the existing motion of the sealing jaws which form the top and bottom edge seals of each package. A precisely controlled strip drive mechanism cooperates with the sealing jaws to eliminate prior art problems in package control and positioning. Moreover, the attachment mechanism for securing the packages to the carrier strip is greatly simplified over prior art systems. Consequently, the present invention significantly reduces manufacturing cost compared with conventional package attachment systems.

Other features and advantages of the present invention will readily occur to those skilled in the art, as will many modifications and alterations in the preferred embodiments of the invention described herein, all of which may be achieved without departing from the spirit and the scope of the invention as defined by the appended claims.

CLAIMS

What is claimed is:

1. An apparatus for manufacturing a plurality of sealed packages which are detachably secured to a display carrier strip, the apparatus comprising:

5 a bagmaking device for forming a package preform, the preform configured to receive product;

10 a sealing station disposed adjacent said bagmaking device, the sealing station including sealing jaws for forming a transverse seal across the preform to form a top seal of a filled package extending below the sealing station and a bottom seal of a package to be filled extending above the sealing station;

15 a strip drive device for feeding a continuous carrier display strip to a location adjacent the sealing station; and

at least one strip seal bar for detachably securing an end of each package to the carrier display strip simultaneously with the sealing of an end of the package by the sealing jaws;

20 whereby filled sealed packages are secured to the carrier display strip and can be removed therefrom without damaging the sealed condition of the packages.

25 2. An apparatus according to claim 1, wherein said sealing station includes a pair of sealing jaws for forming the top and bottom seals of adjacent packages and a pair of strip seal bars for detachably  
5 securing the packages to the carrier strip.

30 3. An apparatus according to claim 2, wherein one of the two sealing jaws includes a slot extending therethrough and the carrier strip passes through the

slot in the one sealing jaw to a location adjacent an end of a package.

4. An apparatus according to claim 3, wherein a  
5 first strip seal bar is secured to a first sealing jaw  
and a second strip seal bar is secured to a second  
sealing jaw, and wherein activation of the sealing jaws  
to form the transverse package seal activates the seal  
bars to removably secure a package to the display  
10 carrier strip.

5. An apparatus according to claim 1, wherein  
the strip drive device includes a stepper motor and a  
stepper wheel, and the stepper motor rotates the  
15 stepper wheel to controllably advance the display  
carrier strip web toward the sealing station.

6. An apparatus for manufacturing a plurality of  
sealed packages which are detachably secured to a  
20 display carrier strip, the apparatus comprising:

means for forming a package preform configured to  
receive product;

a sealing station disposed below said means for  
forming the package preform, the sealing station  
25 including means for forming a transverse seal across  
the preform to form a top seal of a filled package  
extending below the sealing station and a bottom seal  
of a package to be filled extending above the sealing  
station;

30 means for feeding a continuous carrier display  
strip to a location adjacent said seal-forming means;

means for detachably securing an end of each  
package to the carrier display strip simultaneously  
with the sealing of an end of the package; and

means for separating adjacent preforms along the transverse seal to form the bottom and top seals of packages extending, respectively, above and below the sealing station;

5 whereby the packages are secured to the carrier strip so as to be selectively removable therefrom without damaging the sealed condition of the packages.

10 7. An apparatus according to claim 6, wherein said seal-forming means includes a pair of sealing jaws for forming the top and bottom seals of adjacent packages.

15 8. An apparatus according to claim 7, wherein one of the sealing jaws of said seal-forming means includes a slot extending therethrough for feeding the carrier strip therethrough and against a package.

20 9. An apparatus according to claim 8, wherein the sealing jaws of said seal-forming means each include a strip seal bar for detachably securing the carrier strip to the package preform, and wherein activation of the sealing jaws to form a transverse package seal activates the seal bars to removably  
25 secure a package to the display carrier strip.

30 10. An apparatus according to claim 6, wherein the strip drive device includes a stepper motor which rotates a stepper wheel for frictionally engaging and advancing the display carrier strip web toward the sealing station.

35 11. A method of manufacturing a filled, sealed package which is removably secured to a continuous display strip, the method comprising steps of:

forming a package preform configured to receive product from a product supply source;

forming a transverse seal across the preform to form a top seal of a filled package extending below the sealing station and a bottom seal of a package to be filled extending above the sealing station; and

5 detachably securing the filled package to a display carrier strip by affixing the top seal of the filled package to the carrier strip simultaneously with forming said top seal of the filled package.

10 12 . . A method according to claim 11, wherein the sealing of the preforms at the sealing station is performed by sealing jaws which simultaneously detachably secure an end of the filled package to the carrier strip.

15 13 . . A method according to claim 12, wherein one sealing jaw includes an opening through which the carrier strip may be passed into close proximity with the package preform and detachably secured thereto by the sealing jaws.

20 14 . . A method according to claim 13, wherein the strip drive device includes a stepper motor and a stepper wheel, and the stepper motor rotates the stepper wheel to advance the display carrier strip web through the opening in the one sealing jaw and toward the sealing station.

FIG. 1

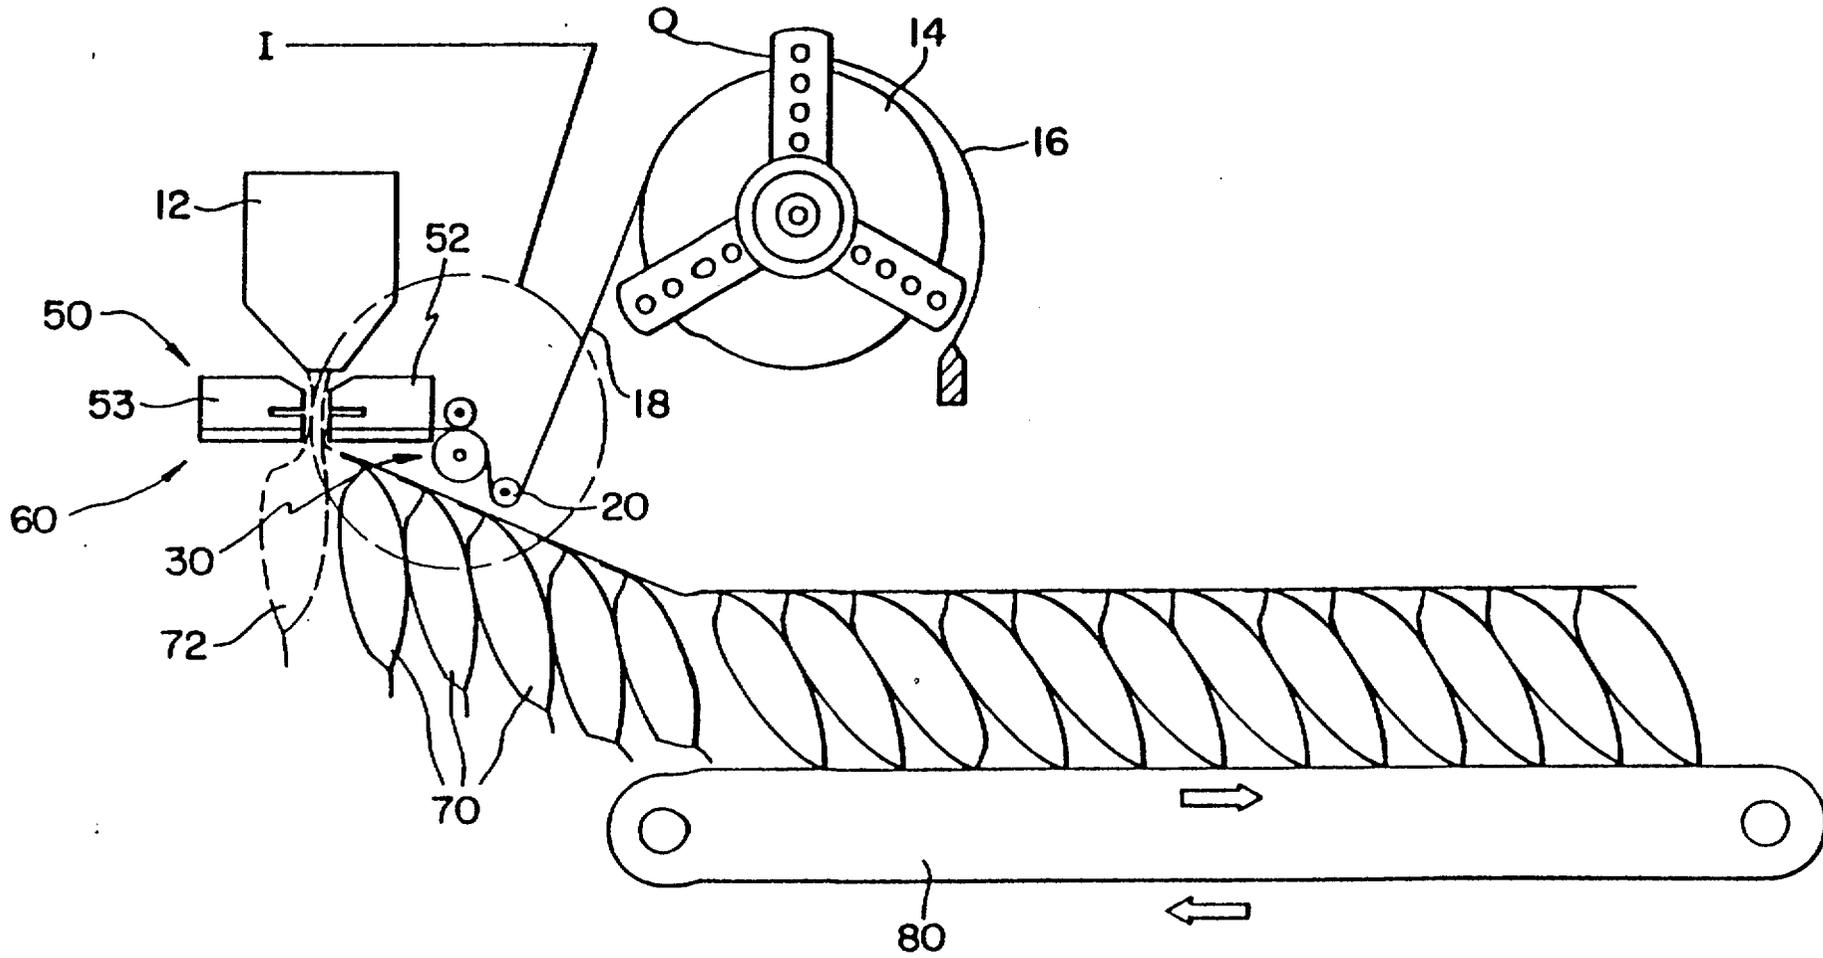


FIG. 1

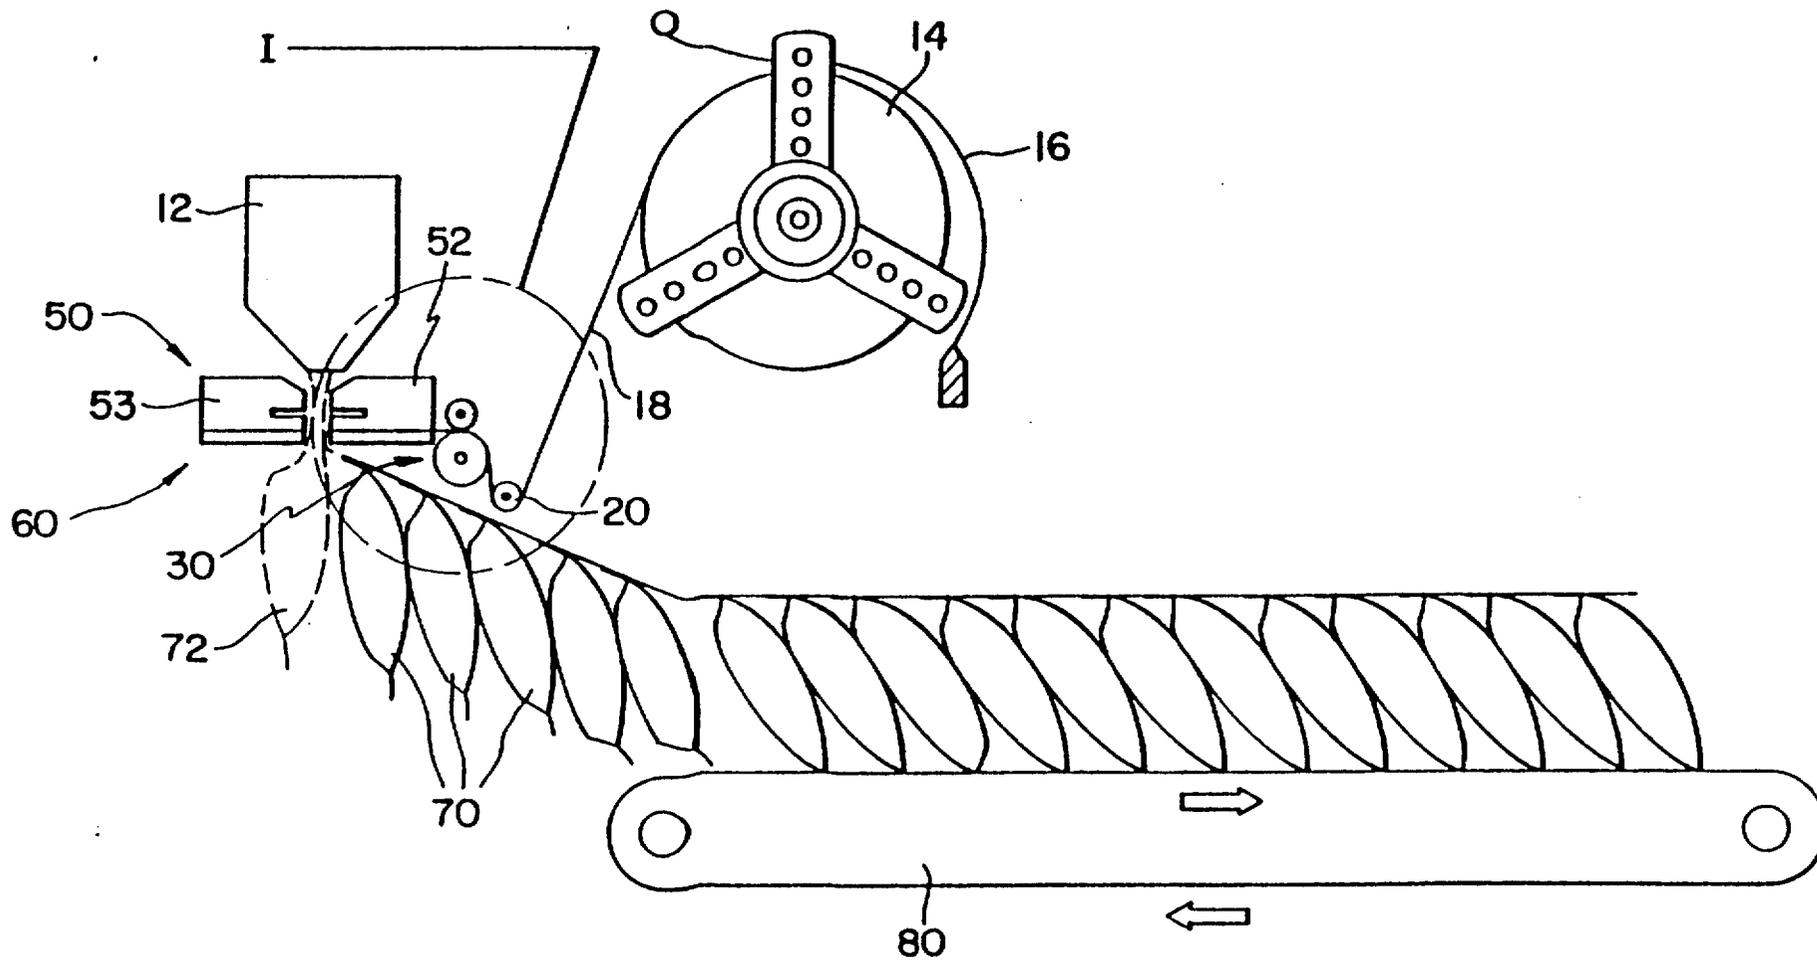


FIG. 3A

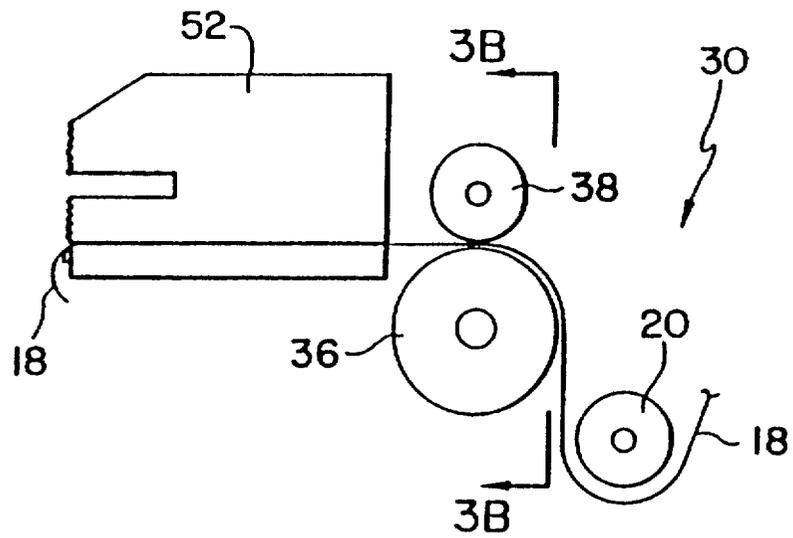


FIG. 3B

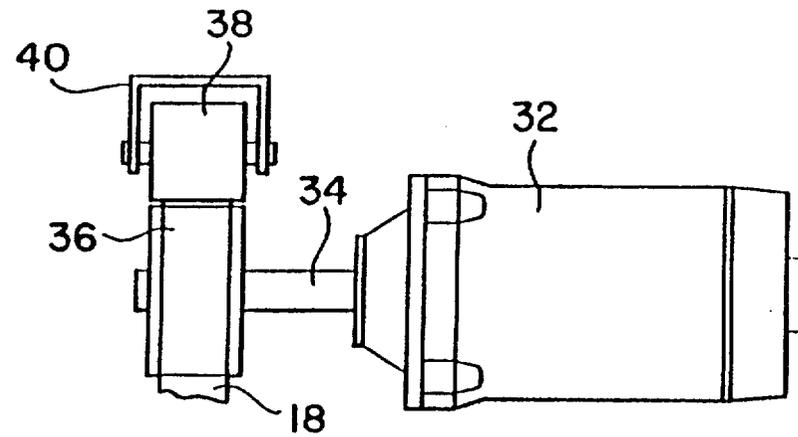


FIG. 4A

FIG. 4B

FIG. 4C

