



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2286634 C 2005/06/28

(11)(21) **2 286 634**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 1998/04/17
(87) Date publication PCT/PCT Publication Date: 1998/10/22
(45) Date de délivrance/Issue Date: 2005/06/28
(85) Entrée phase nationale/National Entry: 1999/10/15
(86) N° demande PCT/PCT Application No.: US 1998/007680
(87) N° publication PCT/PCT Publication No.: 1998/047311
(30) Priorité/Priority: 1997/04/17 (08/837,440) US

(51) Cl.Int.⁶/Int.Cl.⁶ H04R 1/10


(72) Inventeurs/Inventors:
HALL, RONALD W., US;
TAYLOR, HARRY B., US

(73) Propriétaire/Owner:
MINNESOTA MINING AND MANUFACTURING
COMPANY, US

(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : ENSEMBLE CASQUE D'ECOUTE

(54) Title: HEADSET ASSEMBLY

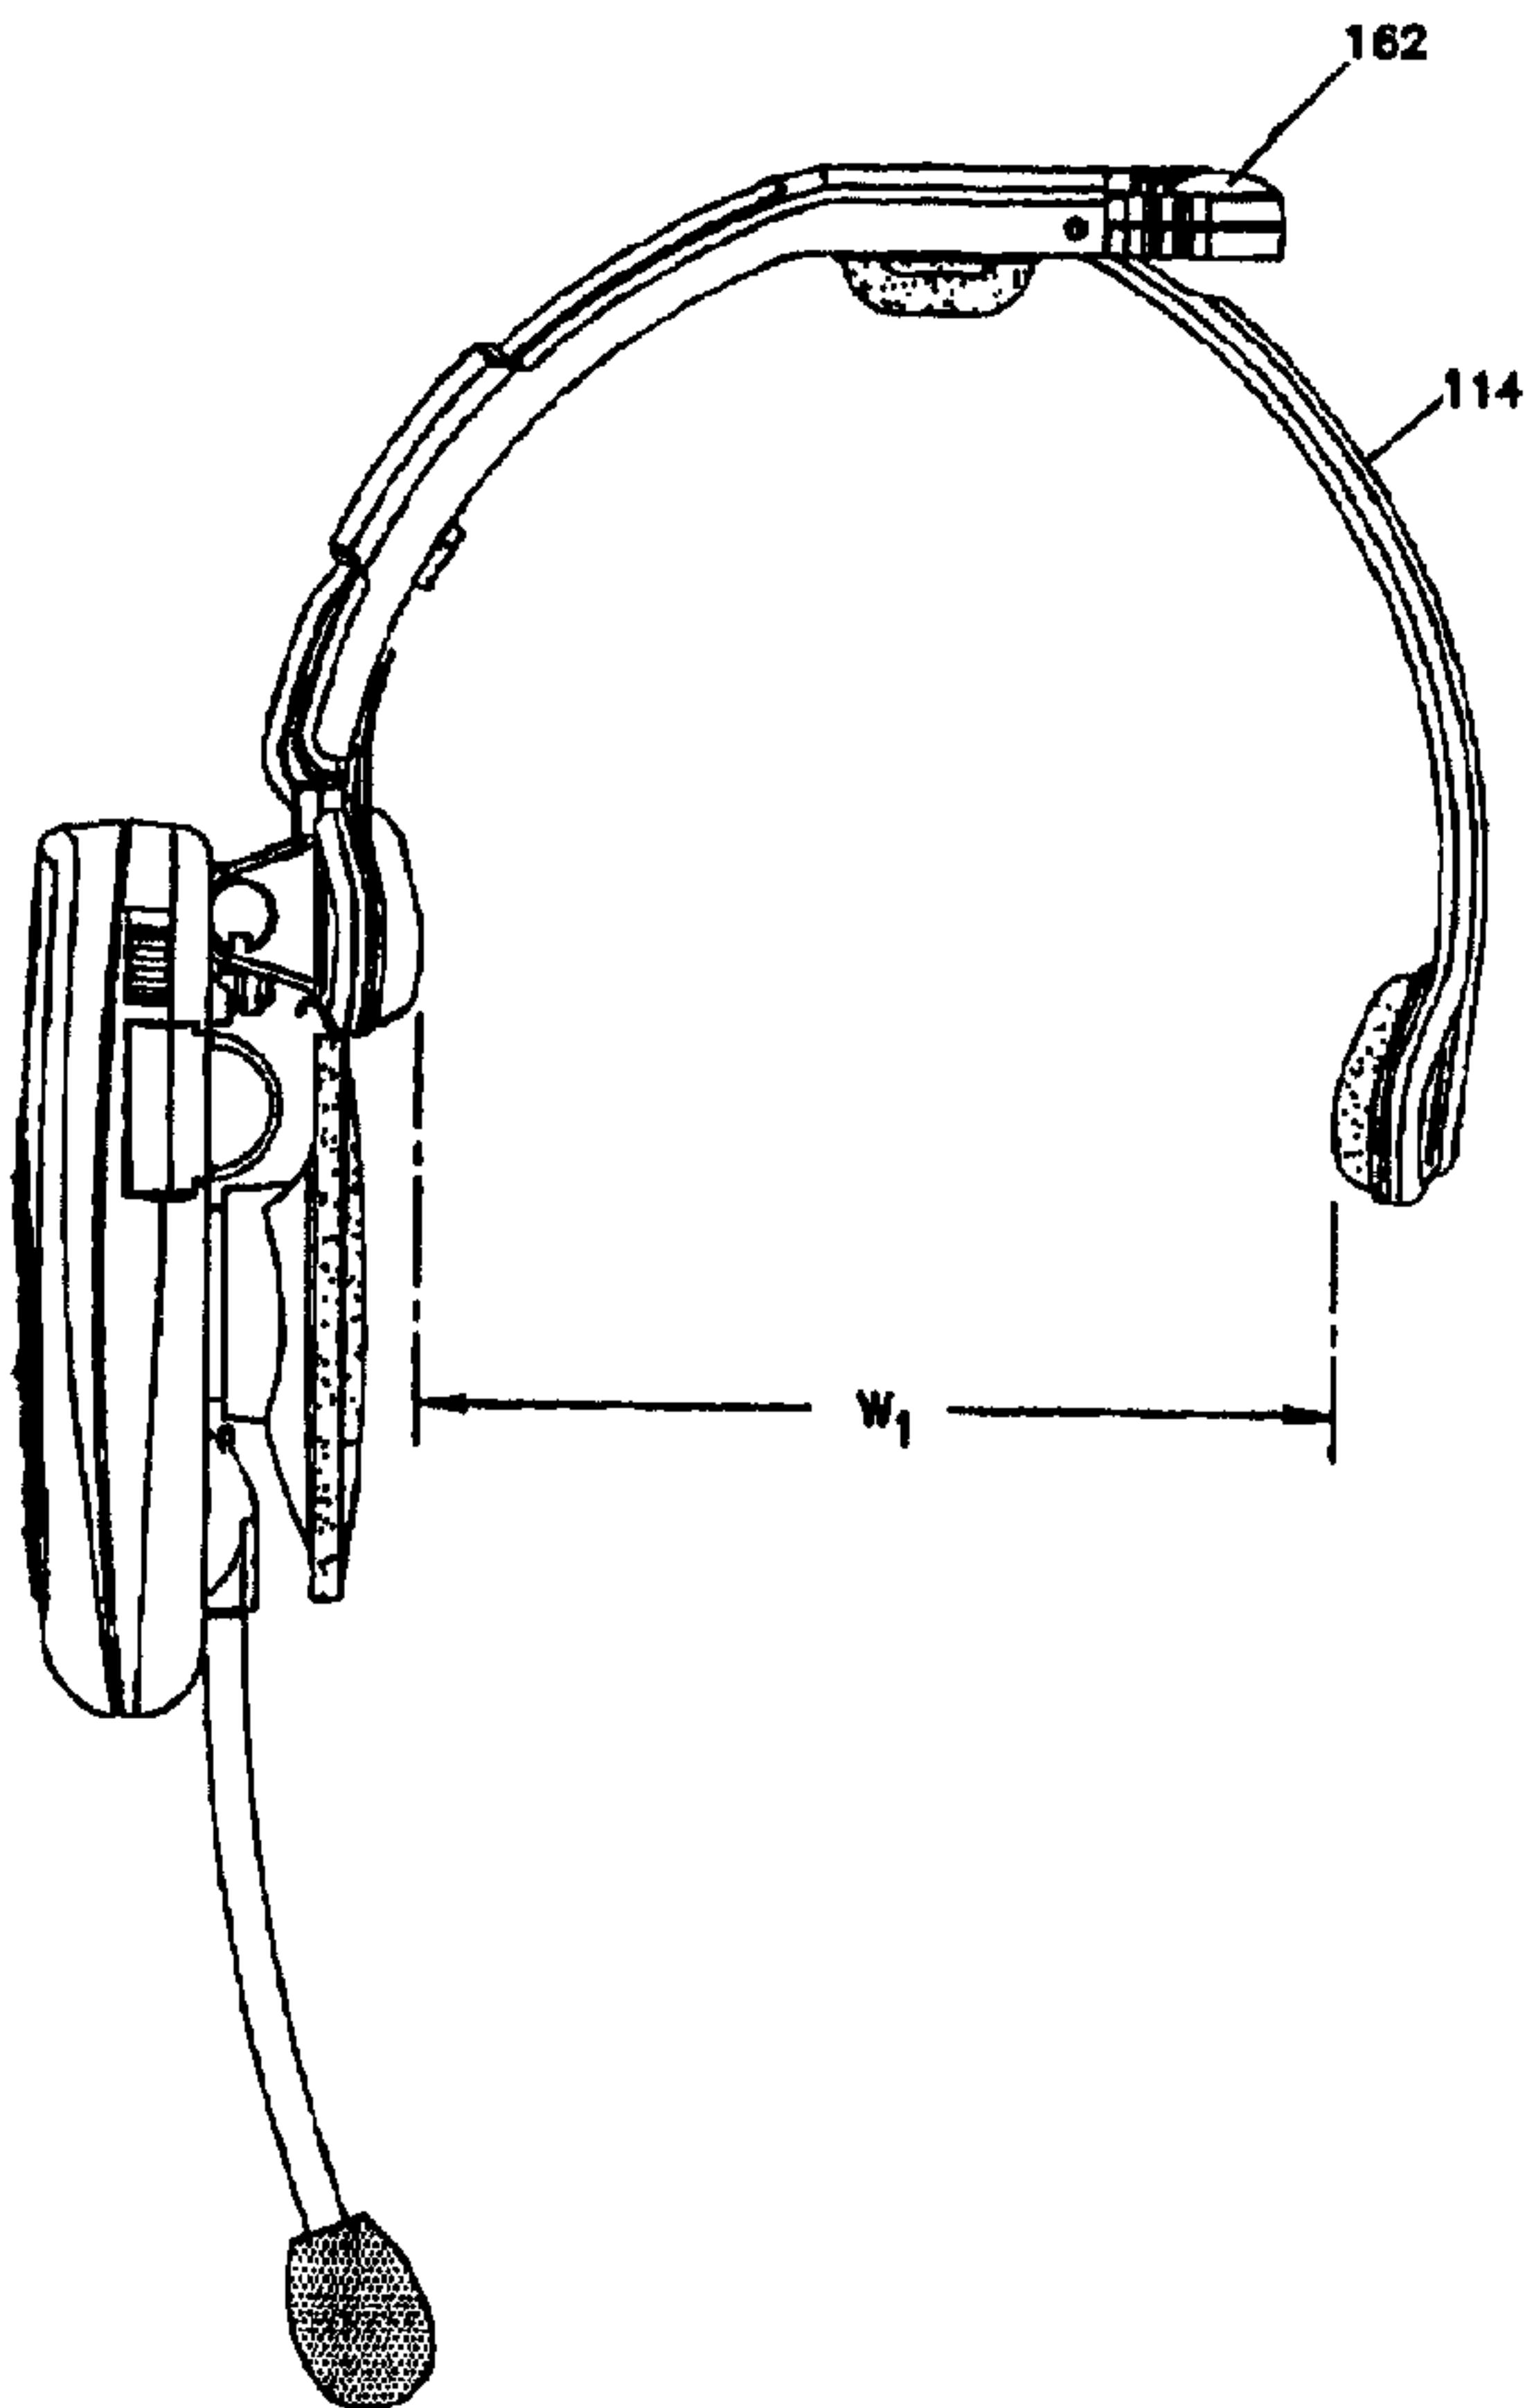

(57) Abrégé/Abstract:

An ergonomic headset assembly having increased comfort and convenience of use is provided. In accordance with one embodiment of the invention, a headset assembly is provided which includes a first headpiece pivotally coupled to a second flexible headpiece. The headset assembly further includes means for limiting the pivotal movement of the flexible headpiece with respect to

(57) Abrégé(suite)/Abstract(continued):

the first headpiece. This allows the tension of the headset assembly to be suitably adjusted to the head size of the wearer. In accordance with another embodiment of the invention, a headset assembly which includes a headband and an electronics housing pivotally coupled to the headpiece is provided. The pivotal coupling of the electronics housing with respect to the headband allows the electronics housing to be swung away from a user's ear and provides additional comfort to the user. In accordance with yet another embodiment of the invention, a headset assembly having an electronics housing coupled to a clip member is provided. The clip member allows the electronics housing to be removably coupled between a headband and a hat of a user.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04R 1/10		A1	(11) International Publication Number: WO 98/47311
			(13) International Publication Date: 22 October 1998 (22.10.98)
(21) International Application Number: PCT/US98/07680	(22) International Filing Date: 17 April 1998 (17.04.98)	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(30) Priority Data: 08/837,440 17 April 1997 (17.04.97) US			
(71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			
(72) Inventors: HALL, Ronald, W.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). TAYLOR, Harry, B.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			
(74) Agents: BUCKINGHAM, Stephen, W. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			

(54) Title: HEADSET ASSEMBLY

(57) Abstract

An ergonomic headset assembly having increased comfort and convenience of use is provided. In accordance with one embodiment of the invention, a headset assembly is provided which includes a first headpiece pivotally coupled to a second flexible headpiece. The headset assembly further includes means for limiting the pivotal movement of the flexible headpiece with respect to the first headpiece. This allows the tension of the headset assembly to be suitably adjusted to the head size of the wearer. In accordance with another embodiment of the invention, a headset assembly which includes a headband and an electronics housing pivotally coupled to the headpiece is provided. The pivotal coupling of the electronics housing with respect to the headband allows the electronics housing to be swung away from a user's ear and provides additional comfort to the user. In accordance with yet another embodiment of the invention, a headset assembly having an electronics housing coupled to a clip member is provided. The clip member allows the electronics housing to be removably coupled between a headband and a hat of a user.

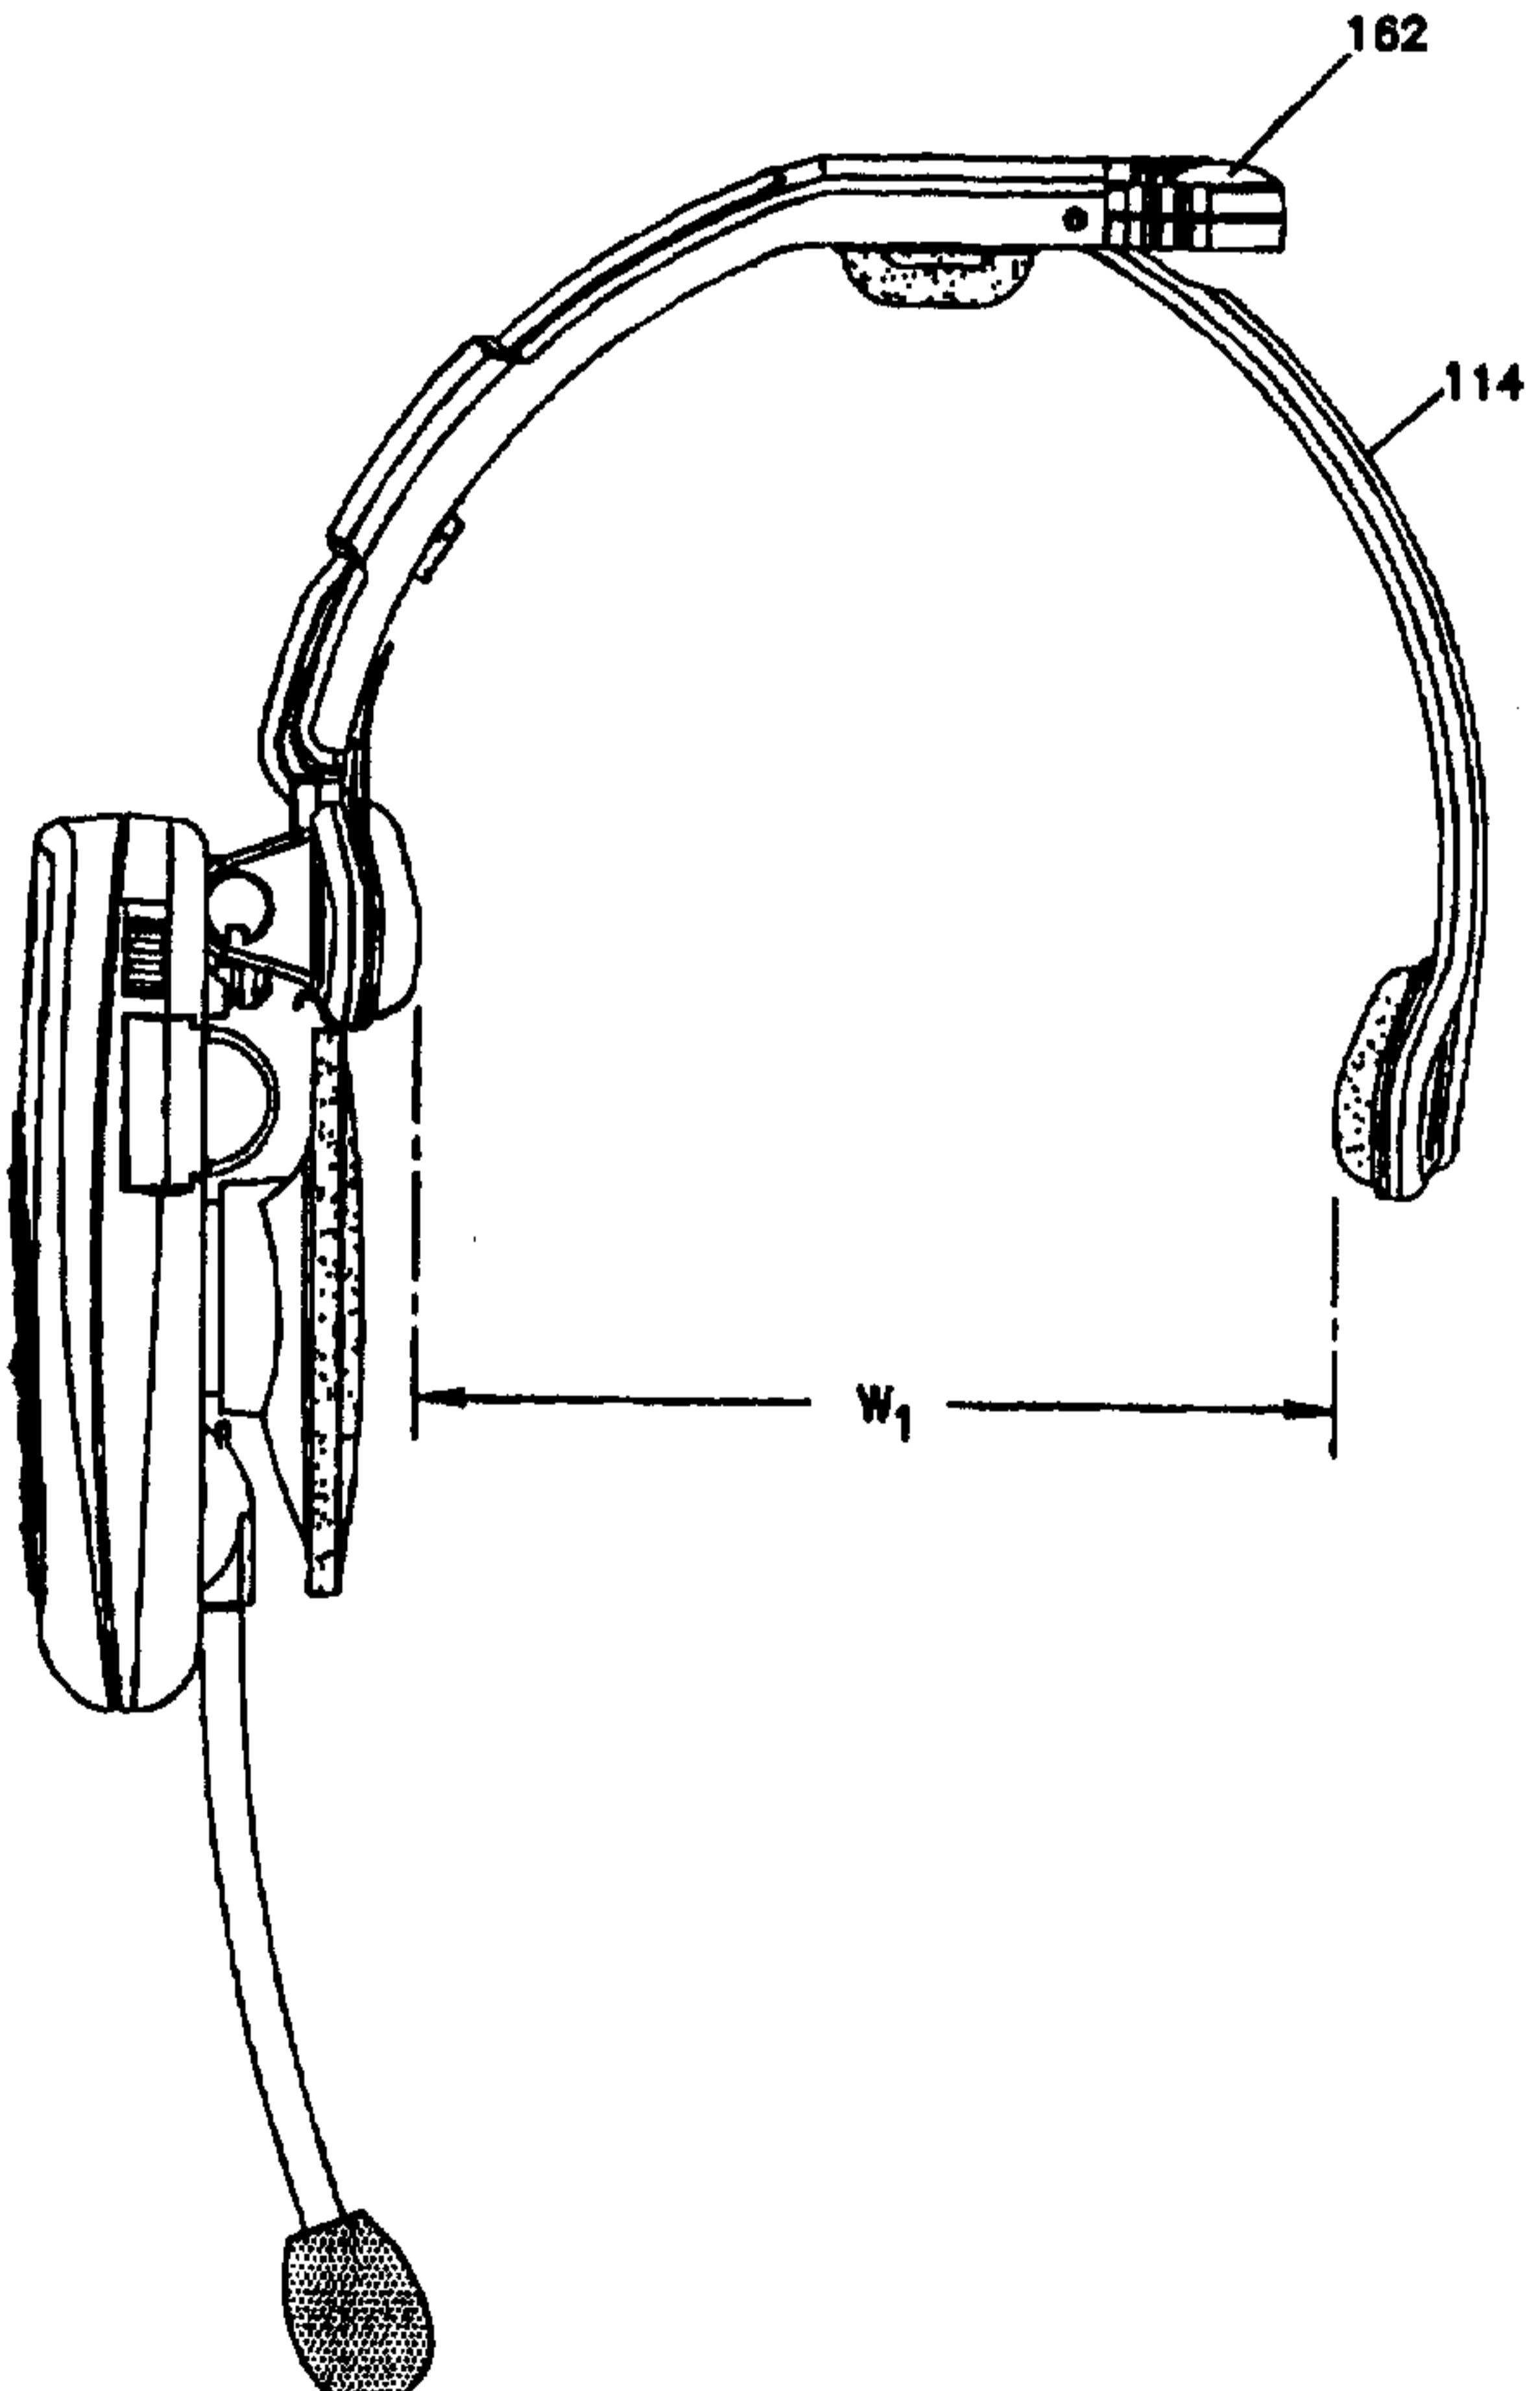

21. Mai 1999

HEADSET ASSEMBLY

5

Field of the Invention

The present invention relates generally to headset assemblies and, more particularly, to a headset assembly having improved ergonomics.

Background of the Invention

10 Headset assemblies are frequently used in a wide variety of applications and across a broad range of industries. For example, in the fast food industry, one or more employees at drive-through fast food restaurants typically wear a headset assembly to receive orders from patrons in the drive-through lane. Similarly, in the banking industry, tellers at banks having drive-through lanes may wear headset assemblies to communicate with customers. In the retail industry, headsets are commonly used by stockroom and other employees to communicate with one another within a large area, such as a department store or a warehouse.

15

20 A typical headset assembly includes a headband and an electronics housing. The headband typically consists of one single-rate leaf spring having only one unstressed width, but which is flexed to fit different sized heads. The electronics housing is typically attached to one end of the headband and usually includes an earphone speaker, a microphone boom, and the electronic circuitry necessary to operate the earphone and microphone. While being commonplace in today's society, conventional headsets are extremely uncomfortable and inconvenient to use.

25 *[please insert page 1a]*

Summary of the Invention

Generally the present invention relates to a headset assembly having increased comfort and convenience of use. In accordance with one embodiment of the invention, a headset assembly is provided which includes a first headpiece pivotally coupled to a second flexible headpiece. The headset assembly further includes means for limiting the pivotal movement of the flexible headpiece with

30

US-A-5 117 464 teaches clip-on headphones which include stereo speakers which may be clipped to a cross-over headband made from spring steel or plastic. The stereo speakers are connected to a socket via slide rods. The socket is, in turn, connected to the headband via a female clip. The headband relies on resiliency to provide width adjustment and tension between the male clips which hold the headband to the head of a wearer.

US-A-5 113 428 discloses a cordless telephone device which includes a top headband connected to two side pieces, and a back headband pivotally connected to the two side pieces via pivot pins. The top headband and back headband are adjustable with a slidable clip, respectively, to accommodate different sized heads.

EP-A-0 019 838 discloses a clip for securing a unit having an earphone capsule and microphone capsule to a military helmet. A microphone is attached by a frictional hinge to the unit. The unit is attached by a second frictional hinge to the clip. The device is shaped so that it may be used when a gas mask is worn.

US-A-4 930 148 discloses a headband radiophone which includes a circular supporting band and two earphones mounted on respective ends thereof. The earphones are connected to the supporting band using adjusting bars, which may be adjusted to fit the size of a wearer's head. The circular supporting band provides tension to hold the radiophone to the wearer's head.

respect to the first headpiece. This allows the tension of the headset assembly to be suitable adjusted to the head size of the wearer.

5 In accordance with another embodiment of the invention, a headset assembly which includes a headband and an electronics housing pivotally coupled to the headpiece is provided. The pivotal coupling of the electronics housing with respect to the headband allows the electronics housing to be swung away from a user's ear and provides additional comfort to the user.

10 In accordance with yet another embodiment of the invention, there is provided a headset assembly having an electronics housing removably coupled to a headband. The electronics housing may, for example, be removably coupled between a headband and a cap of a user. The headset assembly may include a clip member for removably coupling the headband to the electronics housing.

15 The above summary of the present invention is not intended to describe each illustrated embodiment. The figures and the detailed description which follow more particularly exemplify these embodiments.

Brief Description of the Drawings

20 The invention may be more completely understood in consideration of the following detailed description of various embodiments of the invention in connection with the accompanying drawings, in which:

Figure 1 is a perspective view of an exemplary headset assembly in accordance with one embodiment of the present invention;

Figures 2A and 2B are front cross sectional views of the headset assembly of Figure 1;

25 Figures 3-5 are front plan views of the exemplary headset assembly of Figure 1 shown at different width settings;

Figure 6 is a front plan view of an exemplary clip member coupled to an electronic housing in accordance with one embodiment of the present invention;

30 Figures 7A-7B are views of an exemplary adapter in accordance with one embodiment of the invention;

Figure 8 is a front plan view of the exemplary headset assembly of Figure 1; and

Figure 9 is an exploded perspective view of the headset assembly of Figure 1.

5 While the invention is amenable to various modifications and alternative forms, specifics thereof have been shown by way of example in the drawings and will be described in detail. It should be understood, however, that the intention is not to limit the invention to the particular embodiments described. On the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within
10 the ~~point and~~ scope of the invention as defined by the appended claims.

Detailed Description of the Drawings

The present invention generally relates to headset assemblies having one or more ergonomic features which increase the comfort and convenience of the
15 headset assembly for a user. An appreciation of various aspects and features of the invention will be gained through a discussion of an exemplary embodiment. While the exemplary embodiment illustrates a headset assembly which incorporates a number of these features, the present invention is not so limited. Headset assemblies including any one or combination of the features are intended to be
20 covered by the present invention.

Figures 1 and 2A-2B are perspective and cross-sectional views of an exemplary headset assembly in accordance with one embodiment of the invention. The headset assembly 100 includes a headband 110 and an electronics housing 120. The electronics housing 120 generally encloses headset electronics, such as a circuit
25 board, battery, etc. Mounted on the housing may, for example, be an earphone speaker 128, a microphone boom 126, and a touchpad 124 for operating the headset electronics. As should be appreciated, the earphone speaker 128 and microphone boom 126 are typically pivotally mounted to the housing 120 to facilitate comfortable positioning. Inwardly facing pads 130 formed, for example, from a polyethylene foam, may be mounted on the headset assembly 100. As will
30 be discussed more fully below, a battery 900 is provided on the housing 120 as well.

As noted above, the exemplary headset assembly 100 illustrates a number of features which enhance the convenience and comfort for a user. The exemplary headband 110 advantageously allows a user to adjust the unstressed width of the headband. The headband 110 generally includes two headpieces 112 and 114, 5 pivotally connected to one another, and a mechanism for limiting the pivotal movement of the headpieces so that the unstressed width of the headband 110 may be adjusted. At least one of the headpieces is relatively flexible so as to provide tension against the head of a user and thereby hold the headset in place.

In the illustrated embodiment, the two headpieces 112 and 114 include a 10 relatively flexible headpiece 114 and a relatively rigid support headpiece 112. The support headpiece 112 generally provides a supporting structure against which the flexible headpiece 114 may bend so as to provide the desired head tension to keep the headset in place. The headpieces 112 and 114 may be made of a number of different materials. For example, the flexible headpiece 114 may be formed from a 15 flexible plastic while the support headpiece 112 may be formed from a relatively more rigid plastic material. One suitable plastic is Nylon, for example.

The flexible headpiece 114 is pivotally coupled to the support headpiece 112 near the end of the support headpiece 112 using a pin 117. However the invention is not so limited. The pivotally connection may be formed in other manners. For 20 example, the two headpieces 112 and 114 may be integrally formed with a relatively thin portion forming an integral hinge between the two headpieces.

In the exemplary embodiment, the mechanism for limiting the pivotal movement of the flexible headpiece 114 with respect to the support headpiece 112 includes a tab 162 slidably mounted on a portion 164 of the support headpiece 112, 25 as best shown in Figure 2B. In general, as the tab 162 is moved outwardly and inwardly, the unstressed width of the headband increases and decreases, respectively. In this manner, the unstressed width of the headband 110 may be appropriately adjusted to comfortably fit a user's head.

As best shown in Figures 2A and 2B, the tab 162 includes a surface 166 30 which engages the flexible headpiece 114 to both limit the pivotal movement of the flexible headpiece 114 as well as provide a structure against which the flexible

headpiece 114 may flex or bend to provide head tension. The flexible headpiece 114 can be pivotally moved until it contacts the surface 166 at which point further movement of the flexible headpiece 114 results in the creation of a tensile force from the headpiece 114.

5 As best illustrated in Figure 2B, the exemplary tab 162 includes an upper portion 165 and a lower portion 167, mounted to the extended portion 164 of the support headpiece 112 using a pin ¹¹⁷~~169~~. The tab 162 includes a set of grooves 168a which mate with a set of grooves 168b on a surface of the headpiece portion 164 for setting the position of the tab 162 (and the width of the headband 100)- A leaf 10 spring 169 may be provided to bias the grove sets 168a and 168b against one another. The leaf spring bias generally allows the tab to be readily repositioned yet prevents the tab from slipping on the headpiece portion 164 when pressure from the flexible headpiece is applied.

15 It should be appreciated that the tab 162 is provided by way of example only. A wide variety of other structures and mechanisms may be used to limit the pivotal movement of the flexible headpiece 114. For example, a mechanism having a surface which is moved in a different plane than that of tab surface 166 may be used. Moreover, the present invention is not limited to three or any other fixed number of unstressed widths.

20 As illustrated in Figures 3-5, in the exemplary embodiment, the tab 162 is configured to allow pivotal movement of the flexible headpiece 114 to three different widths. More particularly, Figure 3 illustrates the tab 162 at an inner most position, which allows the flexible headpiece to pivotally move outward to an unstressed width W1. This provides the narrowest headband unstressed width and would be suitable for users having smaller head sizes. Figure 4 shows the tab 162 at an intermediate position, which allows the flexible headpiece 114 to pivotally move to an unstressed width W2. This provides an intermediate headband unstressed width and would be suitable for slightly larger head sizes. Finally, Figure 25 5 depicts tab 162 at an outermost position, which allows the flexible headpiece to be pivotally moved to an unstressed width W3. This provides the widest headband unstressed width W3 for accommodating larger head sizes. The three unstressed 30

W3

widths W1, W2, and ~~W~~ W3, for the flexible headpiece 114 may be suitably selected to cover the broadest range of head sizes.

In operation, a user slides the tab 162 to a position which provides a desired unstressed headband width.

5 Typically the unstressed width is slightly narrower than the user's head. The user then spreads the headband beyond its unstressed width by flexing the flexible headpiece 114 and slips the headband over his/her head. The tension provided by the stressed headband holds the headset in place.

10 The unstressed width of the above-described headband can advantageously be adjusted for various head sizes. Conventional headbands, as noted above, have only one unstressed width. With these conventional headbands, smaller heads are subject to less tension than larger heads. This often results in excessive tension on larger heads causing discomfort and too little tension on smaller heads making the headset prone to movement. The above headband alleviates these problems and 15 allows users with different sized heads to receive more comparable head tension.

20 As best illustrated in Figures 2A and 6-7, the illustrated headset assembly 100 further provides an electronics housing which may be readily removed from the headband 110 and, for example, attached to a hat of a user. The hat may, for example, be a baseball cap, a visor, and so forth. In the illustrated embodiment, an exemplary clip member 140, is provided to facilitate the interchangeability of the electronics housing 120 between a hat and a headband. While, the invention is not so limited, the clip member 140 may, for example, be made of a substantially rigid plastic material, such as Nylon.

25 The exemplary clip member 140 includes an upper portion 141 for attaching the clip member to the headband ~~and~~ ^{or} hat, and a lower portion 148 to which the electronics housing 120 may be coupled. The clip member upper portion 141 includes two arms 142 and 144 which form a slot 146 therebetween. To attach the clip member 140 with the headband 110, a portion 118 of the support headpiece 112 is slidably received by the slot 146 of the clip member 140. The two arms 142 and 144 may be biased against one another with sufficient force to allow the clip member 140 to be slidably moved with respect to the support headpiece 112 while 30

retaining the clip member 140 at a desired position with respect to the support headpiece 112 under normal conditions. The clip member arms may be formed separately or from one integral molding.

As best shown in Figure 2A, the received portion 118 of the support headpiece 112 may be recessed with respect to an outer surface 119 of the support headpiece 112. The recess may be sufficiently deep to allow the outer surfaces 143 and 149 of the clip member arms 142 and 144 to be relatively flush with the outer surface 119 of the support headpiece 112. To secure the clip member 140 to the headband 110, the support headpiece 112 may include a tab which engages an opening in the clip member 140. The tab may be depressed for removing the clip member 140 from the headband 110. In an alternate embodiment, a depressable button may be provided on the clip member to secure the clip member 140 to the headband 110. The button may be depressed as the clip member 140 is slid downwardly against the headband to allow the clip member to be removed from the headband 110.

The clip member upper portion 141 may also be used to attach the electronics housing to a hat. For example, the clip member 140 may attach to a hat by slidably receiving a hat between the clip member arms 142 and 144. In an alternate embodiment, best illustrated in Figures 7A-7D, an adapter 700 is provided to attach the clip member 140 to a hat. The exemplary adapter 700 generally includes two legs 702 and 704, which are typically biased toward one another. The leg 704 includes an upper flange 706 having a slot 710 (as best shown in Figure 7B) and a lower flange 708. To attach the adapter 700 to the clip member 140, the slot 710 receives clip member arm 142. The adapter 700 is slid down the arm 142 until the lower flange 708 clips beneath the pad 130. A hat is attached to the adapter by sliding it between the adapter arms 702 and 704. The cap adapter 700 may, for example, be formed from a stainless steel.

The above described clip member advantageously allows the electronics housing to be interchangeably connected to a headband and a hat. The exemplary clip member is illustrative only. The present invention is not so limited. For example, a clip member having only one leg which is received by a slot formed by

the headband may be used to facilitate interchanging of an electronics housing. In this embodiment, a hat adapter could be employed to attach the clip member to a hat.

As illustrated in Figure 8, the exemplary headset assembly 100 further includes an electronics housing 120 which may be pivoted away from a user's ear. Generally the electronic housing 120 is pivotally coupled to the headband 110 using a hinge ¹⁸⁰ ~~149~~. The hinge 180 may, for example, include a variable friction pivot pin having a friction suitably selected to sufficiently hold electronic package 120 away from the user's ear while still allowing the electronics package 120 to be readily pivoted. This allows for the electronic package 120 to be positioned against the user's ear during periods of use and swung away from the user's ear during periods of nonuse or as desired to increase the comfort of the user.

In the exemplary embodiment, the electronics housing 120 is pivotally coupled with the headband 110 via the clip member 140. In particular, the electronics housing 120 is pivotally coupled with the clip member 140, for example, at the clip member extending portion 148. The clip member 140 is in turn attached to the headband 110, as discussed above. This allows the electronics housing 120 to be swung away from the user's ear when it is attached to a hat as well as a headband.

As best illustrated in Figures 2 and 9, the exemplary electronics housing 120 further includes a battery 900. A portion of the battery 900 may lie outside of the electronics housing when attached, as best shown in Figure 2. For example, a portion of the battery 900 may occupy the space between the speaker 128 and the electronics housing 120. By attaching the battery 900 to the electronics housing 120, the need for wiring between one end of the headset 100 and the electronics housing 120 is eliminated. In addition, the housing 120 may be detached from the headband 110 and used for communication. By disposing the battery 900 between the housing 120 and the speaker 128, otherwise unoccupied space is used and the width of the housing 120 may be reduced while still providing sufficient power for the electronics in the housing 120.

The battery 900 may be attached to the electronics housing 120 in a number of different manners. In the exemplary embodiment, the battery 900 is slidably received by a slot 902 in the electronics housing 120, as best illustrated in Figure 9. For securing the battery 900 in the slot 902, the received portion of the battery 900 and the slot 902 may have shapes or structural features which mate together to retain the battery 900. For example, the slot 902 may include flanges 904, on each side of the slot 902, which mate with corresponding recesses 906 on the battery 900. In the exemplary embodiment, a portion of a lower region of the battery 900 extends beyond an upper region of the battery 900 to form the battery recesses 906.

5 A latch 908 may further be provided to secure the battery 900 in the axial direction of the slot 902. The latch 908 may, for example, be a spring loaded latch which is disposed upward while the battery 900 is inserted and which moves downward to engage a notch 910 in the battery 900 when the battery is fully inserted. To remove the battery 900, the latch 908 may be biased upwardly.

10

15 As noted above, the present invention is applicable to a wide variety of headset assemblies incorporating enhanced ergonomic features. While the illustrated embodiment incorporates a number of ergonomic features, the present invention is not so limited. Headset assemblies including any one or a combination of the features are covered by the present invention. Accordingly, the present invention should not be considered limited to the particular examples described above, but rather should be understood to cover all aspects of the invention as fairly set out in the attached claims. Various modifications as well as numerous equivalent structures to which the present invention may be applicable will be readily apparent to those of skill in the art to which the present invention is directed.

20

25 Upon review of the present specification. The claims are intended to cover such modifications and structures.

WE CLAIM:


1. A headset assembly, comprising:
 - a headband including a first headpiece and a second headpiece which is flexible, the first headpiece having a first end portion pivotally coupled to a first end portion of the second flexible headpiece and having a second end portion separated from a second end portion of the second flexible headpiece, thereby defining a width between the second end portions for receiving a head of a wearer and a pivotal connection device connecting the first end portions of the first headpiece and second flexible headpiece; and
 - an adjusting device movably engageable with the first and second headpieces for adjusting a maximum range of pivotal movement of the second flexible headpiece with respect to the first headpiece so as to vary the width of the headband without stressing the first and second headpieces.
2. The headset of claim 1, wherein the adjusting device is a tab movably engageable with the first and second headpieces for adjusting a maximum range of pivotal movement of the second headpiece with respect to the first headpiece.
3. The headset assembly of claim 2, wherein the pivotal connection device is a pin at a fixed location.
4. The headset assembly of claim 3, wherein the tab is mounted on a portion of the first headpiece proximate the pin.
5. The headset assembly of claim 2, the tab further comprising a surface which is movable with respect to the first headpiece and which engages the first end portion of the second flexible headpiece to limit a maximum range of pivotal movement between the first and second headpieces without stressing the first and second headpieces.


6. The headset assembly of claim 5 wherein the tab can move to one of a plurality of different, discrete locations, each location being associated with a different unstressed width of the headset assembly.
- 5 7. The headset assembly of claim 6 wherein the second headpiece pivots until engaging the tab surface and thereafter bends against the tab surface so as to stress the second headpiece for providing tension between the second end portions.
8. The headset assembly of claim 1, further comprising:
 - 10 an electronics housing, including a speaker, pivotally coupled to the second end portion of the first headpiece for position adjacent an ear of the wearer.
 9. The headset assembly of claim 8, wherein the first headpiece further comprises:
 - 15 a first member including the first end portion of the first headpiece; and a clip member removably coupled to the first member and pivotally coupled to the electronics housing, the clip member including the second end portion of the first headpiece.
 10. The headset assembly of claim 9, wherein each of the second end portions include padding.
 - 20 11. The headset assembly of claim 10, further including a pin disposed proximate the padding on the second end portion of the first headpiece for pivotally coupling the second end portion of the first headpiece to an end portion of the electronics housing to provide an off center pivot axis which allows the housing to pivot against and away from the ear of the wearer when the headset is worn.
 - 25 12. The headset assembly of claim 9, wherein the first member of the first headpiece is substantially rigid.
 13. The headset assembly of claim 9, further including an adapter capable of being removably

coupled to the clip member, the adapter being configured to be removably mounted on a hat.

14. The headset assembly of claim 1, wherein the second headpiece bends against the adjusting device so as to stress the second headpiece for providing tension between the second end portions.
5
15. The headset assembly of claim 7 wherein the pivotal connection device is a pin disposed on a top portion of the headband, the headset assembly further comprising an electronics housing, including a speaker, pivotally coupled to the second end portion of the first headpiece for position adjacent an ear of the wearer.
10
16. The headset assembly of claim 1 wherein each of the first and second headpieces curves between the respective first and second portions.


1/10

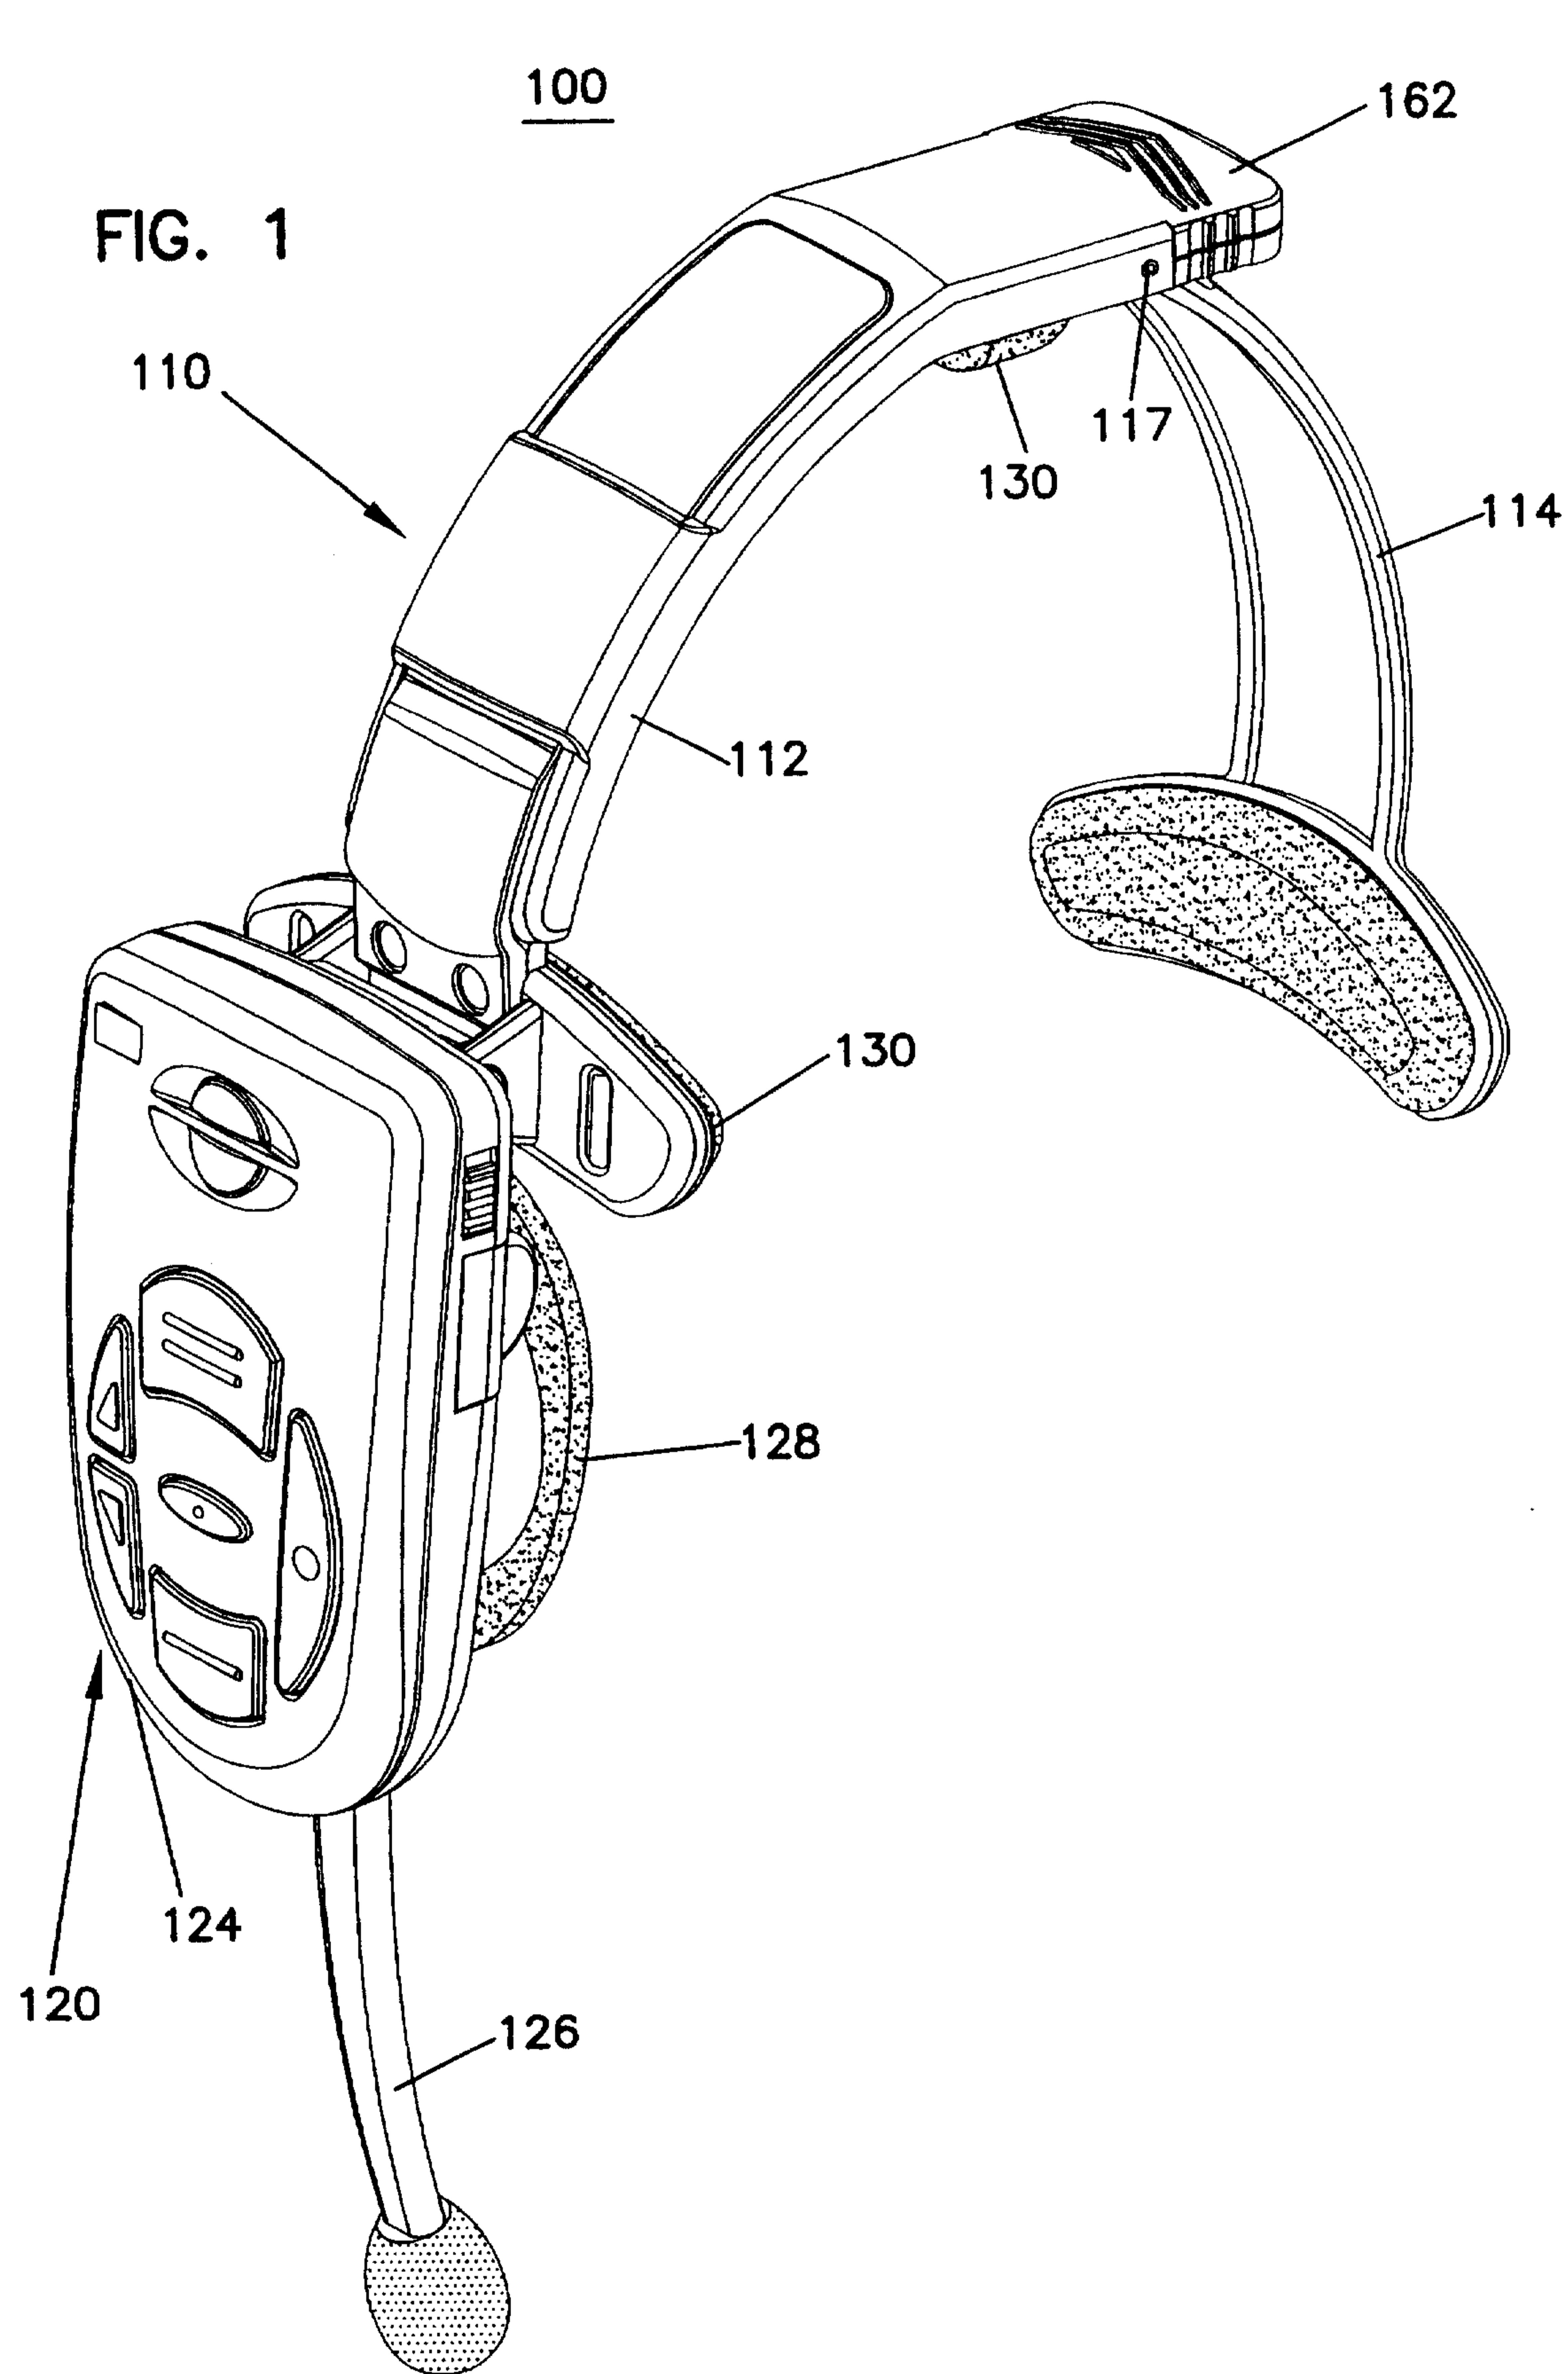100

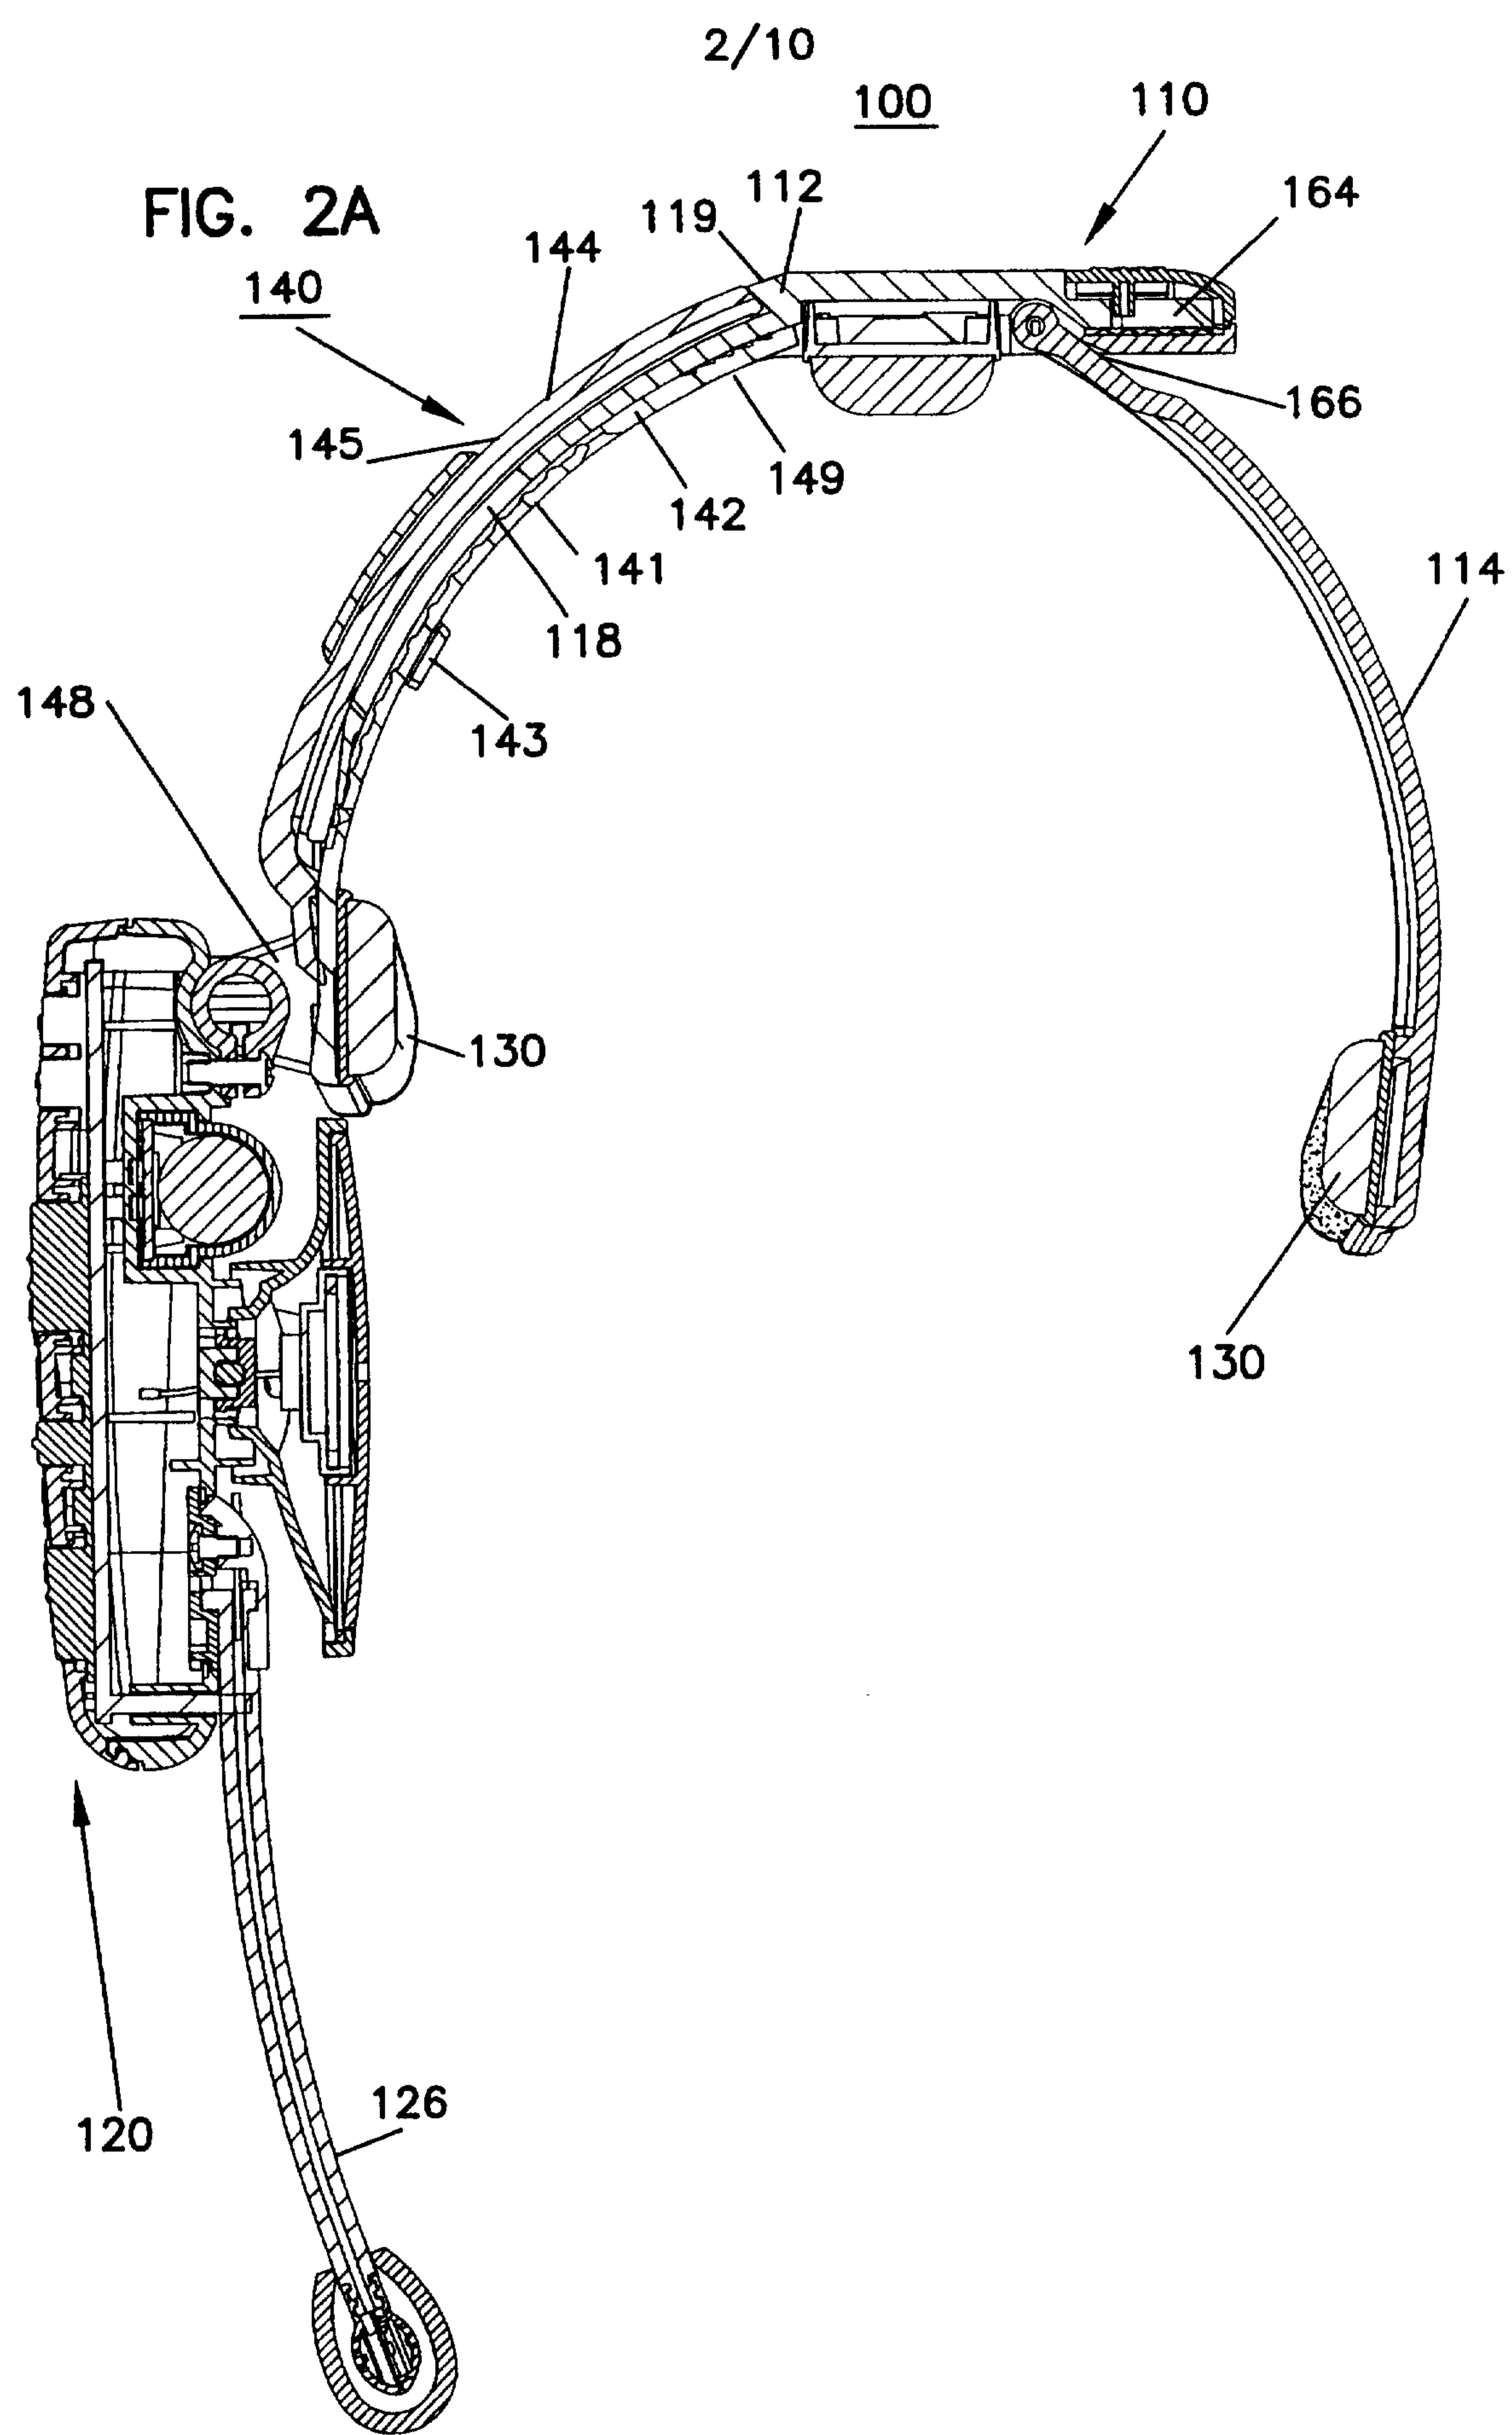


3/10

FIG. 2B

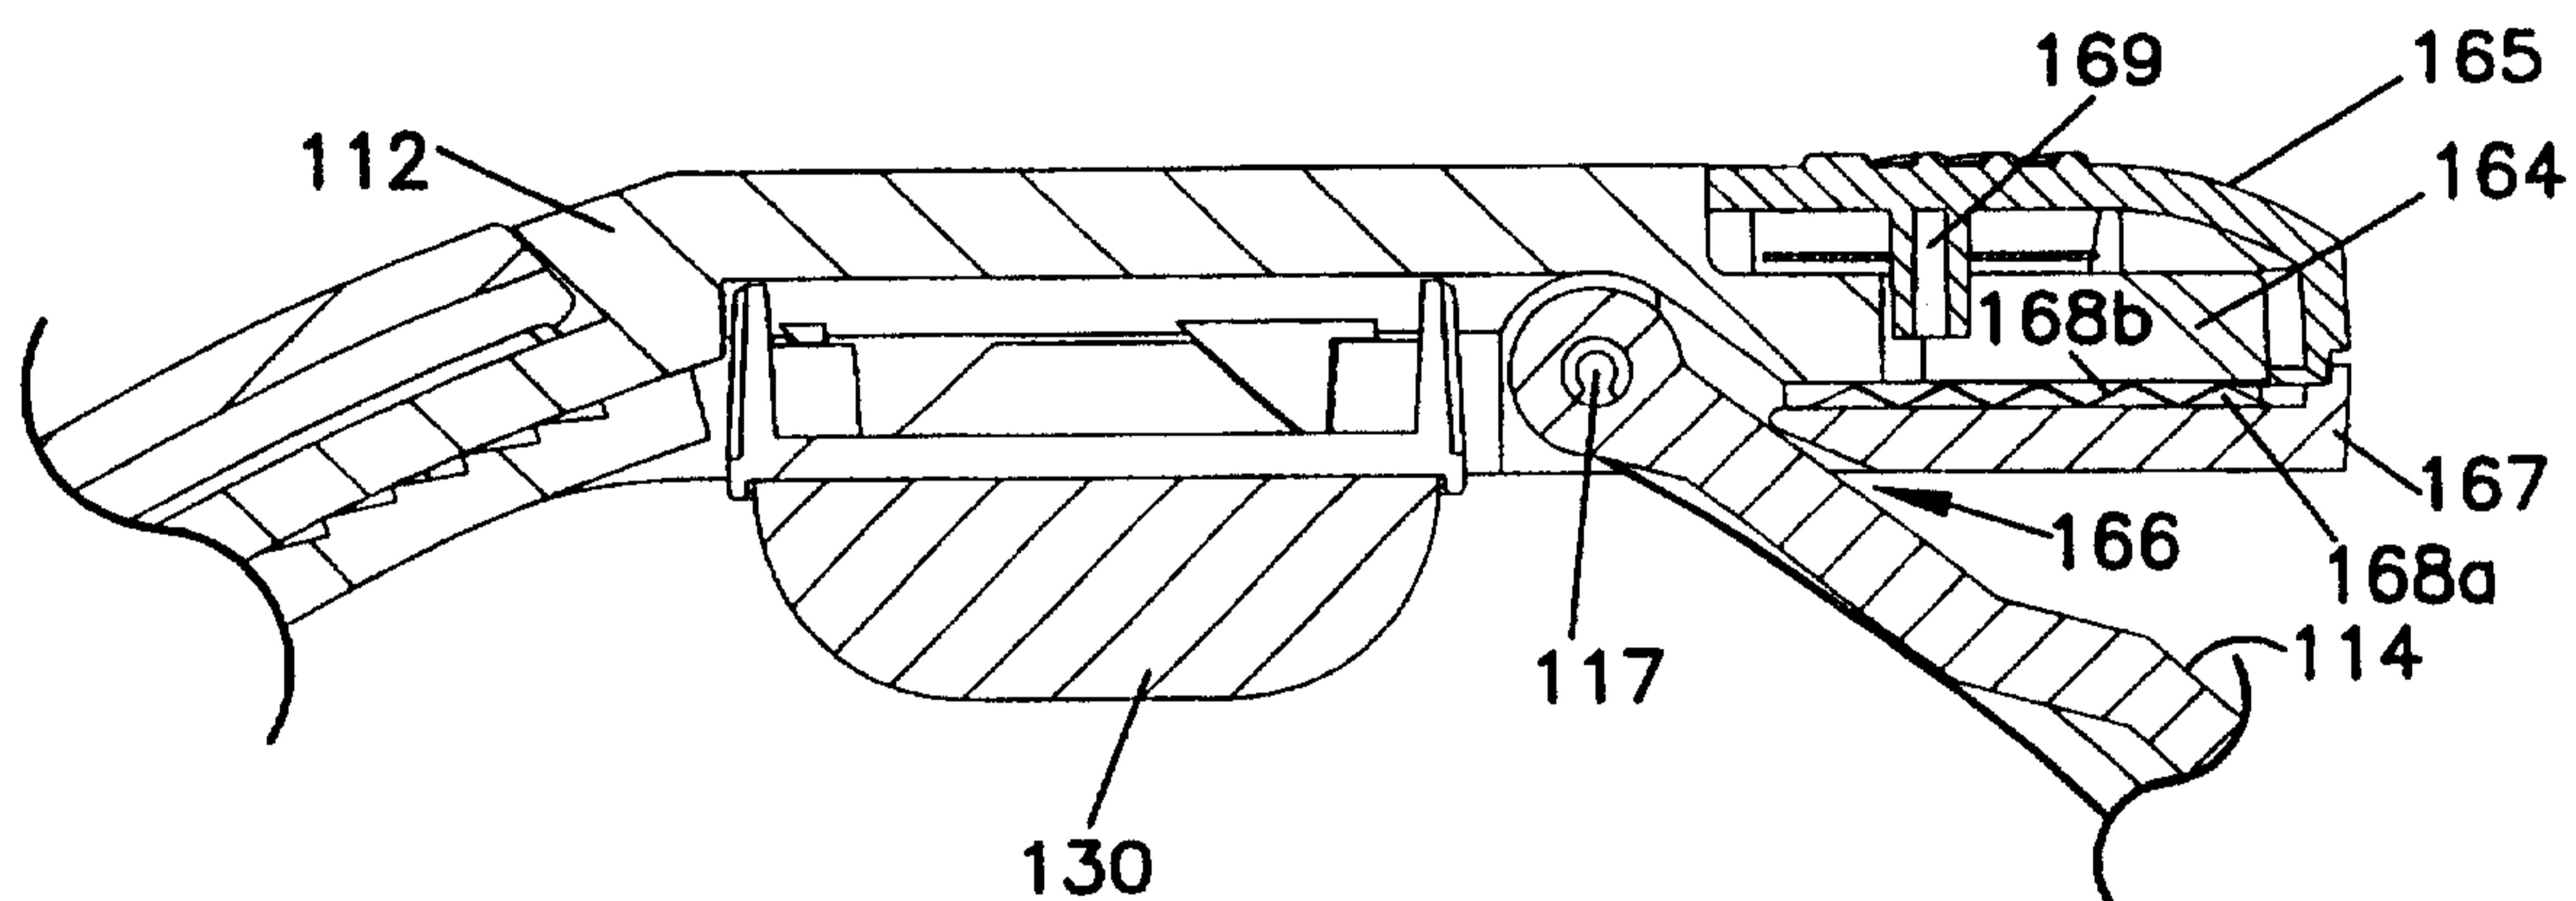


4/10

FIG. 3

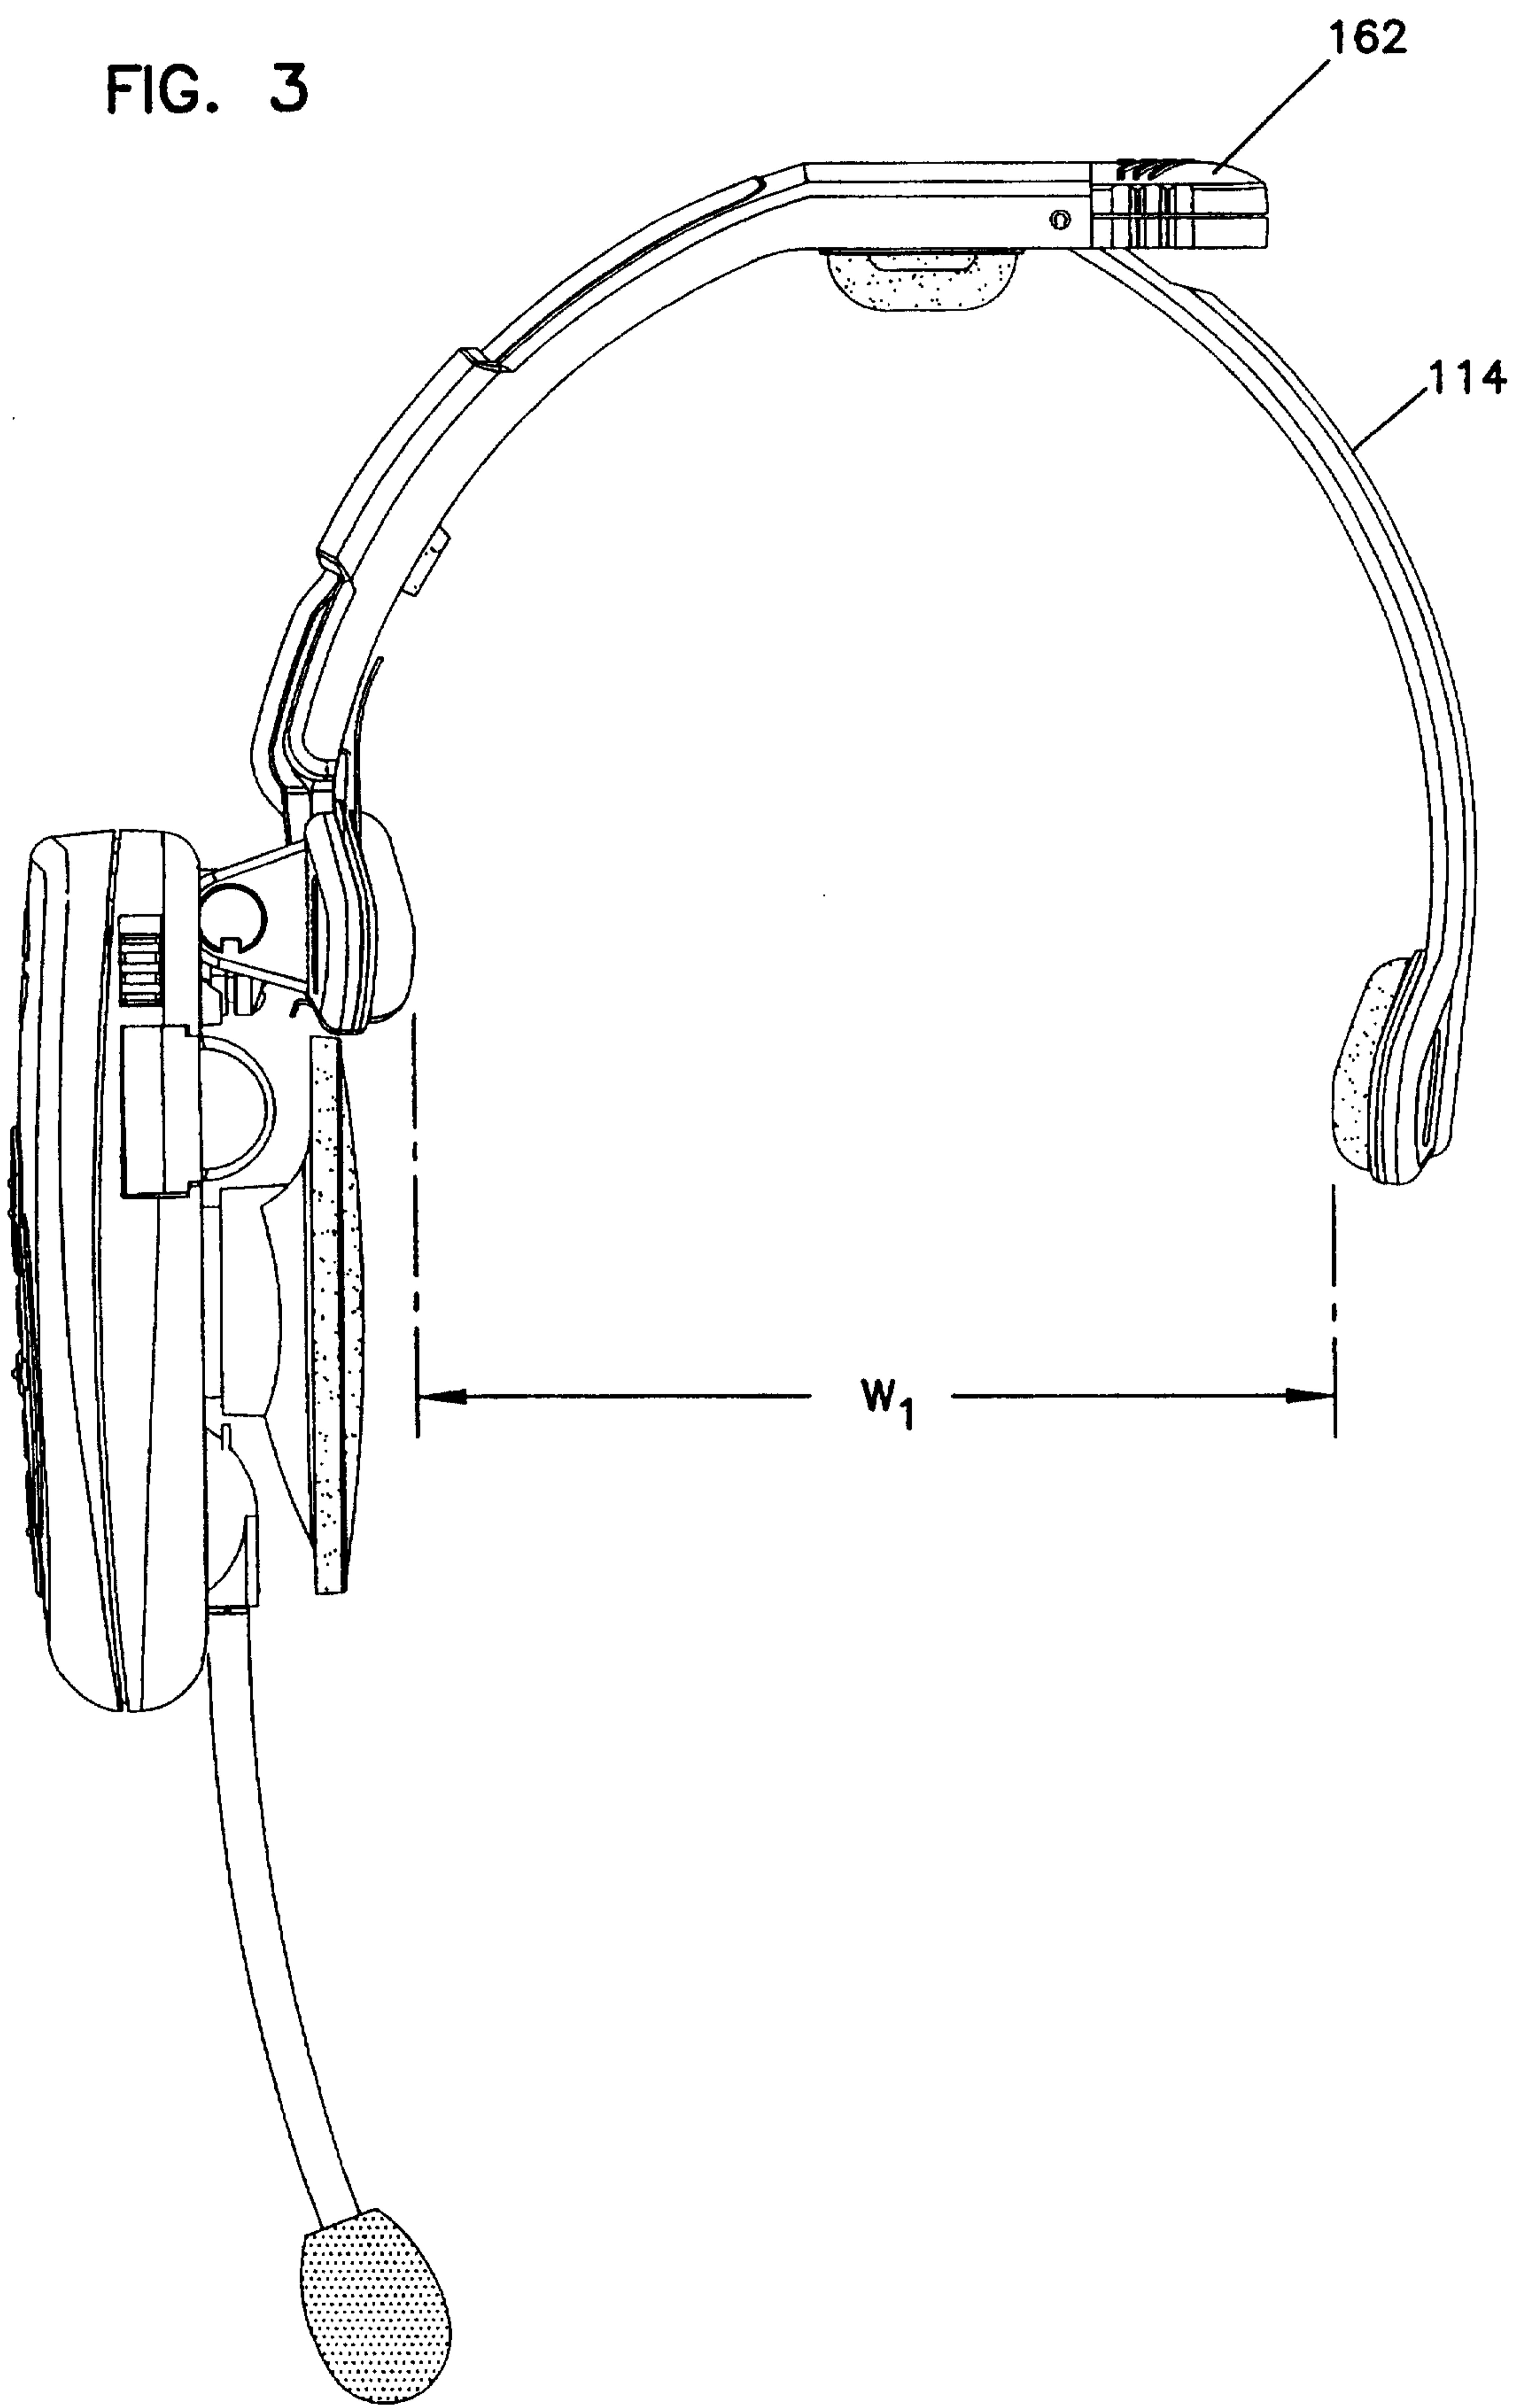


5/10

FIG. 4

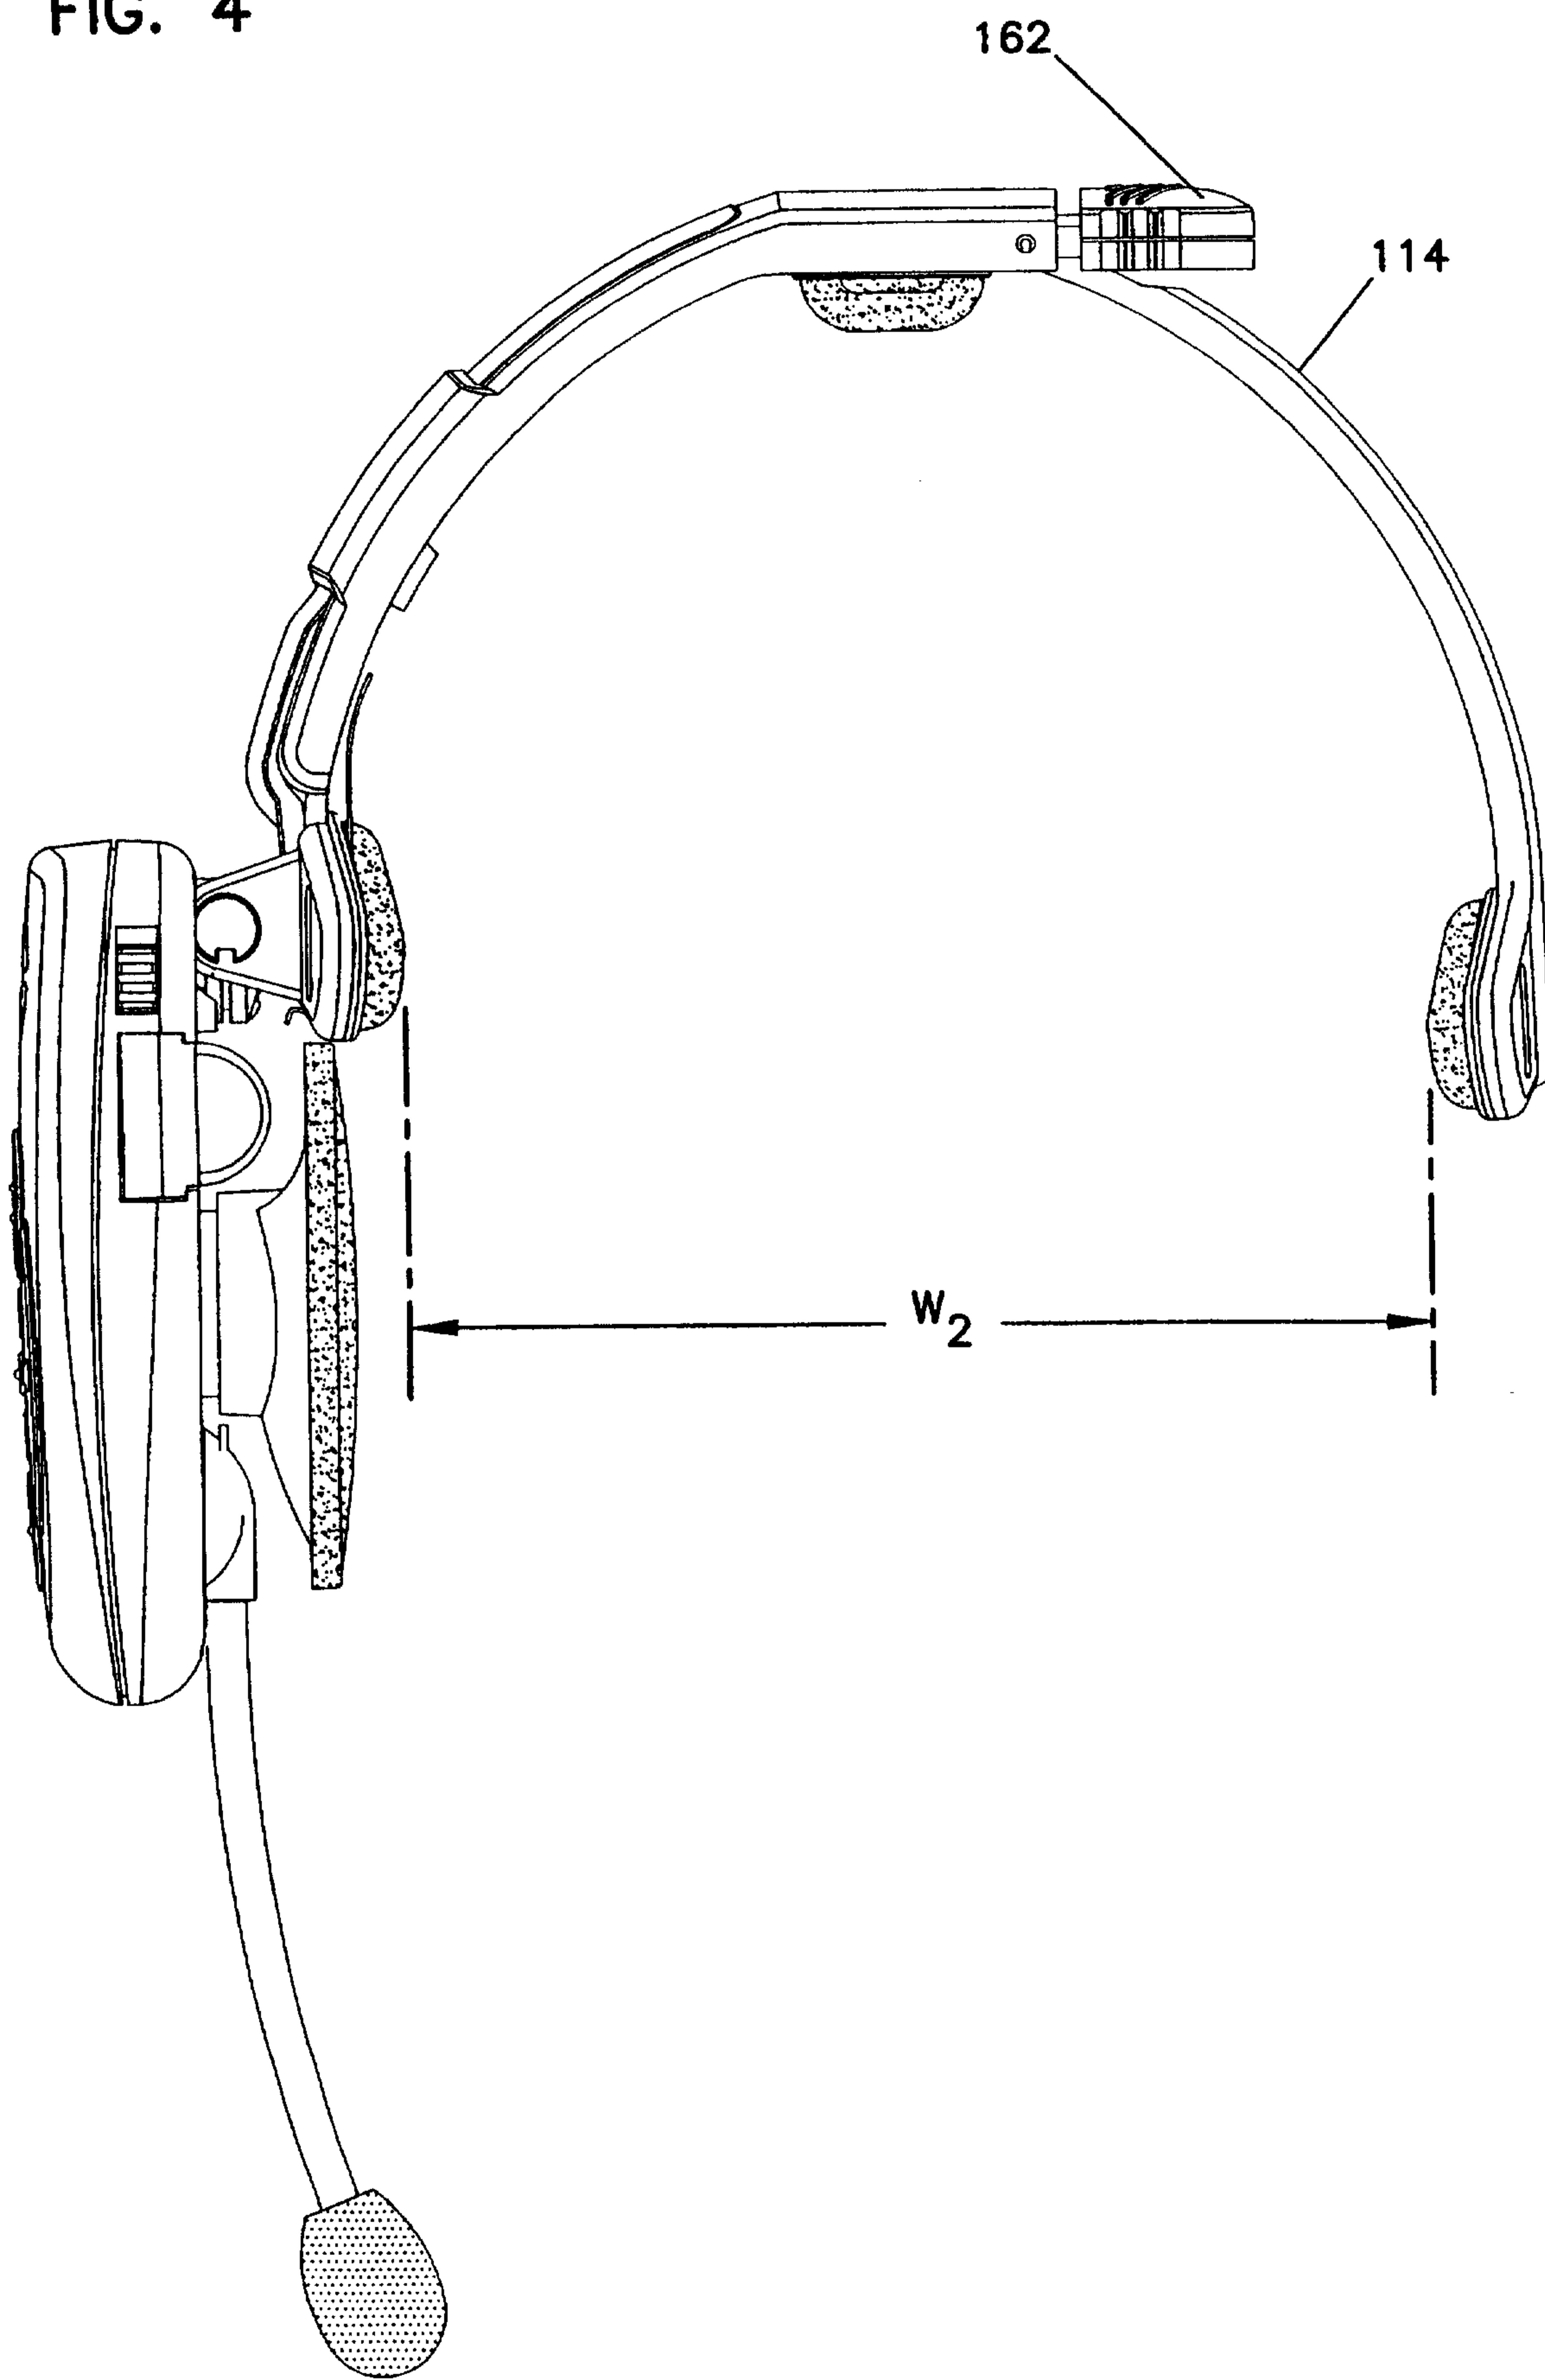


6/10

FIG. 5

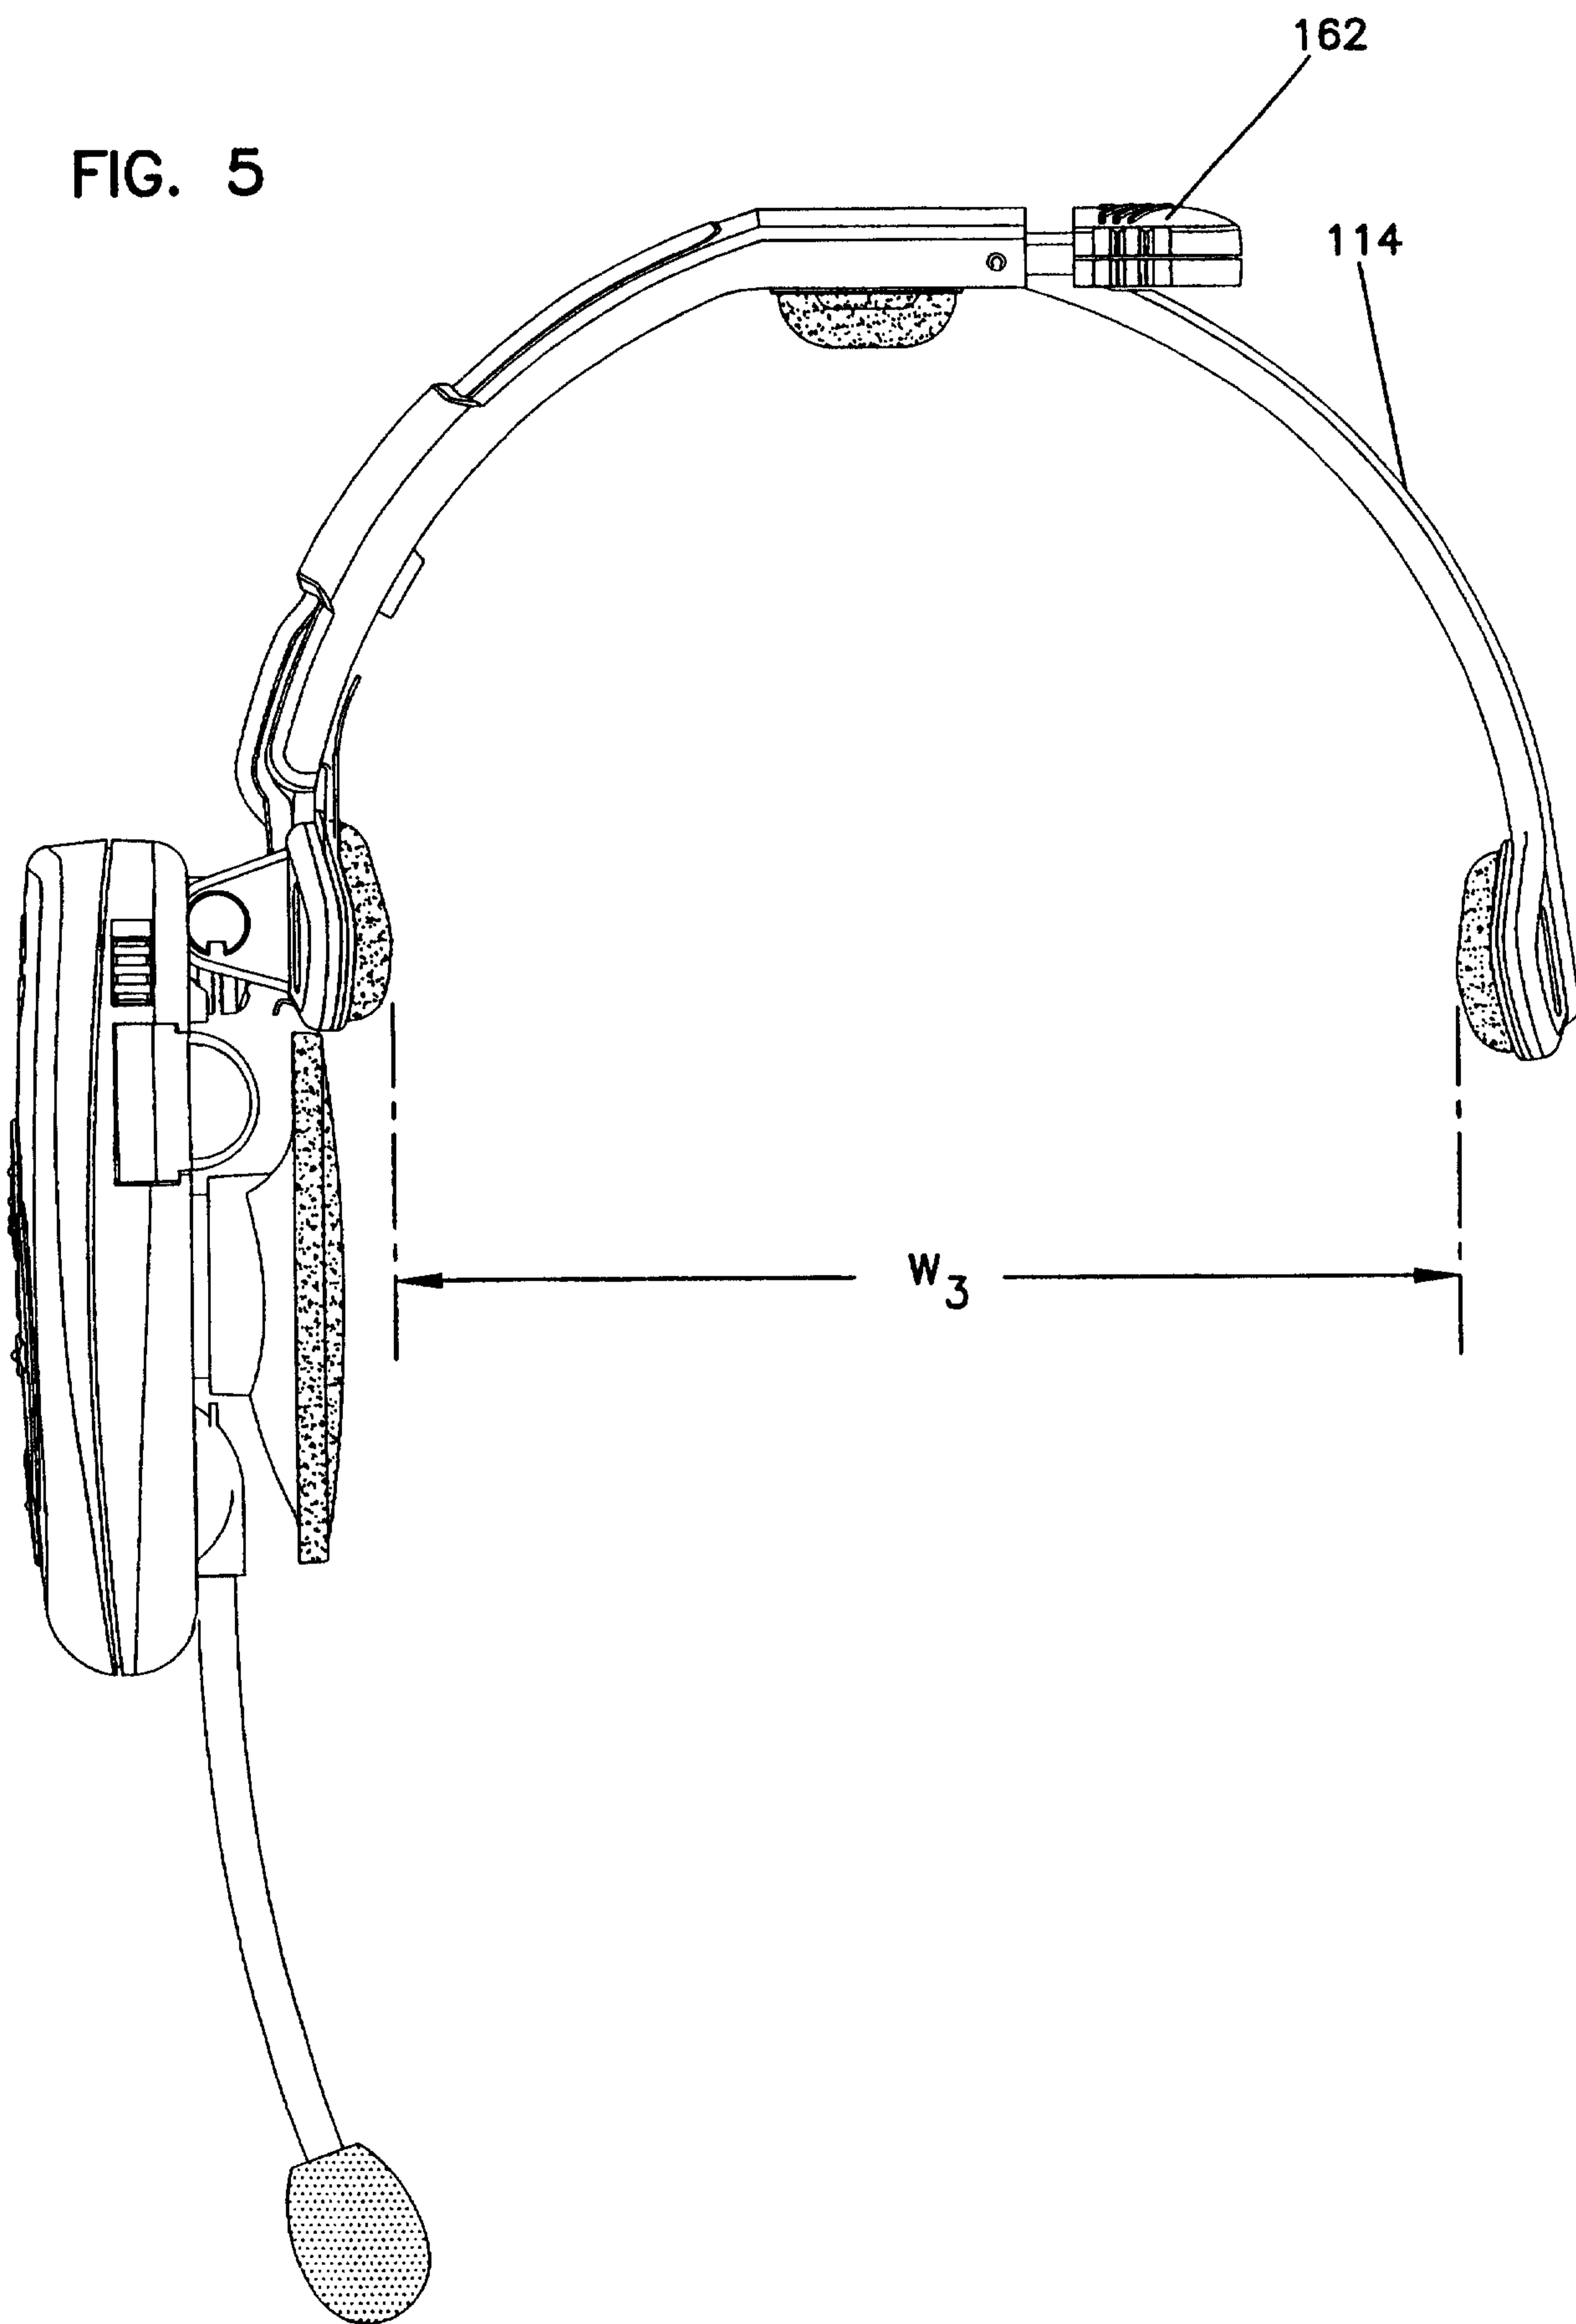

7/10

FIG. 6

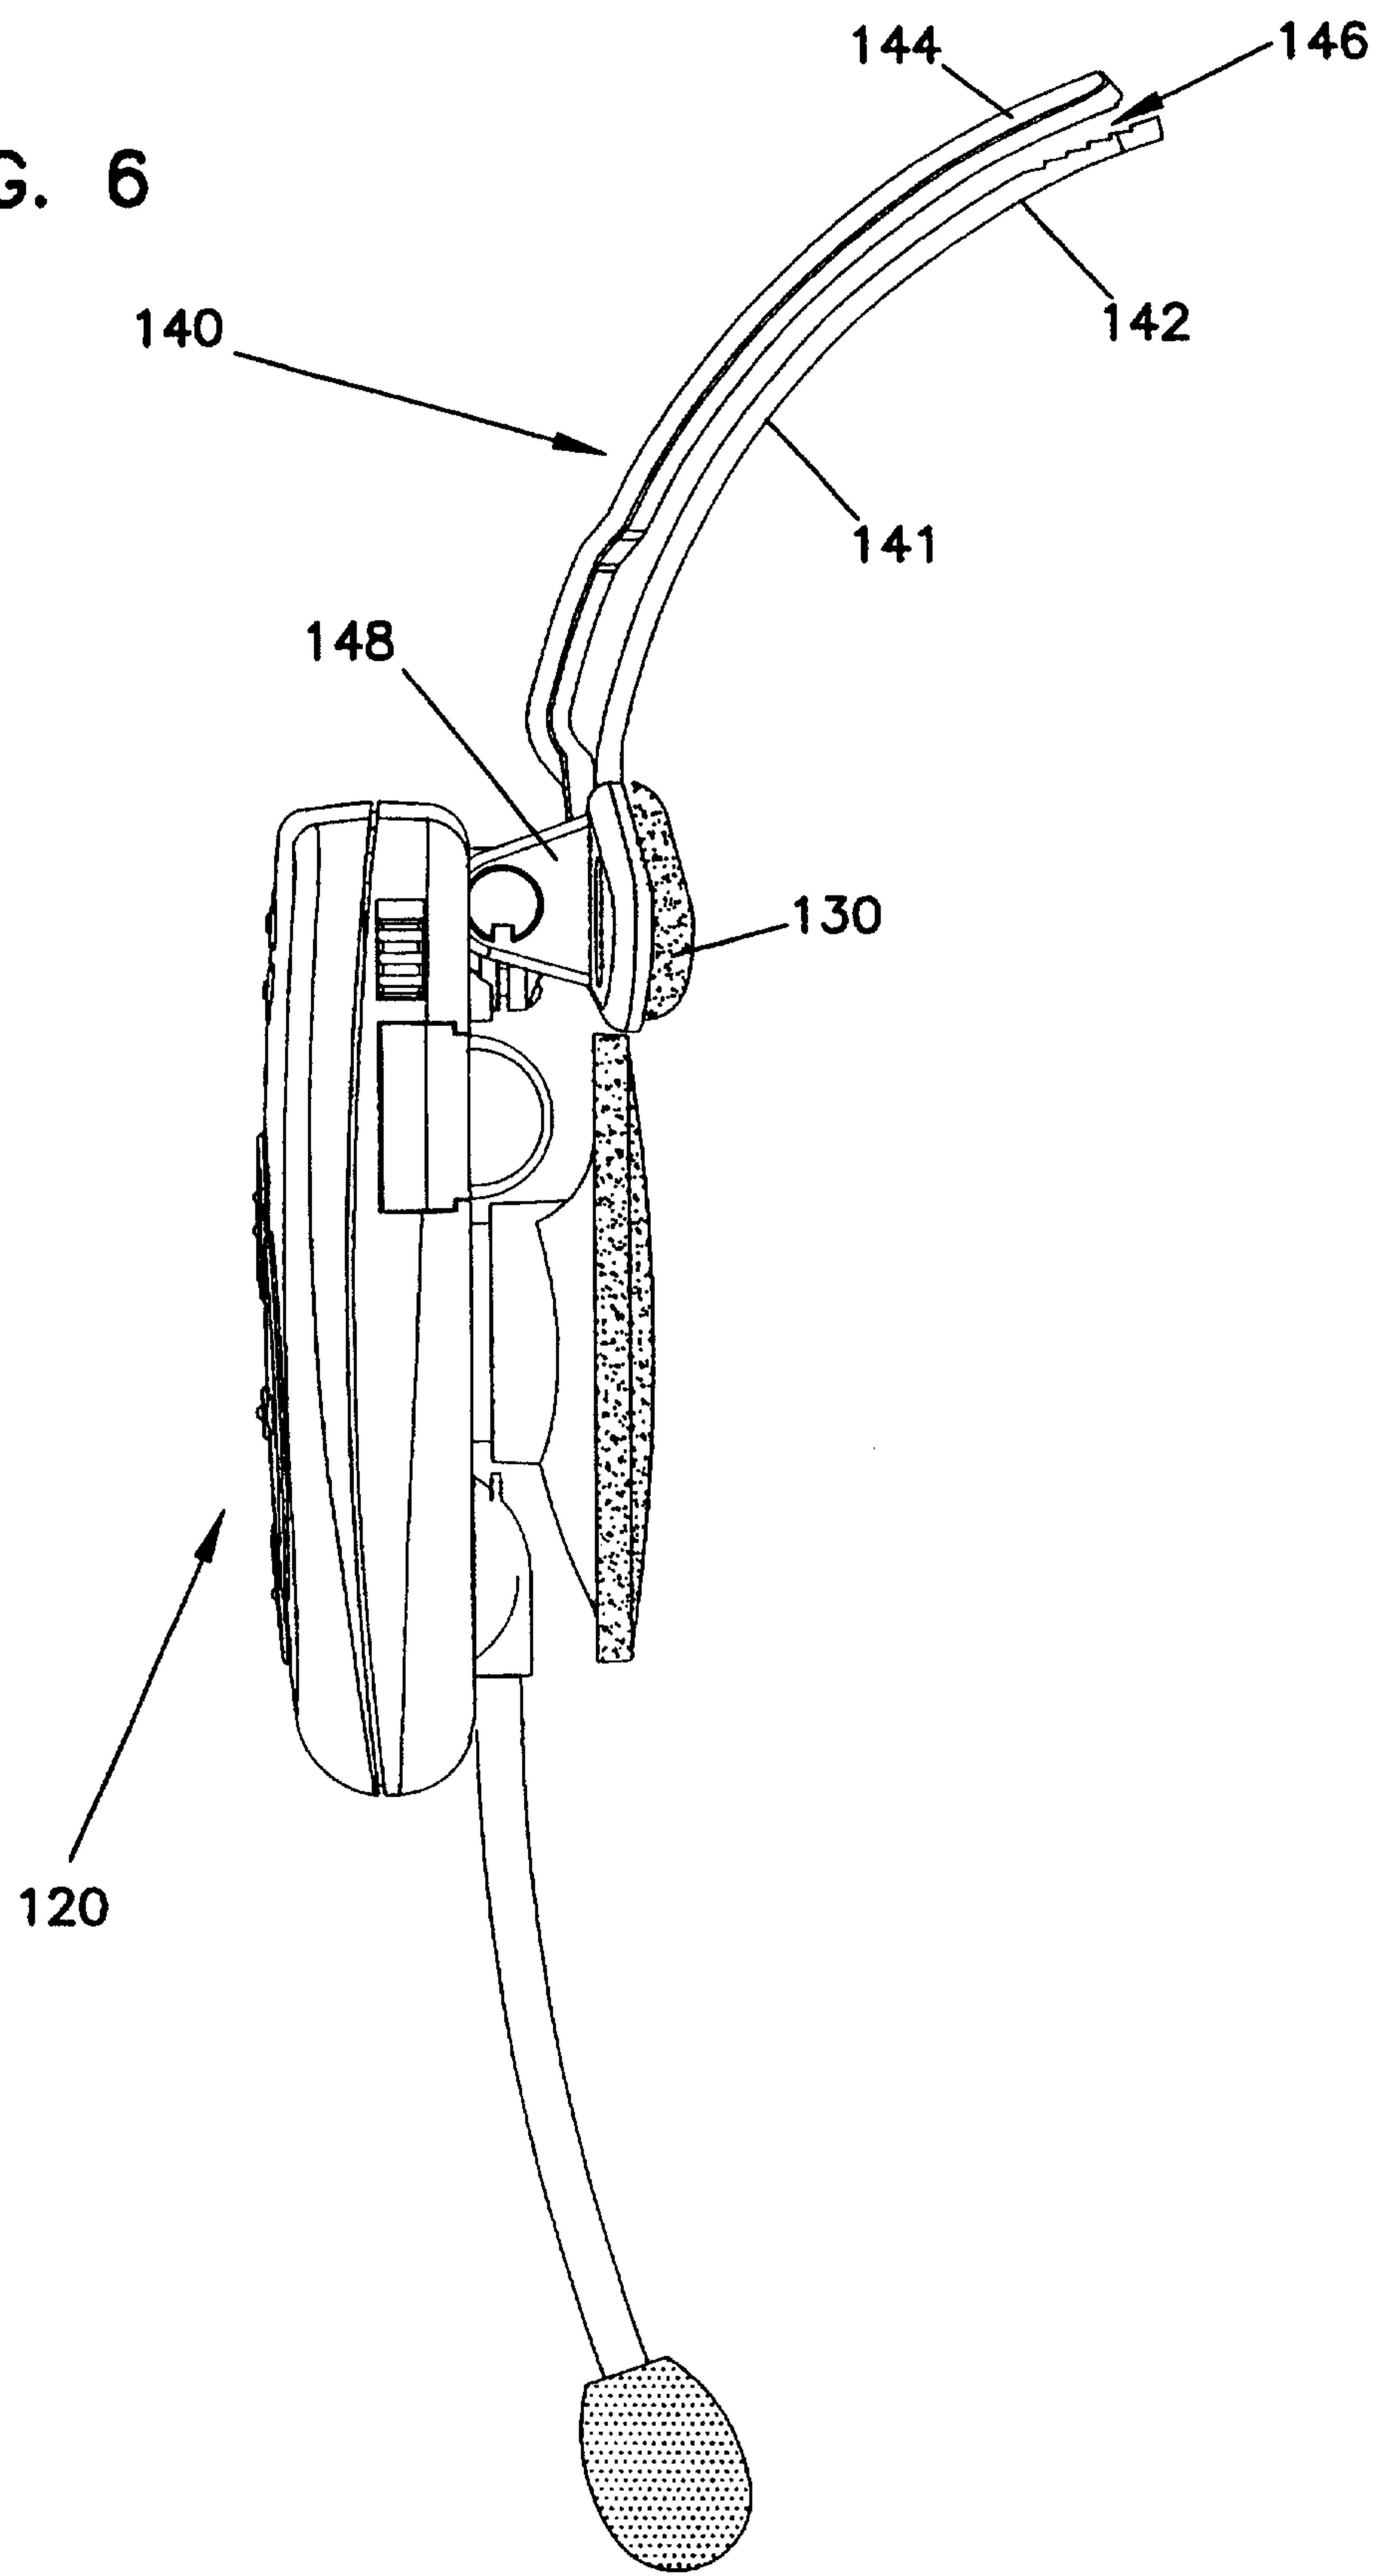

8/10

FIG. 7A

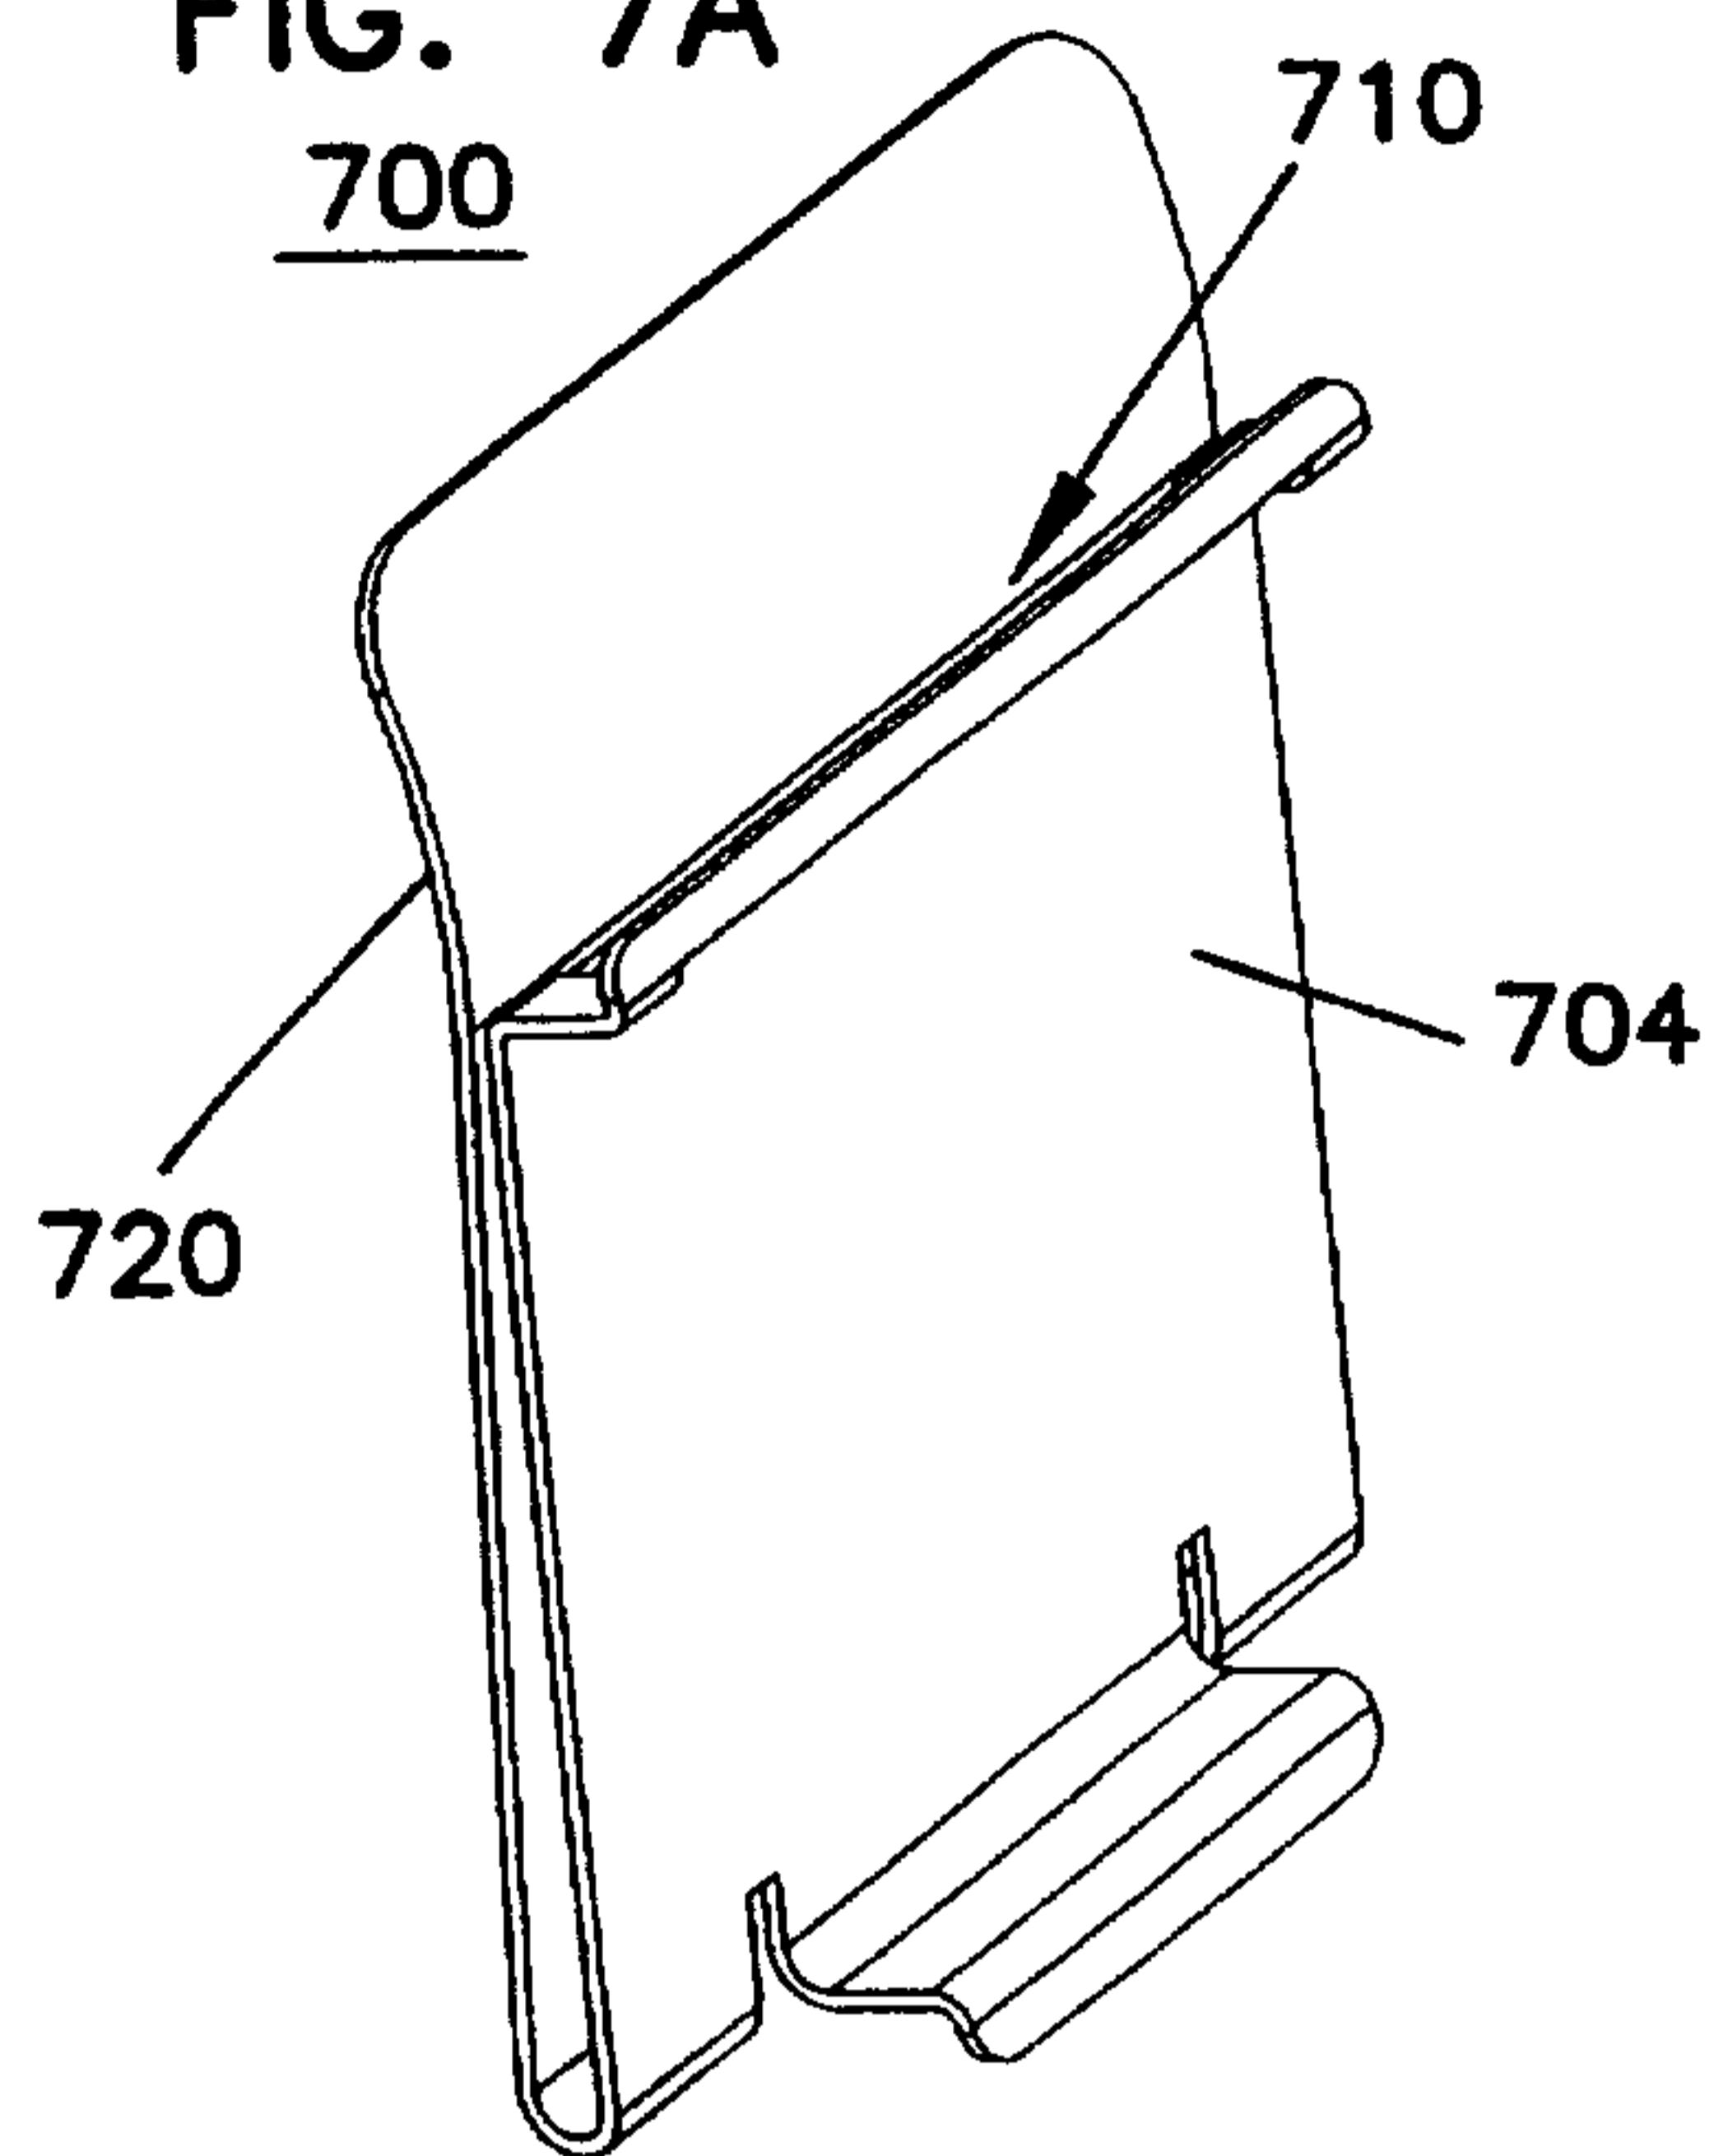


FIG. 7B

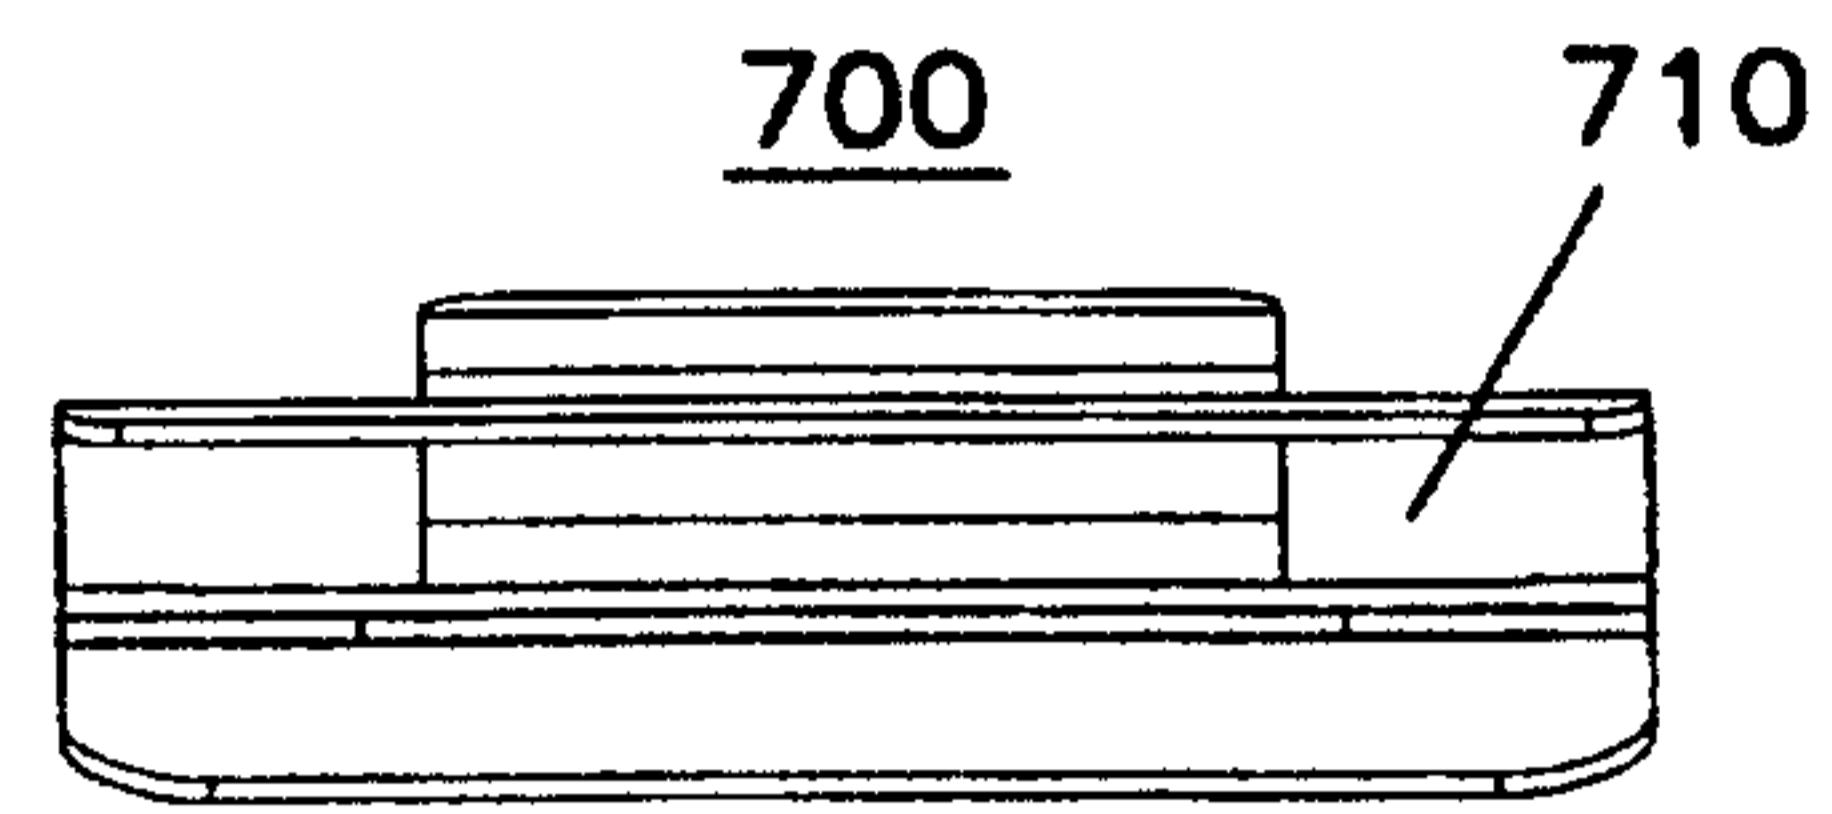


FIG. 7C


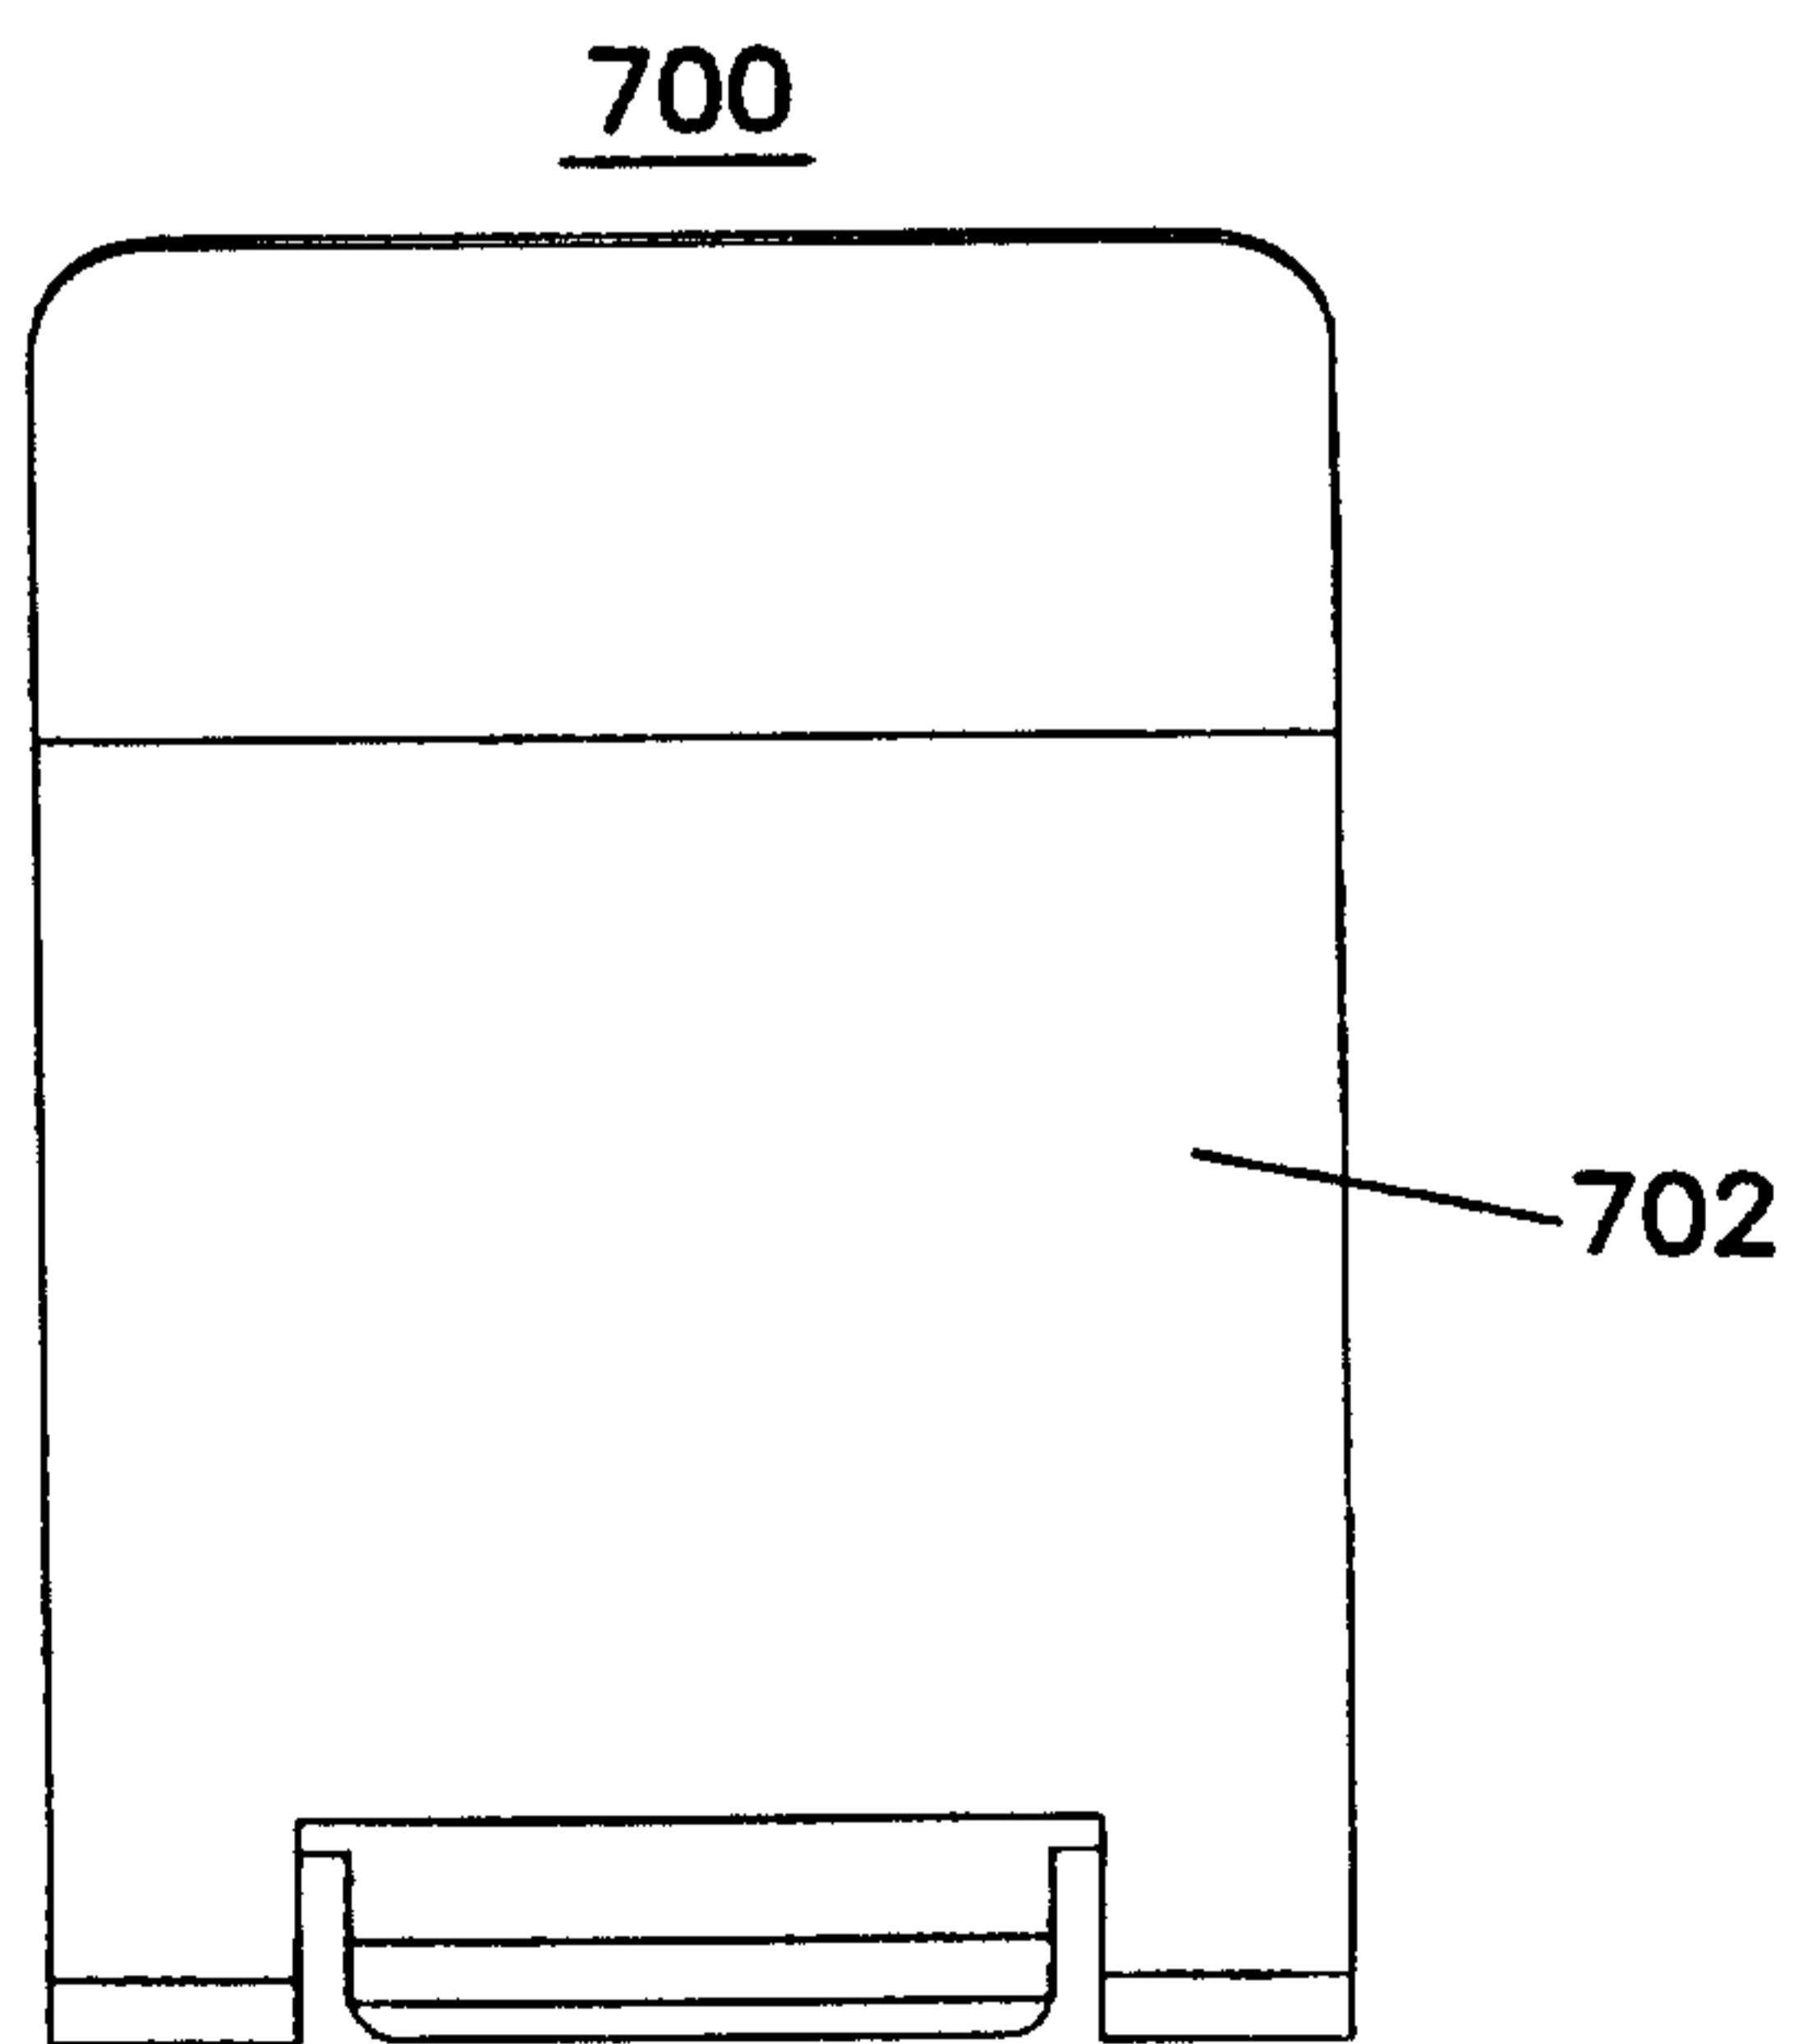



FIG. 7D

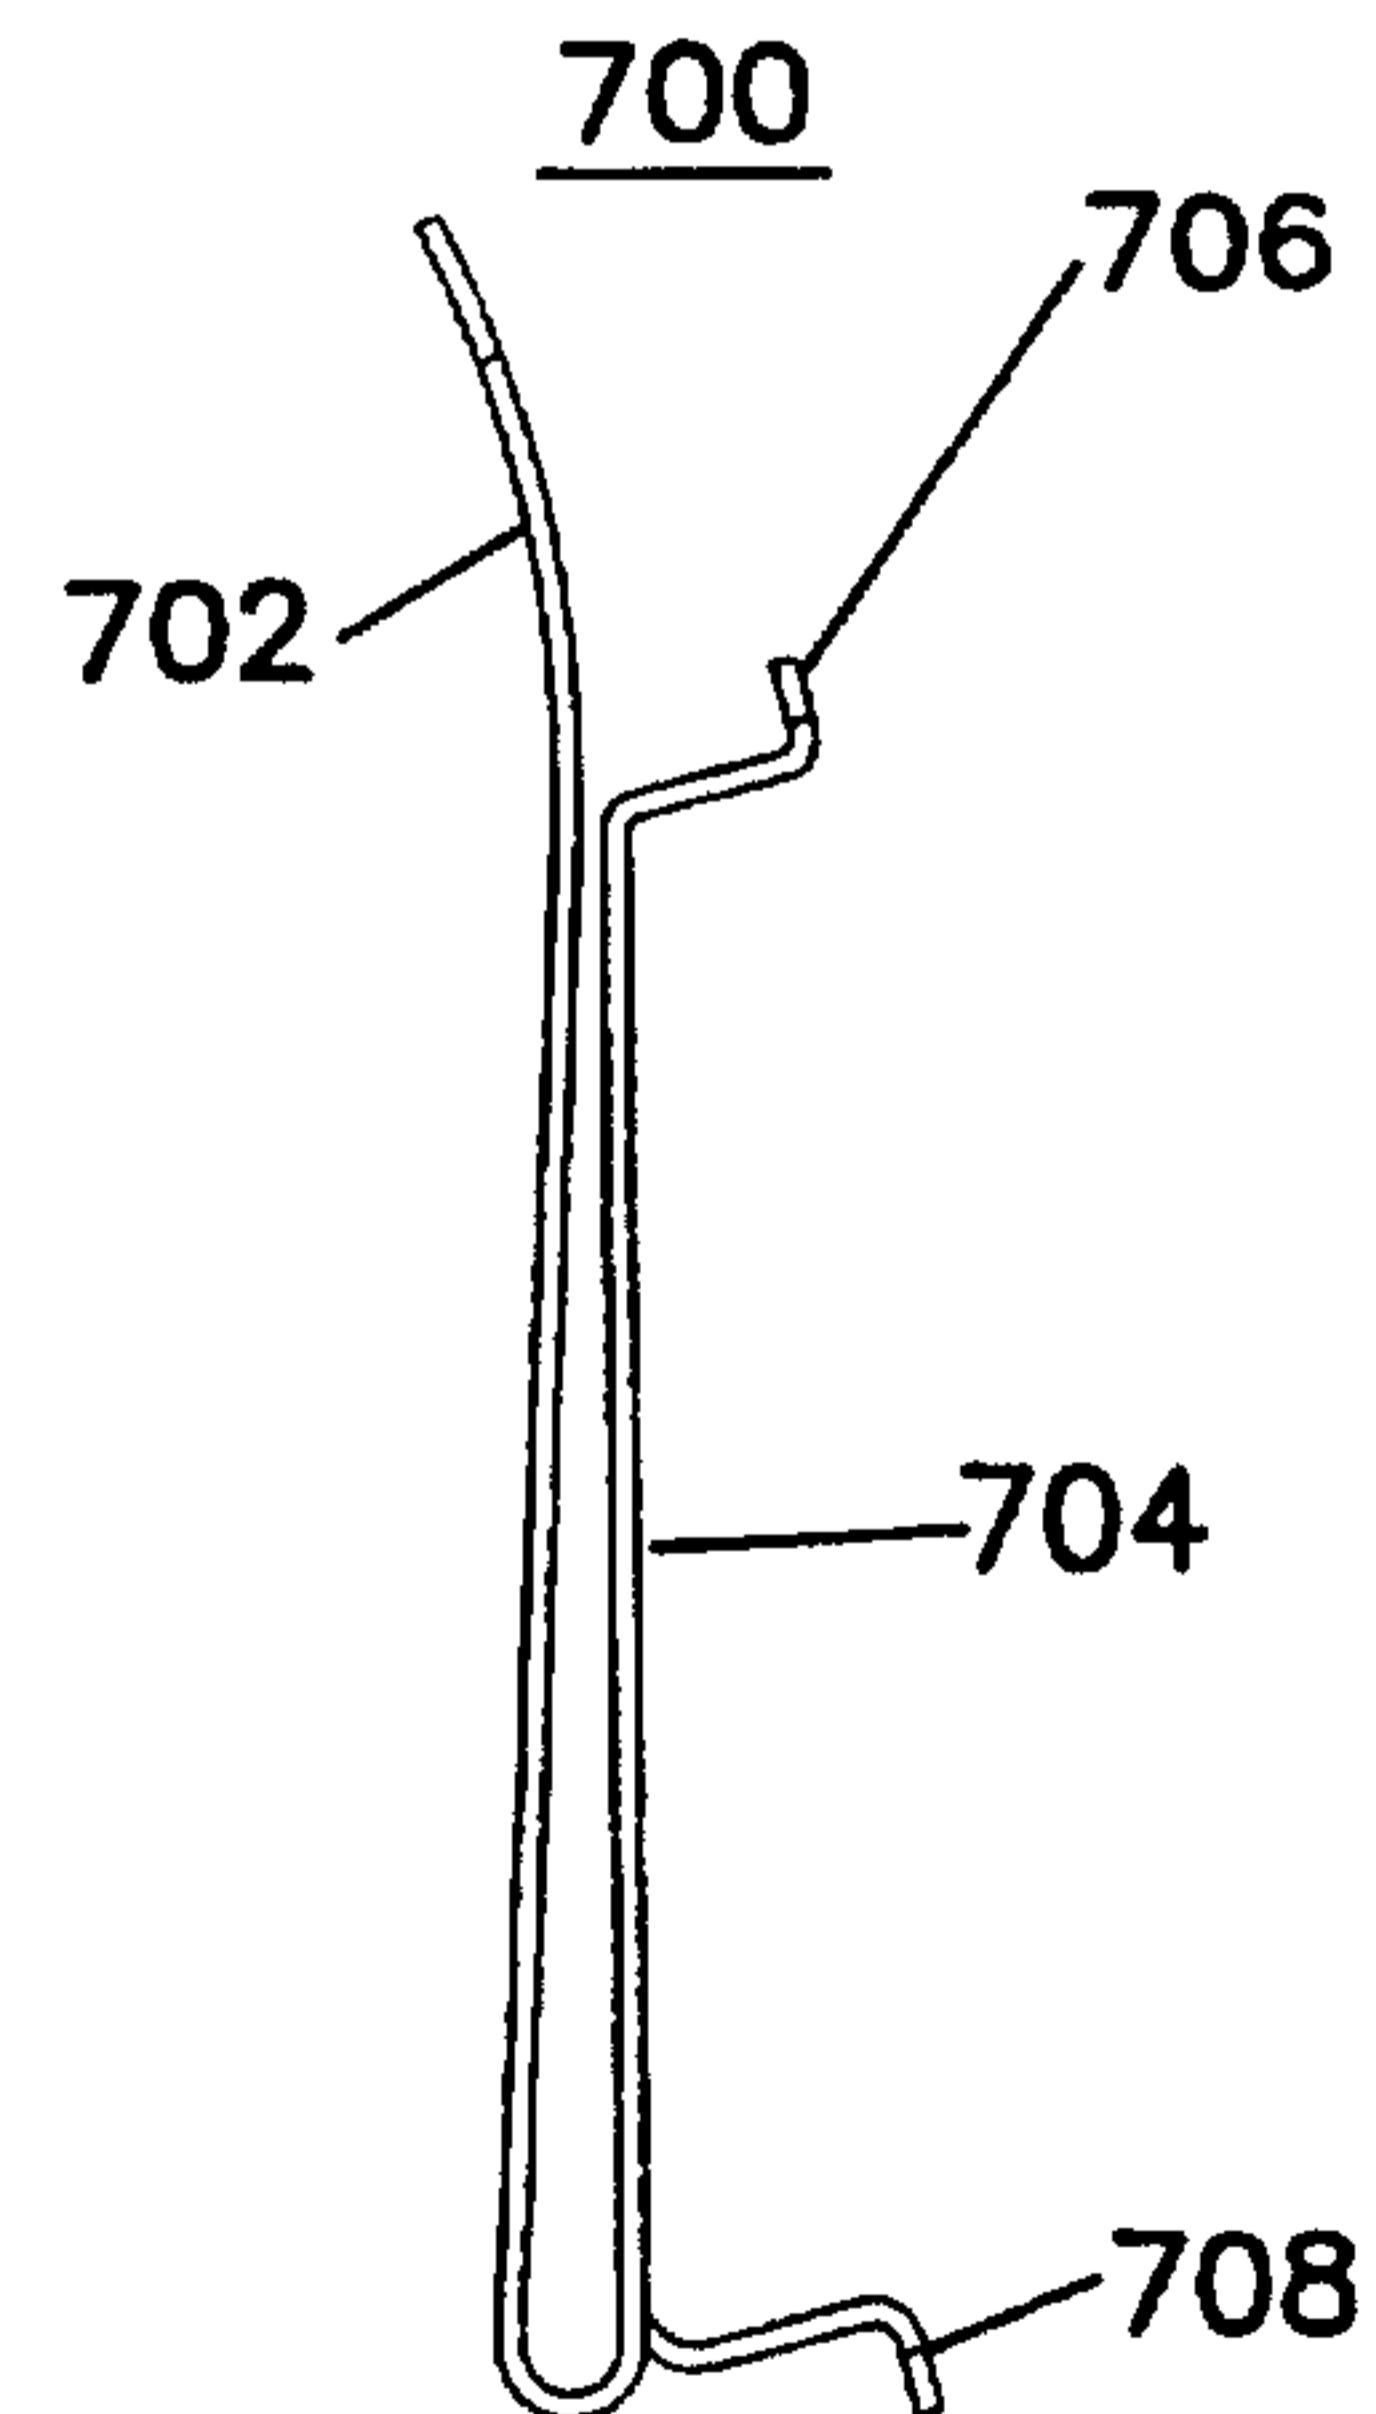

9/10

100

FIG. 8

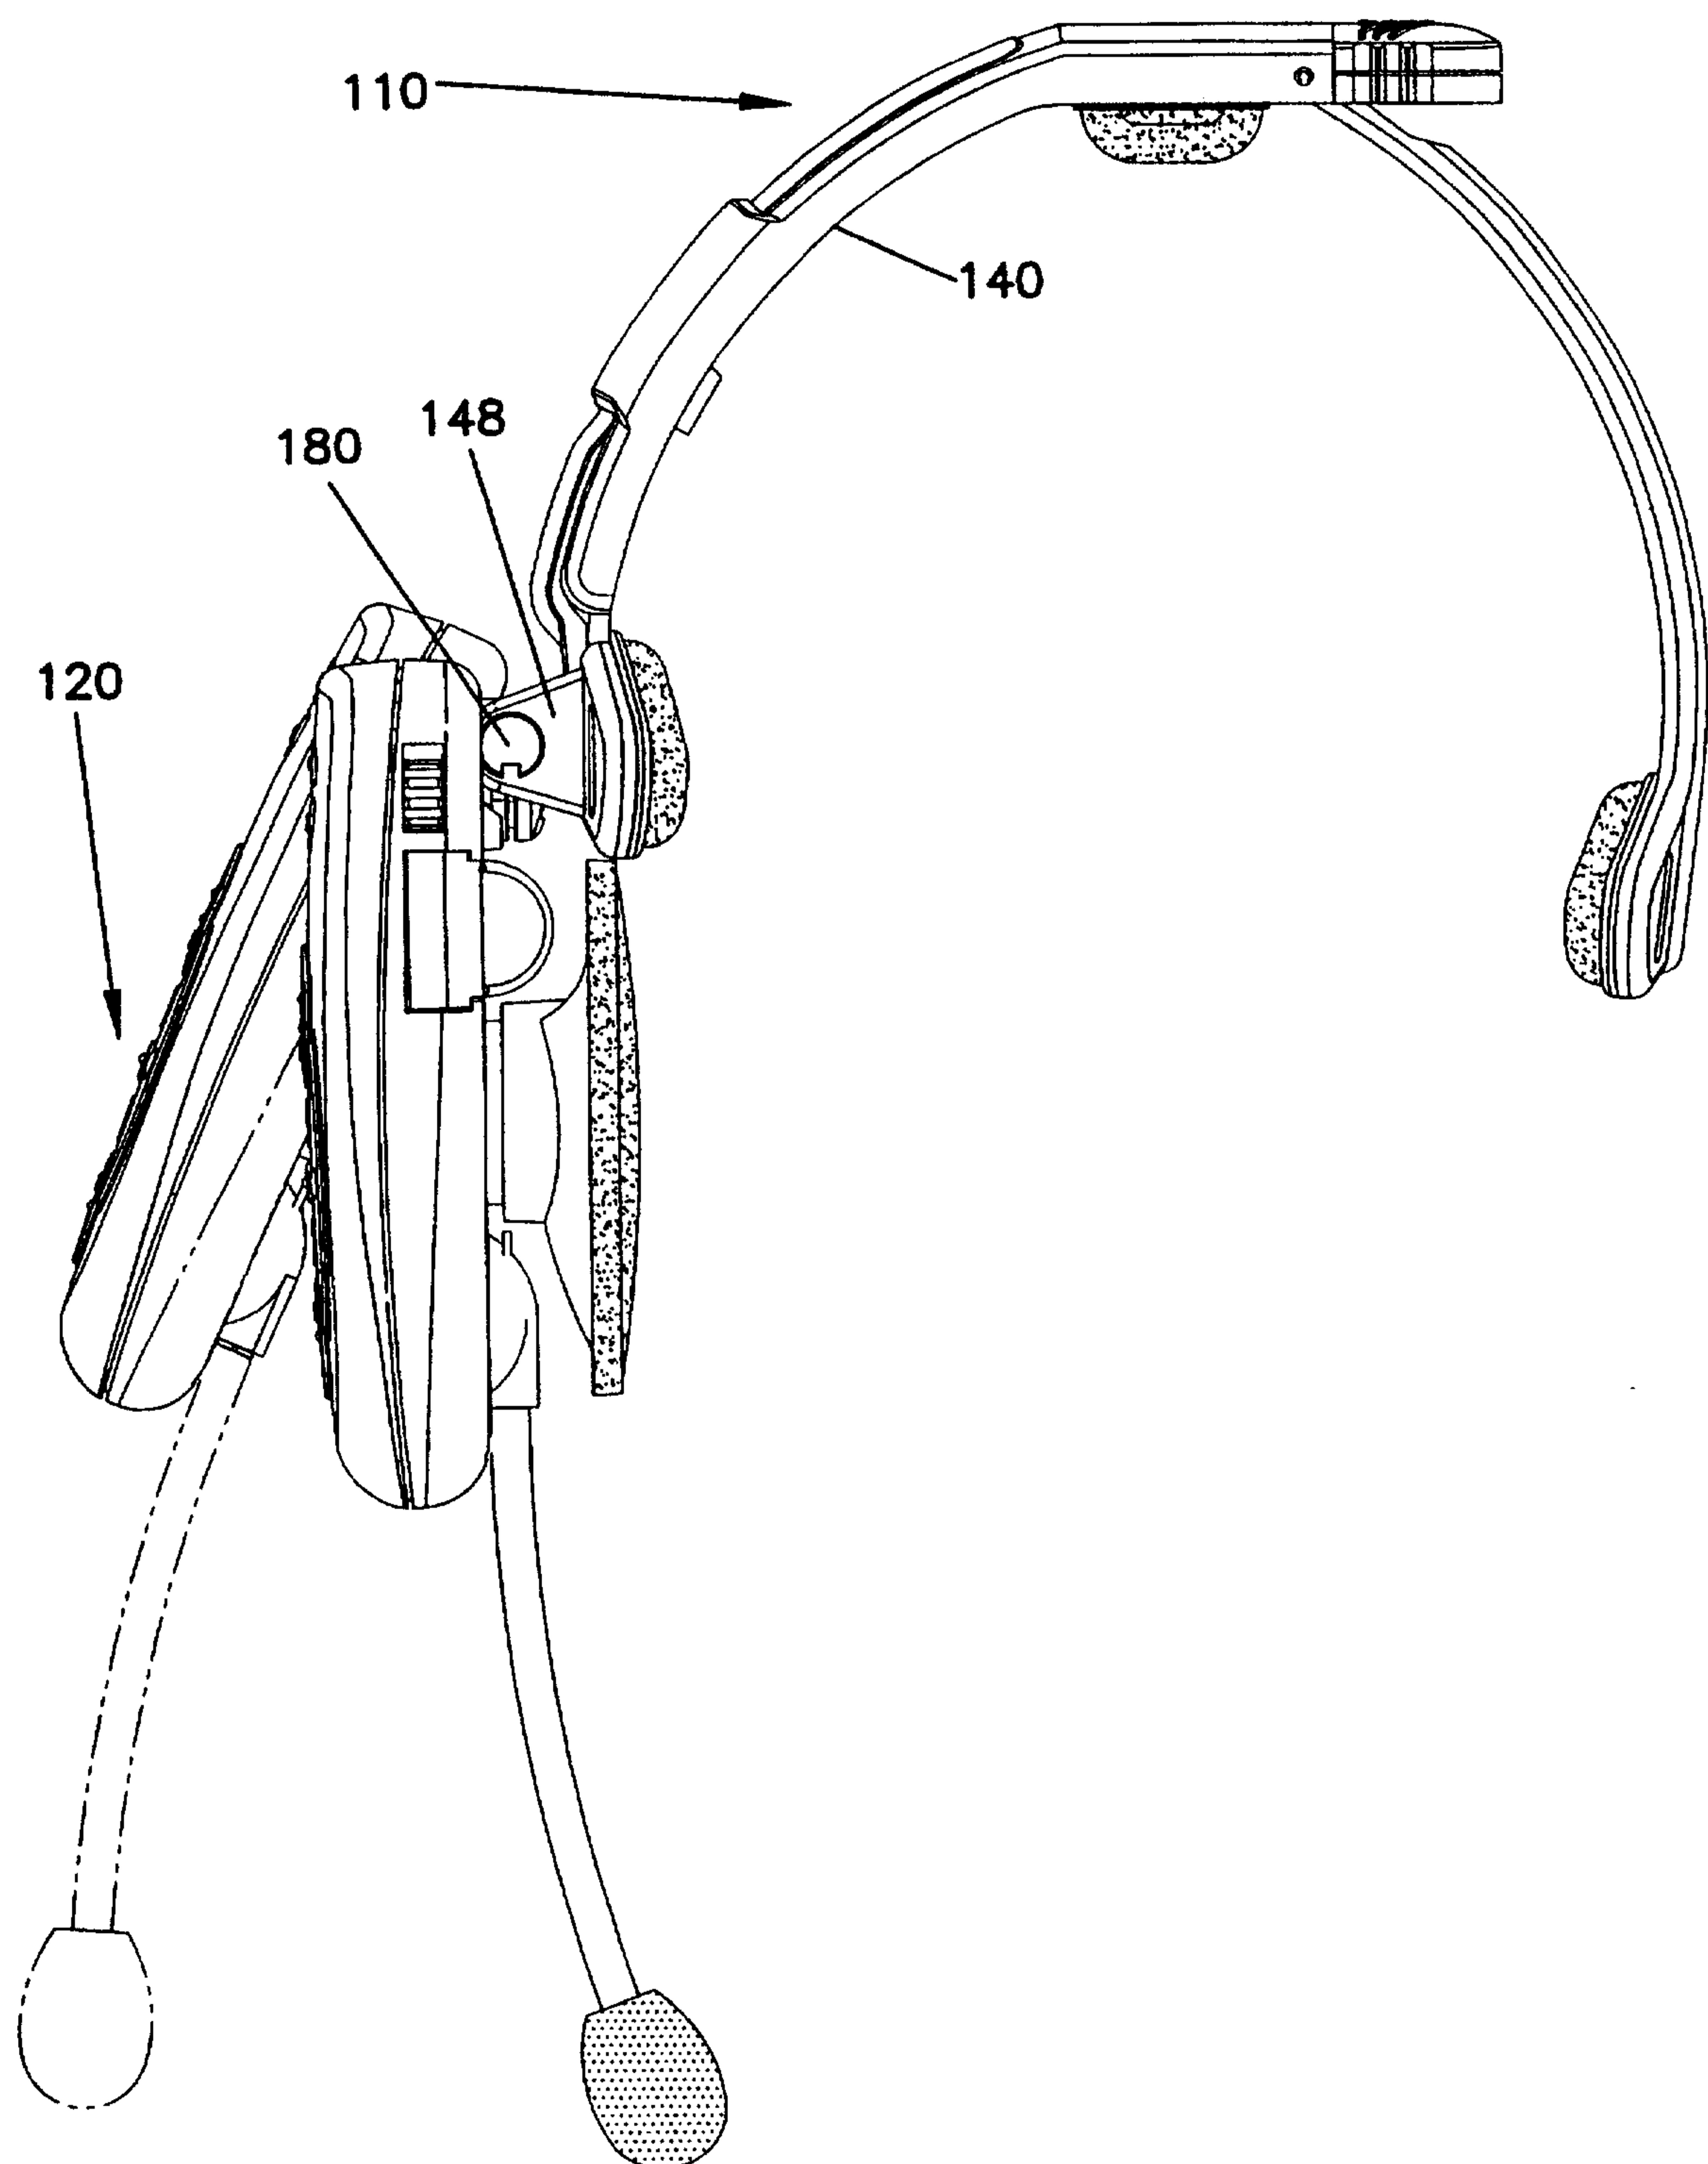

10/10

FIG. 9

