



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Title: "A COOLING SYSTEM, A COOLER AND A METHOD FOR CONTROLLING A COMPRESSOR"

5 The present invention relates to a system and a method for controlling the actuation of a compressor and particularly a compressor applied to cooling systems in general, this system and method enabling one to eliminate the use of thermostats or other means of measuring temperature usually employed in this type of system.

10 The basic objective of a cooling system is to maintain low temperature inside one (or more) compartment(s), making use of devices that transport heat from the interior of this (these) environment(s) to the external environment. It uses the measurement of the temperature inside this (these) environments to control the devices responsible for transporting heat, trying to keep the temperature within limits pre-established for the type of cooling system in question.

15 Depending upon the complexity of the cooling system and of the kind of application, the temperature limits to be maintained are more restricted or not.

One usual way of transporting heat from the interior of a cooling system to the external environment is to use a hermetic compressor connected to a closed circuit through which a cooling fluid circulates, wherein the compressor has the function of providing the flow of cooling gas inside the cooling system, being capable of imposing a determined difference in pressure between the points where evaporation and condensation of the cooling gas occur, whereby it enables the processes of transporting heat and creating low temperature to take place.

20 The compressors are sized to supply a capacity of cooling higher than that required in a normal situation of operation, foreseen critical situations of demand. In this case, some type of modulation of the cooling capacity of this compressor is necessary to maintain the temperature inside the cabinet within acceptable limits.

Description of the Prior Art

30 The most usual way of modulating the cooling capacity of a compressor is to turn it on and off according to the evolution of the temperature in the environment being cooled, by making use of a thermostat that turns the compressor on when the temperature in the environment being cooled exceeds a pre-established limit, and turns it off when the temperature in this environment has reached a lower

limit, also pre-established.

The known solution for this device of controlling the cooling system is the use of a bulb containing a fluid that expands and contracts with temperature, installed in such a way that it will be exposed to the temperature inside the environment to be cooled and mechanically connecting an electromechanical switch that is sensitive to this expansion and contraction of the fluid inside the bulb. It is capable of turning the switch on and off at predefined temperatures, according to the application. This switch interrupts the current supplied to the compressor, controlling its operation, maintaining the internal environment of the cooling system within pre-established temperature limits.

This is still the most widely used type of thermostat, since it is relatively simple, but it has drawbacks such as fragility during the mounting, because this is an electromechanical device containing a bulb with pressurized fluid and also has limitation of quality due to the constructive variability and wear. This generates a relatively high cost of repair in the field, because it is linked to an equipment of high aggregate value.

Another known solution for controlling a cooling system is the use of an electronic circuit capable of reading the temperature value inside the environment being cooled, by means of a PTC-type (Positive Temperature Coefficient) electronic-temperature sensor, for example, or some other type. The circuit compares this read temperature value with predefined references, generating a command signal to the circuit that manages the energy delivered to the compressor, providing correct modulation of the cooling capacity, so as to maintain the desired temperature in the internal environment being cooled, be it by turning on or off the compressor, or by varying the delivered cooling capacity.

This solution provides a quite reliable and precise control of the temperature, further enabling one to perform more complex or additional functions. It is found in more sophisticated systems, which have a higher aggregate value.

A drawback is the relatively higher cost when compared with that of the electromechanical solution and, at best, with an equivalent cost for simple versions, when the device is employed in the basic function of keeping the temperature within certain limits.

Another solution for controlling the temperature in an environment being cooled is described in document US 4,850,198, which discloses a cooling system

that comprises compressor, condenser, expansion valve and evaporators, besides providing control over energizing the compressor. This control is effected by means of a microprocessor in accordance with a temperature readout from a thermostat determining the energizing or no energizing of the compressor on the basis of maximum and minimum predetermined temperature limits. According to this system, one still foresees control over time of operation of the compressor in function of the temperature measured in the environment being cooled.

Objectives of the Invention

One objective of the present invention is to provide means for controlling the temperature inside a cooling system, eliminating altogether the use of thermostats or other temperature-measuring means for controlling the cooler, thus achieving a more simple control, eliminating unnecessary electric connections in the system for installation of the temperature sensor, and obtaining a cheaper system.

Another objective of the present invention is to provide a method for controlling a compressor, wherein the use of a temperature sensor is dispensed with, so as to obtain an economically more efficient construction.

Brief Description of the Invention

The objectives of the present invention are achieved by means of a cooling system comprising a compressor that is electrically fed and controlled by means of an electronic circuit. The electronic circuit comprises a circuit for measuring an electric power supplied to the compressor and a microcontroller. A time variable is stored in the microcontroller, the measuring circuit measures the electric power supplied to the compressor, the microcontroller compares the measurement of the electric power with reference power values previously stored in the microcontroller, the microcontroller alters the operation status of the compressor in function of the electric power and of the time variable.

Further, the objectives of the present invention are still achieved by means of a compressor-controlling method comprising the steps of storing, in a variable, the power value measured at the moment when a period of time counted from the moment of turning on compressor has passed, and altering the value of a time variable corresponding to a time in which the compressor remains off, in function of a proportion of value of the variable and a previously-stored value.

Brief Description of the Drawings

The present invention will now be described in greater detail, with refer-

ence to an embodiment represented in the drawings. The figures show:

- Figure 1: a schematic diagram of the compressor-controlling system according to the present invention;
- Figure 2: a flow diagram of the compressor-controlling method according to the present invention.

Detailed Description of the Figures

As can be seen in figure 1, the system basically comprises a condenser 21, an evaporator 22, a capillary control element 23 and a compressor 20. The condenser 21 is positioned outside the environment to be cooled or refrigeration environment 22', while the evaporator 22 is positioned inside the refrigeration environment 22' for supplying the cooled-air mass. Control over the compressor 20 is carried out by means of a control circuit TE, which in turn is composed by a microcontroller 10 provided of a temporizer TP, in addition to a measuring circuit ME for measuring the electric power P_n supplied to the compressor 20.

According to the present invention and based on the fact that the power P_n absorbed by the compressor 20 in a cooling system represents a very strong direct correlation with the temperature from evaporation of the cooling gas, which in turn represents, with good approximation, the temperature inside the cooled cabinet or refrigeration environment 22'. One may use as a reference the value of power P_n absorbed by the compressor 20 to determine when the temperature in the cabinet has reached the expected value, then turning off the compressor 20. The correlation is valid, since as the volume of coolant in circulation decreases, the absorbed power P_n decreases and, besides, as the temperature in the refrigeration environment 22' decreases less fluid is evaporated, and therefore less fluid circulates, thus reducing the absorbed power P_n .

This means that, as the temperature in the refrigeration environment 22' decreases, the gas-evaporation temperature also decreases, and one can observe a proportional decrease in the power P_n absorbed by the compressor 20. If one compares it with a predefined reference P_{rl} , P_{rd} , one can define the moment of turning off the compressor 20 or changing its cooling capacity, thus controlling the temperature inside the refrigeration environment 22', without the need for temperature sensors, as is the case in the prior art.

Thus, in order to maintain the temperature in the refrigeration environment 22' within an adequate range, the compressor 20 is turned on and off intermit-

tently by means of the controller TE, which updates the temporizer TP, which will allow one to turn on the compressor 20 again, after a determined time has passed, initiating a new cooling cycle. This wait time until the compressed is turned on again may be dynamically adjusted in function of the power P_n absorbed by the compressor 20, right after the beginning of operation at each new cycle, since this power P_n will reflect the temperature inside the refrigeration environment 22' at the moment of turning on the compressor 20 again, and may be adjusted by correction of this time in which the compressor 20 is kept off.

As can be seen in figure 1, for measurement of the power P_n , the measuring circuit ME includes means 15, 16, which enable one to measure the voltage and current supplied to the compressor and make the product of these quantities, which will result in power value supplied to the compressor. These means feed this power information to a microcontroller circuit 10 responsible for actuating the compressor 20 by means of a controller 11. The measurement of the power P_n is carried out by reading the current I that circulates in the resistor R and by reading the voltage V applied to the compressor 20, such values being multiplied by each other to obtain the power value P_n . The value P_n should still be corrected in function of the power factor when an alternate-current compressor 20 is used. One may also apply correction of the value of power absorbed by the compressor in function of the feed voltage value, compensating the variations in efficiency presented by the motor at different feed voltages.

In order to operate the system of the present invention, two values of electric power are determined: power P_{rd} corresponding to the minimum temperature desired inside the refrigeration environment 22'; and the power P_{rl} corresponding to the maximum temperature desired inside the refrigeration environment 22'.

The intermittence control of the compressor 20 is carried out by the microcontroller 10, which compares the measured power value P_n absorbed by the compressor with a power variable PRD corresponding to the minimum temperature desired for the interior of the cabinet being cooled, commanding the turning-off of the compressor when the measured power value P_n is equal or lower than this reference value PRD, keeping the compressor off during a period of time predefined by a variable $td(n)$, commanding the turning-on of the compressor 20 again immediately after this time $td(n)$ has passed.

After turning on the compressor 20 again and after the stabilization time

te has passed, the microcontroller 10 will take the measured power value $P_n(t_e)$ to effect correction of the variable $td(n)$, calculating the new value of $td(n+1)$ in function of the proportion between the power value $P_n(t_e)$ measured right after the start of functioning of the compressor and the value of the reference variable P_{rl} .

- 5 Thus, when the power value $P_n(t_e)$ at the beginning of an operation cycle is higher than the reference variable P_{rl} , the time during which the compressor 20 remains off in the next stoppage cycle $td(n+1)$ should be reduced. In the same way, the time during which the compressor 20 remains off in the next stoppage cycle ($td(n+1)$) should be increased if the power $P_n(t_e)$ measured right after the start of
10 operation of the compressor 20 is lower than the reference variable P_{rl} .

An implementation of this process may be carried out by the algorithm:

$$Td(n+1) = td(n) * P_{rl} / P_n(t_e)$$

- This equation of the proposed TE circuit is summed up by the flow diagram illustrated in figure 2, wherein the method should include at least the step of
15 storing the variable $P_n(t_e)$ of the power value P_n measured at the moment when a period of time t_e counted from the moment of turning off the compressor 20 has passed, and an additional step of altering the value of a time variable td in function of the proportion of the variable value $P_n(t_e)$ and the power value (P_{rl}), which is already previously stored in the microcontroller 10.

- 20 The wait time t_e should be determined by the project and should be sufficient for the compressor to accelerate after the start, thus preventing the power value read right after the start from becoming distorted due to the compressor-acceleration energy and due to the establishment of the initial system-operation pressures.

- 25 Also, a maximum time during which the compressor 20 remains inactive T_{dm} should be foreseen, so that the compressor can be turned on again.

- The power reference P_{rd} as well as the reference P_{rl} are defined by the project, or they may be defined at the assembly line of the cooling system, by making use of a temperature sensor belonging to the process in the assembly line of the
30 cooler, which will measure the temperature inside the refrigeration environment 22' and send a signal to the control circuit TE of the compressor 20 when the desired minimum and maximum temperatures are reached, enabling this control circuit TE to memorize the power values corresponding to each temperature, thus fixing the desired references P_{rd} and P_{rl} .

A preferred embodiment having been described, one should understand that the scope of the invention embraces other possible variations, being limited only by the contents of the accompanying claims, which include the possible equivalents.

CLAIMS

1. A cooling system comprising a compressor (20) fed electrically and
5 controlled by means of an electronic circuit (TE), the system being characterized in that:

- the electronic circuit (TE) comprises a measuring circuit (ME) for measuring an electric power (Pn) supplied to the compressor (20), and a microcontroller (10),

10 - a time variable (td) is stored in the microcontroller (10),

- the measurement circuit (ME) effects a measurement of the electric power (Pn) supplied to the compressor (20), the microcontroller (10) compares the measure of the electric power with power reference values (PrI) and (Prd) previously stored in the microcontroller (10), the microcontroller alters the state of operation of
15 the compressor (20) in function of the electric power (Pn) and of the time variable (td).

2. A system according to claim 1, characterized in that the compressor (20) is selectively turned on and off by the microcontroller (10), the compressor remaining on until the value of power (Pn) absorbed by the compressor (20) is lower
20 than or equal to the reference variable (Prd), and remaining off for a time (td), this time (td) being proportional to the relationship between the power reference variable (PrI) and the value of power absorbed by the compressor at the start of its operation cycle (Pn(te)).

3. A system according to claim 2, characterized in that the measurement
25 of the power (Pn) is stored at a variable (Pn(te)) corresponding to the power value measured at each start of the time cycle in which the compressor (20) remains on, after a period of time (te) counted from the turning-on of the compressor (20) has passed.

4. A system according to claim 3, characterized in that the time (te) corresponds to a wait time for stabilization of the compressor (20).
30

5. A system according to claim 3, characterized in that the value of the time-reference variable is high when the value of the measured electric power (Pn(te)) is lower than the value of the electric-power reference variable (PrI) previ-

ously stored.

6. A system according to claim 3, characterized in that the value of the time-reference variable (t_d) is decreased when the value of the measured electric power ($P_n(t_e)$) is higher than the value of the electric-power reference variable (P_{rl}) previously stored.

7. A system according to claim 3, characterized in that the circuit (TE) is provided with a temporizer (TP) capable of measuring the time (t_d) and turning on the compressor (20) when the time (t_d) is longer than a maximum time of inactivity of the compressor (T_{dm}).

8. A cooler, characterized by comprising a cooling system as defined in claims 1 – 7.

9. A method for controlling a compressor (20) fed electrically and controlled by means of an electronic circuit (TE) that keeps the compressor (20) alternately on and off, to cool a refrigeration environment (22'), the method being characterized in that it comprises steps of:

- storing a variable ($P_n(t_e)$) of a reference value (P_n) measured at the moment when a period of time (t_e) counted from the moment of turning on the compressor (20) has passed;

- altering the value of a time variable (t_D) corresponding to a time when the compressor (20) remains off in function of a proportion of the value of the variable ($P_n(t_e)$) and a power value (P_{rl}) previously stored.

10. A method according to claim 9, characterized in that, after the step of altering the time (t_D), the compressor (20) is turned off when the power value (P_n) is lower than or equal to a reference (P_{rd}) proportional to the minimum temperature of the refrigeration environment (22'), is kept off during the period of time (t_d) and is kept on after the period of time (t_d) has passed.

11. A method according to claim 9, characterized in that, prior to the step of turning off the compressor (20), the method comprises a step of comparing the power value (P_n) with a power value (P_{rd}).


12. A method according to claim 9, characterized in that, prior to the step of storing the variable ($P_n(t_e)$), the compressor (20) is kept on as long as the power (P_n) is higher than the reference (P_{rd}).

13. A method according to claim 9, characterized in that, in the step of altering the time variable (t_D), the time (t_D) is increased when the power value

($P_n(t_e)$) is lower than the previously-stored value (P_{rl}) corresponding to a maximum value of temperature in the refrigeration environment (22').

14. A method according to any one of claims 9 – 13, characterized in that, during the time when the compressor (20) is turned on, its cooling capacity is
- 5 corrected in the proportion of the power value (P_n).

15. A method according to claim 9, characterized in that, in the step of altering the variable (t_D), the time (t_D) is reduced when the value of the measured power is higher than or equal to the previously-stored value (P_{rl}) corresponding to a maximum value of temperature in the refrigeration environment (22').

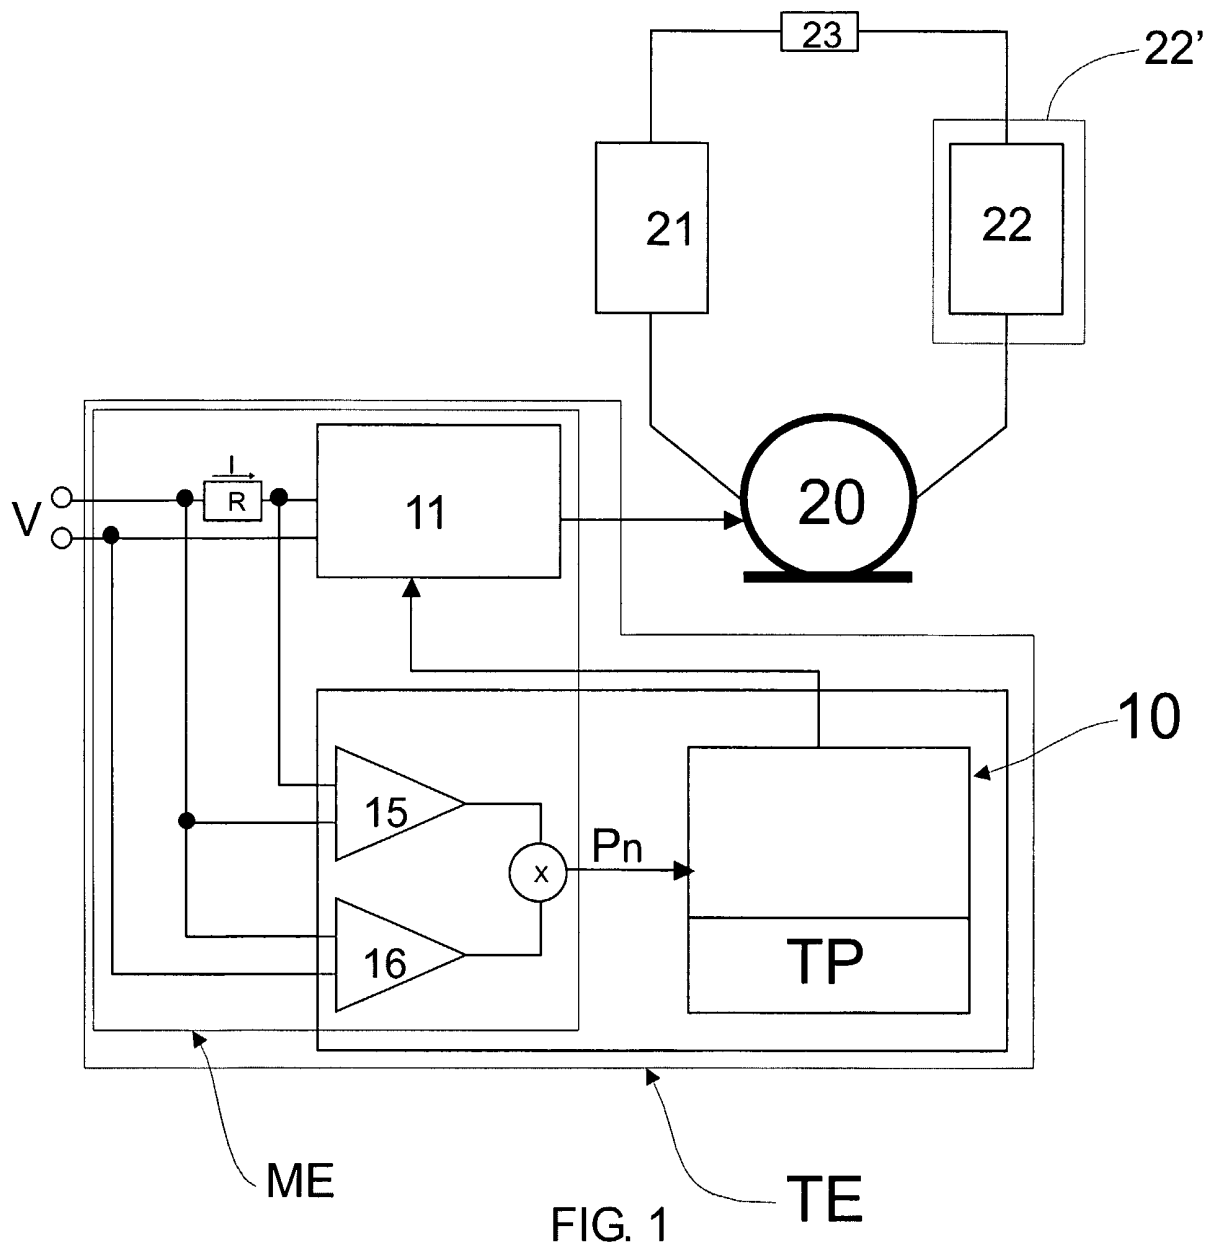

2 / 2

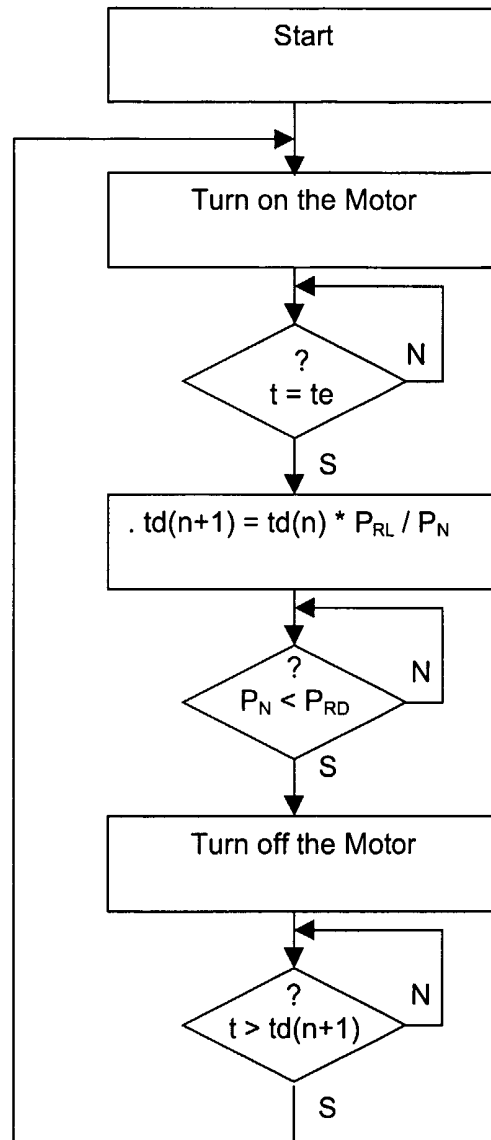


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/BR 02/00004

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 F25B49/02 G05D23/19

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F25B F25D G05D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 202 966 A (PRESTCOLD LTD) 5 October 1988 (1988-10-05) the whole document ---	1-15
A	US 4 653 285 A (POHL WALTER J) 31 March 1987 (1987-03-31) the whole document ---	1,8,9
A	US 4 722 019 A (POHL WALTER J) 26 January 1988 (1988-01-26) the whole document ---	
A	DE 198 04 330 A (K BUSCH GMBH DRUCK & VAKUUM DR) 12 August 1999 (1999-08-12) the whole document ---	
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

10 May 2002

Date of mailing of the international search report

21/05/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Busuiocescu, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/BR 02/00004

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 894 282 A (MACFARLAND JR RAYMOND W) 8 July 1975 (1975-07-08) the whole document -----	

INTERNATIONAL SEARCH REPORT

International Application No
PCT/BR 02/00004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2202966	A	05-10-1988	EP 0281317 A1 WO 8806703 A1 JP 1502357 T	07-09-1988 07-09-1988 17-08-1989
US 4653285	A	31-03-1987	US 4724678 A	16-02-1988
US 4722019	A	26-01-1988	NONE	
DE 19804330	A	12-08-1999	DE 19804330 A1 AU 2722999 A WO 9940325 A1	12-08-1999 23-08-1999 12-08-1999
US 3894282	A	08-07-1975	NONE	