



(22) **Date de dépôt/Filing Date:** 2015/11/02

(41) **Mise à la disp. pub./Open to Public Insp.:** 2016/06/03

(30) **Priorité/Priority:** 2014/12/03 (US14/559,276)

(51) **Cl.Int./Int.Cl.** *H01H 71/10* (2006.01),
H01H 3/04 (2006.01)


(71) **Demandeur/Applicant:**
EATON CORPORATION, US

(72) **Inventeur/Inventor:**
MALONEY, JAMES GERARD, US

(74) **Agent:** BERESKIN & PARR LLP/S.E.N.C.R.L., S.R.L.

(54) **Titre : DISJONCTEURS DOTES DE CONTACT MOBILE A ACTION TALON-POINTE**

(54) **Title: CIRCUIT BREAKERS WITH MOVING CONTACT HAVING HEEL-TOE ACTION**

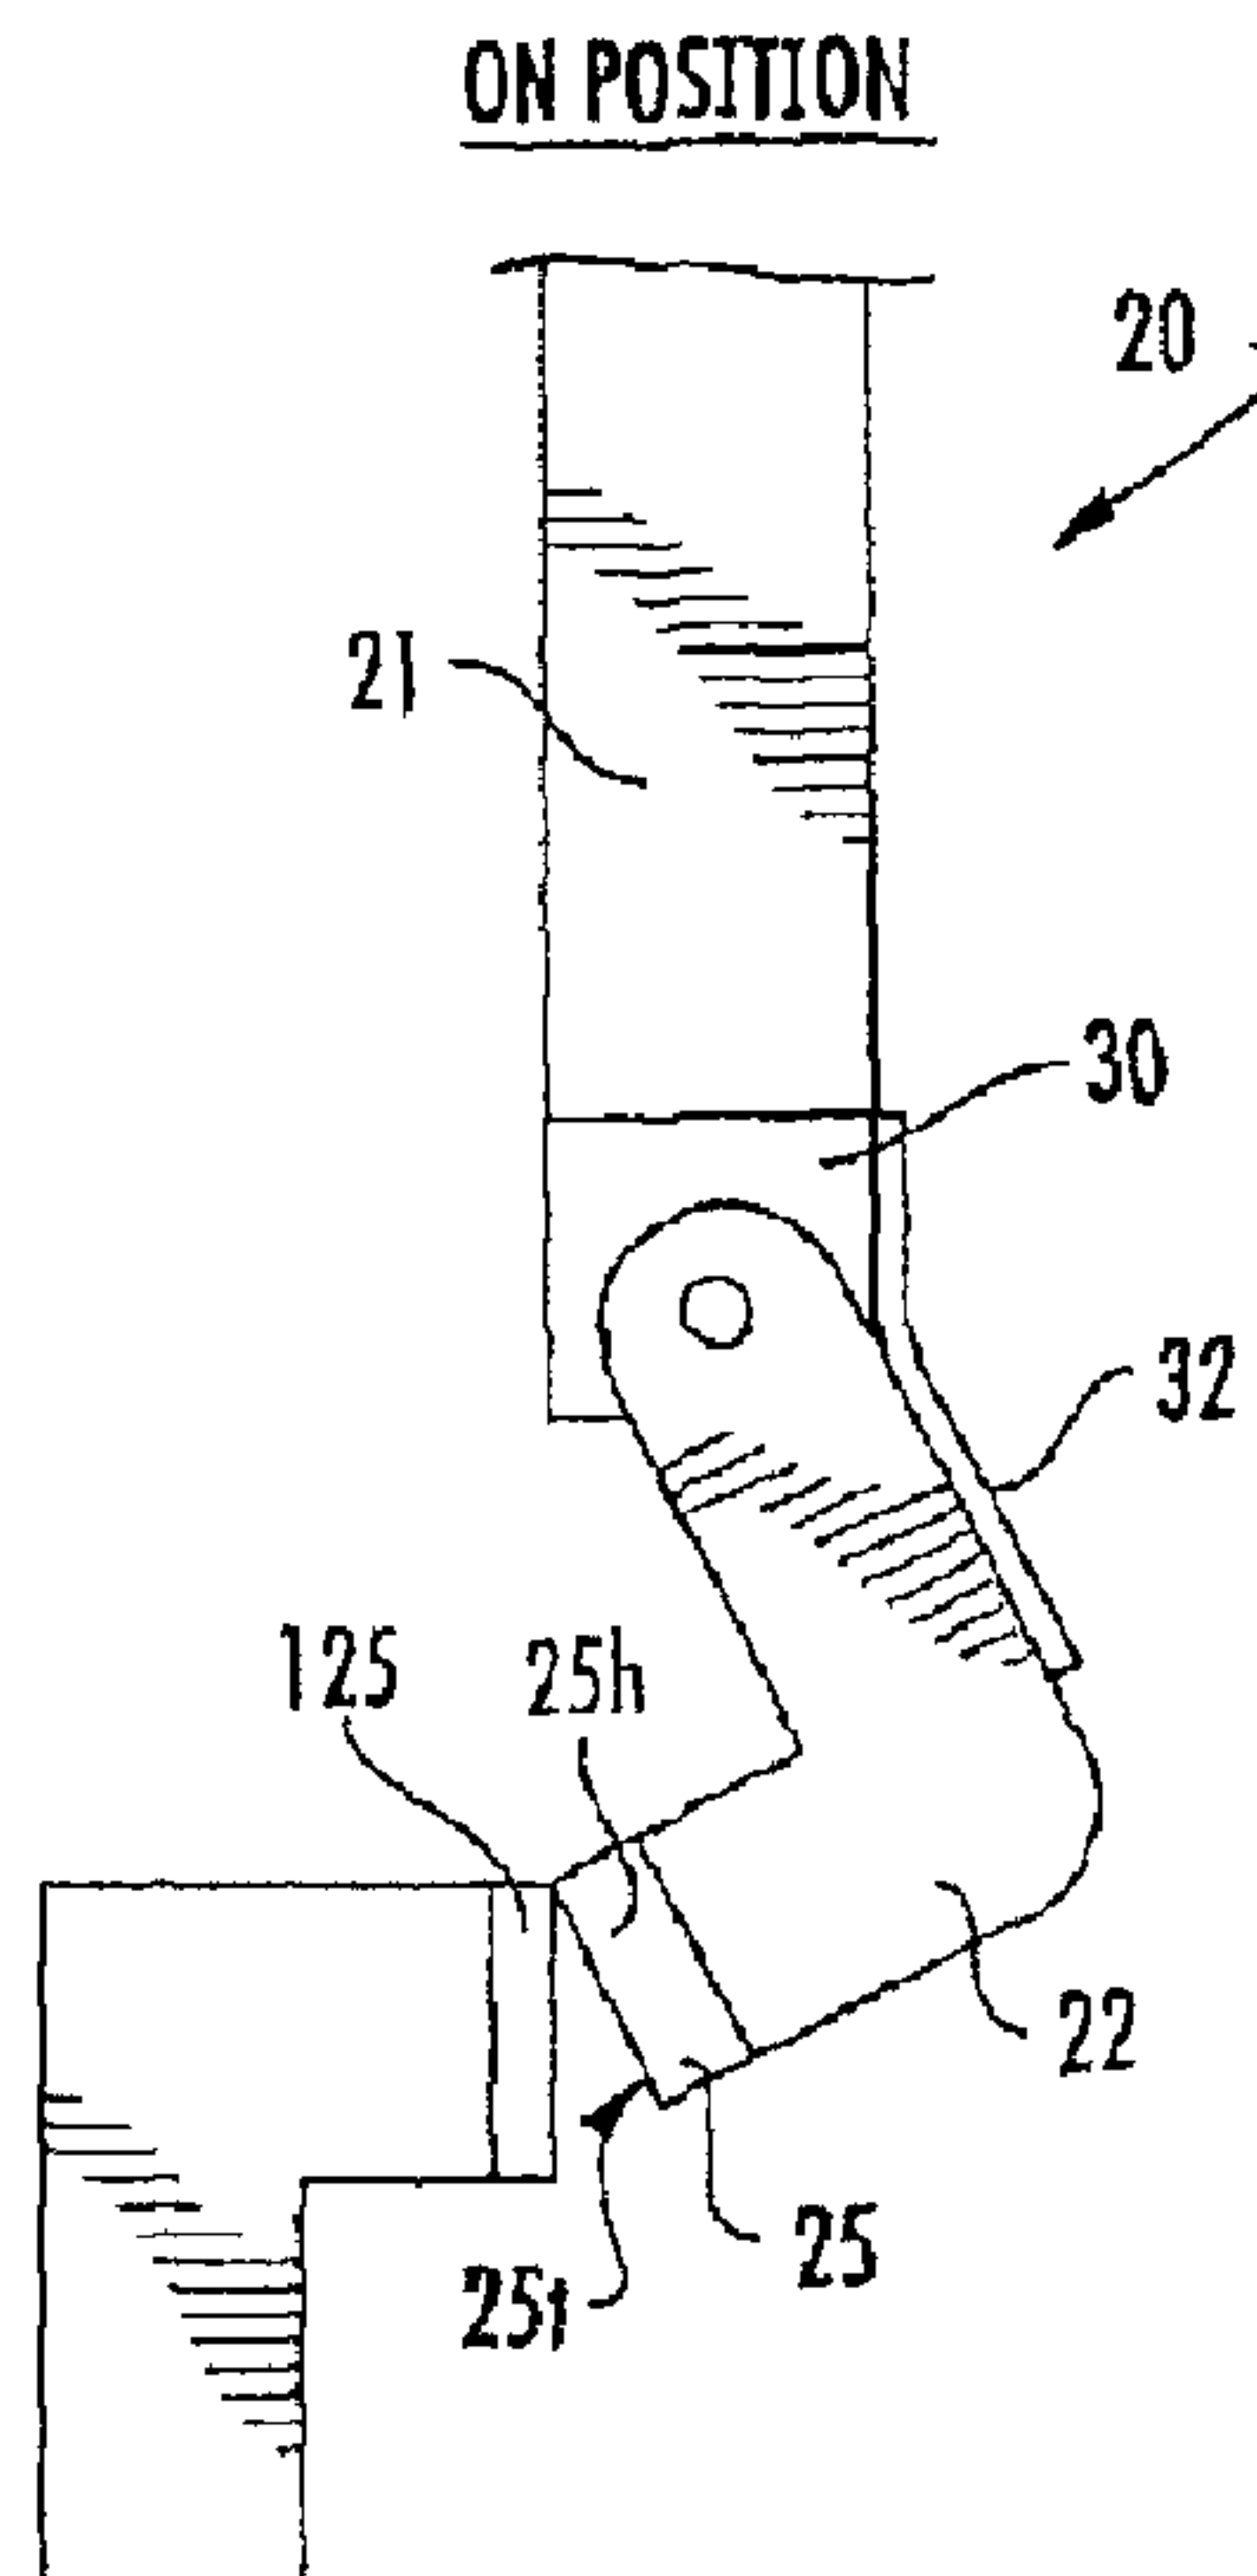

(57) **Abrégé/Abstract:**

Circuit breakers with moving contacts having heel-toe action are configured to direct arcing across a small portion of a stationary contact surface to an adjacent arc chute to thereby alleviate deterioration due to arcing and improve conductivity of a major portion of the stationary contact and moving contact surface over time.



Attorney Docket No. 1133-34
14-MCB-631

CIRCUIT BREAKERS WITH MOVING CONTACT HAVING HEEL-TOE ACTION

Abstract

[0086] Circuit breakers with moving contacts having heel-toe action are configured to direct arcing across a small portion of a stationary contact surface to an adjacent arc chute to thereby alleviate deterioration due to arcing and improve conductivity of a major portion of the stationary contact and moving contact surface over time.

Attorney Docket No. 1133-34
14-MCB-631

CIRCUIT BREAKERS WITH MOVING CONTACT HAVING HEEL-TOE ACTION

Field of the Invention

[0001] The present invention relates to circuit breakers.

Background of the Invention

[0002] Circuit breakers are one of a variety of overcurrent protection devices used for circuit protection and isolation. The circuit breaker provides electrical protection whenever an electric abnormality occurs. In a typical circuit breaker, current enters the system from a power line and passes through a line conductor to a stationary contact fixed on the line conductor, then to a movable contact. The movable contact is fixedly attached to a pivoting arm. As long as the stationary and movable contacts are in physical contact, current passes from the stationary contact to the movable contact and out of the circuit breaker to down-line electrical devices.

[0003] In the event of an overcurrent condition (e.g., a short circuit), extremely high electromagnetic forces can be generated. The electromagnetic forces repel the movable contact away from the stationary contact. Because the movable contact is fixedly attached to the rotating arm, the arm pivots and physically separates the stationary and movable contacts, thus tripping the circuit. Upon separation of the contacts and blowing open the circuit, an arcing condition occurs. The breaker's trip unit will trip the breaker which will cause the contacts to separate.

Summary of Embodiments of the Invention

[0004] Embodiments of the invention are directed to circuit breakers with moving contacts having heel-toe action which are configured to direct arcing across a small portion of a stationary contact surface to arc chutes to thereby alleviate deterioration due to arcing and improve conductivity of a major portion of the stationary contact and moving contact surface over time.

[0005] Embodiments of the invention are directed to circuit breakers that include a moveable contact arm. The contact arm has first and second cooperating arm members coupled together. The first arm member engages a pivotable handle and the second arm member

Attorney Docket No. 1133-34
14-MCB-631

comprising an electrical contact. The second arm member can move inward and outward relative to the first arm member.

[0006] A lower end portion of the first arm member can be pivotably attached to an upper end portion of the second arm member.

[0007] The circuit breaker can include a stationary contact and an arc chute. Only a toe portion of the second arm member last engages a lower edge portion of a stationary contact prior to separation from the stationary contact when the arm moves toward an "OFF" position and/or in an opening position to thereby direct arcing into the arc chute and avoid arcing across a surface of the stationary contact above the lower edge portion.

[0008] Adjacent ends of the first and second cooperating arm members can be coupled together in a manner that allows an upper end of the second arm member to move inward and outward and up and down relative to a lower end portion of the upper arm member.

[0009] The circuit breaker can include a sleeve affixed to a lower end portion of the first arm member. The sleeve can have a slot. The second arm member can also include a slot. The slot of the sleeve and the slot of the second arm member can be aligned so as to allow a pin to extend therethrough and allow the pin to travel inward, outward, upward and downward to place the second arm member in different positions.

[0010] The first arm member can hold a lower end of mechanism spring and can have a curvilinear receiving pocket that faces the upper end of the second arm member. The mechanism spring and/or another spring attached to the first arm member can apply a downwardly extending first force vector to the second arm member. The second arm member can engage a spring configured to apply an upwardly extending second force vector in a direction opposing the first force vector.

[0011] The spring that applies the second force vector can extend off a back surface of the first arm member down about a back surface of the second arm member.

[0012] An upper segment of the second arm member can be spaced apart from the lower segment of the first arm member at the coupling of the first and second arm members.

[0013] The second arm member can include an upwardly extending slot that is aligned with a cooperating slot in a sleeve attached to the first arm member or to a slot in the first arm member. A pin can extend through the slots and the pin in the cooperating slots allows the second arm member to translate relative to the first arm member.

Attorney Docket No. 1133-34
14-MCB-631

[0014] The circuit breaker can include a spring that is attached to and extends below the first arm member behind an upper end portion of the second member to force the second arm member to rotate forward.

[0015] The circuit breaker can include a mechanism spring held by a lower end of the first arm member. The first arm member can include a knee that resides above the lower end of the first arm member that faces the mechanism spring.

[0016] The circuit breaker can include a mechanism spring held by a lower end segment of the first arm member. The lower end segment of the arm member can have a smaller width than a width of the second arm member adjacent thereto and resides spaced apart a distance from an adjacent underlying portion of the second arm member.

[0017] Other embodiments are directed to methods of operating a circuit breaker. The methods include: (i) placing only a toe segment of a moving contact against a stationary contact at a lower edge portion of the stationary contact immediately prior to an arcing action; and (ii) directing all arcing down into an adjacent arc chute providing an arc-free contact surfaces above the toe segment of the moving contact and above the lower edge portion of the stationary contact.

[0018] The placing step can be carried out by using a moveable contact arm having first and second arm members coupled together, the placing comprises translating the second arm member relative to the first arm member.

[0019] The placing step can be carried out by using a moveable contact arm having first and second arm members pivotably coupled together by pivoting the second arm member relative to the first arm member.

[0020] The placing step can be carried out by using a moveable contact arm having first and second arm members coupled together with at least one pin and cooperating slots. The pin can travel in the slots allowing the second arm member to travel through different positions.

[0021] The placing step can be carried out using a moveable contact arm having an upper arm member coupled to a lower arm member and applying spring force vectors to only the lower arm member that (i) push an inner facing surface of the lower arm member downward and (ii) push an outer facing surface of the lower arm member inward.

[0022] The method can include applying a first spring force against a lower arm member of a moveable contact arm to rotate the lower arm member clockwise when opening and

Attorney Docket No. 1133-34
14-MCB-631

applying a second spring force using a main mechanism spring attached to an upper arm member of the moveable contact arm, the lower arm member configured to move inward, outward and up and down relative to the upper arm member whereby the second spring force is stronger than the first spring force so as to rock the lower arm member counter clockwise once in an "ON" position.

[0023] Still other embodiments are directed to circuit breakers that include a housing, a pivotable handle held by the housing and a moveable contact arm held in the housing. The arm has first and second cooperating arm members. The first arm member engages the pivotable handle and the second arm member includes an electrical contact and is configured to be able to translate inward and outward and/or pivot relative to the first arm member. The circuit breaker also includes a stationary contact in the housing configured to engage the electrical contact of the second arm member. At least one of the stationary contact or the second arm electrical contact includes silver in an amount between about 35 and 97%.

[0024] An upper portion of the second arm member can be pivotably attached to a lower portion of the first arm member. Only a toe portion of the second arm member electrical contact engages only a lower edge portion the stationary contact when the arm moves toward an OFF position and/or in an opening position to thereby direct arcing into the arc chute and avoid arcing across a surface of the stationary contact above the lower edge portion.

[0025] Further features, advantages and details of the present invention will be appreciated by those of ordinary skill in the art from a reading of the figures and the detailed description of the preferred embodiments that follow, such description being merely illustrative of the present invention.

[0026] It is noted that aspects of the invention described with respect to one embodiment, may be incorporated in a different embodiment although not specifically described relative thereto. That is, all embodiments and/or features of any embodiment can be combined in any way and/or combination. Applicant reserves the right to change any originally filed claim or file any new claim accordingly, including the right to be able to amend any originally filed claim to depend from and/or incorporate any feature of any other claim although not originally claimed in that manner. These and other objects and/or aspects of the present invention are explained in detail in the specification set forth below.

Attorney Docket No. 1133-34
14-MCB-631

Brief Description of the Drawings

[0027] **Figure 1A** is a schematic illustration of a conductive arm of a circuit breaker with a moving contact in an exemplary "ON" position according to embodiments of the present invention.

[0028] **Figure 1B** is a schematic illustration of the conductive arm shown in **Figure 1A** with the arm rotating toward an "OFF" position according to embodiments of the present invention.

[0029] **Figure 2** is a side cutaway view of an exemplary circuit breaker with the handle and conductive arm rotating toward an "OFF" position according to embodiments of the present invention.

[0030] **Figure 3** is a side cutaway view of the exemplary circuit breaker shown in **Figure 2** with the handle and conductive arm in an exemplary "ON" position according to embodiments of the present invention.

[0031] **Figure 4** is a side perspective view of the circuit breaker similar to that shown in **Figures 2** and **3** but illustrated without the connecting sleeve (in an exemplary opening position) to show exemplary features of embodiments of the cooperating arm components of the conductive arm according to embodiments of the present invention.

[0032] **Figures 5** and **6** are side cutaway views of another embodiment of the circuit breaker shown without the spring and shown illustrating additional movement/positions of the cooperating arms relative to positions shown in **Figures 2-4**, according to embodiments of the present invention.

[0033] **Figure 7** is a side cutaway view of another embodiment of the circuit breaker also shown without the spring and illustrating another exemplary attachment configuration according to embodiments of the present invention.

[0034] **Figure 8** is a side cutaway isometric view of an exemplary circuit breaker with the cooperating first and second moving arm members illustrating a shunt and other components of a circuit breaker according to embodiments of the present invention.

[0035] **Figures 9A** and **9B** are schematic illustrations of cooperating arm members according to embodiments of the present invention.

[0036] **Figure 10** is a flow chart of operational steps that can be used to operate a circuit breaker according to embodiments of the present invention.

Attorney Docket No. 1133-34
14-MCB-631

Detailed Description of Embodiments of the Invention

[0037] The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which illustrative embodiments of the invention are shown. Like numbers refer to like elements and different embodiments of like elements can be designated using a different number of superscript indicator apostrophes (e.g., 40, 40', 40'', 40''').

[0001] In the drawings, the relative sizes of regions or features may be exaggerated for clarity. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. The term "Fig." (whether in all capital letters or not) is used interchangeably with the word "Figure" as an abbreviation thereof in the specification and drawings. In the figures, certain layers, components or features may be exaggerated for clarity, and broken lines illustrate optional features or operations unless specified otherwise. In addition, the sequence of operations (or steps) is not limited to the order presented in the claims unless specifically indicated otherwise.

[0038] It will be understood that, although the terms first, second, etc. may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the present invention.

[0039] Spatially relative terms, such as "beneath", "below", "bottom", "lower", "above", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "below" or "beneath" other elements or features would then be oriented "above" the other elements or features. Thus, the

Attorney Docket No. 1133-34
14-MCB-631

exemplary term "below" can encompass orientations of above, below and behind. The device may be otherwise oriented (rotated 90° or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

[0040] The term "about" refers to numbers in a range of +/-20% of the noted value.

[0041] As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless expressly stated otherwise. It will be further understood that the terms "includes," "comprises," "including" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. It will be understood that when an element is referred to as being "connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening elements may be present. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

[0042] The term "non-ferromagnetic" means that the noted component is substantially free of ferromagnetic materials so as to be suitable for use in the arc chamber (non-disruptive to the magnetic circuit) as will be known to those of skill in the art.

[0043] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of this specification and the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0044] Turning now to the figures, **Figures 1A** and **1B** illustrate an exemplary configuration of a conductive moving arm **20** with a (moving) contact **25** for a circuit breaker **10** (**Figures 2** and **3**, for example). As shown, the conductive arm **20** has first and second discrete cooperating arm members **21**, **22**.

[0045] As shown in **Figures 2-7**, the circuit breakers **10** have handles **15** that cooperate with a respective moving conductive arm **20**. The handle **15** pivots and the arm **20** rotates between "OFF" and "ON" positions, and, optionally, a "TRIP" position. During endurance testing per UL 489, the arm **20** rapidly repetitively moves through its operative positions.

Attorney Docket No. 1133-34
14-MCB-631

Operational requirements from UL's "X" Program called "Overload" currently requires a breaker to be toggled 50 times at six (6) times rated current. For example, for a 150 Ampere (Amp) breaker, the six (6) times test current is 900 Amps, which is arcing the contacts **25, 125** fifty (50) times. Afterwards, a temperature rise test is performed and the temperature rise cannot exceed 50 degrees C.

[0046] **Figures 2 and 3** illustrate an exemplary circuit breaker **10** with a housing **10h**, handle **15**, moveable conductive contact arm **20** that fits over a handle bearing segment of the handle **18**. The handle bearing segment **18** allows the handle **15** and arm **20** to move while the handle **15** remains in contact with the arm **20**.

[0047] The handle **15** can be associated with a disconnect operator (e.g., an operating handle) connected to an assembly for opening and closing separable main contacts in a circuit breaker **10** or for turning power "ON" and "OFF" using a switch associated with a fuse. The circuit breaker **10** can be for a motor starter unit or feeder unit, for example. It is noted that not all circuit breakers **10** require a "TRIP" position (e.g., fused disconnect switches), so in some embodiments, the arm **25** and handle **15** can include only two operative positions, "ON", "OFF," rather than "ON," "OFF" and "TRIP" positions.

[0048] Turning back to **Figures 1A and 1B**, the first and second arm members **21, 22**, are configured to movably cooperate so that the moving contact **25** can have only a heel **25h** contact surface in the "ON" position (**Figure 1A**) and a only a toe contact surface **25t** (**Figure 1B**) as the arm **20** rotates toward the "OFF" position.

[0049] Embodiments of the invention are configured to keep the arc at the "toe" of the contact **25t** which is at the bottom of the breaker, close to the arc chute **75** (**Figure 8**) where the arc needs to jump to. Embodiments of the invention keep the "heel" of the contact **25h**, at the top, to be kept in pristine condition without any damage from arcing (or at least substantially reduced from conventional breakers). Embodiments of the invention configure the arm **20** to have a low or minimal resistance to allow for a cool (relatively low temperature) device. In conventional circuit breakers, the contacts **25** open exactly opposite: the "ON" position is at the toe **25t** position and the "opening" position is located at the heel **25h** (at the top of the contact **25**), but the arc chutes **75** (**Figure 8**) are at the bottom, e.g., close to the toe **25t**, so this can draw an arc from the top or heel **25h** position and down (across) the face of both contacts **25, 125** to the bottom/toe position **25t** where it then jumps into the arc chute **75**. Advantageously,

Attorney Docket No. 1133-34
14-MCB-631

embodiments of the present application configure the moving arm **20** to arc across only a small region at the toe **25t** and avoid arcing across a major portion of the faces (most or all of the contact surfaces above the toe **25t**) of the contacts **25, 125**.

[0050] During endurance testing per UL 489, the arm **20** rapidly repetitively moves through its operative positions. Operational requirements from UL's "X" Program called "Overload" currently requires a breaker to be toggled 50 times at six (6) times rated current. For a 150 Amp breaker, the six (6) times test current is 900 Amps, which is arcing the contacts **25, 125** fifty (50) times. Afterwards, a temperature rise test is performed and the temperature rise cannot exceed 50 degrees C. It is contemplated that the new cooperating arm members **21, 22** will meet the Overload temperature rise requirement, and, indeed, be able to operate at a maximum temperature rise defined by the noted UL Overload test of 50 degrees C.

[0051] The effectiveness of contact performance is typically directly proportional to the amount of silver in the contacts, which can be an expensive component of a breaker **10**. Embodiments of the invention allow a reduction in the percentage of silver in the contacts **25, 125**, potentially allowing for a substantial cost reduction. Today some contacts are 50% Ag, although 70% and up to 97% may be useful. It is contemplated that the contacts can have Ag in a range as low as about 35%. Embodiments of the invention can have contacts with Ag content between about 35% and 97%, including about 35%, about 40%, about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, and about 90%.

[0052] In some embodiments, in the "ON" position (**Figure 1A**), the cooperating arm members **21, 22** are configured so that the heel **25h** is touching the stationary contact **125** and as the arm **20** travels to the "OFF" position, a resilient member **32** such as, but not limited to, a spring, can force the lower/second member **22** to rock in an opposing direction so that the other end of the contact will separate and arc. Once the arm **20** travels back to the "ON" position, the contact **25** of the second arm member **22** can once again reside upon a fresh, typically arc-free virgin surface as arcing across the face has been avoided or greatly diminished.

[0053] **Figures 2-6** illustrate a circuit breaker **10** with the conductive moving arm **20** and cooperating arm members **21, 22**. In these embodiments, the cooperating arm members **21, 22** are attached with a sleeve **30** that can have a slot **30s**. The second/lower arm member **22** can also have a slot **22s**. A pin **33** can engage both slots **30s, 22s** and allow the arm members **21, 22**

Attorney Docket No. 1133-34
14-MCB-631

to travel to place the heel and toe **25h**, **25t** at the desired positions to avoid arcing across the face of the contacts.

[0054] The sleeve **30**, where used, can be pinned, screwed, nailed, riveted (**27**, **Figure 4**), welded, brazed, adhesively attached or combinations thereof or otherwise fixedly secured to a lower end portion of the upper/first arm member **21**. The lower end of the first member **21l** can have a spring engagement feature **21**, such as a hook, to engage the lower end of the mechanism spring **65**. The lower end portion of the first/upper member **21l** can have a curvilinear pocket **21p** (**Figure 4**) that extends inward from the spring engagement feature **21h** that can slidably receive the upper end portion **22t** of the lower/second arm member **22**. As shown in **Figure 4**, the upper end portion **22t** of the lower arm member facing the pocket **21p** of the upper arm member **21** can have a curved shape and can hold the elongate slot **22s**.

[0055] Referring to **Figure 2**, when the toe **25t** engages the lower end of the stationary contact **125** as the arm **20** rotates toward the OFF position (e.g., corresponding to the configuration shown in **Figure 1B**), the lower end of the first/upper arm member **21** adjacent the second arm member **22** is spaced apart by a gap **24**. **Figure 3** illustrates that in the "ON" position, the heel **25h** engages the top of the stationary contact **125** and the lower end of the first/upper arm member **21** is closer to the lower arm member **22**.

[0056] The ramp **21r** can be continuously in contact with the upper part of the lower arm **22t**. The smallest gap size **24** for the hook arm **21h** may be such as to provide at least about a 0.020 inch clearance, typically between about 0.020 and 0.050 inches to provide for any tolerance stack up during assembly.

[0057] As shown in **Figure 4**, the lower end portion **21l** can split into two downwardly extending segments **21d₁**, **21d₂**, each with a width **W** that is less than a width of the second arm member **22** at the top, medial or even bottom segments thereof.

[0058] **Figures 2-4** illustrate that the lower end portion of the first/upper arm member **21** can optionally include a knee **21k** that faces the mechanism spring **65**. **Figures 5-7** illustrate that the knee **21k** is not required. Where used, the knee **21k** can be configured to engage the mechanical spring **65** only after full rotation to the heel position **25h** of the moving contact **25**

[0059] **Figures 2-7** illustrate that the circuit breaker **10** may include a link **40** that is attached to an upper end portion **21u** of the first/upper arm member **21**. The link **40** can be held in an angled retention channel **41** (shown as angled upward as it travels away from the handle **15**

Attorney Docket No. 1133-34
14-MCB-631

toward the exterior of the housing) in the housing **10h**. The link **40** can be configured to provide a relatively long break distance. The link **40** and retention channel **41** are not required.

[0060] The lower/second arm member **22** can have a shunt attachment member **61** that engages a shunt **60** (**Figure 8**). The lower arm member **22** can also have a flat bottom **22b** and a flat side **22** that can be substantially or totally orthogonal to the bottom **22b** which may provide a suitable weld surface, where used for such.

[0061] **Figure 4** illustrates exemplary positions and exemplary spring force vectors **F1**, **F2** that can be used to provide the desired heel/toe contacts at the defined breaker operational conditions according to embodiments of the present invention. The two slots **30s**, **22s** cooperate with the pin **33** to be able to move the pin **33** to positions **P₁**, **P₂** and **P₃**.

[0062] Still referring to **Figure 4**, spring force vector **F1** is configured to force the lower arm member **22** down from position **P1** to **P2**. The ramp **21r** of the pocket **21p** of the upper arm member **21** is configured to ensure that the lower arm **21** with slot **21s** having position **P3** does not slide up to **P2**. The opening position (**Figure 4**) can be an important position in the mechanism. This is the exact moment that the contacts **25**, **125** start to separate and start to draw an arc (e.g., "immediately prior" to arcing) between the moving and the stationary contacts **25**, **125**. The steel arc chutes **75** (**Figure 8**) magnetically attract this arc and direct (suck) it into the steel, cooling & extinguishing it. Spring force **F2** rotates the lower arm **21** clockwise when opening. The force of the main mechanism spring **65** is stronger than spring force **F2** so it can rock the lower arm **22** counter clockwise once in the "ON" position.

[0063] The lower resilient member or spring **32** (**Figures 1A**, **5**, **7**) can extend down off the upper arm **21** any suitable distance and can generate the spring force **F2**. **Figure 5** shows that the spring **32** can extend down below the rear medial portion of the lower arm **22** to provide a force vector **F2** in a direction opposing the direction of the spring force vector **F1** (**Figure 4**). The resilient member or spring **32** can be made of a flat piece of spring steel, such as between about 0.02 and 0.25 inches thick, typically between about 0.03 inches and 0.1 inches thick such as about .042 thick or so, bent into the defined shape. It can be a cantilevered piece of flat spring steel that's bent into the desired shape.

[0064] A resilient member or spring **37** for transmitting the force vector **F1** can reside in the gap space **24** (**Figure 2**) above the lower arm member **22** as shown in **Figure 5**. The resilient member or spring **37** (e.g., coil or leaf spring) can be attached to a lower end **21d₁** of the upper

Attorney Docket No. 1133-34
14-MCB-631

arm **21**, typically adjacent the mechanism holding feature **21h**. However, other placement and attachment configurations may be used.

[0065] **Figure 7** illustrates the cooperating arm members **21, 22** can be attached with a sleeve **30** that does not require slots **22s, 30s** (**Figure 2**, for example). The sleeve **30** is attached to a lower end portion of the upper arm member **21** and an upper end portion of the lower arm member **22t**. The two arm members **21, 22** are typically pivotably attached together. The resilient member or spring **32** can reside off the sleeve **30** to extend to a back side of the lower arm to provide a bias to force the lower member to kick or rotate forward to a desired operative position. The spring **32** can be a leaf spring or other spring configuration such as formed spring steel or combinations of different spring configurations, e.g., coil and leaf and/or resilient/elastic members.

[0066] The heel and toe **25h, 25t** can each have a small contact area or point that is tangent **T** to a line extending off a bottom edge **22b** of the second arm member **22**. Particularly for the opening configuration (**Figure 4**), the toe contact **25t** can be less than 30% of the face of the stationary contact **125** at the lower edge of the contacts **25, 125**. In some embodiments, small microscopic pin spots of high points of Ag can provide the electrical path in the toe region **25t**.

[0067] Referring to **Figure 8**, as is well known, the circuit breaker **10** includes at least one arc chamber **20** having at least one arc chute **30** with arc plates, a mechanism assembly **10m** with the arm **20** holding the contact **25** (e.g., a moving contact attached to the "contact arm") and the stationary contact **125** proximate a line terminal **L**. The arm **20** is conductive, typically non-ferromagnetic metal such as, but not limited to, copper. The upper arm member **21** and lower arm member **22** can be formed of the same or different metals. In some embodiments the upper arm member **21** is steel and the lower arm member is or comprises copper.

[0068] The handle **15** can include an external portion **15e** (**Figure 7**) which can comprise a user actuator or input such as a lever, thumb or finger wheel or other suitable configuration. The handle pivot **15p** can be attached to the housing directly or indirectly.

[0069] The circuit breaker **10** can also include one or more of a magnet **135**, a load collar **38**, a load terminal **39**, a bimetal member **43**, an armature **44**, a shunt bracket **47**, a spring clip **50**, a cradle **55** and frame **57**. The circuit breaker **10** can have alternate configurations and components.

Attorney Docket No. 1133-34
14-MCB-631

[0070] **Figure 8** also schematically illustrates a shunt **60** attached to the lower arm member **22** and a shunt bracket **47**. The shunt **60** can be resilient and/or flexible. **Figure 8** also schematically illustrates a mechanism spring **65** (also shown in **Figures 2-4**) which is part of the operator mechanism **10m**, as is well known to those of skill in the art.

[0071] The arm **20** and handle **15** can have defined operative positions, "OFF," "ON" and (optionally) "TRIP". The movements can be over a desired handle angulation, typically between about 45 degrees to about 90 degrees, more typically about 90 degrees between the "OFF" and "ON" positions with the "TRIP" position between the "OFF" and "ON". In the "ON" position, the arm **20** places the moveable contact **25** in abutting contact with the stationary contact **125**. In the "OFF" position, the arm **20** rotates to move the moveable contact **25** away from the stationary contact **125**. In the "TRIP" position, the arm **20** also positions the moveable contact **25** away from the stationary contact **125**, typically a distance greater than the spaced apart distance of the two contacts **25, 125** in the "OFF" position.

[0072] Typically, in use, the face **F** (**Figure 8**) of the housing/circuit breaker is oriented to be vertical with the handle facing outward.

[0073] **Figure 9A** is a schematic view of components of the conductive arm **20**, including the upper arm member **21**, the lower arm member **22** and the sleeve **30**. The resilient member **37** for **F1** can optionally be attached to the upper arm member **21** as shown. **Figure 9B** illustrates that the sleeve **30** is not required and the upper member **21** can have an integral portion configured to provide the attachment and slot for the lower arm member **21**. While embodiments of the arm members **21, 22** and exemplary attachment configurations have been described, other attachment arrangements and configurations of the upper and lower arm members are contemplated.

[0074] In some embodiments, the circuit breakers **10** can be DC circuit breakers, AC circuit breakers, or both AC (alternating current) and DC (direct current) circuit breakers.

[0075] The circuit breakers **10** can be rated for voltages between about 1V to about 5000 volts (V) DC and/or may have current ratings from about 15 to about 2,500 Amps. The circuit breakers **10** may be high-rated miniature circuit breakers, e.g., above about 70A in a compact package. However, it is contemplated that the circuit breakers **10** and components thereof can be used for any voltage, current ranges and are not limited to any particular application as the circuit breakers can be used for a broad range of different uses.

Attorney Docket No. 1133-34
14-MCB-631

[0076] The circuit breakers **10** can be molded case circuit breakers (MCCB)s. MCCBs are well known. *See, e.g.*, U.S. Patent Nos. 4,503,408, 4,736,174, 4,786,885, and 5,117,211, the contents of which are hereby incorporated by reference as if recited in full herein.

[0077] The circuit breakers **10** can be a bi-directional DC MCCB. *See, e.g.*, US Patent No.8,222,983, the content of which is hereby incorporated by reference as if recited in full herein. The DC MCCBs can be suitable for many uses such as data center, photovoltaic, and electric vehicle applications.

[0078] As is known to those of skill in the art, Eaton Corporation has introduced a line of MCCBs designed for commercial and utility scale photovoltaic (PV) systems. Used in solar combiner and inverter applications, Eaton PVGuard™ circuit breakers are rated up to 600 Amp at 1000 Vdc and can meet or exceed industry standards such as UL 489B, which requires rigorous testing to verify circuit protection that meets the specific requirements of PV systems. However, it is contemplated that the circuit breakers **10** can be used for various applications with corresponding voltage capacity/rating. In some particular embodiments, the circuit breaker **10** can be a high-rating miniature circuit breaker.

[0079] **Figure 10** is a flow diagram of exemplary steps that can be used to operate a breaker. A circuit breaker with a handle in communication with a moving conductive arm having cooperating first and second arm members is provided. The second member holds an electrical contact (block **200**). The first and second conductive arm members are pivoted relative to each other to cause the contact to have only a toe engagement with a stationary contact just prior to an arcing event (block **210**).

[0080] The pivoting can be carried out to move adjacent ends of the first and second cooperating arm members closer together and farther apart over a sequence of operational positions between ON and OFF (block **205**).

[0081] The first and second arm members can be made of different conductive metallic materials (block **202**).

[0082] The second arm member can have opposing longitudinally spaced apart ends, the first end has the contact and pivots toward and away from the stationary contact and the second end is attached directly or indirectly to the first arm member (block **208**).

[0083] The first and second arm members can be connected with a sleeve with an elongate slot attached to adjacent end portions of the first and second arm members. The method

Attorney Docket No. 1133-34
14-MCB-631

can include moving the second arm member up and down while a pin attached to the sleeve and second arm member travels in the slot (block 212).

[0084] Only the toe (adjacent the lower edge of the contact) can engage the stationary contact when the arm rotates toward an OFF position/in an opening position to thereby direct arcing directly into the arc chutes avoiding virgin contact surfaces thereabove (block 215).

[0085] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although a few exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention. Therefore, it is to be understood that the foregoing is illustrative of the present invention and is not to be construed as limited to the specific embodiments disclosed, and that modifications to the disclosed embodiments, as well as other embodiments, are intended to be included within the scope of the invention.

Attorney Docket No. 1133-34
14-MCB-631

THAT WHICH IS CLAIMED:

1. A circuit breaker comprising:

a moveable contact arm, the contact arm having first and second cooperating arm members coupled together, the first arm member engaging a pivotable handle and the second arm member comprising an electrical contact, wherein the second arm member can move inward and outward relative to the first arm member.

2. The circuit breaker of Claim 1, wherein a lower end portion of the first arm member is pivotably attached to an upper end portion of the second arm member.

3. The circuit breaker of Claim 1, further comprising a stationary contact and an arc chute, and wherein only a toe portion of the second arm member last engages a lower edge portion of a stationary contact prior to separation from the stationary contact when the contact arm moves toward an "OFF" position and/or in an opening position to thereby direct arcing into the arc chute and avoid arcing across a surface of the stationary contact above the lower edge portion.

4. The circuit breaker of Claim 1, wherein adjacent ends of the first and second cooperating arm members are coupled together in a manner that allows an upper end of the second arm member to move inward and outward and up and down relative to a lower end portion of the upper arm member.

5. The circuit breaker of Claim 1, further comprising a sleeve affixed to a lower end portion of the first arm member, the sleeve having a slot, wherein the second arm member comprises a slot, and wherein the slot of the sleeve and the slot of the second arm member are aligned so as to allow a pin to extend therethrough and allow the pin to travel inward, outward, upward and downward to place the second arm member in different positions.

6. The circuit breaker of Claim 1, wherein the first arm member holds a lower end of mechanism spring and has a curvilinear receiving pocket that faces the upper end of the second arm member, wherein a spring attached to the first arm member applies a downwardly extending

Attorney Docket No. 1133-34
14-MCB-631

first force vector to the second arm member, and wherein the second arm member engages a different spring configured to apply an upwardly extending second force vector in a direction opposing the first force vector.

7. The circuit breaker of Claim 6, wherein the spring that applies the second force vector extends off a back surface of the first arm member down about a back surface of the second arm member.

8. The circuit breaker of Claim 1, wherein an upper segment of the second arm member is spaced apart from the lower segment of the first arm member at the coupling of the first and second arm members.

9. The circuit breaker of Claim 1, wherein the second arm member comprises an upwardly extending slot that is aligned with a cooperating slot in a sleeve attached to the first arm member or to a slot in the first arm member, and wherein a pin extends through the slots and allows the second arm member to translate relative to the first arm member.

10. The circuit breaker of Claim 2, further comprising a spring that is attached to and extends below the first arm member behind an upper end portion of the second member to force the second arm member to rotate forward.

11. The circuit breaker of Claim 1, further comprising a mechanism spring held by a lower end of the first arm member, wherein the first arm member comprises a knee that resides above the lower end of the first arm member that faces the mechanism spring.

12. The circuit breaker of Claim 1, further comprising a mechanism spring held by a lower end segment of the first arm member, wherein the lower end segment of the arm member has a smaller width than a width of the second arm member adjacent thereto and resides spaced apart a distance from an adjacent underlying portion of the second arm member.

Attorney Docket No. 1133-34
14-MCB-631

13. A method of operating a circuit breaker, comprising:
placing only a toe segment of a moving contact against a stationary contact at a lower edge portion of the stationary contact immediately prior to an arcing action; and
directing all arcing down into an adjacent arc chute providing an arc-free contact surfaces above the toe segment of the moving contact and above the lower edge portion of the stationary contact.

14. The method of Claim 13, wherein the placing step is carried out by using a moveable contact arm having first and second arm members coupled together, the placing comprises translating the second arm member relative to the first arm member.

15. The method of Claim 13, wherein the placing step is carried out by using a moveable contact arm having first and second arm members pivotably coupled together by pivoting the second arm member relative to the first arm member.

16. The method of Claim 13, wherein the placing step is carried out by using a moveable contact arm having first and second arm members coupled together with at least one pin and cooperating slots, wherein the pin travels in the slots allowing the second arm member to travel through different positions.

17. The method of Claim 13, wherein the placing step is carried out using a moveable contact arm having an upper arm member coupled to a lower arm member and applying spring force vectors to the lower arm member that (i) push an inner facing surface of the lower arm member downward and (ii) push an outer facing surface of the lower arm member inward.

18. The method of Claim 13, wherein the method comprises applying a first spring force against a lower arm member of a moveable contact arm to rotate the lower arm member clockwise when opening and applying a second spring force using a spring attached to an upper arm member of the moveable contact arm, the lower arm member configured to move inward, outward and up and down relative to the upper arm member whereby the second spring force is

Attorney Docket No. 1133-34
14-MCB-631

stronger than the first spring force so as to rock the lower arm member counter clockwise once in an "ON" position.

19. A circuit breaker comprising:

a housing;

a pivotable handle held by the housing;

a moveable contact arm held in the housing, the arm having first and second cooperating arm members, the first arm member engaging the pivotable handle and the second arm member comprising an electrical contact and being configured to be able to translate inward and outward and/or pivot relative to the first arm member; and

a stationary contact in the housing configured to engage the electrical contact of the second arm member,

wherein at least one of the stationary contact or the second arm electrical contact comprising silver in an amount between about 35 and 97%.

20. The circuit breaker of Claim 19, wherein an upper portion of the second arm member is pivotably attached to a lower portion of the first arm member, and wherein only a toe portion of the second arm member electrical contact engages only a lower edge portion the stationary contact when the arm moves toward an "OFF" position and/or in an opening position to thereby direct arcing into the arc chute and avoid arcing across a surface of the stationary contact above the lower edge portion.

1/10

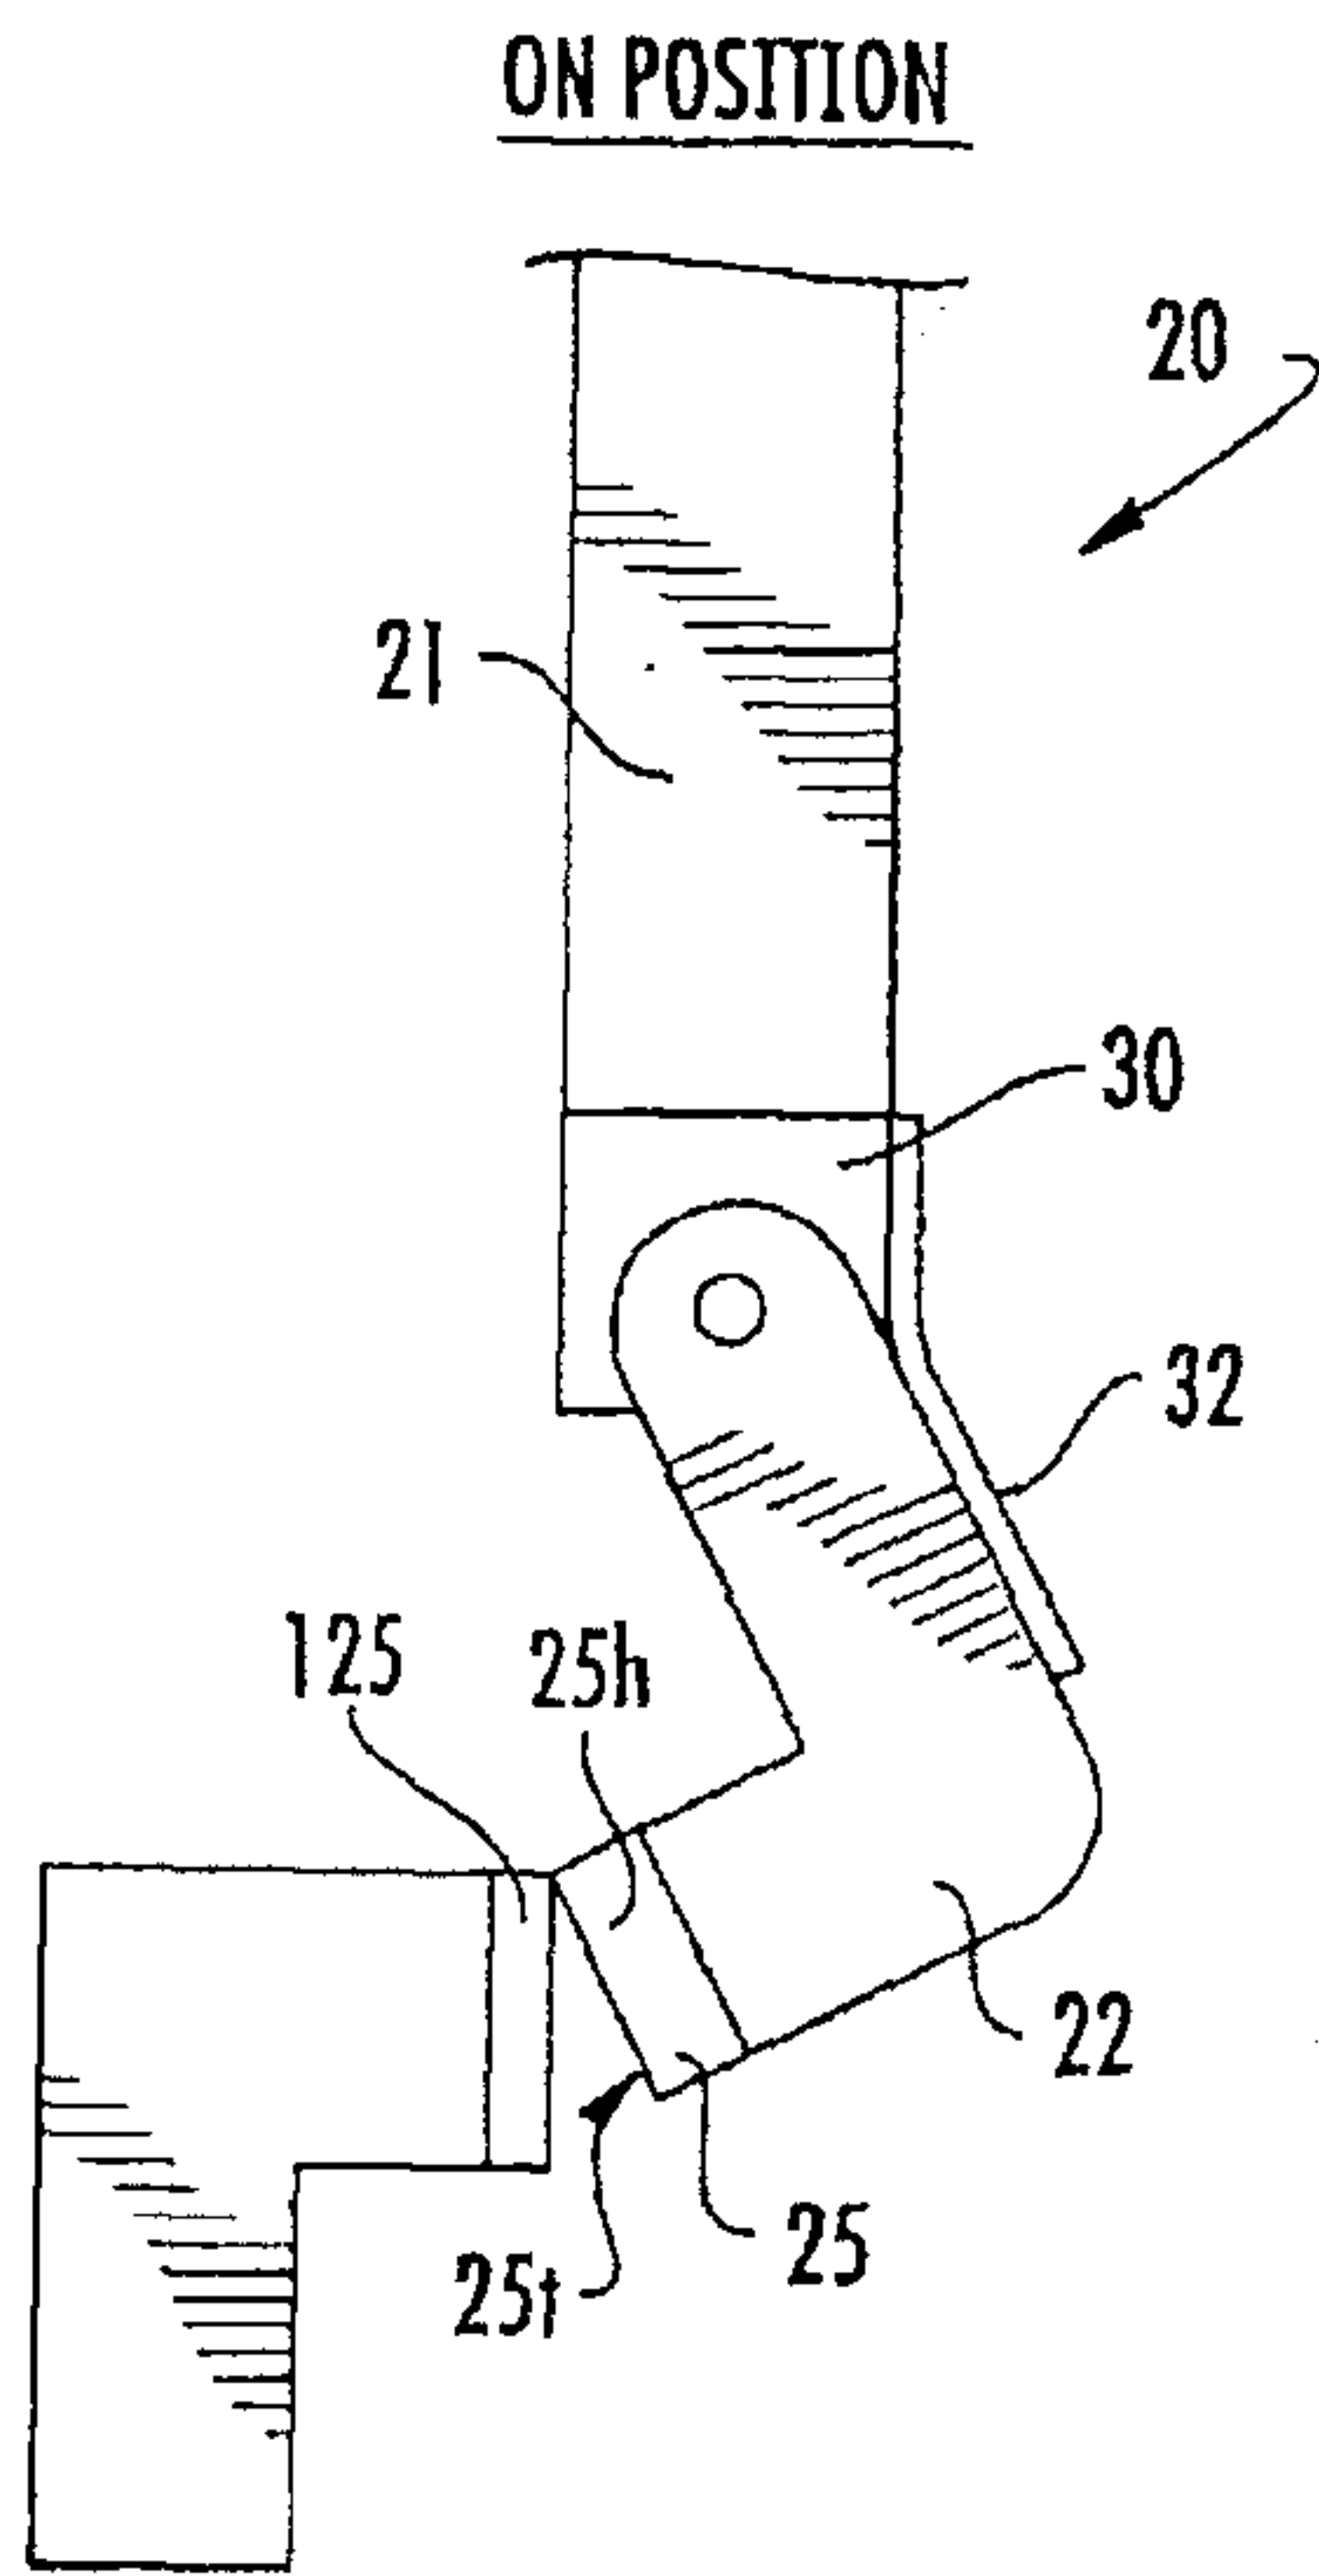


FIG. 1A


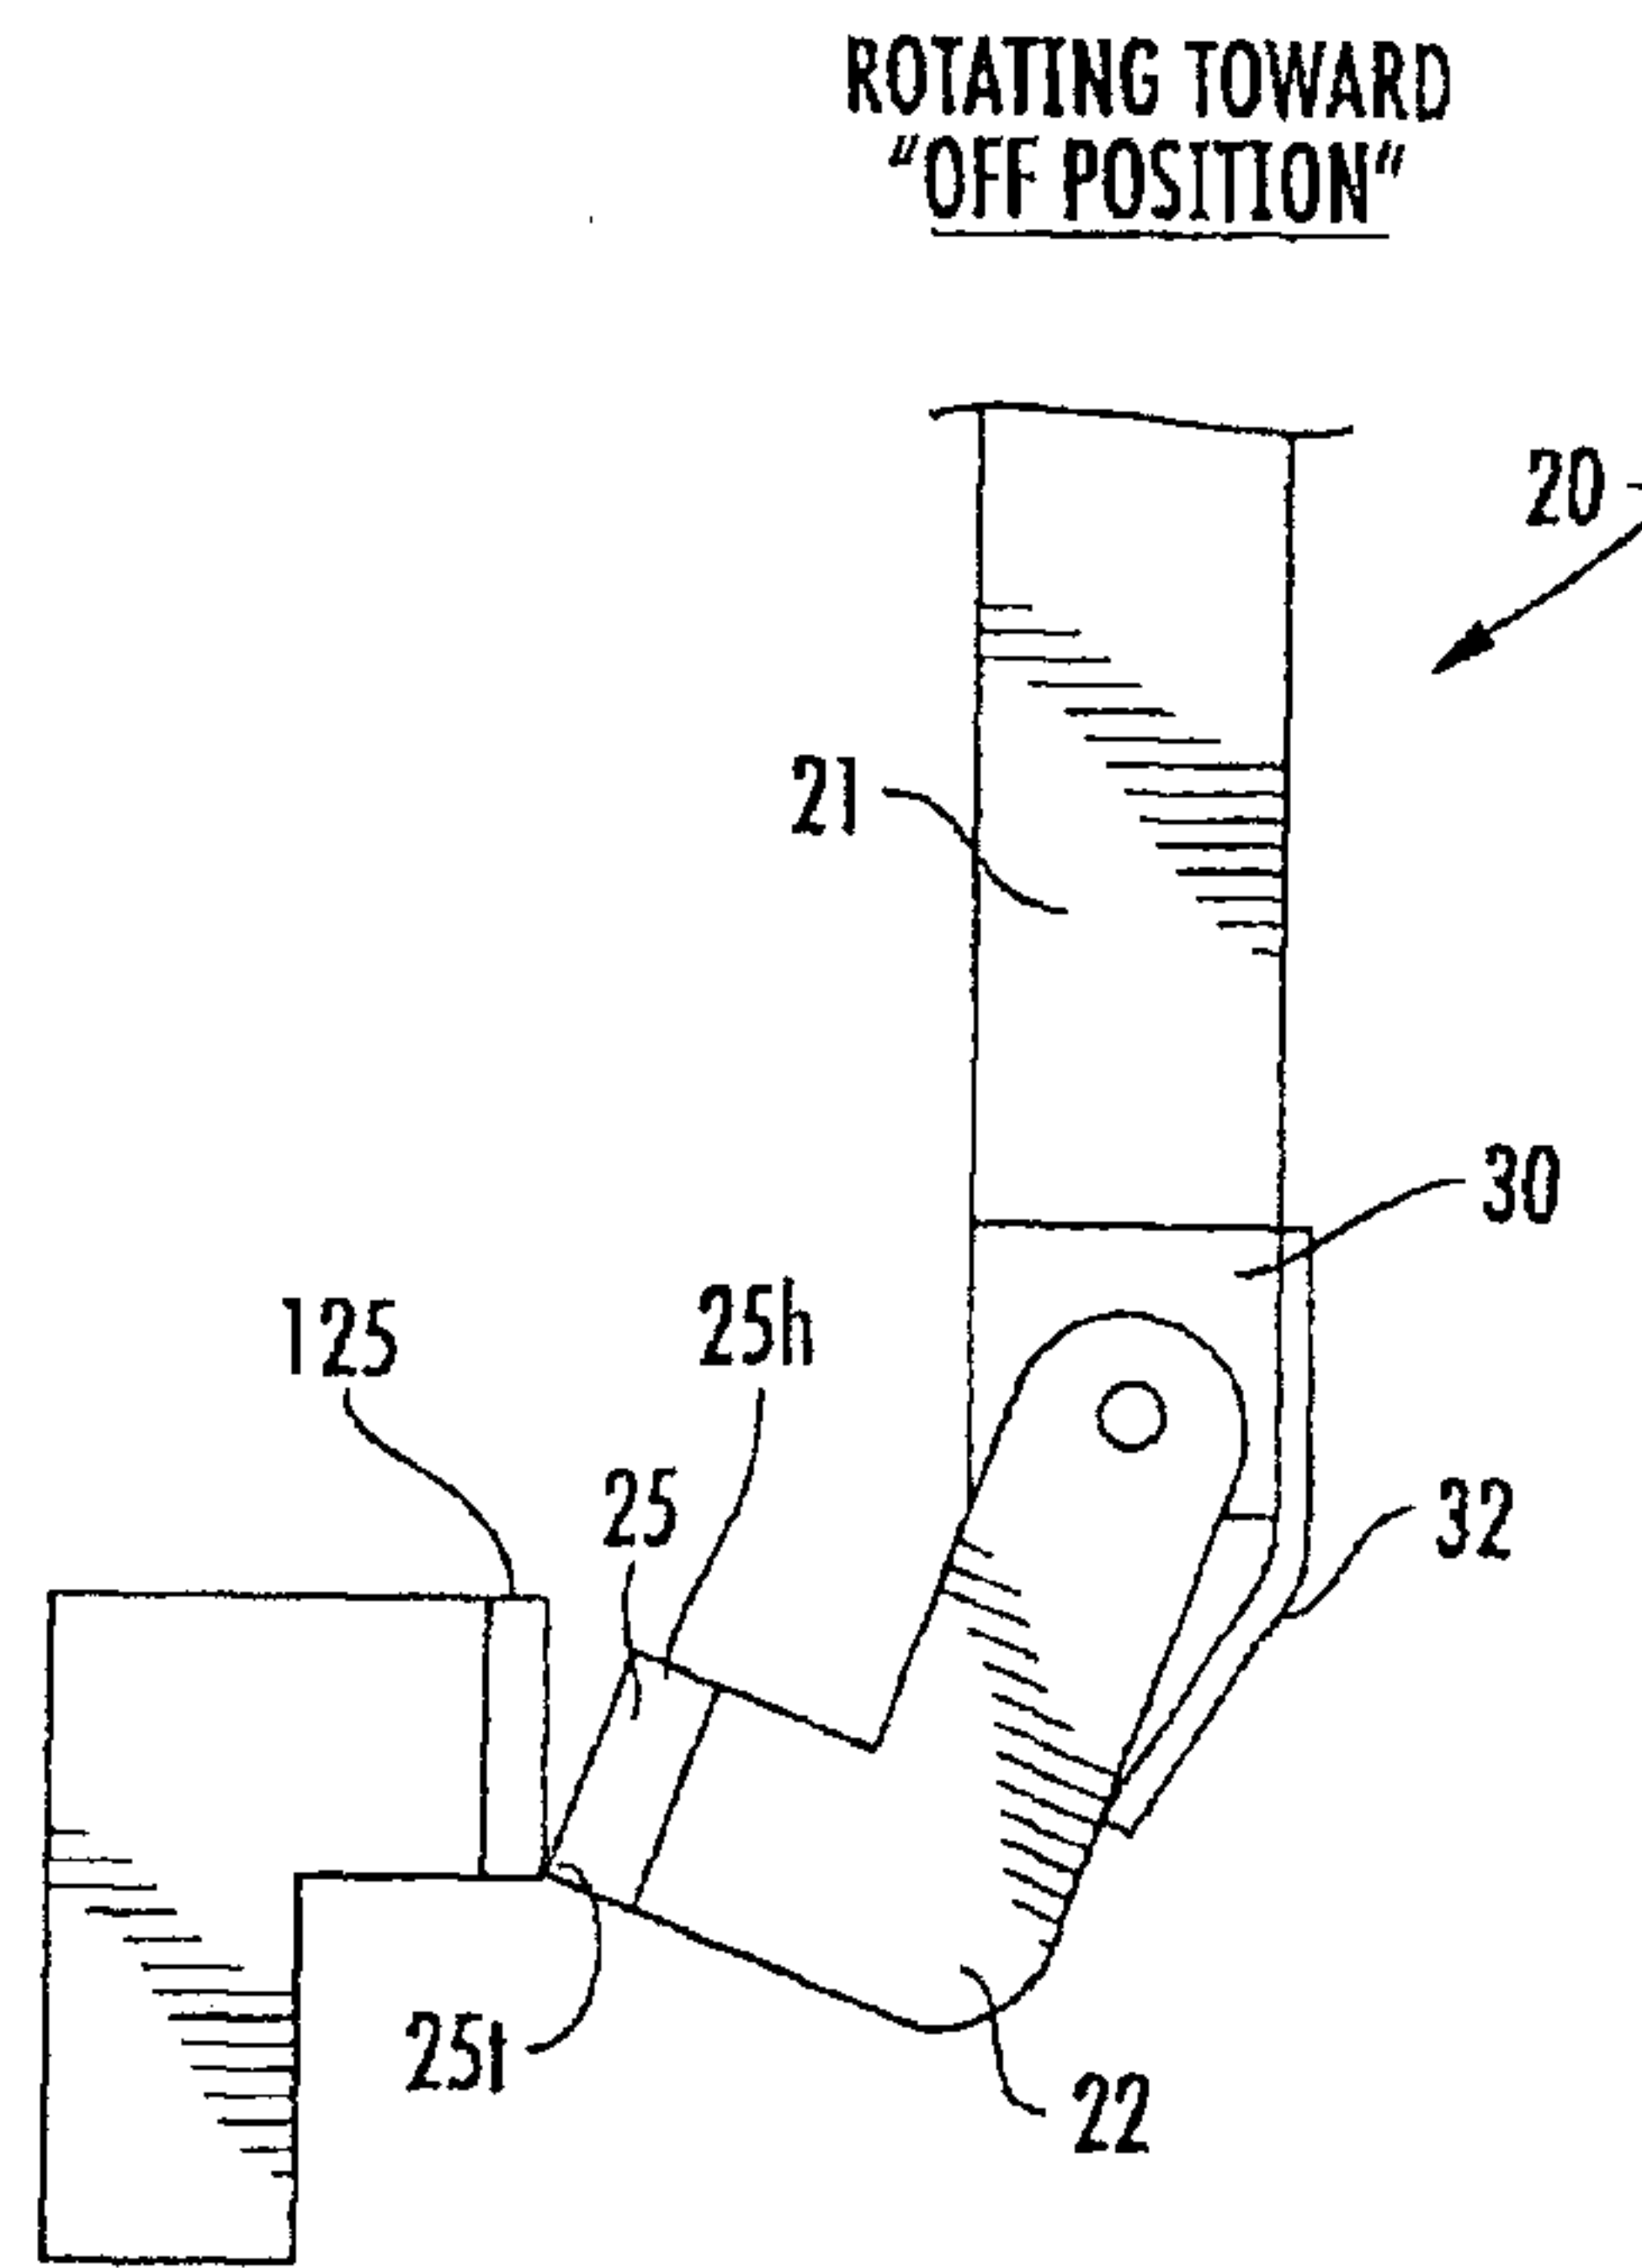


FIG. 1B

2/10

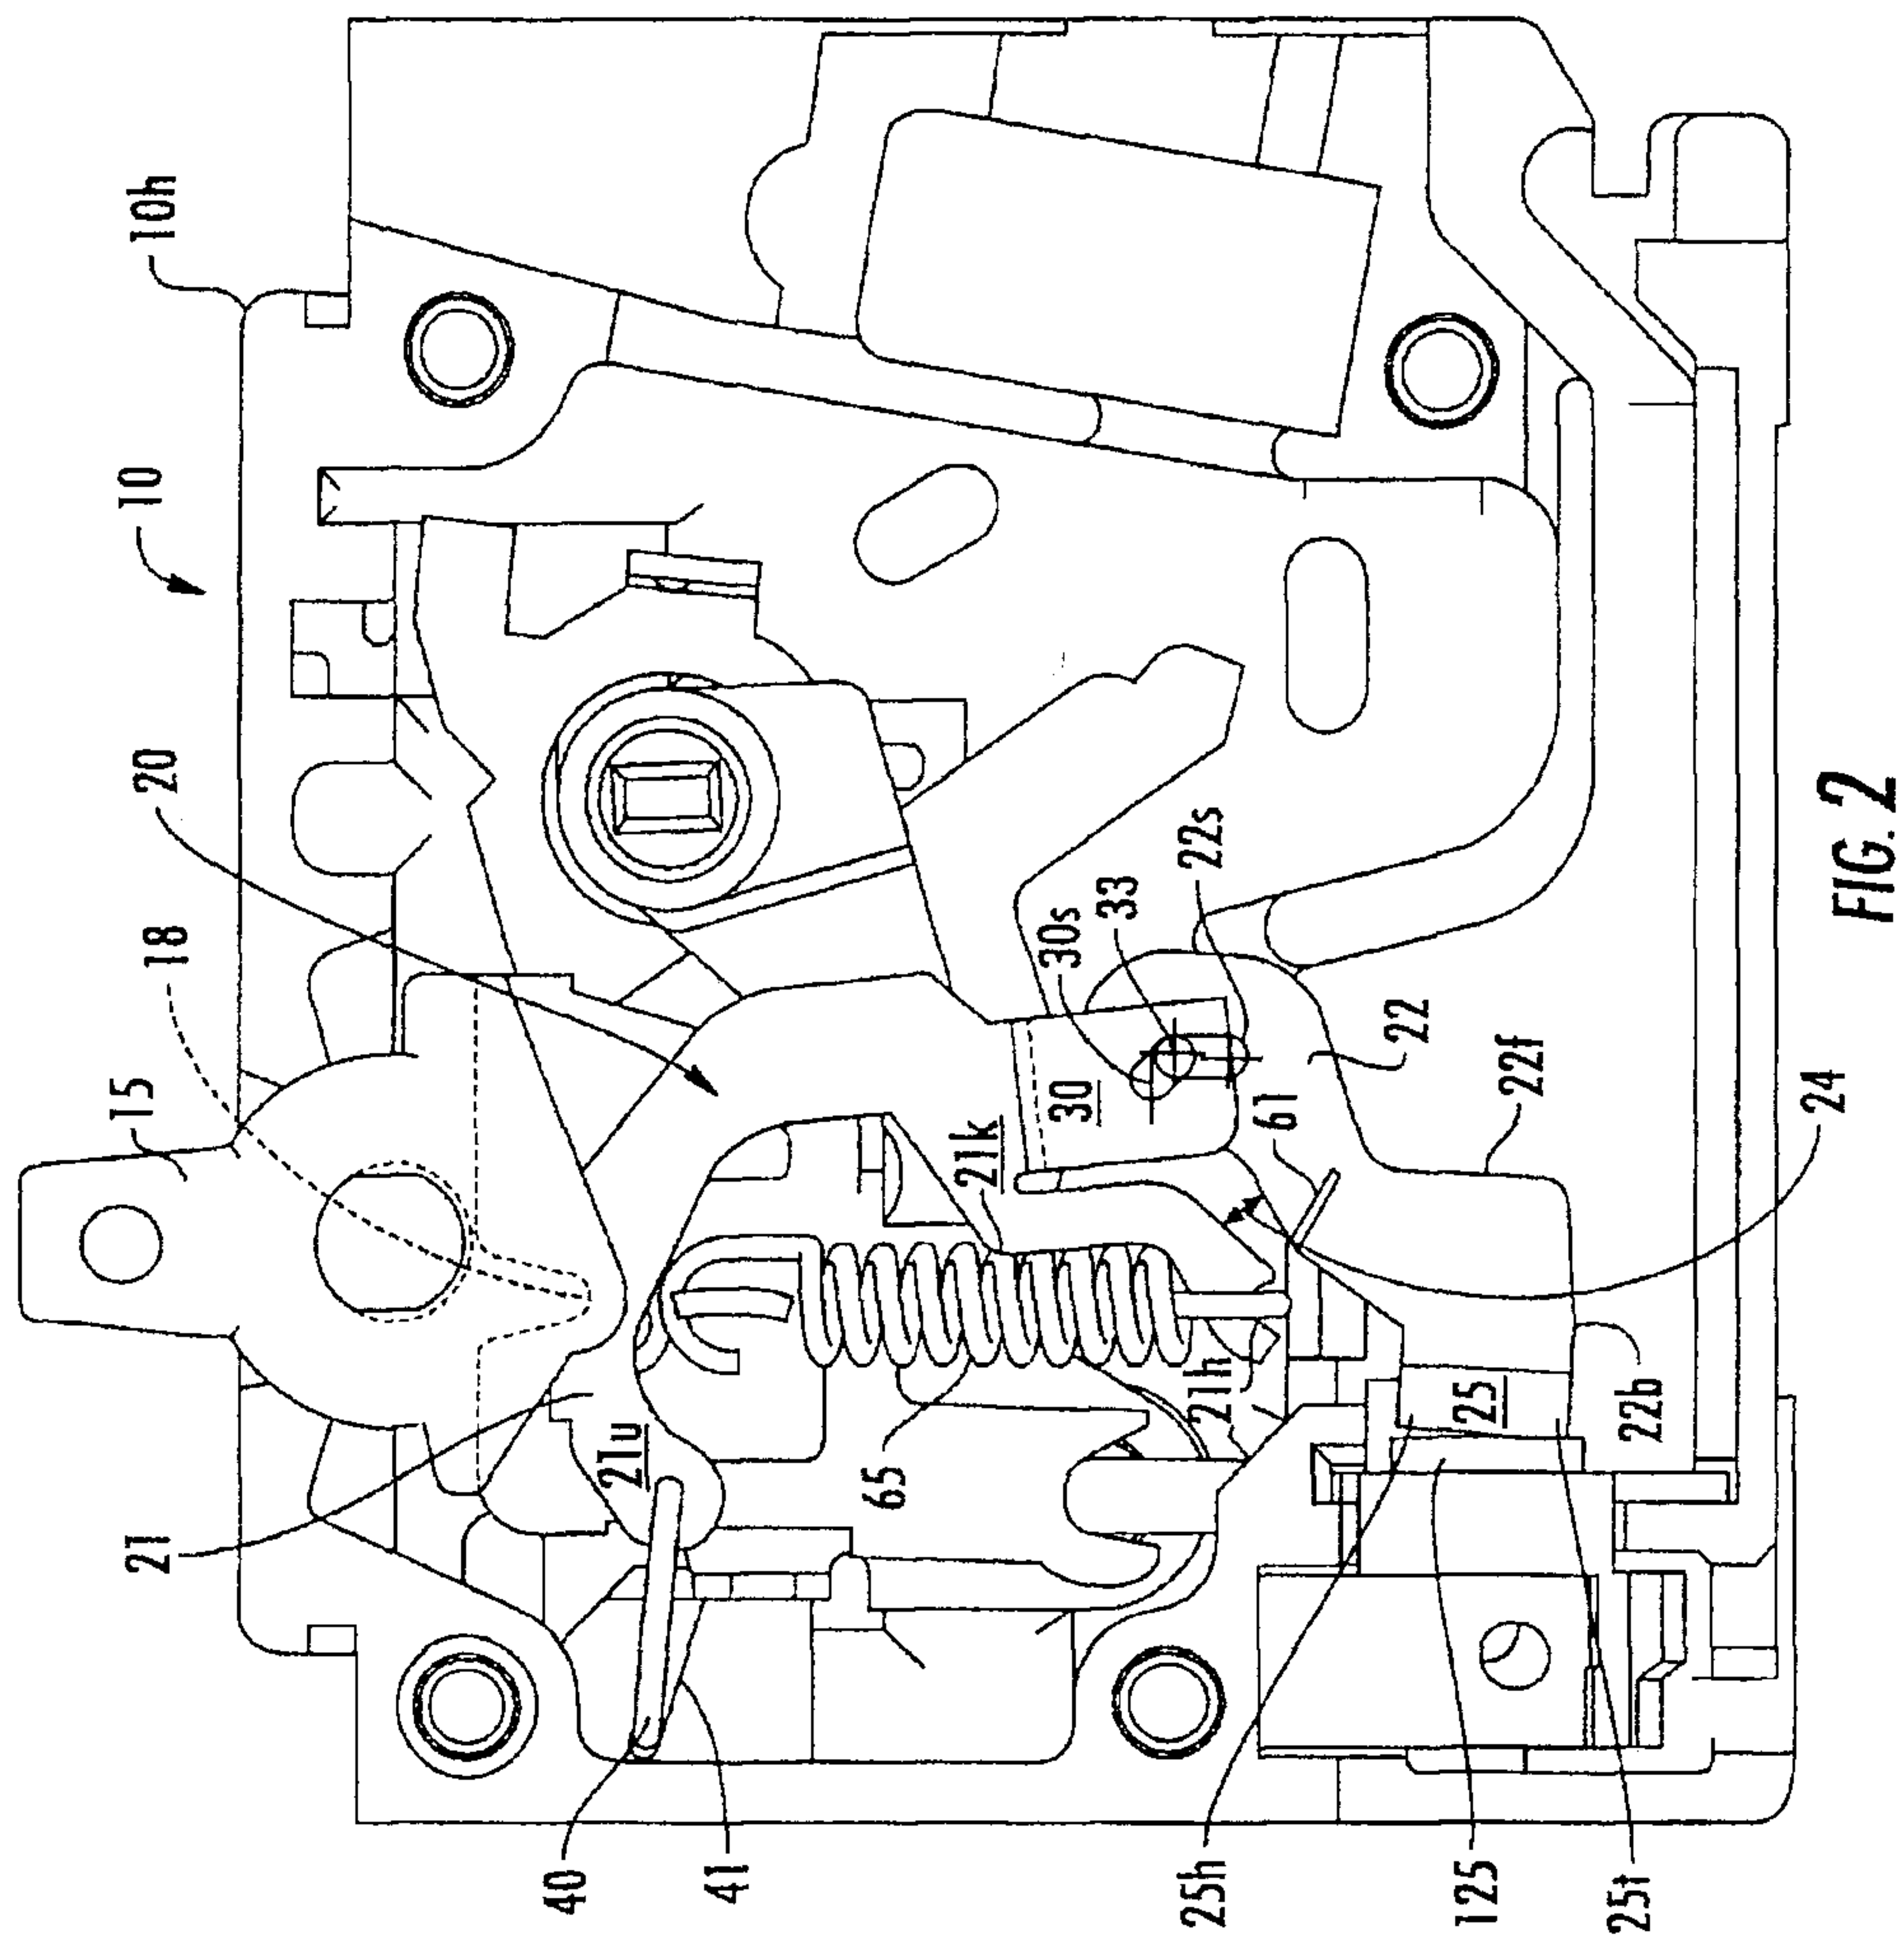

3/10

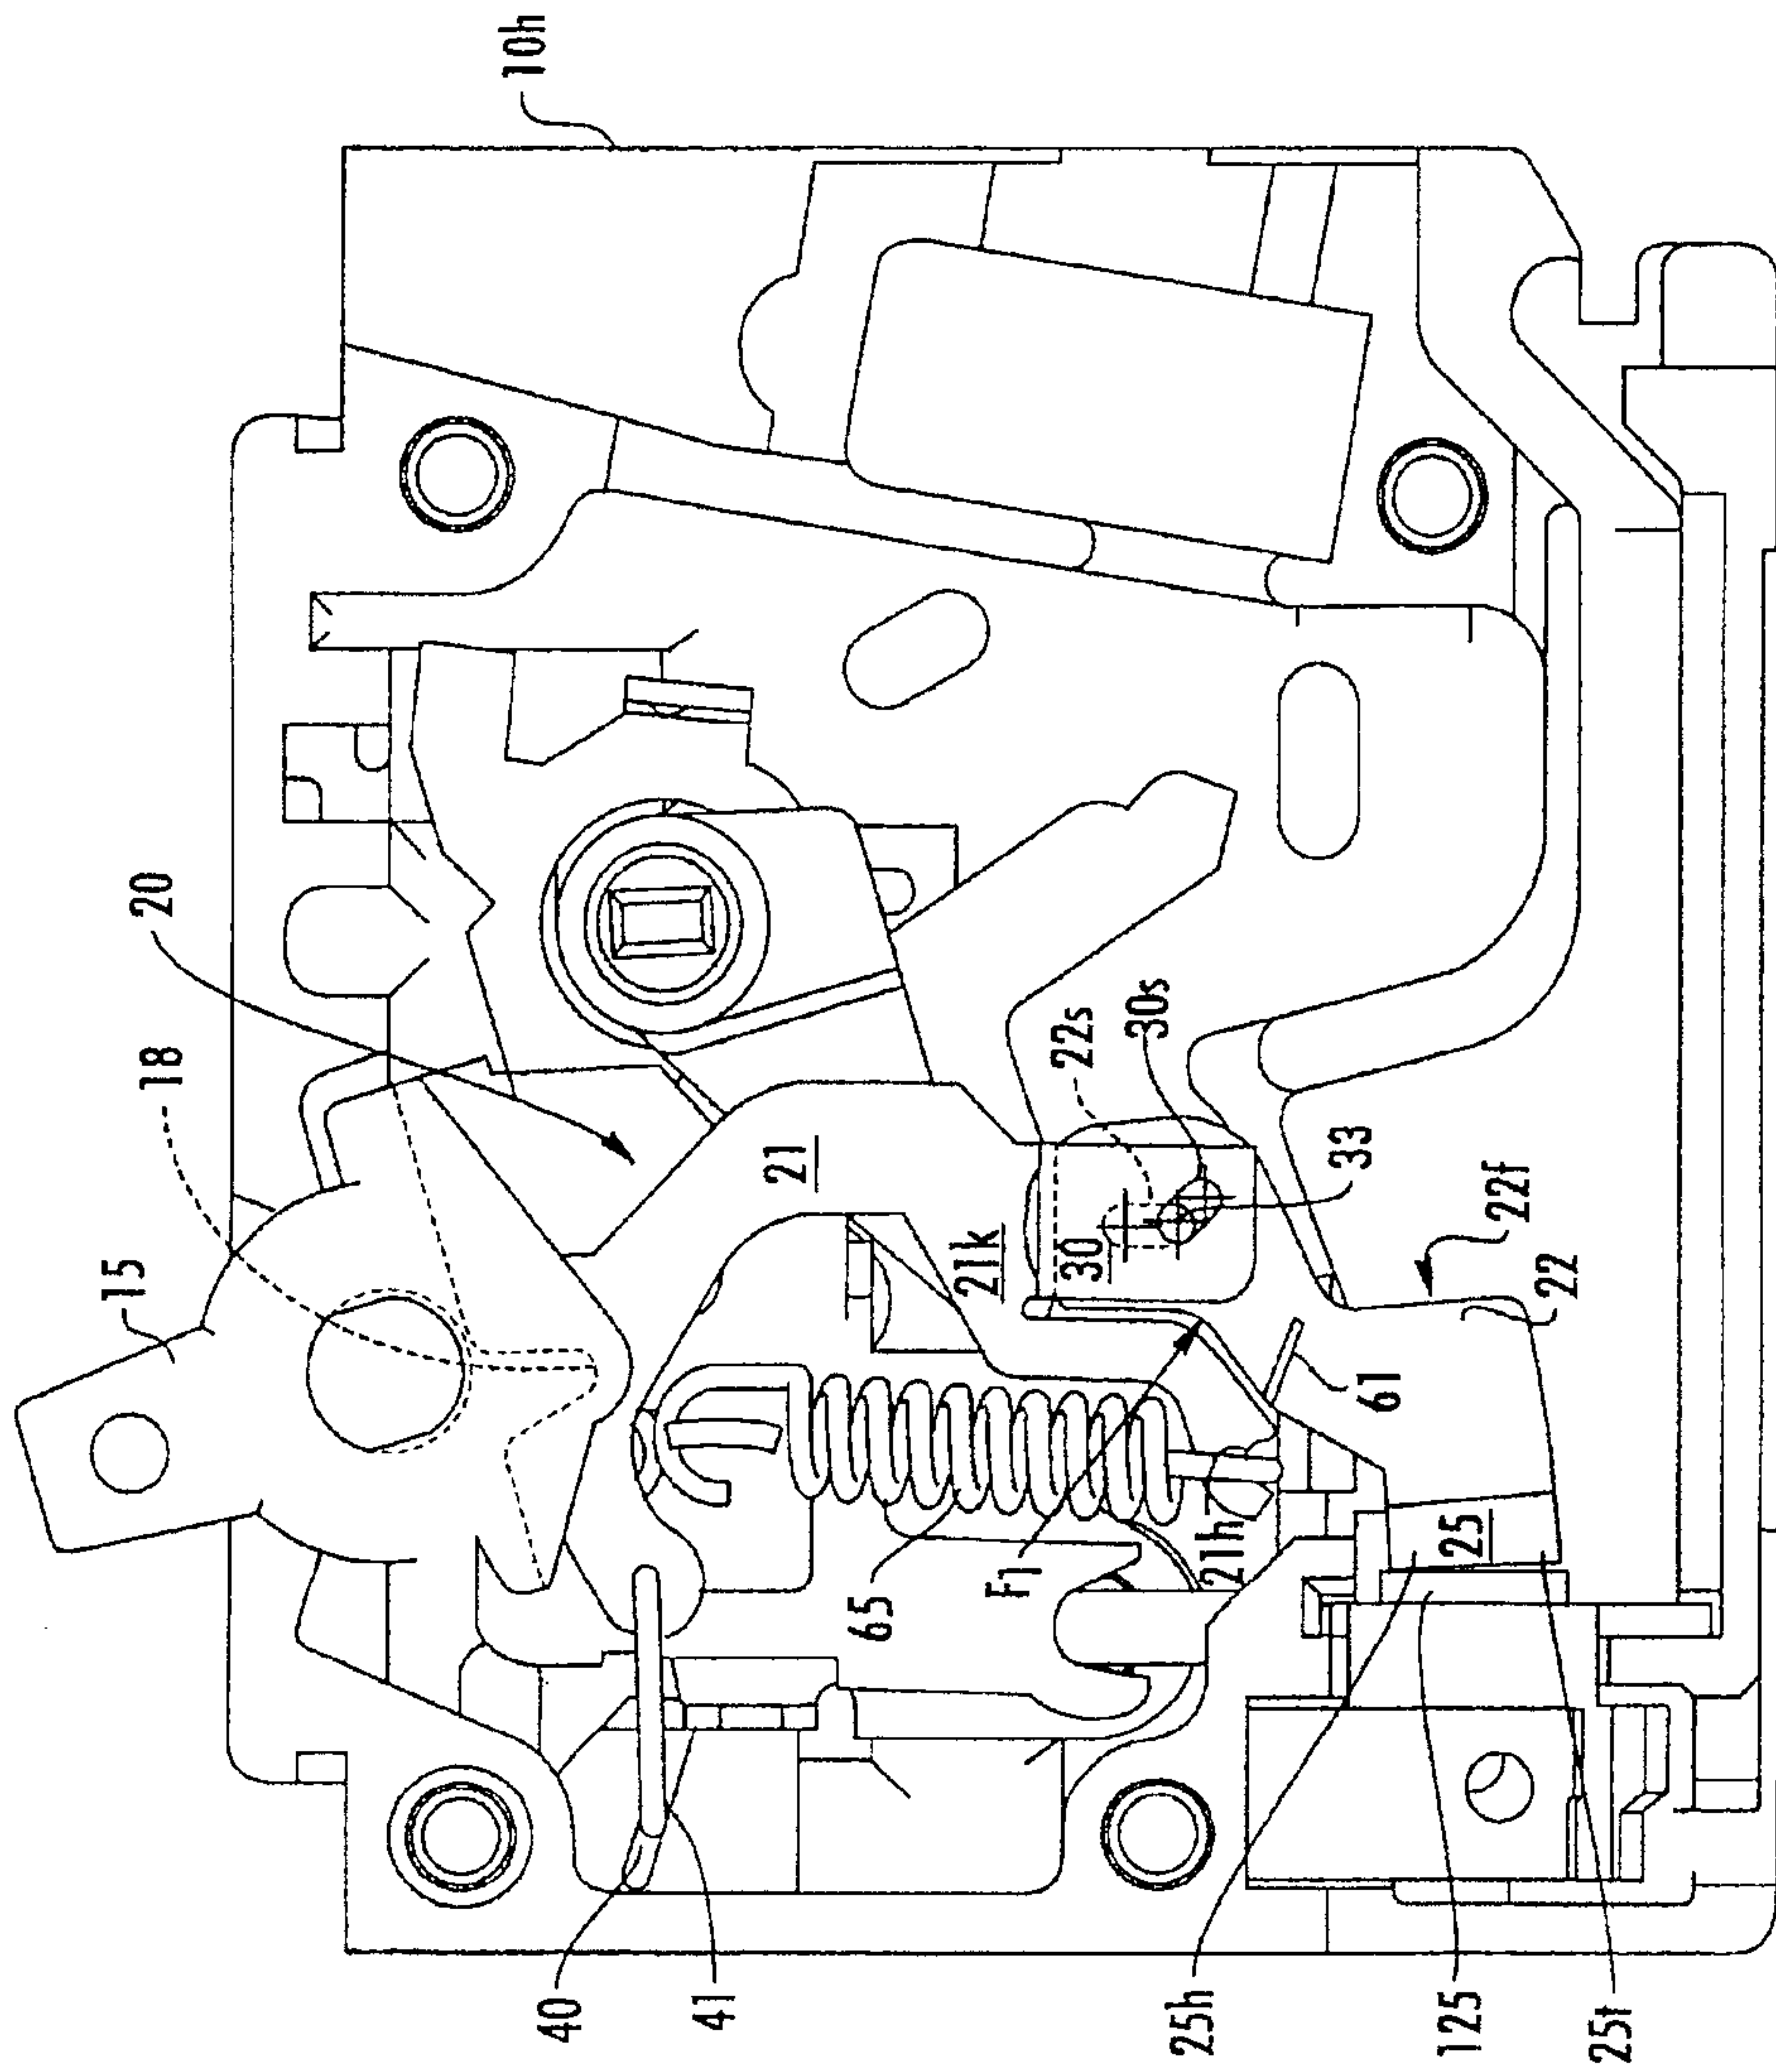


FIG. 3

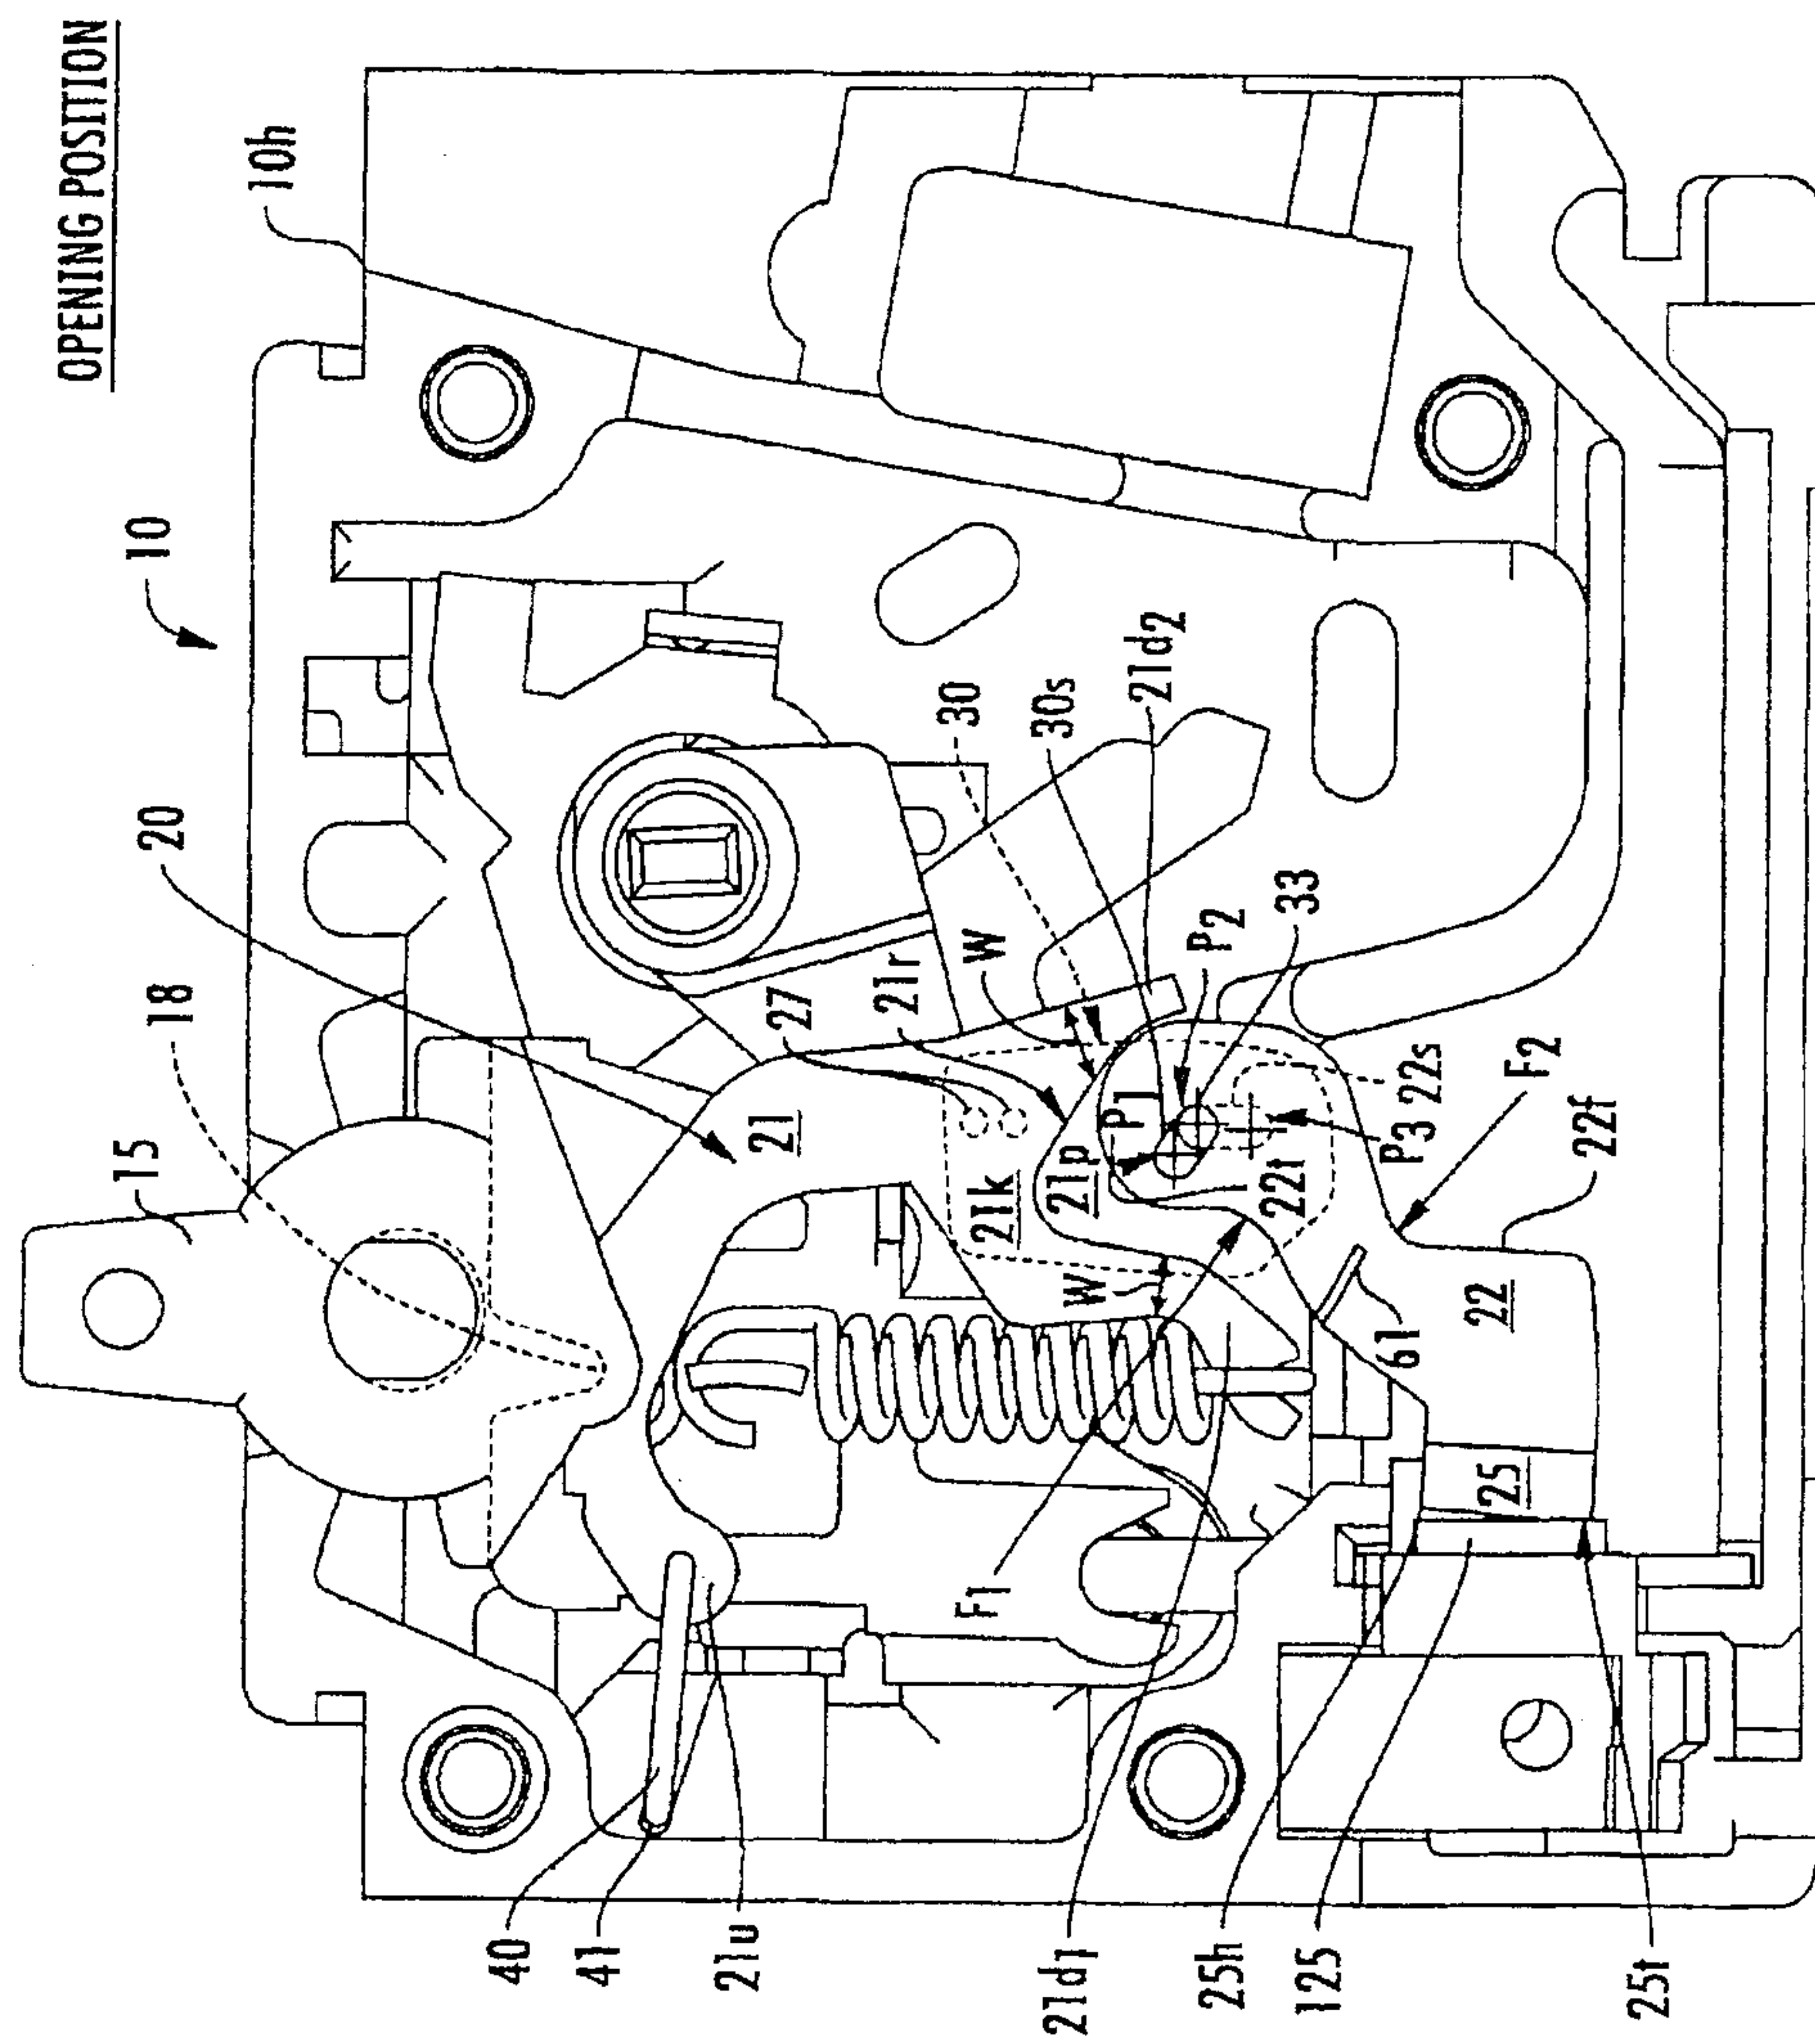


FIG. 4

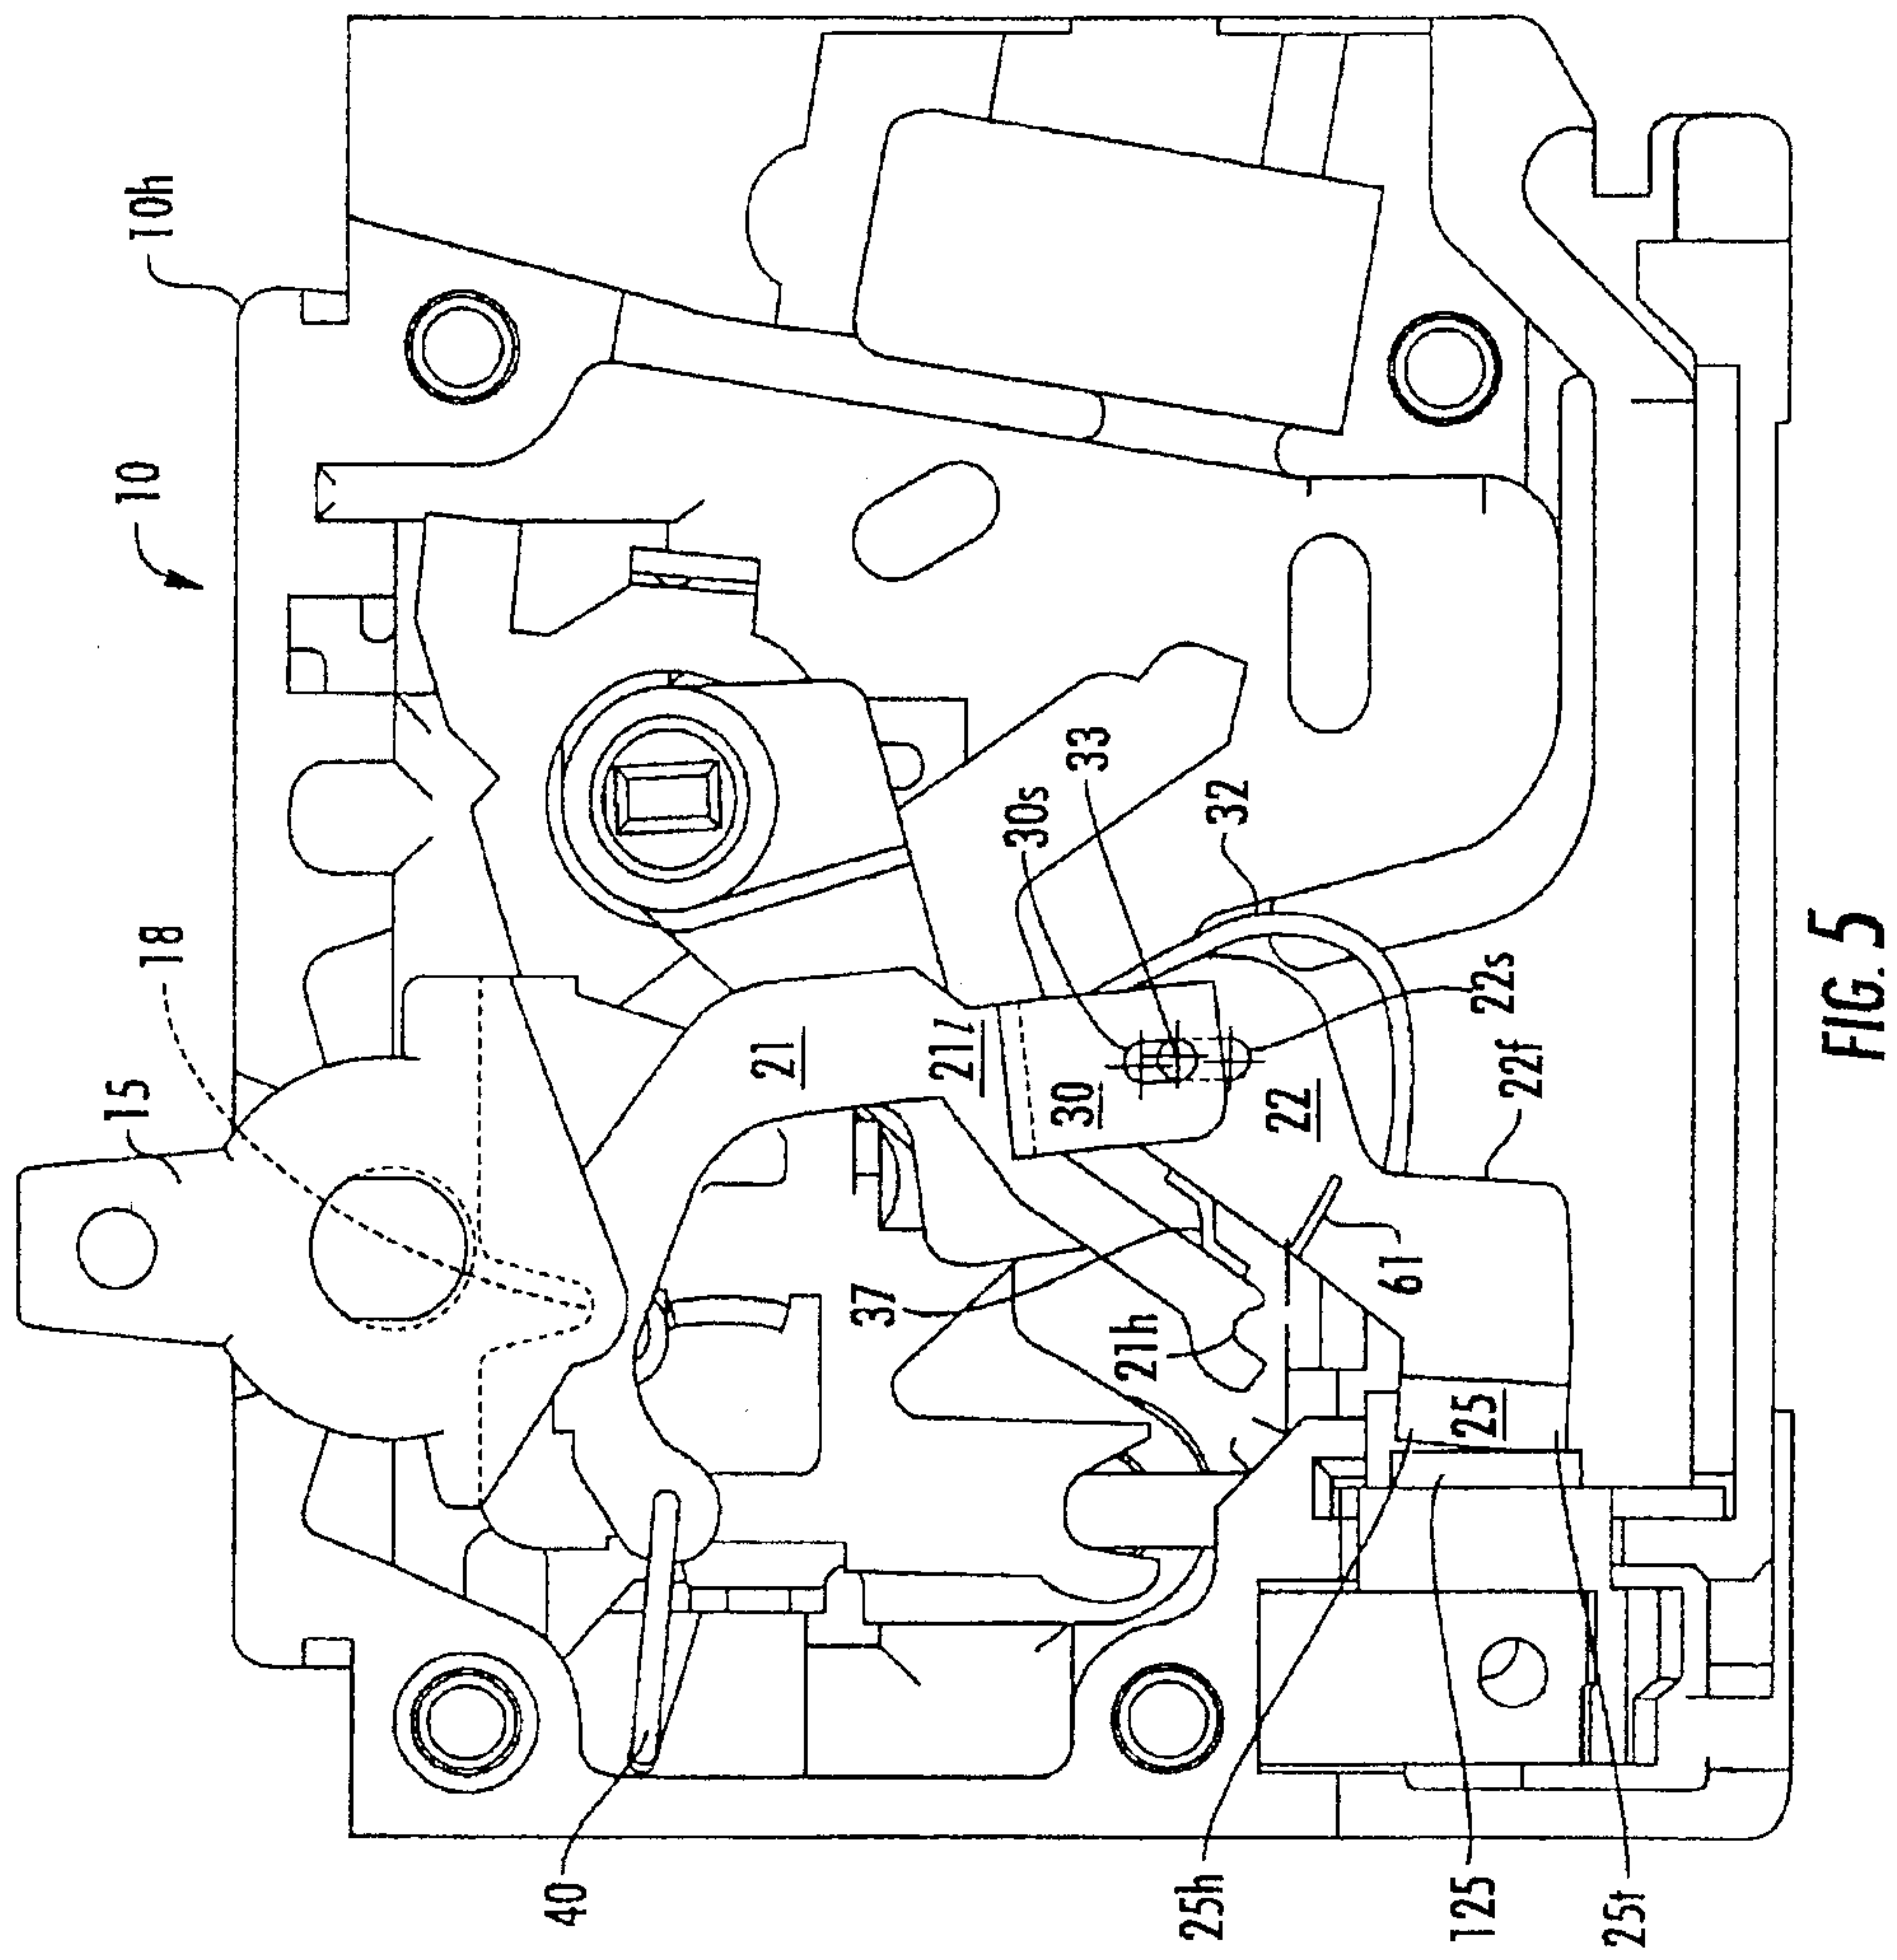


FIG. 5

6/10

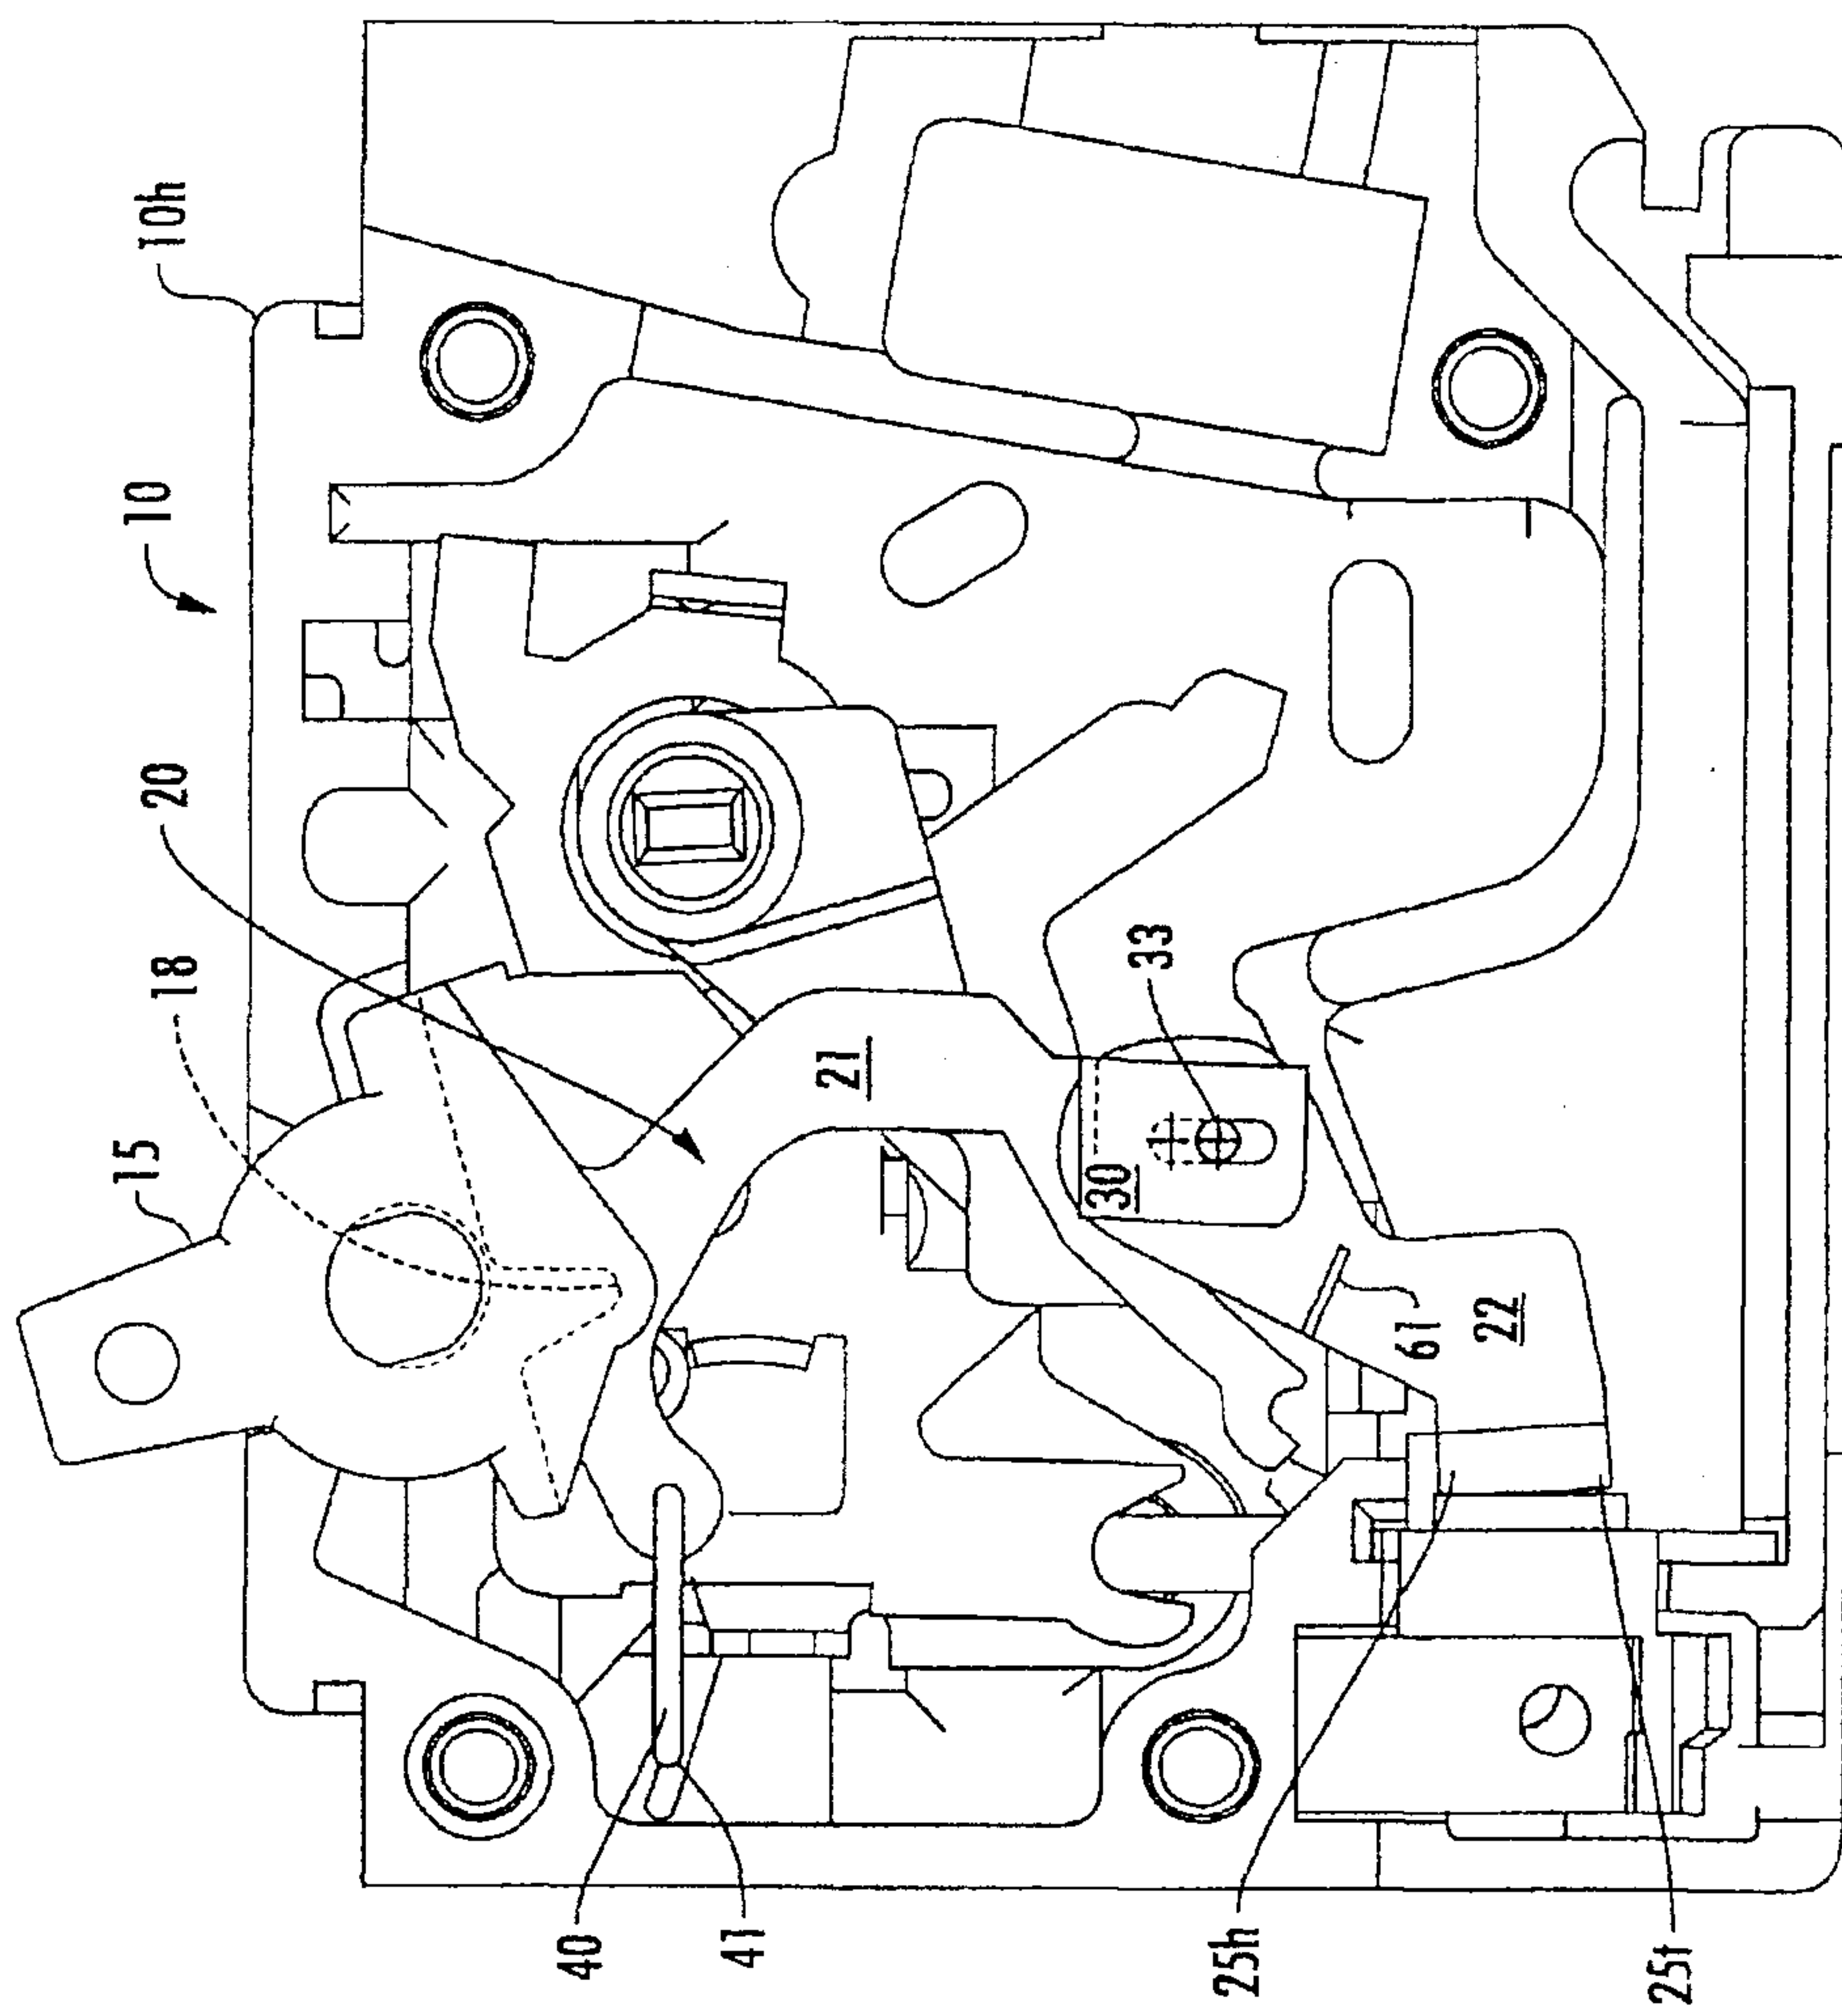


FIG. 6

7/10

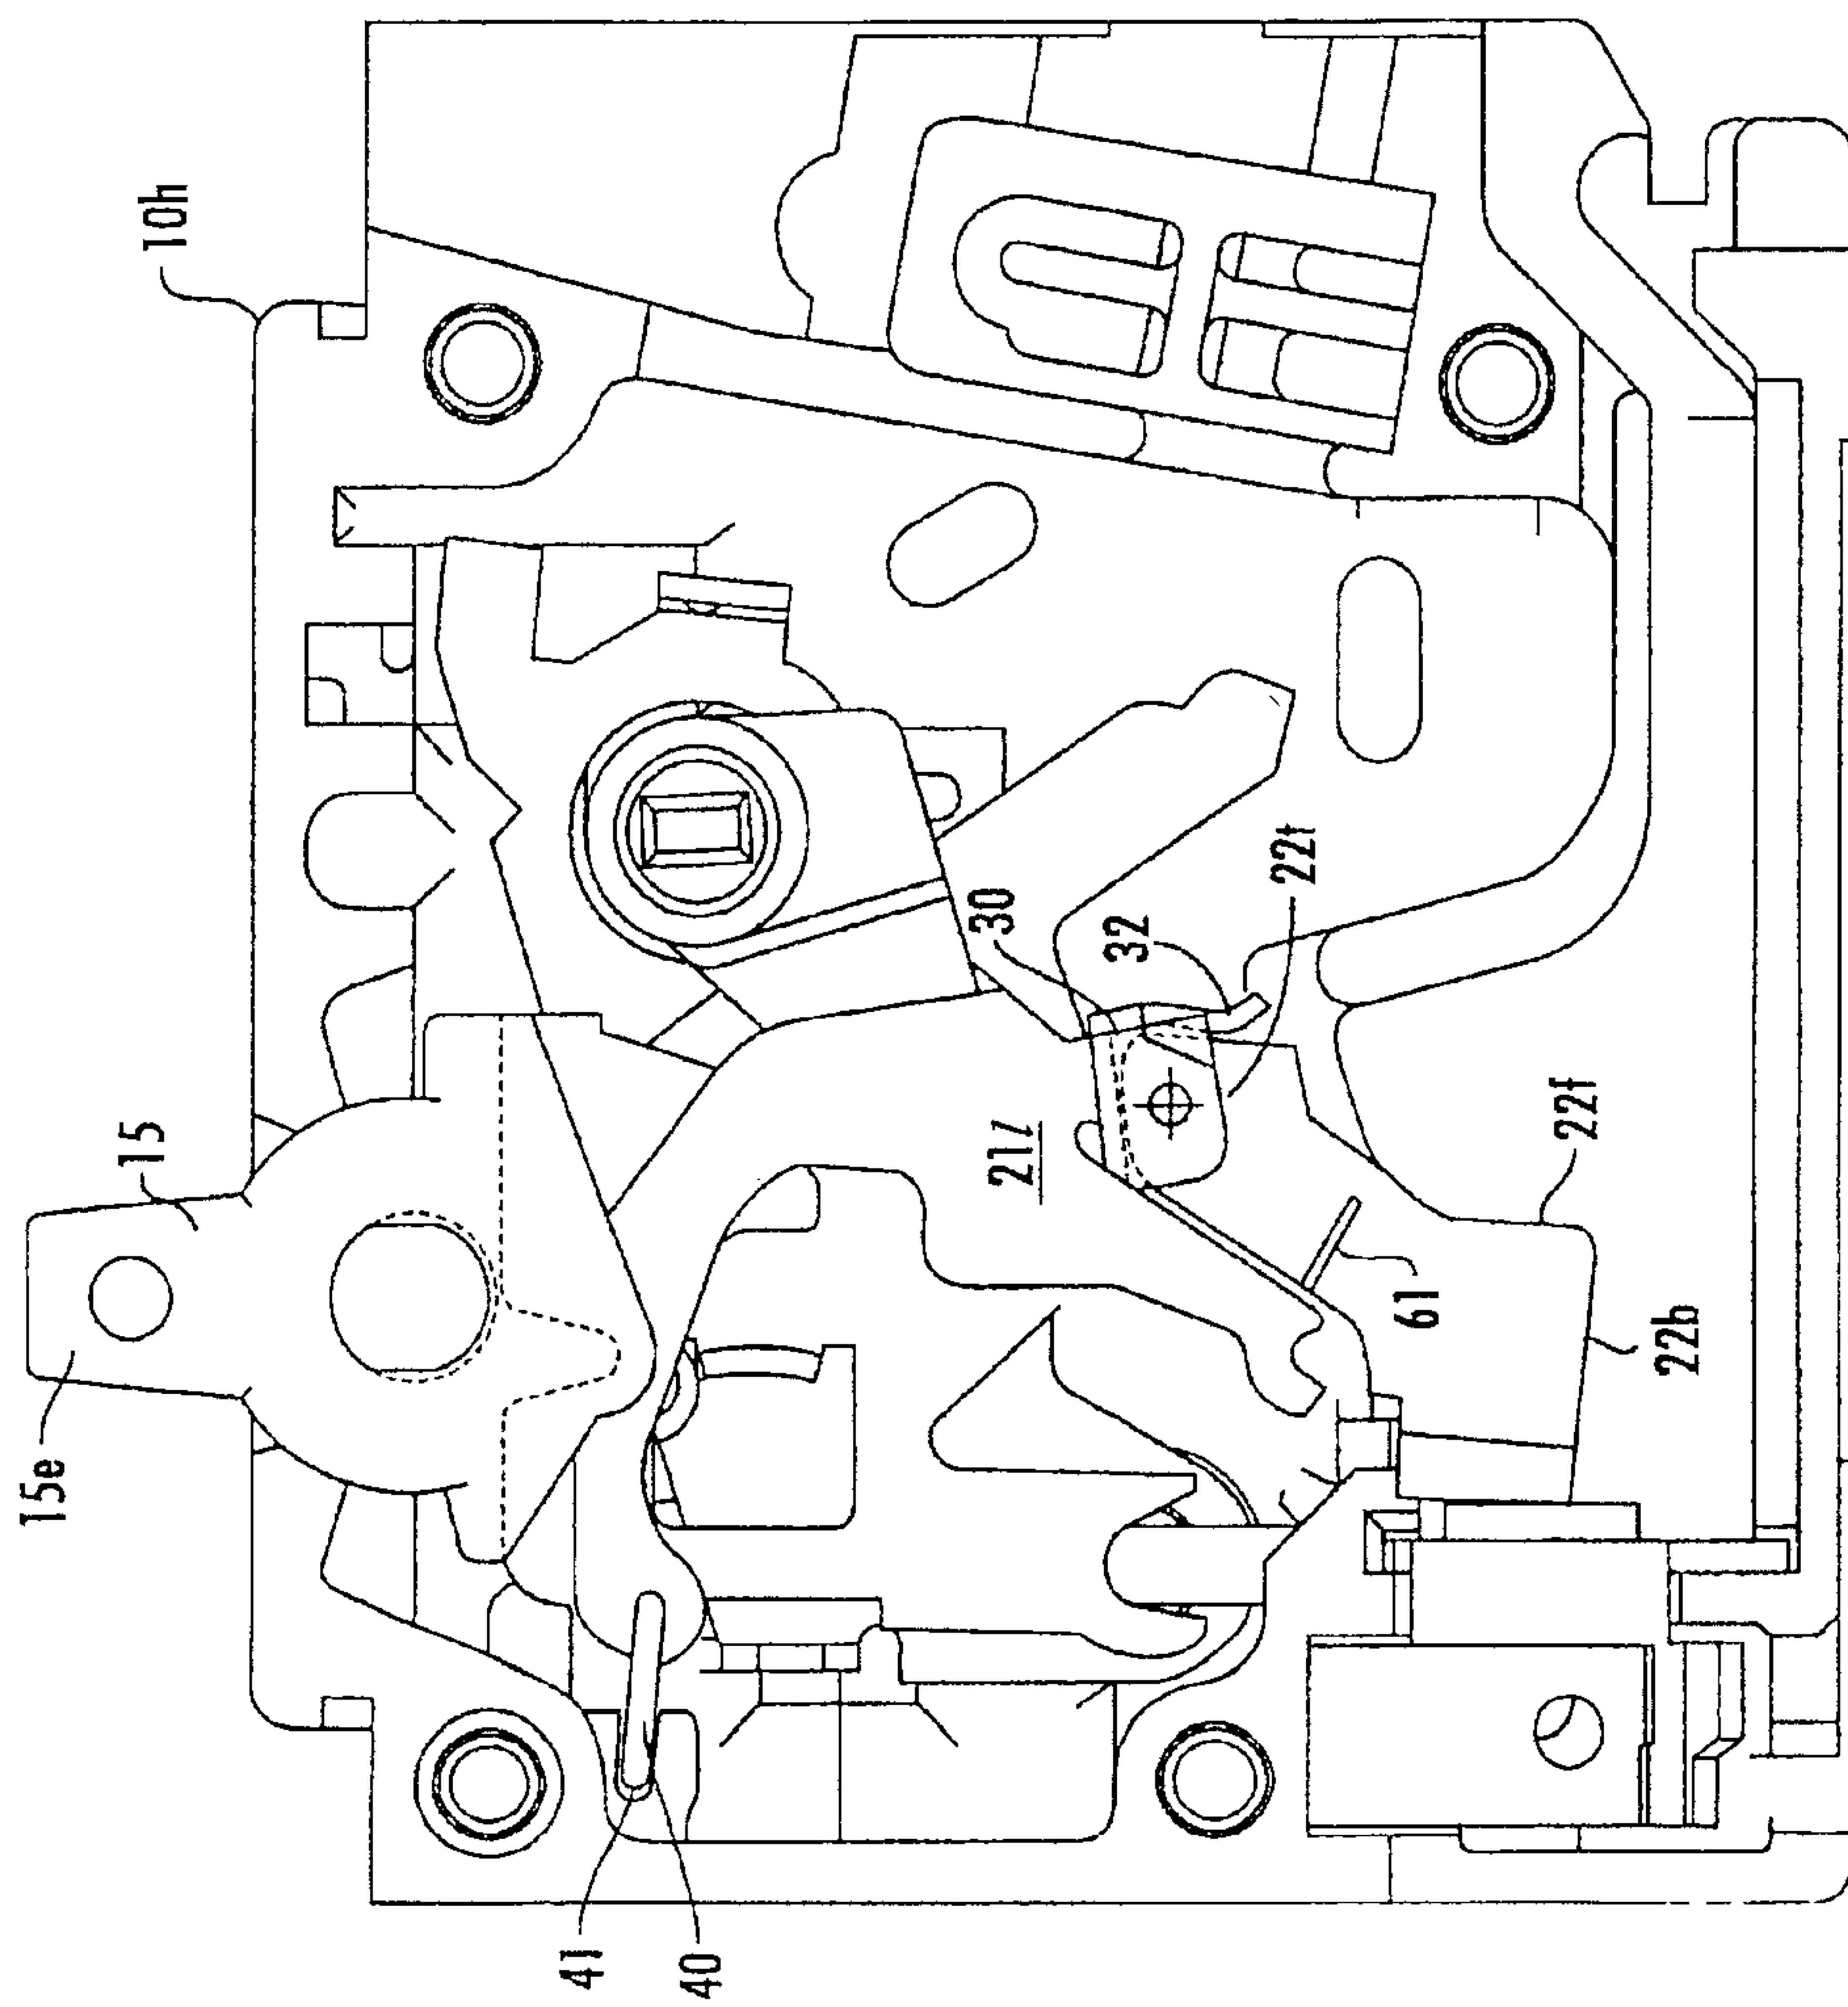


FIG. 7

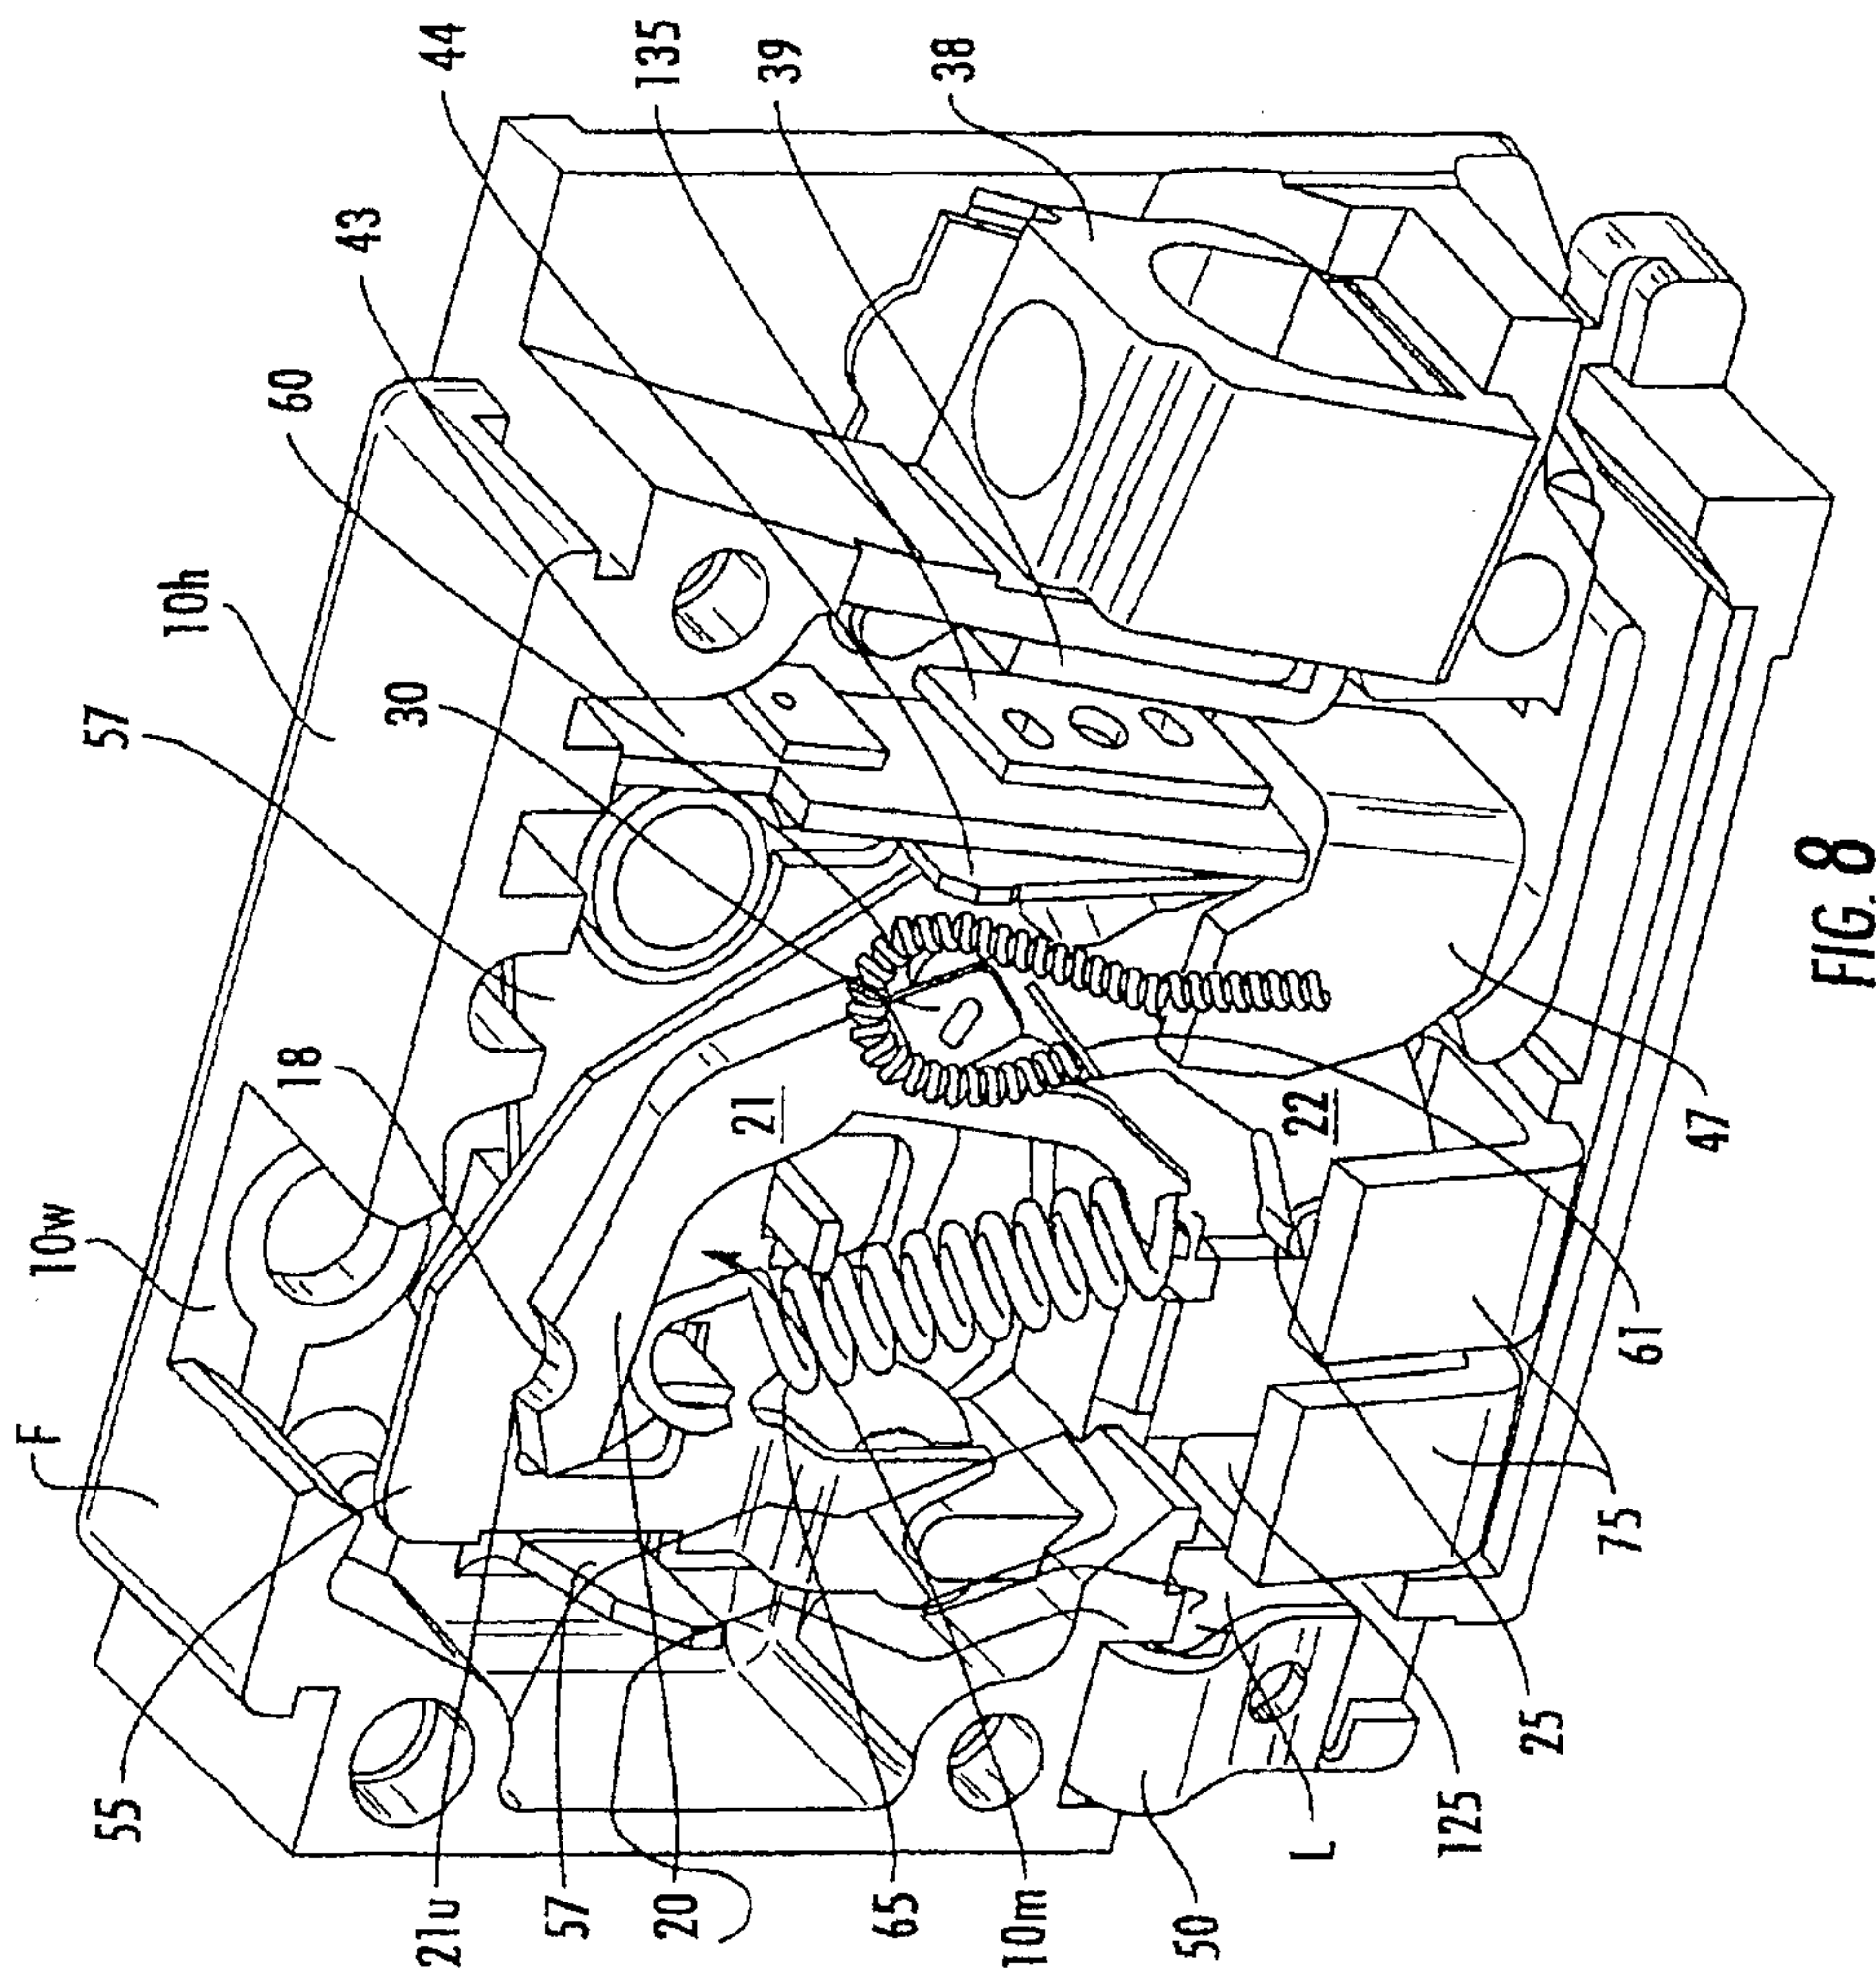


FIG. 8

9/10

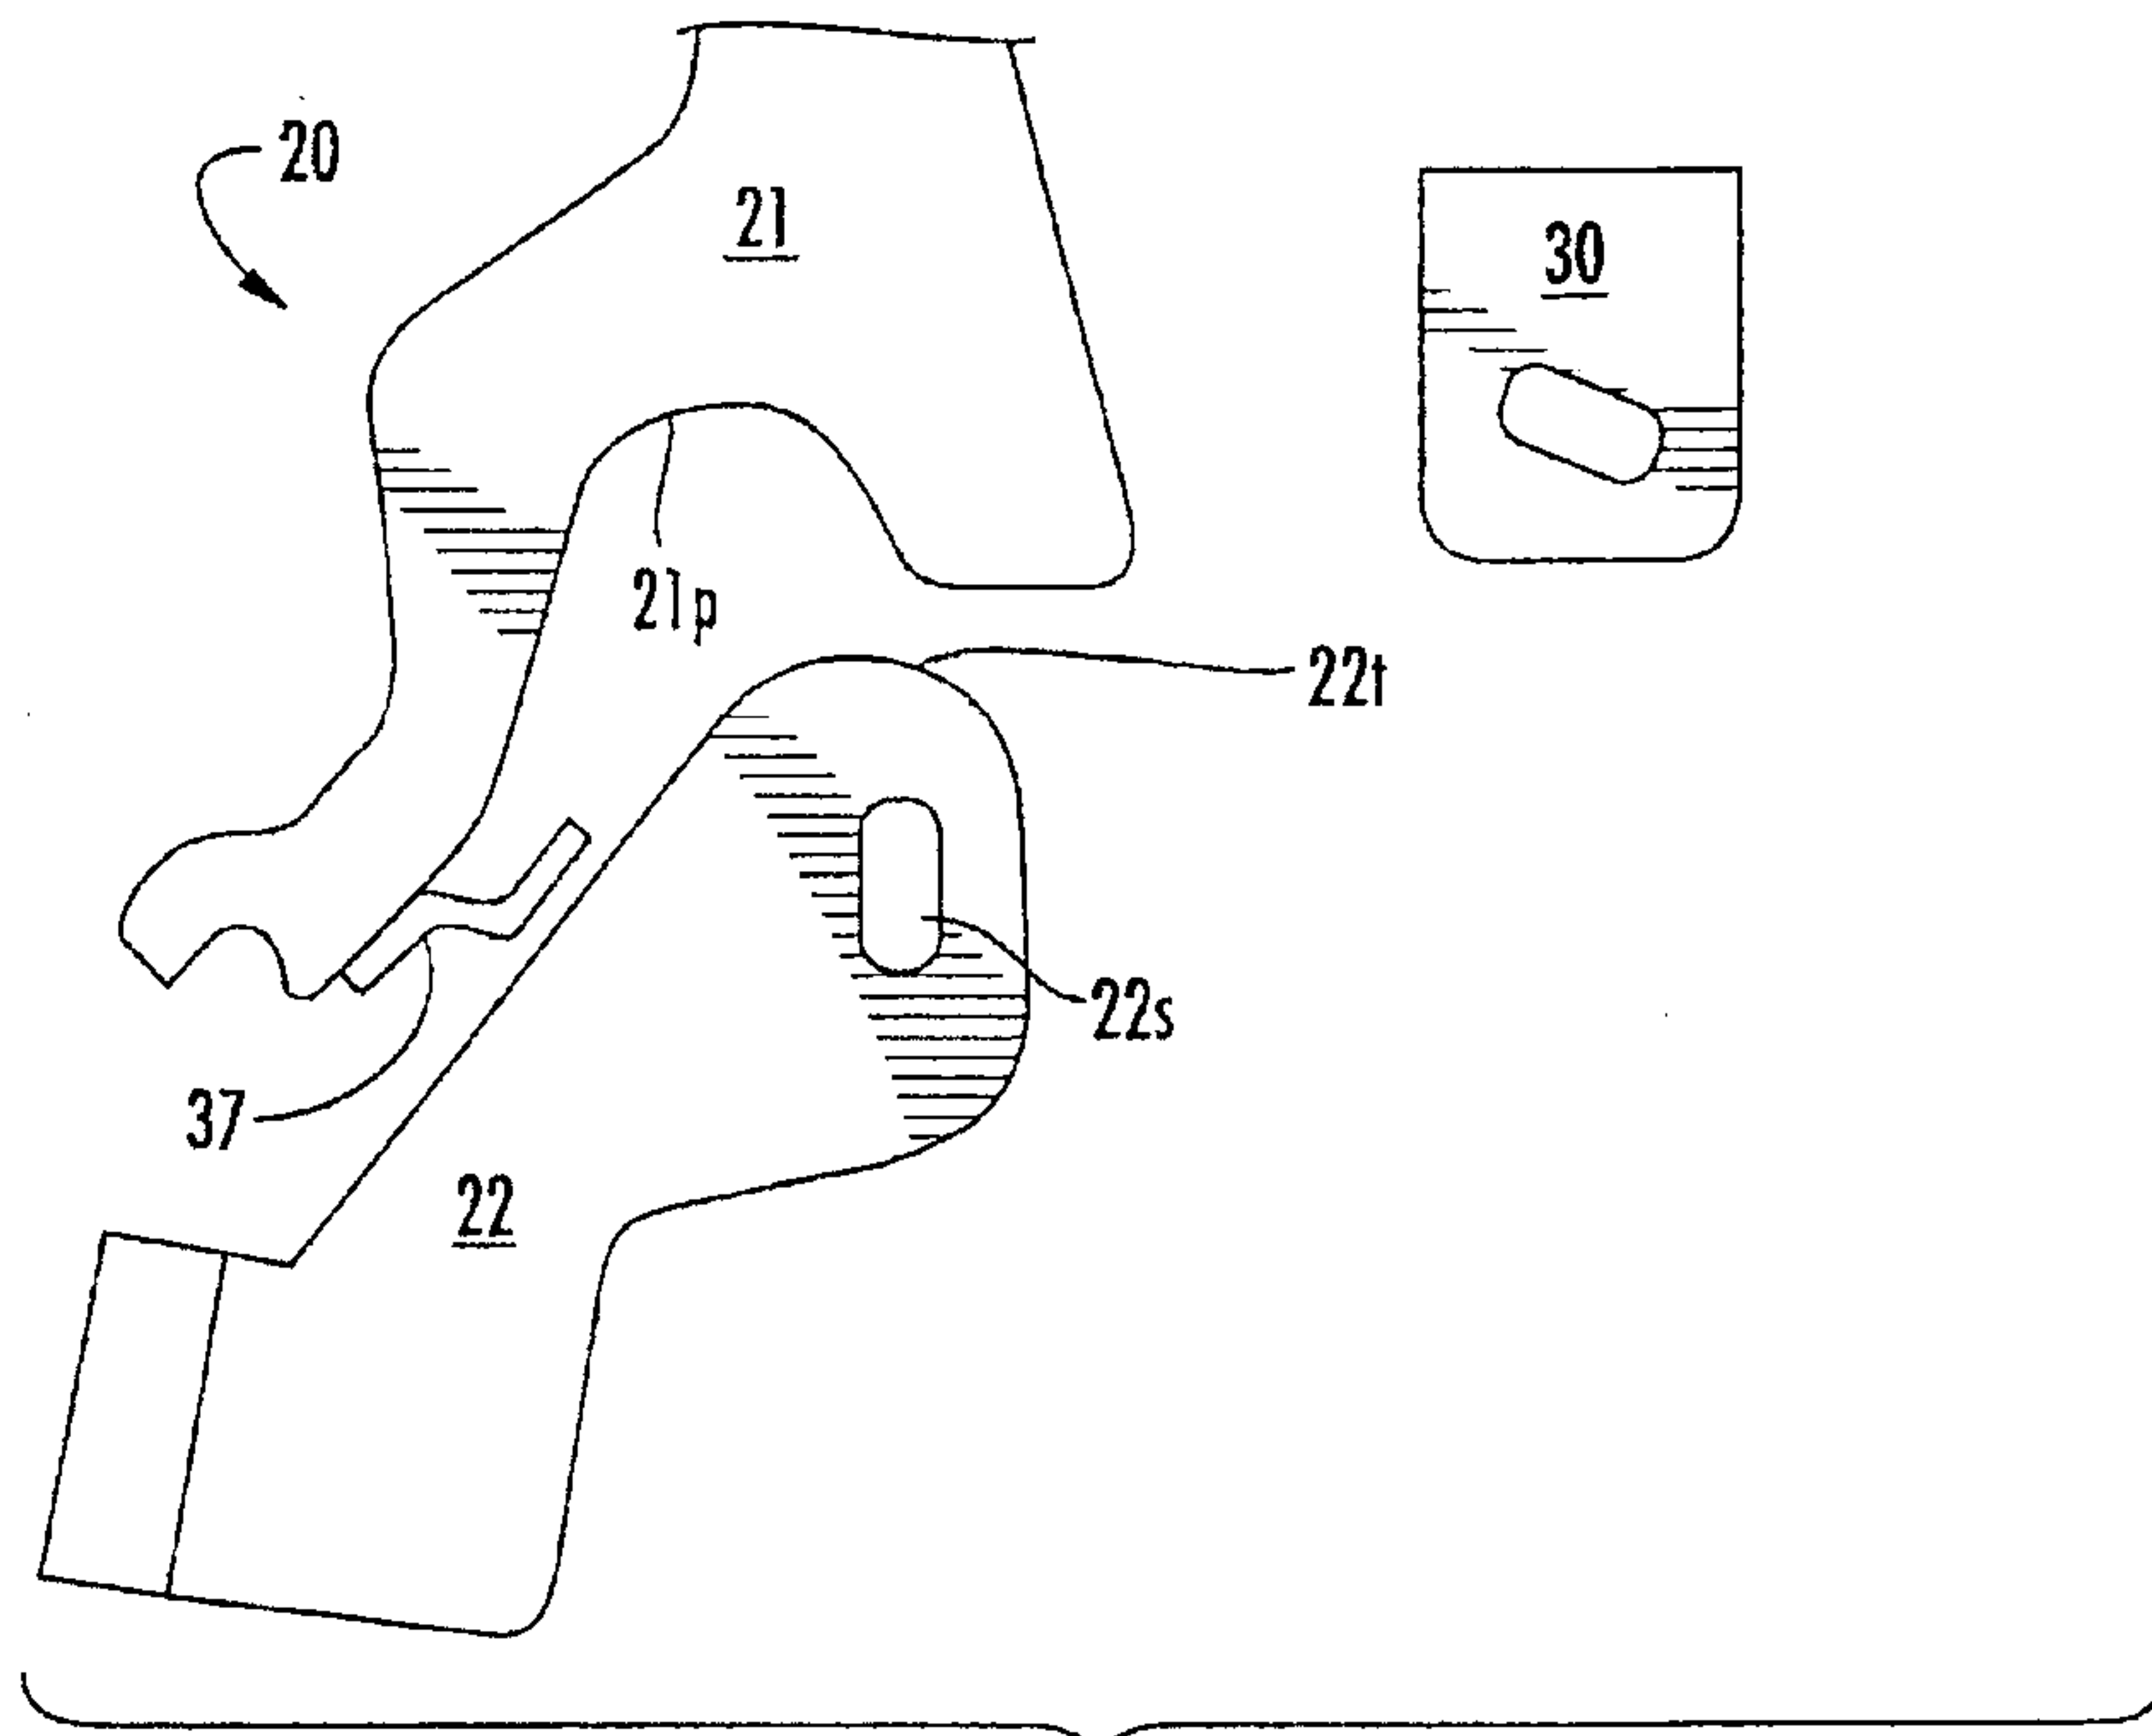


FIG. 9A

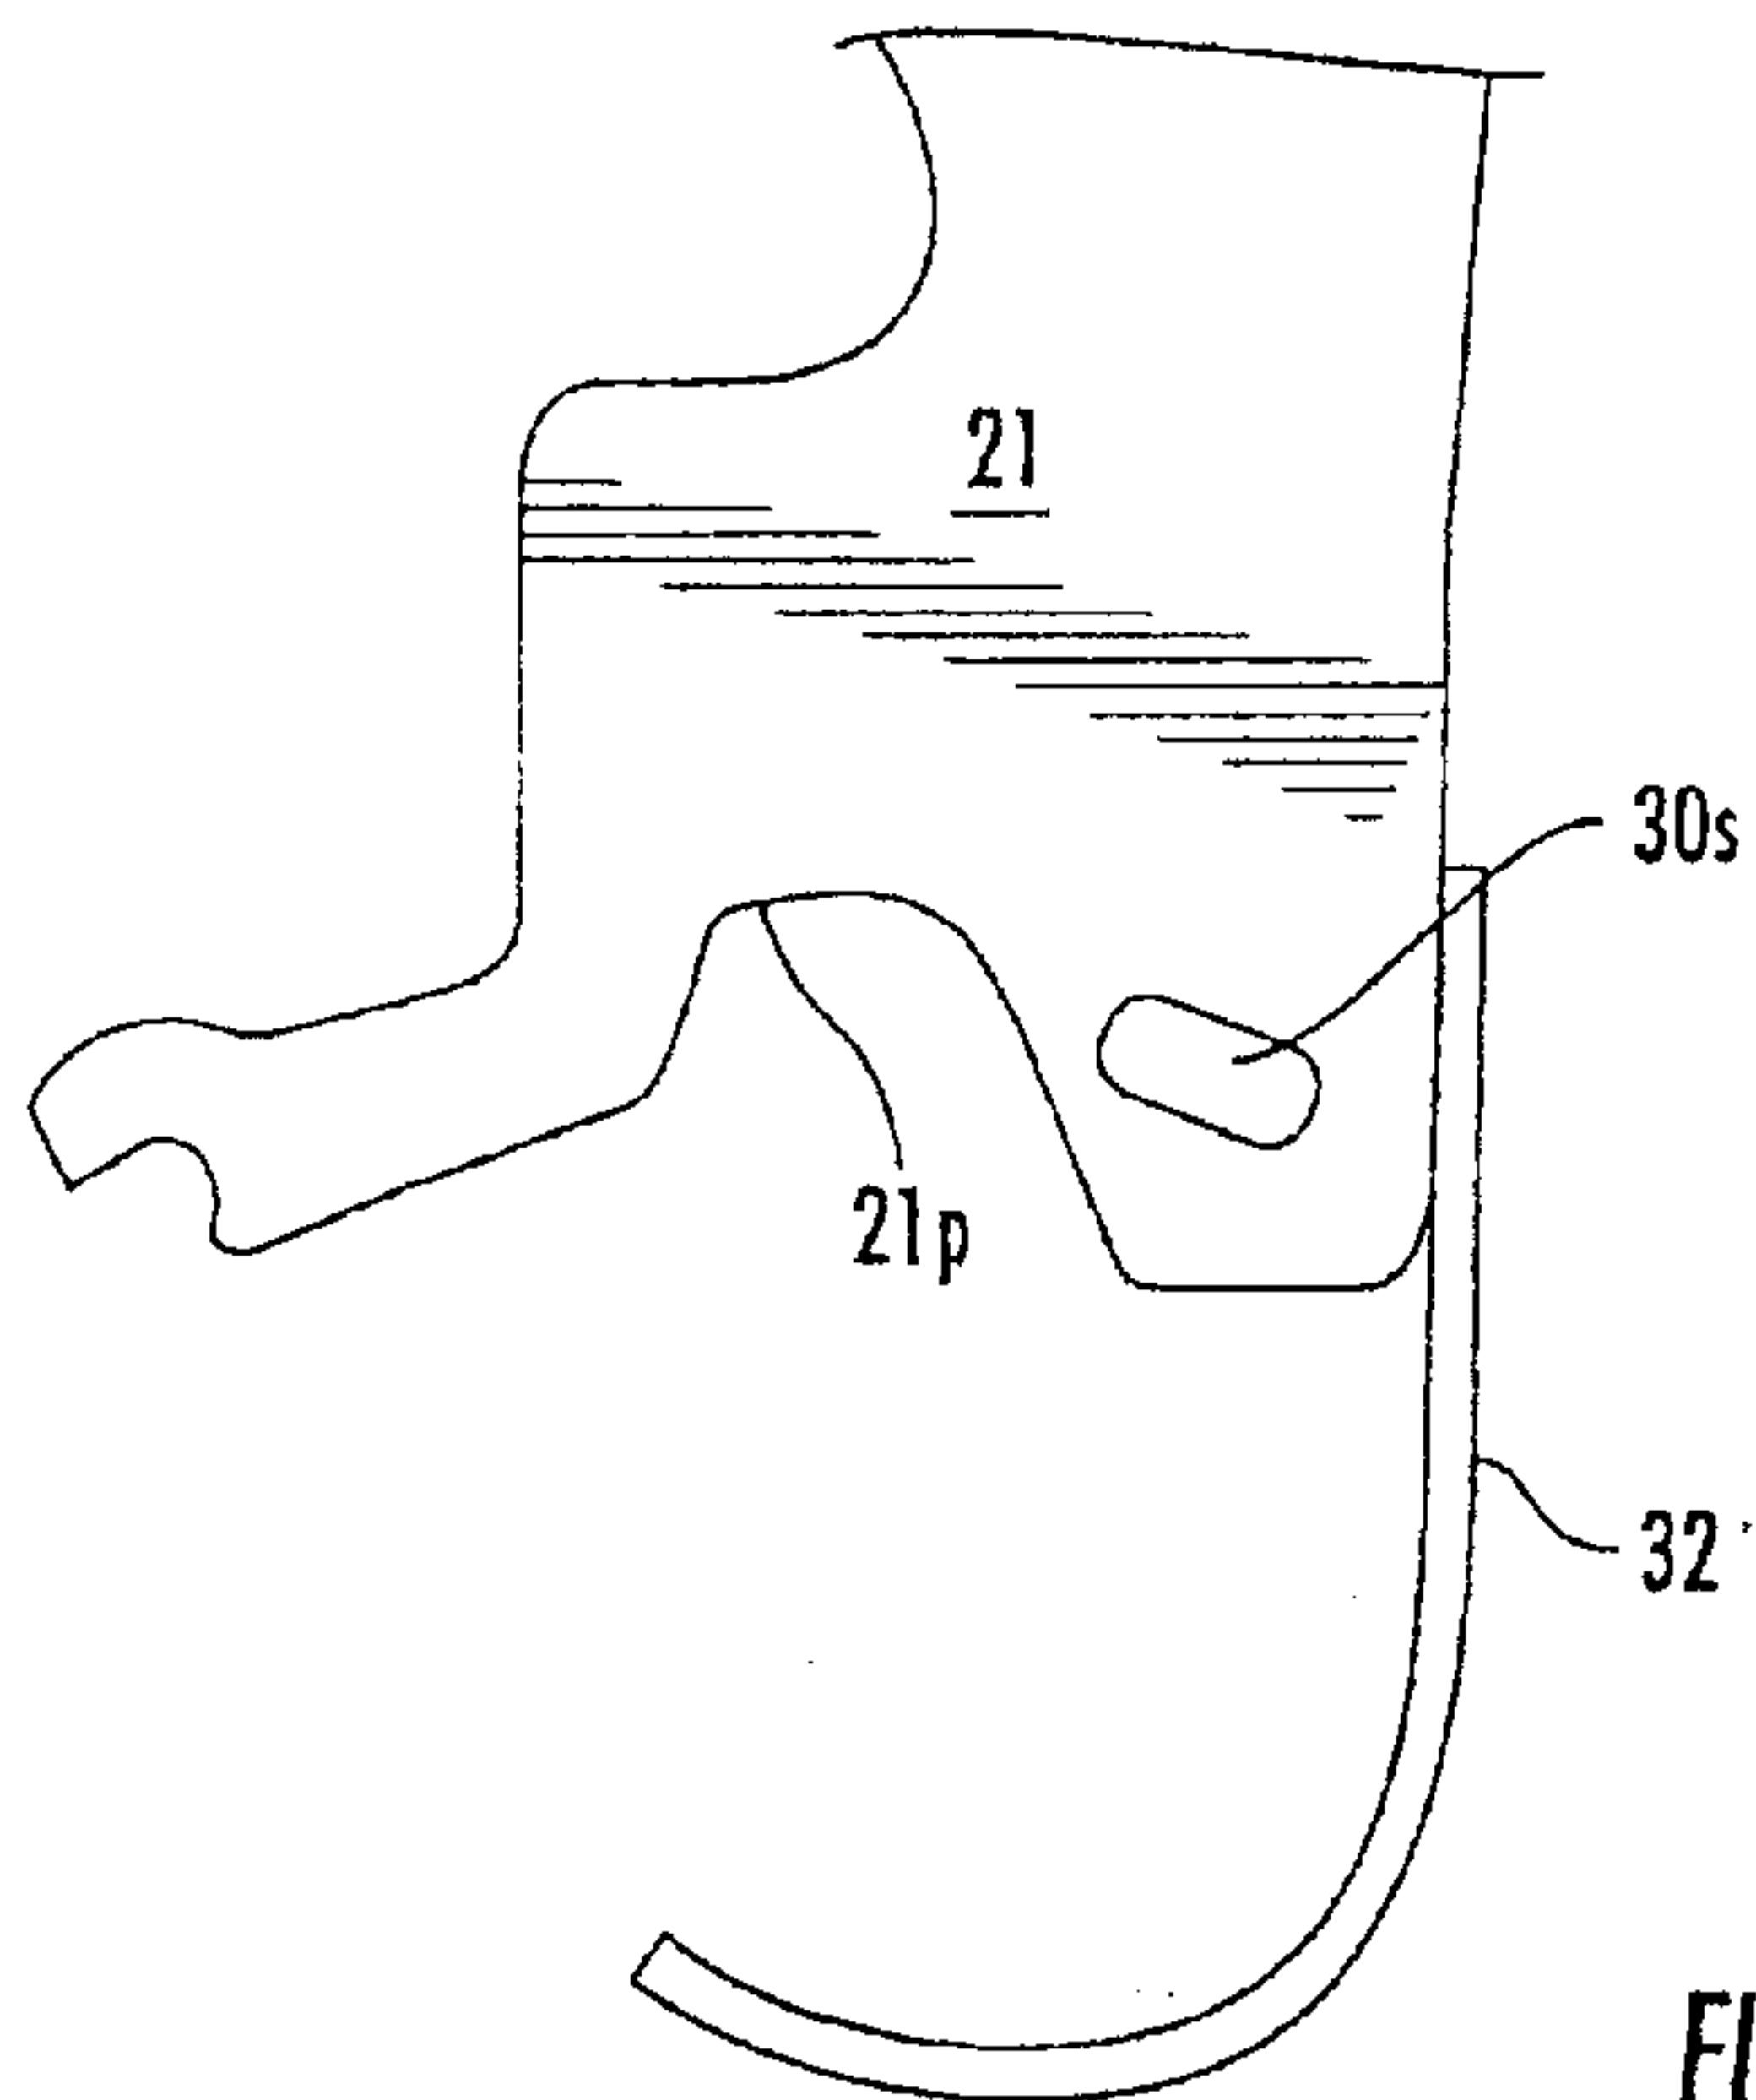


FIG. 9B

10/10

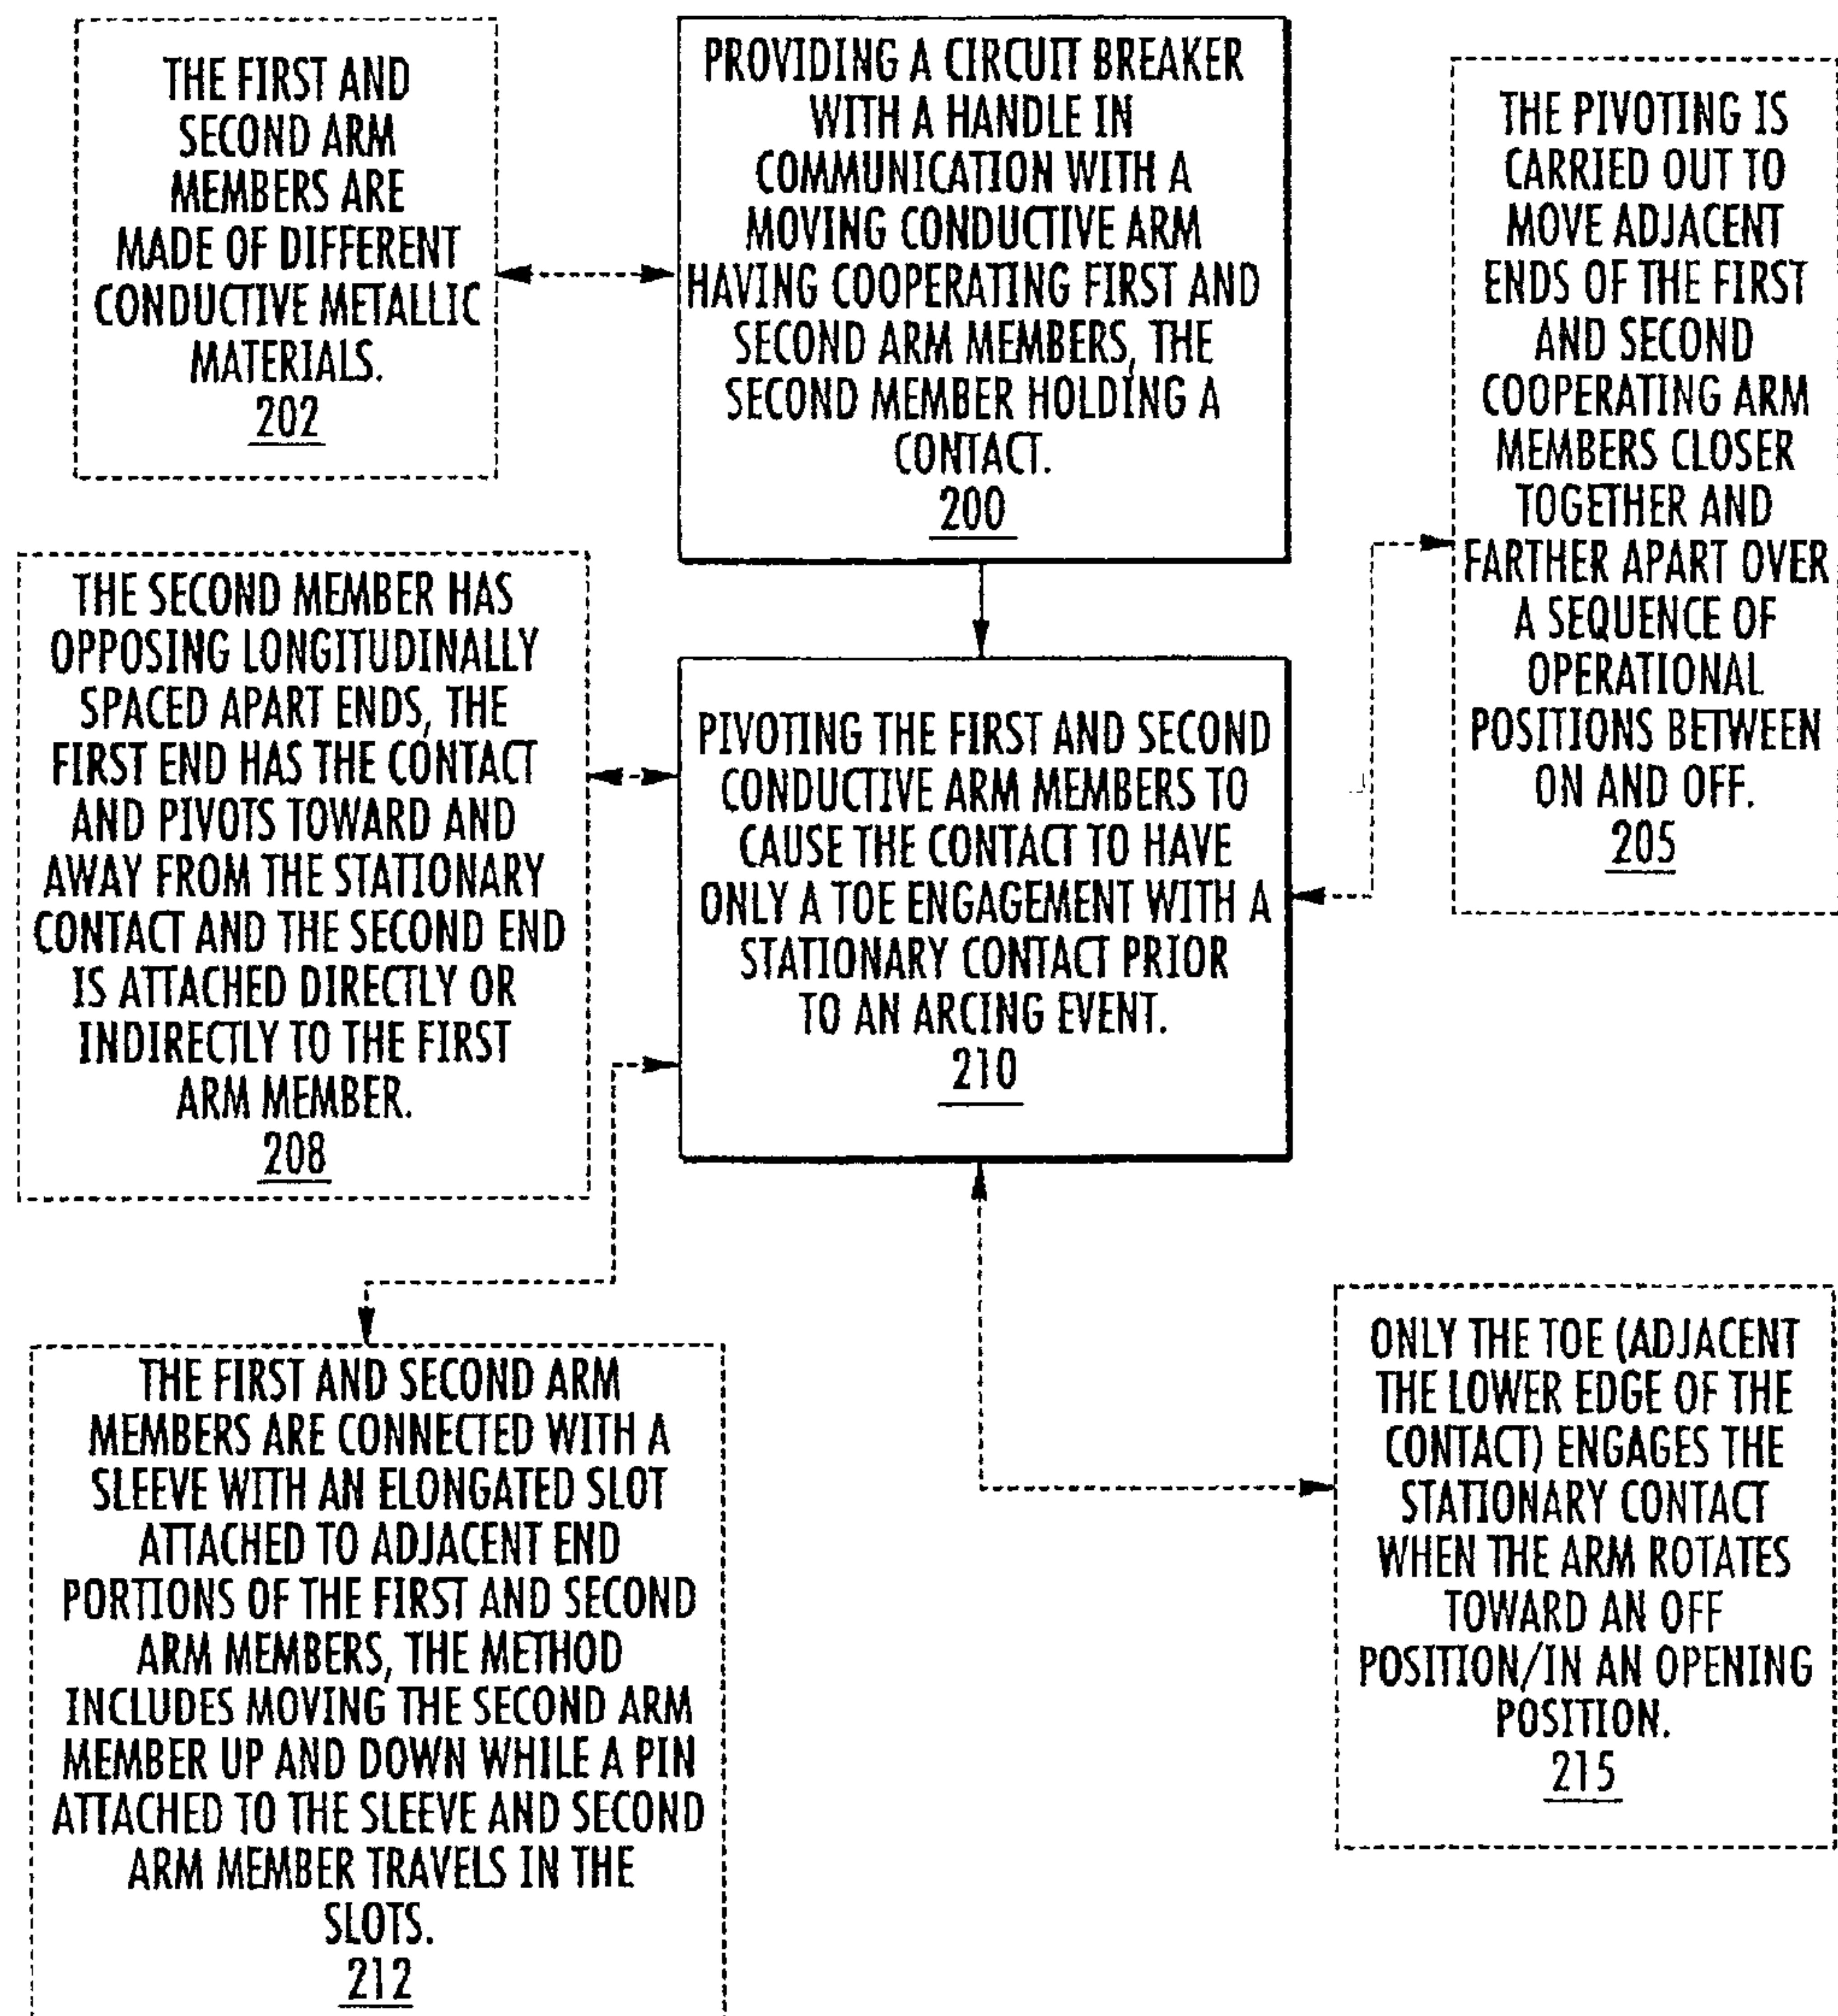


FIG. 10

ON POSITION

