




(86) Date de dépôt PCT/PCT Filing Date: 2001/11/22
(87) Date publication PCT/PCT Publication Date: 2002/05/30
(85) Entrée phase nationale/National Entry: 2003/05/20
(86) N° demande PCT/PCT Application No.: EP 2001/013587
(87) N° publication PCT/PCT Publication No.: 2002/042524
(30) Priorité/Priority: 2000/11/24 (100 58 304.0) DE

(51) Cl.Int.⁷/Int.Cl.⁷ C25B 3/00
(71) Demandeur/Applicant:
BASF AKTIENGESELLSCHAFT, DE
(72) Inventeurs/Inventors:
PUTTER, HERMANN, DE;
FISCHER, ANDREAS, DE
(74) Agent: ROBIC

(54) Titre : PROCEDE DE PRODUCTION DE LIAISONS CARBONYLE ALCOXYLEES PAR OXYDATION ANODIQUE ET
REACTION DE COUPLAGE CATHODIQUE POUR REALISER UNE SYNTHSE ORGANIQUE
(54) Title: METHOD FOR PRODUCING ALCOXYLATED CARBONYL COMPOUNDS BY AN ANODIC OXIDATION
METHOD USING A CATHODIC COUPLED REACTION FOR ORGANIC SYNTHESIS

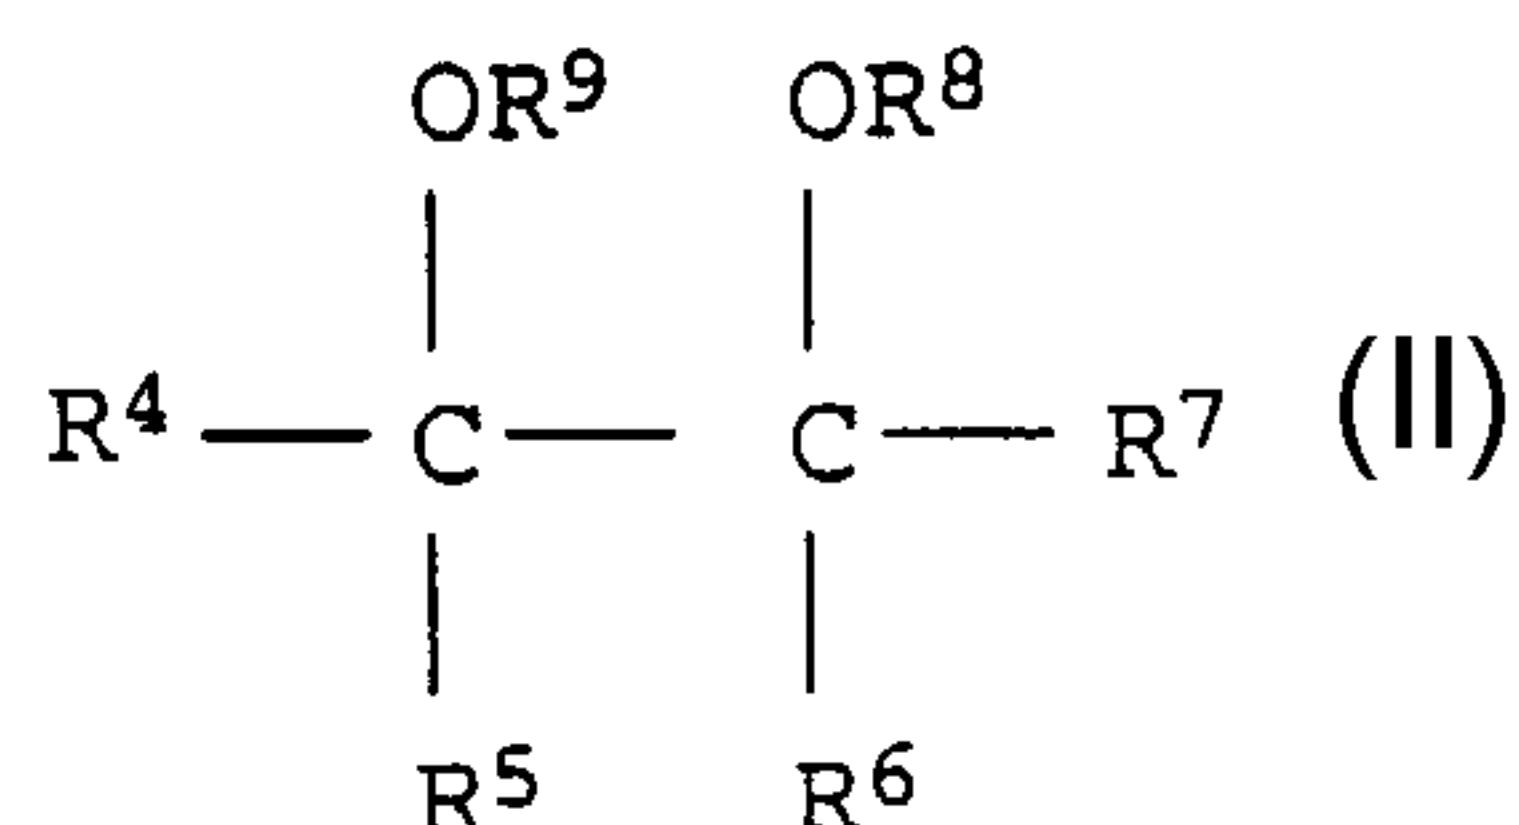

(57) **Abrégé/Abstract:**

A method for producing alcoxylated carbonyl compounds of general formula (I) (compounds I): $\text{R}^1_a \text{R}^2 \text{C}(\text{OR}^3)_b$ wherein R^1 , R^2 represent hydrogen or C_1 - C_6 -alkyl, R^3 independently means C_1 - C_6 -alkyl, a is 0 or 1, b 2 or 3 with the proviso that the sum of a and b is 3, by means of anodic oxidation of germinal dialcoxy compounds of general formula (II) (compounds II) wherein R^4 , R^5 , R^6 , R^7 represent hydrogen or C_1 - C_6 -alkyl, R^5 , R^6 represent C_1 - C_6 -alkyl or C_1 - C_6 -alcoxy, in the presence of a C_1 - C_6 -alkyl alcohol (compounds III). A usual compound (compound IV) is used as a cathodic depolarizer suitable for electrochemical oxidation. The anodic oxidation and cathodic reduction is carried out in an undivided electrolyte cell in the presence of C_1 - C_6 -alkyl alcohols.



(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
30. Mai 2002 (30.05.2002)

PCT

(10) Internationale Veröffentlichungsnummer
WO 02/042524 A3(51) Internationale Patentklassifikation⁷: **C25B 3/00**

(21) Internationales Aktenzeichen: PCT/EP01/13587

(22) Internationales Anmeldedatum:
22. November 2001 (22.11.2001)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
100 58 304.0 24. November 2000 (24.11.2000) DE(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von US): **BASF AKTIENGESELLSCHAFT** [DE/DE];
67056 Ludwigshafen (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **PÜTTER, Hermann** [DE/DE]; Haardter Strasse 1a, 67433 Neustadt (DE). **FISCHER, Andreas** [DE/DE]; Dhauner Strasse 27, 67067 Ludwigshafen (DE).(74) Gemeinsamer Vertreter: **BASF AKTIENGESELLSCHAFT**; 67056 Ludwigshafen (DE).(81) Bestimmungsstaaten (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.(84) Bestimmungsstaaten (*regional*): ARIPO-Patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI-Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Veröffentlicht:


— mit internationalem Recherchenbericht

(88) Veröffentlichungsdatum des internationalen
Recherchenberichts: 13. März 2003

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

(54) Title: METHOD FOR PRODUCING ALCOXYLATED CARBONYL COMPOUNDS BY AN ANODIC OXIDATION METHOD USING A CATHODIC COUPLED REACTION FOR ORGANIC SYNTHESIS

(54) Bezeichnung: VERFAHREN ZUR HERSTELLUNG VON ALKOXYLIERTEN CARBONYLVERBINDUNGEN DURCH EIN ANODISCHES OXIDATIONSVERFAHREN UNTER NUTZUNG DER KATHODISCHEN KOPPELREAKTION ZUR ORGANISCHEN SYNTHESE

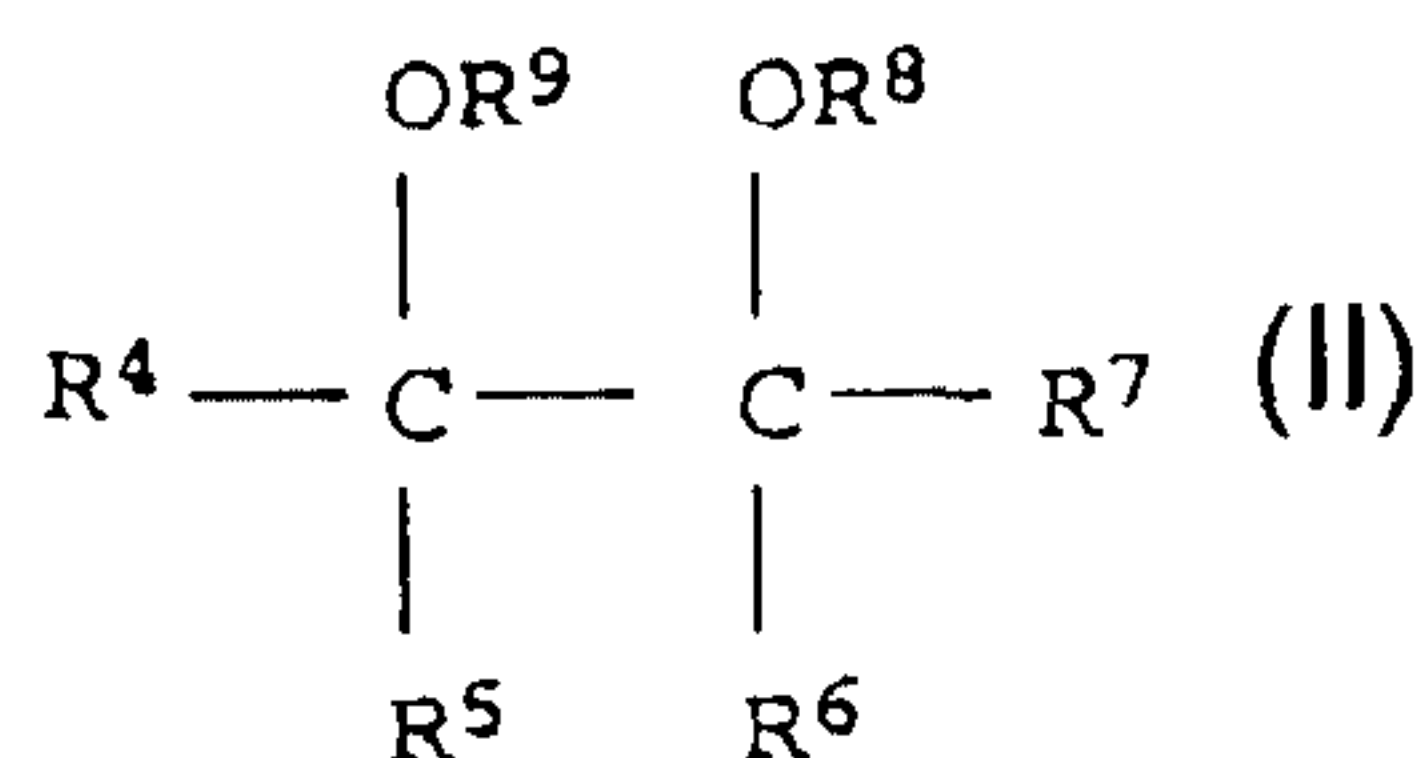

(57) Abstract: A method for producing alcoxylated carbonyl compounds of general formula (I) (compounds I): $\text{R}^1_a\text{R}^2\text{C}(\text{OR}^3)_b$ wherein R^1 , R^2 represent hydrogen or C_1 - C_6 -alkyl, R^3 independently means C_1 - C_6 -alkyl, a is 0 or 1, b 2 or 3 with the proviso that the sum of a and b is 3, by means of anodic oxidation of germinal dialcoxy compounds of general formula (II) (compounds II) wherein R^4 , R^5 , R^6 , R^7 represent hydrogen or C_1 - C_6 -alkyl, R^5 , R^6 represent C_1 - C_6 -alkyl or C_1 - C_6 -alcoxy, in the presence of a C_1 - C_6 -alkyl alcohol (compounds III). A usual compound (compound IV) is used as a cathodic depolarizer suitable for electrochemical oxidation. The anodic oxidation and cathodic reduction is carried out in an undivided electrolyte cell in the presence of C_1 - C_6 -alkyl alcohols.

(57) Zusammenfassung: Verfahren zur Herstellung von alkoxylierten Carbonylverbindungen der allgemeinen Formel (I) (Verbindungen I): $\text{R}^1_a\text{R}^2\text{C}(\text{OR}^3)_b$, in der R^1 , R^2 Wasserstoff oder C_1 - bis C_6 -Alkyl, R^3 unabhängig von einander C_1 - bis C_6 -Alkyl, a 0 oder 1, b 2 oder 3 mit der Maßgabe, daß die Summe aus a und b 3 beträgt, durch anodische Oxidation von geminalen Dialkoxyverbindungen der allgemeinen Formel (II) (Verbindungen II) in der R^4 , R^5 , R^6 , R^7 Wasserstoff oder C_1 - bis C_6 -Alkyl, R^5 , R^6 C_1 - bis C_6 -Alkyl oder C_1 - bis C_6 -Alkoxy bedeuten in Gegenwart eines C_1 - bis C_6 -Alkylalkohols (Verbindungen III), wobei man als kathodischen Depolarisator eine übliche organische Verbindung (Verbindung IV) einsetzt, die sich für die elektrochemische Oxidation eignet und wobei man die anodische Oxidation und die kathodische Reduktion in einer ungeteilten Elektrolysezelle in Gegenwart von C_1 - C_6 -Alkylalkoholen ausführt.

WO 02/042524 A3

METHOD FOR PRODUCING ALCOXYLATED CARBONYL COMPOUNDS BY AN
ANODIC OXIDATION METHOD USING A CATHODIC COUPLED REACTION
FOR ORGANIC SYNTHESIS


The present invention relates to a process for preparing alkoxyated carbonyl compounds of the general formula I (compounds I)



where

R^1 and R^2 are each hydrogen or C_1 - C_6 -alkyl,
 R^3 is independently at each instance C_1 - C_6 -alkyl,
 a is 0 or 1 and
 b is 2 or 3,

20 with the proviso that the sum total of a and b is 3, by anodic oxidation of geminal alkoxy compounds of the general formula II (compounds II)

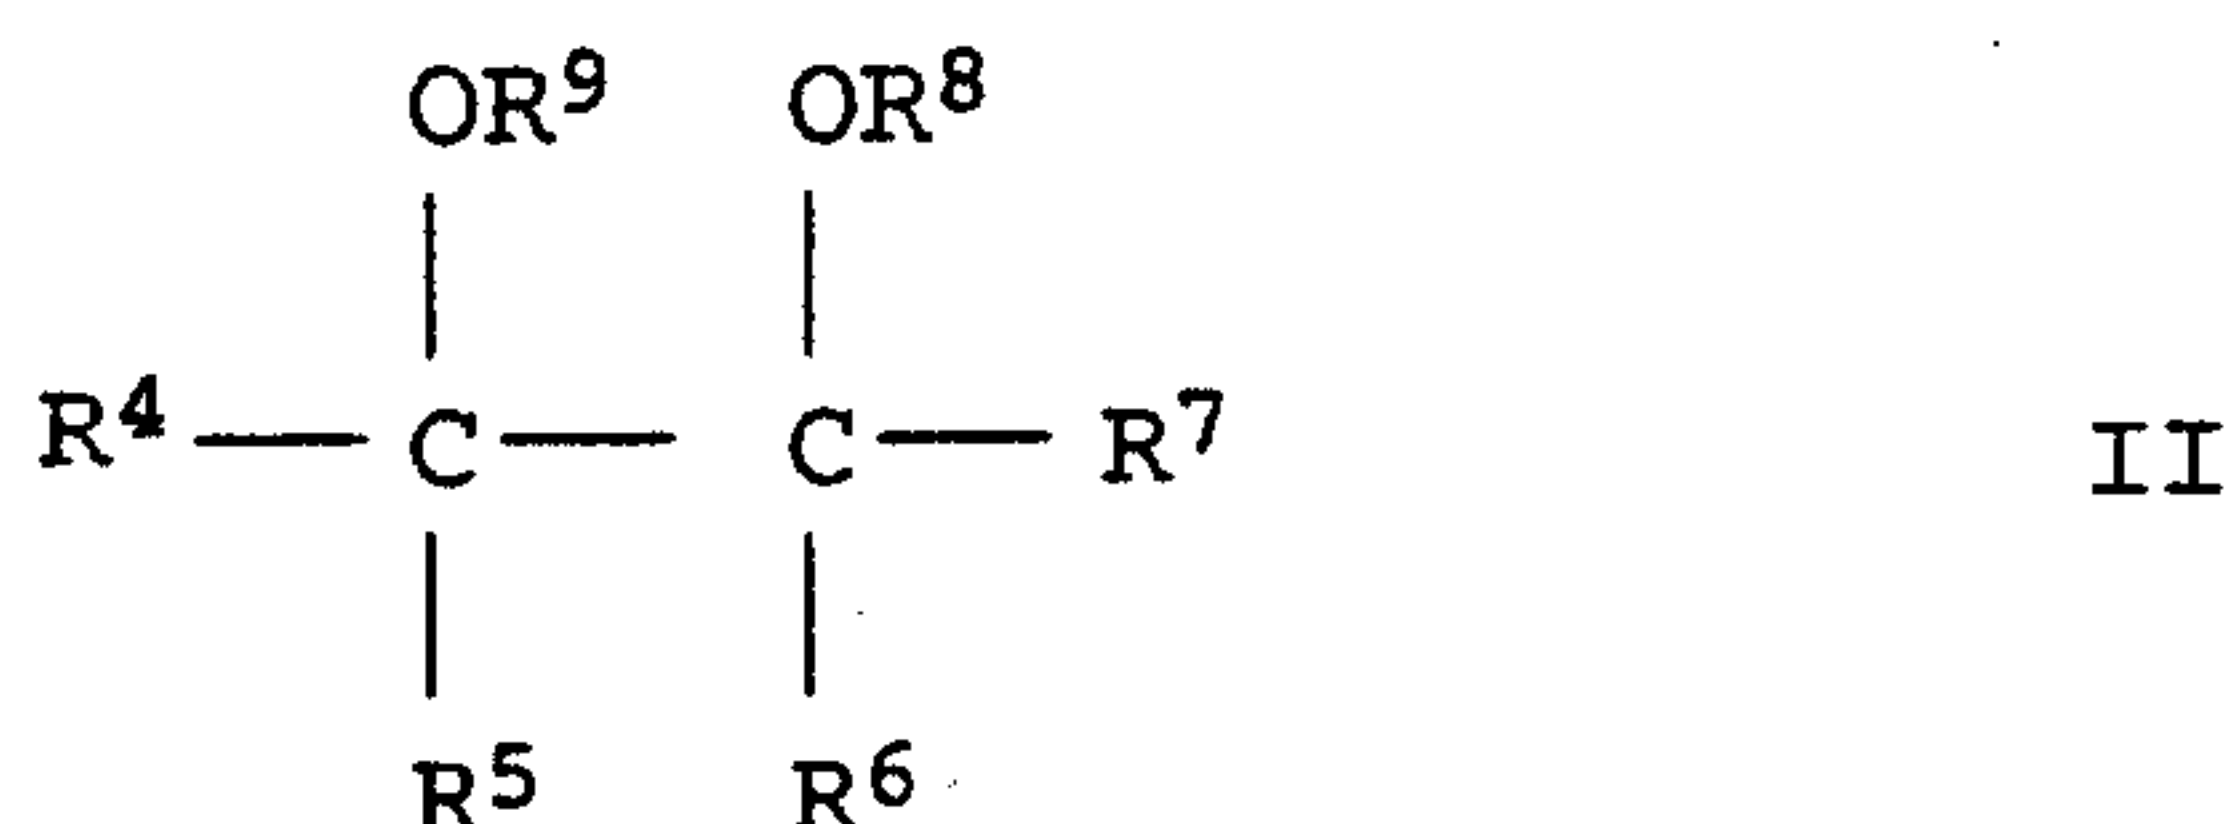

where

30 R^4 , R^5 , R^6 and R^7 are each hydrogen or C_1 - C_6 -alkyl and
 R^5 and R^6 are each C_1 - C_6 -alkyl or C_1 - C_6 -alkoxy,

in the presence of a C_1 - C_6 -alkyl alcohol (compounds III), which comprises using a cathodic depolarizer comprising a customary organic compound (compounds IV) that is suitable for electrochemical reduction and conducting the anodic oxidation and the cathodic reduction in an undivided electrolytic cell in the presence of C_1 - C_6 -alkyl alcohols.

The preparation of organic compounds by concurrently utilizing the cathode reaction and the anode reaction has already been the focus of intensive research work on account of its particularly

high energy efficiency (see M.M. Baizer, Organic Electrochemistry, 3rd Ed. (Eds. H. Lund and M.M. Baizer), Marcel Dekker, Chapter 35, New York 1991).

- 5 Although there are scientific papers (cf. Nonaka and Li, Electrochemistry, 67, 1999, Jan., 4-10) pointing out that there is in principle a multitude of coproduction possibilities, concrete industrial teaching is to be found in the scientific literature only for a few, and usually specific, examples.

10

- Apart from a few mixtures (cf. DE-A-19618854) it has been determined that coproduction electrosynthesis is associated with technical disadvantages which rule out large scale industrial use in practice. These include in particular the difficult separation
15 of the resulting reaction mixtures and also chemical reactions of reactants and products at the respective counterelectrodes, whereby the yield of the desired products of value is much reduced when the reaction is carried out in undivided electrolytic cells. The use of divided electrolytic cells would
20 avoid these disadvantages, it is true, but these cell designs are very capital intensive. Especially in organic electrolytes, commercially available ion exchange membranes possess only very limited stability that rules out sustained industrial use.

- 25 J. Amer. Chem. Soc., (1975) 2546 and J. Org. Chem., 61 (1996) 3256 and Electrochim. Acta 42, (1997) 1933 disclose electrochemical processes whereby a C-C single bond between carbon atoms which each carry an alkoxy function can be oxidatively cleaved.

30

DE-A-10043789, unpublished at the priority date of the present invention, describes the production of orthoesters from alkoxyated diketones.

- 35 However, neither of the last two references cited suggests that these production processes might be useful in the realm of coproduction electrosynthesis.

- It is an object of the present invention to provide a
40 coproduction electrosynthesis process that combines the preparation of alkoxyated carbonyl compounds by anodic oxidation with the preparation of high value added organic compounds in a cathodic reduction and that does not have the aforementioned disadvantages of customary coproduction syntheses and, more
45 particularly, provides the desired products of value in high yields.

We have found that this object is achieved by the process described above.

It is particularly favorable to use 1,2-di(C₁-C₆-alkoxy)ethane or
5 1,2-di(C₁-C₆-alkoxy)propane or 1,1,2,2-tetra(C₁-C₆-alkoxy)ethane
or 1,1,2,2-tetra(C₁-C₆-alkoxy)propane (compounds II). The
compounds I produced in the process are the corresponding
formaldehyde di(C₁-C₆-alkyl) acetals or tri(C₁-C₆-alkyl)
orthoformates and in the case of the propane derivatives as
10 starting materials likewise acetaldehyde
di(C₁-C₆-alkyl) acetals or tri(C₁-C₆-alkyl) orthoacetates. The
aforementioned acetaldehyde and acetic acid derivatives are
likewise preparable from 2,3-di(C₁-C₆-alkoxy)butane.

15 This is a particularly simple way of obtaining especially
formaldehyde dimethyl acetal, trimethyl orthoformate,
acetaldehyde dimethyl acetal and trimethyl orthoacetate from the
corresponding compounds II and methanol.

20 As well as the aforementioned di- or tetraalkoxy ethane or
-propane derivatives, useful compounds I and II include
especially those where R⁴ has the same meaning as R⁷ and R⁵ the
same meaning as R⁶ in order that the number of compounds in the
reaction mixture to be worked up may be minimized.

25 Generally, alcohols will be used whose alkyl radicals have the
same meanings as R⁸ and R⁹ or as the alkyl radicals in R⁵ and R⁶,
provided R⁵ and R⁶ are each C₁-C₆-alkoxy.

30 Useful cathodic depolarizers are customary organic compounds that
are suitable for anodic reduction, such as aromatic hydrocarbyl
compounds, activated olefins, carbonyl compounds, aromatic
carboxylic acids and derivatives thereof and also naphthalene or
ring-substituted naphthalene derivatives.

35 The process of the invention is particularly useful for preparing
the following compounds or classes of compounds:

a) maleic acid or maleic acid derivatives where the acid
40 function is in the form of alkyl esters into tetraalkyl
butanetetracarboxylates by hydrodimerization,

b) benzenemono-, -di- or -tricarboxylic acids other than
phthalic acid or phthalic acid derivatives, or benzenemono-,
45 -di- or -tricarboxylic acid derivatives where the acid
function is in the form of alkyl esters or derivatives
substituted on the aromatic nucleus, into the corresponding

mono-, di- and triformylbenzene compounds where the formyl groups are present in the form of an acetal,

- 5 c) acrylic acid, alkyl acrylates, acrylamide or acrylonitrile or homologues thereof into the corresponding hydrodimerization products; preferred homologues are those of the general formula V



10

where X is an alkoxy carbonyl, nitrile or carbamide group and R^{10} is C_1-C_6 -alkyl,

- 15 d) phthalic acid, alkyl phthalates or derivatives thereof substituted on the aromatic nucleus, into phthalide or ring-substituted phthalide derivatives, cyclohexane- or cyclohexene-1,2-dicarboxylic acid, dialkyl cyclohexane- or cyclohexene-1,2-dicarboxylates or derivatives substituted on the cyclohexane or cyclohexene ring in correspondence with the substitution pattern of the phthalic acid derivatives that are substituted on the aromatic nucleus,

20

- e) naphthalene or ring-substituted naphthalene derivatives into 1,2,3,4-tetrahydronaphthalene or the corresponding 1,2,3,4-tetrahydronaphthalene derivatives,

25

- f) pyridine or ring-substituted pyridine derivatives into 1,4-dihydropyridine or the corresponding 1,4-dihydropyridine derivatives.

30

Alkyl ester groups in reactants or products are in particular C_1-C_6 -alkyl ester groups.

- 35 Useful substituents for substitution on the aromatic rings in the aforementioned starting compounds include inert, difficult-to-reduce groups such as C_1-C_{12} -alkyl, C_1-C_6 -alkoxy or halogen.

- 40 As regards the phthalide or phthalide derivatives mentioned under point d), these are in particular compounds as described in DE-A-19618854.

Said reference likewise provides a more particular description of particularly suitable starting compounds.

45

The molar ratio of the starting compounds for cathode and anode reactions and also of the thereby formed products in the electrolytes relative to each other is uncritical.

- 5 Generally the molar ratio of the sum total of compounds I and II to the alcohols (compounds IV) will be in the range from 0.1:1 to 5:1, preferably in the range from 0.2:1 to 2:1, particularly preferably in the range from 0.3:1 to 1:1.
- 10 Conducting salts included in the electrolysis solution will generally be alkali metal, tetra(C₁-C₆alkyl)ammonium or tri(C₁-C₆-alkyl)benzylammonium salts. Useful counterions include sulfate, hydrogen sulfate, alkyl sulfates, alkyl sulfonates, halides, phosphates, carbonates, alkyl phosphates, alkyl
- 15 carbonates, nitrate, alkoxides, tetrafluoroborate or perchlorate.

Useful conducting salts further include the acids derived from the aforementioned anions.

- 20 Preference is given to methyltributylammonium methosulfate (MTBS), methyltriethylammonium methosulfate or methyltripropylmethylammonium methosulfates.

- The electrolysis solution may include customary cosolvents. These
- 25 are inert solvents having a high oxidation potential which are generally customary in organic chemistry. Examples are dimethyl carbonate and propylene carbonate.

- The process of the invention may be carried out in any customary
- 30 undivided electrolytic cell type. It is preferable to operate a continuous process using undivided flowthrough cells. Stack plate cells having stack electrodes connected in series as described for example in DE-A-19533773 are particularly suitable.

- 35 The current densities used in the process are generally in the range from 1 to 1000 mA/cm², preferably in the range from 10 to 100 mA/cm². The temperatures are generally in the range from -20 to 60°C, preferably in the range from 0 to 60°C. The process is generally carried out at atmospheric pressure. Higher pressures
- 40 are preferably reserved for the use of higher temperatures, in order that boiling of the starting compounds or cosolvents may be avoided.

Useful anode materials include for example noble metals such as platinum or metal oxides such as ruthenium or chromium oxide or mixed oxides of the RuO_xTiO_x type. Preference is given to graphite or coal electrodes.

5

Useful cathode materials include for example iron, steel, stainless steel, nickel or noble metals such as platinum and also graphite or coal materials. Preference is given to a system utilizing graphite as anode and cathode and also graphite as
10 anode and nickel, stainless steel or ordinary steel as cathode.

After the reaction is ended, the electrolyte solution is worked up by general methods of separation. For this, the electrolysis solution is generally first distilled and the individual
15 compounds are obtained separately in the form of different fractions. Further purification may be effected for example by crystallization, distillation or chromatography.

It is unexpected that the anodic oxidation of compounds I to II
20 in the presence of a cathodic production of a multiplicity of organic compounds in an undivided cell is accomplished in good yields because compounds I, acetals and orthoesters, are themselves reactive compounds.

25 Example 1

An undivided cell has 11 annular disk electrodes each about 140 cm² in surface area and 14 cm in outer diameter, arranged in the form of a stack. Spacers are used to space the disks about
30 1 mm apart, so that there are 10 gaps between the annular disks. The electrode material is graphite. The inner disks, which are 0.5 cm in thickness, are connected in a bipolar series during electrolysis. The uppermost electrode is connected as the anode by means of a graphite plunger and a surface disk. The bottommost
35 electrode is connected as the cathode via the base plate of the electrolytic cell. The electrolyte flows through the central hole in the base plate into the cell and then becomes distributed between the gaps and leaves the cell above the uppermost electrode. The cell is part of a loop apparatus in which the
40 electrolyte is recirculated, heated or cooled.

975 g of tetramethoxyethane, 936 g of dimethyl maleate, 170 g of 60% methanolic solution of methyltributylammonium methosulfate and 419 g of methanol were electrolyzed using a current strength
45 of 3 A. In the course of the electrolysis, the current strength decreased to 2.5 A and the voltage per gap rose from 5 V to 6 V.

Altogether, electrolysis was continued until the dimethyl maleate conversion was 95%. Temperature: 38°C, pumping rate: 183 l/h.

The electrolysis effluent contained 24.4% of methyl

5 butanetetetracarboxylate, 14.2% of trimethyl orthoformate, 25.6% of tetramethoxyethane and 1.7% of dimethyl maleate. The selectivity of orthoester formation was 82%. The composition of the electrolysis effluent was determined by gas chromatography and is reported in area percent (GC area%).

10

The current yield based on dimethyl maleate was 80%. Byproducts included dimethyl succinate and dimethyl 2-methoxysuccinate (sum total: 11%).

15 Example 2

A cell as per Example 1 was used, the number of gaps being 7.

1062 g of tetramethoxymethane, 303 g of methyl benzoate, 225 g of
20 60% methyltributylammonium methosulfate solution and 910 g of methanol were electrolyzed at 3 A. The voltage per gap was kept below 5 V, the temperature was 30°C, and the pumping rate was 190 l/h. After the electrolysis had ended, 10.0 GC area % of trimethoxymethane and 13.2 GC area % of benzaldehyde dimethyl
25 acetal had formed in the electrolyte; tetramethoxyethane had been degraded from 42.5% to 25.6 GC area %, and methyl benzoate was down to 0.4 GC area %, having been converted to more than 95%. Low-boiling byproducts included methyl formate at 2.2 GC area % in the electrolyte.

30

Example 3

A cell as per Example 2 was used.

35 1200 g of tetramethoxymethane, 776 g of dimethyl o-phthalate, 166 g of 60% methyltributylammonium methosulfate solution in 385 g of methanol were electrolyzed at 2.6 A. The voltage per gap was maintained at 5.1-5.3 V, the temperature was 30°C and the pumping rate was 170 l/h. Conversion was monitored via GC. After
40 2.4 F, corresponding to 120% of the theoretical current quantity, the tetramethoxymethane conversion was 66% and 28.4% of trimethoxymethane had formed in the solution, and the dimethyl o-phthalate conversion was 88%, it having been converted into phthalide at a selectivity of 90%.

45

Example 4

The cell and the cell circuit have a similar construction to Example 1; 11 electrodes 65 mm in diameter and 31.6 cm² in surface area form 10 gaps.

229 g of tetramethoxymethane, 229 g of pentenenitrile and 28.8 g of 60% methyltributylammonium methosulfate solution in 114 g of methanol were circulated at a rate of 25 l/h at 23°C and an initial current strength of 1 A. The cell voltage was kept below 50 V, and the final current strength was 0.55 A.

The electrolysis was discontinued after 10 h, when 64% of tetramethoxyethane and 76% of pentenenitrile had been converted. Trimethyl orthoformate, methyl formate and formaldehyde dimethyl acetal had formed at the anode in a ratio of 1:0.17:0.1. The main products at the cathode were 3.4-diethyladiponitrile, pentanenitrile and 3-methoxypentanenitrile in a ratio of 1:0.3:0.8. A distillative workup provided the hydrodimerization product of pentenenitrile, namely 3.4-diethyladiponitrile, in 97% purity.

25

30

35

40

45

We claim:

1. A process for preparing formaldehyde di(C₁- to C₆-alkyl)
5 acetals, tri(C₁- to C₆-alkyl) orthoformates, acetaldehyde
di(C₁- to C₆-alkyl) acetals or tri(C₁- to C₆-alkyl)
orthoacetates (compounds I)

by anodically oxidizing
10 1,2-di(C₁- to C₆-alkoxy)ethane or -propane, 1,1,2,2-tetra(C₁-
to C₆-alkoxy)ethane or -propane, or 2,3-di-(C₁- to
C₆-alkoxy)butane (compounds II)

15 in the presence of a C₁- to C₆-alkyl alcohol (compounds III)
using a customary organic compound (compound IV) as a
cathodic depolarizer which is suitable for electrochemical
reduction, and performing the anodic oxidation and the
cathodic reduction in an undivided electrolysis cell in the
20 presence of C₁-C₆-alkyl alcohols.
2. A process as claimed in claim 1, wherein the compounds I are
trimethyl orthoformate or formaldehyde dimethyl acetal and
these compounds may also be formed in the form of a mixture.
25
3. A process as claimed in claim 1 or 2, wherein compound IV is
an aromatic hydrocarbon compound, activated olefin, aromatic
carboxylic acid or derivative thereof, carbonyl compound,
imine, heterocycle, naphthalene or core-substituted
30 naphthalene derivative.
4. A process as claimed in claim 3, wherein the cathodic
depolarization is one of the following conversions:

35 a) maleic acid or maleic acid derivatives in which the acid
function is in the form of alkyl esters to a tetraalkyl
butanetetracarboxylate by hydrodimerization

b) benzenemono-, -di- or -tricarboxylic acids other than
40 phthalic acid or phthalic acid derivatives, or
derivatives of these compounds in which the acid function
is in the form of alkyl esters or derivatives substituted
on the aromatic core to the corresponding mono-, di- and
triformylbenzene compounds in which the formyl groups are
45 in the form of an acetal

2

- c) acrylic acid, alkyl acrylates, acrylamide or acrylonitrile or homologs of these compounds to the corresponding hydrodimerization products
- 5 d) phthalic acid, alkyl phthalates or derivatives of these compounds substituted on the aromatic core to phthalide or core-substituted phthalide derivatives, cyclohexane- or cyclohexene-1,2-dicarboxylic acid, dialkyl
10 cyclohexane- or cyclohexene-1,2-dicarboxylates, or derivatives substituted on the cyclohexane or cyclohexene ring corresponding to the substitution pattern of the phthalic acid derivatives substituted on the aromatic core
- 15 e) naphthalene or core-substituted naphthalene derivatives to 1,2,3,4-tetrahydronaphthalene or the corresponding 1,2,3,4-tetrahydronaphthalene derivatives
- 20 f) pyridine or core-substituted pyridine derivatives to 1,4-dihydropyridine or the corresponding 1,4-dihydropyridine derivatives.
5. A process as claimed in any of claims 1 to 4, which is carried out in a stacked plate cell using stacked electrodes
25 connected in series.

30

35

40

45

