

(43) International Publication Date
13 September 2012 (13.09.2012)

- (51) **International Patent Classification:**
E21B 21/06 (2006.01) *E21B 21/12* (2006.01)
- (21) **International Application Number:**
PCT/US2012/027124
- (22) **International Filing Date:**
29 February 2012 (29.02.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/041,099 4 March 2011 (04.03.2011) US
- (71) **Applicant (for all designated States except US):** **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **MOIDEL, Joe, P.** [US/US]; 405 Westside Blvd. No. 53, Houma, LA 70364 (US). **BROUSSARD, Lee** [US/US]; 104 Lighthouse Point Circle, Youngsville, LA 70592 (US). **COMEAX, Gerald, P.** [US/US]; 1327 Dove Trails, Tomball, TX 77375 (US). **BURGER, Ronald, E.** [US/US]; 1403 Pine Forest Dr., Pearland, TX 77581 (US). **MOORE, Ronald, A.** [US/US]; 7190 Edgewater Dr., Willis, TX 77318 (US).
- (74) **Agent:** **PORTER, Andre, J.**; Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77210-4740 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

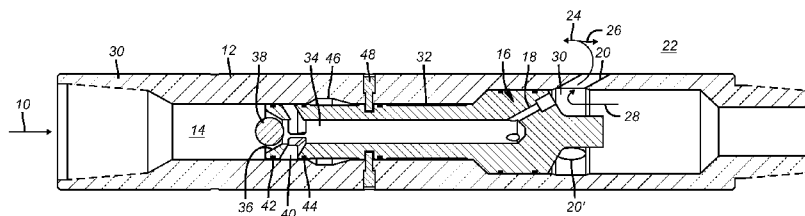(54) **Title:** DEBRIS CLEANUP TOOL WITH FLOW RECONFIGURATION FEATURE**FIG. 1**

(57) **Abstract:** A debris cleanup tool uses a movable eductor to reconfigure the flow scheme through the tool. During the debris pickup mode, pressurized fluid is delivered to through the tubing to the eductor inlet. The outlet of the eductor is into the surrounding annulus where the flow splits with most going to the surface and the rest down and into a mill making cuttings. The flow into the mill takes the cuttings to a collection volume and then screens the internal flow stream before directing it into the eductor inlet. The eductor body can be repositioned to close the eductor outlet to the annulus and open the outlet into the housing to allow reverse flow. In one embodiment a ball is dropped and pressure is built to break a shear pin to shift the eductor body and to open a bypass around the ball.



DEBRIS CLEANUP TOOL WITH FLOW RECONFIGURATION FEATURE

Inventors: Joe P. Moidel; Lee Broussard; Gerald P. Comeaux;
Ronald E. Burger and Ronald A. Moore

FIELD OF THE INVENTION

[0001] The field of the invention is subterranean borehole cleanup tools and more particularly a debris retention tool that can function in a first configuration for flowing debris into the tool for capture and that can be reconfigured while at the subterranean location to a different flow scheme for another purpose after debris removal ends.

BACKGROUND OF THE INVENTION

[0002] Debris cleanup tools that deliver pressurized fluid down a tubing string into an eductor device are illustrated in USP 6,276,452 and 7,789,154. The eductor exhaust is into the surrounding annulus where the flow splits. Some of the flow goes downhole to a mill that creates the cuttings and that flow enters the mill and takes the cuttings into a debris collection housing. The large cuttings are stopped by a screen and settle out in a debris retention space. The remaining flow with some small debris that passes the screen is sucked into the eductor inlet. The eductor outlet flow that does not travel down the annular space around the tool goes up to the surface in that same annular space. The eductor is installed as a bushing that is fixed in the housing of the debris collection device.

[0003] Once such devices were installed in a string and run into the well, they provided the above described flow pattern but had no facility to alter the flow pattern for another purpose. It was determined to be desirable to convert the flow scheme of the tool as described above to be able to flow through the tubing as before as well as to be able to shut off the eductor outlet and direct pressure through the debris collector body and out a lower end through the mill. Being able to do this is advantageous for the reason that the tool can be flowed internally in a reverse direction to the normal up flow from the mill and up to the eductor. In the event the tool gets obstructed this is a good way to get it cleared. An option to revert back to the original flow scheme can also

be incorporated so that debris removal can take place after a blockage is removed. In a preferred embodiment the eductor is axially shifted to change the flow scheme through it. This can be configured as a onetime movement or cycling back and forth between the end positions is possible. Those skilled in the art will better appreciate more aspects of the invention from a review of the description of the preferred embodiment and the associated drawings while recognizing that the full scope of the invention is to be determined by the appended claims.

[0004] Older debris collection devices such as USP 4,276,931 used a complex valve arrangement where flow through the valve actuated it to move axially and such axial movement compressed a rubber ring to seal off a central passage and at the same time open a lateral port into an internal annulus that led to an eductor. Separate flow passages were used for normal reverse flow into the mill to collect debris on pivoting fingers as opposed to flow straight through the valve member for circulation flow through the mill such as when running in to agitate the debris already in the wellbore and to facilitate rapid running in.

SUMMARY OF THE INVENTION

[0005] A debris cleanup tool uses a movable eductor to reconfigure the flow scheme through the tool. During the debris pickup mode, pressurized fluid is delivered to through the tubing to the eductor inlet. The outlet of the eductor is into the surrounding annulus where the flow splits with most going to the surface and the rest down and into a mill making cuttings. The flow into the mill takes the cuttings to a collection volume and then screens the internal flow stream before directing it into the eductor inlet. The eductor body can be repositioned to close the eductor outlet to the annulus and open the outlet into the housing to allow reverse flow. In one embodiment a ball is dropped and pressure is built to break a shear pin to shift the eductor body and to open a bypass around the ball. The ball seat can be above or below the eductor outlet.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] FIG. 1 is a section view through the eductor in the normal flow mode for collecting debris in an embodiment where the seat is above the eductor outlet;

[0006A] FIG. 1a is an alternative embodiment to FIG. 1 using flow through a restriction to reconfigure the tool;

[0007] FIG. 2 is the view of FIG. 1 with the eductor body shifted to flow through the housing while shutting off the annulus exit port;

[0007A] FIG. 2a is the view of FIG. 1a in the shifted position; and

[0008] FIG. 3 is an alternative embodiment to FIG. 1 where the seat is above the eductor outlet shown in the normal flow mode for collecting debris; and

[0009] FIG. 4 is the view of FIG. 3 with the eductor body shifted to flow through the housing while shutting off the annulus exit port.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0010] The basic tool is illustrated in USP 6,276,452 and 7,789,154 which are incorporated here as if fully set forth. The invention focuses on the eductor or the “jet bushing” as it is referred to in USP 7,789,154 as items 14 or 40. Both of these bushings show the single flow mode of operation and the present invention adds a feature to convert the flow mode to another mode as will be described using FIGS. 1 and 2,

[0011] FIG. 1 represents the debris collection flow mode where pressurized fluid represented by arrow **10** enters the housing **12** and passes through passage **14** to the eductor **16** at inlet **18**. (It should be noted that **18** is in fact the inlet stream that draws fluid into gap **30** but at the same time with respect to the eductor housing **32**, item **18** represents one or more eductor body outlets.) The outlet **20** of the eductor **16** leads to the surrounding annulus **22**. The exiting flow through the outlet **20** diverges with most going to the surface as represented by arrow **24** and the rest moving downhole to a mill (not shown) that is cutting a tool (not shown) and generating cuttings. The flow represented by arrow **26** enters the housing **12** at a lower end through the unshown mill. The flow with cuttings goes up a tube into a larger flow area

where the larger solids drop out and are collected in an annular space around the inlet tube. The flow with any smaller cuttings continues moving up through a screen **59** and then is sucked in at an inlet as represented by arrow **28**. Fluid flow from inlet **18** across gap **30** creates a reduced pressure zone to draw in the flow represented by arrow **28**. This flow regime is maintained until the milling ends and the desired debris has been captured. The housing **12** is moved as the mill advances using a string (not shown) connected at thread **30**, which is the first end connection for the housing **12**. While a single inlet **18** is shown, those skilled in the art will appreciate that there are multiple inlets **18** that are circumferentially spaced as can be seen by the illustration of another outlet **20'** in FIG. 1.

[0012] The modifications to the prior jet bushing over the prior designs described above are in the internal configuration of the eductor **16** and its ability to move. In FIG. 1 the eductor **16** has a body **32** and an inlet passage **34** that communicates with passage **14**. A ball seat **36** is near a top end of the passage **34** and can selectively be used with a ball **38** to allow pressure buildup on the ball **38** using pressure in passage **34**. Ball bypass passages **40** extend generally radially through the body **32** and are straddled by seals **42** and **44**. Housing **12** has an enlarged portion **46** to allow seal **42** to be bypassed when the eductor body **32** shifts due to pressure on seated ball **38** on seat **36** which initially breaks the shear pin **48**. Seal **44** is still against the body **12** in the FIG. 2 position. The flow is down passage **14** and around seal **42** that is now aligned with enlarged portion **46** and as further represented by arrow **50**. From there seal **44** forces the flow into the ball bypass **40** and into passage **34**.

[0013] At the other end, the eductor inlet **18** has shifted away from a spaced alignment with the outlet **20** in housing **12** and now seals **52** and **54** close off all the ports **20** to the surrounding annulus **22**. Instead, the eductor inlet **18** is now an open conduit into chamber **56** and can direct flow down to the mill (not shown) as schematically represented by arrow **58**. Flow can now be reversed through the debris collection tool to back flush the internal screen or to unclog the mill if it gets fouled with cuttings. Circulation can also be

established as the housing **12** and the associated equipment are removed from the wellbore.

[0014] For the one time shifting embodiment of FIGS. 1 and 2 an alternative to dropping a ball **38** on the seat **36** and pressuring up to shift body **32** and bypass the ball **38** using the enlarged portion **46** to bypass seated ball **38** through bypass **40** can alternatively be done using developed pressure or flow in passage **34** such as by proper sizing of the passage or with a flow restrictor **39** (see FIGS. 1a and 2a) that develops enough force induced by pressure drop to break the shear pin **48** and cause shifting from the FIG. 1 to the FIG. 2 positions. Another alternative to having the bypass **40** and the associated enlarged portion **46** is to drop the ball **38** and pressure up to cause the shift followed by reversing flow from the surface down the annulus **22** to flow the ball **38** back up to the surface before again switching to circulation mode with the body **32** still in the FIG. 2 position and the ball **38** no longer there.

[0015] Another option for the embodiment in FIGS. 1 and 2 is to lock in the movement in the FIG. 2 position to prevent a return to the debris collection mode of FIG. 1. This can be done with body ratchet or lock rings or snap rings that jump into a surrounding groove or using some kind of bias that pushes in the general direction of arrow **58** any one of which will hold the FIG. 2 position once the shear pin or pins **48** are broken. Although shear pins are illustrated other selectively retaining members such as shear rings, for example, can be used in singular or multiple quantities. Arrow **58** is shown at a location that is a second end connection for the housing **12**.

[0016] Another option is to be able to switch back and forth between the flow modes of FIGS. 1 and 2. This can be done using the illustrated design in FIGS. 1 and 2 with a few schematically illustrated differences. Spring or other bias device such as a pressurized chamber with compressible fluid **60** that acts in the direction of arrow **62** can be used with a schematically illustrated j-slot mechanism **64** and **66** with the pin being on either the housing **12** or the body **32** and the track the pin rides in can be on the other member. The use of ball **38** on seat **36** is optional and another alternative can be just using the passage

34 to create enough backpressure to overcome the spring **60** and move the j-slot mechanism relatively so that the pin **64** lands in a slot of a different height on the completion of a pressure removal and application cycle. The body **32** will then alternatively wind up in the FIG. 1 or FIG. 2 positions with each complete pressure cycle. Other options are available such as requiring a predetermined number of pressure removal and application cycles before a change from the debris collection mode of FIG. 1 to the flow through mode of FIG. 2.

[0017] FIGS. 3 and 4 illustrate an alternative embodiment to FIGS. 1 and 2 where the principle of operation is the same with the ball seat **72** above eductor outlet **74**. The ball or other object **76** is shown in several positions on the seat **72** and blown through the seat **72** after eductor body **80** shifts. Pressure buildup breaks the sheared connection **78** and the eductor body **80** moves down so that flow is shifted to the pattern of arrows **82**. Seals **84** and **86** close off ports **88** using the eductor body **80**. Ball **76** moved past the seat **72** and is retained by the eductor body **80**. Arrows **90** in FIG. 3 show the normal flow from the surface as it emerges through the eductor. Arrows **92** show the returning flow through a mill (not shown) after debris has settled and collected in housing **94** and passed through schematically illustrated screen **96**. The exiting flow through ports **88** in FIG. 3 splits with arrows **98** representing return flow to the surface and arrows **100** representing supply flow from the surface into the top of the housing **94**. The same operational variations described with regard to FIGS. 1 and 2 are available for the embodiment of FIGS. 3 and 4.

[0018] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below.

We claim:

1. A debris collection apparatus, comprising:
 - a housing having a passage therethrough with opposed end connections and at least one lateral opening, a first of said end connections adapted to receive pressurized fluid and a second end connection adapted to support a mill;
 - an eductor body movably mounted in said housing between a debris collection position and a flow through position, said body having an eductor body inlet in flow communication with said first end connection of said housing passage and at least one eductor body outlet;
 - said eductor body outlet aligned with said lateral opening in said housing in said debris collection position and, in said flow through position, said eductor body outlet is open to said passage for flow toward said second end with said eductor body blocking said lateral opening;
 - said eductor, in said debris collection position, drawing fluid from said second end connection while debris is retained in said housing.
2. The apparatus of claim 1, wherein:
 - said eductor body is moved with pressure applied to an object temporarily obstructing said eductor body inlet.
3. The apparatus of claim 2, wherein:
 - said eductor body further comprises a bypass passage around said object that opens upon movement of said eductor body between said debris collection position and said flow through position.
4. The apparatus of claim 2, wherein:
 - said object is removed with said eductor body in said flow through position with flow entering said second end connection of said housing.
5. The apparatus of claim 1, wherein:
 - said eductor body is moved with flow through said eductor body generating a force on said eductor body.
6. The apparatus of claim 5, wherein:
 - said force breaks a breakable member selectively retaining said eductor body to said housing.

7. The apparatus of claim **1**, wherein:
said eductor body is movable in opposed directions between said debris collection position and said flow through position at least once.
8. The apparatus of claim **5**, wherein:
said force overcomes a bias on said eductor body acting in an opposed direction to said force.
9. The apparatus of claim **5**, wherein:
said eductor body movable between said debris collection and flow through position with cycling of flow through said eductor body.
10. The apparatus of claim **5**, wherein:
said inlet and outlet of said eductor body are open for flow in both debris collection and flow through positions.
11. The apparatus of claim **9**, wherein:
said movement of said eductor body in said housing is controlled by a j-slot mechanism.
12. The apparatus of claim **1**, wherein:
said eductor body outlet is spaced apart from said lateral opening in said housing in said debris collection position of said eductor body.
13. The apparatus of claim **1**, wherein:
said eductor body outlet further comprises spaced peripheral seals that straddle said lateral outlet of said housing in said flow through position of said eductor body.
14. The apparatus of claim **3**, wherein:
said eductor body comprises spaced seals that straddle said bypass passage to close said bypass passage against said housing in said debris collection position of said eductor body.
15. The apparatus of claim **14**, wherein:
one of said spaced seals is aligned with said bypass passage to allow flow around said object when said eductor body is in said flow through position.

16. The apparatus of claim **1**, wherein:

said passage further comprises a screen between said eductor body and said second end connection on said housing, said screen having a lower face closer toward said second end connection;

whereupon with said eductor body in said flow through position debris on said lower face can be displaced off said screen.

17. The apparatus of claim **1**, wherein:

said outlet on said eductor body comprises a plurality of outlets aligned with a plurality of lateral openings in said housing in said debris collection position of said eductor body.

18. The apparatus of claim **2**, wherein:

said object lands on a seat in said eductor body allowing applied pressure to shift said eductor body to said flow through position.

19. The apparatus of claim **18**, wherein:

said object passes through said seat after said eductor body is moved to said flow through position.

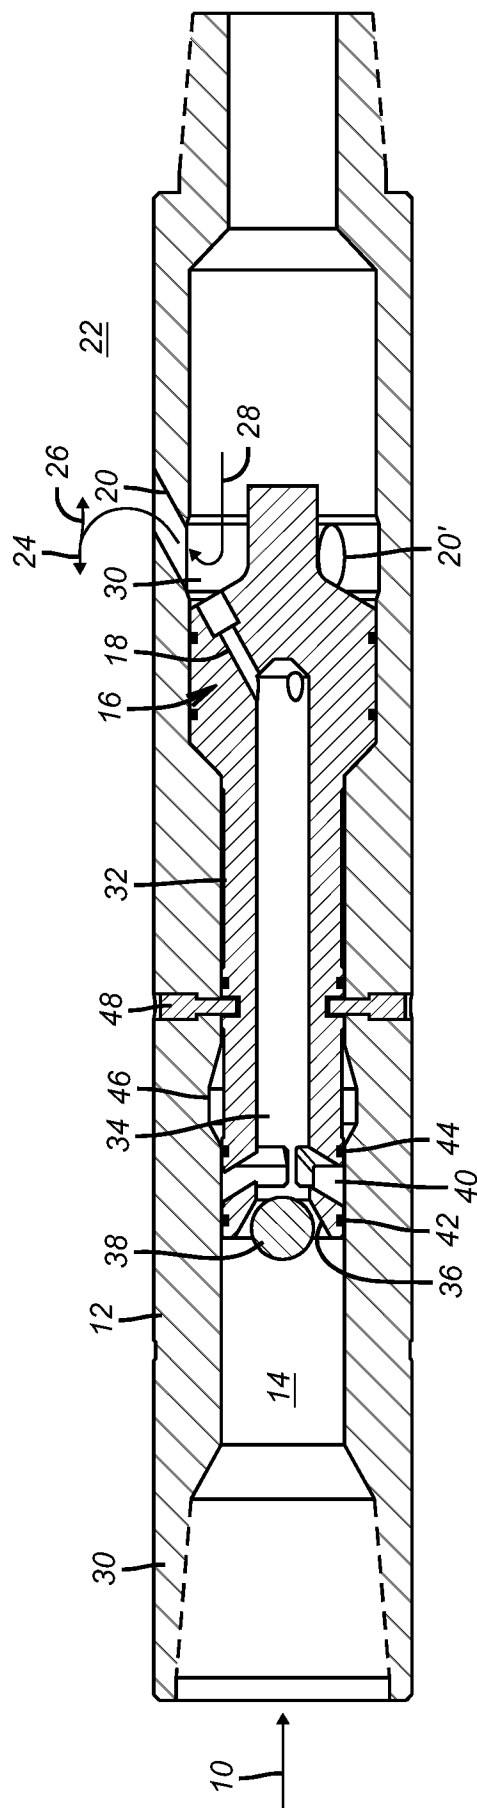


FIG. 1

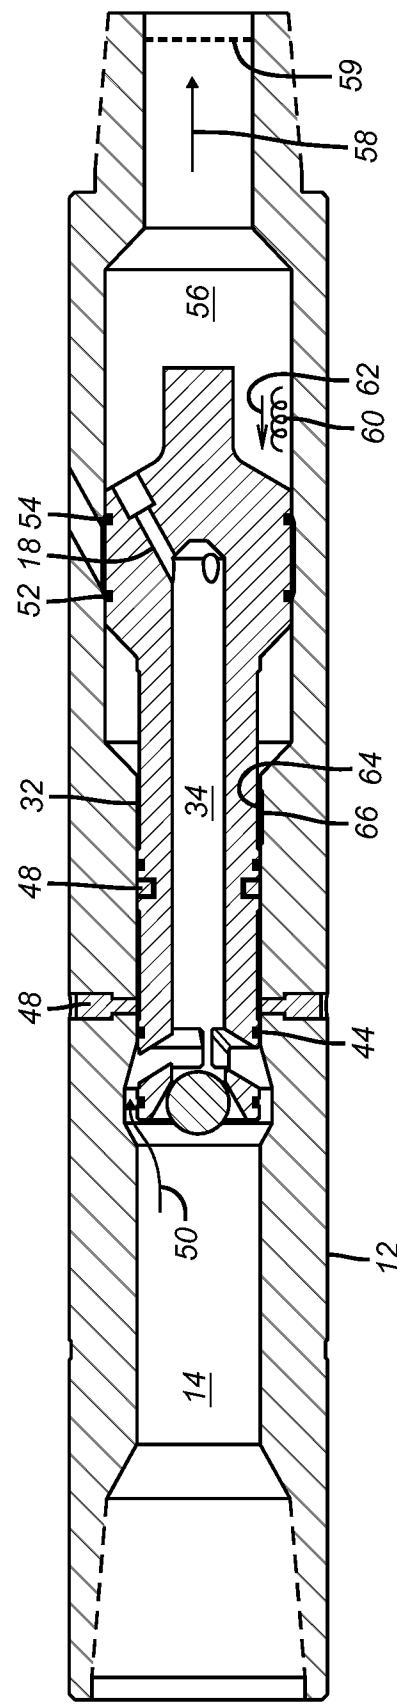


FIG. 2

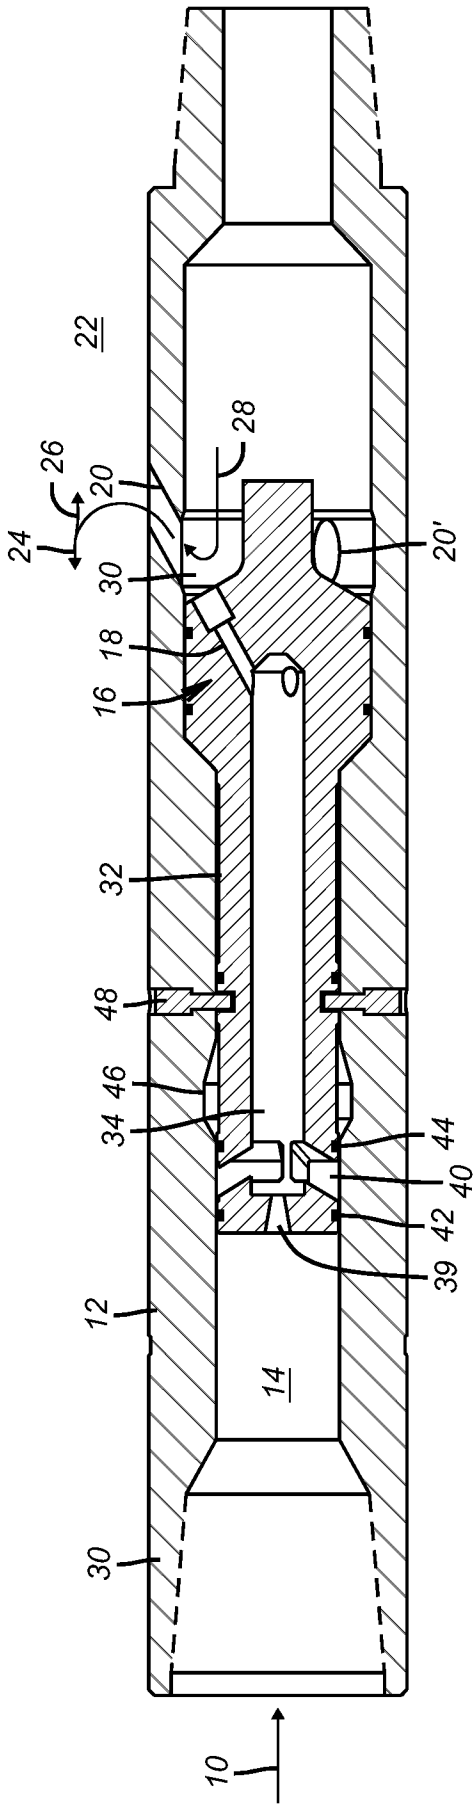


FIG. 1a

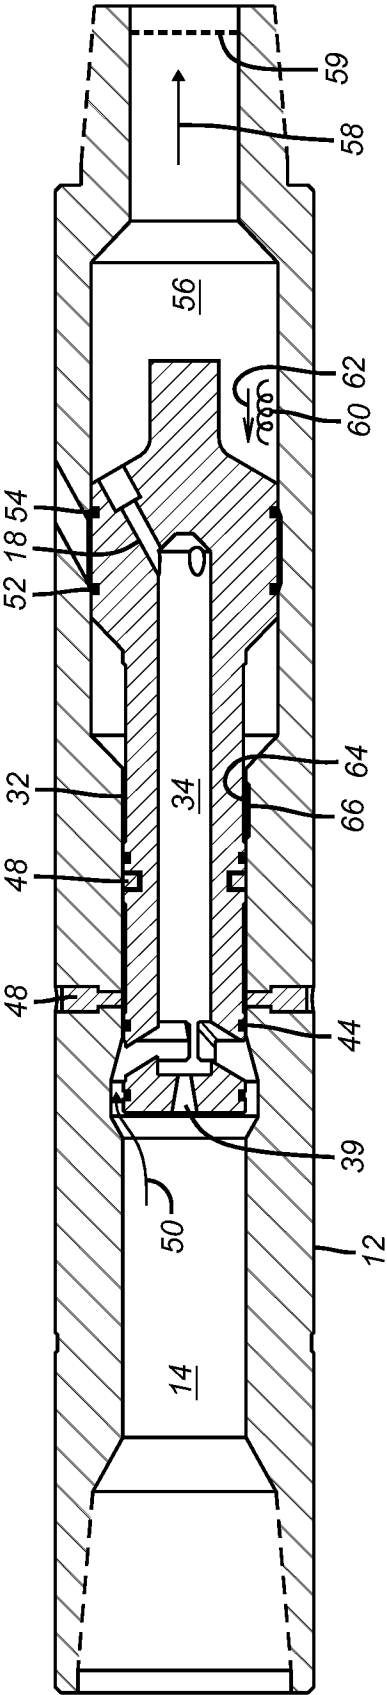


FIG. 2a

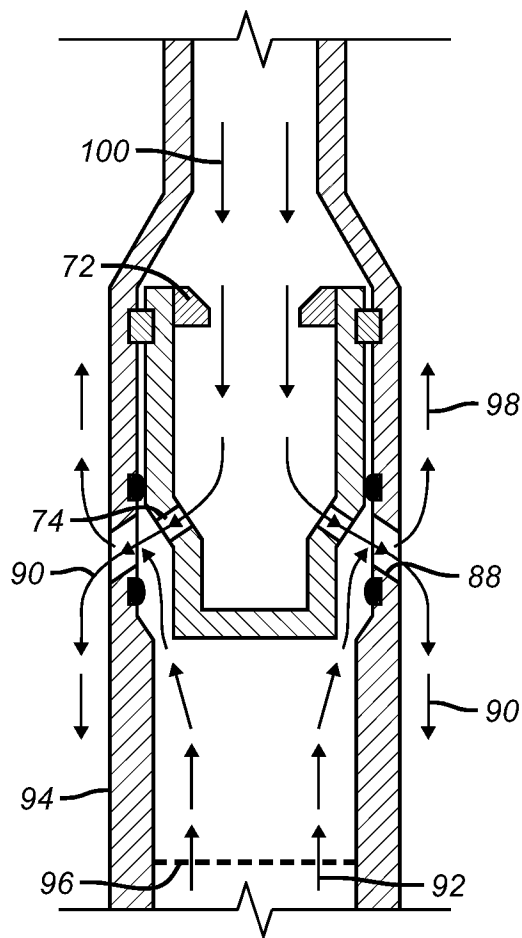


FIG. 3

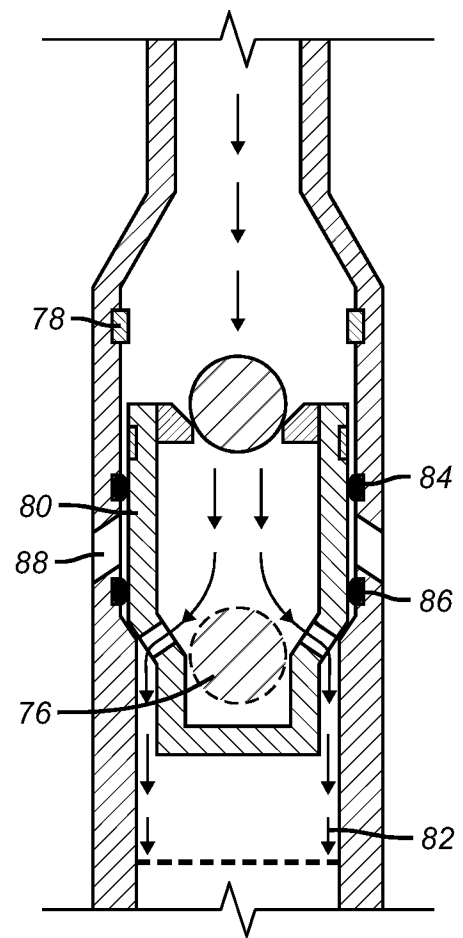


FIG. 4

A. CLASSIFICATION OF SUBJECT MATTER***E21B 21/06(2006.01)i, E21B 21/12(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 21/06; E21B 31/16; E21B 31/12; E21B 29/00; E21B 31/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: debris, clean, flow, eductor

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007-0272404 A1 (GERALD D. LYNDE et al.) 29 November 2007 See paragraph 7 - paragraph 24 and figures 3,4,8.	1-19
A	US 2009-0200012 A1 (DAVIS JOHN P. et al.) 13 August 2009 See the abstract and figures 3,8.	1-19
A	US 6276452 B1 (DAVIS; JOHN PHILLIP et al.) 21 August 2001 See column 3, line 16 - line 60 and figures 3,8.	1-19
A	US 2010-0288485 A1 (BLAIR STEVEN G.) 18 November 2010 See claims 1-17 and figures 7-9.	1-19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 APRIL 2012 (26.04.2012)

Date of mailing of the international search report

27 APRIL 2012 (27.04.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 189 Cheongsa-ro,
Seo-gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Won Jae

Telephone No. 82-42-481-5512



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/027124

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0272404 A1	29.11.2007	AU 2007-267551 A1	06.12.2007
		AU 2007-267551 A1	06.12.2007
		AU 2007-267551 B2	01.09.2011
		AU 2007-267551 B8	01.09.2011
		CA 2655646 A1	06.12.2007
		GB 0822945 D0	28.01.2009
		GB 201021934 D0	02.02.2011
		GB 2453876 A	22.04.2009
		GB 2453876 B	02.03.2011
		GB 2473779 A	23.03.2011
		GB 2473779 B	11.05.2011
		N020085209A	29.01.2009
		US 7472745 B2	06.01.2009
		WO 2007-140313 A2	06.12.2007
		WO 2007-140313 A3	24.01.2008
		WO 2007-140313 A3	06.12.2007
US 2009-0200012 A1	13.08.2009	AU 2009-214898 A1	20.08.2009
		AU 2009-214898 A1	20.08.2009
		AU 2009-214898 B2	04.08.2011
		GB 201014973 D0	20.10.2010
		GB 2471591 A	05.01.2011
		N020101262A	30.09.2010
		US 2009-0200010 A1	13.08.2009
		US 7610957 B2	03.11.2009
		US 7779901 B2	24.08.2010
		WO 2009-102705 A2	20.08.2009
		WO 2009-102705 A3	10.12.2009
		WO 2009-102705 A3	20.08.2009
US 6276452 B1	21.08.2001	AU 1999-18501 A1	23.09.1999
		CA 2265039 A1	11.09.1999
		GB 2335218 A	15.09.1999
		GB 9905233 D0	28.04.1999
		N0991155A	11.09.2000
		N0991155D0	10.03.1999
US 2010-0288485 A1	18.11.2010	AU 2010-248793 A1	18.11.2010
		US 7861772 B2	04.01.2011
		WO 2010-132807 A2	18.11.2010
		WO 2010-132807 A3	03.03.2011
		WO 2010-132807 A3	18.11.2010