

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2003 (04.12.2003)

PCT

(10) International Publication Number
WO 03/100338 A1

(51) International Patent Classification⁷: **F28F 9/02**, 3/08
// F25B 43/00, F28D 9/00

(21) International Application Number: PCT/SE03/00803

(22) International Filing Date: 19 May 2003 (19.05.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0201597-2 29 May 2002 (29.05.2002) SE

(71) Applicant (for all designated States except US): **ALFA LAVAL CORPORATE AB** [SE/SE]; P.O. Box 73, S-221 00 Lund (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **EKELUND, Rolf**

[SE/SE]; Kamrersgatan 17, SE-264 31 Klippan (SE).
CHRISTENSEN, Rolf [SE/SE]; Brännarevägen 11, S-240 14 Veberöd (SE). **LINDHOLM, Ingvar** [SE/SE]; Örsjö-Kroksjö 302, S-382 97 Örsjö (SE).


(74) Agents: **BERGLUND, Stefan** et al.; Bjerkéns Patentbyrå KB, Östermalmsg. 58, S-114 50 Stockholm (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO utility model (GH), ARIPO patent (GH), ARIPO utility model (GM), ARIPO

[Continued on next page]

(54) Title: A PLATE HEAT EXCHANGER DEVICE AND A HEAT EXCHANGER PLATE

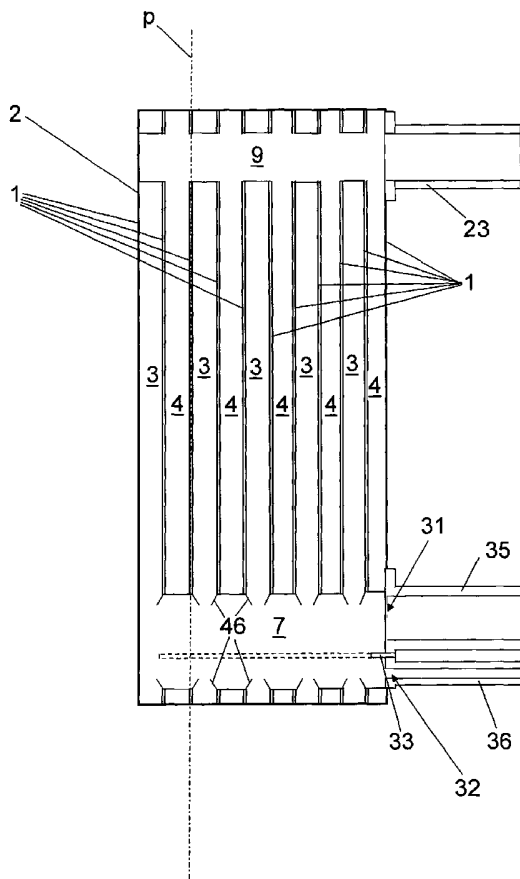

(57) Abstract: The invention refers to a device, including a plate package (2) of heat exchanger plates (1) which are provided beside each other to form a plate interspace between adjacent plates, and a heat exchanger plate. The plate interspaces form in an alternating order first passages (3) for a first medium and second passages (4) for a second medium for cooling of the first medium. Each heat exchanger plate has at least two portholes forming a first inlet port channels and a first outlet port channel (7), which extend through the plate package to a first inlet and a first outlet, respectively, for the first medium to and from the first passages (3). The first outlet forms a gas outlet (31) for discharge of a gas of the first medium and a liquid outlet (32) for discharge of liquid of the first medium. The liquid outlet (32) is separated from the gas outlet (31) for permitting separate discharge of said liquid and gas.



patent (GM), ARIPO utility model (KE), ARIPO patent (KE), ARIPO utility model (LS), ARIPO patent (LS), ARIPO utility model (MW), ARIPO patent (MW), ARIPO utility model (MZ), ARIPO patent (MZ), ARIPO utility model (SD), ARIPO patent (SD), ARIPO utility model (SL), ARIPO patent (SL), ARIPO utility model (SZ), ARIPO patent (SZ), ARIPO utility model (TZ), ARIPO patent (TZ), ARIPO utility model (UG), ARIPO patent (UG), ARIPO utility model (ZM), ARIPO patent (ZM), ARIPO utility model (ZW), ARIPO patent (ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES,

FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A plate heat exchanger device and a heat exchanger plate

THE BACKGROUND OF THE INVENTION AND PRIOR ART

5

The present invention refers to a plate heat exchanger device, including a plate package formed by a number of heat exchanger plates, which are arranged beside each other in such a manner that a plate interspace is formed between adjacent plates, which plate interspaces form first passages for a first medium and second passages for a second medium, that is arranged to cool the first medium, wherein the first passages and the second passages are arranged beside each other in the plate package in an alternating order, wherein the first passages are separated from the second passages, and wherein substantially each heat exchanger plate has at least two portholes forming a first inlet port channel and a second outlet port channel, which extend through the plate package to a first inlet and a first outlet, respectively, for the first medium to and from the first passages.

20

The invention also refers to a heat exchanger plate for a plate heat exchanger device, which heat exchanger plate includes a main extension plane, at least a first porthole, which has an opening area and is arranged to form a part of a first inlet port channel in the plate heat exchanger device for a first inlet for a first medium, and a second porthole, which has an opening area and is arranged to form a part of a first outlet port channel in the plate heat exchanger device for a first outlet for the first medium.

30

In such a plate heat exchanger device, where the first medium is cooled by the second medium, liquid will condense from the first medium which thus will include a gaseous phase and a liquid phase. It is known to separate these phases from each other in a liquid separator provided after the plate heat exchanger proper.

35

Such devices, including a heat exchanger and a separate liquid separator, may be used in various applications, for instance for the dehumidification of pressurised air from compressors before the

pressurised air is supplied to pneumatic tools or machines. Such devices with a separate heat exchanger and a separate liquid separator have the disadvantage that a significant number of components and connecting conduits are required. However, it has
5 appeared to be difficult to provide one single unit for the heat exchanger part as well as the separation part to reasonable costs due to the high pressure such a unit has to withstand. In normal cases, the parts should withstand a pressure of 8 bars, but there are also pneumatic systems operating at 13 bars and even higher
10 pressures.

SE-514 092 discloses a device including a number of parallel plates, which are connected to each other and arranged beside each other in such a way that they by means of portholes of the
15 plates form a first passage, which is arranged to transport a gas, and at least a second passage, which is separated from but in heat transferring contact with the first channel and which is arranged to transport a cooling medium for cooling of the gas. A part of the first passage forms a separating part for separating liquid from the gas.
20 The separating part is formed by a plurality of plate interspaces between some of said plates arranged to be passed on both sides by the flowing gaseous medium. In this case, the heat exchanger and the liquid separator are thus built together to one unit, but they still are parts separated from each other in the device.

25

SUMMARY OF THE INVENTION

The object of the present invention is to provide an efficient separation of liquid from a substantially gaseous medium and to
30 prevent remixing of the liquid with the gaseous medium. In particular, it is aimed at a plate heat exchanger device permitting such a separation in such a manner that liquid and gas may be conveyed out of the plate heat exchanger device in two separate outlet flows.

35

This object is achieved by the plate heat exchanger device initially defined, which is characterised in that the first outlet forms a gas

outlet, which is arranged to permit discharge of substantially gas of the first medium, and a liquid outlet, which is arranged to permit discharge of substantially liquid of the first medium, wherein the liquid outlet is separated from the gas outlet for permitting separate
5 discharge of said liquid and gas.

The inventors have found that in a plate heat exchanger for cooling of a substantially gaseous medium containing liquid or moisture, a precipitation of liquid on the heat exchanger plates takes place. By
10 designing the outlet in accordance with the invention, it is possible to discharge the gas and the liquid in two separate media flows. It is thus possible to obtain such an efficient separation of liquid and gas already in the plate heat exchanger that the liquid separator used in accordance to the prior art is not any longer necessary. The
15 combined cooling and a separating function may thus be obtained by merely one plate heat exchanger device of the type defined in claim 1. The device is thus very compact.

The device according to the invention may be used within many
20 different technical fields, for instance for drying pressurised air, within petroleum industry for separating heavy hydrocarbons from more highly volatile hydrocarbons such as natural gas, in sugar industry etc.

25 According to an embodiment of the invention, substantially each of the first passages includes at least one liquid channel, which extends along a substantial part of the first passage in a direction towards the liquid outlet, wherein said liquid channel is arranged to convey liquid of the first medium to the liquid outlet. By means of
30 such a liquid channel, it is thus possible to collect the liquid that precipitates in the plate interspaces forming the first passages already before the first medium reaches the first outlet. The collected liquid may thus via the liquid channel be conveyed through the first passage without being in direct contact with the
35 gas of the first medium. In such a way the risk that liquid is remixed with the gas before the liquid is discharged from the plate package is reduced.

According to a further embodiment of the invention, substantially each heat exchanger plate includes a heat transfer area with a corrugation including ridges and valleys, wherein the corrugation will catch liquid from the second medium. By these ridges and valleys, a plurality of redirections of the first medium are thus achieved when it is transported from the first inlet to the first outlet, and at the same time cooled by said heat transfer area. These redirections of the flow contribute to the precipitation of liquid on the ridges and valleys. Advantageously, the corrugation of said ridges and valleys of one of the two heat exchanger plates limiting every first passage may extend in a direction towards said liquid channel and thus convey the caught liquid to the liquid channel.

According to a further embodiment of the invention, the corrugation of at least one of the two heat exchanger plates limiting every first passage includes a transversal ridge projecting into the first passage in the proximity of the first outlet in such a way that liquid of the first medium is prevented from reaching the gas outlet. Liquid or moisture in the first medium will precipitate on this transversal ridge since the first medium is redirected when it passes the ridge.

According to a further embodiment of the invention, said liquid channel is formed by a shaping of at least one of the two heat exchanger plates that delimits each first passage. Such a shaping may in an easy manner be obtained when the heat exchanger plate is pressed. The liquid channel may extend through or beside said corrugation as a longitudinal depression seen from the plate interspace in question. Advantageously, said liquid channel may extend immediately inside at least an outer edge of the first passage.

According to a further embodiment of the invention, the device is arranged to permit gas of the first medium to flow in a main first flow direction from the first inlet port channel to the first outlet port channel. Advantageously, said transversal ridge may extend transversally to the first flow direction.

According to a further embodiment of the invention, the liquid outlet is connectable to a liquid discharge conduit, which extends from the plate package. Moreover, the gas outlet may be connectable to a gas discharge conduit, which extends from the plat package.

According to a further embodiment of the invention, the plate package has during normal use an upper end and a lower end, which is located beneath the upper end with regard to the direction of gravity, wherein the first inlet port channel is located in the proximity of the upper end and the first outlet port channel is located in the proximity of the lower end. Liquid which precipitates from the first medium in the first passages will thus be transported by means of the gravity to the liquid discharge member via the liquid channel. The gas outlet may have an outlet opening with a centre point which during normal use is located at a higher level than a centre point of an outlet opening of the liquid outlet with regard to the direction of gravity. The outlet opening of the gas outlet is advantageously larger than the outlet opening of the liquid outlet.

According to a further embodiment of the invention, at least one of the two heat exchanger plates, which delimits each first passage, is formed in such a way that the transition between the first passage and the first outlet port channel forms a throttling for the first medium flowing out into the port channel. In such a way a velocity increase is achieved in the transition between the first passage and the port channel. Possibly remaining liquid droplets will thus be accelerated and less inclined to change direction, i.e. to be conveyed out together with the gas through the gas outlet. Furthermore, such a throttling creates a recirculation zone in the proximity of the throttling within the port channel proper. In such a recirculation zone there is a relatively stillstanding gas, which attracts liquid droplets that may fall down towards the liquid outlet. Said throttling may for instance be formed by an edge area extending around at least the gas outlet and inwardly towards a centre plane of the plate interspace. Such an edge area may also in

an easy manner be obtained when the heat exchanger plate is pressed.

5 According to a further embodiment of the invention, each heat exchanger plate has two further portholes forming a second inlet port channel and a second outlet port channel, which extend through the plate package and which form a second inlet and a second outlet, respectively, for the second medium to and from the second passages.

10

According to a further embodiment of the invention, the liquid outlet is positioned in the proximity of the gas outlet. The liquid outlet may thus be provided in a part of the first outlet whereas the gas outlet is provided in another part of the first outlet. The first outlet may form or constitute a prolongation of a porthole or an opening in substantially each heat exchanger plate, wherein this opening is divided into an upper part for the discharge of gas and a lower part for the discharge of liquid. The liquid outlet may include or be connected to a liquid conduit extending from the lower part, and the gas outlet may include or be connected to a gas conduit extending from the upper part. It is to be noted that the gas and the liquid may be stratified in the port channel for the first outlet, which means that the invention may be realised without any physical dividing member between the liquid outlet and the gas outlet. It is sufficient that the gas stream and the liquid stream, when they have left the device proper, are caught by separate members such as a separate gas conduit and a separate liquid conduit, respectively. The first outlet may also include or be formed by two separate portholes or openings through substantially each heat exchanger plate, wherein such an opening forms the liquid outlet, which includes or is connected to a liquid conduit, and the second opening forms the gas outlet, which includes or is connected to a gas conduit.

35 According to a further embodiment of the invention, the first outlet includes at least a further heat exchanger plate, which is provided at the plate package for forming a further plate interspace arranged to convey said gas from the first outlet port channel to the gas

outlet. By such an additional plate, said gas may in an easy manner be conveyed away from the liquid outlet, and the separation of liquid and gas may be further improved. Advantageously, the said further heat exchanger plate is provided at the plate package in
5 such a way that it forms a part of the plate package.

According to a further embodiment of the invention, the first outlet includes a plurality of further heat exchanger plates, which are provided beside each other and at the plate package for forming
10 further plate interspaces, wherein at least every second one of said further plate interspaces are arranged to convey said gas from the first outlet port channel to the gas outlet. In such a way the separation may be further improved. Advantageously, said further heat exchanger plates are provided at the plate package in such a
15 way that they form a part of the plate package. Furthermore, every second one of said further plate interspaces may be arranged form a part of the first inlet and to convey the first medium to the first inlet port channel in heat exchanging contact with said gas.

20 The object is also achieved by the heat exchanger plate initially defined, which is characterised in that the opening area of the second porthole is substantially larger than the opening area of the first porthole, and that the second porthole is arranged to permit discharge of the first medium to a gas outlet, which is arranged to
25 permit discharge of substantially gas of the first medium, and to a liquid outlet, which is arranged to permit discharge of substantially liquid of the first medium, wherein the liquid outlet is separated from the gas outlet for permitting separate discharge of said liquid and gas. In such a way a separation of a gas flow and a liquid flow from
30 a heat exchanger device formed by such plates is made possible.

Advantageous embodiments of the heat exchanger plate are defined in the dependent claims 25 to 30.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The present invention is now to be explained more closely by means of a description of various embodiments disclosed by way of example and with reference to the drawings attached hereto.

- 10 Fig 1 discloses schematically a sideview of a plate heat exchanger device according to a first embodiment of the invention.
- Fig 2 discloses schematically another sideview of the plate heat exchanger in Fig 1.
- Fig 3 discloses a sectional view along the line III-III in Fig 2.
- 15 Fig 4 discloses a sectional view similar to the one in Fig 3 of a plate heat exchanger device according to a second embodiment of the invention.
- Fig 5 discloses schematically a first heat exchanger plate of the plate heat exchanger device in Fig 1.
- 20 Fig 6 discloses schematically a second heat exchanger plate of the plate heat exchanger device in Fig 1.
- Fig 7 discloses schematically a first heat exchanger plate of a plate heat exchanger device according to a third embodiment of the invention.
- 25 Fig 8 discloses schematically a second heat exchanger plate of the plate heat exchanger device according to the third embodiment.
- Fig 9 discloses schematically a first sectional view through a plate heat exchanger device according to the fourth embodiment of the invention.
- 30 Fig 10 discloses schematically a second sectional view through the plate heat exchanger device in Fig 9.
- Fig 11 discloses schematically a first sectional view through a plate heat exchanger device according to the fifth embodiment of the invention.
- 35 Fig 12 discloses schematically a second sectional view through the plate heat exchanger device in Fig 11.

DETAILED DESCRIPTION OF VARIOUS EMBODIMENTS OF THE INVENTION

- 5 Figs 1 to 3 discloses a plate heat exchanger according to the first embodiment of the invention. The plate heat exchanger includes a number of heat exchanger plates 1, which form a plate package 2 and which each includes a main extension plane p, see Fig 3. The heat exchanger plates 1 are pressed to such a shape that when they are provided beside each other to said plate package 2, a plate interspace is formed between each pair of plates 1. The plate interspaces, which completely or partly also may be formed by distance members, for instance gaskets, provided between the plates, are arranged to form first passages 3 for a first medium and second passages 4 for a second medium. The first passages 3 are separated from the second passages 4. Furthermore, the first passages 3 and the second passages 4 are arranged beside each other in an alternating order, i.e. substantially each first passage 3 is surrounded by two second passages 4.
- 10
- 15
- 20 The plate package 2 includes in the embodiment disclosed heat exchanger plates 1, which are permanently connected to each other by means of brazing or any similar method, wherein all heat exchanger plates 1 are substantially identical except for one of the end plates, which in the embodiment disclosed lacks portholes. It is to be noted, however, that the invention is not limited to brazed or in any other way permanently mounted plate packages 2, but is also applicable to plate packages kept together by means of two end plates and tension bolts extending through the end plates.
- 25
- 30 Furthermore, the plate package 2 includes four port channels 6, 7, 8 and 9. Each port channel 6-9 extends through all plates 1 except for said one end plate. Two of the port channels 6 and 7 communicate with the first passages 3, see Fig 3, wherein the port channel 6 forms a first inlet port channel 6 and extends to a first inlet 11 for the first medium, and the port channel 7 forms a first outlet port channel 7 and extends to a first outlet 12 for the first medium. The two other port channels 8 and 9 communicate with the second
- 35

passages 4, wherein the port channel 8 forms a second inlet port channel 8 and extends to a second inlet 13 for the second medium, and the port channel 9 forms second inlet port channel 9 and extends to a second outlet 14 for the second medium. It is to be noted that the plate heat exchanger device according to the invention also may be of a type that has another number of port channels, for instance two or six port channels and/or another number of passages for various media.

Each port channel 6-9 is formed by an opening or a porthole 16-19 in each heat exchanger plate 1 in the plate package 2 except for said one end plate, see Fig 5 and 6. The portholes 16, 18 and 19, which form the port channels 6, 8 and 9, are in the first embodiment circular seen in the direction of the port channels 6, 8, 9. Each port channel 6, 8, 9 is connected to a respective conduit pipe 21, 22, 23 extending from the plate package 2 for the supply and removal, respectively, of medium. In particular, the pipe 21 and the port channel 6 permit feeding and transport of the first medium to the first passages 3. The pipe 22 and the port channel 8 permit feeding and transport of the second medium to the second passages 4, and the pipe 23 and the port channel 9 permit discharge and transport of the second medium from the second passages 4.

The plate package 2 has during normal use an upper end and a lower end located below the upper end with regard to the direction of gravity, wherein the first inlet 11 is located in the proximity of the upper end and the first outlet 12 is located in the proximity of the lower end. The second inlet 13 is in the disclosed embodiments, operating according to the counterflow principle, located at the lower end whereas the second outlet 14 is located at the upper end. It is to be noted that the plate heat exchanger device also may be designed to operate according to the parallel flow principle.

In the embodiments disclosed, the plate heat exchanger device is arranged to enable cooling of the first medium in the first passages 3 by means of the second medium in the second passages 4. The first medium may, as mentioned initially, for instance be pressurised

air to be cooled and dried before it is supplied to the equipment where it is to be used. The first medium thus includes a gaseous medium or a gas, and a liquid medium or a liquid or moisture. Due to the cooling of the first medium, liquid or moisture will precipitate or condense in the first medium due to known physical principles. Substantially each heat exchanger plate 1, 1', 1'', see Figs 5 and 6, includes a heat transfer area with a corrugation including ridges and valleys.

10 In the embodiments disclosed, two different heat exchanger plates 1 are used in the plate package 2. Fig 5 discloses a first heat exchanger plate 1', on which the corrugation 26 of ridges and valleys is inclined and extends obliquely upwardly in a first direction a. Fig 6 discloses a second heat exchanger plate 1'', on which the corrugation of ridges and valleys is inclined and extends obliquely upwardly in a second direction b. The flow of the first medium flows in a main flow direction c obliquely downwardly from the first inlet 11 to the first outlet 12. A corrugation 26 of ridges and valleys contributes to redirect the flow of the first medium a large number of times when it flows from the first inlet 11 to the first outlet 12, and in such a way, the corrugation 26 will catch liquid from the first medium.

The port channel 7, forming the first outlet 12 for the first medium includes or forms a gas outlet 31, which is arranged to permit discharge of substantially gas of the first medium, and a liquid outlet 32, which is arranged to permit discharge of substantially liquid of the first medium. The liquid outlet 32 is provided in or in the proximity of the gas outlet 31. In the first embodiment, the first outlet 12 is formed by one single porthole 17 in each heat exchanger plate 1 except for said one end plate, wherein this porthole 17 has a larger opening area than the porthole 16, 17, 18, 19, which form the other port channels 6, 8, 9. Furthermore, the porthole 17 has a total height which is substantially longer than its total width, which appears from Figs 5, 6 and Figs 7, 8. The port channel 7 is however divided by means of a dividing piece 33, which extends in the port channel 7 from said one end plate in such

a way that the upper gas outlet 31 and the lower gas outlet 32 are formed. The gas outlet 31 will thus be separated from the liquid outlet 32.

- 5 As appears from Fig 5, the gas outlet 31 has an outlet opening which is larger than the outlet opening of the liquid outlet 32. Furthermore, the outlet opening of the gas outlet 31 has a centre point which during normal use is located at a higher level than a centre point of the outlet opening of the liquid outlet 32 with regard
10 to the gravity. Fig 3 discloses with continuous lines a dividing piece 33 extending a short distance into the port channel 7. However, with dashed lines it is shown that the dividing piece may extend through substantially the whole length of the port channel 7. The dividing piece 33 may include or be formed by a simple sheet which may
15 have a somewhat curved shape being convex seen from the gas outlet 31, see Fig 5, wherein possible liquid precipitating on the dividing piece 33 may flow outwardly and downwardly from the gas outlet 31.
- 20 The gas outlet 31 includes or is connectable to a gas discharge conduit 35 extending from the plate package 2 for discharge and transport of substantially gas of the first medium. The liquid outlet 32 includes or is connectable to a separate liquid discharge conduit 36, which also extends from the plate package 2 and is separated
25 from the gas discharge conduit for separate discharge and transport of substantially liquid of the first medium. The collected liquid may thus in a convenient manner be conveyed to for instance a separate collecting tank or effluent outlet. The gas from the gas discharge conduit 25 may be so dry that no further liquid separator is
30 necessary.

- Fig 4 discloses a plate heat exchanger device according to a second embodiment, which differs from the first embodiment in that the port channel 7 merely has a larger opening area and a longer
35 height/width relation than the rest of the port channels, in particular than the port channel 6 but also than the port channels 8 and 8. Moreover, in the second embodiment any dividing of the port

channel 7 is missing, but this embodiment is built on the principal that the first medium will be stratified in the port channel 7 so that a separate upper gas flow and a separate liquid flow in the lower part of the port channel are formed. The two separate flows are
5 conveyed to a gas outlet 31 with a connecting gas discharge conduit 35 and to a liquid outlet with a connecting liquid discharge conduit 36, respectively. It is to be noted that the gas outlet 31 and the liquid outlet 32 with the connecting conduits 35 and 36 in the disclosed second embodiment are located completely outside the
10 plate package 2 proper.

As is indicated in Figs 5 and 6, each first passage 3 includes in the embodiments disclosed two liquid channels 41, 42 extending along a substantial part of the first passage 3 in a direction towards the
15 first outlet 12 and more precisely towards the liquid outlet 32. The liquid channels 41, 42 are thus arranged to convey the liquid of the first medium to the liquid outlet 32. The liquid channels 41, 42 may advantageously be formed by a shaping of at least one of the two heat exchanger plates 1' and 1'' which delimits each first passage
20 3. In the embodiments disclosed the corrugation 26 of ridges and valleys of the heat exchanger plate 1' extends in the direction a towards the liquid channel 42 formed on the heat exchanger plate 1'', whereas the corrugation 26 of ridges of valleys of the heat exchanger plate 1'' extends in the direction b towards the liquid
25 channel 41 formed on the heat exchanger plate 1'. The corrugation 26 on each of the plates 1' and 1'' thus conveys the caught liquid to a liquid channel 42 and 41, respectively. It is to be noted however, that the corrugation 26 of ridges and valleys of the heat exchanger plate 1' also may extend towards the liquid channel 41 on this plate
30 1', and that the corrugation 26 of ridges and valleys of the heat exchanger plate 1'' may extend in the direction b towards the liquid channel 42 on this plate 1''.

In the embodiments disclosed, the liquid channels 41, 42 extend
35 immediately inside the outer side edge of the first passage 3. The liquid channels 41, 42 or one liquid channel 41, 42 may however have another position on the heat exchanger plate 1', 1'', for

instance along a substantially vertical centre line, wherein the ridges and valleys of the corrugation 26 may form an arrow pattern in a manner known per se.

- 5 Furthermore, each heat exchanger plate 1' and 1'', limiting every first passage 3, includes a transversal ridge 44 which projects into the first passage 3 in the proximity of the first outlet 12 and more precisely just above the gas outlet 31. Such a ridge 44 will redirect the flow of the first medium before it reaches the first outlet 12,
10 wherein liquid of the first medium is prevented from reaching the gas outlet 31. The transversal ridge 44 extends substantially transversally to the first flow direction c.

- Furthermore, in the embodiments disclosed the heat exchanger
15 plates 1' and 1'', delimiting substantially each passage 3, is formed in such a way that the transition between the first passage 3 and the port channel 7 of the first outlet 12 forms a throttling for the first medium flowing out into the port channel 7. The throttling is formed by an edge area 46, which extends around at least the first outlet
20 12, or more precisely around each porthole 17, and inwardly towards a centre plane of the plate interspace forming the first passage 3.

- Figs 7 and 8 disclose two heat exchanger plates 1', 1'' according to
25 a third embodiment. According to this embodiment, one of the portholes is divided into two separate portholes 51, 52. These two portholes 51, 52, are included by or correspond to the porthole 17 in the first embodiment. In the second embodiment, the portholes 51 of substantially all heat exchanger plates 1', 1'' form the gas
30 outlet 31, and the portholes 52 of substantially all heat exchanger plates 1', 1'' form the liquid outlet 32. As appears from Figs 7 and 8, the edge area 42 forming the throttling mentioned above is merely provided around the portholes 51 forming the gas outlet 31.

- 35 Figs 9 and 10 disclose a fourth embodiment of the plate heat exchanger device. It is here to be noted that elements having substantially the same function have been given the same name

and been provided with the same reference signs in all the embodiments disclosed. This fourth embodiment differs from the first embodiments in that further heat exchanger plates 1a are provided beside each other and form a further plate package 2a.

5 This further plate package 2a is provided beside the plate package 2 as this is disclosed in the first embodiments. The further heat exchanger plates 1a have substantially the same dimensions as the heat exchanger plates 1 in such a way that the two plate packages 2 and 2a together may form one single common plate package 2,
10 2a. The further heat exchanger plates 1a are provided in such a way that further plate interspaces 3a, 3b are formed between the plates 1a. The two plate packages 2, 2a are separated from each other by a separating plate 1b, which has merely two portholes instead of four portholes of substantially all plates 1, 1a.

15

The further plate interspaces 3a, 3b, disclosed in the fourth embodiment, are intended to convey the first medium. The plate interspaces 3a, which substantially consists of every second one of the further plate interspaces 3a, 3b, form a part of the first inlet 11.

20 The first medium is thus conveyed via the conduit pipe 21 through the plate interspaces 3a to the first inlet port channel 6. The plate interspaces 3b, which substantially consist of every second one of the further plate interspaces 3a, 3b, form a part of the first outlet 12. The gaseous part of the first medium is thus conveyed from the
25 first outlet port channel 7, via a corresponding port channel 7a of the plate package 2a through the plate interspaces 3b to the gas outlet 31 and the gas discharge conduit 35. The corresponding port channel 7a have the same size and the same shape as the first outlet port channel 7. Furthermore, the corresponding port channel
30 7a has the same position as the first outlet port channel 7 with regard to the extension plane p. The liquid part of the first medium is conveyed from the first outlet port channel 7 substantially straight through the corresponding port channel 7a to the liquid outlet 32 and the liquid discharge conduit 36. In such a way, the first medium
35 will be conveyed in the plate interspaces 3a in heat exchanging contact with the first medium in the plate interspaces 3b. This means that the first medium, which is conveyed into the plate heat

exchanger device may be precooled at the same time as the gaseous part of the first medium may be heated before the gas leaves the plate heat exchanger device. As appears from Fig 10, the incoming first medium is conveyed substantially in parallel flow with the outgoing gaseous first medium in the plate package 2a.

Figs 11 and 12 disclose a fifth embodiment, which in a functional regard differs from the fourth embodiment in that the incoming first medium is conveyed in substantially counter flow to the outgoing gaseous first medium in the plate package 2a. In order to obtain such a counterflow function, the incoming and precooled first medium is conveyed from the plate package 2a via a bypass channel 61 to the plate package 2 for cooling by means of the second medium.

The first medium is thus conveyed via the conduit pipe 21 into the plate package 2a and through the plate interspaces 3a to the bypass channel 61. From the bypass channel 61, the first precooled medium is conveyed into the first inlet port channel 6 through the first passages 3 to the first outlet port channel 7. From the first outlet port channel 7, the gaseous part of the first medium is in the same way as in the fourth embodiment conveyed via a corresponding port channel 7a of the plate package 2a through the plate interspaces 3b to the gas outlet 31 and the gas discharge conduit 35. The liquid part of the first medium is conveyed from the first outlet port channel 7 substantially straight through the corresponding port channel 7a to the liquid outlet 32 and the liquid discharge conduit 36.

The invention is not limited to the embodiments disclosed but may be varied and modified within the scope of the following claims.

Claims

1. A plate heat exchanger device, including a plate package (2) formed by a number of heat exchanger plates (1, 1', 1''), which are
5 arranged beside each other in such a manner that a plate interspace (3, 4) is formed between adjacent plates, which plate interspaces form first passages (3) for a first medium and second passages (4) for a second medium, that is arranged to cool the first medium,
10 wherein the first passages (3) and the second passages (4) are arranged beside each other in the plate package (2) in an alternating order,
wherein the first passages (3) are separated from the second passages (4), and
15 wherein substantially each heat exchanger plate (1, 1', 1'') has at least two portholes (16-19) forming a first inlet port channel (6) and first outlet port channel (9), which extend through the plate package (2) to a first inlet (11) and a first outlet (12), respectively, for the first medium to and from the first passages (3),
20 characterised in that the first outlet (12) forms a gas outlet (31), which is arranged to permit discharge of substantially gas of the first medium, and a liquid outlet (32), which is arranged to permit discharge of substantially liquid of the first medium, wherein the liquid outlet (32) is separated from the gas outlet (31) for permitting
25 separate discharge of said liquid and gas.
2. A device according to claim 1, characterised in that substantially each of the first passages (3), includes at least one liquid channel (41, 42), which extends along a substantial part of
30 the first passage (3) in a direction towards the liquid outlet (32), wherein said liquid channel (41, 42) is arranged to convey liquid of the first medium to the liquid outlet (32).
3. A device according to claim 2, characterised in that
35 substantially each heat exchanger plate (1, 1', 1'') includes a heat transfer area with a corrugation (26) including ridges and valleys, wherein the corrugation (26) will catch liquid from the first medium.

4. A device according to claim 3, characterised in that the corrugation (26) of said ridges and valleys of one of the two heat exchanger plates (1, 1', 1''), limiting each first passage (3), extends
5 in a direction (a, b) towards said liquid channel (41, 42) and thus conveys the caught liquid to the liquid channel (41, 42).

5. A device according to any one of claims 3 and 4, characterised in that the corrugation (26) of at least one of the two
10 heat exchanger plates (1, 1', 1''), limiting each first passage (3), includes a transversal ridge (44) projecting into the first passage (3) in the proximity of the first outlet (12) in such a way that liquid of the first medium is prevented from reaching the gas outlet (31).

15 6. A device according to any one of claims 2 to 5, characterised in that said liquid channel (41, 42) is formed by a shaping of at least one of the two heat exchanger plates (1, 1', 1'') that delimits each first passage (3).

20 7. A device according of any of claims 2 to 6, characterised in that said liquid channel (41, 42) extends immediately inside an outer edge of the first passage (3).

8. A device according to any of the preceding claims, characterised in that the device is arranged to permit gas of the first
25 medium to flow in a main first flow direction (c) from the first inlet port channel (6) to the first outlet port channel (7).

9. A device according to claim 5 and 8, characterised in that said
30 transversal ridge (44) extends substantially transversally to the first flow direction (c).

10. A device according to any one of the preceding claims, characterised in that the liquid outlet (32) is connectable to a liquid
35 discharge conduit (36) which extends from the plate package (2).

11. A device according to any one of the preceding claims, characterised in that the gas outlet (31) is connectable to a gas discharge conduit (35) which extends from the plate package (2).

5 12. A device according to any one of the preceding claims, characterised in that the plate package (2) during normal use has an upper end and a lower end, which is located beneath the upper end with regard to the direction of gravity, wherein the first inlet port channel (6) is located in the proximity of the upper end and the first
10 outlet port channel (7) is located in the proximity of the lower end.

13. A device according to claim 12, characterised in that the gas outlet (31) has an outlet opening with a centre point which during the normal use is located at a higher level than a centre point of an
15 outlet opening of the liquid outlet (32) with regard to the direction of gravity.

14. A device according to any one of the preceding claims, characterised in that the gas outlet (31) has an outlet opening which
20 has a larger flow area than an outlet opening of the liquid outlet (32).

15. A device according to any one of the preceding claims, characterised in that at least one of the two heat exchanger plates, which delimits each first passage (1, 1', 1''), is formed in such a
25 way that the transition between the first passage (3) and the port channel (7), forming the first outlet port channel (7), forms a throttling for the first medium flowing out into the port channel (7).

30 16. A device according to claim 15, characterised in that said throttling is formed by an edge area (46) which extends around at least the gas outlet (31) and inwardly towards a centre plane of the plate interspace.

35 17. A device according to any one of the preceding claims, characterised in that each heat exchanger plate (1, 1', 1'') has two further portholes (18, 19) forming a second inlet port channel (8)

and second outlet port channel (9), which extend through the plate package (2) and which form a second inlet (13) and a second outlet (14), respectively, for the second medium to and from the second passages (4).

5

18. A device according to any one of the preceding claims, characterised in that the liquid outlet (32) is provided in or in the proximity of the gas outlet (31).

10 19. A device according to any one of claims 1 to 17, characterised in that the first outlet (12) includes at least a further heat exchanger plate (1a), which is provided at the plate package for forming a further plate interspace arranged to convey said gas from the first outlet port channel (7) to the gas outlet (31).

15

20. A device according to claim 19, characterised in that the said further heat exchanger plate is provided at the plate package in such a way that it forms a part of the plate package.

20 21. A device according to any one of claims 1 to 17, characterised in that the first outlet (12) includes a plurality of further heat exchanger plates, which are provided beside each other and at the plate package for forming further plate interspaces (3a, 3b), wherein at least every second one (3b) of said further plate
25 interspaces are arranged to convey said gas from the first outlet port channel (7) to the gas outlet (31).

22. A device according to claim 21, characterised in that said further heat exchanger plates are provided at the plate package in
30 such a way that they form a part of the plate package.

23. A device according to claim 22, characterised in that every second (3a) of said further plate interspaces are arranged form a part of the first inlet (11) and to convey the first medium to the first
35 inlet port channel (6) in heat exchanging contact with said gas.


24. Heat exchanger plate for a plate heat exchanger device, which heat exchanger plate (1, 1', 1'') includes
a main extension plane (p),
at least a first porthole (16), which has an opening area and is
5 arranged to form a part of a first inlet port channel (6) in the plate heat exchanger device for a first inlet (11) for a first medium, and
a second porthole (17), which has an opening area and is arranged to form a part of a first outlet port channel (7) in the plate heat exchanger device for a first outlet (12) for the first medium,
10 characterised in that the opening area of the second porthole (17) is substantially larger than the opening area of the first porthole (16), and that the second porthole (17) is arranged to permit discharge of the first medium to a gas outlet (31), which is arranged to permit discharge of substantially gas of the first medium, and to a liquid
15 outlet (32), which is arranged to permit discharge of substantially liquid of the first medium, wherein the liquid outlet (32) is separated from the gas outlet (31) for permitting separate discharge of said liquid and gas.
- 20 25. A heat exchanger plate according to claim 24, characterised in that the second porthole (17) has a total height and a total width, wherein the height is longer than the width.
- 25 26. A heat exchanger plate according to any one of claims 24 and 25, characterised in that the second porthole (17) is limited by an edge area (46) which extends around at least the porthole and is inclined in relation to the main extension plane (p).
- 30 27. A heat exchanger plate according to any one of claims 24 to 26, characterised in that the second porthole (17) is divided into two separate holes (33; 51, 52) for permitting said separate discharge.
- 35 28. A heat exchanger plate according to any one of claims 24 to 27, characterised in that the heat exchanger plate (1, 1', 1'') includes a heat transfer area with a corrugation (26) of ridges and valleys, wherein the corrugation (26) is arranged to catch liquid from the first medium and includes a transversal ridge (44) which

extends transversally to the heat exchanger plate in the proximity of the second porthole (17).

29. A heat exchanger plate according to any one of claims 24 to 28, characterised in that the heat exchanger plate (1, 1', 1'') during normal use has an upper end and a lower end located beneath the upper end with regard to the direction of gravity, wherein the first porthole (16) is located in the proximity of the upper end and the second porthole (17) is located in the proximity of the lower end.
30. A heat exchanger plate according to any one of claims 24 to 29, characterised in that the heat exchanger plate (1, 1', 1'') has a third porthole (18), which has an opening area and is arranged to form a part of a third port channel (8) in the plate heat exchanger device for a second inlet (13) for a second medium, and a fourth porthole (19), which has an opening area and is arranged to form a part of a fourth port channel (9) in the plate heat exchanger device for a second outlet (14) for the second medium.

Fig 1

Fig 2

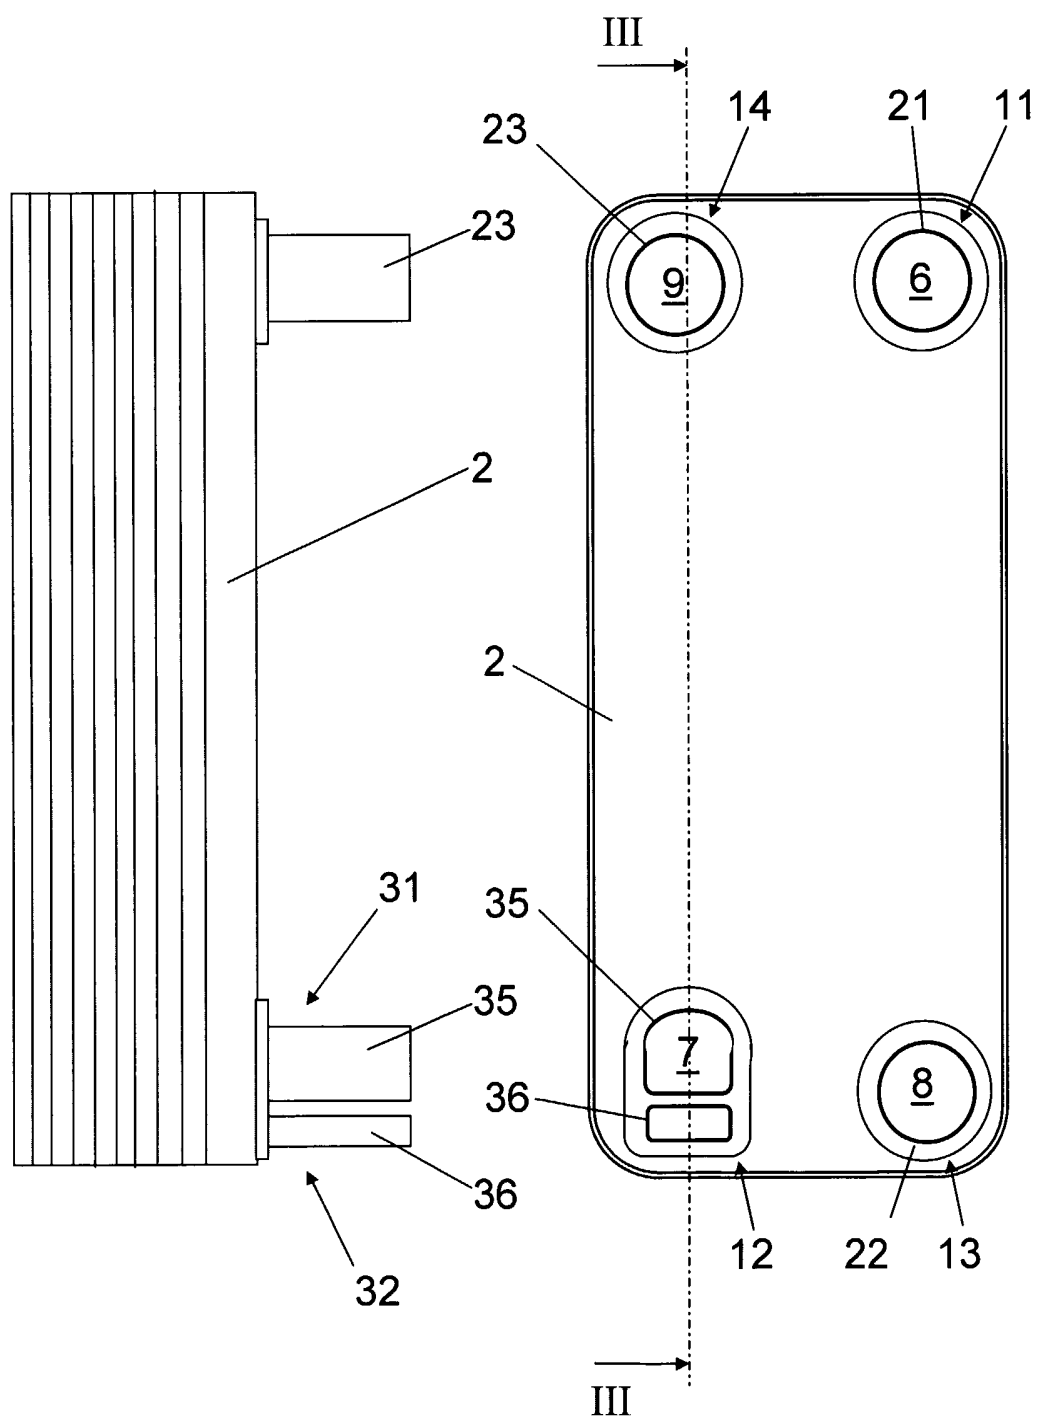

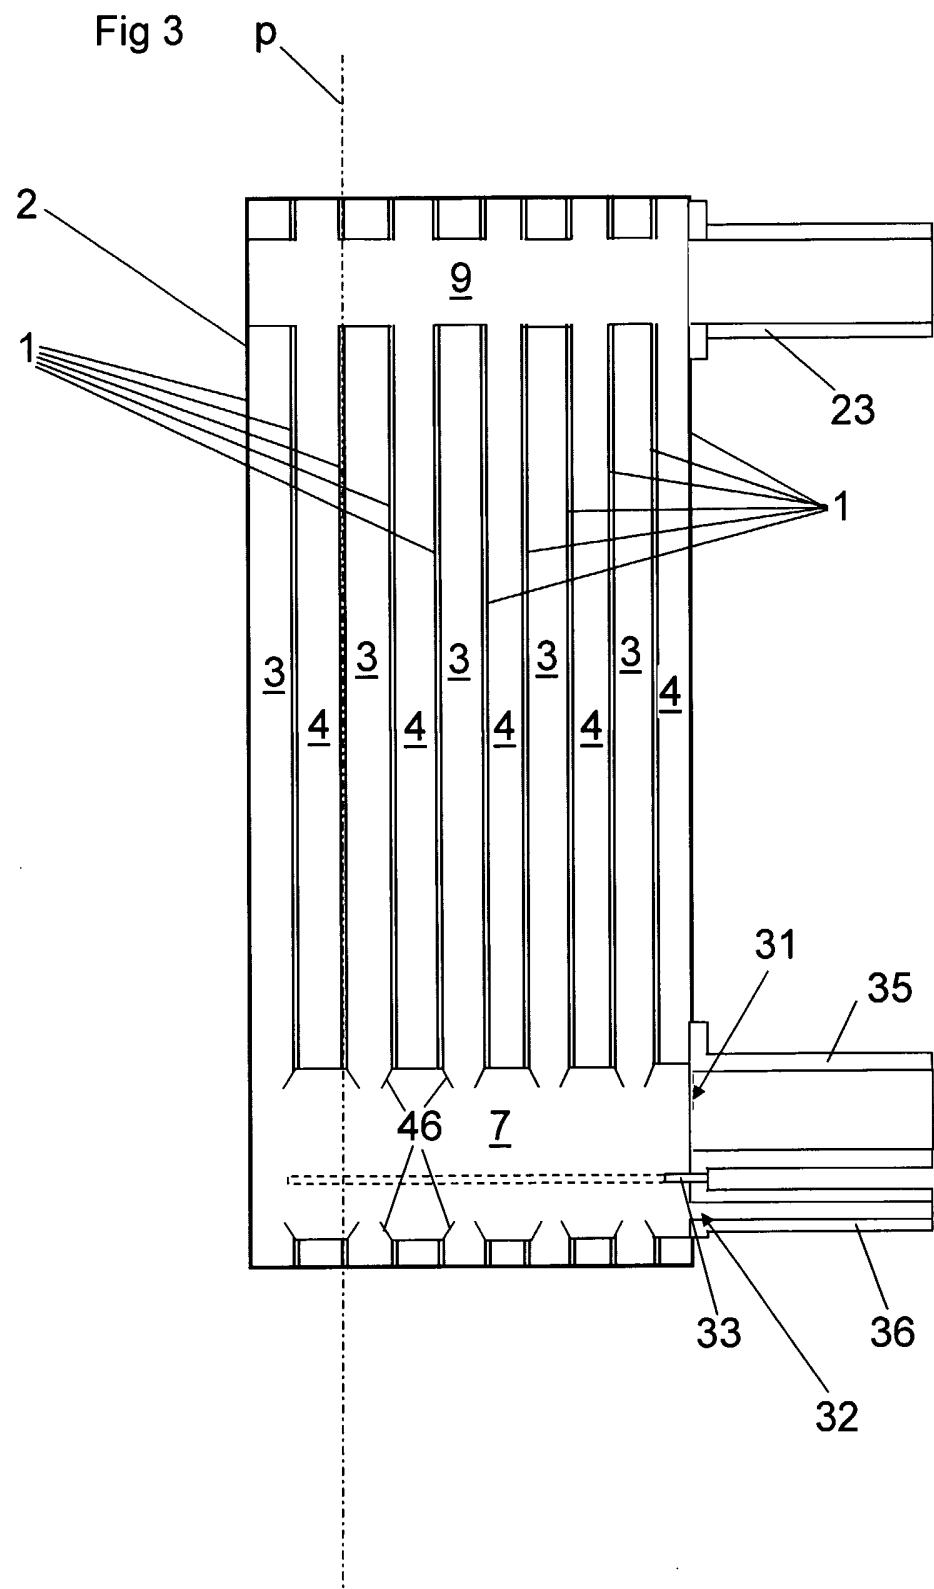


Fig 4

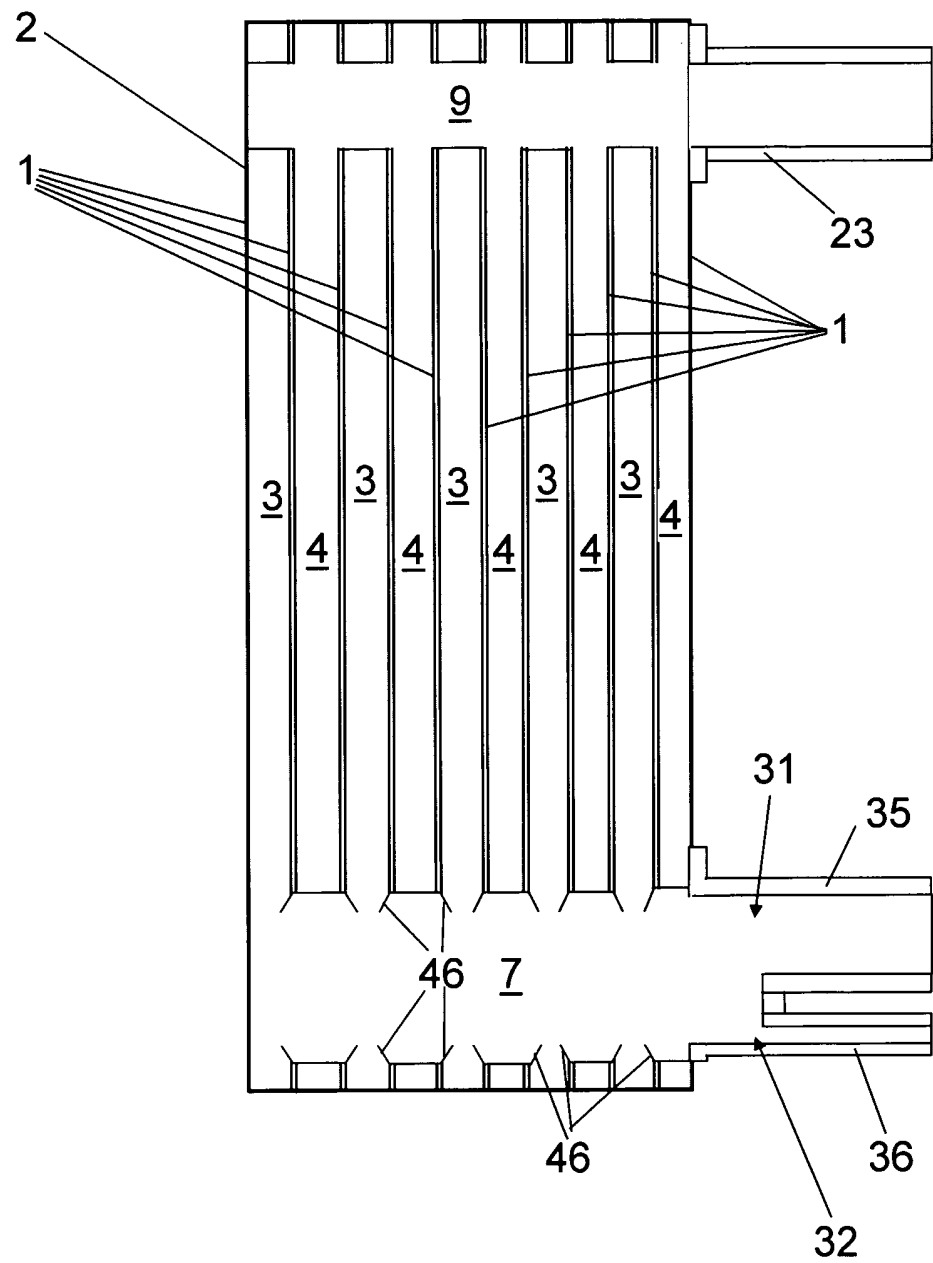


Fig 6

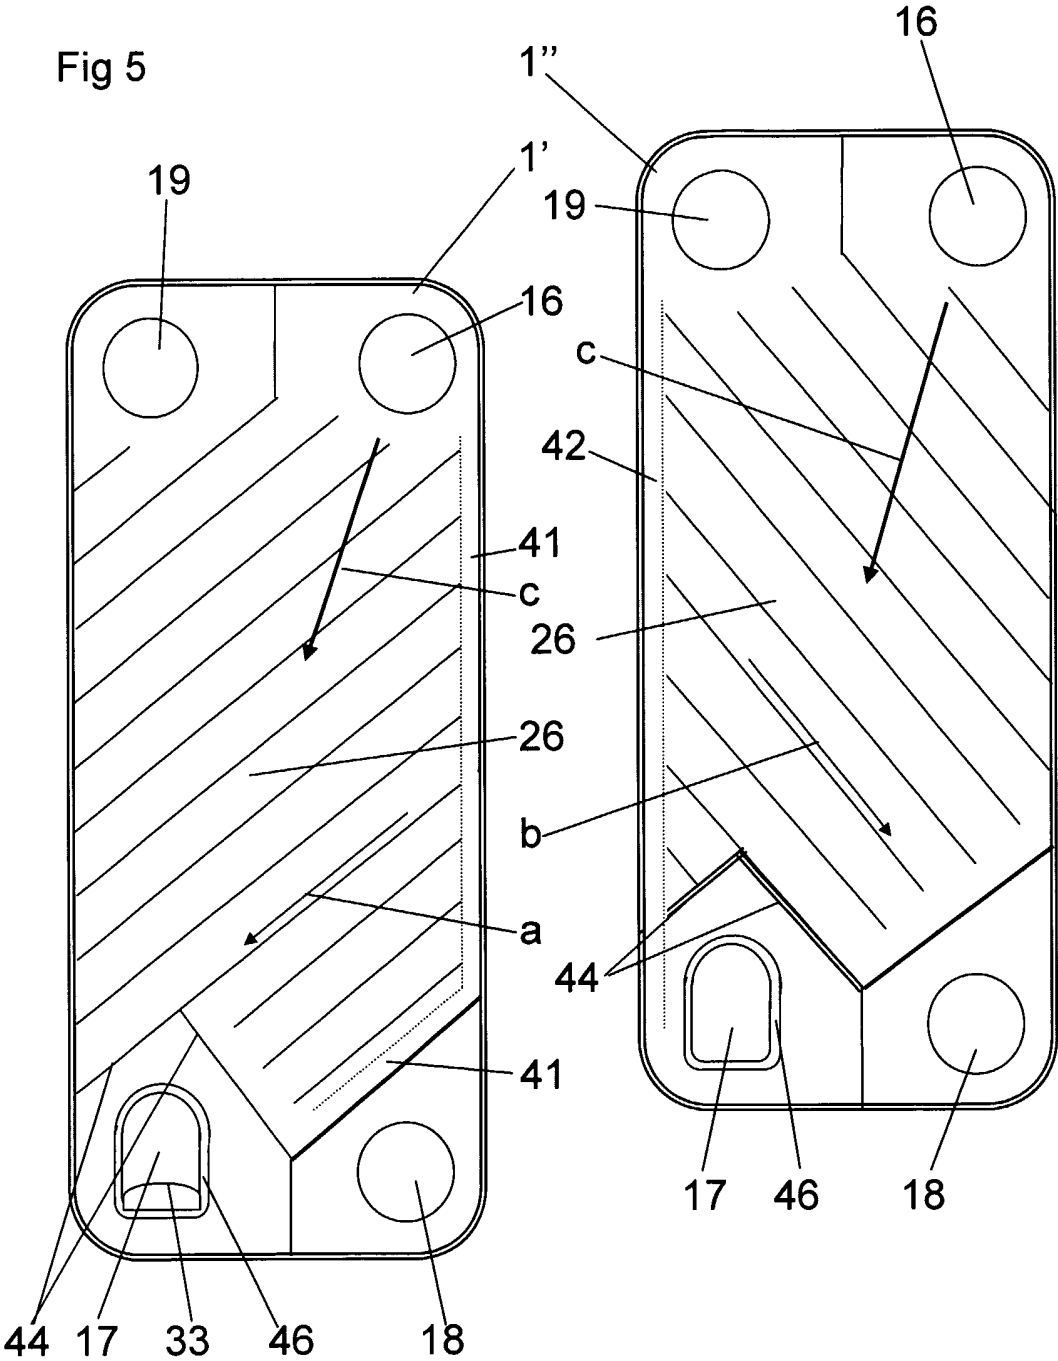


Fig 8

Fig 7

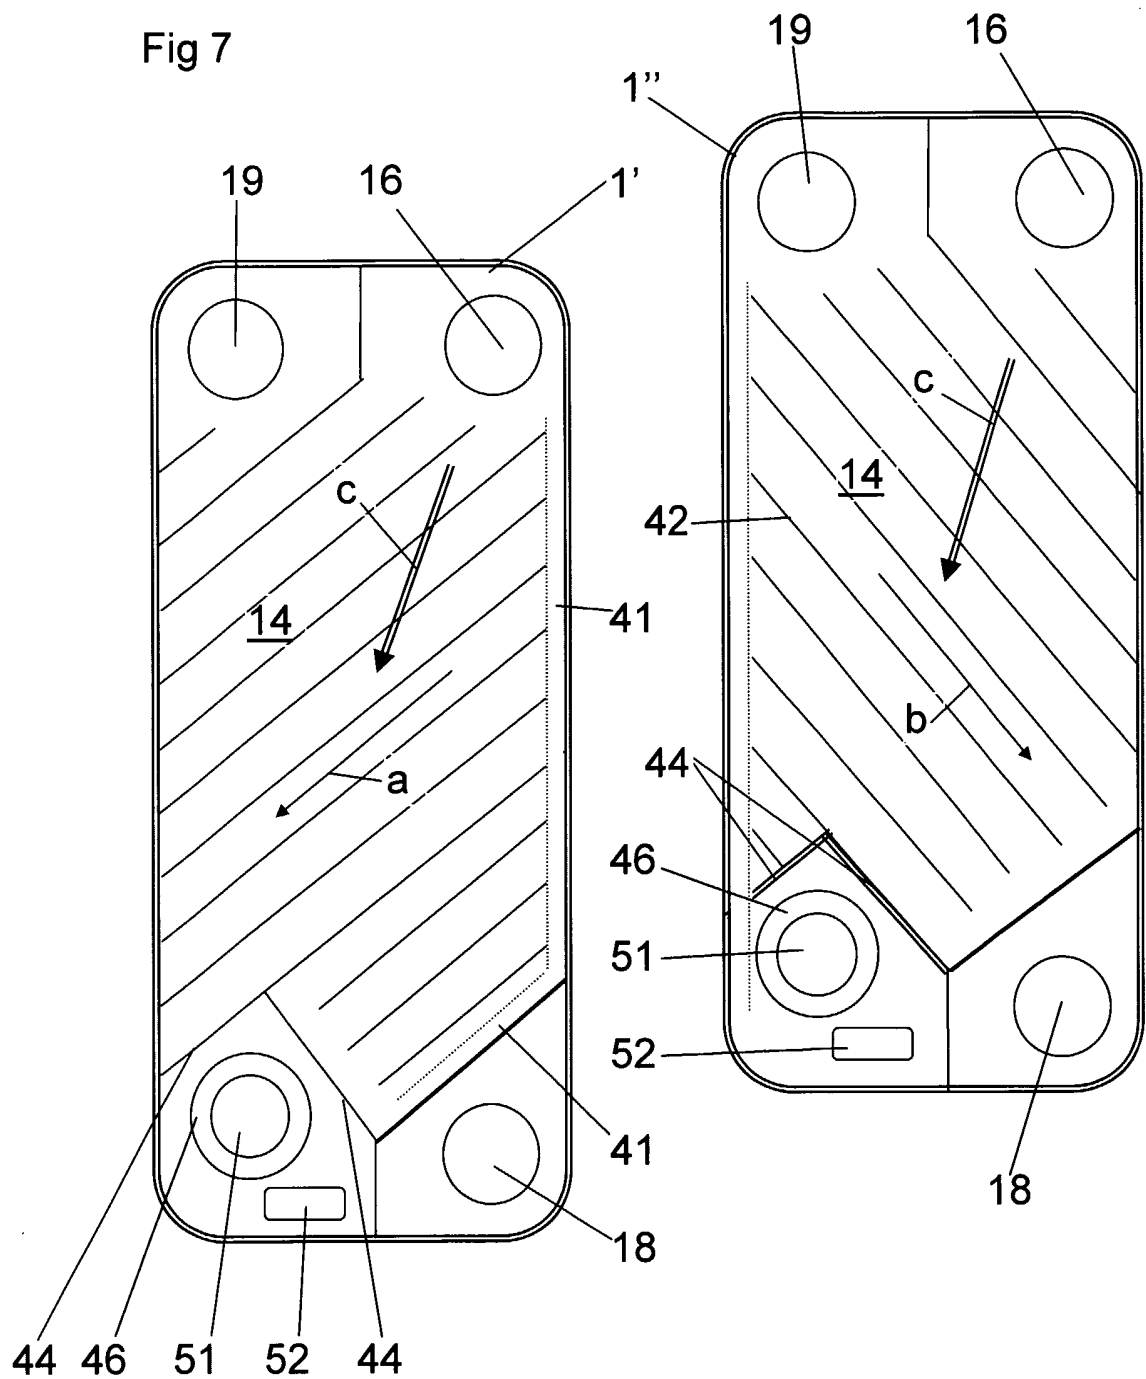


Fig 9


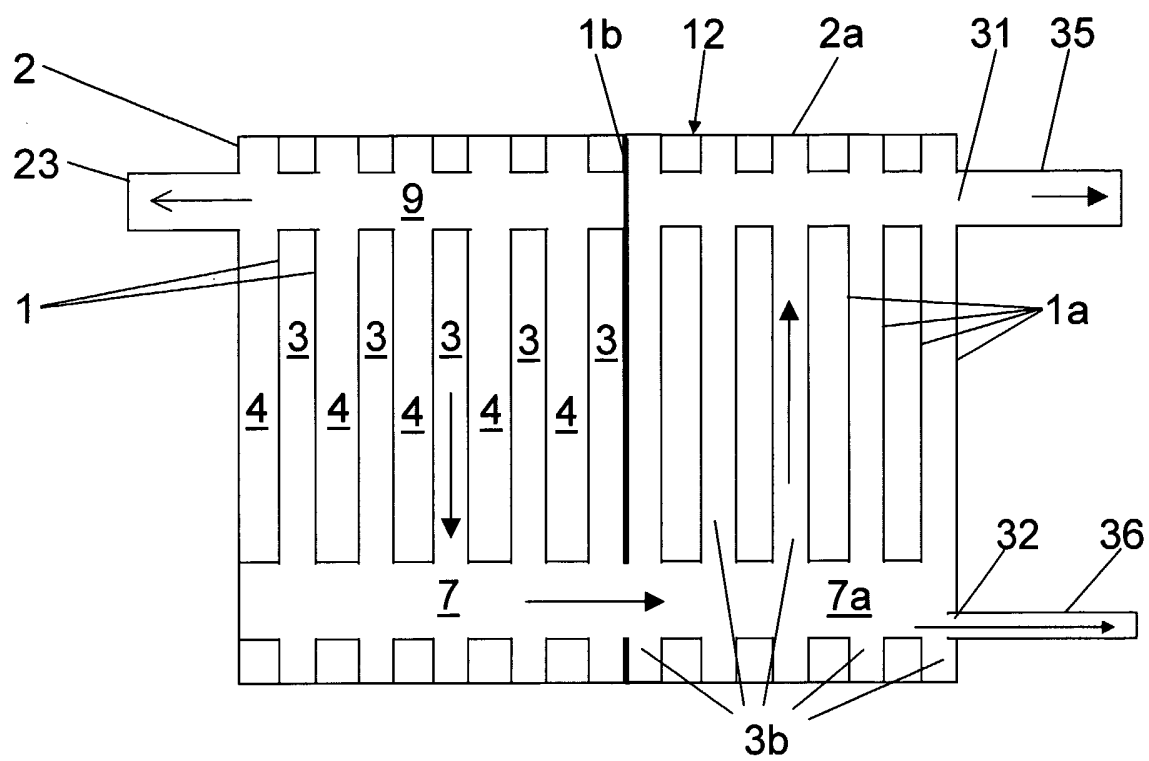


Fig 10

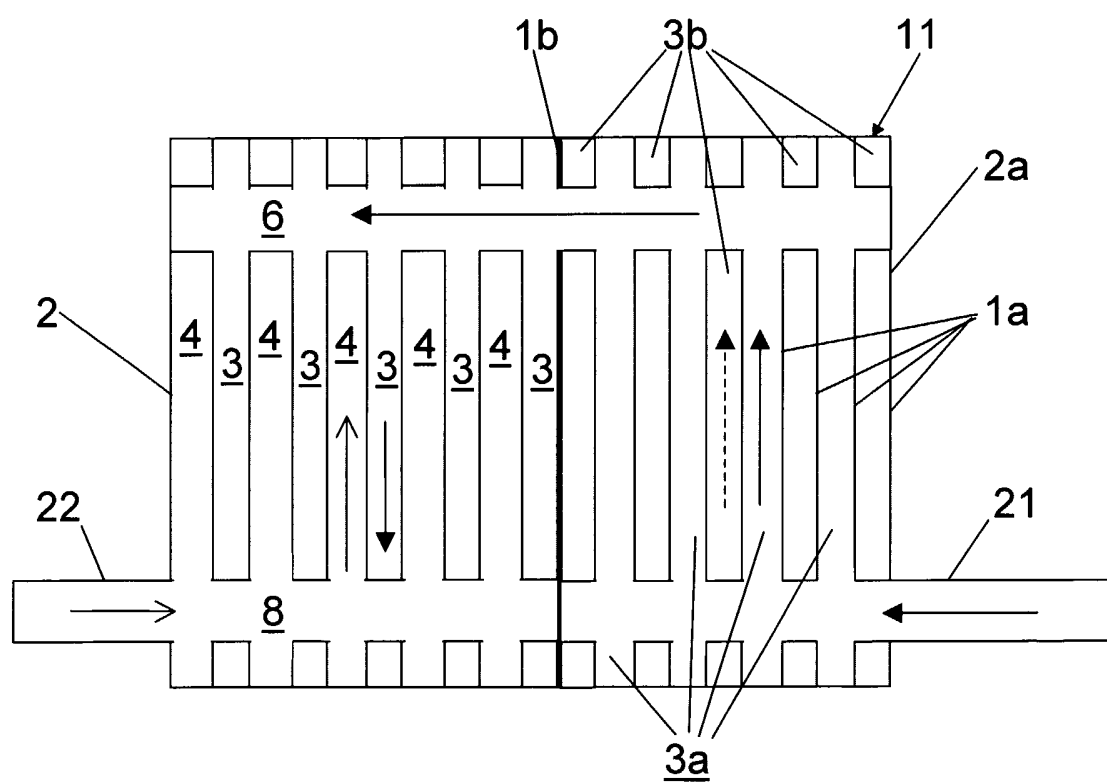

7/7

Fig 11


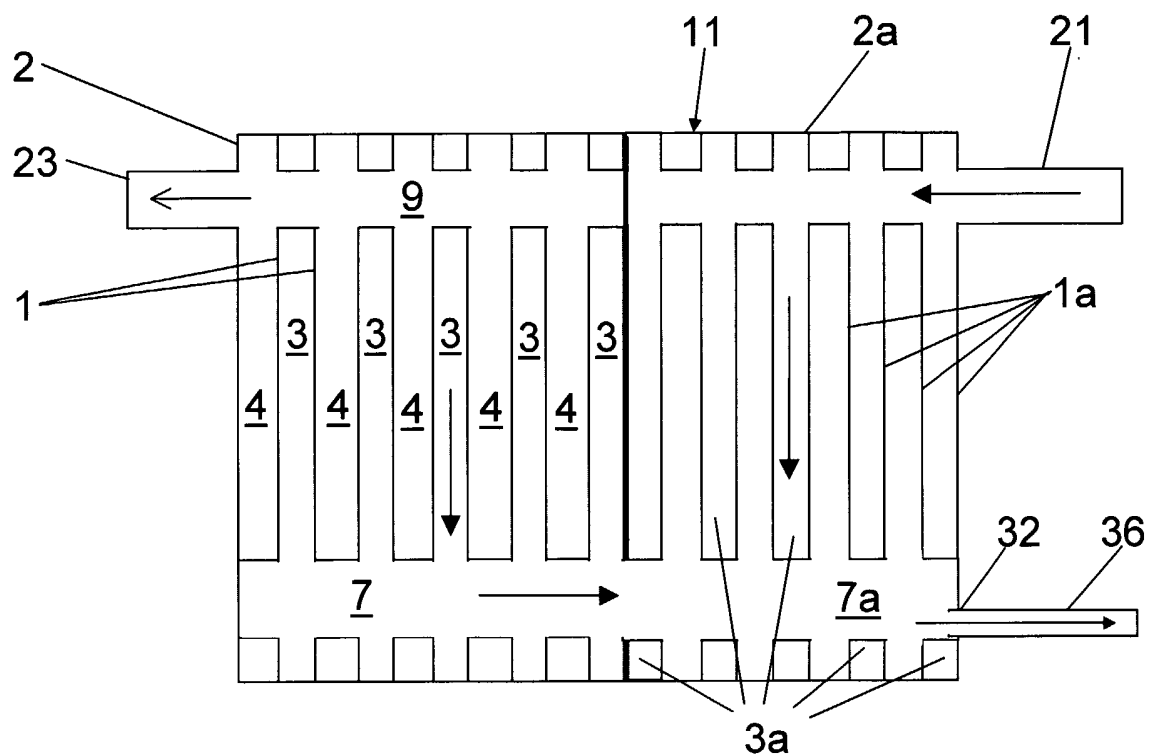


Fig 12

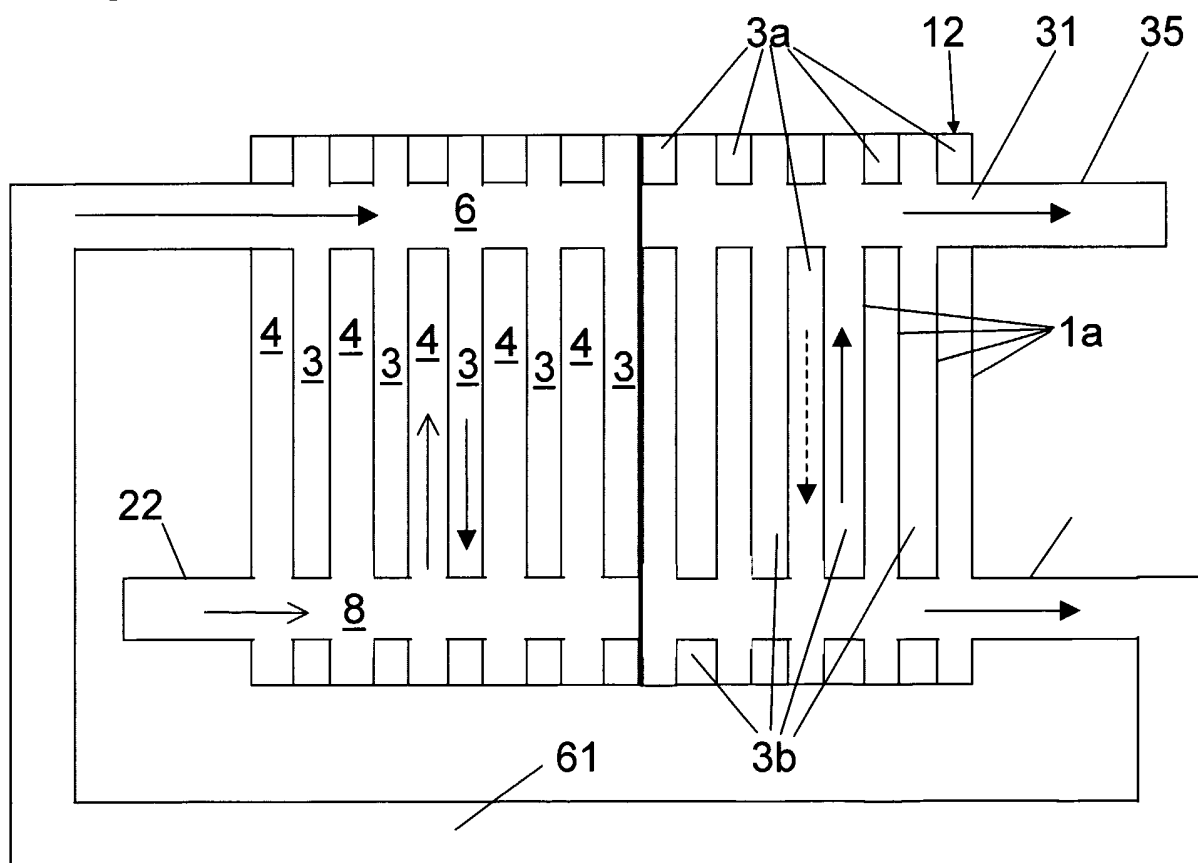

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00803

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F28F 9/02, F28F 3/08 // F25B 43/00, F28D 9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: F28F, F25B, F28D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACT OF JAPAN vol. 015, no. 432(M-1175), 5 November 1991 (1991-11-05) & JP 3 181760 A (NIPPONDENSO CO LTD), 7 August 1991 (1991-08-07) abstract --	
A	PATENT ABSTRACTS OF JAPAN vol. 009, no. 057(M-363), 13 March 1985 (1985-03-13) & JP 59 191894 A (HITACHI SEISAKUSHO KK), 31 October 1984 (1984-10-31) abstract --	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 Sept 2003

Date of mailing of the international search report

08 -09- 2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Annette Riedel / JA A
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00803

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 414(M-1303), 2 September 1992 (1992-09-02) & JP 41 39364 A (NIPPONDENSO CO LTD), 13 May 1992 (1992-05-13) abstract --	
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 038(M-1358), 25 January 1993 (1993-01-25) & JP 42 57670 (NIPPONDENSO CO LTD), 11 September 1992 (1992-09-11) abstract --	
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 151(M-1387), 25 March 1993 (1993-03-25) & JP 4 320771 A (NIPPONDENSO CO LTD), 11 November 1992 (1992-11-11) abstract --	
A	PATENT ABSTRACTS OF JAPAN vol. 009, no. 057(M-363), 13 March 1985 (1985-03-13) & JP 59 191895 A (HITACHI SEISAKUSHO KK), 31 October 1984 (1984-10-31) abstract --	
A	PATENT ABSTRACTS OF JAPAN vol. 199, no. 702, 28 February 1997 (1997-02-28) & JP 8 271091 A (NIPPONDENSO CO LTD), 18 October 1996 (1996-10-18) abstract --	
A	US 4370868 A (KIM ET AL), 1 February 1983 (01.02.83) --	

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00803

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3559722 A (JAMES J. SCHAULS ET AL), 2 February 1971 (02.02.71) --	
A	SE 514092 C2 (ALFA LAVAL AB), 8 January 2001 (08.01.01) --	
A	US 5983992 A (CHILD ET AL), 16 November 1999 (16.11.99), column 6, line 18 - line 26, figures 1, 2 --	
A	US 6032470 A (HASELDEN), 7 March 2000 (07.03.00), column 9, line 58 - line 63, figure 4, abstract -- -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

26/07/03

International application No.

PCT/SE 03/00803

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	4370868	A	01/02/83	CA	1163816 A	20/03/84
US	3559722	A	02/02/71	FR	2061736 A,B	25/06/71
				GB	1284667 A	09/08/72
SE	514092	C2	08/01/01	AU	1425000 A	15/05/00
				AU	5118900 A	12/12/00
				CN	1356919 T	03/07/02
				EP	1181084 A	27/02/02
				JP	2003500183 T	07/01/03
				SE	9901842 A	21/11/00
				US	6536511 B	25/03/03
				WO	0071223 A	30/11/00
US	5983992	A	16/11/99	US	6460613 B	08/10/02
				US	2001006103 A	05/07/01
				US	2001025705 A	04/10/01
				US	2002185265 A	12/12/02
				US	6305079 B	23/10/01
				AU	1851997 A	22/08/97
				BR	9707341 A	28/12/99
				CN	1214115 A	14/04/99
				DE	69702180 D,T	01/03/01
				EP	0877908 A,B	18/11/98
				ES	2146459 T	01/08/00
				IL	125477 A	21/11/00
				JP	2000514541 T	31/10/00
				PL	328065 A	04/01/99
				RU	2179692 C	20/02/02
				TW	396082 B	00/00/00
				US	6427764 B	06/08/02
				US	2001040023 A	15/11/01
				WO	9728411 A	07/08/97
US	6032470	A	07/03/00	AU	696121 B	03/09/98
				AU	4269296 A	19/07/96
				CA	2206780 A	04/07/96
				CN	1172525 A	04/02/98
				EP	0795111 A	17/09/97
				EP	0935114 A	11/08/99
				GB	9426208 D	00/00/00
				JP	10513540 T	22/12/98
				US	5875838 A	02/03/99
				WO	9620382 A	04/07/96
				GB	9502983 D	00/00/00