

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

INTERNET OF THINGS GATEWAY SYSTEMS AND METHODS FOR OIL AND GAS FIELDS

BACKGROUND OF THE DISCLOSURE

Field of the Disclosure

[0001] Aspects of the present disclosure generally relate to hydrocarbon production, more particularly, to implementation of wireless sensor packages to monitor oilfield equipment.

Description of the Related Art

[0002] In oil and gas upstream exploration and production (E&P), Supervisory Control and Data Acquisition (SCADA) systems have been deployed for many decades to acquire data from field assets, transmit the data to SCADA control centers, and provide control feedback to the assets in the field based on set points provided by the applications connected to the SCADA systems. These systems operate mostly based on proprietary protocols (like ModBus), gathering units, and specialized communication mechanisms. This process has led to expensive and proprietary systems. Upgrades to this architecture require expensive and expert personnel on site.

[0003] Thus, there is a need for apparatus and methods of monitoring oilfield equipment.

SUMMARY OF THE DISCLOSURE

[0004] In at least one aspect, the disclosure relates to integrated methods for data acquisition, analysis and transmission from oilfield field assets to production optimization and back office systems using the modern systems and protocols associated with the Internet of Things (referred to hereinafter as "IoT").

[0005] In at least one aspect, the disclosure relates to methods and systems to employ IoT devices, acquire data from these IoT devices, transmit data to gateways that network with one another, the gateways then send the data to the Cloud for further analysis and visualization at the data centers or in systems hosted in the Cloud.

[0006] Embodiments of the present disclosure provide a system for an oilfield operation. The system includes a pumping unit, a sensor positioned to measure one or more parameters of the pumping unit, and an IoT (Internet of Things) gateway including communication protocols for the sensor.

[0007] Embodiments of the present disclosure provide a method for operating a pumping unit for a wellbore. The method includes measuring one or more parameters of the pumping unit using a sensor attached to the pumping unit, transmitting sensor data from the sensor to an IoT gateway, and analyzing sensor data to determine health status of the pumping unit.

[0008] Embodiments of the present disclosure provide a non-transitory computer-readable medium for operating a pumping unit for a wellbore. The computer-readable medium includes instructions executable by one or more processors to receive sensor data from a sensor coupled to the pumping unit through a wireless protocol, analyze received sensor data to determine health status of the pumping unit, and communicate with a controller connected to the pumping unit and a Supervisory Control and Data Acquisition (SCADA) system via the Cloud.

[0009] This summary is provided to introduce a selection of embodiments that are further described below in the detailed description. This summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used as an aid in limiting the scope of the claimed subject matter..

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] So that the manner in which the above-recited features of the present

disclosure can be understood in detail, a more particular description of the disclosure, briefly summarized above, may be had by reference to aspects, some of which are illustrated in the appended drawings. It is to be noted, however, that the appended drawings illustrate only typical aspects of this disclosure and are therefore not to be considered limiting of its scope, for the disclosure may admit to other equally effective aspects.

[0011] FIG. 1 is a system block diagram for the Solution for Production Optimization in accordance with the present disclosure.

[0012] FIG. 2 is a system block diagram for Architecture for the Solution for Production Optimization in accordance with the present disclosure.

[0013] FIG. 3 is a block diagram for the IoT Gateway in accordance with the present disclosure.

DETAILED DESCRIPTION

[0014] In the following description, numerous details are set forth to provide an understanding of the present disclosure. However, it will be understood by those skilled in the art that the present disclosure may be practiced without these details and that numerous variations or modifications from the described embodiments are possible.

[0015] The present disclosure relates to IoT devices, data acquisition from these IoT devices, transmission of data to gateways that network with one another, wherein the gateways are operable to send the data to the Cloud for further analysis and visualization at the data centers or in systems hosted in the Cloud.

[0016] The confluence of new sensors, IoT, and the Cloud has enabled new and unique methods to digitize the oilfield through IoT devices. In the following, a method is described, based on IoT technology, to streamline the process. The solution provides open, standardized Application Programming Interfaces (APIs) and utilizes open, modern IoT protocols. The methods herein provide the

capability to acquire wired and wireless sensor data, analyze the data at the edge of the architecture, and reliably replicate data and results to an oil and gas production optimization system. These back-end optimization systems can be hosted on-premises in a customer datacenter, or hosted in the Cloud. The disclosed process, involving sensors, pumping unit controllers, IoT devices, IoT gateways, communication protocols, controls, and IoT applications are described in Figure 1.

[0017] FIG. 1 is schematic block diagram of a system 100 in accordance with the present disclosure. The system 100 includes a pumping unit 110. The pumping unit 110 may be positioned over a wellhead of a wellbore for direct production or artificial lift of hydrocarbon production. The pumping unit 110 shown in Fig. 1 is a reciprocating rod lift (RRL). Embodiments of the present disclosure may be used on other type of pumping unit, such as vertical pumping units. The pumping unit 110 is connected to a controller 112, which controls the operation of the pumping unit 110. The controller 112 may be connected through a SCADA network to a datacenter 114 and a SCADA system 116 that monitors the operation of the pumping unit 110.

[0018] The pumping unit 110 includes various moving components. The relative positions of the moving components may cause the pumping unit 110 to become off-balance, thus affect the operation. During operation, the pumping unit 110 may develop undesirable conditions, such as pump-off, a phenomenon reduces the pump efficiency. Additionally, the moving components are susceptible to wear down over time, thereby leading to shut down of the pumping unit 110.

[0019] In some embodiments, one or more sensors 130 are disposed on pumping unit 110 to measure various parameters of the pumping unit 110. In some embodiments, the one or more sensors 130 may be disposed on a wrist pin cap close to wrist pin bearings, bearings in the tail, bearings in the saddle, and/or bearings in the gearbox in a reciprocating rod lift. In some embodiments, the one

or more sensors 130 may be disposed on the crank arm, the walking beam, or the drive motor of a reciprocating rod lift.

[0020] The sensor data can be used to determine the operation condition, health status of the pumping unit 110, or other applications related to the production in the wellbore. The one or more sensor 130 may be attached to components of the pumping unit 110 to measure vibration, displacement, load, position, or other suitable parameters of the pumping unit 110.

[0021] In some embodiments, the sensor 130 includes at least one processor, one or more sensing device, an analog-to-digital converter, a time-to-frequency-domain converter, and memory. The sensor 130 may further an input/output (I/O) interface, which may be configured for wired and/or wireless implementations (e.g., Bluetooth or WiFi in accordance with IEEE 802.11).

[0022] In some embodiments, the sensor 130 includes noise-filtering means that is suitable for the oil and gas industry. For example, the sensor 130 includes a signal processing means configured to process signals from motors and pumps with revolution rates in a range between about 1Hz to about 1k Hz. In some embodiments, an analog filter (e.g., a low-pass filter, which may also be referred to as an anti-aliasing filter) may be applied before the analog-to-digital converter in the sensor in an effort to filter out high frequencies outside the frequency band of interest, before these higher frequencies are aliased into the passband by the act of sampling. For certain aspects, a digital filter (e.g., a low-pass filter or a notch filter) may be applied after the analog-to-digital converter in an effort to remove unwanted frequencies (e.g., higher frequencies) from the frequency band of interest. The digital filter may be implemented with a digital signal processor (DSP), which may be a standalone processor or part of another processor.

[0023] In some embodiment, the sensors 130 are embedded in wellsite equipment on the electronic boards with a variety of wireless protocols including Bluetooth protocol and Wi-Fi protocol in accordance with IEEE 802.11. In an embodiment, the sensors 130 are battery-powered wireless sensors at the

wellsite. The sensors 130 may be rugged, easy-to-install sensor packages used to detect characteristics, such as bearing wear and out-of-balance conditions, and communicate the data to the Internet of Things (IoT) gateway, such as Weatherford Internet of Things (IoT), via wireless protocol, such as Wi-Fi.

[0024] In some embodiment, the electronic boards, in which the sensors 130 are embedded, includes modules to perform signal processing algorithms to filter out the noise typical in the oil field environment from measurements of the sensors 130. In some embodiments, the electronic board comprises a time-to-frequency-domain converter, the time-to-frequency-domain converter implements a Fast Fourier Transform (FFT) or a Discrete Fourier Transform (DFT). In some embodiments, the electronic board is capable of performing Kalman filtering.

[0025] The noise-filtering means enable deployment of wireless sensors capable of reliably measuring the deterioration of bearing condition, and to report out-of-balance conditions. There are significant safety and efficiency benefits associated with this approach.

[0026] The system 100 further includes an IoT gateway 120 for communication with the one or more sensors 130. In some embodiments, the IoT gateway 120 also includes communication protocols that allow the IoT gateway 120 to communicate with mobile device 140, the controller 112, or a production optimization platform 160. The production optimization platform 160 is located remotely at a customer site and the production optimization platform 160 may be accessible to customers through remote stations 170. The IoT gateway 120 communicates with the production optimization platform 160 via the Cloud 150. An operator can monitor and control the pumping unit 110 using the production optimization platform 160 via the Cloud 150 and the IoT gateway 120. In some embodiments, the SCADA system 116 also communicates with the production optimization platform 160.

[0027] In some embodiment, the system 100 provides a feedback loop to control and monitor the pumping unit 110 through the one or more sensors 130 and the IoT gateway 120.

[0028] In some embodiments, the feedback loop includes the one or more sensors 130 and the IoT gateway 120. The IoT gateway 120 acquires sensor data from the one or more sensors 130, analyzes the sensor data and dispatches alerts or other signals to the controller 112.

[0029] In some embodiments, the feedback loop includes the one or more sensors 130, the IoT gateway 120, and the production optimization platform 160. The IoT gateway 120 acquires sensor data from the one or more sensors 130, transmits the sensor data to the production optimization platform 160. The production optimization platform 160 analyzes the sensor data and generates alerts or other information and sends related information back to the IoT gateway 120. The IoT gateway 120 then dispatches alerts or other signals to the controller 112.

[0030] In some embodiments, the feedback loop includes the one or more sensors 130, the IoT gateway 120, the production optimization platform 160, and the SCADA system 116. The IoT gateway 120 acquires sensor data from the one or more sensors 130, transmits the sensor data to the production optimization platform 160. The production optimization platform 160 analyzes the sensor data and generates alerts or other information. The SCADA system 116 may acquire information from the production optimization platform 160 and dispatch alerts or other commands to the controller 112.

[0031] FIG. 2 is a system block diagram for Architecture for the Solution of the system 100 in accordance with the present disclosure. As shown in Fig. 2, the IoT gateway 120 includes protocols and software technology stack 202 to be integrated into existing enclosures, or deployed in a separate enclosure at the wellsite.

[0032] In some embodiments, the IoT gateway 120 may be a small-form-factor, ruggedized, low-power Intel processor computer running a reliable message-oriented middleware software stack using the Message Queuing Telemetry Transport (MQTT) protocol. Technology stack indicates the combination of programming languages, tools and frameworks that the developers use to create web and mobile applications. There are two main components to any application, known as client side and server side, also referred to as front end and back end. Alternatively, the IoT gateway 120 can be any suitable hardware and software combination.

[0033] FIG. 3 schematically demonstrates more details of the technology stack 202 of the IoT Gateway 120 developed for the oil and gas applications.

[0034] In some embodiments, the IoT gateway 120 includes a Mosquitto MQTT broker 204, which is a Message Oriented Middleware using MQTT for reliable data replication. The Mosquitto MQTT broker 204 is the "publish-and-subscribe" message hub for the IoT gateway 120.

[0035] In some embodiments, the IoT gateway 120 provides interfaces to wireless sensors, such as the sensors 130, for measuring field data, such as, for example, but not limited to, pumping unit health.

[0036] In some embodiments, the IoT gateway 120 hosts an edge analytics 206 for processing raw data and producing health indicators, for example bearing condition (wear indicator) and out-of-balance condition.

[0037] In some embodiments, the IoT gateway 120 provides a bi-directional interface 208 (shown in FIG. 3) for pumping unit controllers, such as the controller 112. This interface provides 208 the various communication capabilities. For example, pumping unit controllers, such as the controller 112, can poll the IoT gateway 120 on a periodic basis and the IoT gateway 120 responds with alerts and pumping unit health status indicators. The alerts and indicators are transmitted to a pumping unit controller, such as the controller 112, via the

ModBus protocol (connected via RS232, RS485 or Ethernet) and back to a datacenter 114 through a traditional SCADA network.

[0038] The IoT gateway 120 further provides other data services, for example, edge analytics 206, data historian 210, data transmission channels (either over the internet to public or private cloud-based systems or through existing SCADA networks to datacenters), and remote software systems 212 for data visualization, analytics, production optimization, and workflow management.

[0039] In some embodiments, the IoT gateway 120 also provides a tablet interface 214 for access at the wellsite to data and analytics by service crews through a handheld user device such as, for example, an iPad™ running an application designed for such purpose.

[0040] In some embodiments, pumping unit controllers, such as the controller 112, can be polled by the IoT gateway 120 on a periodic basis. The data collected by the IoT gateway 120 is published to the Mosquito MQTT broker 204 and subsequently replicated by software, such as data replication service 216, to a Production Optimization (PO) system, such as the production optimization platform 160. In some embodiments, the production optimization platform 160 is Weatherford's ForeSite™ platform. The production optimization platform 160 may be in the cloud or hosted in a customer datacenter. This scenario does not require an expensive SCADA network, and it leverages the Internet for data transmission.

[0041] In some embodiments, the IoT gateway 120 also stores the data collected from sensors and connected controllers in a history database 218 on the IoT gateway 120.

[0042] In some embodiments, the IoT gateway 120 can store volumes of data, including analytics results, locally; and can respond to query requests for data from the remote production optimization system, or from a technician using a handheld device, such as an iPad™, at the well site.

[0043] In some embodiments, the middleware in the IoT gateway 120 is designed as a Micro-Service architecture and leverages MQTT publish and subscribe for reliable store and forward of raw data, results, history and commands.

[0044] In some embodiments, the IoT gateway 120 can be managed by remotely using secure cloud-base management platform.

[0045] In some embodiments, the IoT gateway 120 can be rail mounted in a custom enclosure so that it can withstand harsh environments found in the oilfields.

[0046] The IoT gateway 120 can be used by customers who have controllers, but have not been able to invest in SCADA due to cost and complexity. The IoT gateway 120 can also be used to augment traditional SCADA systems, as these systems typically cannot support wireless sensors that utilize protocols other than ModBus – modern protocols such as TCP/IP, MQTT and HTTP/REST in the case of a particular embodiment of the Gateway.

[0047] The IoT gateway 120 can network with one another via a variety of networking techniques and protocols. This feature allows transmission of data through gateways to land on the nearest backhaul for transmission to the Cloud.

[0048] As shown in FIG 3, data transmitted to the Cloud can be analyzed by the applications in the IoT gateway 120, the SCADA system 116, or the production optimization platform 160. The feedback loop to the IoT gateway 120 and the industrial equipment controls can provide autonomous operations.

[0049] One benefit of the present disclosure includes establishment of a field IoT platform capable of more autonomous operation through edge analytics, exception reporting, and access to raw data for further analysis. Another benefit of the present disclosure is compatibility and integration with existing SCADA systems. Still another benefit of the present disclosure is reduction of maintenance costs and non-productive time through accurate, reliable and

improved monitoring of pumping unit health. Another benefit of the present disclosure is Reduction in HSE incidents related to traditional hazardous procedures for diagnosing and remediating pumping unit operational conditions. An additional benefit of the present disclosure is it presents a path to long-term SCADA replacement by moving to Production 4.0 technologies.

[0050] Embodiments of the present disclosure provide a system for an oilfield operation. The system includes a pumping unit, a sensor positioned to measure one or more parameters of the pumping unit, and an IoT (Internet of Things) gateway including communication protocols for the sensor.

[0051] In one or more embodiments, the sensor is embedded in an electronic board capable of signal processing and performing filter functions.

[0052] In one or more embodiments, the electronic board comprises a time-to-frequency-domain converter, the time-to-frequency-domain converter implements a Fast Fourier Transform (FFT) or a Discrete Fourier Transform (DFT).

[0053] In one or more embodiments, the electronic board is capable of performing Kalman filtering.

[0054] In one or more embodiments, the system further includes an electronic board configured to transmit wireless signals, wherein the electronic board is connected to the sensor.

[0055] In one or more embodiments, the electronic board is configured to transmit signal through Bluetooth technology or Wi-Fi technology.

[0056] In one or more embodiments, the IoT gateway and the sensor communicate through wireless technology.

[0057] In one or more embodiments, the IoT gateway includes a technology stack applied to the oil and gas applications including communication protocols for existing production pumps, controllers, data historian, message queuing / brokers, and edge analytics.

[0058] In one or more embodiments, the IoT gateway includes a data transmission means connected to the Cloud.

[0059] In one or more embodiments, the electronic board includes a signal processing means configured to process signals from motors and pumps with revolution rates in a range between about 1Hz to about 1k Hz.

[0060] In one or more embodiments, the system further includes a controller connected to the pumping unit, wherein the IoT gateway is connected to the controller to provide a feedback loop for maintenance and/or control of the pumping unit.

[0061] In one or more embodiments, the sensor comprises a load sensor and a position sensor, and the load sensor and the position sensor are configured to apply dynamometer card for determining health status of the pumping unit.

[0062] In one or more embodiments, the IoT gateway includes an edge analytics for processing raw data from the sensor and producing health indicators for bearing condition and out-of-balance condition.

[0063] In one or more embodiments, the IoT gateway comprises a small-form-factor, ruggedized, low-power processor computer running a message-oriented middleware software stack using Message Queuing Telemetry Transport (MQTT) protocol.

[0064] Embodiments of the present disclosure provide a method for operating a pumping unit for a wellbore. The method includes measuring one or more parameters of the pumping unit using a sensor attached to the pumping unit, transmitting sensor data from the sensor to an IoT gateway, and analyzing sensor data to determine health status of the pumping unit.

[0065] In one or more embodiments, analyzing sensor data is performed in the IoT gateway.

[0066] In one or more embodiments, the method further includes processing

the sensor data and producing health indicators for bearing condition and out-of-balance condition.

[0067] In one or more embodiments, the method further includes applying a mobile device in communication with the IoT gateway to acquire data from the sensor.

[0068] In one or more embodiments, the method further includes communicating operating commands to a controller connected to the pumping unit through the IoT gateway.

[0069] Embodiments of the present disclosure provide a non-transitory computer-readable medium for operating a pumping unit for a wellbore. The computer-readable medium includes instructions executable by one or more processors to receive sensor data from a sensor coupled to the pumping unit through a wireless protocol, analyze received sensor data to determine health status of the pumping unit, and communicate with a controller connected to the pumping unit and a Supervisory Control and Data Acquisition (SCADA) system via the Cloud.

[0070] Although a few example embodiments have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the example embodiments without materially departing from this disclosure. Accordingly, such modifications are intended to be included within the scope of this disclosure as defined in the following claims. In the claims, means-plus-function clauses are intended to cover the structures described herein as performing the recited function and not simply structural equivalents, but also equivalent structures. Thus, although a nail and a screw may not be structural equivalents in that a nail employs a cylindrical surface to secure wooden parts together, whereas a screw employs a helical surface, in the environment of fastening wooden parts, a nail and a screw may be equivalent structures. It is the express intention of the applicant not to invoke 35 U.S.C. § 112, paragraph 6 for any limitations of any of the claims herein, except for those in which the claim

expressly uses the words 'means for' together with an associated function.

[0071] While the foregoing is directed to aspects of the present disclosure, other and further aspects of the disclosure may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

CLAIMS

1. A system for an oilfield operation, comprising:
 - a pumping unit;
 - a sensor positioned to measure one or more parameters of the pumping unit; and
 - an IoT (Internet of Things) gateway including communication protocols for the sensor.
2. The system of claim 1, wherein the sensor is embedded in an electronic board capable of signal processing and performing filter functions.
3. The system of claim 2, wherein the electronic board comprises a time-to-frequency-domain converter, the time-to-frequency-domain converter implements a Fast Fourier Transform (FFT) or a Discrete Fourier Transform (DFT).
4. The system of claim 2, wherein the electronic board is capable of performing Kalman filtering.
5. The system of claim 1, further comprising:
 - an electronic board configured to transmit wireless signals, wherein the electronic board is connected to the sensor.
6. The system of claim 5, wherein the electronic board is configured to transmit signal through Bluetooth technology or Wi-Fi technology.
7. The system of claim 1, wherein the IoT gateway and the sensor communicate through wireless technology.
8. The system of claim 1, wherein the IoT gateway includes a technology stack applied to the oil and gas applications including communication protocols for existing production pumps, controllers, data historian, message queuing / brokers,

and edge analytics.

9. The system of claim 1, wherein the IoT gateway includes a data transmission means connected to the Cloud.

10. The system of claim 2, wherein the electronic board includes a signal processing means configured to process signals from motors and pumps with revolution rates in a range between about 1Hz to about 1k Hz.

11. The system of claim 1, further comprising:
a controller connected to the pumping unit, wherein the IoT gateway is connected to the controller to provide a feedback loop for maintenance and/or control of the pumping unit.

12. The system of claim 1, wherein the sensor comprises a load sensor and a position sensor, and the load sensor and the position sensor are configured to apply dynamometer card for determining health status of the pumping unit.

13. The system of claim 12, wherein the IoT gateway includes an edge analytics for processing raw data from the sensor and producing health indicators for bearing condition and out-of-balance condition.

14. The system of claim 1, wherein the IoT gateway comprises a small-form-factor, ruggedized, low-power processor computer running a message-oriented middleware software stack using Message Queuing Telemetry Transport (MQTT) protocol.

15. A method for operating a pumping unit for a wellbore, comprising:
measuring one or more parameters of the pumping unit using a sensor attached to the pumping unit;
transmitting sensor data from the sensor to an IoT gateway; and
analyzing sensor data to determine health status of the pumping unit.

16. The method of claim 15, wherein analyzing sensor data is performed in the IoT gateway.


17. The method of claim 15, further comprising:
processing the sensor data and producing health indicators for bearing condition and out-of-balance condition.

18. The method of claim 15, further comprising:
applying a mobile device in communication with the IoT gateway to acquire data from the sensor.

19. The method of claim 15, further comprising:
communicating operating commands to a controller connected to the pumping unit through the IoT gateway.

20. A non-transitory computer-readable medium for operating a pumping unit for a wellbore, comprising instructions executable by one or more processors to:
receive sensor data from a sensor coupled to the pumping unit through a wireless protocol;
analyze received sensor data to determine health status of the pumping unit; and
communicate with a controller connected to the pumping unit and a Supervisory Control and Data Acquisition (SCADA) system via the Cloud.

1/3

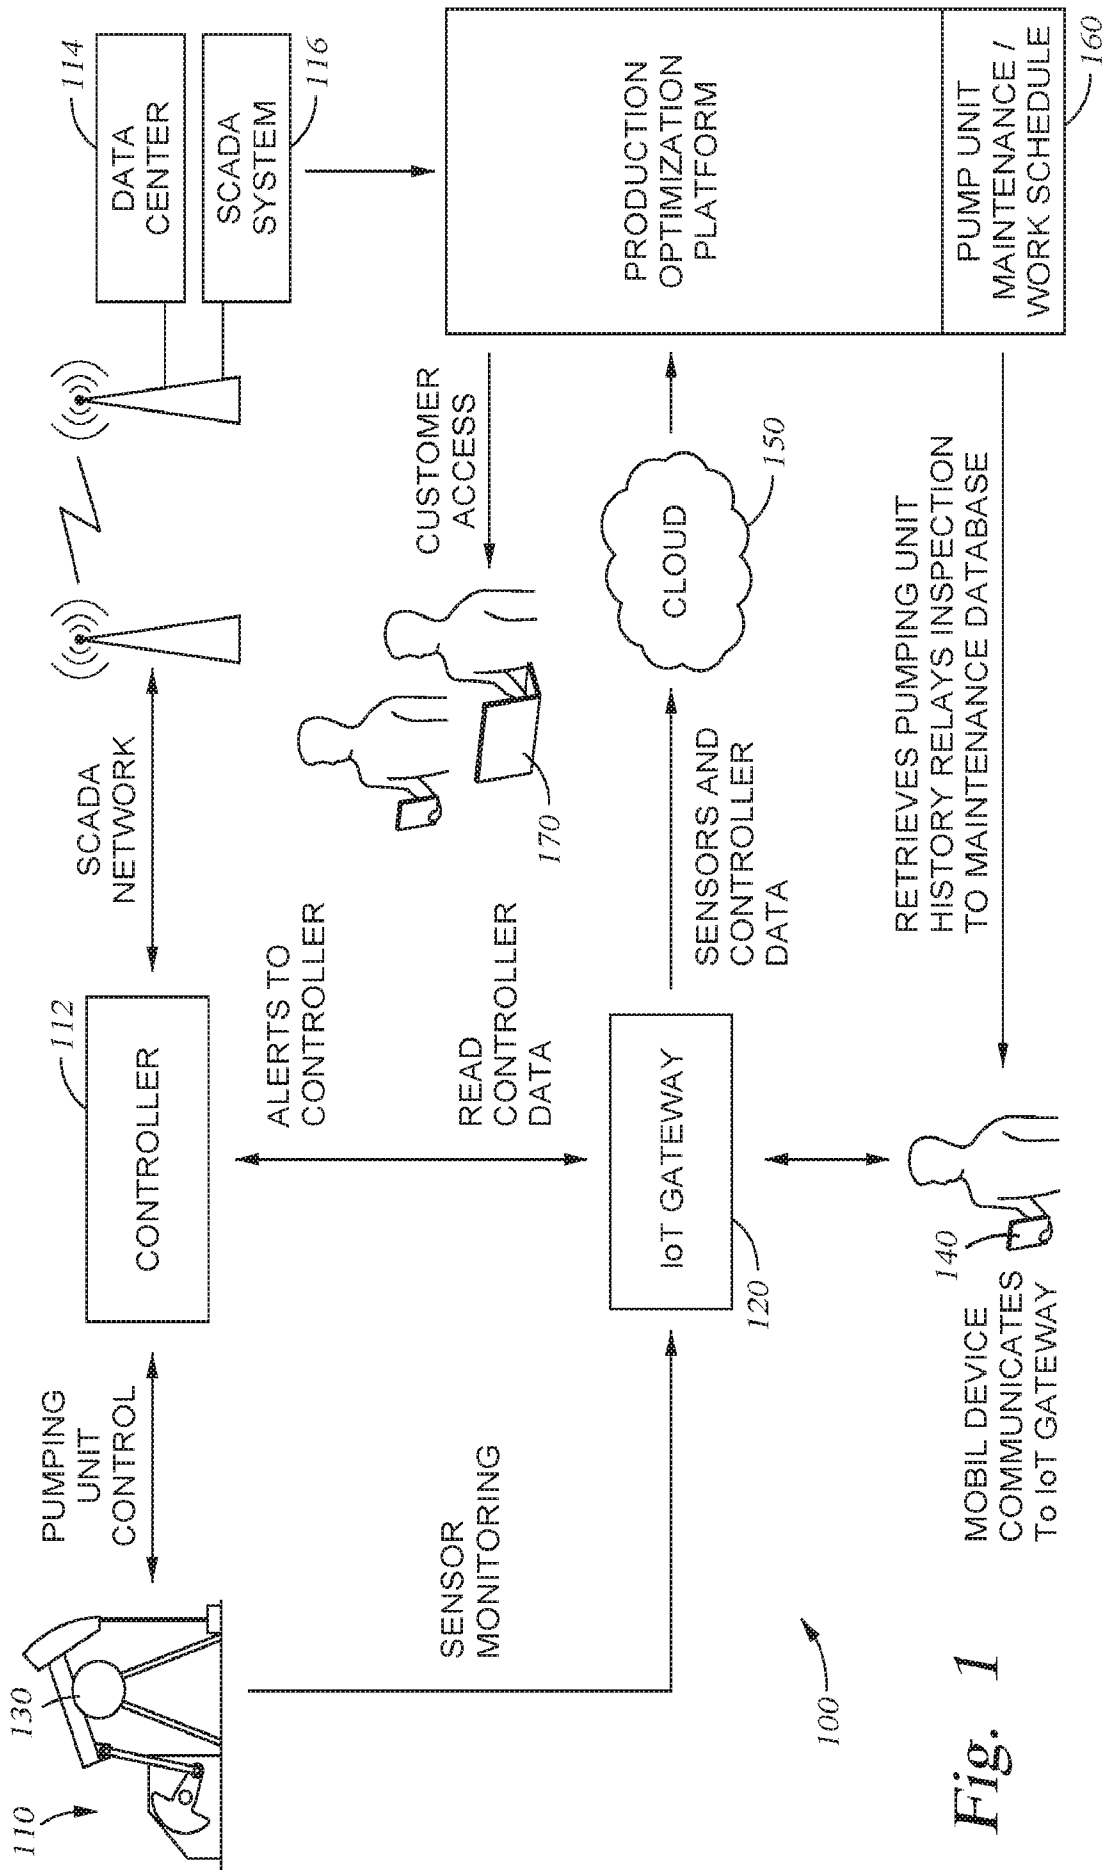

2/3


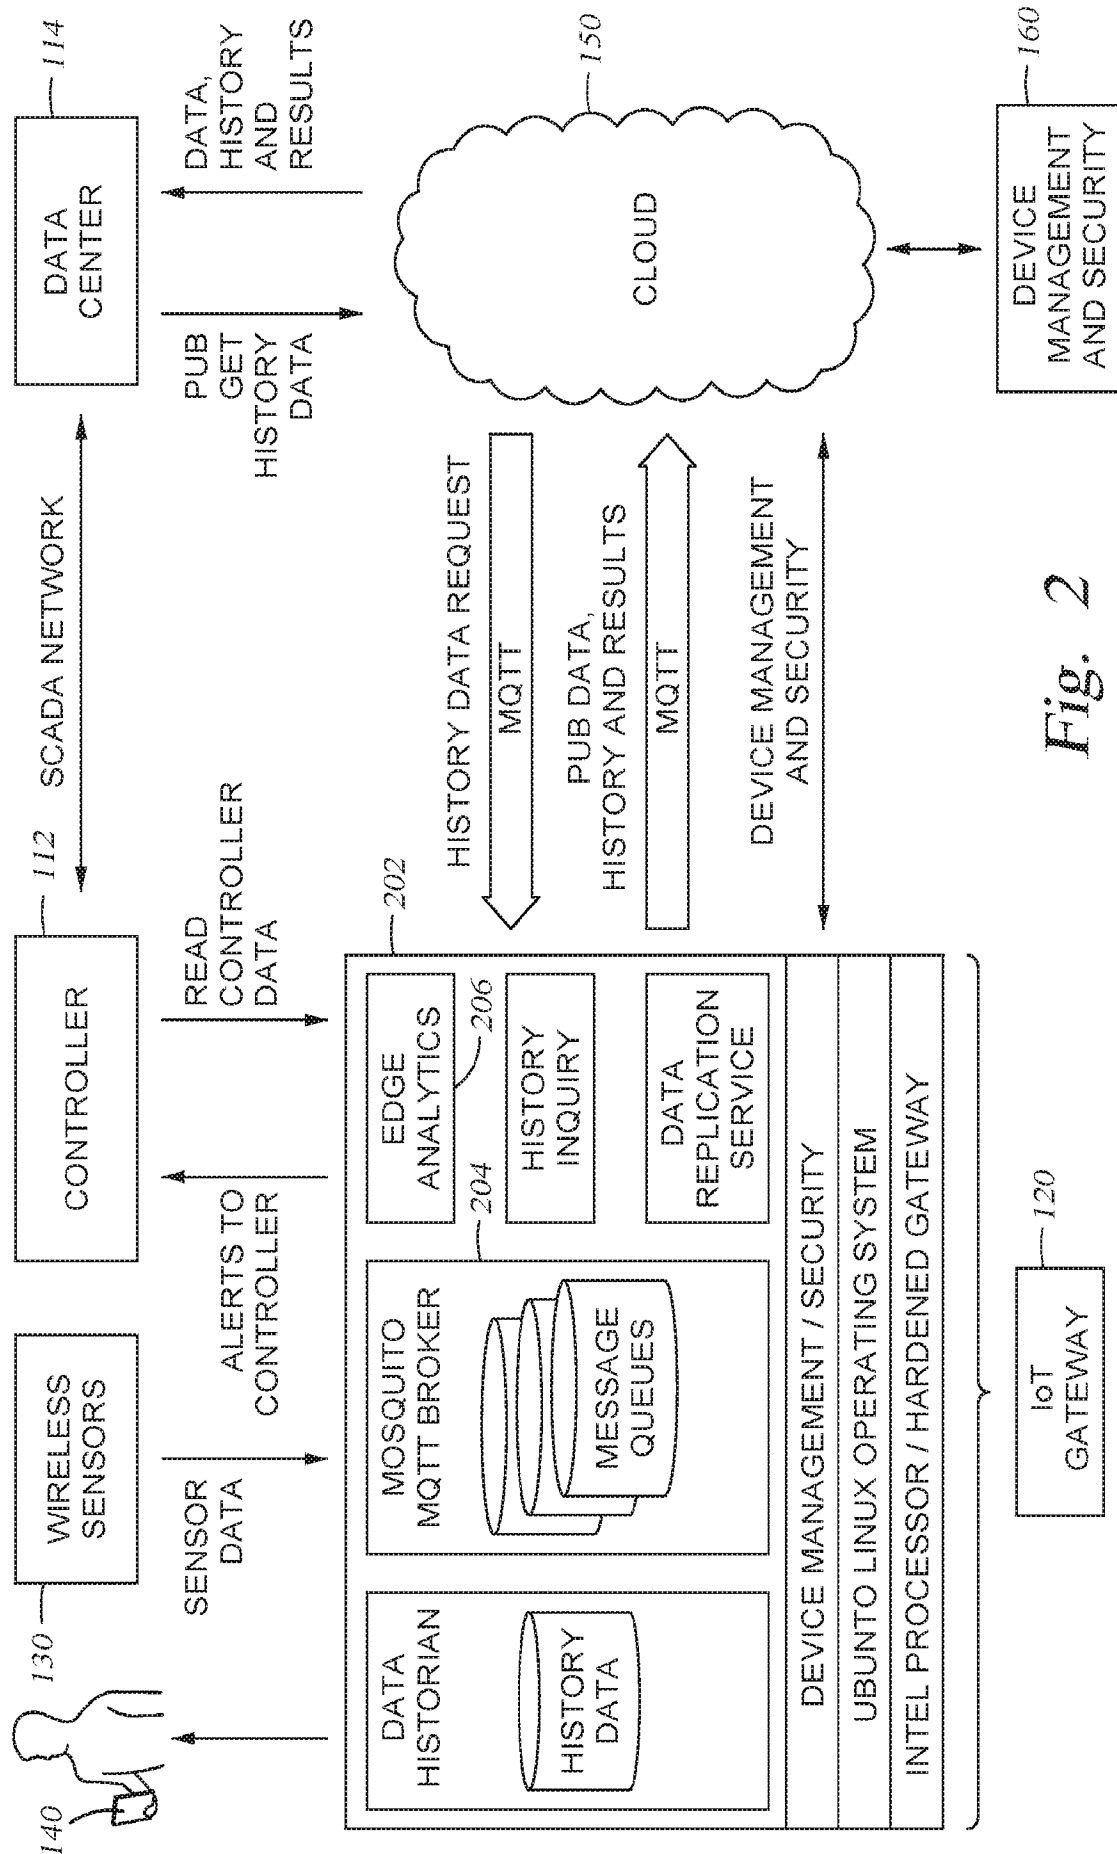


Fig. 2

Fig. 3

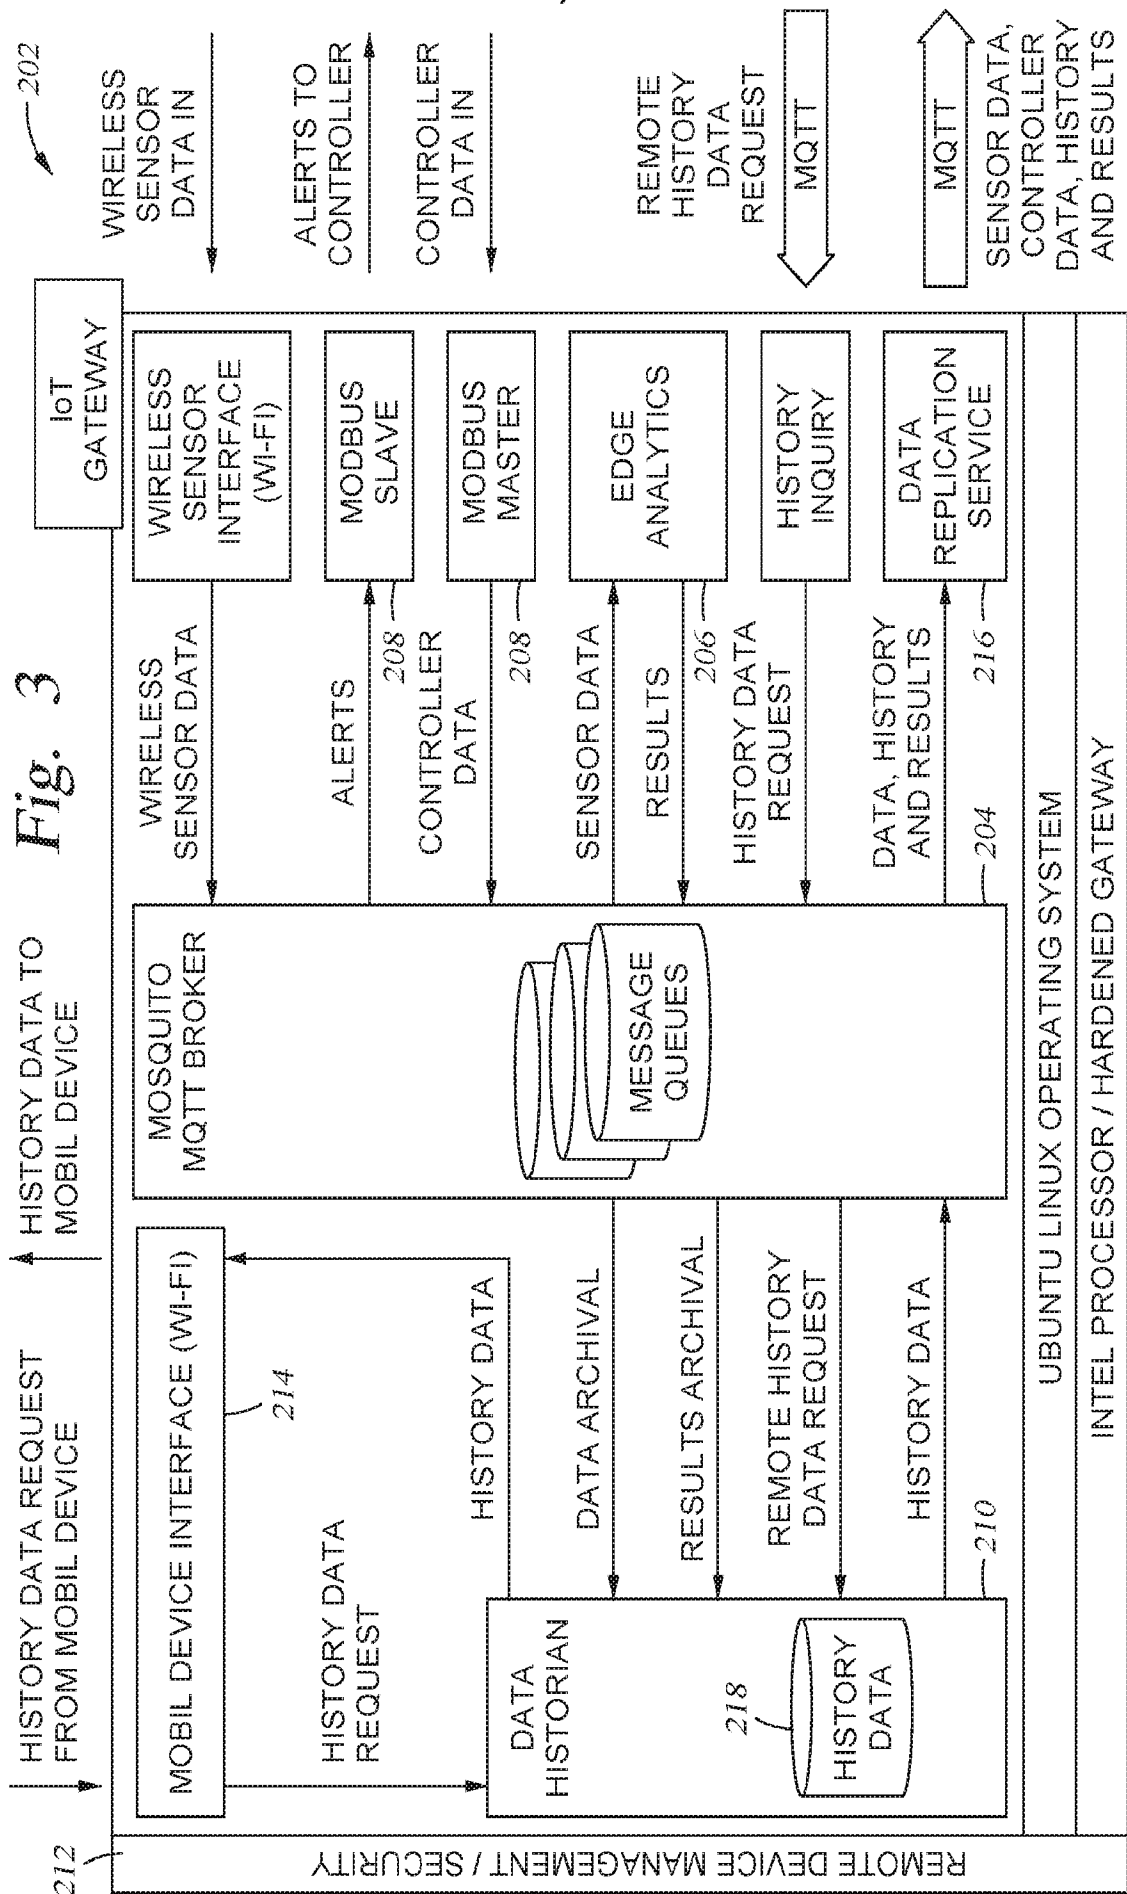

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/043728

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W4/38 G05B19/418 H04L29/08
ADD. E21B47/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W E21B G05B H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	KHAN WAZIR ZADA ET AL: "A reliable Internet of Things based architecture for oil and gas industry", 2017 19TH INTERNATIONAL CONFERENCE ON ADVANCED COMMUNICATION TECHNOLOGY (ICACT), GLOBAL IT RESEARCH INSTITUTE - GIRI, 19 February 2017 (2017-02-19), pages 705-710, XP033082614, DOI: 10.23919/ICACT.2017.7890184 the whole document	1-20
A	US 2013/300574 A1 (GILLETTE II WILLIAM J [US]) 14 November 2013 (2013-11-14) paragraph [0010] - paragraph [0116]; figures 1-3 paragraph [0197] - paragraph [0229] ----- -/-	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 October 2018

Date of mailing of the international search report

30/10/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Tortelli, Michele

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/043728

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2017/060574 A1 (MALLADI SASTRY KM [US] ET AL) 2 March 2017 (2017-03-02) paragraph [0006] - paragraph [0013]; figure 4 paragraph [0061] - paragraph [0134] -----	1-20
A	US 2017/152737 A1 (PONS VICTORIA M [US]) 1 June 2017 (2017-06-01) paragraph [0128] - paragraph [0138] -----	2-4,10, 12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/043728

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013300574 A1	14-11-2013	US 2013298642 A1	14-11-2013
		US 2013298652 A1	14-11-2013
		US 2013298664 A1	14-11-2013
		US 2013298857 A1	14-11-2013
		US 2013299001 A1	14-11-2013
		US 2013300341 A1	14-11-2013
		US 2013300574 A1	14-11-2013
		US 2013301674 A1	14-11-2013
		US 2013304346 A1	14-11-2013
		US 2013304351 A1	14-11-2013
		US 2013304385 A1	14-11-2013
		US 2017040520 A1	09-02-2017

US 2017060574 A1	02-03-2017	NONE	

US 2017152737 A1	01-06-2017	CA 2950093 A1	30-05-2017
		EP 3176361 A2	07-06-2017
		US 2017152737 A1	01-06-2017
