



(11)

**EP 3 196 328 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:

**14.08.2019 Bulletin 2019/33**

(51) Int Cl.:

**C22C 38/14** <sup>(2006.01)</sup> **C21D 8/02** <sup>(2006.01)</sup>

(86) International application number:

**PCT/CN2015/089695**

(21) Application number: **15841538.0**

(22) Date of filing: **16.09.2015**

(87) International publication number:

**WO 2016/041490 (24.03.2016 Gazette 2016/12)**

(54) **ENAMEL STEEL HAVING HIGH-TEMPERATURE BAKING HARDENABILITY AND  
MANUFACTURING METHOD THEREFOR**

EMAILLESTAHL MIT HOCHTEMPERATUREINBRENNHÄRTBARKEIT UND  
HERSTELLUNGSVERFAHREN DAFÜR

ACIER ÉMAILLÉ POSSÉDANT UNE TREMPABILITÉ PAR CUISSON À HAUTE TEMPÉRATURE ET  
SON PROCÉDÉ DE FABRICATION

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(74) Representative: **Kuhnen & Wacker**

**Patent- und Rechtsanwaltsbüro PartG mbB  
Prinz-Ludwig-Straße 40A  
85354 Freising (DE)**

(30) Priority: **19.09.2014 CN 201410483551**

(56) References cited:

**EP-A1- 0 745 007 EP-A1- 1 513 961  
WO-A1-00/12773 CN-A- 1 966 753  
CN-A- 101 063 189 CN-A- 101 684 532  
CN-A- 102 251 192 CN-A- 102 747 309  
CN-A- 103 741 026 CN-A- 104 250 705  
JP-A- S58 197 254**

(43) Date of publication of application:  
**26.07.2017 Bulletin 2017/30**

(73) Proprietor: **Baoshan Iron & Steel Co., Ltd.  
Shanghai 201900 (CN)**

(72) Inventor: **SUN, Quanshe c/o Baoshan Iron & Steel  
Co., Ltd.  
Shanghai 201900 (CN)**

**EP 3 196 328 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description****Technical Field**

5 **[0001]** The present invention relates to an alloy steel and a method for manufacturing the same, in particular an enamel steel and a method for manufacturing the same.

**Background Art**

10 **[0002]** With regard to a volume type water heater, a liner is a critical component, which determines the service safety and service life of the water heater. An enamel liner having a steel plate as a base slab has a number of features such as a good corrosion resistance, a high surface hardness, being smooth and easy to clean, and such an enamel liner significantly improves the service life and comprehensive performance of the water heater liner. When using a steel plate as a base slab to manufacture an enamel liner of a water heater, the steel plate first needs to undergo blanking, 15 processing and forming and welding, is further subjected to enamelling, and finally fired under conditions of a high temperature of about 830°C. However, in order to satisfy the requirements of producing a high quality enamel liner, and the steel plate must meet performance requirements in various aspects of formability, strength, weldability, fish-scaling resistance, pinhole resistance, high temperature firing resistance, etc.

**[0003]** Previously, an enamel liner is generally formed by welding three parts, i.e., two end caps and a barrel body, 20 and therefore one enamel liner generally has three welds, including two circumferential welds and one straight weld, wherein the two caps have relatively lower requirements on the formability. However, a new type of liner appears in the prior art, wherein this new type of liner is formed by welding two parts, i.e., an upper barrel and a lower barrel, and the primary three welds are reduced to one circumferential weld in the middle; therefore, circular rolling, hole expansion and two welds are omitted in the process of processing the new type of liner, the manufacturing process being greatly 25 simplified. Moreover, the reduction of welds can substantially improve the pressure-resistance of the liner. In addition, since the new type of liner is stamped relatively deeply, and processes of hole expansion etc. are further performed after the stamping, the requirements for the stamping property and hole expansion property of the steel plate are obviously improved.

**[0004]** In order to satisfy the processing requirements of the liner, cold-rolled steel plates are mainly used, where the 30 formability is superior to that in a hot-rolled steel plate. In the prior art, steel plates generally used for liners can meet the stamping requirements, but the hole expansion property is lower, that is to say, cracking easily occurs when hole expansion is made after deep stamping. In addition, since a mechanism of inhibiting abnormal growth of ferrite grains at a high temperature is lacked in the steel, grains in the welds and heat affected zones after welding severely grow abnormally, and grains after high-temperature enamelling firing also easy grow, the yield strengths of the base steel 35 plate, welds, heat affected zones, etc. are decreased, finally causing that cracking and water leakage very easily occur to the liner around the welds when pressurizing. In addition, due to deficiency of hydrogen storage traps in the steel, even under conditions of enamelling on a single face of the liner, fish-scaling phenomenon will often occur.

**[0005]** Chinese patent document with a patent publication number of CN 1966753 A, published on February 23, 2007, and entitled "Steel plate for hot-rolled double-side enamel and method for producing same" relates to a steel plate for 40 enamel, with various element components (wt.%) being: C: 0.02%-0.06%, Si:  $\leq 0.50\%$ , Mn: 0.15%-0.40%, P:  $\leq 0.15\%$ , S:  $\leq 0.006\%$ , N  $\leq 0.003\%$ , Ti: 0.08%-0.20%, Al<sub>S</sub>: 0.005%-0.055%, Ti/C: 2.2-5, and the balance being Fe and inevitable impurities. The structure in a hot rolled state is ferrite with a grain diameter of 2-20  $\mu\text{m}$ , and TiC particles with a diameter of not greater than 20 nm are uniformly distributed in the structure. In the technical solution disclosed in the patent document, the steel plate for enamel has a higher content of element Ti and a lower content of element S.

45 **[0006]** Chinese patent document with a patent publication number of CN 101684532 A, published on March 31, 2010, and entitled "Enamel steel for cold rolling water heater and manufacturing method thereof" discloses an enamel steel, with the composition of various chemical element components in contents by mass in percentage (wt.%) being: C: 0.01%-0.08%, Si  $\leq 0.03\%$ , Mn: 0.10%-0.60%, P  $\leq 0.02\%$ , S: 0.003%-0.02%, N: 0.001%-0.006%, Al<sub>S</sub>  $\leq 0.04\%$ , Ti: 0.02%-0.12%, and the balance being iron and inevitable impurities, wherein the content of excess titanium in the steel meets the 50 relational formula:  $\text{Ti} - (4 \times \text{C} + 3.43 \times \text{N} + 1.5\text{S}) \leq 0$ . The enamel steel disclosed in the Chinese patent document has a yield strength after simulated enamelling firing lower than the yield strength before the simulated enamelling firing. WO 00/12773 discloses a steel for manufacturing high adherence enamel coating steel with good formability having 0.004 wt.% or less of carbon.

55 **[0007]** Chinese patent document with patent publication number of CN 101586210 A, published on November 25, 2009, entitled "High strength enamel steel and producing technology and enamel firing technology thereof" discloses an enamel steel, with the contents of various chemical elements by mass in percentage thereof being: C: 0.01-0.12, Si  $\leq 0.03$ , Mn: 0.50-1.00, P  $\leq 0.070$ , S  $\leq 0.015$ , Nb: 0.020-0.050, Mo: 0.05-0.30, Als: 0.005-0.070, and the balance being iron and inevitable impurities. In addition, the enamel steel further meets  $10\text{Nb} \geq \text{Mo}$  and  $0.30 \leq 10\text{Nb} + \text{Mo} \leq 0.50$ .

## Summary of the Invention

**[0008]** An object of the present invention lies in providing an enamel steel having a high-temperature baking hardenability, which has an excellent formability, a good welding property and a good enamelling property. In addition, the enamel steel of the present invention further has an excellent enamelling firing property, and the yield strength after high-temperature enamelling firing will be significantly improved, i.e., having a high-temperature baking hardenability. In addition, the alloy addition cost of the enamel steel of the present invention is low.

**[0009]** In order to achieve the above-mentioned object, the present invention provides an enamel steel having a high-temperature baking hardenability, the chemical elements thereof, in mass percentage, being:

C: 0.008-0.020%;

Mn: 0.05-0.50%;

S: 0.021-0.035%;

Al: 0.005-0.050% of or Al<sub>2</sub>O<sub>3</sub>: 0.003-0.045wt. %;

0 < N < 0.003%;

0 < O ≤ 0.010%;

and element Ti, in a mass percentage meeting  $N \times Ti \leq 3 \times 10^{-4}$ ,  $S \times Ti \geq 2 \times 10^{-3}$  and  $Ti \geq 3.43N + 1.5S + 0.02$ , the balance being Fe and inevitable impurity elements.

**[0010]** In the present technical solution, the inevitable impurities mainly refer to elements P and Si. When the content of P is higher, segregation easily occurs at the grain boundary in the steel, thereby bubbles and black spots are easily produced when enamelling firing, which thus affects the surface quality of the enamel. When the content of Si is higher, not only the enamel properties of the steel will be damaged, but also oxide inclusions having very poor ductility may be formed, thus damaging the plasticity of the steel. With regard to the technical solution of the present invention, elements P and Si are harmful elements, the contents of these two elements in the steel needs to be as low as possible; therefore, the content of element Si can be controlled at  $\leq 0.10\text{wt.}\%$ , and the content of element P is controlled at  $\leq 0.035\text{wt.}\%$ .

**[0011]** The design principle of various chemical elements of the enamel steel having a high-temperature baking hardenability of the present invention is:

C and Ti, wherein firstly, the content of carbon in the steel greatly affects the formability and strength of the steel plate, the higher the content of carbon, the lower the plasticity, and the higher the strength, vice versa. Secondly, in addition to being present in the steel in a solid solution, carbon can further form a microstructure such as cementite or pearlite. In addition, after titanium alloy is added, carbon can further form titanium carbide compounds with titanium.

**[0012]** In the technical solution of the invention, by controlling the content of carbon and the content of element titanium reacting with carbon, and combining the subsequent process control, carbon will not form a microstructure of pearlite, but is present in a form of dispersed carbides (such as titanium carbide, cementite) or a small amount of a solid solution. Due to the substantial aggregation of cementite in the microstructure of pearlite, on the one hand, a great amount of bubbles will be formed in the process of enamelling, and on the other hand, it is not disadvantageous to improve the strength of the steel in the process of enamelling firing. When the content of carbon is higher than 0.020 wt.%, carbon very easily forms coarser cementite, and even may produce a microstructure of pearlite; on the contrary, when the content of carbon is lower than 0.008 wt.%, not only the content of cementite in the steel is small, but also the titanium carbide formed with titanium is also very less, it being impossible to have a strengthening function, and the strength of the steel is reduced, and as a result, an effect of high-temperature baking hardenability also cannot be achieved.

**[0013]** With regard to the technical solution of the present invention, the addition amount of titanium alloy is very important. It can be seen according to calculation of the solubility product of the formation of titanium compounds that titanium first reacts with nitrogen, then reacts with sulphur, and finally reacts with carbon; therefore, in such a precipitation order, it shall be certainly ensured that a part of titanium forms titanium carbide by reacting with carbon. When the content of element titanium in mass percentage meets the relational formula:  $Ti \geq 3.43N + 1.5S + 0.02$ , it can be ensured that a part of titanium reacts with carbon; in addition, by controlling the hot rolling process, cementite particles are smaller as compared to the existing cementite particles, and titanium carbide and titanium carbonitride are present in a state of fine particles so as to achieve a purpose of matrix strengthening. In addition, in the process of high-temperature enamelling firing, a part of cementite and titanium carbide and titanium carbonitride particles which are originally present in fine dispersed states will be dissolved in the subsequent heating process, but re-precipitated again in the following cooling process, and the re-precipitated particles will be finer and more dispersed, thus achieving the purpose of reaching baking hardenability by a high-temperature process. On the contrary, if the content of element titanium in mass percentage is excessively low, if lower than the content as defined in the relational formula, i.e., when  $Ti < 3.43N + 1.5S + 0.02$ , it will be very difficult to ensure that a certain quantity of titanium carbide and titanium carbonitride particles are present in the steel, such that the purpose of precipitation strengthening cannot be achieved. To this end, by high-temperature firing, the strength of the steel cannot be further improved. Consequently, the content of element C in the enamel steel having

a high-temperature baking hardenability of the present invention should be controlled at 0.008-0.020 wt.%, and the content of element Ti should meet  $Ti \geq 3.43N + 1.5S + 0.02$ .

**[0014]** In addition, more preferably, the content of element C is controlled in a range between 0.015-0.020 wt.%.

**[0015]** Mn: Manganese is a deoxidation element in the steel, and adding such an element can control the content of oxygen in the steel. Manganese can react with sulphur to produce manganese sulphide. After adding element titanium in the steel, manganese can further form a composite inclusion with the element, such as manganese titanium sulphide. Such an inclusion is in a spherical shape, and can remarkably reduce the effect of manganese sulphide on the processability. However, when the content of manganese is excessively high, the reaction at the interface of steel and enamel will be affected in the enamelling process, such that the adherence of the enamel is damaged, and defects such as bubbles are easily produced. In view of this, the content of Mn in the enamel steel having a high-temperature baking hardenability of the present invention is set as 0.05-0.50 wt.%.

**[0016]** Preferably, the content of Mn in the enamel steel having a high-temperature baking hardenability of the present invention is further set as 0.1-0.3 wt.%.

**[0017]** S: generally, sulphur is a harmful element in the steel, this is because sulphur and manganese will form an inclusion of manganese sulphide, which may damage the transverse plasticity of the steel plate. However, in the technical solution of the present invention, element S is not a harmful element, the content of S in the enamel steel needs to be controlled within a range between 0.021-0.035 wt.%, and it is further ensured that  $S \times Ti \geq 2 \times 10^{-3}$ . The reason why the content of sulphur is controlled within a range between 0.021-0.035 wt.% is that on the basis of adding titanium, sulphur and titanium will form titanium sulphide, a great amount of hydrogen storage traps will be formed around titanium sulphide particles, and as a result, defects of fish-scaling in the enamelling process are less likely produced. In addition, after element titanium is added in the steel, adverse effect of manganese sulphide formed in the steel on the plasticity of steel can be further reduced. However, if the content of sulphur is higher than 0.035 wt.%, more titanium and manganese need to be consumed by sulphur to form sulphides, and the formed sulphide particles will be very large, such that the plasticity of the steel will be damaged. In addition, larger particle sulphides will also have a very limited effect on the improvement of the fish-scaling resistance. In addition, sulphur can form titanium sulphide with titanium or can form composite manganese titanium sulphide with titanium and manganese. By controlling the content of sulphur and ensuring  $S \times Ti \geq 2 \times 10^{-3}$ , titanium sulphide may be formed in advance of manganese sulphide. The reason lies in that the greater the product of  $S \times Ti$ , the higher the formation temperature of titanium sulphide, and the shape of titanium sulphide particles is in a spherical shape, such that by controlling the heating and rolling steps in the subsequent hot rolling process, the shape and size of titanium sulphide can be further improved. Likewise, with regard to element manganese, manganese may also form a composite inclusion of manganese titanium sulphide, the particles shape of the composite inclusion is also a spherical shape; to this end, the formation of pure plastic manganese sulphide inclusion can be avoided in the steel, thus improving the processability of the steel.

**[0018]** In addition, controlling the content of S in the enamel steel at 0.021-0.03 wt.% is a more preferred technical solution.

**[0019]** Al or Als: Aluminium is also a strong deoxidization element. When the content of aluminium is higher, the content of oxygen in the steel will be reduced; on the contrary, when the content of aluminium is excessively low, the content of oxygen in the steel will be improved. The oxygen remaining in the steel is mainly present in a form of an oxide inclusion, which will severely damage the plasticity of the steel. An appropriate amount of aluminium can reduce the content of oxygen in the steel, and thus aluminium is one of elements to be necessarily added in the steel. To this end, with regard to the enamel steel having a high-temperature baking hardenability of the present invention, if Al is defined in a form of Alt (total aluminium), it is then required to control the content of Alt at 0.005-0.050 wt.%; and if Al is defined in a form of Als (acid soluble aluminium), Als then needs to be controlled at 0.003-0.045 wt.%.

**[0020]** N: Nitrogen is one of inevitable residual elements in the steel. Generally, nitrogen is a solid solution element, wherein after the addition of titanium into the steel, since nitrogen is extremely easy to form a metal compound with titanium, in the steel to which titanium is added, nitrogen will be more preferential to form titanium nitride with respect to sulphur and carbon. The sequence of forming titanium nitride is related to the contents of titanium and nitrogen, and this can be calculated according to the solubility product of the formation of titanium nitride, i.e.,  $\lg[Ti][N] = 5.4 - 15790/T$ , wherein T is the solid solution temperature of titanium nitride, the unit being K, and both Ti and N are in a content in mass percentage. The higher the contents of nitrogen and/or titanium, also the higher the content of the formed titanium nitride, and also the larger the particles. In addition, if it is required to fix 0.001 wt.% of nitrogen, 0.00343 wt.% of titanium needs to be consumed, and the mass of the titanium consumed is about 3.43 times that of nitrogen. In the processing deformation, with respect to the titanium nitride particles, tiny holes will be formed around the particles so as to be beneficial for hydrogen storage in the steel plate during the enamelling process; however, titanium nitride particles can further seriously damage the plasticity, hole expansion property and other mechanical properties of the steel plate. In addition, the titanium nitride particles also cannot improve the strength of the steel and the strength of the steel after enamelling firing. To this end, in order to avoid forming a coarse titanium nitride inclusion in the steel and reduce the consumption of titanium by nitrogen, the nitrogen in the steel should be as low as possible, and the content of nitrogen is controlled

at  $0 < N < 0.003$  wt.% and meeting  $N \times Ti \leq 3 \times 10^{-4}$ .

**[0021]** O: Since the process of smelting of liquid steel mainly relies on reactions of carbon and oxygen, oxygen is inevitable in the steel. However, when the content of oxygen in the steel is excessively high, an oxide inclusion may be formed to affect the processability of the steel. On this basis, O in the enamel steel having a high-temperature baking hardenability of the present invention has to be controlled as  $0 < O \leq 0.010$  wt.%.

**[0022]** In the technical solution of the present invention, the definition of the content of titanium in mass percentage is defined by the following three constraint formulae: 1)  $N \times Ti \leq 3 \times 10^{-4}$ , 2)  $S \times Ti \geq 2 \times 10^{-3}$ , and 3)  $Ti \geq 3.43N + 1.5S + 0.02$ . That is to say, the addition of element Ti is restricted and limited by the contents of elements N and S in mass percentage.

**[0023]** Since the content of carbon in the enamel steel of the present invention is low, most carbon will be fixed to form a titanium carbide compound after the addition of titanium into the steel, which results in that both the free state carbon and cementite has an extremely low content, which will greatly inhibit the production of pinhole defects in the enamelling process, thus substantially improving the service life of the enamel liner.

**[0024]** Further, the element C in the enamel steel having a high-temperature baking hardenability of the present invention is present in a dispersed carbide form.

**[0025]** More further, said carbide is cementite and finely granulated titanium carbide and titanium carbonitride.

**[0026]** More further, the grain diameter of said titanium carbide and titanium carbonitride particles are  $10\text{-}30\text{ }\mu\text{m}$ .

**[0027]** More further, the enamel steel having a high-temperature baking hardenability of the present invention further comprises at least one of  $0 < Cu \leq 0.10\%$ ,  $0 < Cr \leq 0.10\%$ ,  $0 < Ni \leq 0.10\%$ ,  $0 < Mo < 0.10\%$ ,  $0 < Nb \leq 0.010\%$ ,  $0 < V \leq 0.020\%$ , and  $0 < B \leq 0.0005\%$ , with  $0.05\% \leq 5 \times Nb + Cu + V + Ni + Cr + Mo + 10 \times B \leq 0.20\%$ .

**[0028]** The fluctuations of the contents of copper, chromium, nickel and molybdenum in the steel all will affect the enamel properties of the steel plate, particularly the adherence of the steel, and surface defects may be produced, and the strength and plasticity of the steel plate will also be affected. In order to further ensure the enamelling property, etc. of the steel plate to be stable and reliable, the addition of the elements is controlled as  $0 < Cu \leq 0.10\text{wt.}\%$ ,  $0 < Cr \leq 0.10\text{wt.}\%$ ,  $0 < Ni \leq 0.10\text{wt.}\%$ ,  $0 < Mo \leq 0.10\text{wt.}\%$ .

**[0029]** Adding any of niobium, vanadium and boron can improve the recrystallization temperature of the steel plate. Once the recrystallization temperature is improved, the hot rolling temperature for the steel plate also needs to be accordingly improved. With regard to thin steel plates, for example, steel plates having a finished product thickness of not greater than 2.5 mm, it is very difficult to achieve an excessively high final rolling temperature, and a problem of non-uniform temperatures at different parts of a strip steel will be caused, finally leading to defects of mixed grains and structure abnormality of the steel plate. In addition, although the increase of the recrystallization temperature has a certain effect on improving the strength of the enamel before the firing, it has not too much effect on the improvement of the strength of the enamel after the firing. In order to reduce the adverse effect of these addition elements on the microstructure after hot rolling, they need to be controlled within a certain range, i.e.,  $0 < Nb \leq 0.010\text{wt.}\%$ ,  $0 < V \leq 0.020\text{wt.}\%$ , and  $0 < B \leq 0.0005\text{wt.}\%$ .

**[0030]** At the same time, the above-mentioned elements, when added, further need to meet  $0.05\text{wt.}\% \leq 5 \times Nb + Cu + V + Ni + Cr + Mo + 10 \times B \leq 0.20\text{wt.}\%$ .

**[0031]** Accordingly, the present invention further provides a manufacturing method for producing the enamel steel having a high-temperature baking hardenability as described hereinabove, comprising the steps of: a liquid iron pre-treatment  $\rightarrow$  smelting with a converter  $\rightarrow$  refining  $\rightarrow$  continuous casting  $\rightarrow$  hot rolling.

**[0032]** Further, the method for manufacturing the enamel steel having a high-temperature baking hardenability of the present invention further comprises steps of: acid pickling  $\rightarrow$  cold rolling  $\rightarrow$  annealing  $\rightarrow$  temper rolling, after the hot rolling step.

**[0033]** Further, in said cold rolling step, the overall reduction ratio is controlled at greater than 70%. Further preferably, the overall reduction ratio of the cold rolling is controlled at  $\geq 75\%$ . In addition, in the cold rolling step, the roughness of the steel plate surface can also be controlled within a range of  $0.4\text{-}2.0\text{ }\mu\text{m}$  by changing the roughness of the roll surface of the roller.

**[0034]** Further, in said annealing step, the annealing temperature is  $650\text{-}800^\circ\text{C}$ .

**[0035]** More further, in the above-mentioned hot rolling step, the heating temperature is  $1100\text{-}1250^\circ\text{C}$ , and the heating time is  $\geq \text{plate thickness} \times 1\text{ min/mm}$ , wherein the unit of plate thickness is mm, and the plate thickness refers to the plate thickness of a continuous casting slab.

**[0036]** In order to ensure that the microstructure in the steel is formed as uniform austenite, i.e., fully austenized, and allow the cementite or pearlite aggregated in the steel slab to be dissolved, i.e., allowing some mass points formed at a high temperature, such as titanium nitride, to be dissolved or partially dissolved, the heating temperature for the continuous casting slab is set as  $1100\text{-}1250^\circ\text{C}$ . Certainly, the particular heating time within the range can be adjusted according to the thickness of the steel slab, and in general, the thinner the steel slab, the shorter the heating time, the heating time being required to meet  $t \geq \text{plate thickness} \times 1\text{ min/mm}$ .

**[0037]** More further, in the above-mentioned hot rolling step, the final rolling temperature for the hot rolling is  $850\text{-}930^\circ\text{C}$ ,

and the coiling temperature for the hot rolling is 630-780°C.

[0038] Since in the hot rolling step, carbides previously dissolved in the continuous casting process, etc., will be re-precipitated in a compound form, the final rolling temperature in the hot rolling step needs to be reasonably controlled such that the carbide is distributed in a form of a fine dispersed state in the ferrite matrix. In view of this, the final rolling for the hot rolling of the enamel steel of the present invention is controlled to be complete within a temperature range of 850-930°C to ensure that the hot rolling is completed at not less than the recrystallization temperature, which avoids rolling in a dual phase area of austenite + ferrite, and prevents causing the defects of mixed grains and structure abnormality in the steel plate.

[0039] In the method for manufacturing the enamel steel having a high-temperature baking hardenability of the present invention, the cementite and titanium carbide are present in a state of fine particles by controlling the process parameters of the hot rolling process so as to achieve the purpose of matrix strengthening. In addition, by controlling the heating temperature in the continuous casting step and the final rolling temperature and the coiling temperature in the hot rolling temperature, the shape and size of titanium sulphide in the steel is further improved.

[0040] As compared to the existing enamel steels, the yield strength of the enamel steel having a high-temperature baking hardenability of the present invention after high-temperature enamelling firing will be significantly improved, thus improving the pressure-resistance of an enamel steel article and prolonging the service life.

[0041] The enamel steel having a high-temperature baking hardenability of the present invention has a better formability, an elongation of  $\geq 39\%$ , and a hole expansion rate of  $\geq 60\%$ , and is particularly suitable for manufacturing various complex shapes of water heater liners.

[0042] The enamel steel having a high-temperature baking hardenability of the present invention has a good weldability.

[0043] The enamel steel having a high-temperature baking hardenability of the present invention has an excellent enamelling property, and a long hydrogen permeation time ( $\geq 10$  min) which is higher than that of a steel for double-side enamel in the prior art ( $\geq 8$  min).

[0044] Since lower price alloy addition elements are used, the alloy cost of the enamel steel having a high-temperature baking hardenability of the present invention is low, and the manufacturing cost is also relatively economic.

[0045] The production process of the enamel steel having a high-temperature baking hardenability of the present invention is simple and practicable.

## Description of the Drawings

[0046]

Figure 1 is a tendency graph of yield strength of an enamel steel having a high-temperature baking hardenability of Example A1 in a condition of heat preservation at 830°C over the heat preservation time.

Figure 2 is a picture of the microstructure of the enamel steel having a high-temperature baking hardenability of Example A1.

Figure 3 is a picture of the morphology of the precipitated phase in the enamel steel having a high-temperature baking hardenability of Example A1.

## Particular Embodiments

[0047] The enamel steel having a high-temperature baking hardenability and method for manufacturing the same of the present invention will be further described below according to particular embodiments, but the particular embodiments and related description do not form an inappropriate definition of the technical solution of the present invention.

Examples A1-A6 and Comparative Example B1

[0048] The enamel steels in Examples A1-A5 and Comparative Example B1 are manufactured according to the following steps (1)-(5), and the enamel steel in Example A6 is manufactured according to the following steps (1)-(9):

1) Liquid iron pretreatment;

2) smelting with a converter: decarbonization, dephosphorization and removal of residual elements and harmful gases, etc. are achieved by using a top-bottom combined blowing converter;

3) Refining: the harmful gases and residual elements are further removed, alloy elements such as titanium, etc., are added, and aluminium etc. is added for deoxidation to achieve the accurate control of the chemical composition. The mass percentages of various chemical elements in Examples A1-A6 and Comparative Example B1 are controlled as shown in table 1;

4) Continuous casting: liquid steel is cast into a continuous casting slab having a thickness of 200 or 230 mm, and

## EP 3 196 328 B1

after the continuous casting slab is cooled, the surface quality is manually inspected, and the surface defects manually cleaned;

5) Hot rolling: before the hot rolling, the continuous casting slab is heated at a heating temperature of 1100-1250°C for a heating time of  $t \geq \text{plate thickness} \times 1 \text{ min/mm}$ , wherein the unit of plate thickness is mm; with regard to the continuous casting slab having a thickness of 200 mm, the heating time is controlled at 200-240 min or more, and with regard to the continuous casting slab having a thickness of 230 mm, the heating time is controlled at 230-260 min or more; and according to needs, the thickness at end of the hot rolling is 1.5-18 mm, and the final rolling temperature for the hot rolling is 850-930°C, and after laminar cooling to the coiling temperature, coiling is performed, the coiling temperature for hot rolling being 630-780°C;

6) Acid pickling: the acid pickling is mainly performed using dilute hydrochloric acid, or may also be performed using other methods, the purpose of the acid pickling being thoroughly removing oxide-scales on the surface;

7) Cold rolling: the overall reduction ratio is controlled at not greater than 70%;

8) Annealing: annealing is performed at 650-800°C, the purpose being achieving recrystallization and grain growth of the structure of the steel plate after the cold rolling so as to obtain a good plasticity; and

9) Temper rolling: the elongation of temper rolling is 0.8-1.2%.

**[0049]** Reference is made in detail to table 2 for specific process parameters in the various steps.

**[0050]** Table 1 lists the mass percentages of various chemical elements in the enamel steels in Examples A1-A6 and Comparative Example B1 of the present case.

Table 1. (wt.%, the balance being Fe and other inevitable impurities other than P and S)

| Serial number                                                                                                                                                                                                                                                                                    | A1      | A2      | A3      | A4      | A5     | A6      | B1                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------|---------|---------|--------|---------|-----------------------------------------------|
| C                                                                                                                                                                                                                                                                                                | 0.013   | 0.018   | 0.02    | 0.008   | 0.01   | 0.013   | <u><b>0.031</b></u>                           |
| Mn                                                                                                                                                                                                                                                                                               | 0.25    | 0.2     | 0.1     | 0.3     | 0.25   | 0.15    | 0.22                                          |
| S                                                                                                                                                                                                                                                                                                | 0.029   | 0.025   | 0.035   | 0.025   | 0.03   | 0.021   | <u><b>0.007</b></u>                           |
| Al                                                                                                                                                                                                                                                                                               | 0.041   | 0.035   | 0.035   | 0.028   | 0.005  | 0.02    | 0.031                                         |
| N                                                                                                                                                                                                                                                                                                | 0.0018  | 0.002   | 0.0025  | 0.0015  | 0.002  | 0.002   | 0.0026                                        |
| O                                                                                                                                                                                                                                                                                                | 0.005   | 0.006   | 0.003   | 0.005   | 0.003  | 0.003   | --                                            |
| P                                                                                                                                                                                                                                                                                                | 0.011   | 0.015   | 0.009   | 0.01    | 0.008  | 0.011   | 0.01                                          |
| Si                                                                                                                                                                                                                                                                                               | 0.008   | 0.02    | 0.05    | 0.03    | 0.1    | 0.008   | 0.006                                         |
| Ti                                                                                                                                                                                                                                                                                               | 0.09    | 0.08    | 0.09    | 0.085   | 0.15   | 0.12    | 0.002                                         |
| Cu                                                                                                                                                                                                                                                                                               | 0.01    | 0.02    | 0.02    | 0.05    | 0.01   | 0.06    | --                                            |
| Cr                                                                                                                                                                                                                                                                                               | 0.02    | 0.05    | 0.02    | 0.015   | 0.05   | 0.06    | --                                            |
| Ni                                                                                                                                                                                                                                                                                               | 0.008   | 0.025   | 0.008   | 0.01    | 0.02   | 0.005   | --                                            |
| Mo                                                                                                                                                                                                                                                                                               | 0.005   | 0.005   | 0.015   | 0.008   | 0.02   | 0.01    | --                                            |
| Nb                                                                                                                                                                                                                                                                                               | 0.005   | 0.002   | 0.002   | --      | --     | 0.002   | --                                            |
| V                                                                                                                                                                                                                                                                                                | 0.015   | --      | --      | --      | 0.005  | 0.01    | --                                            |
| B                                                                                                                                                                                                                                                                                                | --      | 0.0002  | --      | --      | 0.0004 | --      | --                                            |
| Relational formula 1)                                                                                                                                                                                                                                                                            | 0.00016 | 0.00016 | 0.00023 | 0.00013 | 0.0003 | 0.00024 | $5.2 \times 10^{-6}$                          |
| Relational formula 2)                                                                                                                                                                                                                                                                            | 0.0026  | 0.002   | 0.0032  | 0.0021  | 0.0045 | 0.0025  | <u><b><math>1.4 \times 10^{-5}</math></b></u> |
| Relational formula 3)                                                                                                                                                                                                                                                                            | 0.07    | 0.064   | 0.081   | 0.063   | 0.072  | 0.058   | 0.039                                         |
| Relational formula 4)                                                                                                                                                                                                                                                                            | 0.02    | 0.016   | 0.009   | 0.022   | 0.078  | 0.062   | <u><b>-0.037</b></u>                          |
| Relational formula 5)                                                                                                                                                                                                                                                                            | 0.08    | 0.11    | 0.07    | 0.08    | 0.11   | 0.16    | <u><b>0</b></u>                               |
| NOTE: Relational formula 1) is $N \times Ti$ , relational formula 2) is $S \times Ti$ , relational formula 3) is $3.43N + 1.5S + 0.02$ , relational formula 4) $Ti - (3.43 \times N + 1.5 \times S + 0.02)$ , and relational formula 5) is $5 \times Nb + Cu + V + Ni + Cr + Mo + 10 \times B$ . |         |         |         |         |        |         |                                               |

**[0051]** Table 2 lists the process parameters of the method for manufacturing the enamel steels in Examples A1-A6 and Comparative Example B1 of the present case.

Table 2.

| Serial number | Thickness of continuous-casting slab (mm) | Hot rolling step         |                    |                                |                          | Cold rolling and annealing |                            | Thickness of finished steel plate (mm) |              |
|---------------|-------------------------------------------|--------------------------|--------------------|--------------------------------|--------------------------|----------------------------|----------------------------|----------------------------------------|--------------|
|               |                                           | Heating temperature (°C) | Heating time (min) | Final rolling temperature (°C) | Coiling temperature (°C) | Reduction ratio (%)        | Annealing temperature (°C) | Hot rolling                            | Cold rolling |
| A1            | 200                                       | 1100                     | 215                | 860                            | 630                      |                            |                            | 1.8                                    | -            |
| A2            | 200                                       | 1100                     | 220                | 865                            | 660                      |                            |                            | 2.0                                    | -            |
| A3            | 200                                       | 1150                     | 235                | 860                            | 660                      |                            |                            | 2.0                                    | -            |
| A4            | 200                                       | 1250                     | 240                | 920                            | 730                      |                            |                            | 5.0                                    | -            |
| A5            | 230                                       | 1150                     | 235                | 880                            | 680                      |                            |                            | 2.5                                    | -            |
| A6            | 230                                       | 1150                     | 260                | 880                            | 680                      | 75                         | 760                        | 4.0                                    | 1.0          |
| B1            | 200                                       | 1150                     | 210                | 860                            | 660                      |                            |                            | 1.8                                    | -            |

**[0052]** At room temperature, transverse sampling is used in any of Examples A1-A6 and Comparative Example B1, and the  $R_{eL}$ ,  $R_m$ ,  $A_{80mm}$  and hole expansion rate are determined. With regard to the measurement of the hydrogen storage capacities of the enamel steels in Examples A1-A6 and Comparative Example B1, the hydrogen permeation times of the steel plates are measured according to the electrochemical experiment method in Standard EN10209, and all are converted as a standard thickness of 1 mm.

**[0053]** Under a condition of heat preservation at 830°C, heat treatment is used after the transverse sampling in each of Examples A1-A6 and Comparative Example B1, i.e., the steel plates are taken out after heat preservation at 830°C in a constant temperature furnace for 10 min and air-cooled to room temperature. Of the sample plates after the heat treatment, the  $R_{eL}$ ,  $R_m$  and  $A_{80mm}$  are measured.

**[0054]** Table 3 lists the mechanic property parameters of the enamel steels in Examples A1-A6 and Comparative Example B1 of the present case respectively at room temperature and under the condition of heat preservation at 830°C.

Table 3.

| Serial number | Mechanical property at room temperature |                  |             |                       |                              | Mechanical property after heat preservation at 830°C for 10 min |                  |             |
|---------------|-----------------------------------------|------------------|-------------|-----------------------|------------------------------|-----------------------------------------------------------------|------------------|-------------|
|               | $R_{eL}/\text{MPa}$                     | $R_m/\text{MPa}$ | $A_{80}/\%$ | Hole expansion rate/% | Hydrogen permeation time/min | $R_{eL}/\text{MPa}$                                             | $R_m/\text{MPa}$ | $A_{80}/\%$ |
| A1            | 259                                     | 344              | 40          | 71                    | 15                           | 361                                                             | 426              | 41          |
| A2            | 241                                     | 335              | 42          | 80                    | 14                           | 371                                                             | 429              | 43          |
| A3            | 265                                     | 360              | 39          | 70                    | 16                           | 390                                                             | 448              | 44.5        |
| A4            | 197                                     | 315              | 43.5        | 72                    | 12                           | 315                                                             | 420              | 43          |
| A5            | 220                                     | 321              | 42          | 75                    | 22                           | 335                                                             | 412              | 40          |
| A6            | 235                                     | 330              | 44          | 75                    | 20                           | 375                                                             | 430              | 41          |
| B1            | 194                                     | 322              | 38          | 48                    | 7                            | 180                                                             | 301              | 42          |

**[0055]** As can be seen from table 3, at room temperature, the yield strengths in Examples A1-A6 are all  $\geq 197$  MPa, the tensile strengths are all  $\geq 315$  MPa, the elongations  $A_{80}$  are  $\geq 39\%$ , the hole expansion rates are  $\geq 70\%$ , and the hydrogen permeation times are  $\geq 12$  min; and, under the condition of heat preservation at 830°C, the yield strengths in Examples A1-A6 are improved to  $\geq 315$  MPa, the tensile strengths are all  $\geq 412$  MPa, and the elongations  $A_{80}$  are  $\geq 40\%$ ; it can be indicated therefrom that, not only the enamel steel of the present invention has a higher elongation, a longer hydrogen permeation time, and a higher hole expansion rate, but also both the yield strengths and tensile strengths in all the examples after heat preservation at 830°C for 10 min are substantially improved, which indicates that the enamel steel involved in this technical solution has a good high-temperature baking hardenability, which is beneficial for significantly improving the pressure-resistance and service life of an enamel steel article.

**[0056]** The hydrogen penetration time of the enamel steel of the present invention is  $\geq 12$  min. Generally, when the hydrogen penetration time is  $\geq 8$  min, the steel plate can meet the requirements of fish-scaling resistance for double-side enamel, that is to say, whatever type of glaze is used in actual productions, and this type of steel plate can meet the requirements of fish-scaling resistance. Since the requirements of fish-scaling resistance for double-side enamel are more rigorous than those for single-side enamel, the enamel steel of the present invention can fully meet the requirements for single-side enamel.

**[0057]** Figure 1 shows tendency graph of yield strength of an enamel steel having a high-temperature baking hardenability of Example A1 in a condition of heat preservation at 830°C over time.

**[0058]** As shown in figure 1, under the condition of heat preservation at 830°C, when the enamel steel in Example A1 has not achieved the specified heat preservation time (about 10 min), the yield strength of the enamel steel in Example A1 increases over the heat preservation time; however, after the specified heat preservation time is reached, the yield strength decreases over the heat preservation time. Nevertheless, even though the preservation time under the condition of heat preservation at 830°C is longer, the yield strength is still significantly improved with respect to the yield strength under the condition of room temperature.

**[0059]** Figure 2 shows the microstructure of the enamel steel in Example A1, and figure 3 shows the picture of the morphology of the precipitated phase in the enamel steel.

**[0060]** As shown in figures 2 and 3, the microstructure of the enamel steel in Example A1 is a uniform ferrite structure, wherein no pearlite structure and larger size cementite particles can be seen, the precipitated phase is in a fine dispersed

distribution, mainly having titanium carbide or titanium carbonitride.

[0061] It should be noted that the examples listed above are only the specific examples of the present invention, and obviously the present invention is not limited to the above examples and can have many similar changes. All variations which can be directly derived from or associated with the disclosure of the invention by those skilled in the art should be within the scope of protection of the present invention.

## Claims

1. An enamel steel having a high-temperature baking hardenability, the chemical elements thereof, in mass percentage, being:

C: 0.008-0.020%,

Mn: 0.05-0.50%,

S: 0.021-0.035%,

Al: 0.005-0.050% or Al<sub>S</sub>: 0.003-0.045%,

P: ≤0.035%,

Si: ≤0.10%,

0<N<0.003%,

0<O≤0.010%,

element Ti in a mass percentage meeting  $N \times Ti \leq 3 \times 10^{-4}$ ,  $S \times Ti \geq 2 \times 10^{-3}$  and  $Ti \geq 3.43N + 1.5S + 0.02$ , and at least one of  $0 < Cu \leq 0.10\%$ ,  $0 < Cr \leq 0.10\%$ ,  $0 < Ni \leq 0.10\%$ ,  $0 < Mo \leq 0.10\%$ ,  $0 < Nb \leq 0.010\%$ ,  $0 < V \leq 0.020\%$ , and  $0 < B \leq 0.0005\%$ , with  $0.05\% \leq 5 \times Nb + Cu + V + Ni + Cr + Mo + 10 \times B \leq 0.20\%$ ; and the balance being Fe and inevitable impurity elements.

2. The enamel steel having a high-temperature baking hardenability of claim 1, **characterized in that** said element C is present in a dispersed carbide form.

3. The enamel steel having a high-temperature baking hardenability of claim 2, **characterized in that** said carbide is cementite and finely granulated titanium carbide and titanium carbonitride.

4. The enamel steel having a high-temperature baking hardenability of claim 3, **characterized in that** the grain size of said titanium carbide and titanium carbonitride particles is 10-30 μm.

5. The enamel steel having a high-temperature baking hardenability of claim 1, **characterized by** further comprising  $0 < Cu \leq 0.10\%$ ,  $0 < Cr \leq 0.10\%$ ,  $0 < Ni \leq 0.10\%$ , and  $0 < Mo \leq 0.10\%$ .

6. The enamel steel having a high-temperature baking hardenability of claim 5, **characterized by** further comprising  $0 < Nb \leq 0.010\%$ ,  $0 < V \leq 0.020\%$ , and  $0 < B \leq 0.0005\%$ .

7. The enamel steel having a high-temperature baking hardenability of claim 1, **characterized in that** the content of said element C is 0.015-0.020%.

8. The enamel steel having a high-temperature baking hardenability of claim 1, **characterized in that** the content of said element S is 0.021-0.030%.

9. The enamel steel having a high-temperature baking hardenability of claim 1, **characterized in that** the content of said element Mn is 0.1-0.3%.

10. A method for manufacturing the enamel steel having a high-temperature baking hardenability of any one of claims 1-9, **characterized by** comprising the steps of: a liquid iron pretreatment → smelting with a converter → refining → continuous casting → hot rolling.

11. The method for manufacturing the enamel steel having a high-temperature baking hardenability of claim 10, **characterized by** further comprising the steps of: acid pickling → cold rolling → annealing → temper rolling, after said hot rolling step.

12. The method for manufacturing the enamel steel having a high-temperature baking hardenability of claim 11, **char-**

acterized in that in said cold rolling step, the overall reduction ratio is controlled at greater than 70%.

13. The method for manufacturing the enamel steel having a high-temperature baking hardenability of claim 11, **characterized in that** in said annealing step, the annealing temperature is 650-800°C.

14. The method for manufacturing the enamel steel having a high-temperature baking hardenability of claim 10, **characterized in that** in said hot rolling step, the heating temperature is 1100-1250°C, and the heating time is  $\geq$  plate thickness  $\times$  1 min/mm, wherein the unit of the plate thickness is mm.

15. The method for manufacturing the enamel steel having a high-temperature baking hardenability of claim 10, **characterized in that** in said hot rolling step, the final rolling temperature for the hot rolling is 850-930°C, and the coiling temperature for the hot rolling is 630-780°C.

## Patentansprüche

1. Emailliestahl mit Hochtemperatureinbrennhärtbarkeit, die chemischen Elemente dazu, in Massenprozent, sind:

C: 0,008-0,020 %,

Mn: 0,05-0,50 %,

S: 0,021-0,035 %,

Alt: 0,005-0,050 % oder  $Al_2S_3$ : 0,003-0,045 %,

P:  $\leq$  0,035 %,

Si:  $\leq$  0,10 %,

$0 < N < 0,003$  %,

$0 < O \leq 0,010$  %,

Element Ti in einem Massenprozenttreffen mit  $N \times Ti \leq 3 \times 10^{-4}$ ,  $S \times Ti \geq 2 \times 10^{-3}$  und  $Ti \geq 3,43 N + 1,5 S + 0,02$ , und

zumindest eines von  $0 < Cu \leq 0,10$  %,  $0 < Ni \leq 0,10$  %,  $0 < Mo \leq 0,10$  %,  $0 < Nb \leq 0,010$  %,  $0 < V \leq 0,020$  %, und  $0 < B \leq 0,0005$  %, mit  $0,05 \% \leq 5 \times Nb + Cu + V + Ni + Cr + Mo + 10 \times B \leq 0,20$  %; und wobei der Rest Fe und unvermeidbare Verunreinigungen sind.

2. Emailliestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 1, **dadurch gekennzeichnet, dass** genanntes Element C in einer dispergierten Karbidform vorliegt.

3. Emailliestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 1, **dadurch gekennzeichnet, dass** genanntes Karbid aus Zementit und feinkörnigem Titankarbid und Titancarbonitrid besteht.

4. Emailliestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 3, **dadurch gekennzeichnet, dass** die Körnergröße des genannten Titankarbids und der genannten Titancarbonitrid-Partikel bei 10-30  $\mu m$  liegt.

5. Emailliestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 1, **gekennzeichnet durch** ferneres Aufweisen von  $0 < Cu \leq 0,10$  %,  $0 < Cr \leq 0,10$  %,  $0 < Ni \leq 0,10$  % und  $0 < Mo \leq 0,10$  %.

6. Emailliestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 5, **gekennzeichnet durch** ferneres Aufweisen von  $0 < Nb \leq 0,010$  %,  $0 < V \leq 0,020$  %, und  $0 < B \leq 0,0005$  %.

7. Emailliestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 1, **dadurch gekennzeichnet, dass** der Gehalt von genanntem Element C bei 0,015-0,020 % liegt.

8. Emailliestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 1, **dadurch gekennzeichnet, dass** der Gehalt von genanntem Element S bei 0,021-0,030 % liegt.

9. Emailliestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 1, **dadurch gekennzeichnet, dass** der Gehalt von genanntem Element Mn bei 0,1-0,3 % liegt.

10. Herstellungsverfahren für den Emailliestahl mit Hochtemperatureinbrennhärtbarkeit nach einem der Ansprüche 1-9, **gekennzeichnet durch** Aufweisen der Schritte: eine Vorbehandlung von flüssigem Eisen  $\rightarrow$  Einschmelzen mit

einem Konverter → Raffinieren → stetiges Gießen → Heißwalzen.

11. Herstellungsverfahren für den Emaillestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 10, **gekennzeichnet durch** ferneres Aufweisen der Schritte: Säurebeizen → Kaltwalzen → Wärmebehandlung → Nachwalzen, nach genanntem Heißwalz-Schritt.
12. Herstellungsverfahren für den Emaillestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 11, **dadurch gekennzeichnet, dass** in genanntem Kaltwalz-Schritt das gesamte Übersetzungsverhältnis bei mehr als 70 % gesteuert wird.
13. Herstellungsverfahren für den Emaillestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 11, **dadurch gekennzeichnet, dass** in genanntem Wärmebehandlungs-Schritt die Wärmebehandlungstemperatur bei 650-800°C liegt.
14. Herstellungsverfahren für den Emaillestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 10, **dadurch gekennzeichnet, dass** in genanntem Heißwalz-Schritt die Erhitzungstemperatur bei 1100-1250°C liegt, und die Erhitzungszeit  $\geq$  Plattendichte  $\times$  1 min/mm, wobei die Einheit der Plattendichte mm ist.
15. Herstellungsverfahren für den Emaillestahl mit Hochtemperatureinbrennhärtbarkeit nach Anspruch 10, **dadurch gekennzeichnet, dass** in genanntem Heißwalz-Schritt die endgültige Walztemperatur für das Heißwalzen bei 850-930°C liegt, und die Haspeltemperatur für das Heißwalzen bei 630-780°C liegt.

## Revendications

1. Acier émaillé ayant une trempabilité à la cuisson à haute température, les éléments chimiques de celui-ci, en pourcentage en masse, étant :
  - C : 0,008 à 0,020 %,
  - Mn : 0,05 à 0,50 %,
  - S : 0,021 à 0,035 %,
  - Al : 0,005 à 0,050 % ou Als : 0,003 à 0,045 %,
  - P :  $\leq$  0,035 %,
  - Si :  $\leq$  0,10 %,
  - 0 < N < 0,003 %,
  - 0 < O  $\leq$  0,010 %,
  - l'élément Ti selon un pourcentage en masse satisfaisant à  $N \times Ti \leq 3 \times 10^{-4}$ ,  $S \times Ti \geq 2 \times 10^{-3}$  et  $Ti \geq 3,43 N + 1,5 S + 0,02$ , et
  - au moins l'un parmi 0 < Cu  $\leq$  0,10 %, 0 < Cr  $\leq$  0,10 %, 0 < Ni  $\leq$  0,10 %, 0 < Mo  $\leq$  0,10 %, 0 < Nb  $\leq$  0,010 %, 0 < V  $\leq$  0,020 % et 0 < B  $\leq$  0,0005 %, avec  $0,05 \% \leq 5 \times Nb + Cu + V + Ni + Cr + Mo + 10 \times B \leq 0,20 \%$  ; et
  - le reste étant Fe et des éléments d'impureté inévitables.
2. Acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 1, **caractérisé en ce que** ledit élément C est présent sous forme de carbure dispersé.
3. Acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 2, **caractérisé en ce que** ledit carbure est de la cémentite et du carbure de titane et du carbonitride de titane finement granulés.
4. Acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 3, **caractérisé en ce que** la taille de grain desdites particules de carbure de titane et de carbonitride de titane est de 10 à 30  $\mu$ m.
5. Acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 1, **caractérisé en ce qu'il** comprend en outre 0 < Cu  $\leq$  0,10 %, 0 < Cr  $\leq$  0,10 %, 0 < Ni  $\leq$  0,10 %, et 0 < Mo  $\leq$  0,10 %.
6. Acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 5, **caractérisé en ce qu'il** comprend en outre 0 < Nb  $\leq$  0,010 %, 0 < V  $\leq$  0,020 %, et 0 < B  $\leq$  0,0005 %.
7. Acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 1, **caractérisé en ce**

que la teneur en ledit élément C est de 0,015 à 0,020 %.

8. Acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 1, **caractérisé en ce que** la teneur en ledit élément S est de 0,021 à 0,030 %.

9. Acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 1, **caractérisé en ce que** la teneur en ledit élément Mn est de 0,1 à 0,3 %.

10. Procédé de fabrication de l'acier émaillé ayant une trempabilité à la cuisson à haute température selon l'une quelconque des revendications 1 à 9, **caractérisé en ce qu'il** comprend les étapes suivantes : un prétraitement de fer liquide → fusion à l'aide d'un convertisseur → affinage → coulée continue → laminage à chaud.

11. Procédé de fabrication de l'acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 10, **caractérisé en ce qu'il** comprend en outre les étapes suivantes : décapage à l'acide → laminage à froid → recuit → laminage de détente, après ledit laminage à chaud.

12. Procédé de fabrication de l'acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 11, **caractérisé en ce que** lors de ladite étape de laminage à froid, le taux de réduction global est commandé à plus de 70 %.

13. Procédé de fabrication de l'acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 11, **caractérisé en ce que** lors de ladite étape de recuit, la température de recuit est comprise entre 650 et 800 °C.

14. Procédé de fabrication de l'acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 10, **caractérisé en ce que** lors de ladite étape de laminage à chaud, la température de chauffage est de 1 100 à 1 250 °C, et la durée de chauffage est  $\geq$  à l'épaisseur de la plaque x 1 min/mm, l'unité de l'épaisseur de plaque étant le mm.

15. Procédé de fabrication de l'acier émaillé ayant une trempabilité à la cuisson à haute température selon la revendication 10, **caractérisé en ce que** lors de ladite étape de laminage à chaud, la température de laminage finale pour le laminage à chaud est de 850 à 930 °C, et la température d'enroulement pour le laminage à chaud est de 630 à 780 °C.

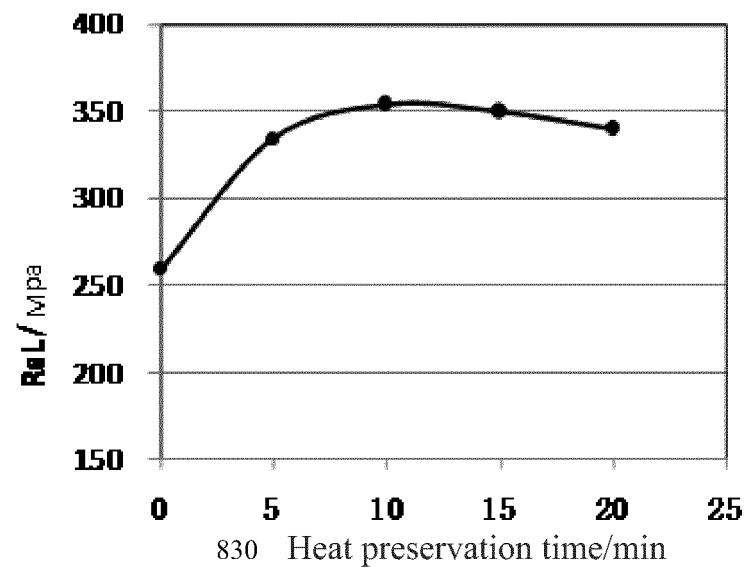


Fig. 1

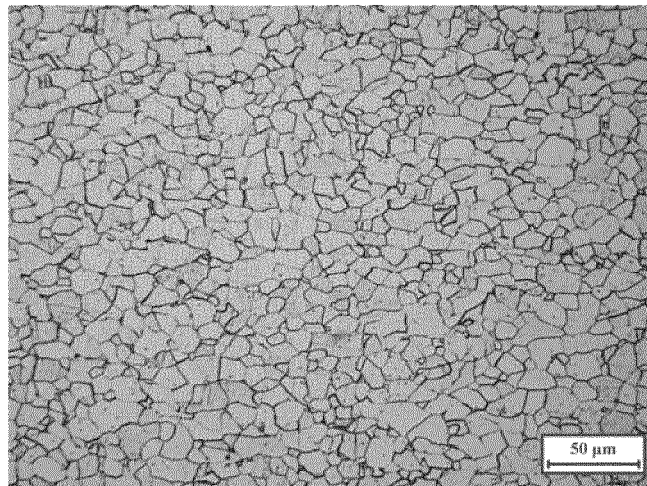


Fig. 2

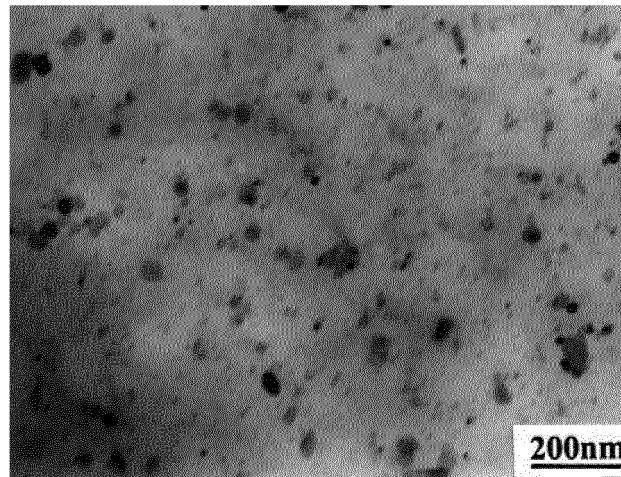


Fig. 3

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- CN 1966753 A [0005]
- CN 101684532 A [0006]
- WO 0012773 A [0006]
- CN 101586210 A [0007]