



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

RETARDED INTAKE CAM PHASER TO IMPROVE ENGINE START/STOP QUALITY

CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application claims the benefit of United States Provisional Application No.61/953/260 filed March 14, 2014.

TECHNICAL FIELD

10 The field to which the disclosure generally relates to include stop/start systems.

BACKGROUND

A vehicle may include a stop/start system.

15 SUMMARY OF ILLUSTRATIVE VARIATIONS

One variation may include a method comprising controlling the combustion phase timing in the first firing cycle of a start/stop combustion engine comprising: providing a camshaft operatively connected to an extended range intake cam phaser; fully or partially retarding the extended
20 range intake cam phaser during an engine restart to control a position of the camshaft and prevent pre-ignition; and retarding a spark timing in the first firing cycle to delay the combustion phase timing to improve noise, vibration and harshness (NVH).

Other illustrative variations within the scope of the invention will
25 become apparent from the detailed description provided hereinafter. It should be understood that the detailed description and specific examples, while disclosing variations within the scope of the invention, are intended for purposes of illustration only and are not intended to limit the scope of the invention.

30 BRIEF DESCRIPTION OF THE DRAWINGS

Select examples of variations within the scope of the invention will become more fully understood from the detailed description and the accompanying drawings, wherein:

FIG. 1 illustrates a combustion engine piston system according to a number of variations.

FIG. 2 illustrates various effective compression ratios (ECR) resulting from different cam phaser positions according to a number of variations.

5 FIG. 3 illustrates an extended range intake cam phaser according to a number of variations.

DETAILED DESCRIPTION OF ILLUSTRATIVE VARIATIONS

10

The following description of the variations is merely illustrative in nature and is in no way intended to limit the scope of the invention, its application, or uses.

15 In a number of variations, any number of combustion engines including, but not limited to, a port-fuel injection engine or a gasoline direct injection engine may include a stop/start system. A start/stop system may automatically shut down and/or restart an engine which may decrease the time the engine may be idling which may improve a vehicle's fuel economy and reduce emissions coming from the vehicle.

20 In a number of variations, a start/stop system may automatically shut off the engine depending on any of a number of vehicle conditions including, but not limited to, the battery State of Charge (SOC), the engine coolant temperature, the brake pressure reaching a certain point, and/or when a certain steering wheel angle occurs. The engine may restart once a driver
25 begins to release the brake pedal. In a number of variations, an engine restart may also occur as a result of a condition not initiated by the driver including, but not limited to, low battery State of Charge and/or A/C or heating demand.

30 Referring to FIG. 1, in a number of variations, an engine may include one or more pistons 20 which may each be located inside of a cylinder 22. The pistons 20 may be attached to a crankshaft 24 by a connecting rod 26. The crankshaft 24 may cause the piston 20 to move upward and downward inside of the cylinder 22. An intake valve 28 and an exhaust valve 30 may be located at the top of the cylinder 22. The intake valve 28 may allow air/fuel to

enter into the cylinder 22 while the exhaust valve 30 may allow exhaust to exit the cylinder 22. A camshaft 32 may be located above each of the intake valve 28 and the exhaust valve 30 and may include a plurality of lobes or cams 34 which may open the intake valve 28 or the exhaust valve 30 as the camshaft 32 rotates. A spark plug 36 may be located at the top of each of the cylinders 22. The spark plug 36 may provide a spark that may ignite an air/fuel mixture so that combustion may occur.

An extended range intake cam phaser 38 may be used to rotate the position of the camshaft 32 in relation to a vehicle's timing chain. An extended range intake cam phaser 38 may include a range of 70 to 80 crank angle degrees which is 20 – 30 degrees greater than a standard cam phaser, which includes a range of 50 crank angle degrees. In a number of variations, an extended range intake cam phaser 38 may include an outer sprocket 40 and an inner rotor 42. The outer sprocket 40 may be operatively connected to the timing chain (not illustrated) while the inner rotor 42 may be operatively connected to the camshaft 32. The extended range intake cam phaser 38 may be used to advanced or retard the timing of the camshaft 32 which may vary the timing of the opening and/or closing of the valves 28, 20 by adjusting the rotation angle of the camshaft 32. Any number of extended range intake cam phasers 38 known to those skilled in the art may be used to selectively change the angle of the camshaft having a range of 70 to 80 crank angle degrees including, but not limited to, a dual park extended range cam phaser.

Referring to FIG. 3, a dual park extended range cam phaser 38 may allow the selection of two distinct cam positions which may each be used for a specific engine starting condition. This may allow the autostart to occur when the extended range intake cam phaser 38 is in a fully or partially retarded position for a warm restart of the engine or a default mid-locking position for a conventional cold start of the engine.

In a number of variations, an engine may go through one or more cycles. In an engine cycle, a piston 20 may begin at the top of the cylinder 22, the camshaft 32 may rotate which may cause the cam 34 to open the intake valve 28 to open while the piston 20 may move downward which may allow air/fuel to enter and fill the cylinder 22. This may be called the intake stroke. The piston 20 may then move back upward which may compress the

air/fuel. The combustion process may occur as the piston 20 approaches top dead center, or the top of its stroke, and the spark plug 36 may provide a spark which may ignite the fuel. The fuel charge in the cylinder 22 may burn which may cause the piston 20 to move back downward. As the piston 20
5 reaches bottom dead center, or the bottom of its stroke, rotation of the cam 34 on the camshaft 32 may cause the exhaust valve 30 to open which may allow exhaust to exit from the cylinder 22. This cycle may then be repeated.

In a number of variations, combustion may start before the spark is discharged. This may be known as pre-ignition. With a stop/start vehicle, the
10 engine may be turned off for a short period of time and when the driver attempts to restart, for example by releasing the brake pedal, the first combustion cycle may pre-ignite. This may cause noise, vibration, and/or harshness (NVH) of the vehicle.

In a number of variations, spark timing may be used to control the
15 combustion process in a stop/start vehicle. The relationship of combustion to where the piston 20 is at in the cylinder 22 may be known as combustion phasing. In a number of variations, the spark timing may be delayed which may "retard" the combustion phase timing to later in the cycle which may reduce and/or eliminate auto-ignition which may reduce NVH of the vehicle.

20 In a number of variations, a compression ratio of a combustion engine may be the ratio of the maximum volume in the cylinder 22 to the minimum volume in the cylinder 22. The engine stop/start quality may be improved as the compression ratio is lowered. During an engine restart event, a standard intake cam phaser including a range of 50 crank angle degrees, may be in a
25 fully retarded position and may include an effective compression ratio (ECR) at 6.0 or higher, for example as illustrated in FIG. 2. With the standard intake cam phaser, when an engine is warmed up, a spark may occur anywhere between 2 degrees before top dead center to 22 degrees after top dead center which may result in pre-ignition.

30 In a number of variations, an extended range intake cam phaser 38, for example as illustrated in FIGS. 1 and 3, may be used to retard the intake cam timing which may prevent and/or reduce pre-ignition from occurring in the first cycle which may allow spark retard leading to reduced vibration, noise, and harness (NVH) levels in the vehicle.

In a number of variations, retarding the extended range intake cam phaser 38 an additional 20-30 degrees further than a standard range intake cam phaser may allow the position of the camshaft 32 to be controlled which may allow the closing of the intake valve 28 to be delayed which may reduce the compression ratio. In one variation, retarding the extended range intake cam phaser 38 an additional 20 degrees further than a standard cam phaser may result in a compression ratio of 4.3, while retarding an additional 30 degrees further than a standard cam phaser may result in a compression ratio of 3.5, for example as illustrated in FIG. 2. Retarding the extended range intake cam phaser 38 an additional 20-30 degrees further than a standard intake cam phaser may allow the spark timing to be retarded in the first cylinder up to 22 degrees after top dead center which may prevent and/or reduce pre-ignition.

The following description of variants is only illustrative of components, elements, acts, products and methods considered to be within the scope of the invention and are not in any way intended to limit such scope by what is specifically disclosed or not expressly set forth. The components, elements, acts, products and methods as described herein may be combined and rearranged other than as expressly described herein and still are considered to be within the scope of the invention.

Variation 1 may include a method comprising: controlling the combustion phase timing in a first firing cycle of a stop/start combustion engine comprising: providing a camshaft operatively connected to an extended range intake cam phaser; fully or partially retarding the extended range intake cam phaser during an engine restart to control a position of the camshaft and prevent pre-ignition; and retarding a spark timing in the first cycle to delay a combustion phase timing to improve NVH.

Variation 2 may include a method as set forth in Variation 1 wherein the engine restart is a warm restart.

Variation 3 may include a method as set forth in any of Variations 1-2 wherein the extended range intake cam phaser comprises a range of 70 crank angle degrees.

Variation 4 may include a method as set forth in any of Variations 1-2 wherein the extended range intake cam phaser comprises a range of 80 crank angle degrees.

5 Variation 5 may include a method as set forth in any of Variations 1-4 wherein fully or partially retarding the extended range intake cam phaser delays the closing of an intake valve to prevent pre-ignition.

Variation 6 may include a method as set forth in any of Variations 1-5 wherein the spark timing is retarded up to 22 degrees after a piston reaches a top dead center position to improve NVH.

10 Variation 7 may include a method as set forth in any of Variations 1-6 wherein the extended range intake cam phaser is a dual park phaser.

Variation 8 may include a method as set forth in Variation 7 wherein the dual park phaser allows the selection of a first cam position and a second cam position; and wherein the first cam position is used for a warm start engine condition and wherein the second cam position is used for a cold start engine condition.

20 Variation 9 may include a method comprising: eliminating pre-ignition of a first combustion cycle during warm restart of a stop/start vehicle comprising: providing a camshaft operatively connected to an extended range intake cam phaser; fully or partially retarding the extended range intake cam phaser during a warm engine restart to control a position of the camshaft to delay a closing of an intake valve to prevent pre-ignition; and retarding the spark timing of a spark plug to improve NVH.

25 Variation 10 may include a method as set forth in Variation 9 wherein the extended range intake cam phaser comprises a range of 70 – 80 crank angle degrees.

Variation 11 may include a method as set forth in Variation 9 wherein the spark timing is retarded up to 22 degrees after a piston reaches a top dead center position.

30 Variation 12 may include a method as set forth in any of Variations 9-10 wherein the extended range intake cam phaser allows the selection of a first cam position and a second cam position; and wherein the first cam position is used for a warm start engine condition and wherein the second cam position is used for a cold start engine condition.

Variation 13 may include a method comprising: improving a port-fuel injection engine stop/start system comprising: eliminating pre-ignition of a first combustion cycle during warm restart comprising: providing a camshaft operatively connected to an extended range intake cam phaser having a range of 70 crank angle degrees to 80 crank angle degrees and fully retarding a timing of the extended range intake cam phaser during a warm restart of an engine to control a position of a camshaft; and retarding a spark timing in a first firing cycle up to 22 degrees after top dead center.

Variation 14 may include a product comprising: a start/stop vehicle combustion engine comprising: a camshaft; an extended range intake cam phaser operatively connected to the camshaft, wherein the extended range intake cam phaser comprises a range of 70 to 80 crank angle degrees and wherein when the extended range intake cam phaser is fully or partially retarded during a warm engine restart, the closing of an intake valve is delayed so that a spark timing is effective in controlling combustion in a first firing cycle with no pre-ignition.

Variation 15 may include a product as set forth in Variation 14 wherein the extended range intake cam phaser comprises a first cam position and a second cam position; and wherein the first cam position is used for a warm start engine condition and wherein the second cam position is used for a cold start engine condition.

Variation 16 may include a product as set forth in any of Variations 14-15 wherein the extended range intake cam phaser is a dual park phaser.

The above description of select variations within the scope of the invention is merely illustrative in nature and, thus, variations or variants thereof are not to be regarded as a departure from the spirit and scope of the invention.

CLAIMS

What is claimed is:

1. A method comprising:
5 controlling the combustion phase timing in a first firing cycle of a stop/start combustion engine comprising:
providing a camshaft operatively connected to an extended range intake cam phaser;
fully or partially retarding the extended range intake cam phaser
10 during an engine restart to control a position of the camshaft and prevent pre-ignition; and
retarding a spark timing in the first firing cycle to delay the combustion phase timing to improve NVH.
- 15 2. The method of claim 1 wherein the engine restart is a warm restart.
3. The method of claim 1 wherein the extended range intake cam phaser comprises a range of 70 crank angle degrees.
20
4. The method of claim 1 wherein the extended range intake cam phaser comprises a range of 80 crank angle degrees.
5. The method of claim 1 wherein fully or partially retarding the
25 extended range intake cam phaser delays the closing of an intake valve to prevent pre-ignition.
6. The method of claim 1 wherein the spark timing is retarded up to
30 22 degrees after a piston reaches a top dead center position to improve NVH.
7. The method of claim 1 wherein the extended range intake cam phaser is a dual park phaser.

8. The method of claim 7 wherein the dual park phaser allows the selection of a first cam position and a second cam position; and

wherein the first cam position is used for a warm start engine condition and wherein the second cam position is used for a cold start engine

5 condition.

9. A method comprising:

eliminating pre-ignition of a first combustion cycle during warm restart of a stop/start vehicle comprising:

10 providing a camshaft operatively connected to an extended range intake cam phaser;

fully or partially retarding the extended range intake cam phaser during a warm engine restart to control a position of the camshaft to delay a closing of an intake valve and to prevent pre-ignition; and

15 retarding the spark timing of a spark plug to improve NVH.

10. The method of claim 9 wherein the extended range intake cam phaser comprises a range of 70 – 80 crank angle degrees.

20 11. The method of claim 9 wherein the spark timing is retarded up to 22 degrees after a piston reaches a top dead center position.

12. The method of claim 9 wherein the extended range intake cam phaser allows the selection of a first cam position and a second cam position;

25 and

wherein the first cam position is used for a warm start engine condition and wherein the second cam position is used for a cold start engine condition.

30 13. A method comprising:

improving a port-fuel injection engine stop/start system comprising:

eliminating pre-ignition of a first combustion cycle during warm restart comprising:

providing a camshaft operatively connected to an extended range intake cam phaser having a range of 70 crank angle degrees to 80 crank angle degrees and fully retarding a timing of the extended range intake cam phaser during a warm restart of an engine to control a position of a camshaft; and

retarding a spark timing in a first firing cycle up to 22 degrees after top dead center.

10

14. A product comprising:

a start/stop vehicle combustion engine comprising:

a camshaft;

an extended range intake cam phaser operatively connected to the camshaft, wherein the extended range intake cam phaser comprises a range of 70 to 80 crank angle degrees and wherein when the extended range intake cam phaser is fully or partially retarded during a warm engine restart, the closing of an intake valve is delayed so that a spark timing is effective in controlling combustion in a first firing cycle with no pre-ignition.

20

15. The product of claim 14 wherein the extended range intake cam phaser comprises a first cam position and a second cam position; and

wherein the first cam position is used for a warm start engine condition and wherein the second cam position is used for a cold start engine condition.

25

16. The product of claim 14 wherein the extended range intake cam phaser is a dual park phaser.

30

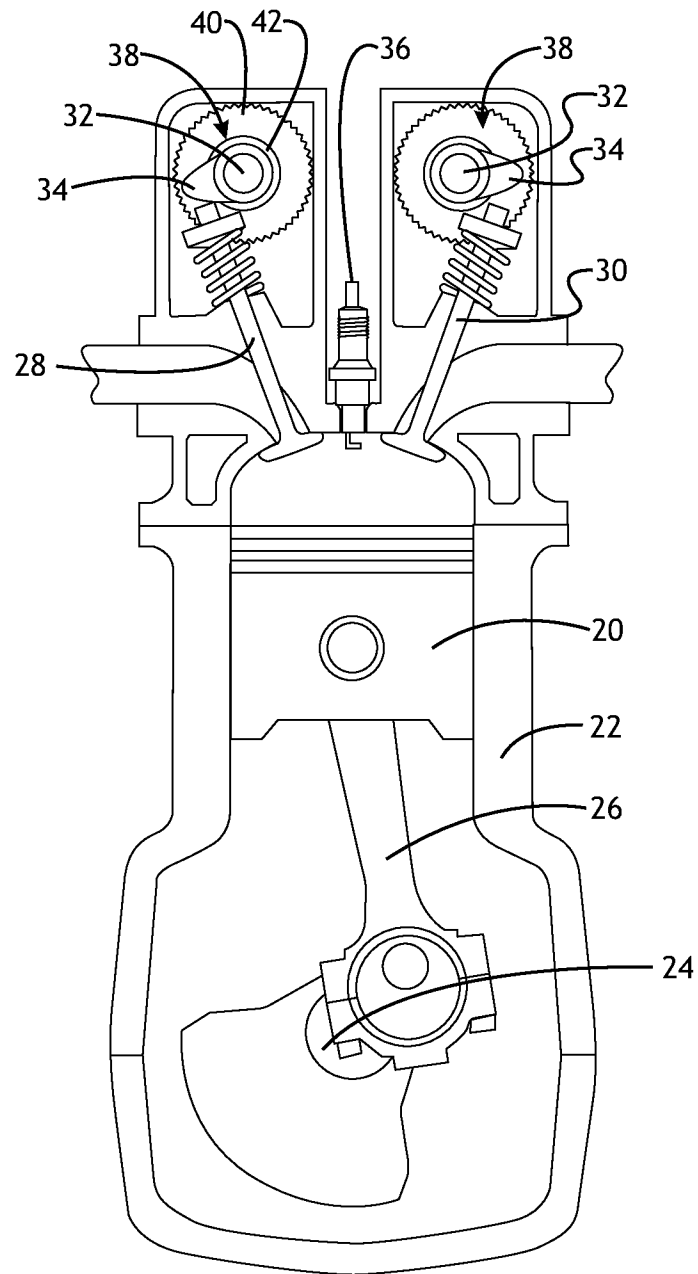


Fig.1

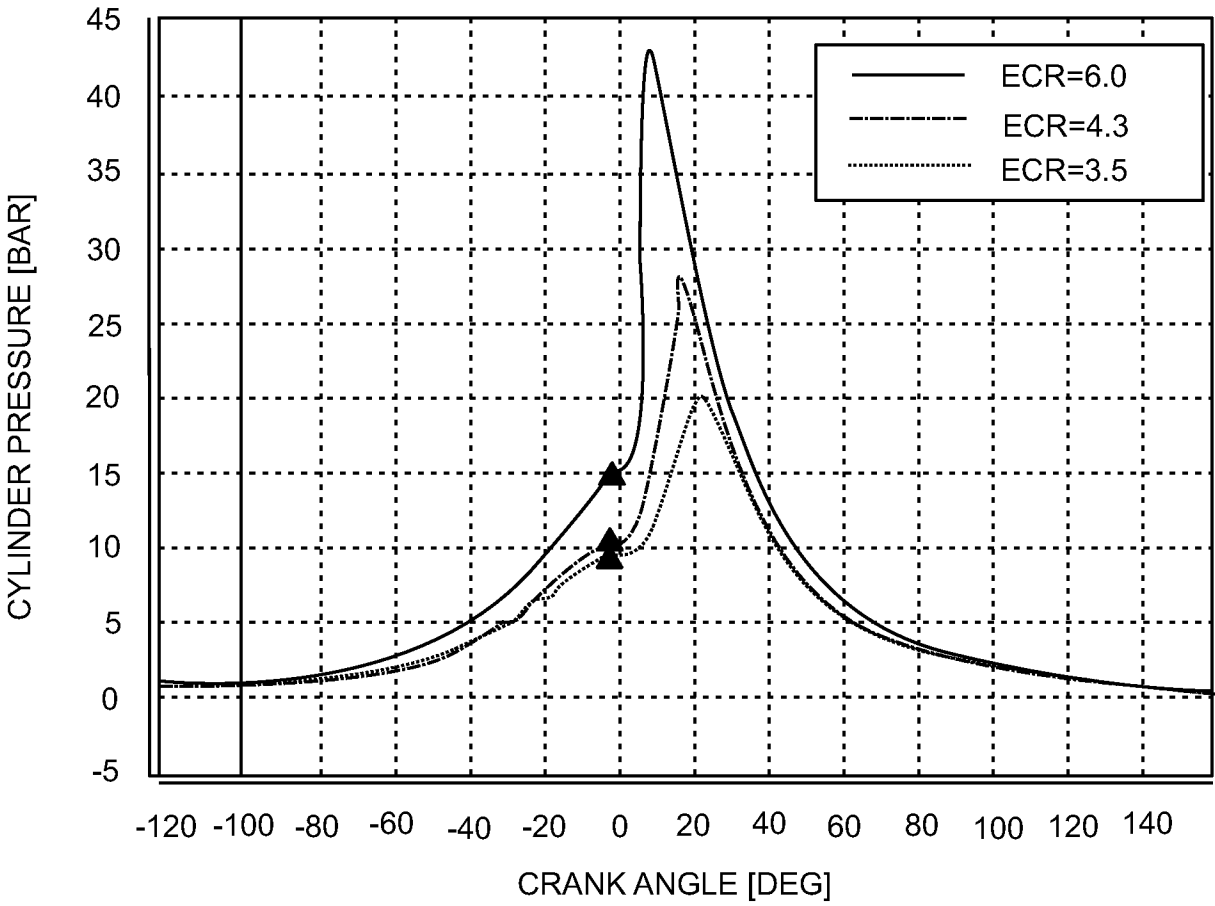


Fig.2

3/3

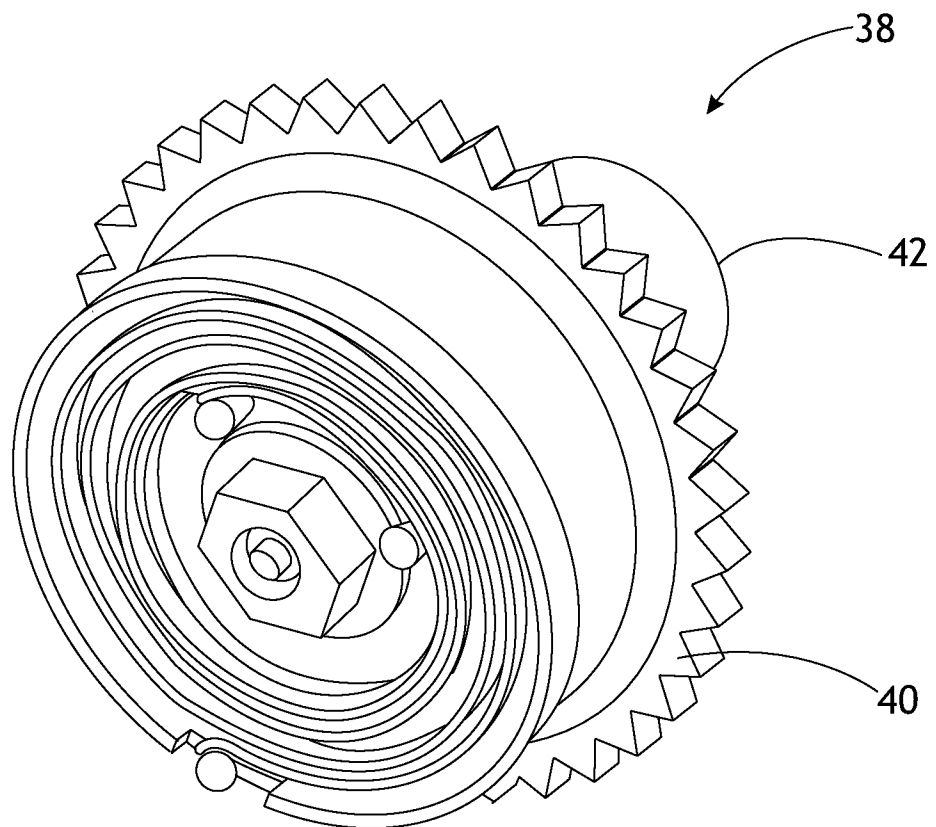


Fig.3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/018389**A. CLASSIFICATION OF SUBJECT MATTER****F01L 1/34(2006.01)i, F01L 1/344(2006.01)i, F01L 1/04(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F01L 1/34; F02D 13/02; B60W 30/18; F02D 41/00; B60W 10/06; F02D 9/02; F02D 28/00; F01L 1/344; F01L 1/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: combustion phase timing, stop/start engine, intake cam phaser, retard, delay, pre-ignition, and spark timing

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2011-174434 A (HONDA MOTOR CO., LTD.) 08 September 2011 See abstract; paragraphs [0045], [0051]-[0052], [0067]-[0082]; and figures 1-8, 11-12.	1-16
Y	US 2012-0010792 A1 (NEDOREZOV et al.) 12 January 2012 See abstract; paragraph [0069]; claims 1, 3 and figures 2, 4.	1-16
A	US 8527120 B2 (MATTHEWS et al.) 03 September 2013 See abstract and claims 17, 19.	1-16
A	US 2012-0277983 A1 (MAKINO, TOMOKAZU) 01 November 2012 See abstract; claims 1-2; and figures 1, 3, 5.	1-16
A	US 2010-0211288 A1 (GIBSON et al.) 19 August 2010 See abstract; paragraphs [0046]-[0047]; and figures 3, 6.	1-16



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 June 2015 (17.06.2015)

Date of mailing of the international search report

18 June 2015 (18.06.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Dal Kyong

Telephone No. +82-42-481-5606



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/018389

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2011-174434 A	08/09/2011	None	
US 2012-0010792 A1	12/01/2012	US 2014-057756 A1 US 8574123 B2 US 8986163 B2	27/02/2014 05/11/2013 24/03/2015
US 8527120 B2	03/09/2013	CN 102259644 A CN 102259644 B DE 102010053562 A1 US 2011-0144838 A1	30/11/2011 28/05/2014 30/06/2011 16/06/2011
US 2012-0277983 A1	01/11/2012	DE 102011088371 A1 JP 2012-229675 A JP 5048856 B1	31/10/2012 22/11/2012 17/10/2012
US 2010-0211288 A1	19/08/2010	US 2013-124067 A1 US 8352153 B2 US 8682565 B2	16/05/2013 08/01/2013 25/03/2014