



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2017/12/22
(87) Date publication PCT/PCT Publication Date: 2018/06/28
(85) Entrée phase nationale/National Entry: 2019/06/20
(86) N° demande PCT/PCT Application No.: EP 2017/084529
(87) N° publication PCT/PCT Publication No.: 2018/115510
(30) Priorité/Priority: 2016/12/22 (FR1663133)

(51) Cl.Int./Int.Cl. *H01L 21/285* (2006.01),
H01L 21/768 (2006.01), *H01L 27/144* (2006.01),
H01L 23/485 (2006.01), *H01L 29/45* (2006.01)
(71) Demandeur/Applicant:
COMMISSARIAT A L'ENERGIE ATOMIQUE ET AUX
ENERGIES ALTERNATIVES, FR
(72) Inventeurs/Inventors:
GHEGIN, ELODIE, FR;
JANY, CHRISTOPHE, FR;
NEMOUCHI, FABRICE, FR;
RODRIGUEZ, PHILIPPE, FR;
SZELAG, BERTRAND, FR
(74) Agent: MARKS & CLERK

(54) Titre : PROCEDE DE REALISATION DE COMPOSANT COMPRENANT DES MATERIAUX III-V ET DES CONTACTS
COMPATIBLES DE FILIERE SILICIUM
(54) Title: PROCESS FOR PRODUCING A COMPONENT COMPRISING III-V MATERIALS AND CONTACTS
COMPATIBLE WITH SILICON PROCESS FLOWS

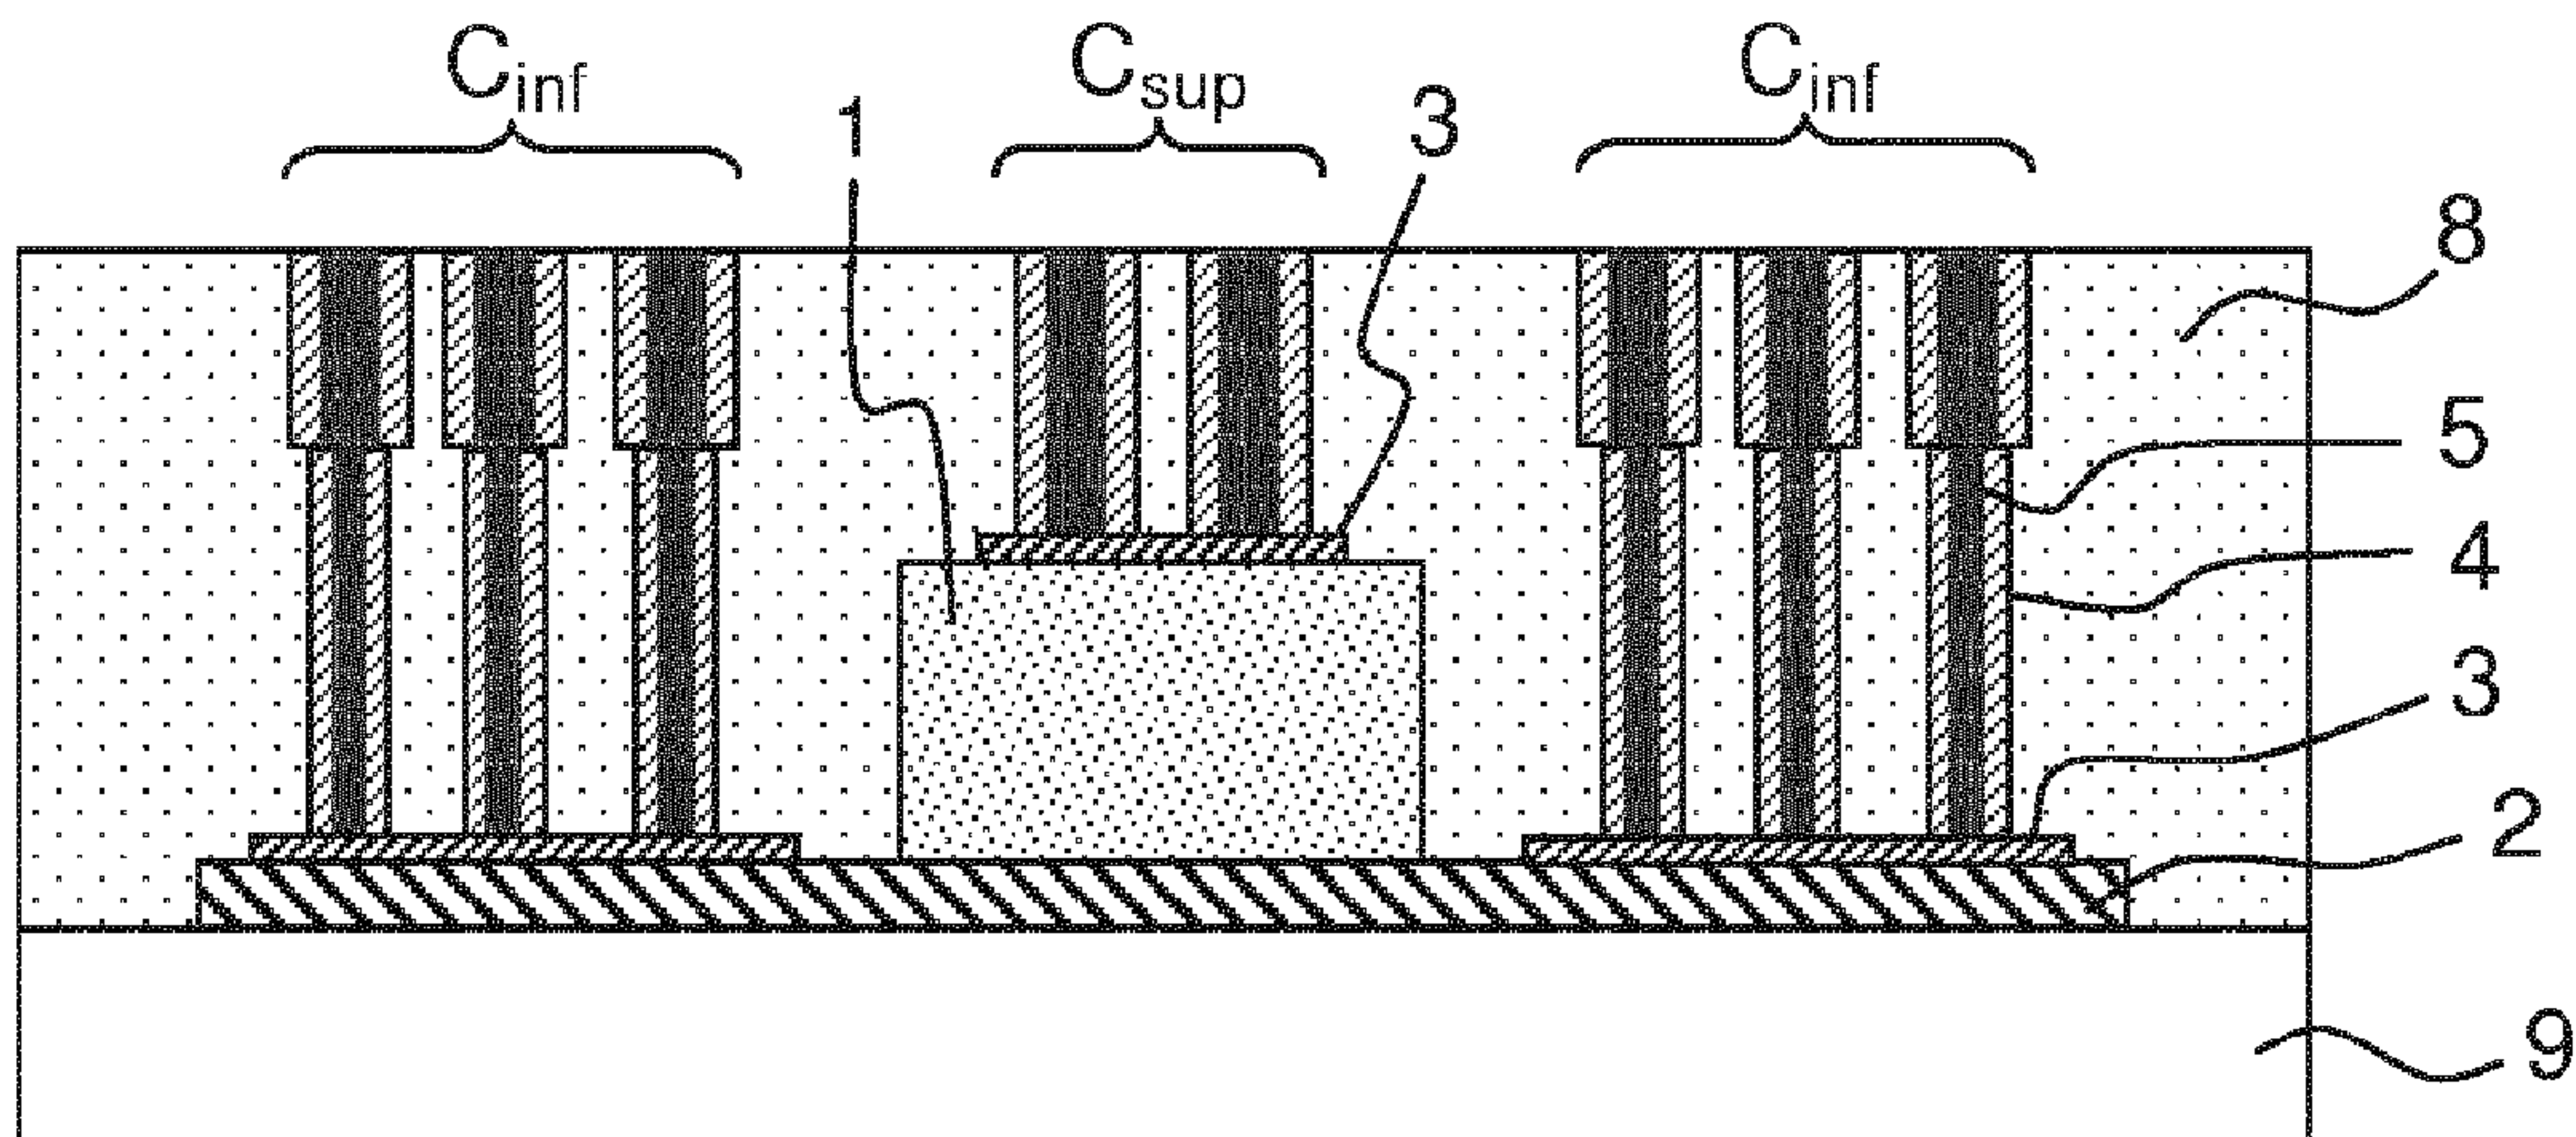


FIG.13o

(57) **Abrégé/Abstract:**

The invention relates to a process for producing a component comprising a structure made of III-V material(s) on the surface of a substrate, said structure comprising at least one upper contact level (N_{sup}) defined on the surface of a first III-V material (1) and a lower contact level (N_{inf}) defined on the surface of a second III-V material (2), including: successive operations of encapsulating said structure with at least one dielectric (8); producing primary apertures (O_{sp} ; O_{ip}) in a dielectric for both contacts; producing secondary apertures (O_{ss} ; O_{is}) in a dielectric for both contacts; at least partially filling said apertures with at least one metal so as to produce an upper-contact bottom metallisation and at least one upper-contact pad making contact with said metallisation for each of said contacts. Another subject of the invention is a component produced using said process. The component may be a laser diode.

ABSTRACT

The invention relates to a process for producing a component comprising a structure made of III-V material(s) on the surface of a substrate, said structure comprising at least one upper contact level ($\mathbf{N}_{sup}$) defined on the surface of a first III-V material (1) and a lower contact level ($\mathbf{N}_{inf}$) defined on the surface of a second III-V material (2), comprising:

- successive operations of encapsulation of said structure with at least one dielectric (8);
- making primary apertures ($\mathbf{O}_{sp}$; $\mathbf{O}_{ip}$) in a dielectric for the two contacts;
- making secondary apertures ($\mathbf{O}_{ss}$; $\mathbf{O}_{is}$) in a dielectric for the two contacts;
- at least partial filling of said apertures with at least one metallic material so as to produce upper contact bottom metallization and at least one upper contact pad in contact with said metallization for each of said contacts.

The invention also relates to a component produced by said process. The component may be a laser diode.

Process for producing a component comprising III-V materials and contacts compatible with silicon process flows

The field of the invention is that of the co-integration of III-V materials on a standard substrate such as silicon that can be produced on a silicon platform able to receive wafers with a minimum diameter of 100 mm.

5 The proposed co-integration comes within the framework of integration having a planarized "back-end" compatible with the silicon process flow of 100 mm or more.

The contacts currently integrated on III-V materials employ methods such as "lift-off" (the metal is deposited on the resin and the zones
10 of interest, and then the resin is dissolved, which removes the metal present above the resin, leaving the metal on the zones of interest) as well as a great many metals that are very expensive or are prohibited from silicon clean rooms as described in the article: A. Baca, F. Ren, J. Zolper, R. Briggs, and S. Pearton, "A survey of ohmic contacts to III-V compound semiconductors",
15 *Thin Solid Films*, Vol. 308-309, pp. 599-606, 1997, or in the article by G. Stareev, H. Kunzel, and G. Dortmann, "A controllable mechanism of forming extremely low-resistance nonalloyed ohmic contacts to group III-V compound semiconductors", *Journal of Applied Physics*, Vol. 74, No. 12, p. 7344, 1993.

Nonplanar integration of this kind does not open the way to the
20 production of several higher levels or to the co-integration of other objects. Miniaturization and densification of the components are thus limited.

Finally, multiplication of the number of layers present in the existing contacts (between 3 and 5) makes integration complex and nonoptimal. A typical example of nonplanar integration of contacts is given in
25 the references: B. Ben Bakir, C. Sciancalepore, A. Descos, H. Duprez, D. Bordel, L. Sanchez, C. Jany, K. Hassan, P. Brianceau, V. Carron, and S. Menezo, "Heterogeneously integrated III-V on silicon lasers", *Meeting Abstracts*, Vol. MA2014-02, No. 34, p. 1724, 2014 and H. Duprez, A. Descos, T. Ferrotti, J. Harduin, C. Jany, T. Card, A. Myko, L. Sanchez, C.
30 Sciancalepore, S. Menezo, and B. Ben Bakir, "Heterogeneously integrated III-V on silicon distributed feedback lasers at 1310 nm", in *Optical Fiber Communications Conference and Exhibition (OFC)*, 2015, pp. 1-3, March 2015.

Fig. 1 shows this type of configuration for the laser application with nonplanar connections consisting of noble metals for direct reworking on the III-V materials. On an n-doped InP substrate, a structure with an active region based on multiple quantum wells MQW is produced, on which a p-doped InP layer and a p-doped InGaAs layer will be stacked. Connections are produced via the n-Pad contact pads for connecting the n-doped substrate, making it possible to define a lower contact and connections via p-Pad contact pads for connecting the p-doped layer of InGaAs, allowing an upper contact to be defined.

10 In this context, the present invention proposes a process for making contacts on III-V materials notably compatible with the silicon process flow, thus allowing III-V materials/silicon co-integration on a platform processing wafers with a minimum diameter of 100 mm.

This invention thus opens the way to a finished product integrated in a silicon compatible clean room processing wafers of 100 mm or more, compact and having at least two levels of planar contacts produced simultaneously or sequentially.

More precisely, the present invention relates to a process for producing a component comprising a structure of III-V material(s) on the surface of a substrate, said structure comprising at least one upper contact level defined on the surface of a first III-V material and a lower contact level defined on the surface of a second III-V material, said lower contact level being below said upper contact level, the process comprising:

- successive operations of encapsulation with at least one dielectric comprising encapsulation of said structure with at least one dielectric;
- making, in said dielectric, at least one upper aperture on the surface of said first III-V material and at least one lower aperture on the surface of said second III-V material, so as to define contact bottom zones on said first III-V material and on said second III-V material;
- carrying out contact bottom metallizations in said at least upper aperture and in said at least lower aperture;
- at least partial filling of said at least upper aperture and at least partial filling of said at least lower aperture with at least one metallic material

so as to produce at least one upper contact pad and at least one lower contact pad;

- the contact bottom metallizations and the contact pads defining at least one upper contact of said first III-V material in contact with said upper contact level and at least one lower contact of said second III-V material in contact with said lower contact level;

- at least said upper contact and at least said lower contact are integrated in dielectric and have an upper surface defined in one and the same plane.

10 The planar character is defined as being the set of contacts emerging on one and the same plane.

Thus, the following are defined in the present patent application:

- an upper contact starting from an upper aperture comprising a contact bottom metallization and a contact pad;
- a lower contact starting from a lower aperture comprising a contact bottom metallization and a contact pad.

20 To arrive at this result, the lower contacts (for the filling part) may be produced in one or more steps.

For this, a lower aperture may be made in two successive operations defining a first lower aperture and a second upper aperture, as will be elaborated upon in the detailed description of the invention.

25 Metallic material is defined as:

- pure metals, metal alloys, alloys of metal + nonmetallic element;
- intermetallic compounds or metalloids (different from an alloy in its crystallographic structure).

30 Integration of the planar type opens the way to 3D integration, by means of hybrid or direct bonding (for example photonic / electronic) or chip transfer by means of bumps.

In the context of III-V/Si co-integration, production of a planarized back-end (corresponding to the set of steps constituting the interconnections by metal bonds) also makes it possible to envisage forming the contact on

the devices of the lower levels (back-end front side or intermetallic for example).

According to variants of the invention, the structure has a lower
5 base of second III-V material and a mesa of first III-V material located above said base.

According to the present invention, it may be envisaged to produce contacts on the two III-V materials, according to at least two
10 alternatives:

- either by making apertures, in which contact bottom metallizations are carried out at the bottom of apertures, then filling of said apertures for making contact pads in contact with said contact bottom metallizations;
- 15 - or by making so-called primary apertures, in which contact bottom metallizations will be carried out at the bottom of apertures, then defining secondary apertures after filling with dielectric, for making contact pads, several contact pads thus contacting one and the same contact bottom metallization
20 previously defined in a primary aperture.

In the context of the first alternative:

According to variants of the invention, the process comprises successively making at least one lower aperture and then at least one upper
25 aperture.

According to variants of the invention, at least the lower aperture is made in several steps defining a first lower aperture and a second lower aperture, superposed on one another.

According to variants of the invention, said lower aperture
30 comprises, superposed, a contact bottom metallization, a metallic filling, a metallic interface identical to the contact bottom metallization, a metallic filling.

According to variants of the invention, the process comprises successively making at least one upper aperture and then at least one lower
35 aperture.

According to variants of the invention, the process comprises simultaneously making of at least one upper aperture and at least one lower aperture.

According to variants of the invention, the width of at least one upper aperture and/or of at least one lower aperture is (are) between 0.5 μm and 10 μm and preferably between 1 μm and 5 μm .

In the context of the second alternative:

According to variants of the invention, the process for producing a component comprising a structure of III-V material(s) on the surface of a substrate, said structure comprising at least one upper contact level defined on the surface of a first III-V material and a lower contact level defined on the surface of a second III-V material, comprising:

- successive operations of encapsulation of said structure with at least one dielectric;
- making at least one primary upper aperture and at least one primary lower aperture in a dielectric so as to define contact bottom zones on said first III-V material and on said second III-V material;
- making at least one secondary upper aperture and at least one secondary lower aperture in a dielectric so as to define zones of contact pads on said contact bottom zones;
- at least partial filling, with at least one metallic material, of said at least primary upper aperture, of said at least primary lower aperture, of said at least secondary upper aperture and of said at least secondary lower aperture so as to produce:
 - o at least one upper contact of said first III-V material in contact with the upper contact level and comprising at least one upper contact bottom metallization and at least one upper contact pad in contact with said metallization;
 - o at least one lower contact of said second III-V material in contact with said lower contact level and comprising at least one lower contact bottom

metallization and at least one lower contact pad in contact with said metallization;

- at least said upper contact and at least said lower contact are integrated in dielectric and have a surface defined in one and the same plane.

5

According to variants of the invention, the process comprises successively making at least one primary upper aperture and at least one primary lower aperture.

- 10 It may be advantageous to optimize the contact metallizations independently on each of the materials present in the III-V component in order to minimize the associated contact resistances.

- According to variants of the invention, the process comprises simultaneously making at least one secondary upper aperture and at least one secondary lower aperture.

15

According to variants of the invention, the process comprises:

- encapsulation of an assembly comprising the first III-V material covered with a metallization and the second III-V material covered with a metallization, with dielectric;
- 20 - making at least one secondary lower aperture opposite the second III-V material;
- making at least one secondary upper aperture above said first III-V material and making at least one additional secondary lower aperture above at least said secondary lower aperture;
- 25 - filling at least said secondary upper aperture, at least one additional secondary lower aperture and at least said secondary lower aperture.

- According to variants of the invention, the structure comprising at least one so-called upper III-V material, a so-called intermediate III-V material, a so-called lower III-V material, the process comprises:

30

- making at least one primary upper aperture, at least one primary intermediate aperture, at least one primary lower aperture;

- making at least one secondary upper aperture, at least one secondary intermediate aperture and at least one secondary lower aperture;
- filling said apertures.

5 According to variants of the invention:

- at least said secondary lower aperture comprises three portions with different dimensions;
- at least said secondary intermediate aperture comprises two portions with different dimensions;
- 10 - at least said secondary upper aperture comprises a portion.

According to variants of the invention, the process comprises the following steps:

- encapsulating said structure with a first dielectric;
- making at least one primary lower aperture opening onto said second III-V material;
- 15 - depositing metallization on the surface of said first dielectric and on the surface of said second semiconductor material defining a lower contact metallization and a first assembly;
- encapsulation of said first assembly with a second dielectric;
- 20 - planarization of said encapsulated first assembly;
- making at least one secondary lower aperture opening onto said lower contact bottom metallization;
- filling, with at least one metallic material, said at least secondary lower aperture defining at least one contact pad of said lower contact and a second assembly;
- 25 - encapsulation of said second assembly with a third dielectric;
- making at least one primary upper aperture above said first III-V material;
- depositing metallization on the surface of said third dielectric material and of said upper aperture defining an upper contact bottom metallization and a third assembly;
- 30 - encapsulation of said third assembly with a fourth dielectric;
- planarization of said third assembly;

- making at least one secondary upper aperture above said upper contact bottom metallization and at least one upper aperture above at least said contact pad of said lower contact;
 - filling, with at least one metallic material, said at least secondary upper aperture above said upper contact bottom metallization and said at least upper aperture above at least said contact pad of said lower contact, defining at least one upper pad for upper contact and at least one prolongation of lower contact pad, said upper contact and at least said lower contact having a surface defined in one and the same plane.
- According to variants, the process comprises the following steps:
- encapsulation of said structure with a first dielectric;
 - making at least one primary upper aperture opening onto said first III-V material;
 - depositing metallization on the surface of said first dielectric and on the surface of said first semiconductor material defining an upper contact metallization and a first assembly;
 - encapsulation of said first assembly with a second dielectric;
 - planarization of said encapsulated first assembly;
 - making at least one secondary upper aperture opening onto said upper contact bottom metallization;
 - filling, with at least one metallic material, said at least secondary upper aperture defining at least one contact pad of said upper contact and a second assembly;
 - making at least one primary lower aperture above said second III-V material;
 - depositing metallization on the surface of said first dielectric material and of said primary lower aperture defining a lower contact metallization and a third assembly;
 - encapsulation of said third assembly with a fourth dielectric;
 - planarization of said third;
 - making at least one secondary lower aperture above said lower contact bottom layer;
 - filling, with at least one metallic material, said at least secondary lower aperture, defining at least one lower contact

pad, said upper contact and at least said lower contact having a surface defined in one and the same plane.

According to variants, the process comprises:

- simultaneously making at least one primary upper aperture and at least one primary lower aperture;
- simultaneously making at least one secondary upper aperture and at least one secondary lower aperture.

According to variants of the invention, the process comprises making an additional contact level on the surface of said planar contacts, comprising:

- additional deposition of dielectric;
- making at least one lower additional aperture and at least one upper additional aperture;
- filling said additional apertures with at least one metallic material to define at least one lower additional contact and at least one upper additional contact.

According to variants of the invention, the process comprises making primary lower apertures having a width between 20 μm and 50 μm and making secondary lower apertures having a width between 0.5 μm and 5 μm , preferably between 1 μm and 3 μm .

According to variants of the invention, the first III-V material and the second III-V material are selected from:

The first III-V material may consist of III-V material such as InP, $\text{In}_{1-x}\text{Ga}_x\text{As}$ (with $0 \leq x \leq 1$), GaAs, InAs, GaSb, $\text{In}_{1-x}\text{Ga}_x\text{Sb}$, $\text{In}_x\text{Ga}_{1-x}\text{As}_{1-y}\text{P}_y$, $\text{Ga}_{1-x}\text{In}_x\text{P}$, $\text{In}_x\text{Ga}_{1-x}\text{As}_{1-y}\text{N}_y$, $\text{B}_x\text{In}_y\text{Ga}_{1-x-y}\text{As}$.

The second III-V material may also consist of III-V material such as InP, $\text{In}_{1-x}\text{Ga}_x\text{As}$ (with $0 \leq x \leq 1$), GaAs, InAs, GaSb, $\text{In}_{1-x}\text{Ga}_x\text{Sb}$, $\text{In}_x\text{Ga}_{1-x}\text{As}_{1-y}\text{P}_y$, $\text{Ga}_{1-x}\text{In}_x\text{P}$, $\text{In}_x\text{Ga}_{1-x}\text{As}_{1-y}\text{N}_y$, $\text{B}_x\text{In}_y\text{Ga}_{1-x-y}\text{As}$, etc.

According to variants of the invention the substrate is of silicon.

According to variants of the invention, the dielectric or dielectrics are selected from: SiN, SiO_2 , Al_2O_3 , a planarizing polymer that may be based on benzocyclobutene (BCB) or SOG.

According to variants of the invention, a metal such as Ni_2P , Ni_3P , NiGe, TiP, TiGe is deposited in said primary apertures.

According to variants of the invention, a metal such as Ni, Ti and alloy such as NiPt, NiTi, NiCo are deposited in said primary apertures.

According to variants of the invention, the filling operations comprise:

- 5 - depositing a diffusion barrier, which may consist of one or more layers of material selected from: TiN, Ti/TiN, TaN, Ta/TaN, W (fluorine-free);
- depositing a filling metal selected from: W, Cu, Al, AlCu, AlSi.

Regarding the diffusion barrier, W is fluorine-free as the barrier is
10 deposited by CVD (chemical method), the precursor of which does not contain F, in contrast to the W for filling. A barrier is used because F is harmful to devices. This barrier may also serve for facilitating nucleation of the filling metal (W, Cu, Al, etc.).

The element W is particularly advantageous in the context of the
15 present invention as it is of quite low resistance and is easy to use, it can thus be used advantageously for filling the secondary apertures.

According to variants of the invention, the deposition of metallization is followed by a heat treatment, the aim of which is to form one or more intermetallic compounds.

20 According to variants of the invention, the component is a laser, and the process of the invention comprises an operation for making a guide of semiconductor material, which may be Si, in a dielectric substrate, which may be of SiO₂.

 According to variants of the invention, the component is a laser,
25 and the process of the invention comprises making a circular upper contact to allow vertical emission of the laser radiation.

The invention also relates to the component obtained by the process of the invention.

 The component may be an edge emitting laser, or a vertical
30 emitting laser. It may also be, advantageously, a component comprising a series of different III-V materials having different absorption wavelengths for broadening the absorption band of the component.

The present invention may be applied to a great many initial configurations, such as:

- III-V transfers on any type of substrate for example on Si chips to wafers;
- from wafers to wafers;
- epitaxy of III-V on Si substrate, III-V, or any permanent or temporary substrate allowing crystal growth of III/V. It should be noted that there should be at least one crystal nucleus of crystallographic structure identical to that of the III/V material that it is desired to grow and lattice parameters close to the growing layer. Above 5% of difference between the lattice parameters, the crystal is defective (dislocation, antiphase grain boundary or even polycrystalline). This is impossible on an amorphous substrate of the glass type.

The starting substrates may have a diameter of 100 mm or more.

The invention will be better understood and other advantages will become clearer on reading the nonlimiting description given hereunder and the appended figures, where:

- Fig. 1 illustrates an example of a component based on III-V materials of the prior art;
- Fig. 2 illustrates an example of a structure of III-V materials on a substrate used in examples of the process of the invention;
- Fig. 3 illustrates a first example of a component made in the context of the first alternative of the present invention;
- Figs. 4a to 4i illustrate the various steps of a first example of the process of the invention according to the first alternative and comprising production of the lower contacts and then the upper contacts made on individual contact bottom metallizations;
- Figs. 5a to 5h illustrate the various steps of a second example of the process of the invention according to the first alternative and comprising production of the upper contacts and then the lower contacts made on individual contact bottom metallizations;
- Figs. 6a to 6e illustrate the various steps of a third example of the process of the invention according to the first alternative and comprising production of the lower contacts simultaneously

12

with the upper contacts made on individual contact bottom metallizations;

- Figs. 7f to 7k illustrate variants of steps for producing the lower contact pads illustrated in Figs. 4a to 4i making it unnecessary to have a metallic interface layer in said lower contact pads;
- Figs. 8b to 8e illustrate process steps constituting a variant of the steps for making the contact pads by a dual-damascene process;
- Fig. 9 illustrates a step of integration of an additional contact level that may be employed in variants of the process of the invention;
- Fig. 10 illustrates a first example of a laser component produced by the process of the invention;
- Fig. 11 illustrates a second example of a laser component produced by the process of the invention;
- Fig. 12 illustrates a first example of a component made in the context of the second alternative of the present invention and comprising contact bottom metallizations shared among several pads;
- Figs. 13a to 13o illustrate the various steps of a first example of a process carried out in the context of the second alternative of the invention comprising production of the lower contacts and then the upper contacts and comprising secondary upper apertures and secondary lower apertures;
- Figs. 14a to 14n illustrate the various steps of a second example of the process of the invention carried out in the context of the second alternative of the present invention comprising production of the upper contacts and then the lower contacts;
- Figs. 15a to 15h illustrate the various steps of a third example of a process carried out in the context of the second alternative of the invention comprising producing the lower and upper contacts simultaneously;
- Figs. 16a to 16d illustrate the various steps of a fourth example of the process of the invention comprising producing double-

- level secondary upper and lower apertures simultaneously, in the context of the second alternative of the invention;
- Fig. 17 illustrates a step of integration of an additional contact level that may be employed in variants of the process of the invention;
 - Fig. 18 illustrates a first example of a laser component produced by the process of the invention;
 - Fig. 19 illustrates a second example of a laser component produced by the process of the invention;
 - Fig. 20 illustrates an example of a component obtained by the process of the invention in the context of photonic integration;
 - Fig. 21 illustrates an example of a component that is absorbent in different wavelength regions owing to the use of at least three levels of different III-V materials, and produced by the process of the invention;
 - Fig. 22 illustrates an example of a component in which the contacts are formed on a solar cell in which multiplication and diversification of the III-V materials gives access to a wider absorption band;
 - Figs. 23a and 23b show two schematic views of contacts and the electric field lines for illustrating the transfer lengths;
 - Fig. 24 shows a schematic representation of a TLM structure;
 - Fig. 25 illustrates the evolution of the total resistance measured as a function of the space between contacts in the case of a TLM structure.

Various embodiments of the invention are described in the detailed description given hereunder.

The integration of the contacts is presented at two levels but is applicable to a great many levels having a topography of different levels of contacts at the level of the III-V materials.

The invention is described below in the context of a substrate **9** on which a structure is produced comprising a III-V base material **2** and a III-V upper material **1** as illustrated in Fig. 2, in which it will be possible to produce a mesa having a surface below that of the III-V base material.

The following reference symbols are used throughout the description:

- a first III-V material: **1**;
- 5 - a second III-V material: **2**;
- a substrate: **9**;
- one or more dielectric materials: **8**;
- a metallization: **3**;
- a diffusion barrier: **4**;
- 10 - a metallic filler: **5**;
- upper apertures **O_s** in contact with the first material **1**;
- lower apertures **O_i** in contact with the second material **2**.

An upper contact **C_{sup}** is defined starting from at least one upper aperture **O_s** or starting from at least one primary upper aperture **O_{sp}** and
15 starting from at least one secondary upper aperture **O_{ss}**.

A lower contact **C_{inf}** is defined starting from at least one lower aperture **O_i** or starting from at least one primary lower aperture **O_{ip}** and from at least one secondary lower aperture **O_{is}**.

An intermediate contact **C_{int}** is defined starting from at least one
20 primary intermediate aperture **O_{tp}** and starting from at least one secondary intermediate aperture **O_{ts}**.

Fig. 3 shows an example of a component obtained by a process belonging to the first alternative of the invention and showing, on a substrate
25 **9**, the III-V materials **1** and **2**, metallizations **3** serving as contact bottom metallizations, on which contact pads are produced comprising diffusion barriers **4**; the secondary apertures are filled with filling metal **5**. The assembly is encapsulated in a dielectric **8**. Fig. 3 shows the contact levels: a lower level **N_{inf}**, an upper level **N_{sup}**. According to this example, an additional
30 level **N_{sup/supl}** may be envisaged, on which contact pads filled with diffusion barrier **7** and with filling metal **6** may be produced.

The first III-V material may consist of III-V material such as InP, In_{1-x}Ga_xAs (with $0 \leq x \leq 1$), GaAs, InAs, GaSb, In_{1-x}Ga_xSb, In_xGa_{1-x}As_{1-y}P_y, Ga_{1-x}In_xP, In_xGa_{1-x}As_{1-y}N_y, B_xIn_yGa_{1-x-y}As.

The second III-V material may also consist of III-V material such as InP, $\text{In}_{1-x}\text{Ga}_x\text{As}$ (with $0 \leq x \leq 1$), GaAs, InAs, GaSb, $\text{In}_{1-x}\text{Ga}_x\text{Sb}$, $\text{In}_x\text{Ga}_{1-x}\text{As}_{1-y}\text{P}_y$, $\text{Ga}_{1-x}\text{In}_x\text{P}$, $\text{In}_x\text{Ga}_{1-x}\text{As}_{1-y}\text{N}_y$, $\text{B}_x\text{In}_y\text{Ga}_{1-x-y}\text{A}$. It may be identical to the first material or different from the latter.

5 The substrate may be a silicon substrate that may for example have a thickness of the order of some hundreds of millimeters (for example 200 mm).

According to the present invention, the upper levels of the upper and lower contacts are located in one and the same plane.

10

The figures all show sectional views of contacts that may be circular or linear.

**I) First alternative of the invention comprising the production
15 of a type of apertures intended to receive a contact bottom metallization and contact pads in contact with said contact bottom metallization.**

First example of a process according to the invention comprising the production of lower contacts followed by the production of an upper
20 contact according to the first alternative of the invention

First step:

This involves encapsulation of the structure previously produced, comprising a mesa of a first III-V material **1** on the surface of a base of a III-V
25 material **2** on a substrate **9**.

The dielectric(s) **8** used may be: SiN, SiO₂, Al₂O₃, polymer of the planarizing type for example based on benzocyclobutane (BCB), or of the type: SOG "Spin-on-Glass": deposition of amorphous dielectric by centrifugation.

30 The deposit may be single-layer or multilayer.

The dielectrics are deposited by PVD (physical vapor deposition), CVD (chemical vapor deposition) and/or ALD (atomic layer deposition). The deposition temperature may typically be $\leq 550^\circ\text{C}$, preferably $\leq 450^\circ\text{C}$.

The stress of the layers produced may advantageously be ≤ 200
35 MPa, preferably ≤ 100 MPa.

This encapsulation step is illustrated in Fig. 4a.

Second step:

This involves planarization of the dielectric by a CMP operation
 5 ("chemical mechanical planarization" or "chemical mechanical polishing") or partial removal by dry etching ("etch back") in the case of a planarizing polymer.

There are certain polymers that have the property of being self-leveling. That is, they will fill the lower parts first, before the upper parts.
 10 However, to ensure that the cavities are filled completely, the deposit is thicker than the depth of the cavity. It is then necessary to reduce the thickness of the surplus deposit. This can be done by dry etching on the whole wafer, called "etch back".

It is also possible to use an operation of localized lithography /
 15 etching on the topography before CMP.

This planarization step is illustrated in Fig. 4b.

Third step:

This involves making first lower apertures O_{i1} intended for the
 20 lower contact.

The dimensions D1 and D2 may typically be as follows:

The dimension D1 (width of dielectric on either side of the mesa of III-V material 1) is at least 200 nm and preferably between 2 and 3 μm .

The dimension D2 (width of the lower apertures) may be between
 25 0.5 and 10 μm and is preferably between 1 and 5 μm .

The dimension D3 (thickness of dielectric) is between 0.5 μm and 5 μm , preferably between 5 and 3 μm .

These apertures may be made by dry etching. In this case the presence of an etch stop layer is optional.

30 Sequential etching may also be employed:

a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the material 2.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example consisting of SiN.

5 **Fourth step:**

This involves depositing metallization compatible with a silicon process flow to define the lower contact, making it possible to avoid the use of noble metals, metals that are not used by the silicon process flow.

Metallization compatible with a silicon process flow may be carried
10 out according to two options:

- option 1:

(a) deposition of a metal 3 compatible with a silicon process flow such as Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc. is carried out;

Phase stabilization may be undertaken by an optional heat treatment
15 carried out after metal deposition;

(b) deposition of a metal 3 compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out
20 with the aim of performing a solid-state reaction between the metal and the III-V material leading to the formation of one or more intermetallic compounds.

The deposition temperatures are preferably $\leq 450^{\circ}\text{C}$.

The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

25 According to option 1, the metal or the intermetallic compound is deposited and the work function of the latter is utilized. In this case annealing serves to heal the interface defects and crystallize the metal or the compound.

30 According to option 2, the metal is deposited, and it is reacted to form the intermetallic compound having the required work function. In this case annealing serves for the solid-state reaction.

Selective removal of the unreacted metal may be carried out after heat treatment.

All of these steps are illustrated in Fig. 4d.

Fifth step:

This involves filling the first lower apertures and the CMP operation for making connecting pads. The lower apertures are filled twice:

- deposition of a diffusion barrier / of a keying or nucleation layer
4 is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal 5 (W, Cu, AlCu, AlSi) is carried out, deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads.

- 10 As metal is present at the top of the cavities between two pads, short-circuiting is inevitable. The CMP operation makes it possible to remove only the metal from the pads and therefore decontact them.

All of these steps are illustrated in Fig. 4e.

15 **Sixth step:**

- This involves an encapsulation step of the assembly defined above with dielectric 8. The thickness D5 of the dielectric above the material 1 may typically be between 200nm and 1 μ m and is preferably between 200nm and 500 nm. The dielectric(s) used may be: SiN, SiO₂, Al₂O₃, polymer
20 of the planarizing type (for example BCB, SOG). The deposit may be single-layer or multilayer. They are deposited by PVD, CVD and/or ALD.

The deposition temperature is $\leq 450^{\circ}\text{C}$, preferably $\leq 300^{\circ}\text{C}$.

This step is illustrated in Fig. 4f.

- The operations of phase stabilization or of heat treatment to form
25 one or more intermetallic compounds may be carried out at the end of this step, if they have not already been carried out.

Seventh step:

- This involves making second lower apertures O_{i2} intended for the
30 lower contact and apertures O_s intended for the upper contact.

These apertures may be made by dry etching. In this case the presence of an etch stop layer is optional.

- Sequential etching may also be employed: a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al₂O₃,
35 SiO₂, BCB, SOC preferably SiN) and then using dry or wet etching for etching

the barrier layer and the optional underlying layers, opening onto the material
1.

Said etching operation(s) may be carried out directly via the resin
used for photolithography or preferably using a hard mask for example
5 consisting of SiN.

The dimension D2 (width of the upper apertures) may be between
0.5 and 10 μm and is preferably between 1 and 5 μm .

This step is illustrated in Fig. 4g.

10 **Eighth step:**

This involves depositing metallization compatible with a silicon
process flow to define the lower contacts and the upper contact making it
possible to avoid the use of noble metals, metals that are not used by the
silicon process flow.

15 Metallization compatible with a silicon process flow may be carried
out according to two options:

- option 1:

(a) deposition of a metal 3 compatible with a silicon process flow
such as Ni_2P , Ni_3P , NiGe , TiP , TiGe , etc. is carried out;

20 Phase stabilization may be undertaken by an optional heat treatment
carried out after metal deposition;

(b) deposition of a metal 3 compatible with a silicon process flow
such as Ni, Ti and alloy such as NiPt , NiTi , NiCo , etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process
25 flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out
with the aim of performing a solid-state reaction between the metal and the
III-V material leading to the formation of one or more intermetallic
compounds.

The deposition temperatures are preferably $\leq 450^\circ\text{C}$.

30 The annealing temperature is preferably $\leq 450^\circ\text{C}$.

According to option 1, the metal or the intermetallic compound is
deposited and the work function of the latter is utilized. In this case annealing
serves to heal the interface defects and crystallize the metal or the
compound.

35 This step is illustrated in Fig. 4h.

Ninth step:

This involves filling the lower apertures and the upper apertures and a CMP operation for making connecting pads. Filling of the lower
 5 apertures and upper apertures is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer
 4 is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of
 W deposited by CVD, PVD or ALD;
- deposition of a filling metal 5 (W, Cu, AlCu, AlSi) is carried out,
 10 deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads.
 As the metal is present at the top of the cavities between two pads, short-
 circuiting is inevitable. The CMP operation makes it possible to remove only
 the metal from the pads and therefore decontact them.

15 All of these steps are illustrated in Fig. 4i, showing the upper
 contact C_{sup} and two levels of metallizations 3 in the lower contacts C_{inf} .

An alternative to the embodiment described in this first example
 consists of sequentially defining the cavities of contacts described in Figs. 4c-
 4d and then in Figs. 4g-4h but of defining the pad cavities described in Figs.
 20 4e and 4i in a single step.

Second example of a process according to the invention
comprising the production of upper contacts followed by the production of
 25 lower contacts according to the first alternative of the invention:

First step:

This involves encapsulation of the structure previously produced,
 comprising a mesa of a first III-V material 1 on the surface of a base of a III-V
 30 material 2 on a substrate 9.

The dielectric(s) 8 used may be: SiN, SiO₂, Al₂O₃, polymer of the
 planarizing type for example based on benzocyclobutane (BCB), or of the
 type: SOG "Spin-on-Glass": deposition of amorphous dielectric by
 centrifugation.

35 The deposit may be single-layer or multilayer.

The dielectrics are deposited by PVD (physical vapor deposition), CVD (chemical vapor deposition) and/or ALD (atomic layer deposition). The deposition temperature may typically be $\leq 550^{\circ}\text{C}$, preferably $\leq 450^{\circ}\text{C}$.

The stress of the layers produced may advantageously be ≤ 200 MPa, preferably ≤ 100 MPa.

This encapsulation step is illustrated in Fig. 5a.

Second step:

This involves planarization of the dielectric by a CMP operation ("chemical mechanical planarization" or "chemical mechanical polishing") or partial removal by dry etching ("etch back") in the case of a planarizing polymer.

There are certain polymers that have the property of being self-leveling. That is, they will fill the lower parts first, before the upper parts. However, to ensure that the cavities are filled completely, the deposit is thicker than the depth of the cavity. It is then necessary to reduce the thickness of the surplus deposit. This can be done by dry etching on the whole wafer, called "etch back".

It is also possible to use an operation of localized lithography / etching on the topography before CMP.

This planarization step is illustrated in Fig. 5b.

Third step:

This involves making upper apertures O_s intended for the upper contact.

These apertures may be made by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may also be employed:

a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the material 1.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example consisting of SiN.

This step of making apertures is illustrated in Fig. 5c.

5

Fourth step:

This involves depositing metallization compatible with a silicon process flow to define the upper contact making it possible to avoid the use of noble metals, metals that are not used by the silicon process flow.

10 Metallization compatible with a silicon process flow may be carried out according to two options:

- option 1:

(a) deposition of a metal 3 compatible with a silicon process flow such as Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc. is carried out;

15 Phase stabilization may be undertaken by an optional heat treatment carried out after metal deposition;

(b) deposition of a metal 3 compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

20 - option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out with the aim of performing a solid-state reaction between the metal and the III-V material leading to the formation of one or more intermetallic compounds.

The deposition temperatures are preferably $\leq 450^{\circ}\text{C}$.

25 The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

According to option 1, the metal or the intermetallic compound is deposited and the work function of the latter is utilized. In this case annealing serves to heal the interface defects and crystallize the metal or the compound.

30 This step is illustrated in Fig. 5d.

Fifth step:

This involves filling the upper apertures, and a CMP operation for making connecting pads. Filling of the upper apertures is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer **4** is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal **5** (W, Cu, AlCu, AlSi) is carried out, deposited by CVD, ECD or PVD.

5

A CMP operation is finally carried out for decontacting the pads. As metal is present at the top of the cavities between two pads, short-circuiting is inevitable. The CMP operation makes it possible to remove only the metal from the pads and therefore decontact them.

10

All of these steps are illustrated in Fig. 5e, showing two levels of metallizations **3** in the upper contacts.

Sixth step:

This involves making lower apertures **O_i** intended for the lower contacts.

15

These apertures may be made by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may also be employed:

20

a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al₂O₃, SiO₂, BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the material **2**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example consisting of SiN.

25

This step of making apertures is illustrated in Fig. 5f.

Seventh step:

This involves depositing metallization compatible with a silicon process flow to define the lower contacts, making it possible to avoid the use of noble metals, metals that are not used by the silicon process flow.

30

Metallization compatible with a silicon process flow may be carried out according to two options:

35

- option 1:

(a) deposition of a metal **3** compatible with a silicon process flow such as Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc. is carried out;

Phase stabilization may be undertaken by an optional heat treatment carried out after metal deposition;

5 (b) deposition of a metal **3** compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out with the aim of performing a solid-state reaction between the metal and the
10 III-V material leading to the formation of one or more intermetallic compounds.

The deposition temperatures are preferably $\leq 450^{\circ}\text{C}$.

The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

According to option 1, the metal or the intermetallic compound is
15 deposited and the work function of the latter is utilized. In this case annealing serves to heal the interface defects and crystallize the metal or the compound.

This step is illustrated in Fig. 5g.

20 **Eighth step:**

This involves filling the lower apertures, and a CMP operation for making connecting pads. The lower apertures are filled twice:

- deposition of a diffusion barrier / of a keying or nucleation layer
25 **4** is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal **5** (W, Cu, AlCu, AlSi) is carried out, deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads. As metal is present at the top of the cavities between two pads, short-
30 circuiting is inevitable. The CMP operation makes it possible to remove only the metal from the pads and therefore decontact them.

All of these operations are illustrated in Fig. 5h, showing two levels of metallizations **3** in the lower contacts.

An alternative to the embodiment described in this second example consists of sequentially opening the cavities of contacts described in Figs. 5c-5d and then in Figs. 5f-5g but opening the pad cavities described in Figs. 5e and 5h in a single step.

5

Third example of a process according to the invention comprising the simultaneous production of upper contacts and of lower contacts according to the first alternative of the invention:

10

First step:

This involves encapsulation of the structure previously produced that comprises a mesa of a first III-V material **1** on the surface of a base of a III-V material **2** on a substrate **9**.

The dielectric(s) **8** used may be: SiN, SiO₂, Al₂O₃, polymer of the planarizing type for example based on benzocyclobutane (BCB), or of the type: SOG "Spin-on-Glass": deposition of amorphous dielectric by centrifugation.

The deposit may be single-layer or multilayer.

The dielectrics are deposited by PVD (physical vapor deposition), CVD (chemical vapor deposition) and/or ALD (atomic layer deposition). The deposition temperature may typically be $\leq 550^{\circ}\text{C}$, preferably $\leq 450^{\circ}\text{C}$.

The stress of the layers produced may advantageously be ≤ 200 MPa, preferably ≤ 100 MPa.

This encapsulation step is illustrated in Fig. 6a.

25

Second step:

This involves planarization of the dielectric by a CMP operation ("*chemical mechanical planarization*" or "*chemical mechanical polishing*") or partial removal by dry etching ("*etch back*") in the case of a planarizing polymer.

30

There are certain polymers that have the property of being self-leveling. That is, they will fill the lower parts first, before the upper parts. However, to ensure that the cavities are filled completely, the deposit is thicker than the depth of the cavity. It is then necessary to reduce the

thickness of the surplus deposit. This can be done by dry etching on the whole wafer, called "*etch back*".

It is also possible to use an operation of localized lithography / etching on the topography before CMP.

5 This planarization step is illustrated in Fig. 6b.

Third step:

This involves making upper apertures O_s intended for the upper contact and lower apertures O_i intended for the lower contacts.

10 These apertures may be made by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may also be employed:

15 a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the material **1** and onto the material **2**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example
20 consisting of SiN.

This step of making apertures is illustrated in Fig. 6c.

Fourth step:

25 This involves depositing metallization compatible with a silicon process flow to define the upper contacts and the lower contacts, making it possible to avoid the use of noble metals, metals that are not used by the silicon process flow.

Metallization compatible with a silicon process flow may be carried out according to two options:

30 - option 1:

(a) deposition of a metal **3** compatible with a silicon process flow such as Ni_2P , Ni_3P , NiGe, TiP, TiGe, etc. is carried out;

Phase stabilization may be undertaken by an optional heat treatment carried out after metal deposition;

(b) deposition of a metal **3** compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out with the aim of performing a solid-state reaction between the metal and the III-V material leading to the formation of one or more intermetallic compounds.

The deposition temperatures are preferably $\leq 450^{\circ}\text{C}$.

The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

According to option 1, the metal or the intermetallic compound is deposited and the work function of the latter is utilized. In this case annealing serves to heal the interface defects and crystallize the metal or the compound.

This step is illustrated in Fig. 6d.

Fifth step:

This involves filling the upper apertures and lower apertures, and a CMP operation for making connecting pads. Simultaneous filling of the upper and lower apertures is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer **4** is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal **5** (W, Cu, AlCu, AlSi) is carried out, deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads. As metal is present at the top of the cavities between two pads, short-circuiting is inevitable. The CMP operation makes it possible to remove only the metal from the pads and therefore decontact them.

This step is illustrated in Fig. 6e.

A variant of the first example of a process according to the invention comprising the production of lower contacts followed by the production of an upper contact according to the first alternative of the invention, consists of adding a step of lithography in order to remove the

metallization layer **3** present in the low level pads (external). The latter adds interfaces and might therefore be harmful from an electrical standpoint.

This variant is described below and comprises steps in common with those described in Figs. 4a to 4f and is illustrated in Figs. 7f to 7i, the
 5 reference letters being kept the same for better understanding.

An assembly is produced, in which pads of lower contacts were made beforehand, encapsulated in dielectric **8** as illustrated in Fig. 7f.

10 Then apertures O_s are made at the level of the first material **1**, intended for the upper contact as illustrated in Fig. 7g. These apertures may be made by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may also be carried out:

15 a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the material **1**.

20 Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example consisting of SiN.

Then metallization compatible with a silicon process flow is
 25 deposited, to define the upper contacts and the lower contacts, making it possible to avoid the use of noble metals, metals that are not used by the silicon process flow.

Metallization compatible with a silicon process flow may be carried out according to two options:

30 - option 1:

(a) deposition of a metal **3** compatible with a silicon process flow such as Ni_2P , Ni_3P , NiGe, TiP, TiGe, etc. is carried out;

Phase stabilization may be undertaken by an optional heat treatment carried out after metal deposition;

(b) deposition of a metal 3 compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out with the aim of performing a solid-state reaction between the metal and the III-V material leading to the formation of one or more intermetallic compounds.

The deposition temperatures are preferably $\leq 450^{\circ}\text{C}$.

The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

According to option 1, the metal or the intermetallic compound is deposited and the work function of the latter is utilized. In this case annealing serves to heal the interface defects and crystallize the metal or the compound.

This step is illustrated in Fig. 7h.

An operation of the CMP type is then undertaken for removing the excess metal at the top of the dielectric stack, as illustrated in Fig. 7i, only leaving the layer 3 present at the level of the apertures $\mathbf{O}_s$.

Then second lower apertures $\mathbf{O}_{i2}$ intended for the lower contacts are made, as illustrated in Fig. 7j. These apertures may be made by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may also be used:

Dielectric stack etching for opening out the external pads of lower contacts on the material:

- Etching carried out once up to the filler material of the low level pads: dry etching. In this case the presence of an etch stop layer is optional.
- Sequential etching: a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the filler material of the low level pads.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example consisting of SiN.

5 Then the upper pads and the upper part of the lower pads are produced, on top of the first part of the lower pads made previously. This operation is carried out by filling all of the apertures O_s and O_{i2} .

Simultaneous filling of the upper apertures O_s and lower apertures O_{i2} is carried out twice:

- 10 - deposition of a diffusion barrier / of a keying or nucleation layer **4** is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal **5** (W, Cu, AlCu, AlSi) is carried out, deposited by CVD, ECD or PVD.

15 A CMP operation is finally carried out for decontacting the pads. As metal is present at the top of the cavities between two pads, short-circuiting is inevitable. The CMP operation makes it possible to remove only the metal from the pads and therefore decontact them.

This filling operation is illustrated in Fig. 7k.

20 An alternative to the apertures of pads described in the three examples described above consists of integrating the contact pads by a dual-damascene process. Dual damascene is a two-step etching process in which metallic filling and then CMP for removing excess metal (barrier of one or two layers + filling) are carried out successively in a single step. This generally
25 makes it possible to produce a via and a line that leads to this via: connection and routing.

This alternative is shown schematically according to the embodiment illustrated in Figs. 8b to 8e. An encapsulated and smoothed assembly such as that illustrated in Fig. 8b is produced in a manner similar to
30 those described above.

The top part of the lower apertures called second lower apertures O_{i2} is made by partial etching of the dielectric. Dry etching may be used. In this case the presence of an etch stop layer is optional.

Said etching operation(s) may be carried out directly via the resin used for photolithography or using a hard mask consisting for example of SiN.

This step is illustrated in Fig. 8c.

5

A second operation of etching the dielectric is carried out for making upper apertures O_s and the lower part of the lower apertures called first lower apertures O_{i1} .

These apertures may be made by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may also be used:
Dielectric stack etching for opening the external pads of lower contacts out onto the material:

- Etching carried out once up to the filler material of the low level pads: dry etching. In this case the presence of an etch stop layer is optional.
- Sequential etching: a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the filler material of the low level pads.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example consisting of SiN.

This step is illustrated in Fig. 8d.

The pads of the lower and upper contacts are then produced by filling. Simultaneous filling of the upper apertures O_s and lower apertures O_{i2} and O_{i2} is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer 4 is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal 5 (W, Cu, AlCu, AlSi) is carried out, deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads. As metal is present at the top of the cavities between two pads, short-circuiting is inevitable. The CMP operation makes it possible to remove only the metal from the pads and therefore decontact them.

5 This filling operation is illustrated in Fig. 8e.

All the embodiments described in the preceding examples may be supplemented with an additional level of integration.

An additional step may thus be carried out by performing an
10 additional deposition of dielectric **8**, then making additional upper and lower apertures by etching and filling these apertures to define the contacts $C_{inf/supl}$ and $C_{sup/supl}$ as illustrated in Fig. 9.

For this, in the additional upper and lower apertures, a barrier **7** is deposited, which may be of TiN, Ti/TiN, TaN, Ta/TaN, W and filling with a
15 metal **6** that may be W, Cu or Al, AlCu, AlSi.

Example of a laser component produced by the process of the invention:

The process of the present invention advantageously makes it
20 possible to produce a laser based on III-V materials:

A substrate **90** of SiO₂ comprises a silicon guide **91**, on top of which the following are produced:

- a base of second III-V material **2**, which may be of n-doped InP, and a mesa **1** comprising a multiple quantum well structure that
25 may be made of InGaAsP with different dopings and a layer of p-doped InGaAs, the nature of the III-V materials determining the emission wavelength;
- the dielectric **8** may be of SiN, SiO₂, or of polymer of the planarizing type for example based on BCB;
- contact bottom metallization **3** may be for example of Ni, Ti, or
30 alloys thereof (Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc.);
- the diffusion barrier to F and/or the keying layer to W **4** may be of TiN, Ti/TiN, TaN, Ta/TaN, W,

The filling metal **5** may be of Cu or Al, AlCu, AlSi.

35 This example of a laser is illustrated in Fig. 10.

Example of a vertically emitting laser component of the VCSEL type:

5 It is recalled that in general, a vertical-cavity surface-emitting laser diode, or VCSEL, is a type of semiconductor laser diode emitting a laser beam perpendicularly to the surface, in contrast to the conventional edge-emitting semiconductor lasers.

This example of a laser mainly comprises the same type of
10 structure as that described in the preceding example.

However, to allow emission of laser radiation at the top of the structure, the upper contact is made circular.

This example of component comprises a silicon substrate **9**, on top of which the following are produced: a base of second III-V material **2**,
15 which may be of n-doped InP, and a mesa **1** comprising a multiple quantum well structure that may be based on InGaAsP, AlGaAs, GaAs, InGaAsN and a layer of p-doped InGaAs, the nature of the III-V materials determining the emission wavelength.

The dielectric **8** may be of SiN, SiO₂, or of polymer of the
20 planarizing type for example based on BCB.

The contact bottom metallization **3** may be for example of Ni, Ti, or alloys thereof (Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc.).

The diffusion barrier to F and/or the keying layer to W **4** may be of TiN, Ti/TiN, TaN, Ta/TaN, W.

25 The filling metal **5** may be of Cu or Al, AlCu, AlSi.

The metallizations **3** and the elements **4** and **5** constitute the contacts **C_{sup}** and **C_{inf}**.

Owing to the circular upper contact **C_{sup}**, the laser beam may be extracted from the upper surface of the component.

30 This example of a laser is illustrated in Fig. 11.

II) Second alternative of the invention comprising making primary apertures and secondary apertures

According to this second alternative described above, a primary aperture bottom metallization and a contact pad in a secondary aperture are defined. The contact thus consists of at least the aperture bottom metallization and the contact pad in contact with said metallization.

5 Fig. 12 shows an example of a component obtained by a process belonging to the first alternative of the invention and showing, on a substrate 9, the III-V materials 1 and 2, metallizations 3 serving as contact bottom metallizations, on which contact pads are produced comprising diffusion barriers 4; the secondary apertures are filled with filling metal 5. The whole is
10 encapsulated in a dielectric 8. Fig. 12 shows the contact levels: a lower level N_{inf} , an upper level N_{sup} . According to this example, an additional level $N_{sup/supl}$ may be envisaged, on which contact pads may be made, filled with diffusion barrier 7 and filling metal 6.

The first III-V material may consist of III-V material such as InP,
15 $In_{1-x}Ga_xAs$ (with $0 \leq x \leq 1$), GaAs, InAs, GaSb, $In_{1-x}Ga_xSb$, $In_xGa_{1-x}As_{1-y}P_y$, $Ga_{1-x}In_xP$, $In_xGa_{1-x}As_{1-y}N_y$, $B_xIn_yGa_{1-x-y}As$.

The second III-V material may also consist of III-V material such as InP, $In_{1-x}Ga_xAs$ (with $0 \leq x \leq 1$), GaAs, InAs, GaSb, $In_{1-x}Ga_xSb$, $In_xGa_{1-x}As_{1-y}P_y$, $Ga_{1-x}In_xP$, $In_xGa_{1-x}As_{1-y}N_y$, $B_xIn_yGa_{1-x-y}A$. It may be identical to
20 or different from the first material.

The substrate may be a silicon substrate, which may for example have a thickness of the order of some hundreds of millimeters (for example 200 mm).

25 First example of a process according to the invention comprising the production of lower contacts followed by the production of an upper contact according to the second alternative of the invention:

First step:

30 This involves encapsulation of the structure previously produced, which comprises a mesa of a first III-V material 1 on the surface of a base of a III-V material 2 on a substrate 9.

The dielectric(s) 8 used may be: SiN, SiO₂, Al₂O₃, polymer of the planarizing type for example based on benzocyclobutane (BCB), or of the

type: SOG "Spin-on-Glass": deposition of amorphous dielectric by centrifugation.

The deposit may be single-layer or multilayer.

The dielectrics are deposited by PVD (physical vapor deposition),
 5 CVD (chemical vapor deposition) and/or ALD (atomic layer deposition). The deposition temperature may typically be $\leq 550^{\circ}\text{C}$, preferably $\leq 450^{\circ}\text{C}$.

The stress of the layers produced may advantageously be ≤ 200 MPa, preferably ≤ 100 MPa.

This encapsulation step is illustrated in Fig. 13a.

10

Second step:

This involves planarization of the dielectric by a CMP operation (for "*chemical mechanical planarization*" or "*chemical mechanical polishing*") or partial removal by dry etching ("*etch back*") in the case of a planarizing
 15 polymer.

There are certain polymers that have the property of being self-leveling. That is, they will fill the lower parts first, before the upper parts. However, to ensure that the cavities are filled completely, the deposit is thicker than the depth of the cavity. It is then necessary to reduce the
 20 thickness of the surplus deposit. This can be done by dry etching on the whole wafer, called "*etch back*".

It is also possible to use an operation of localized lithography / etching on the topography before CMP.

This planarization step is illustrated in Fig. 13b.

25

Third step:

This involves making primary lower apertures $\mathbf{O}_{ip}$ intended for the lower contact.

The dimensions D1, D2, D3 and D4 may typically be as follows:

30 The dimension D1 (width of dielectric on either side of the mesa of III-V material **1**) is at least 200 nm and preferably between 2 and 3 μm .

The dimension D2 (width of the primary lower apertures) may be between 20 and 50 μm .

The dimension D3 (thickness of dielectric) is between 0.5 μm and
 35 5 μm , preferably between 5 and 3 μm .

The dimension D4 (central width between the two primary lower apertures) may be between 0.5 μm and 10 μm , preferably between 1 and 5 μm .

For this, localized etching of the dielectric is carried out (in the case of several layers) to open onto the III-V material **2**. Etching may be carried out once up to the III-V material **2** by a dry etching operation. In this case the presence of an etch stop layer is optional.

Sequential etching operations may also be carried out: a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al₂O₃, SiO₂, BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the III-V material **2**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example consisting of SiN.

This step of making apertures is illustrated in Fig. 13c.

Fourth step:

This involves depositing metallization compatible with a silicon process flow to define the lower contact, making it possible to avoid the use of noble metals, metals that are not used by the silicon process flow.

Metallization compatible with a silicon process flow may be carried out according to two options:

- option 1:

(a) deposition of a metal **3** compatible with a silicon process flow, such as Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc. is carried out;

Phase stabilization may be undertaken by an optional heat treatment carried out after metal deposition;

(b) deposition of a metal **3** compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out with the aim of performing a solid-state reaction between the metal and the III-V material leading to the formation of one or more intermetallic compounds.

The deposition temperatures are preferably $\leq 450^{\circ}\text{C}$.

The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

According to option 1, the metal or the intermetallic compound is deposited and the work function of the latter is utilized. In this case annealing serves to heal the interface defects and crystallize the metal or the compound.

According to option 2, the metal is deposited, and it is reacted to form the intermetallic compound having the required work function. In this case annealing serves for the solid-state reaction.

Selective removal of the unreacted metal may be carried out after heat treatment.

An assembly **E1** illustrated in Fig. 13d is then obtained.

Fifth step:

This involves an encapsulation step of the assembly **E1** with dielectric **8**. The dielectric(s) used may be: SiN, SiO₂, Al₂O₃, polymer of the planarizing type (for example BCB, SOG). The deposit may be single-layer or multilayer. They are deposited by PVD, CVD and/or ALD;

The deposition temperature is $\leq 450^{\circ}\text{C}$, preferably $\leq 300^{\circ}\text{C}$.

This step is illustrated in Fig. 13e.

The operations of phase stabilization or of heat treatment to form one or more intermetallic compounds may be carried out at the end of this step, if they were not carried out at the end of the fourth step.

Sixth step:

This involves planarization of the dielectric by a CMP operation or an operation of the "etch back" type in the case of a planarizing polymer.

CMP or "etch back" planarization may be carried out:

- if selective removal was not carried out in the fourth step, until removal of the metal;
- if selective removal was not carried out in the fourth step, and if the operation of the CMP or "etch back" type of the metal is impossible, with stopping on the metal. The step of selective removal of the metal may then be carried out to obtain a structure as illustrated in Fig. 13f;

- if selective removal was carried out in the fourth step, until a structure is obtained as illustrated in Fig. 13f.

Typically, the height D5 shown (thickness of dielectric on top of the III-V material **1**) may be between 200 nm and 1 μm .

5 The operations of phase stabilization or of heat treatment to form one or more intermetallic compounds may be carried out at the end of this step, if they were not carried out at the end of the fourth step or at the end of the fifth step.

10 Seventh step:

This involves an operation of upper secondary lower apertures **O_{is1}** intended for the connecting pads. For this, etching of the dielectric stack is carried out, to open onto the metallization **3** at the lower level.

Etching is carried out once, as far as the metallization: dry etching.

15 In this case the presence of an etch stop layer is optional.

Sequential etching may be employed: a first dry etching is used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al₂O₃, SiO₂, BCB, SOC, preferably SiN), and then dry or wet etching is used for etching the barrier layer and the optional underlying layers, opening onto the
20 metallization **3**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or using a hard mask consisting for example of SiN. Typically the dimension D6 (width of the secondary lower apertures) of dielectric shown may be between 0.5 μm and 5 μm and is preferably
25 between 1 μm and 3 μm . This step is illustrated in Fig. 13g.

Eighth step:

This involves filling the secondary lower apertures and a CMP operation for making connecting pads. Filling of the secondary lower
30 apertures is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer **4** is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal **5** (W, Cu, AlCu, AlSi) is carried out,
35 deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads. As metal is present at the top of the cavities between two pads, short-circuiting is inevitable. The CMP operation makes it possible to remove only the metal from the pads and therefore decontact them.

5 A new assembly **E2** is produced. All of these steps are illustrated in Fig. 13h.

Ninth step:

This involves an operation of encapsulation with a dielectric **8**. The
 10 dielectric(s) used may be: SiN, SiO₂, Al₂O₃, a polymer of the planarizing type (for example BCB, SOG). The deposit may be single-layer or multilayer. The dielectrics are deposited by PVD, CVD and/or ALD. The deposition temperature is $\leq 450^{\circ}\text{C}$, preferably $\leq 300^{\circ}\text{C}$. Typically the height D7 of dielectric shown may be between 200 nm and 1 μm and is preferably
 15 between 200 nm and 500 nm. This step is illustrated in Fig. 13i.

Tenth step:

This involves making a primary upper aperture **O_{sp}** for forming an upper contact.

20 This involves etching the dielectric stack to open onto the III-V material **1**. Etching may be carried out once as far as the III-V material **1** by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may be employed: a first dry etching is used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al₂O₃,
 25 SiO₂, BCB, SOC preferably SiN) and then dry or wet etching is used for etching the barrier layer and the optional underlying layers, opening onto the III-V material **1**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example
 30 consisting of SiN.

This step is illustrated in Fig. 13j.

Eleventh step:

This involves the deposition of the metallization **3** compatible with a silicon process flow intended for the upper contact. Metallization compatible with a silicon process flow may be carried out in two ways:

5 - option 1:

(a) deposition of a metal **3** compatible with a silicon process flow such as Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc. is carried out;

Phase stabilization may be undertaken by an optional heat treatment carried out after metal deposition;

10 (b) deposition of a metal **3** compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out with the aim of performing a solid-state reaction between the metal and the
15 III-V material leading to the formation of one or more intermetallic compounds.

The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

Selective removal of the unreacted metal may be carried out after heat treatment. A third assembly **E3** is obtained.

20 This step is illustrated in Fig. 13k.

Twelfth step:

This involves encapsulation of the third assembly **E3**. The dielectric(s) used may be: SiN, SiO₂, Al₂O₃, polymer of the planarizing type
25 (for example BCB), SOG. The deposit may be single-layer or multilayer. They are deposited by PVD, CVD and/or ALD. The deposition temperature is $\leq 450^{\circ}\text{C}$, preferably $\leq 300^{\circ}\text{C}$.

This step is illustrated in Fig. 13l.

The operations of phase stabilization or of heat treatment to form
30 one or more intermetallic compounds may be carried out at the end of this step, if they were not carried out at the end of the eleventh step.

Thirteenth step:

This involves a planarization operation.

35 Planarization or etch back may be carried out:

- if selective removal was not carried out in the eleventh step, until removal of the metal;
- if selective removal was not carried out in the eleventh step, and if the operation of CMP or "*etch back*" of the metal is impossible, with stopping on the metal. The step of selective removal of the metal may then be carried out to obtain a structure as shown in Fig. 4m;
- if selective removal was carried out in the eleventh step, until the structure illustrated in Fig. 13m is obtained.

The operations of phase stabilization or of heat treatment to form one or more intermetallic compounds may be carried out at the end of this step, if they were not carried out at the end of the eleventh step or at the end of the twelfth step.

Fourteenth step:

This involves making a secondary upper aperture O_{ss} and making additional upper apertures O_{is2} on top of at least the contact pads of a lower contact.

This involves etching the dielectric stack to open onto the metallization of the upper contact level and onto the contact pads of the lower contact.

Etching is carried out once, as far as the metallization **3** and as far as the pads of the lower level, by dry etching. In this case the presence of an etch stop layer is optional.

Operations of sequential etching may be carried out: a first dry etching is used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC, preferably SiN) on the upper contact bottom metallization and on the pads of the lower contact.

Dry or wet etching may be used for etching the barrier layer and the optional underlying layers, opening onto the metallization **3**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or using a hard mask consisting for example of SiN.

This step is illustrated in Fig. 13n.

Fifteenth step:

This involves filling the apertures defined in the preceding step.

Filling of the apertures is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal (W, Cu, AlCu, AlSi etc.) is carried out, deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads.

This step is illustrated in Fig. 13o and leads to production of the upper contacts C_{sup} and lower contacts C_{inf} .

An alternative to the first process example may comprise sequential production of the primary apertures coupled to simultaneous production of the secondary apertures.

Second example of a process according to the invention comprising the production of upper contacts followed by the production of lower contacts according to the second alternative of the invention:

First step:

This involves encapsulation of the structure previously produced, comprising a mesa of a first III-V material **1** on the surface of a base of a III-V material **2** on a substrate **9**.

The dielectric(s) **8** used may be: SiN, SiO₂, Al₂O₃, polymer of the planarizing type (for example BCB, SOG).

The deposit may be single-layer or multilayer.

The dielectrics are deposited by PVD, CVD and/or ALD. The deposition temperature may typically be $\leq 450^{\circ}\text{C}$, preferably $\leq 300^{\circ}\text{C}$.

The stress of the layers produced may be ≤ 200 MPa, preferably ≤ 100 MPa. This encapsulation step is illustrated in Fig. 14a.

Second step:

This involves planarization of the dielectric by an operation of the CMP type or "*etch back*" type in the case of a planarizing polymer. It is also possible to use an operation of localized lithography / etching on the topography before CMP. This planarization step is illustrated in Fig. 14b.

Third step:

This involves making a primary upper aperture O_{sp} intended for the upper contact.

For this, localized etching of the dielectric is carried out (in the case of several layers) to open onto the III-V material **1**. Etching may be carried out once up to the III-V material **1** by a dry etching operation. In this case the presence of an etch stop layer is optional.

Sequential etching operations may also be carried out: a first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al₂O₃, SiO₂, BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the III-V material **1**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example consisting of SiN.

This step of making apertures is illustrated in Fig. 14c.

Fourth step:

This involves depositing a metallization **3** compatible with a silicon process flow on the III-V material **1**.

Metallization may be carried out according to two options:

- option 1:

(a) deposition of a metal **3** compatible with a silicon process flow such as Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc. is carried out;

Phase stabilization may be undertaken by an optional heat treatment carried out after metal deposition;

(b) deposition of a metal **3** compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out with the aim of performing a solid-state reaction between the metal and the III-V material leading to the formation of one or more intermetallic compounds.

The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

Selective removal of the unreacted metal may be carried out after heat treatment.

An assembly **E1'** illustrated in Fig. 14d is then obtained.

Fifth step:

This involves a step of encapsulation of the assembly **E1'** with dielectric **8**. The dielectric(s) used may be: SiN, SiO₂, Al₂O₃, polymer of the planarizing type (for example BCB, SOG). The deposit may be single-layer or multilayer. They are deposited by PVD, CVD and/or ALD.

The deposition temperature is $\leq 450^{\circ}\text{C}$, preferably $\leq 300^{\circ}\text{C}$.

This step is illustrated in Fig. 14e.

The operations of phase stabilization or of heat treatment to form one or more intermetallic compounds may be carried out at the end of this step, if they were not carried out at the end of the fourth step.

Sixth step:

This involves planarization of the dielectric by an operation of the CMP type or "*etch back*" type in the case of a planarizing polymer. These operations may be carried out:

- if selective removal was not carried out in the fourth step, until removal of the metal;
- if selective removal was not carried out in the fourth step, and if the operation of the CMP type or "*etch back*" type of the metal is impossible, with stopping on the metal. The step of selective removal of the metal may then be carried out to obtain a structure as illustrated in Fig. 14f;
- if selective removal was carried out in the fourth step, until a structure is obtained as illustrated in Fig. 14f.

The operations of phase stabilization or of heat treatment to form one or more intermetallic compounds may be carried out at the end of this step, if they were not carried out at the end of the fourth step or at the end of the fifth step.

5

Seventh step:

This involves an operation of secondary upper apertures O_{ss} intended for the connecting pads. For this, etching of the dielectric stack is carried out, to open onto the metallization **3** at the upper level.

10

Etching is carried out once, as far as the metallization, which may be by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may be employed: a first dry etching is used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC, preferably SiN), and then dry or wet etching is used for etching the barrier layer and the optional underlying layers, opening onto the metallization **3**.

15

Said etching operation(s) may be carried out directly via the resin used for photolithography or using a hard mask consisting for example of SiN.

20

This step is illustrated in Fig. 14g.

Eighth step:

This involves filling the apertures O_{ss} and a CMP operation for making connecting pads.

25

Filling of the apertures O_{ss} is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal (W, Cu, AlCu, AlSi, etc.) is carried out, deposited by CVD, ECD or PVD.

30

CMP is finally carried out for decontacting the pads. A new assembly **E2'** is produced. All of these steps are illustrated in Fig. 14h.

Ninth step:

This involves making primary lower apertures O_{ip} for producing lower contacts.

This involves etching the dielectric stack to open onto the III-V material **2**. Etching may be carried out once as far as the III-V material **2** by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may be employed: a first dry etching is used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al₂O₃, SiO₂, BCB, SOC preferably SiN) and then dry or wet etching is used for etching the barrier layer and the optional underlying layers, opening onto the III-V material **2**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example consisting of SiN.

This step is illustrated in Fig. 14i.

Tenth step:

This involves deposition of the metallization **3** compatible with a silicon process flow intended for the lower contacts. The CMOS compatible metallization may be carried out in two ways:

It involves deposition of the metallization **3** compatible with a silicon process flow intended for the upper contact. Metallization may be carried out in two ways:

- option 1:

(a) deposition of a metal **3** compatible with a silicon process flow such as Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc. is carried out;

Phase stabilization may be undertaken by an optional heat treatment carried out after metal deposition;

(b) deposition of a metal **3** compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out with the aim of performing a solid-state reaction between the metal and the III-V material leading to the formation of one or more intermetallic compounds.

The deposition temperatures are preferably $\leq 450^{\circ}\text{C}$.

The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

Selective removal of the unreacted metal may be carried out after heat treatment. A third assembly **E3'** is obtained.

5 This step is illustrated in Fig. 14j.

Eleventh step:

This involves a step of encapsulation of the assembly **E3'** with dielectric **8**. The dielectric(s) used may be: SiN, SiO₂, Al₂O₃, polymer of the
10 planarizing type (for example BCB), SOG. The deposit may be single-layer or multilayer. They are deposited by PVD, CVD and/or ALD.

The deposition temperature is $\leq 450^{\circ}\text{C}$, preferably $\leq 300^{\circ}\text{C}$.

This step is illustrated in Fig. 14k.

The operations of phase stabilization or of heat treatment to form
15 one or more intermetallic compounds may be carried out at the end of this step, if they were not carried out at the end of the tenth step.

Twelfth step:

This involves an operation of planarization of the dielectric by an
20 operation of the CMP type or "*etch back*" type in the case of a planarizing polymer.

This step is illustrated in Fig. 14l.

The operations of phase stabilization or of heat treatment to form one or more intermetallic compounds may be carried out at the end of this
25 step, if they were not carried out at the end of the tenth step or at the end of the twelfth step.

Thirteenth step:

This involves an operation of secondary lower apertures **O_{is}**
30 intended for the connecting pads. For this, etching of the dielectric stack is carried out, to open onto the metallization **3** at the lower level.

Etching is carried out once, as far as the metallization by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may be employed: a first dry etching is used for
35 etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al₂O₃,

SiO₂, BCB, SOC, preferably SiN), and then dry or wet etching is used for etching the barrier layer and the optional underlying layers, opening onto the metallization **3**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or using a hard mask consisting for example of SiN. Typically the height D6 of dielectric shown may be between 0.5 μm and 5 μm and is preferably between 1 μm and 3 μm.

This step is illustrated in Fig. 14m.

10 Fourteenth step:

This involves filling the apertures defined in the preceding step.

Filling of the apertures is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- 15 - deposition of a filling metal (W, Cu) is carried out, deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads.

This step is illustrated in Fig. 14n and leads to production of the upper contacts **C_{sup}** and lower contacts **C_{inf}**.

An alternative to the second process example may comprise sequential production of the primary apertures coupled to simultaneous production of the secondary apertures.

25

Third example of a process according to the invention comprising the simultaneous production of an upper contact and a lower contact according to the second alternative of the invention:

30 First step:

This involves encapsulation of the structure previously produced, comprising a mesa of a first III-V material **1** on the surface of a base of a III-V material **2** on a substrate **9**.

The dielectric(s) **8** used may be: SiN, SiO₂, Al₂O₃, polymer of the planarizing type (for example BCB, SOG).

35

The deposit may be single-layer or multilayer.

The dielectrics are deposited by PVD, CVD and/or ALD. The deposition temperature may typically be $\leq 450^{\circ}\text{C}$, preferably $\leq 300^{\circ}\text{C}$.

The stress of the layers produced may be ≤ 200 MPa, preferably $\leq$
 5 100 MPa. This encapsulation step is illustrated in Fig. 15a.

Second step:

This involves planarization of the dielectric by an operation of the CMP type or "etch back" type in the case of a planarizing polymer. It is also
 10 possible to use an operation of localized lithography / etching on the topography before CMP. This planarization step is illustrated in Fig. 15b.

Third step:

This involves making primary lower apertures $\mathbf{O}_{ip}$ intended for the
 15 lower contact and a primary upper aperture $\mathbf{O}_{sp}$ intended for the upper contact.

For this, localized etching of the dielectric is carried out (in the case of several layers) to open onto the III-V material **2** and to open onto the III-V material **1**.

20 Etching may be carried out once up to the III-V material **2** and up to the material **1** by a dry etching operation. In this case the presence of an etch stop layer is optional.

Sequential etching operations may also be carried out: a first dry etching used for etching a part of the dielectric stack, stopping on a barrier
 25 layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the III-V material **2** and onto the III-V material **1**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or preferably using a hard mask for example
 30 consisting of SiN.

This step of making apertures is illustrated in Fig. 15c.

Fourth step:

This involves depositing a metallization **3** compatible with a silicon
 35 process flow on the III-V material **1** and on the III-V material **2**.

This involves deposition of the metallization **3** compatible with a silicon process flow intended for the upper contact. Metallization may be carried out in two ways:

- option 1:

- 5 (a) deposition of a metal **3** compatible with a silicon process flow such as Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc. is carried out;

Phase stabilization may be undertaken by an optional heat treatment carried out after metal deposition;

- 10 (b) deposition of a metal **3** compatible with a silicon process flow such as Ni, Ti and alloy such as NiPt, NiTi, NiCo, etc. is carried out;

- option 2: deposition of a metal compatible with a silicon process flow (Ni, Ti and their alloys) is carried out; then a heat treatment is carried out with the aim of performing a solid-state reaction between the metal and the III-V material leading to the formation of one or more intermetallic
15 compounds.

The annealing temperature is preferably $\leq 450^{\circ}\text{C}$.

Selective removal of the unreacted metal may be carried out after heat treatment.

An assembly **E1**" illustrated in Fig. 15d is then obtained.

20

Fifth step:

This involves a step of encapsulation of the assembly **E1**" with dielectric **8**. The dielectric(s) used may be: SiN, SiO₂, Al₂O₃, polymer of the planarizing type (for example BCB, SOG). The deposit may be single-layer or
25 multilayer. They are deposited by PVD, CVD and/or ALD.

The deposition temperature is $\leq 450^{\circ}\text{C}$, preferably $\leq 300^{\circ}\text{C}$.

This step is illustrated in Fig. 15e.

The operations of phase stabilization or of heat treatment to form one or more intermetallic compounds may be carried out at the end of this
30 step, if they were not carried out at the end of the fourth step.

Sixth step:

This involves planarization of the dielectric by an operation of the CMP type or "etch back" type in the case of a planarizing polymer. These
35 operations may be carried out:

- if selective removal was not carried out in the fourth step, until removal of the metal;
- if selective removal was not carried out in the fourth step, and if the operation of the CMP type or "*etch back*" type of the metal is impossible, with stopping on the metal. The step of selective removal of the metal may then be carried out to obtain a structure as illustrated in Fig. 15f;
- if selective removal was carried out in the fourth step, until a structure is obtained as illustrated in Fig. 15f.

The operations of phase stabilization or of heat treatment to form one or more intermetallic compounds may be carried out at the end of this step, if they were not carried out at the end of the fourth step or at the end of the fifth step.

Seventh step:

This involves an operation of secondary upper apertures O_{ss} and secondary lower apertures O_{ls} intended for the connecting pads. For this, etching of the dielectric stack is carried out, to open onto the metallization **3** at the upper level and at the lower level.

Etching is carried out once, as far as the metallization by dry etching. In this case the presence of an etch stop layer is optional.

Sequential etching may be employed: a first dry etching is used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC, preferably SiN), and then dry or wet etching is used for etching the barrier layer and the optional underlying layers, opening onto the metallization **3**.

Said etching operation(s) may be carried out directly via the resin used for photolithography or using a hard mask consisting for example of SiN.

This step is illustrated in Fig. 15g.

Eighth step:

This involves filling the apertures defined in the preceding step.

Filling of the apertures is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- deposition of a filling metal (W, Cu) is carried out, deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads.

This step is illustrated in Fig. 15h and leads to production of the upper contacts C_{sup} and lower contacts C_{inf} .

10 An alternative to the three examples of processes described above consists of making contact pads having several segments for the lower contact.

15 Fourth process example according to the second alternative of the invention:

First step:

According to substeps identical to those described above, an assembly is produced comprising:

- 20 - a substrate **9**;
- a III-V material **1**;
- a III-V material **2**;
- metallizations **3**.

The assembly is encapsulated in a dielectric **8** and is illustrated in Fig. 16a.

25

Second step:

This involves making secondary lower apertures O_{is1} by partial etching of the previously constituted assembly, or by partial etching of the dielectric **8**. Dry etching may be used. In this case the presence of an etch stop layer is optional.

30

Said etching operation(s) may be carried out directly via a resin used for photolithography or using a hard mask consisting for example of SiN.

This step is illustrated in Fig. 16b.

35

Third step:

A second etching operation is carried out for a second time, for lengthening the secondary lower apertures, by making the apertures O_{is2} in the prolongation of the apertures previously produced O_{is1} , and making
 5 secondary upper apertures O_{ss} so as to open onto the metallizations **3**.

The etching operation may be carried out once as far as the metallization, by dry etching. In this case the presence of an etch stop layer is optional.

Preferably, sequential etching operations may be carried out: a
 10 first dry etching used for etching a part of the dielectric stack, stopping on a barrier layer (SiN, Al_2O_3 , SiO_2 , BCB, SOC, preferably SiN) and then using dry or wet etching for etching the barrier layer and the optional underlying layers, opening onto the metallizations.

Said etching operation(s) may be carried out directly via the resin
 15 used for photolithography or using a hard mask consisting for example of SiN.

This step is illustrated in Fig. 16c.

Fourth step:

20 This involves filling the apertures defined in the preceding step.

Filling of the apertures is carried out twice:

- deposition of a diffusion barrier / of a keying or nucleation layer is carried out. It may consist of TiN, Ti/TiN, TaN, Ta/TaN or of W deposited by CVD, PVD or ALD;
- 25 - deposition of a filling metal (W, Cu, AlCu, AlSi) is carried out, deposited by CVD, ECD or PVD.

A CMP operation is finally carried out for decontacting the pads.

This step is illustrated in Fig. 16d and leads to production of the upper contacts C_{sup} and lower contacts C_{inf} .

30

In general, it is possible to produce an additional contact level on the surface of the planar contacts previously produced and notably described in the preceding examples of the process according to the invention.

An additional step may thus be carried out by additional deposition
 35 of dielectric **8**, then making additional upper and lower apertures by etching

and filling these apertures to define the contacts $C_{inf/supl}$ and $C_{sup/supl}$ as illustrated in Fig. 17.

For this, in the additional upper and lower apertures, a barrier **7** is deposited, which may be of TiN, Ti/TiN, TaN, Ta/TaN, W and filling with a metal **6**, which may be W, Cu or Al, AlCu, AlSi.

It should be noted that the additional contact level may also be produced by etching a metallic stack made beforehand via a resin or a hard mask.

10

Example of a laser component produced by the process of the invention:

The process of the present invention may be used advantageously for making a laser based on III-V materials:

15

A substrate **90** of SiO₂ comprises a silicon guide **91**, on top of which the following are produced:

20

- a base of second III-V material **2**, which may be of n-doped InP and a mesa **1** comprising a multiple quantum well structure that may be made of InGaAsP with different dopings and a layer of p-doped InGaAs, the nature of the III-V materials determining the emission wavelength;
- the dielectric **8** may be of SiN, SiO₂, or of polymer of the planarizing type for example based on BCB;
- the contact bottom metallization **3** may be for example of Ni, Ti, or alloys thereof (Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc.);
- the diffusion barrier to F and/or the keying layer to W **4** may be of TiN, Ti/TiN, TaN, Ta/TaN, W;

25

The filling metal **5** may be Cu or Al, AlCu, AlSi.

This example of a laser is illustrated in Fig. 18.

30

Example of a vertically emitting laser component of the VCSEL type:

It may be recalled that in general, a vertical-cavity surface-emitting laser diode, or VCSEL, is a type of semiconductor diode laser emitting a

35

laser beam perpendicularly to the surface, in contrast to the conventional edge-emitting semiconductor lasers.

This example of a laser mainly comprises the same type of structure as that described in the preceding example.

5 However, in order to allow emission of laser radiation at the top of the structure, the upper contact is made circular.

This example of a component comprises a silicon substrate **9** on top of which the following are produced: a base of second III-V material **2**, which may be of n-doped InP, and a mesa **1** comprising a multiple quantum well structure that may be based on InGaAsP, AlGaAs, GaAs, InGaAsN and
10 a layer of p-doped InGaAs, the nature of the III-V materials determining the emission wavelength.

The dielectric **8** may be of SiN, SiO₂, or of polymer of the planarizing type for example based on BCB.

15 The contact bottom metallization **3** may be for example of Ni, Ti, or alloys thereof (Ni₂P, Ni₃P, NiGe, TiP, TiGe, etc.).

The diffusion barrier to F and/or the keying layer to W **4** may be of TiN, Ti/TiN, TaN, Ta/TaN, W.

The filling metal **5** may be Cu or Al, AlCu, AlSi.

20 The metallizations **3** and the elements **4** and **5** constitute the contacts **C_{sup}** and **C_{inf}**.

Owing to the circular upper contact **C_{sup}**, the laser beam may be extracted from the upper surface of the component.

This example of a laser is illustrated in Fig. 19.

25

For the laser components described above, the integration of planar contacts typically opens the route to 3D integration, by means of hybrid or direct bonding (for example photonic / electronic) or chip transfer by means of bumps.

30 In the context of III-V/Si co-integration, production of a planarized back-end also allows connection to be envisaged on the devices of the lower levels (back-end front side or intermetallic for example).

An example is given in Fig. 20 in the context of photonic integration with production of the assembly of contacts described above **C_{sup}**
35 and **C_{inf}**, on the III-V component (laser) and on the back-end of the silicon

part. The additional contacts are provided by the pads P_{Mi} which connect metallic levels M_i , integrated in dielectric **8**. Typically, the substrate **91** may be silicon, and the dielectric **90** may be SiO_2 .

5 Example of a component used in applications of the solar cell type in which a series of different III-V materials is stacked, making it possible to diversify the emission wavelengths

This example of a component comprises a silicon substrate **9**, on top of which the following are stacked, as illustrated in Fig. 21:

- 10 - a III-V material **22** located at a so-called lower level;
 - a III-V material **21** located at a so-called intermediate level;
 - a III-V material **10** located at a so-called upper level.

The component comprises:

- 15 - contacts C_{inf} of material **22**;
 - contacts C_{int} of material **21**;
 - contacts C_{sup} of materials **10**.

The contacts C_{inf} are produced by filling the stack of apertures made successively: O_{is1} , O_{is2} and O_{is3} .

20 The contacts C_{int} are produced by filling the stack of apertures made successively: O_{ts1} , O_{ts2} .

The contacts C_{sup} are produced by filling the aperture: O_{ss} .

Typically, the III-V materials used may notably be: InGaAsN, BInGaAs, InGaN, GaInP, GaInAsP, GaAs.

25 A variant of the example illustrated in Fig. 21 is illustrated in Fig. 22 and shows a mixed solution of the two alternatives described above: apertures of a single type on two of the III-V materials **10** and **22** and primary apertures and secondary apertures on the other III-V material **21**.

30 The contacts are produced on two III-V materials of different natures (InP and InGaAs) with different types of doping. Regardless of the contact produced, by solid-state reaction or simply by deposition of the electrode, the interface resistivity R_c is different.

35 When the interface resistivity R_c is low and the transfer length is smaller than the secondary aperture, only a single aperture may be made for contacting the III-V material.

Otherwise it is necessary to make a double aperture. It is possible to have both conditions on both layers III-V and therefore in certain cases it is possible to adopt a solution mixing the two alternatives.

The solution consisting of making a single type of aperture is still a
5 favored solution when it is adapted as it minimizes the number of steps and there is a single set of operations (photo / litho / etching).

The applicant explains below the conditions for choosing between the two alternatives for making the contact:

- 10
- a single type of aperture for carrying out the contact bottom metallization and filling;
 - two types of aperture: a very large primary aperture for metallization and then secondary apertures for making the contact and filling.

15

The criterion of choice is the transfer length. This length is the length that will be necessary and therefore traversed by the lines of the electric field for passing from the metallic contact in the III/V semiconductor.

Figs. 23a and 23b shows two contacts with the reference Metal
20 and electric field lines that pass from one electrode to the other, passing through the semiconductor substrate.

The transfer length is defined by the distance (as well as the area) of injection of the carriers between the edges of the metal pads, L_t , which is used for injecting the current into the semiconductor:

25

$$L_T = \sqrt{\frac{\rho_C}{R_{SK}}}$$

This distance depends essentially on two parameters: the contact resistivity ρ_C and the sheet resistance of the underlying substrate in contact.

With these elements, it is understood that:

- 30
- if the length L_t is less than the dimension of the secondary apertures ($L_t < a$), integration may be envisaged with this type of aperture alone: contact bottom metallization and filling;

- if the length L_t is greater than the dimension of the secondary apertures ($L_t > a$), in this case two types of apertures should be adopted, metallization of a larger surface, which in the context of the present patent application is greater than the dimension L_t , and then smaller secondary apertures for filling.

5

The transfer length is measured experimentally by making simple structures (TLM) that give access to this quantity directly. It is sufficient to make pads on the doped semiconductor and measure the current between each of these pads.

10

Fig. 24 shows schematically this type of TLM structure with identical contacts with surface area dimensions $W.a$, separated by increasing distances l_i , W being the width of the contact, defined as being perpendicular to the lines of the electric field.

By plotting the resistance as a function of the distance, a straight line is obtained if the contacts have low resistance and at the intersection of this straight line with the ordinate the following is obtained: 2 x the contact resistance and at the intersection with the abscissa: 2 x the transfer length, as shown in Fig. 25, assuming $R_{sh} = R_{sk}$ (resistance under the pad), the total resistance corresponding to the contact resistances, the sheet resistances and the resistance of the substrate.

20

Although approximate in the context of the contacts obtained by solid-state reaction, this method is sufficiently accurate for distinguishing the two cases of interest and making the optimum choice of integration.

It should be noted that if $L_t > a$, the simplest and least expensive integration may nevertheless be selected by making a compromise on the total resistance of the device provided the latter remains acceptable for operation of said device (desired performance and acceptable heating for the life of the device in question).

25

CLAIMS

1. A process for producing a component comprising a structure of III-V material(s) on the surface of a substrate, said structure comprising at least one upper contact level (N_{sup}) defined on the surface of a first III-V material (1) and a lower contact level (N_{inf}) defined on the surface of a second III-V material (2), comprising:

- successive operations of encapsulation with at least one dielectric comprising encapsulation of said structure with at least one dielectric (8);

- making, in said dielectric (8), at least one upper aperture (O_s) on the surface of said first III-V material (1) and at least one lower aperture (O_i) on the surface of said second III-V material (2), so as to define contact bottom zones on said first III-V material and on said second III-V material;

- carrying out contact bottom metallizations (3) in said at least upper aperture (O_s) and in said at least lower aperture (O_i);

- at least partial filling of said at least upper aperture (O_s) and at least partial filling of said at least lower aperture (O_i) with at least one metallic material (5) so as to produce at least one upper contact pad and at least one lower contact pad;

- the contact bottom metallizations and the contact pads defining at least one upper contact of said first III-V material in contact with said upper contact level (N_{sup}) and at least one lower contact of said second III-V material in contact with said lower contact level (N_{inf});

- at least said upper contact and at least said lower contact are integrated in dielectric and have an upper surface defined in one and the same plane.

2. The production process as claimed in claim 1, in which the structure has a lower base of second III-V material (2) and a mesa of first III-V material (1) located above said base.

3. The production process as claimed in one of claims 1 or 2, characterized in that it comprises successively making at least one lower aperture and then at least one upper aperture.

4. The process as claimed in claim 3, in which at least said lower aperture is made in several steps defining a first lower aperture (O_{i1}) and a second lower aperture (O_{i2}), superposed on one another.

5

5. The process as claimed in claim 3, in which said lower aperture comprises, superposed, a contact bottom metallization (**3**), a metallic filling, a metallic interface (**3**) identical to the contact bottom metallization, a metallic filling.

10

6. The production process as claimed in one of claims 1 or 2, characterized in that it comprises successively making at least one upper aperture and then at least one lower aperture.

15

7. The production process as claimed in claim 1 or 2, characterized in that it comprises simultaneously making at least one upper aperture and at least one lower aperture

8. The production process as claimed in one of claims 1 to 7, in which the width (D2) of at least said upper aperture and/or of at least said lower aperture is (are) between 0.5 μm and 10 μm and preferably between 1 μm and 5 μm .

20

9. The production process as claimed in claim 1 or 2, comprising:

25

- making at least one primary upper aperture (O_{sp}) on the surface of said first III-V material (**1**) and at least one primary lower aperture (O_{ip}) on the surface of said second III-V material (**2**);

- carrying out contact bottom metallizations (**3**) in said at least primary upper aperture and in said at least primary lower aperture;

30

- encapsulation of said at least primary upper aperture (O_{sp}) and of said at least primary lower aperture (O_{ip}) with at least one dielectric (**8**);

- making at least one secondary upper aperture (O_{ss}) in the dielectric located in said at least primary upper aperture (O_{sp}), and making at least one secondary lower aperture (O_{is}) in the dielectric located in said

35

primary lower aperture (O_{ip});

- filling said at least secondary upper aperture (O_{ss}) and said at least secondary lower aperture (O_{is}) with at least one metallic material (5) so as to produce at least one upper contact pad and at least one lower contact pad;

5 - filling said at least upper aperture (O_{ss}) and said at least lower aperture (O_{is}) with at least one metallic material (5) so as to produce at least one upper contact pad and at least one lower contact pad.

10 10. The production process as claimed in claim 9, characterized in that it comprises successively making at least one primary upper aperture and then at least one primary lower aperture.

15 11. The production process as claimed in claim 9, characterized in that it comprises simultaneously making at least one secondary upper aperture and at least one secondary lower aperture.

12. The production process as claimed in claims 9 to 11, characterized in that it comprises:

- 20 - encapsulation of an assembly comprising the III-V material (1) covered with a metallization (3) and the III-V material (2) covered with a metallization (3), with dielectric;
- making at least one secondary lower aperture (O_{is1}) opposite the second III-V material (2);
- 25 - making at least one secondary upper aperture (O_{ss}) above said first III-V material (1) and making at least one additional secondary lower aperture (O_{is2}) above at least said secondary lower aperture (O_{is1});
- 30 - filling at least said secondary upper aperture (O_{ss}), at least one additional secondary lower aperture (O_{is2}) and at least said secondary lower aperture (O_{is1}).

35 13. The production process as claimed in one of claims 9 or 10, characterized in that, the structure comprising at least one so-called upper III-V material (10), a so-called intermediate III-V material (21), a second so-called lower III-V material (22), the process comprises:

- making at least one primary upper aperture, at least one primary intermediate aperture, at least one primary lower aperture;
- 5 - making at least one secondary upper aperture, at least one secondary intermediate aperture and at least one secondary lower aperture;
- filling said apertures.

14. The production process as claimed in claim 13, in which:
- 10 - at least said secondary lower aperture comprises three portions with different dimensions (O_{is1} , O_{is2} , O_{is3});
 - at least said secondary intermediate aperture comprises two portions with different dimensions (O_{ts1} , O_{ts2});
 - 15 - at least said secondary upper aperture comprises a portion (O_{ss}).

15. The production process as claimed in claim 9, characterized in that it comprises the following steps:

- encapsulating said structure with a first dielectric;
- 20 - making at least one primary lower aperture (O_{ip}) opening onto said second III-V material (2);
- depositing metallization on the surface of said first dielectric and on the surface of said second III-V material (2) defining a lower contact bottom metallization and a first assembly (E1);
- 25 - encapsulation of said first assembly (E1) with a second dielectric;
- planarization of said encapsulated first assembly;
- making at least one secondary lower aperture (O_{is1}) opening onto said lower contact bottom metallization;
- 30 - filling, with at least one metallic material, said at least secondary lower aperture defining at least one contact pad of said lower contact and a second assembly (E2);
- encapsulation of said second assembly (E2) with a third dielectric;

- making at least one primary upper aperture above said first III-V material (**1**);
- depositing metallization on the surface of said third dielectric material and of said upper aperture defining an upper contact bottom metallization and a third assembly (**E3**);
- encapsulation of said third assembly with a fourth dielectric;
- planarization of said third assembly;
- making at least one secondary upper aperture (**O_{ss}**) above said upper contact bottom metallization and at least one upper aperture (**O_{is2}**) above at least said contact pad of said lower contact;
- filling, with at least one metallic material, said at least secondary upper aperture above said upper contact bottom metallization and said at least upper aperture above at least said contact pad of said lower contact, defining at least one upper pad for upper contact and at least one prolongation of lower contact pad, said upper contact (**C_{sup}**) and at least said lower contact (**C_{inf}**) having a surface defined in one and the same plane.

20

16. The production process as claimed in claim 9, characterized in that it comprises the following steps:

- encapsulation of said structure with a first dielectric;
- making at least one primary upper aperture (**O_{sp}**) opening onto said first III-V material (**1**);
- depositing metallization on the surface of said first dielectric and on the surface of said first III-V material (**1**) defining an upper contact metallization and a first assembly (**E1'**);
- encapsulation of said first assembly (**E1'**) with a second dielectric;
- planarization of said encapsulated first assembly;
- making at least one secondary upper aperture (**O_{ss}**) opening onto said upper contact bottom metallization;

25

30

- filling, with at least one metallic material, said at least secondary upper aperture defining at least one contact pad of said upper contact and a second assembly (**E2'**);
- making at least one primary lower aperture (**O_{ip}**) above said second III-V material (**2**);
- depositing metallization on the surface of said first dielectric material and of said primary lower aperture defining a lower contact metallization and a third assembly (**E3'**);
- encapsulation of said third assembly with a fourth dielectric;
- planarization of said third assembly;
- making at least one secondary lower aperture (**O_{is}**) above said lower contact bottom layer;
- filling said at least secondary lower aperture, defining at least one lower contact pad, said upper contact (**C_{sup}**) and at least said lower contact (**C_{inf}**) having a surface defined in one and the same plane

17. The production process as claimed in claim 9, characterized in that it comprises:

- simultaneously making at least one primary upper aperture and at least one primary lower aperture;
- simultaneously making at least one secondary upper aperture and at least one secondary lower aperture.

18. The production process as claimed in one of claims 1 to 17, characterized in that it comprises making an additional contact level on the surface of said planar contacts, comprising:

- additional deposition of dielectric (**8**);
- making at least one lower additional aperture and at least one upper additional aperture;
- filling said additional apertures with at least one metallic material to define at least one lower additional contact (**C_{inf/supl}**) and at least one upper additional contact (**C_{sup/supl}**).

19. The production process as claimed in one of claims 9 to 18, in which:

- the primary lower apertures have a width (D2) between 20 μm and 50 μm ;
- 5 - the secondary lower apertures have a width (D6) between 0.5 μm and 5 μm , preferably between 1 μm and 3 μm .

20. The production process as claimed in one of claims 9 to 18, in which:

- 10 - the primary lower apertures have a width (D2) between 20 μm and 50 μm ;
- the secondary lower apertures have a width (D6) between 0.5 μm and 5 μm , preferably between 1 μm and 3 μm .

15 21. The production process as claimed in one of claims 1 to 20, characterized in that the first III-V material and/or the second III-V material are selected from: InP, $\text{In}_{1-x}\text{Ga}_x\text{As}$ (with $0 \leq x \leq 1$), GaAs, InAs, GaSb, $\text{In}_{1-x}\text{Ga}_x\text{Sb}$, $\text{In}_x\text{Ga}_{1-x}\text{As}_{1-y}\text{P}_y$, $\text{Ga}_{1-x}\text{In}_x\text{P}$, $\text{In}_x\text{Ga}_{1-x}\text{As}_{1-y}\text{N}_y$, $\text{B}_x\text{In}_y\text{Ga}_{1-x-y}\text{As}$.

20 22. The production process as claimed in one of claims 1 to 21, characterized in that the substrate is of silicon.

23. The production process as claimed in one of claims 1 to 22, in which the dielectric or dielectrics are selected from: SiN, SiO_2 , Al_2O_3 , a
25 planarizing polymer that may be based on benzocyclobutene (BCB) or SOG.

24. The production process as claimed in one of claims 1 to 23, in which a metal such as Ni_2P , Ni_3P , NiGe, TiP, TiGe is deposited in said primary apertures.

30

25. The production process as claimed in one of claims 1 to 23, in which a metal such as Ni, Ti and alloy such as NiPt, NiTi, NiCo are deposited in said primary apertures.

26. The production process as claimed in one of claims 1 to 24, in which the deposition of metallization is followed by a heat treatment to form one or more intermetallic compounds

5 27. The production process as claimed in one of claims 1 to 26, characterized in that the filling operations comprise:

- depositing a diffusion barrier, which may consist of one or more layers of material selected from: TiN, Ti/TiN, TaN, Ta/TaN, W;
- depositing a filling metal selected from: W, Cu, Al, AlCu, AlSi.

10

28. The production process as claimed in one of claims 1 to 27, in which the component is a laser, and said process comprises an operation for making a guide (91) of semiconductor material, which may be Si, in a dielectric substrate (90), which may be of SiO₂.

15

29. The production process as claimed in one of claims 1 to 27, in which the component is a laser, and said process comprises making a circular upper contact to allow vertical emission of the laser radiation, at the center of said upper contact.

20

30. A component obtained according to the process as claimed in one of claims 1 to 29.

25

30

35

1/29

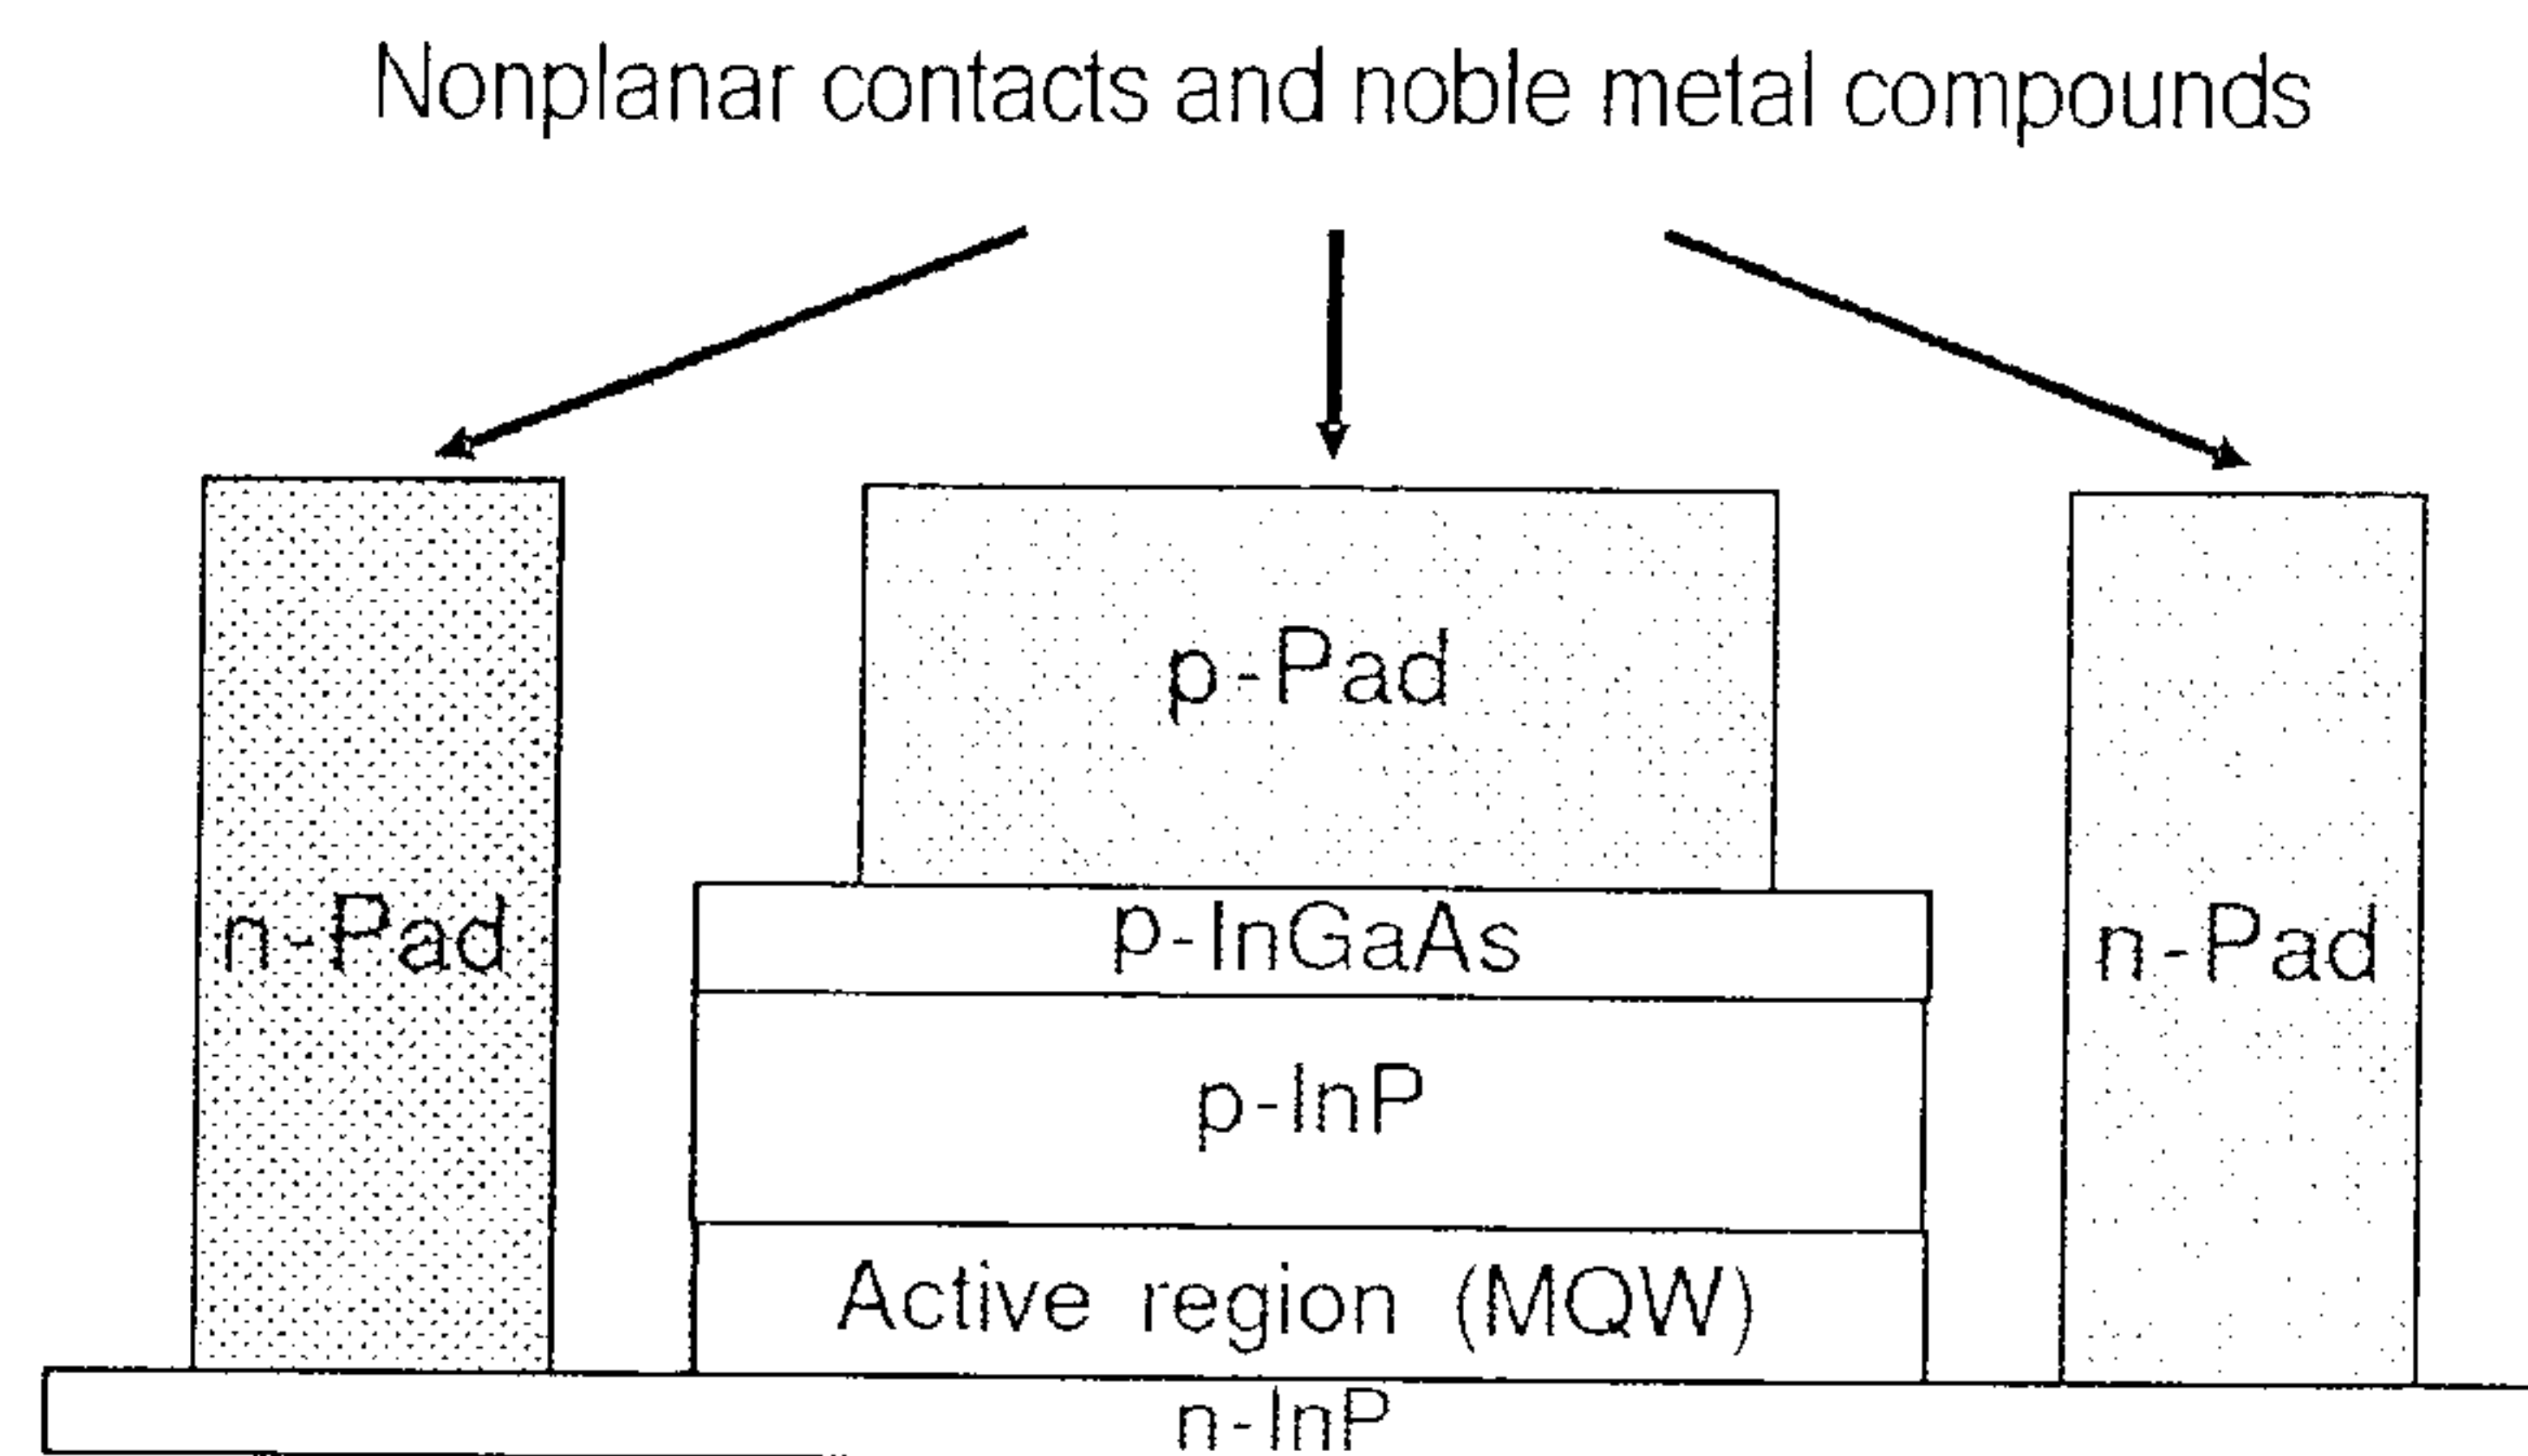


FIG.1

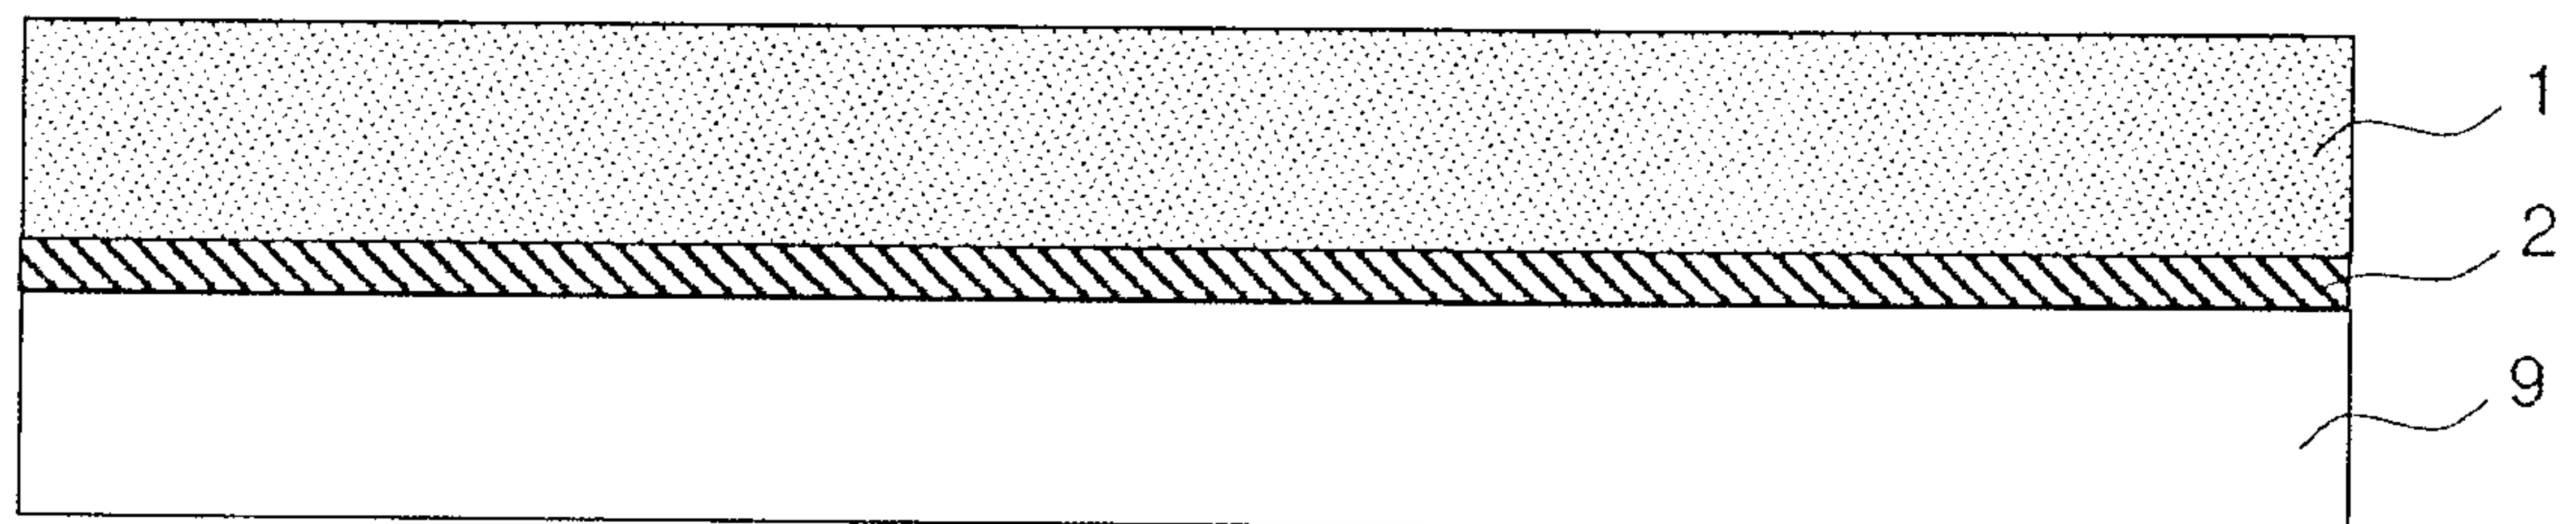


FIG.2

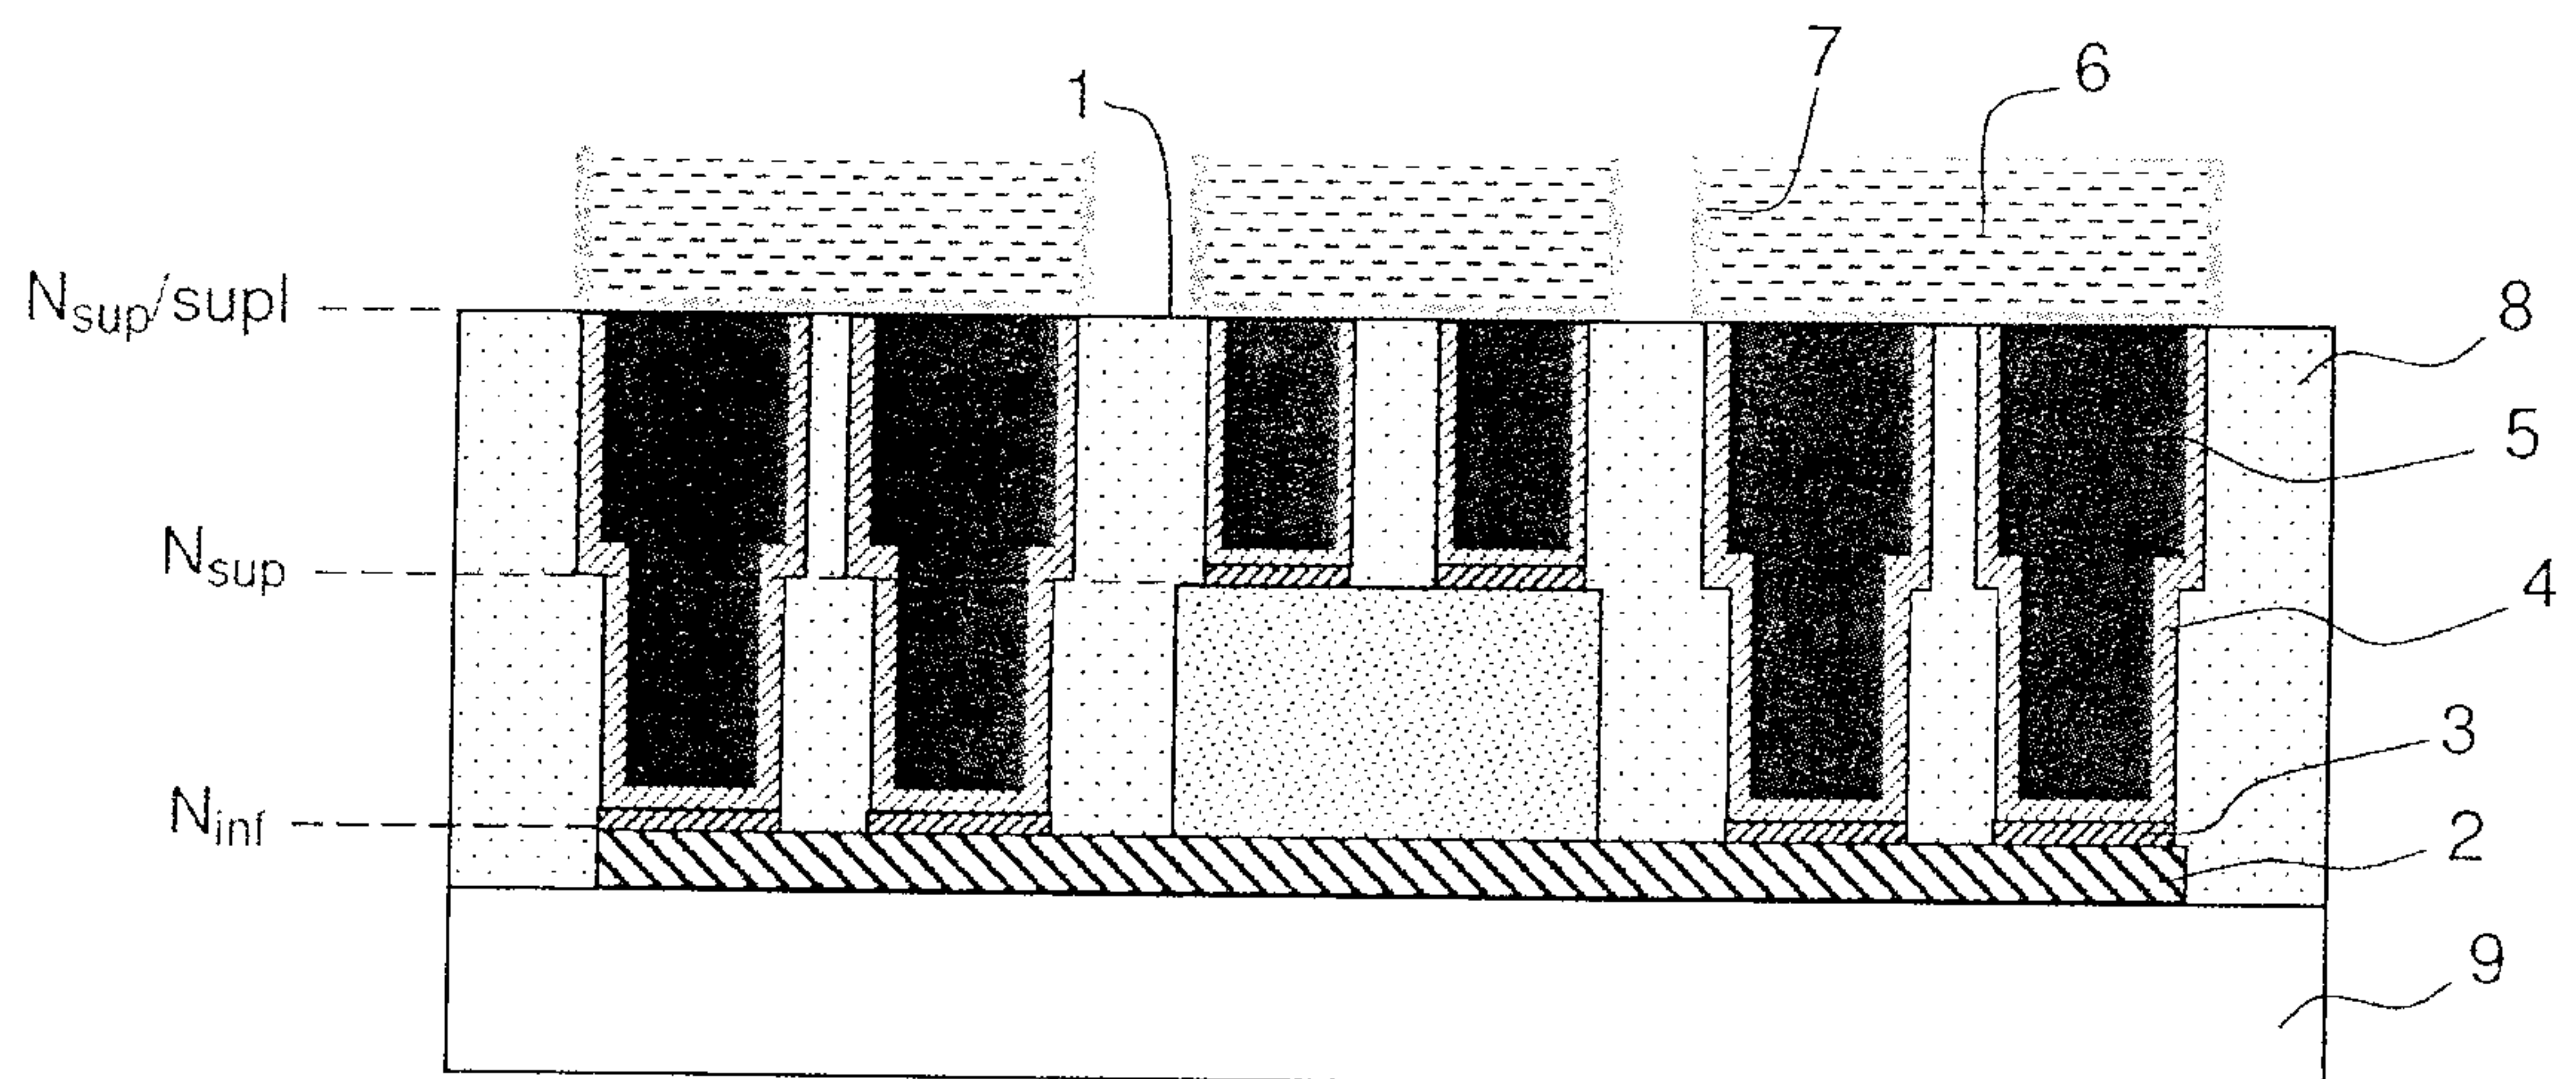


FIG.3

2/29

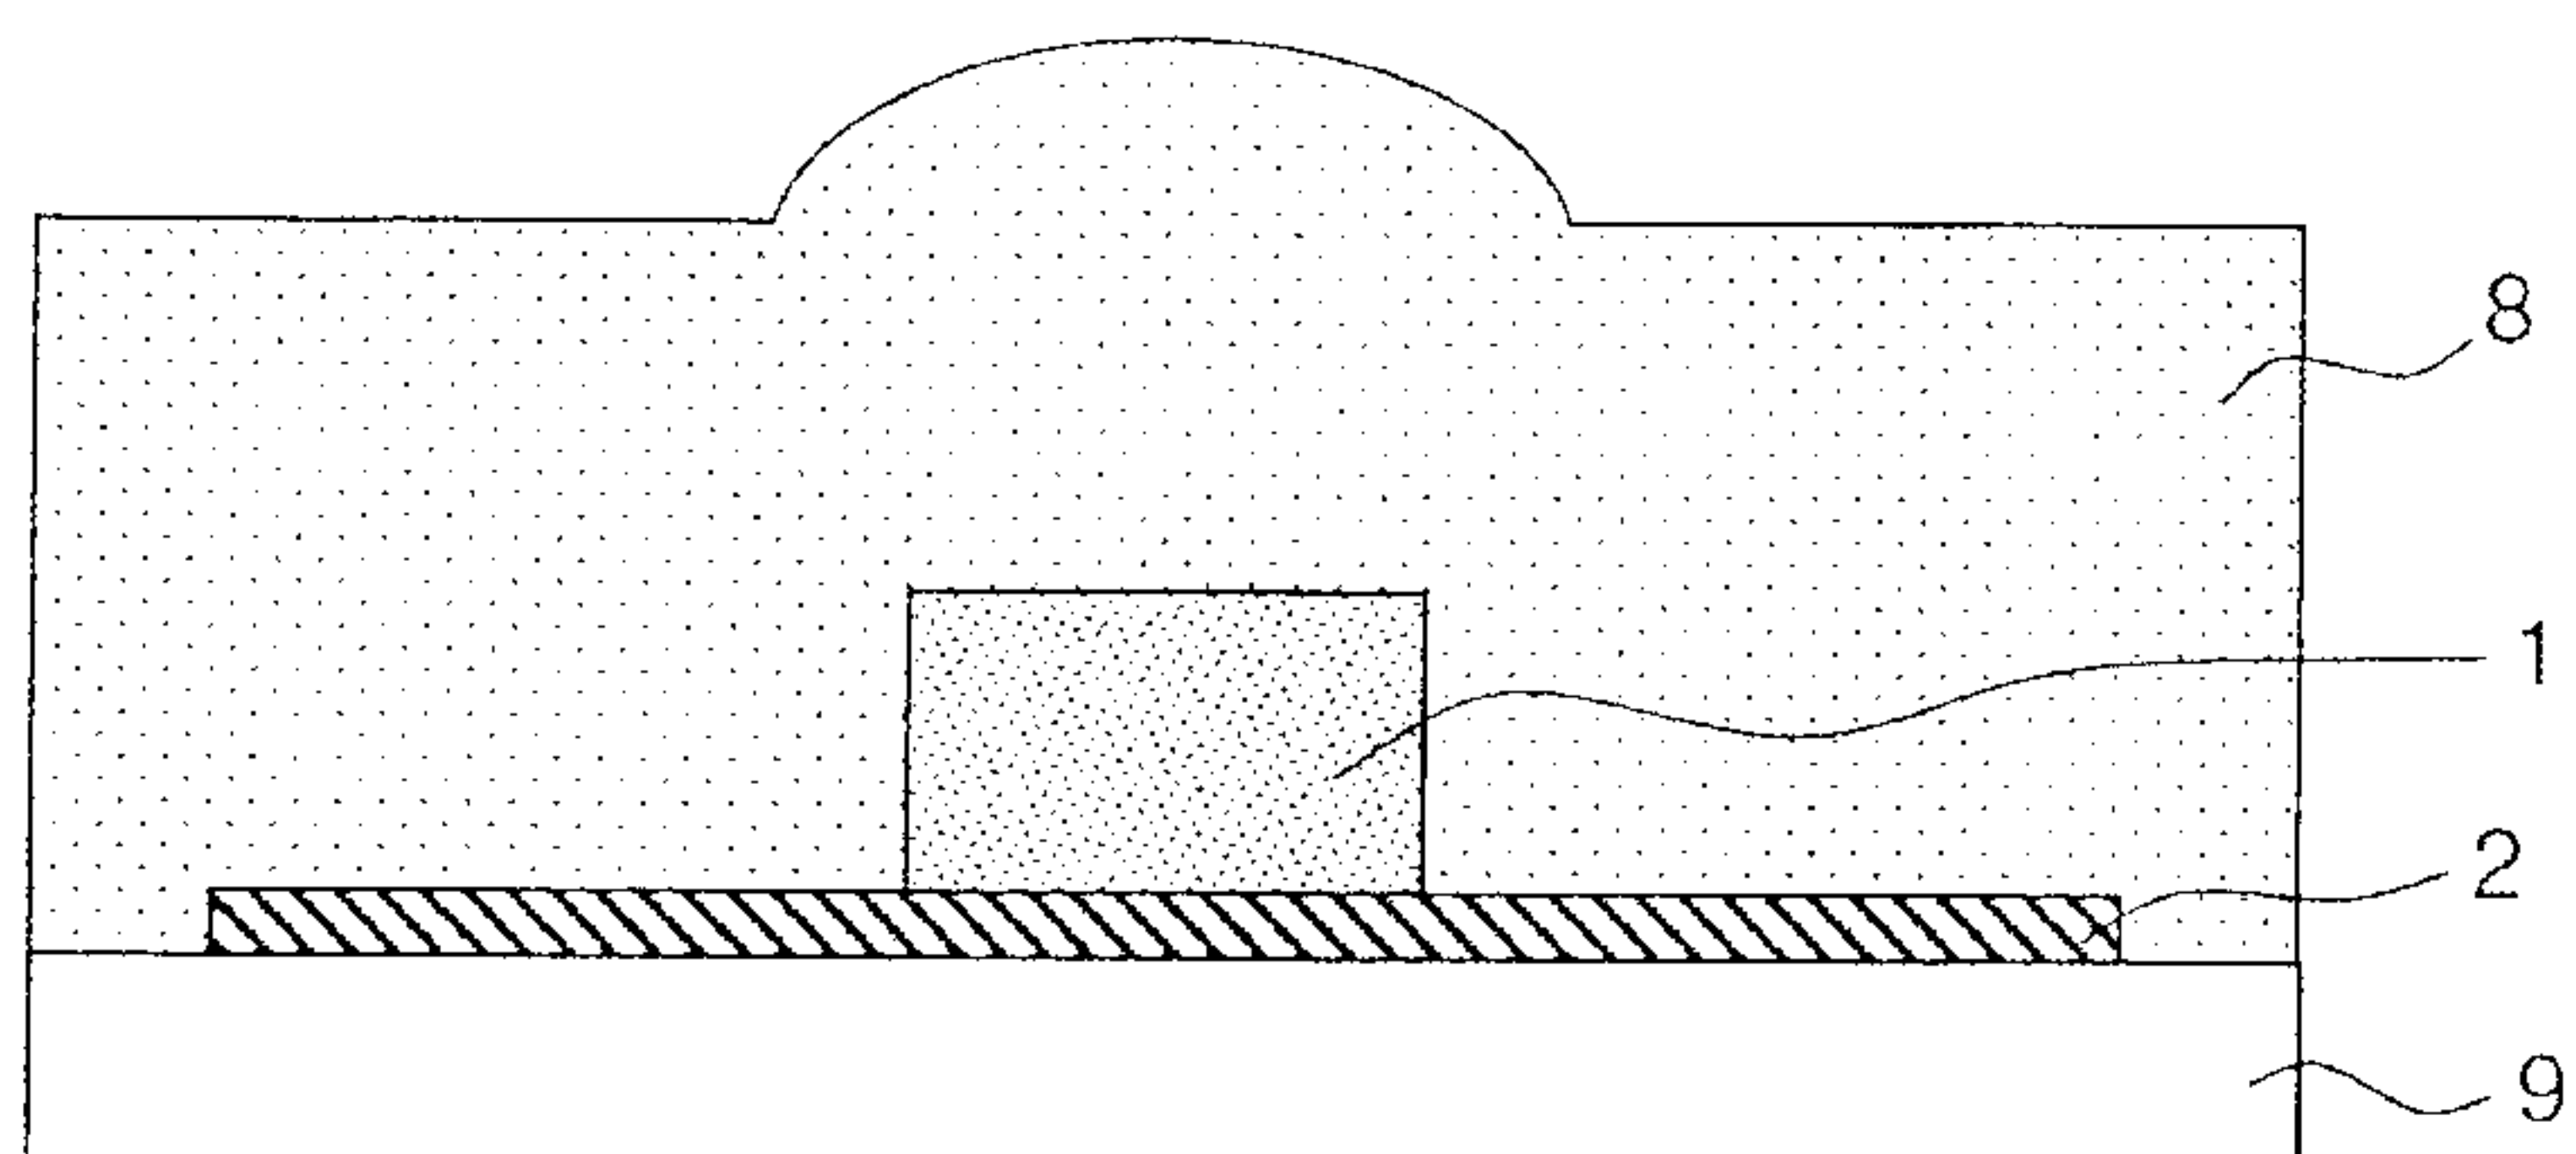


FIG. 4a

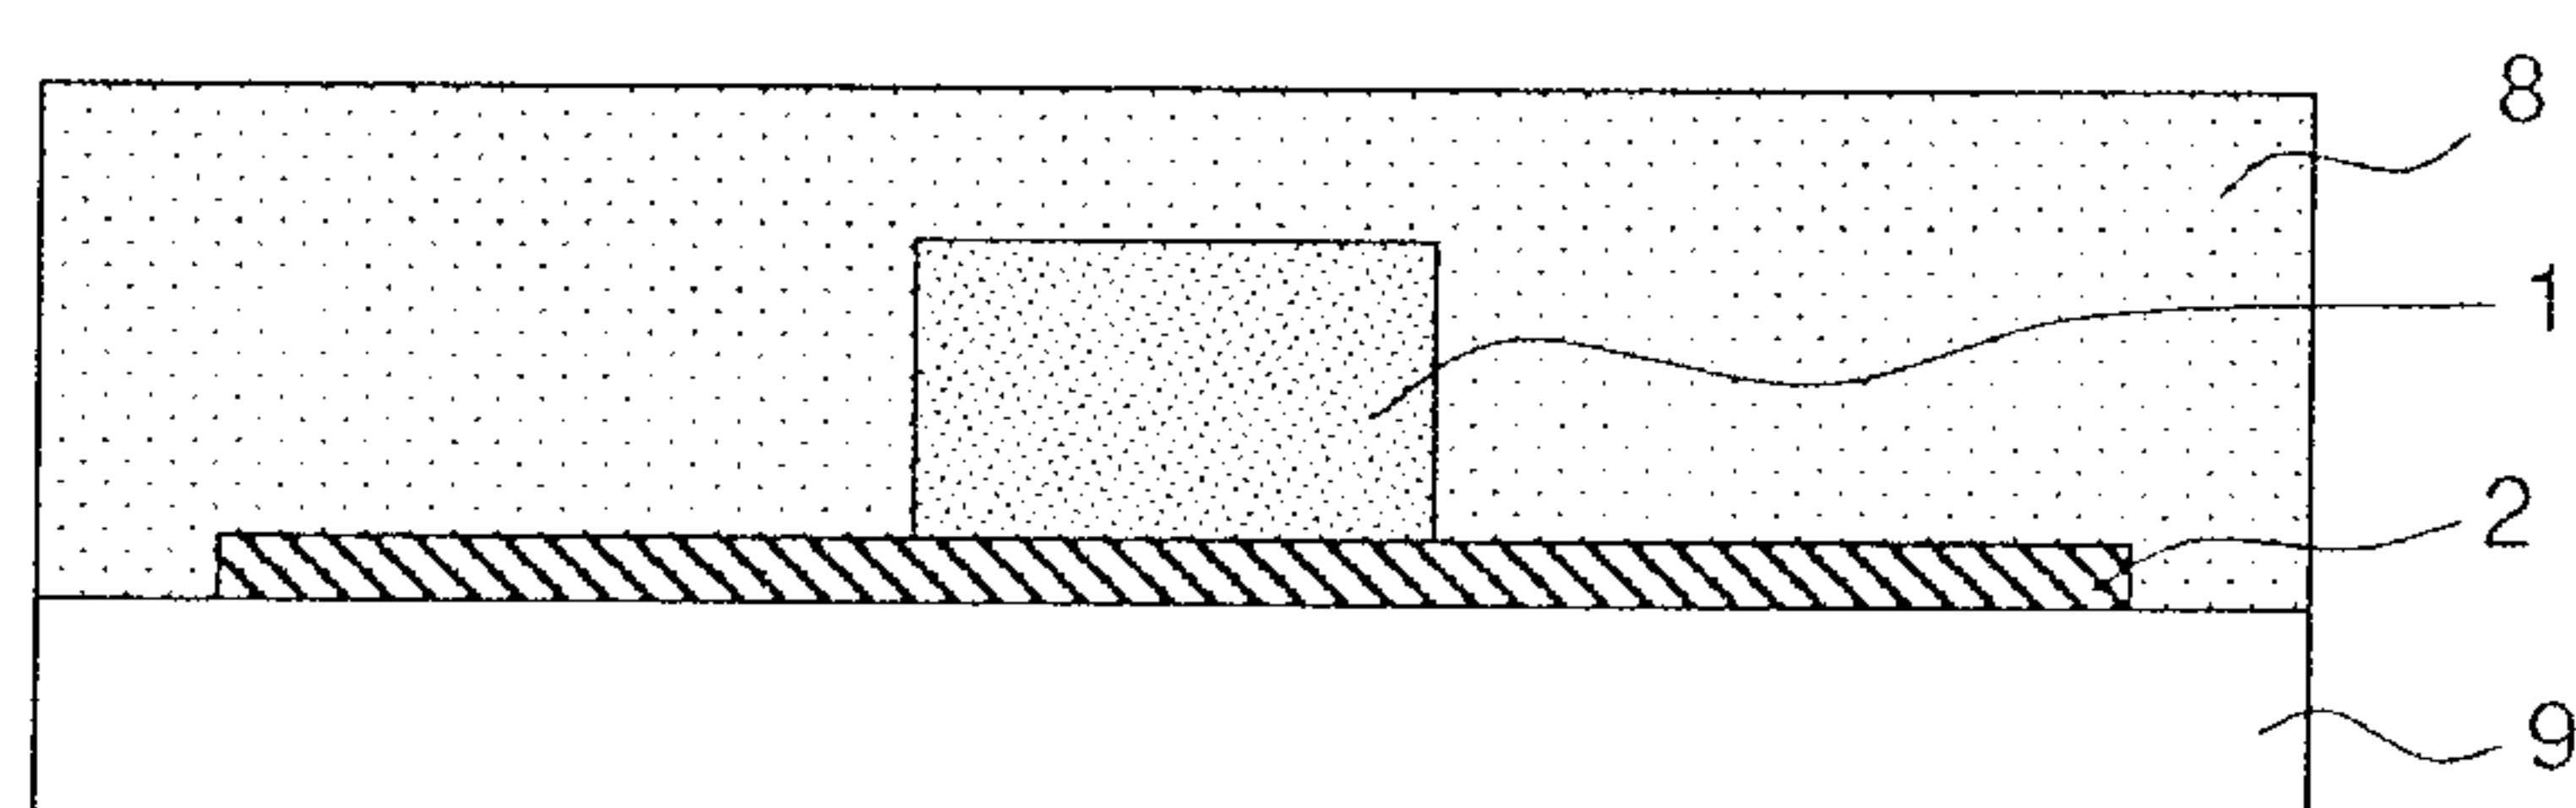


FIG. 4b

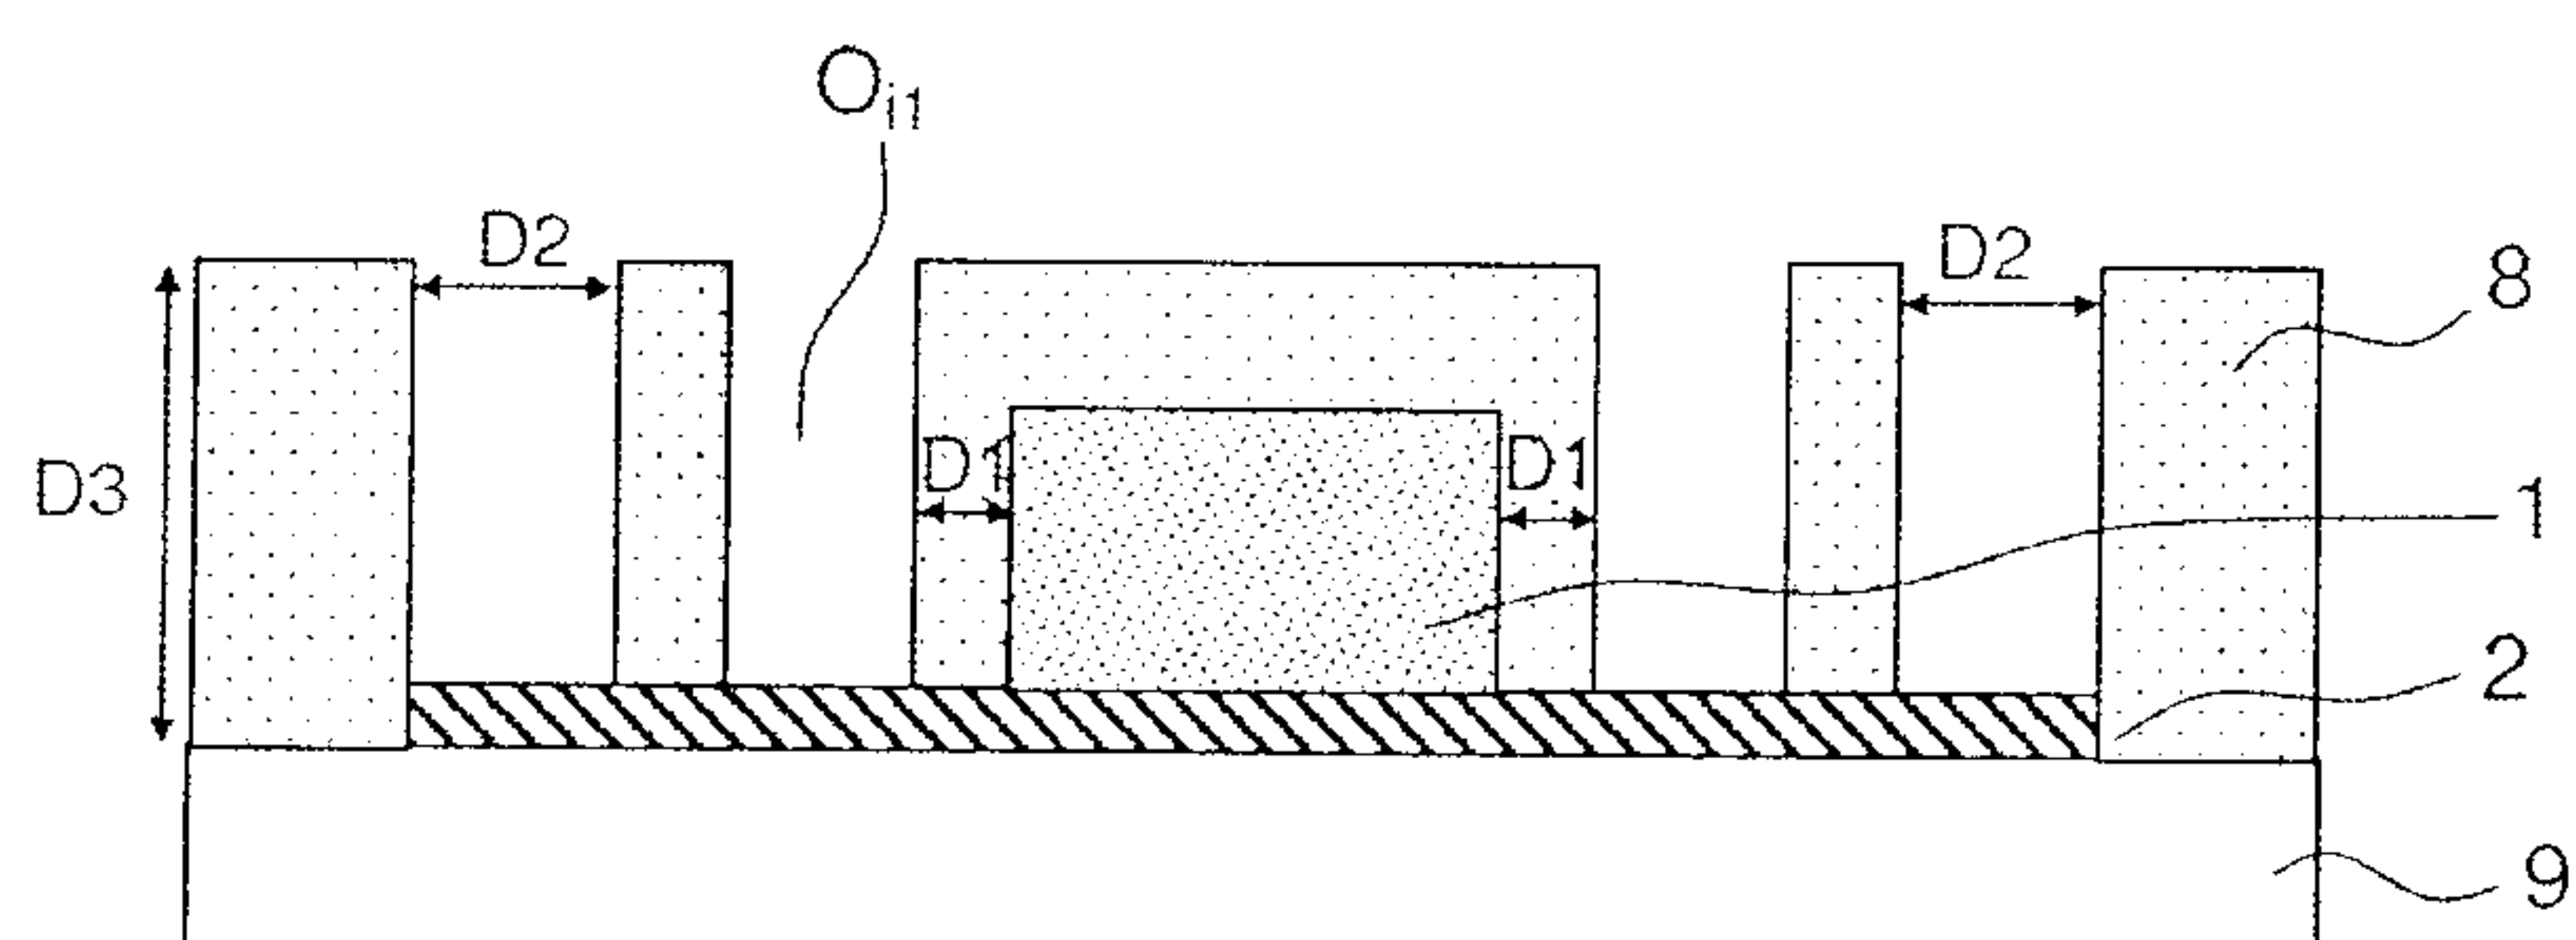


FIG. 4c

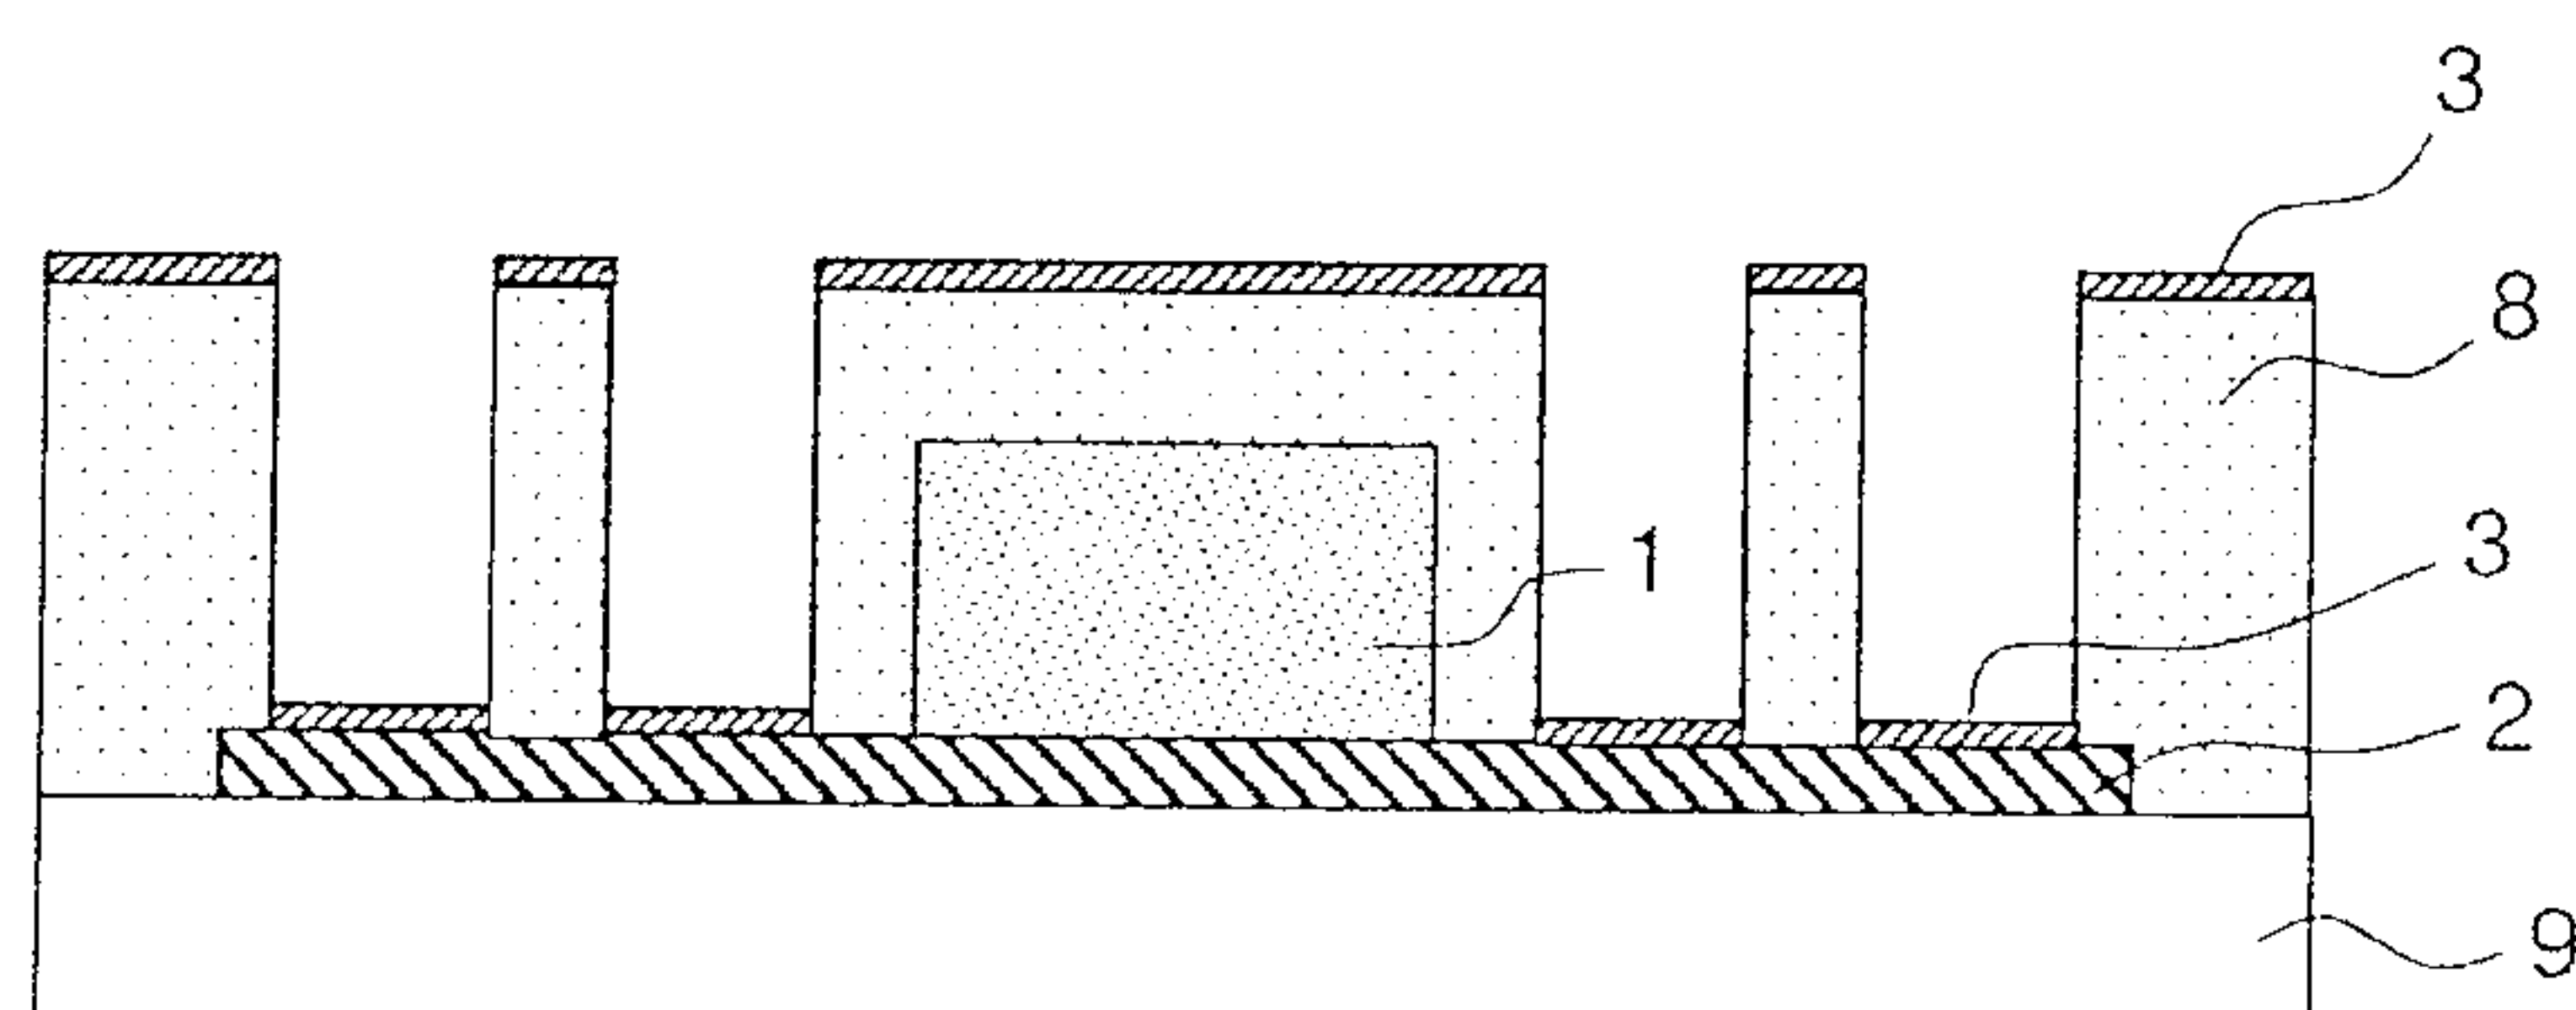


FIG. 4d

3/29

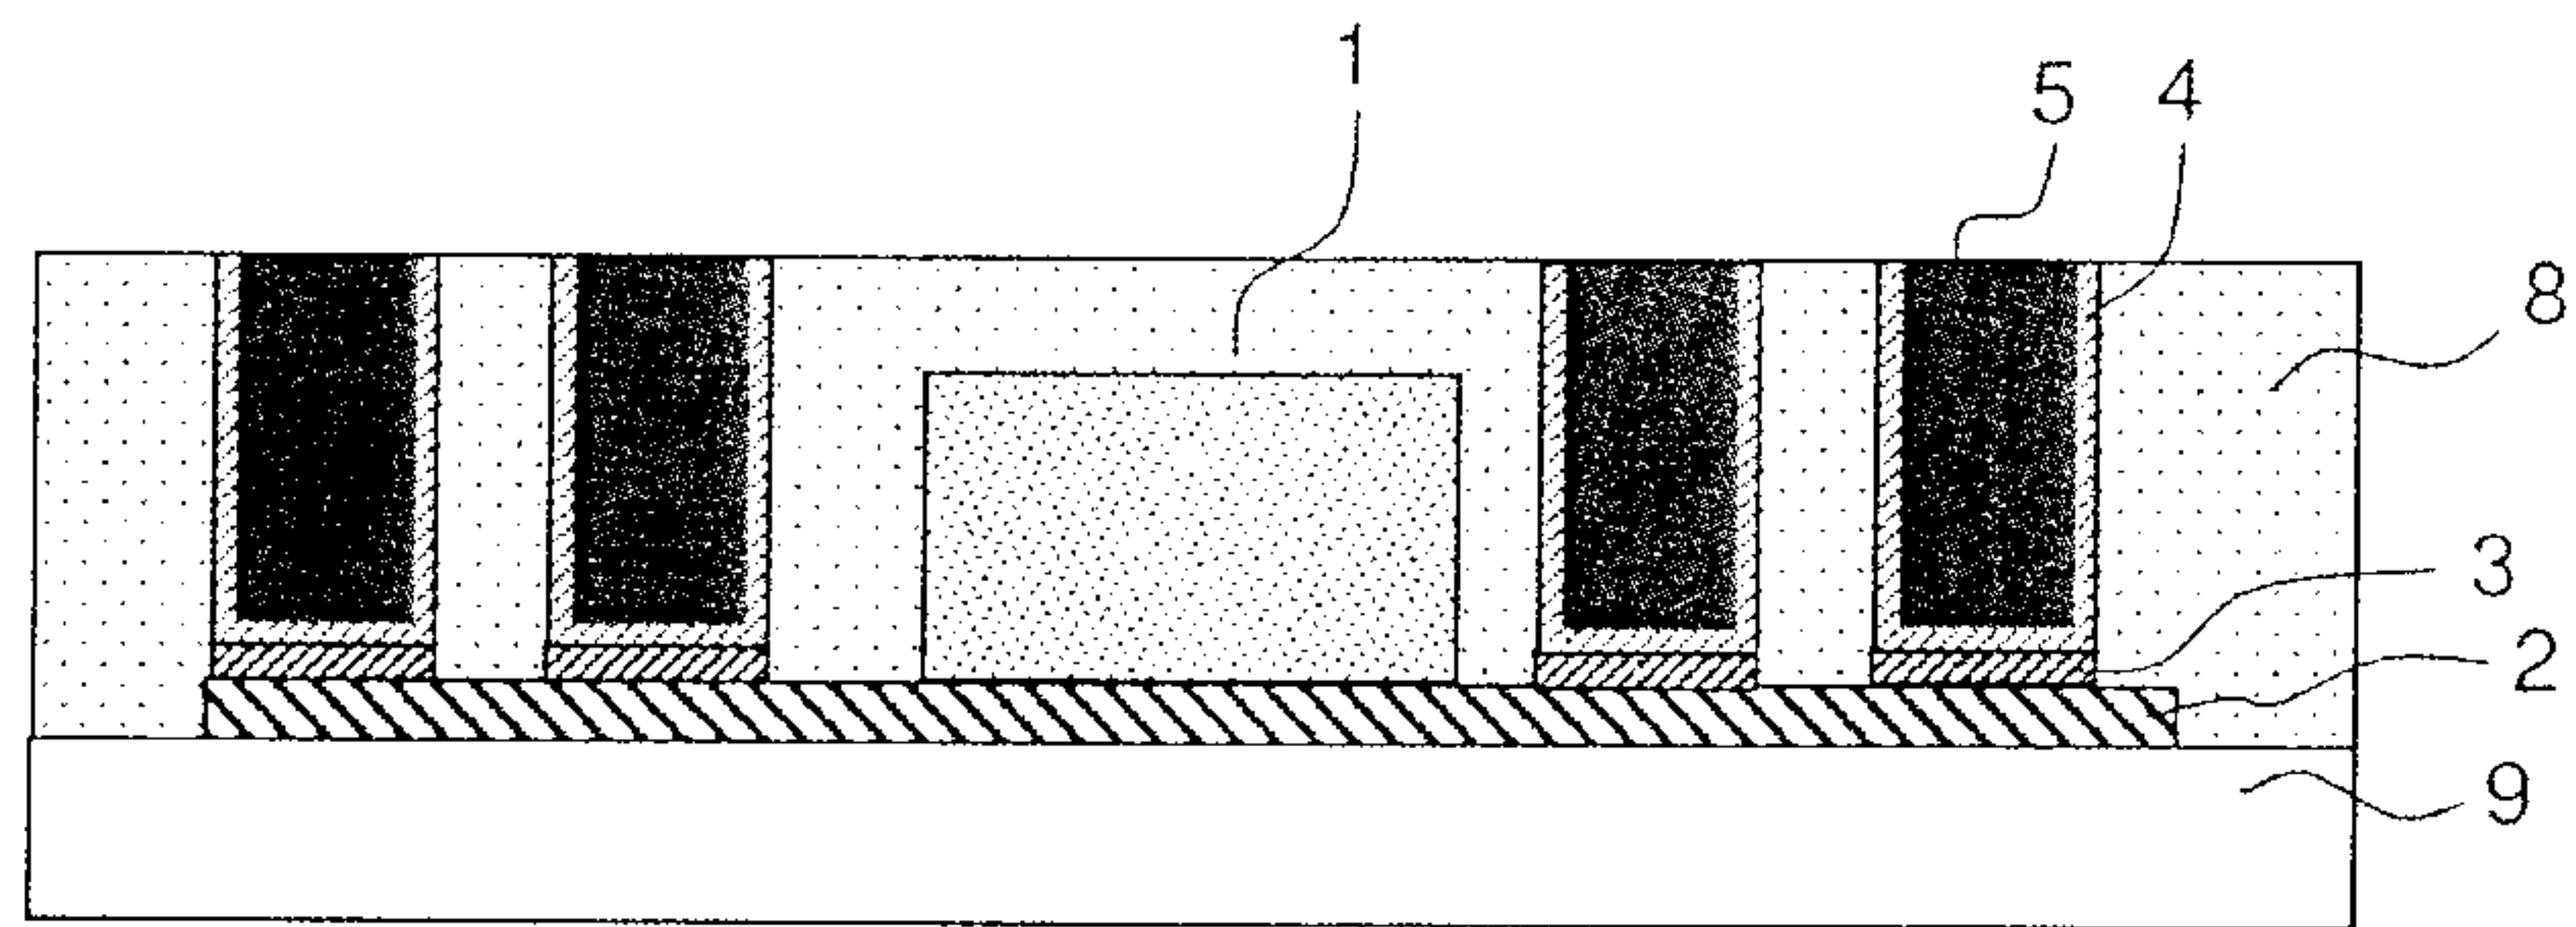


FIG. 4e

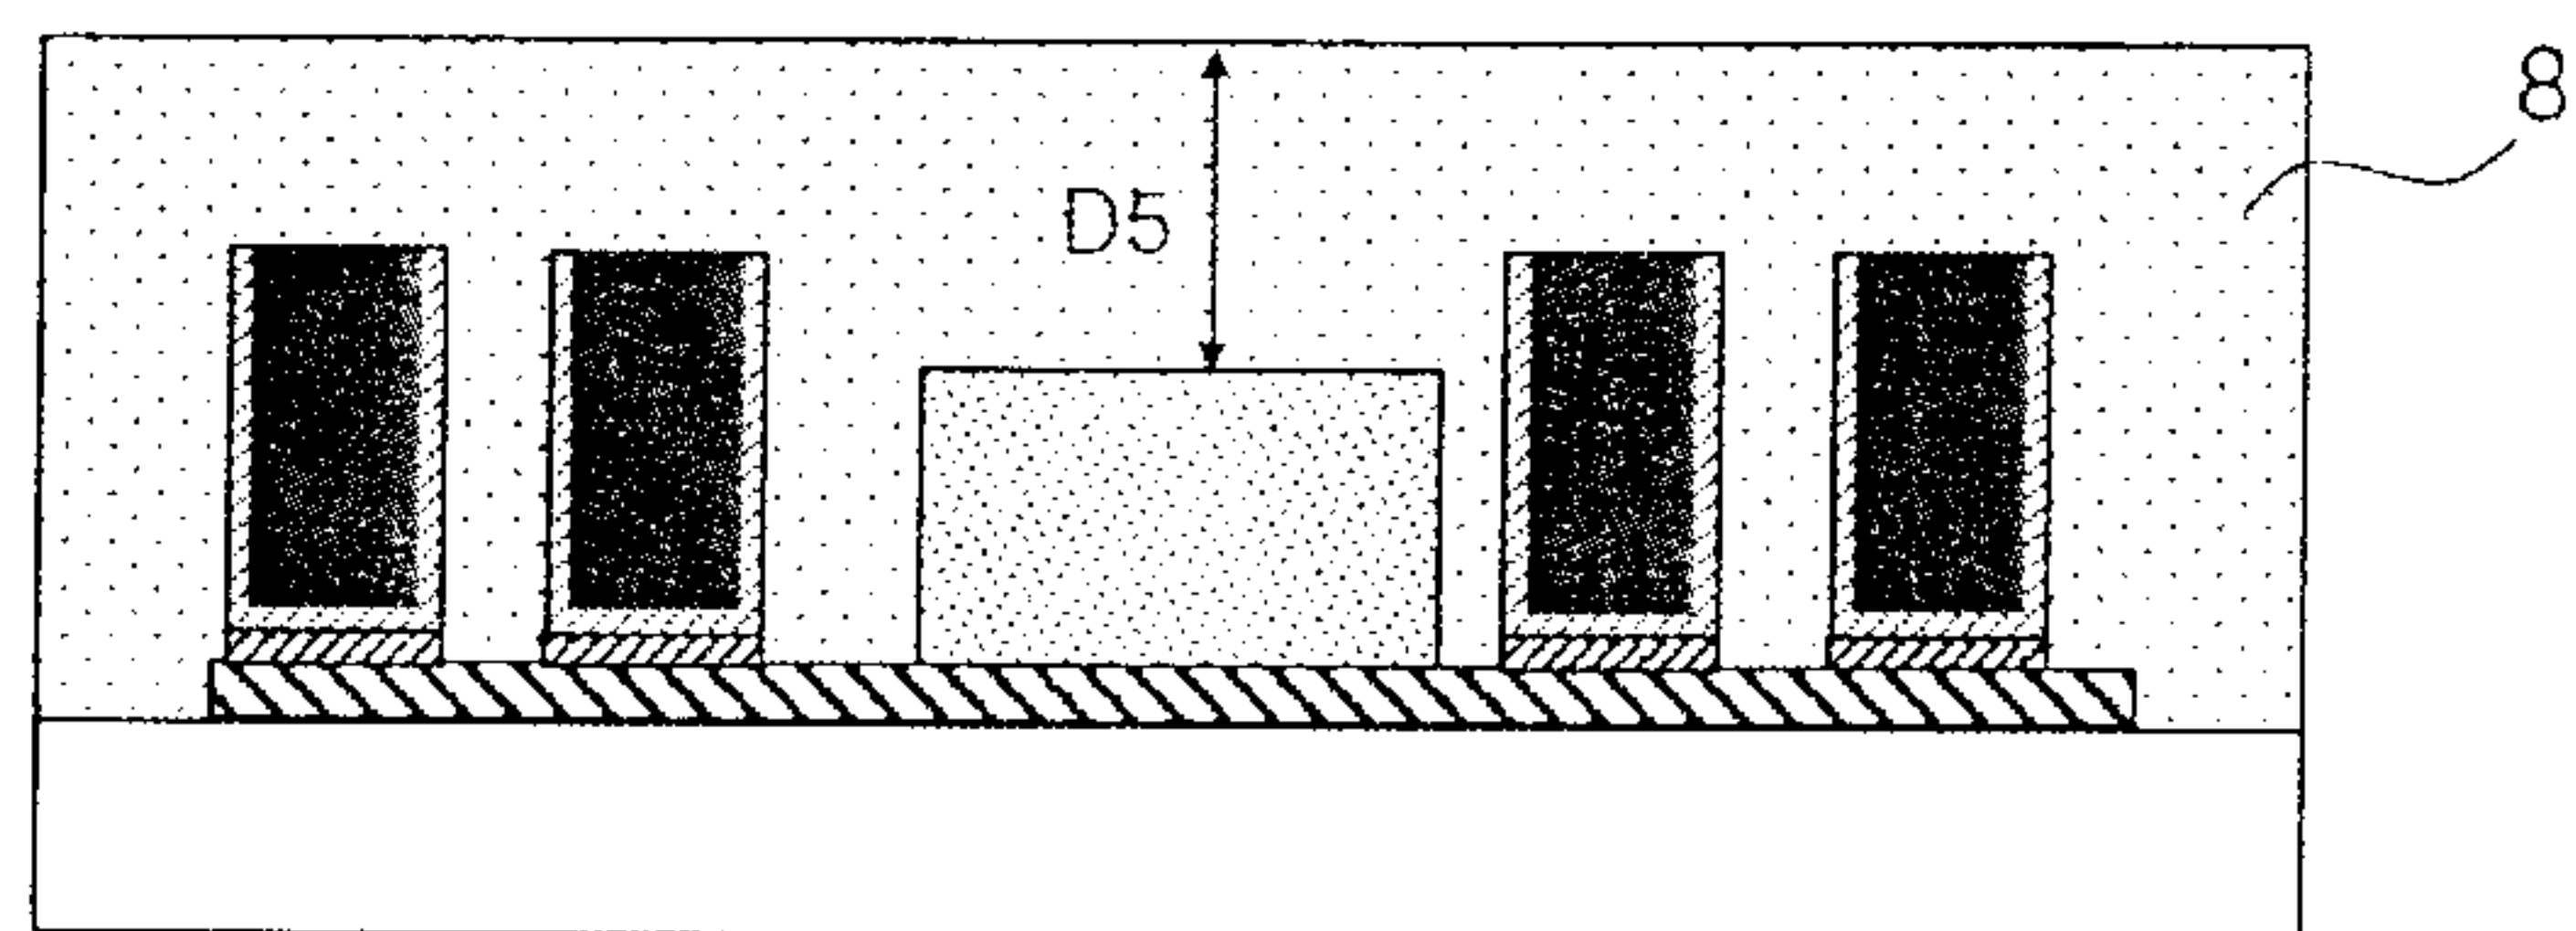


FIG. 4f

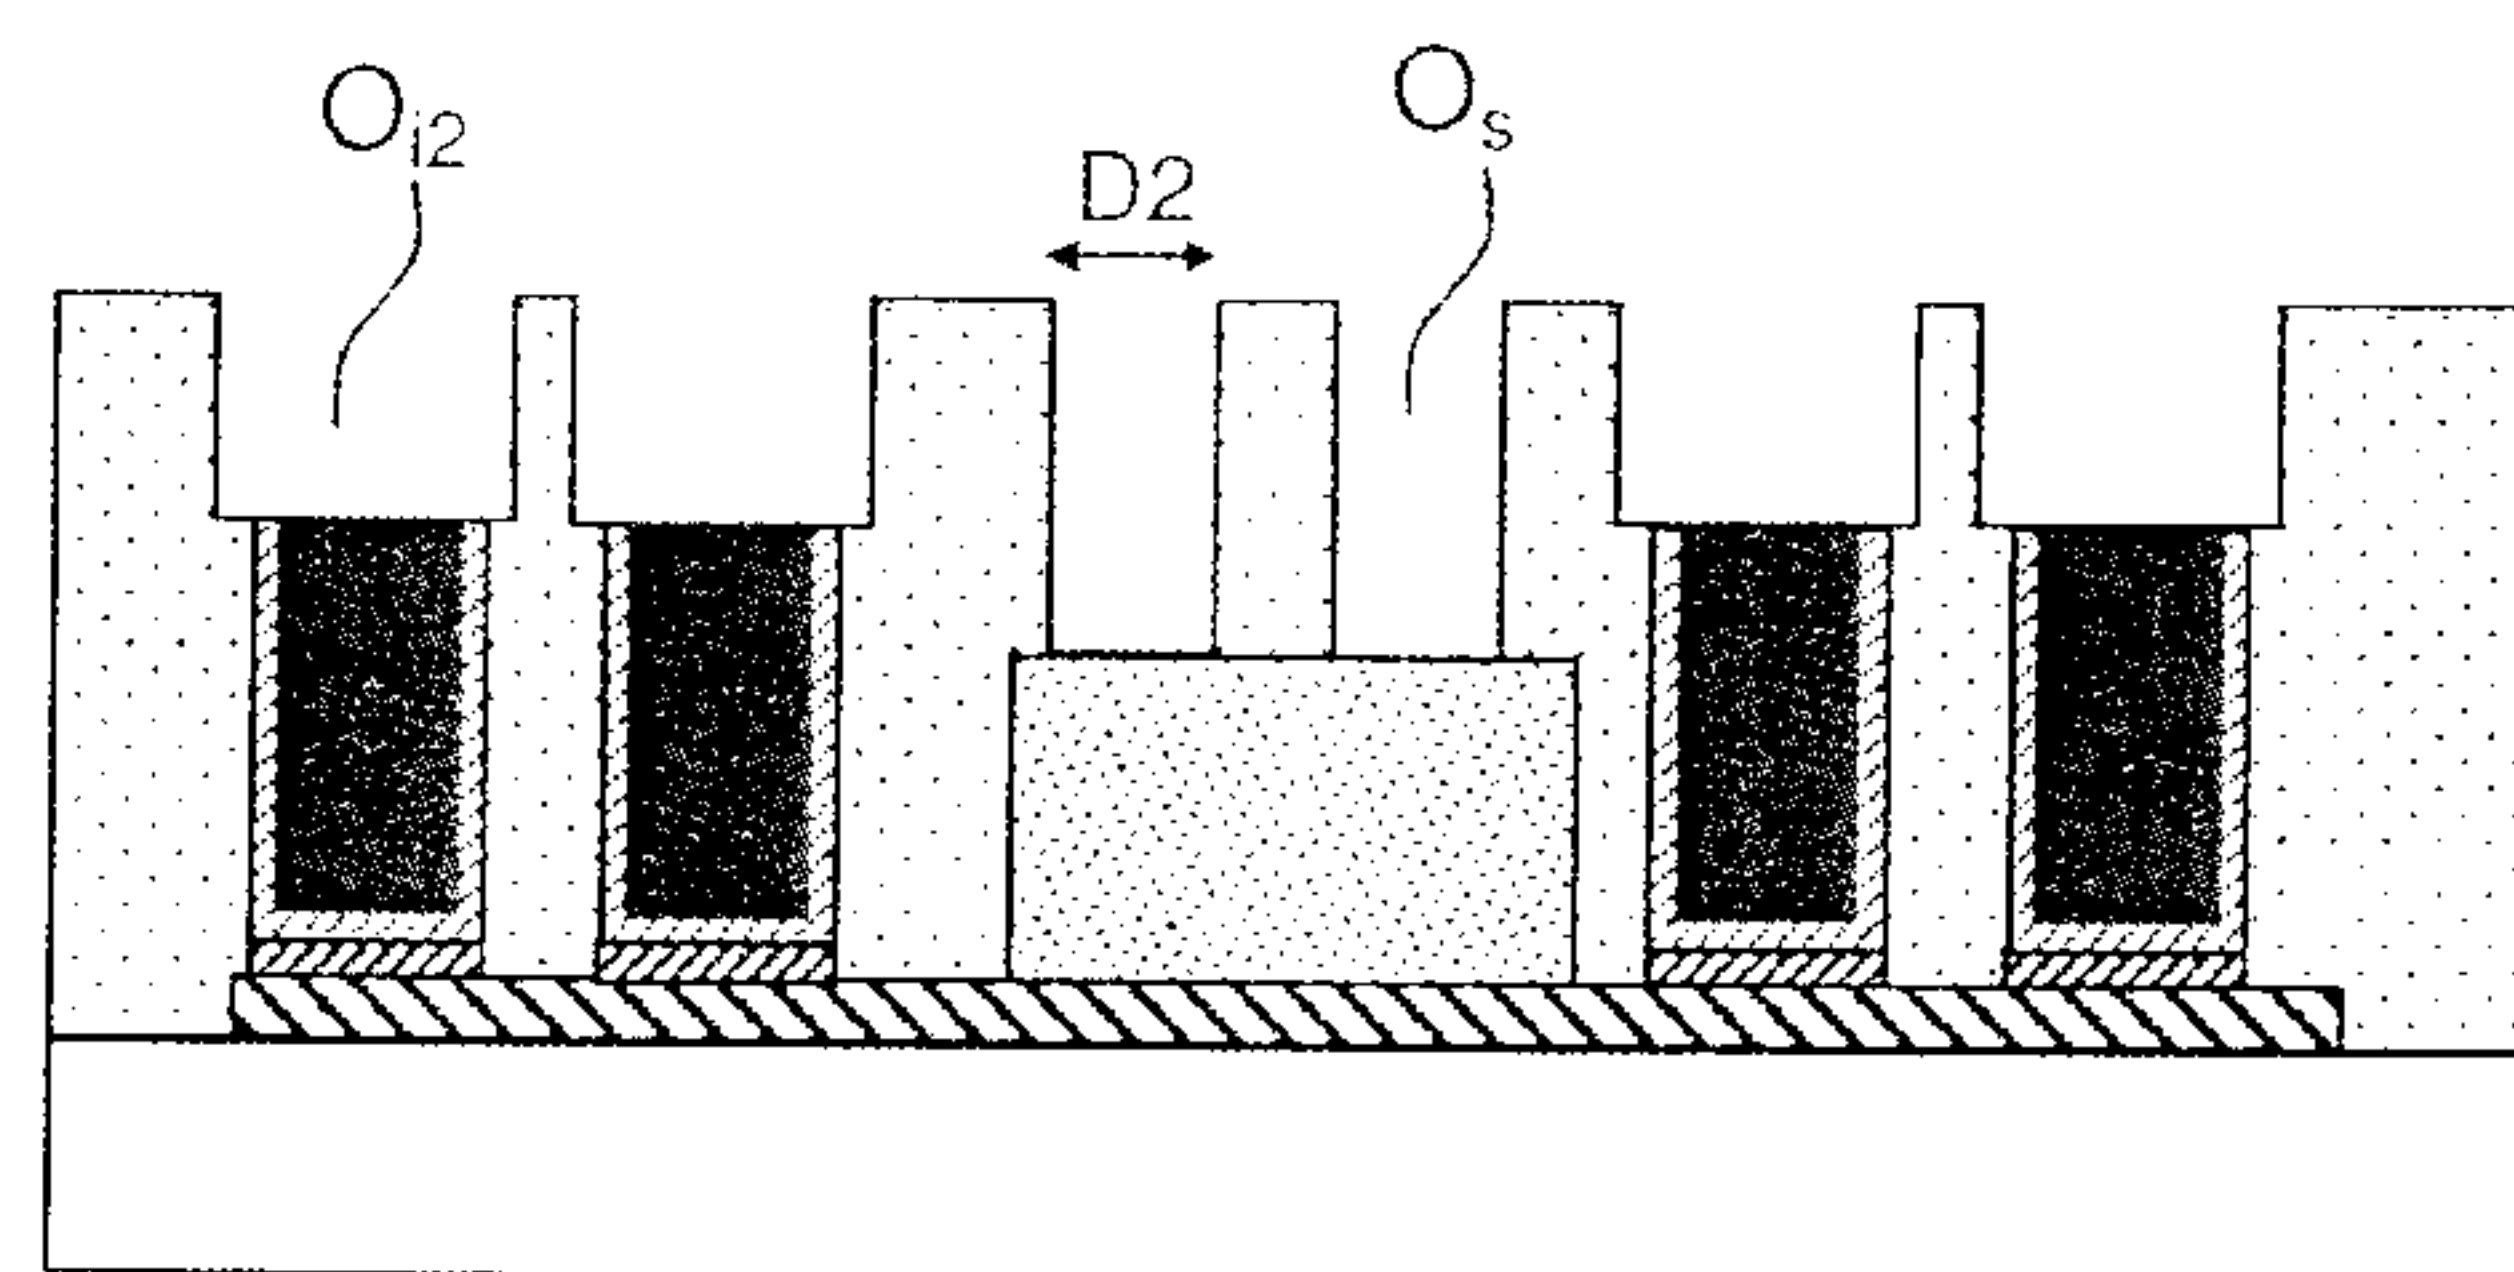


FIG. 4g

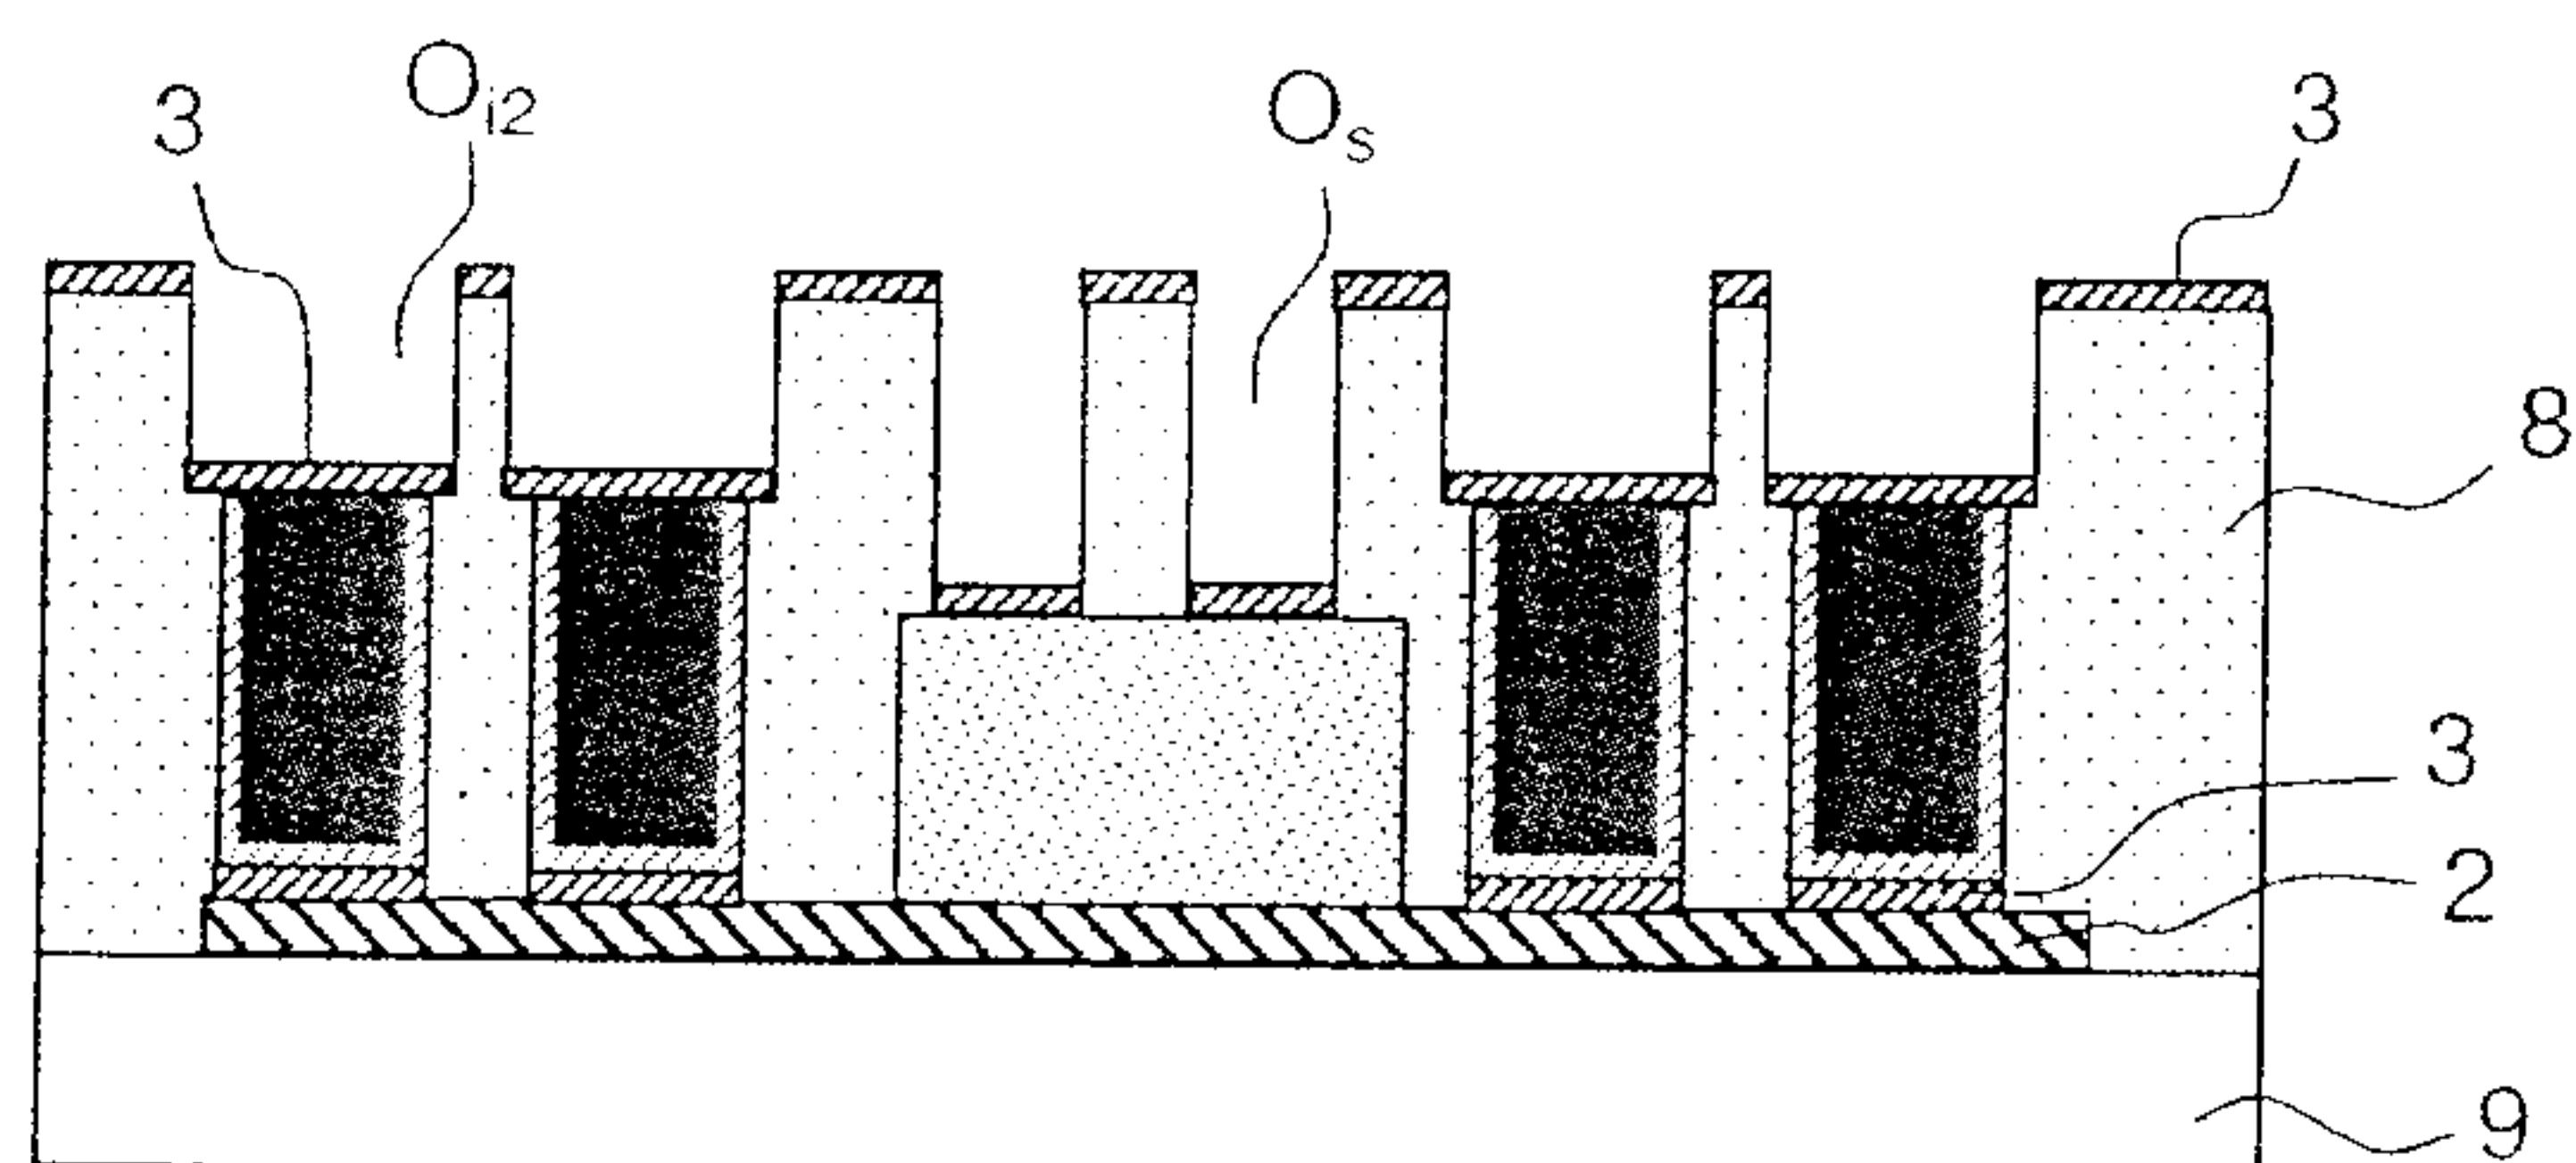


FIG. 4h

4/29

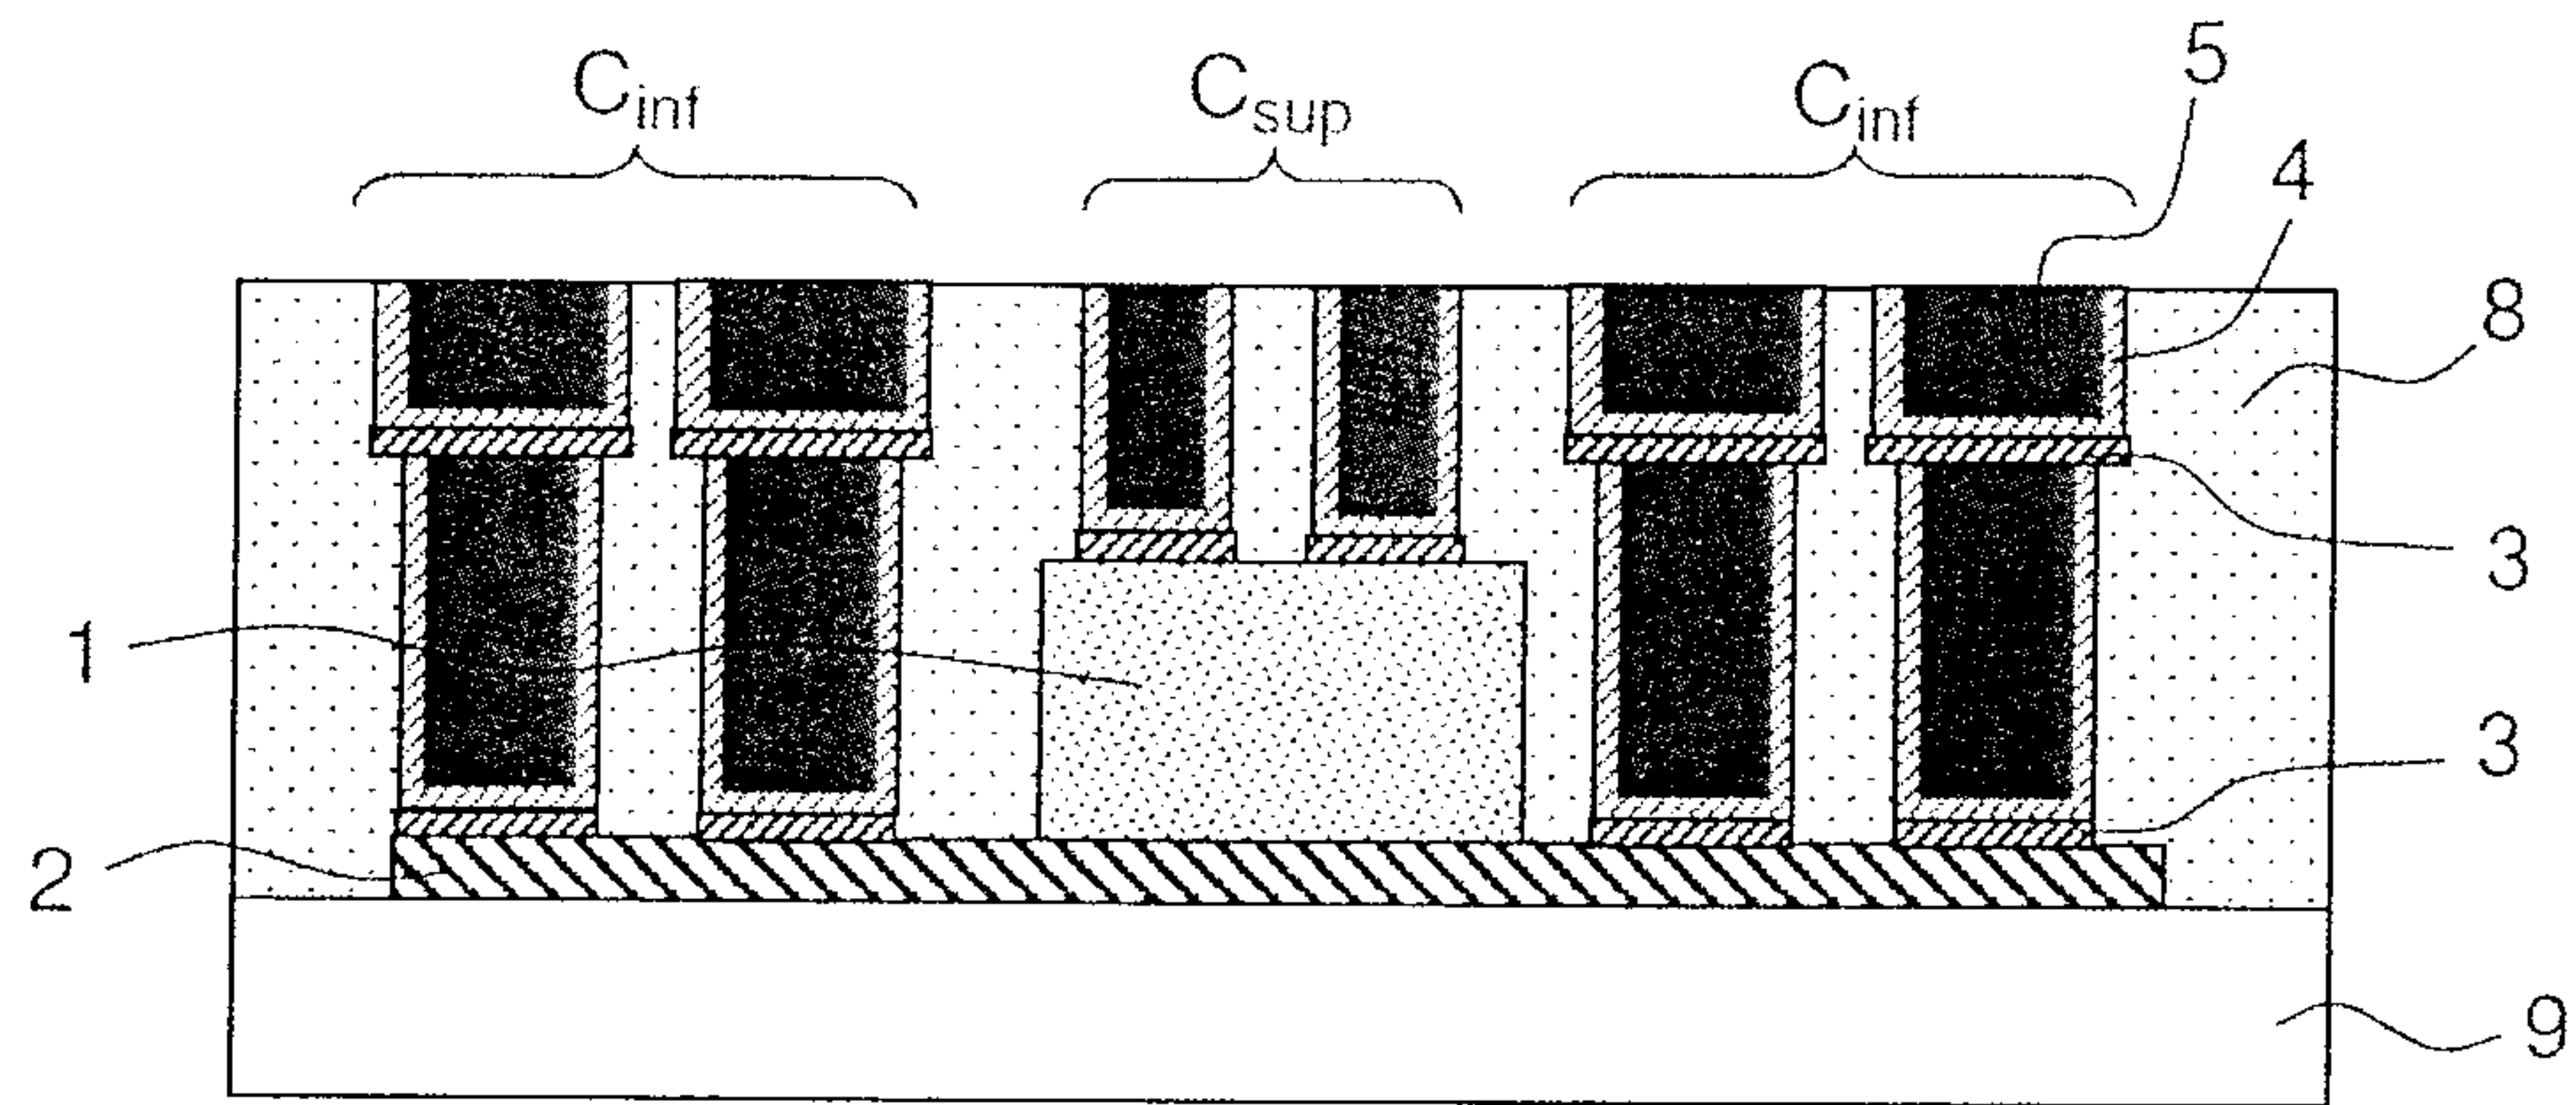


FIG.4i

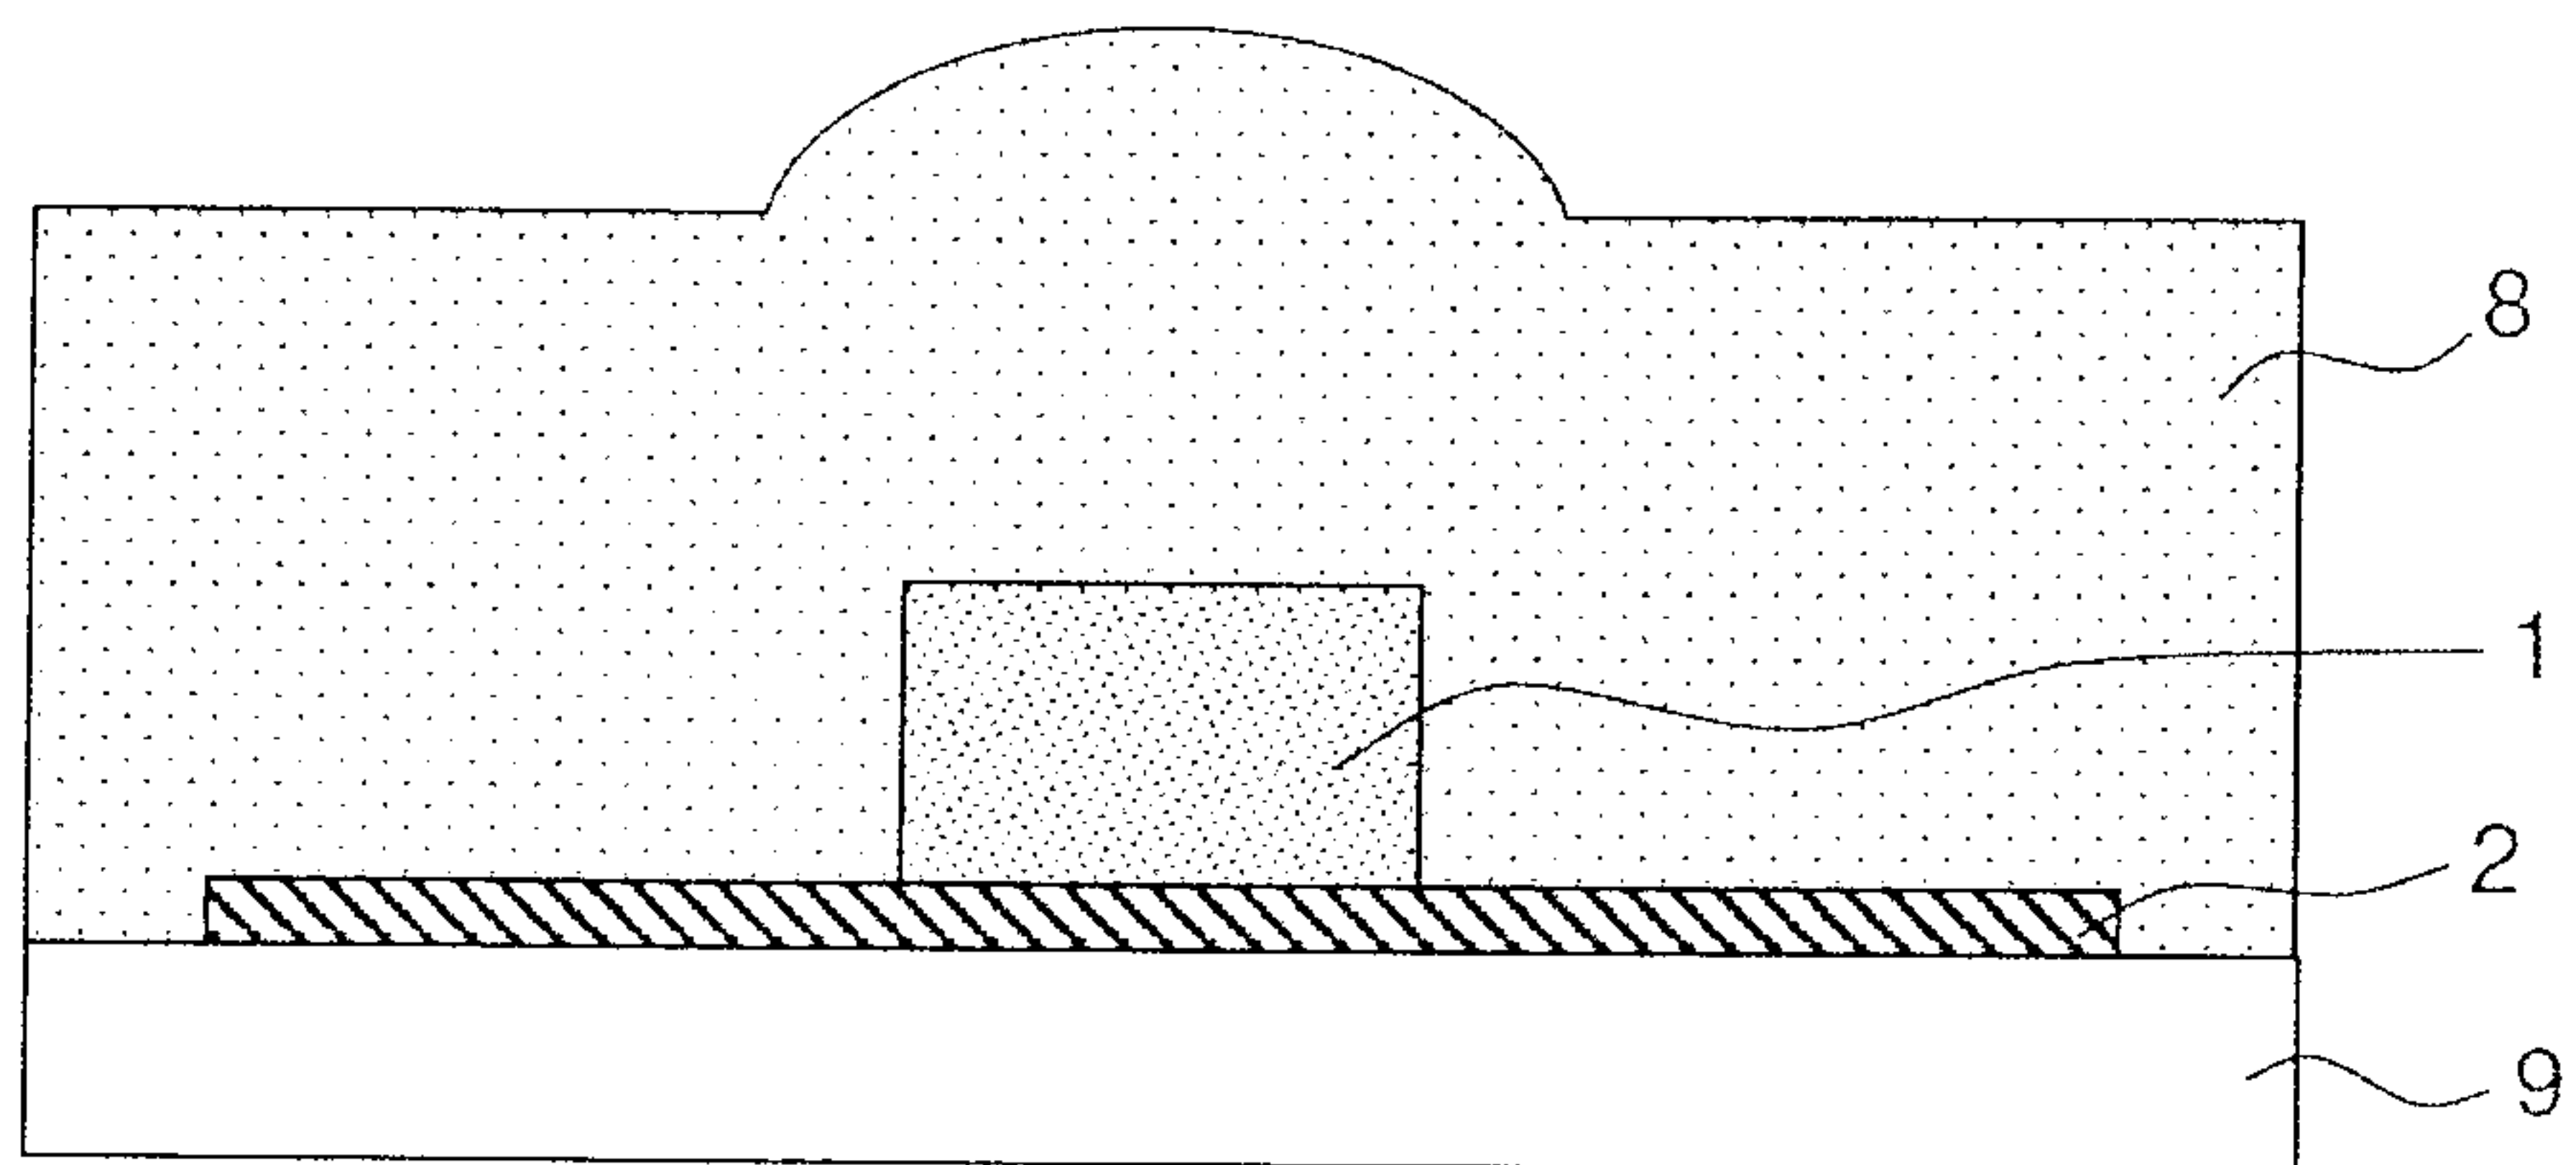


FIG.5a

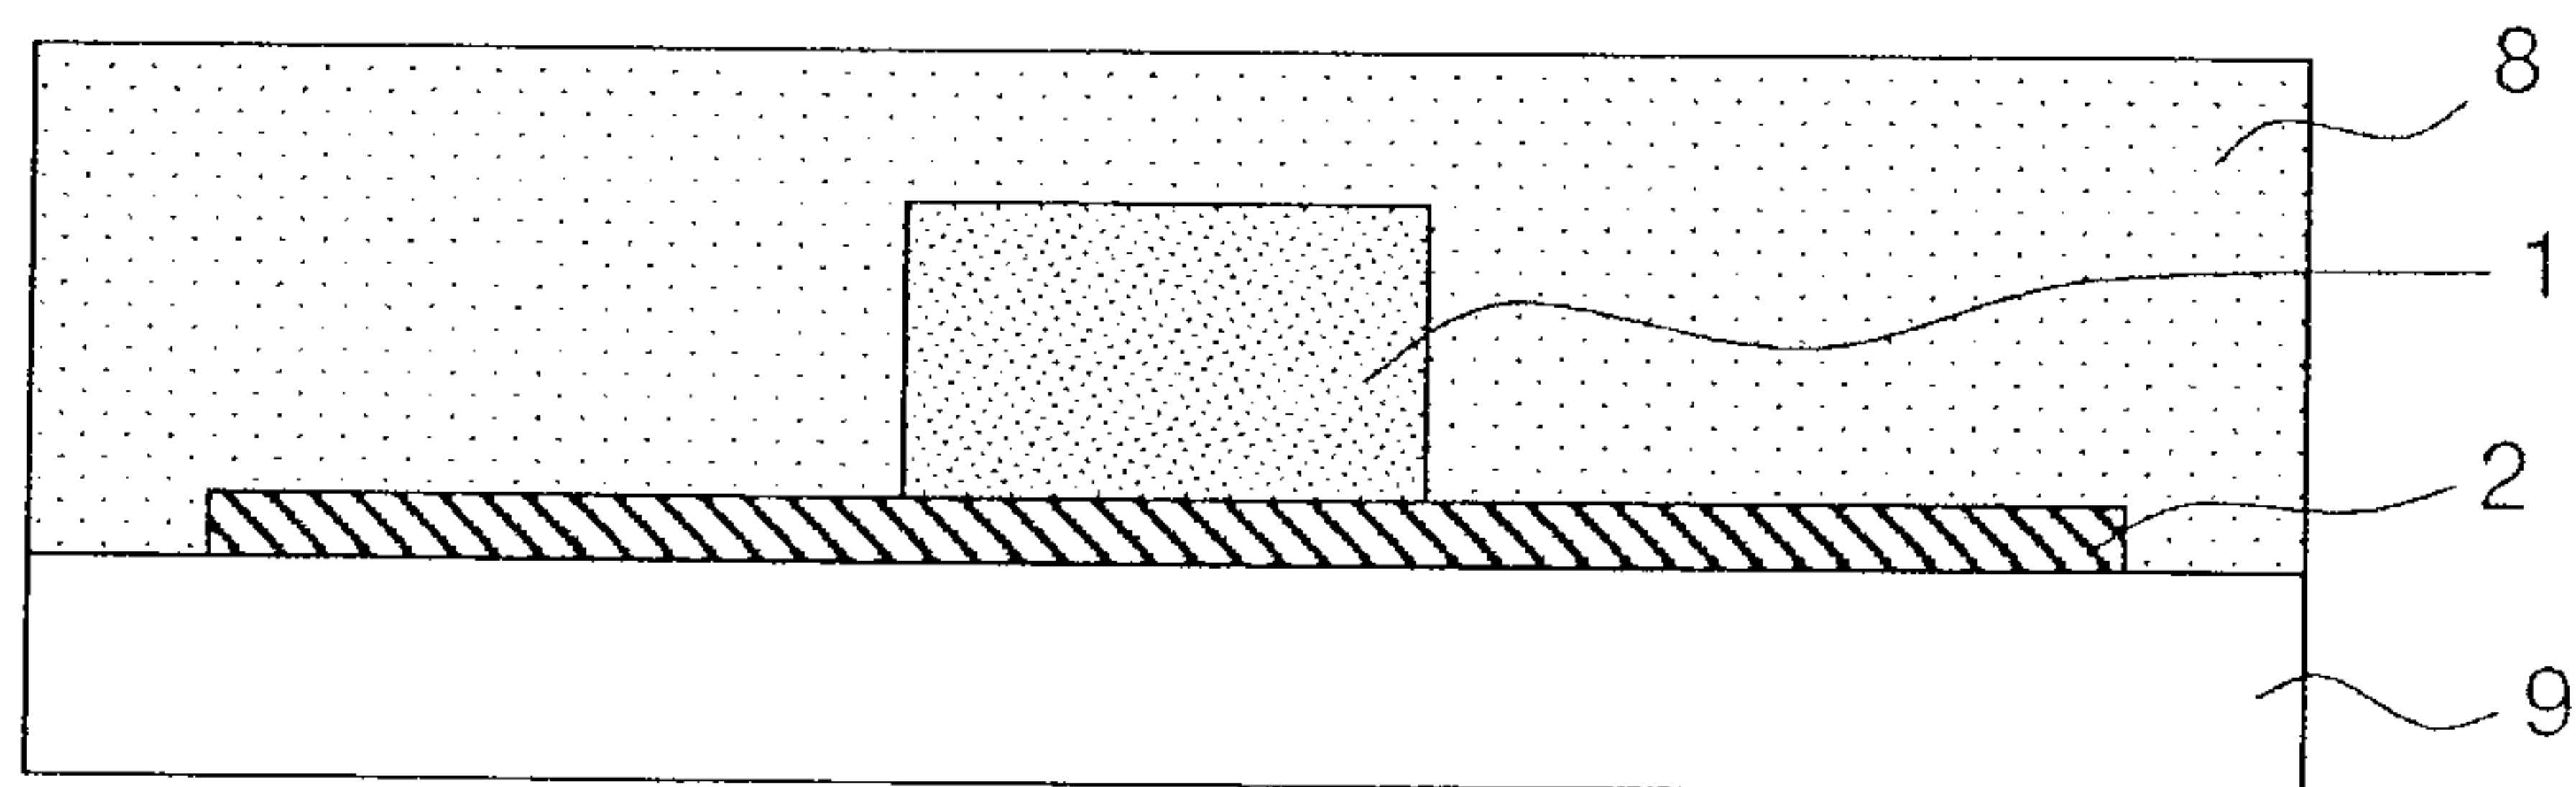


FIG.5b

5/29

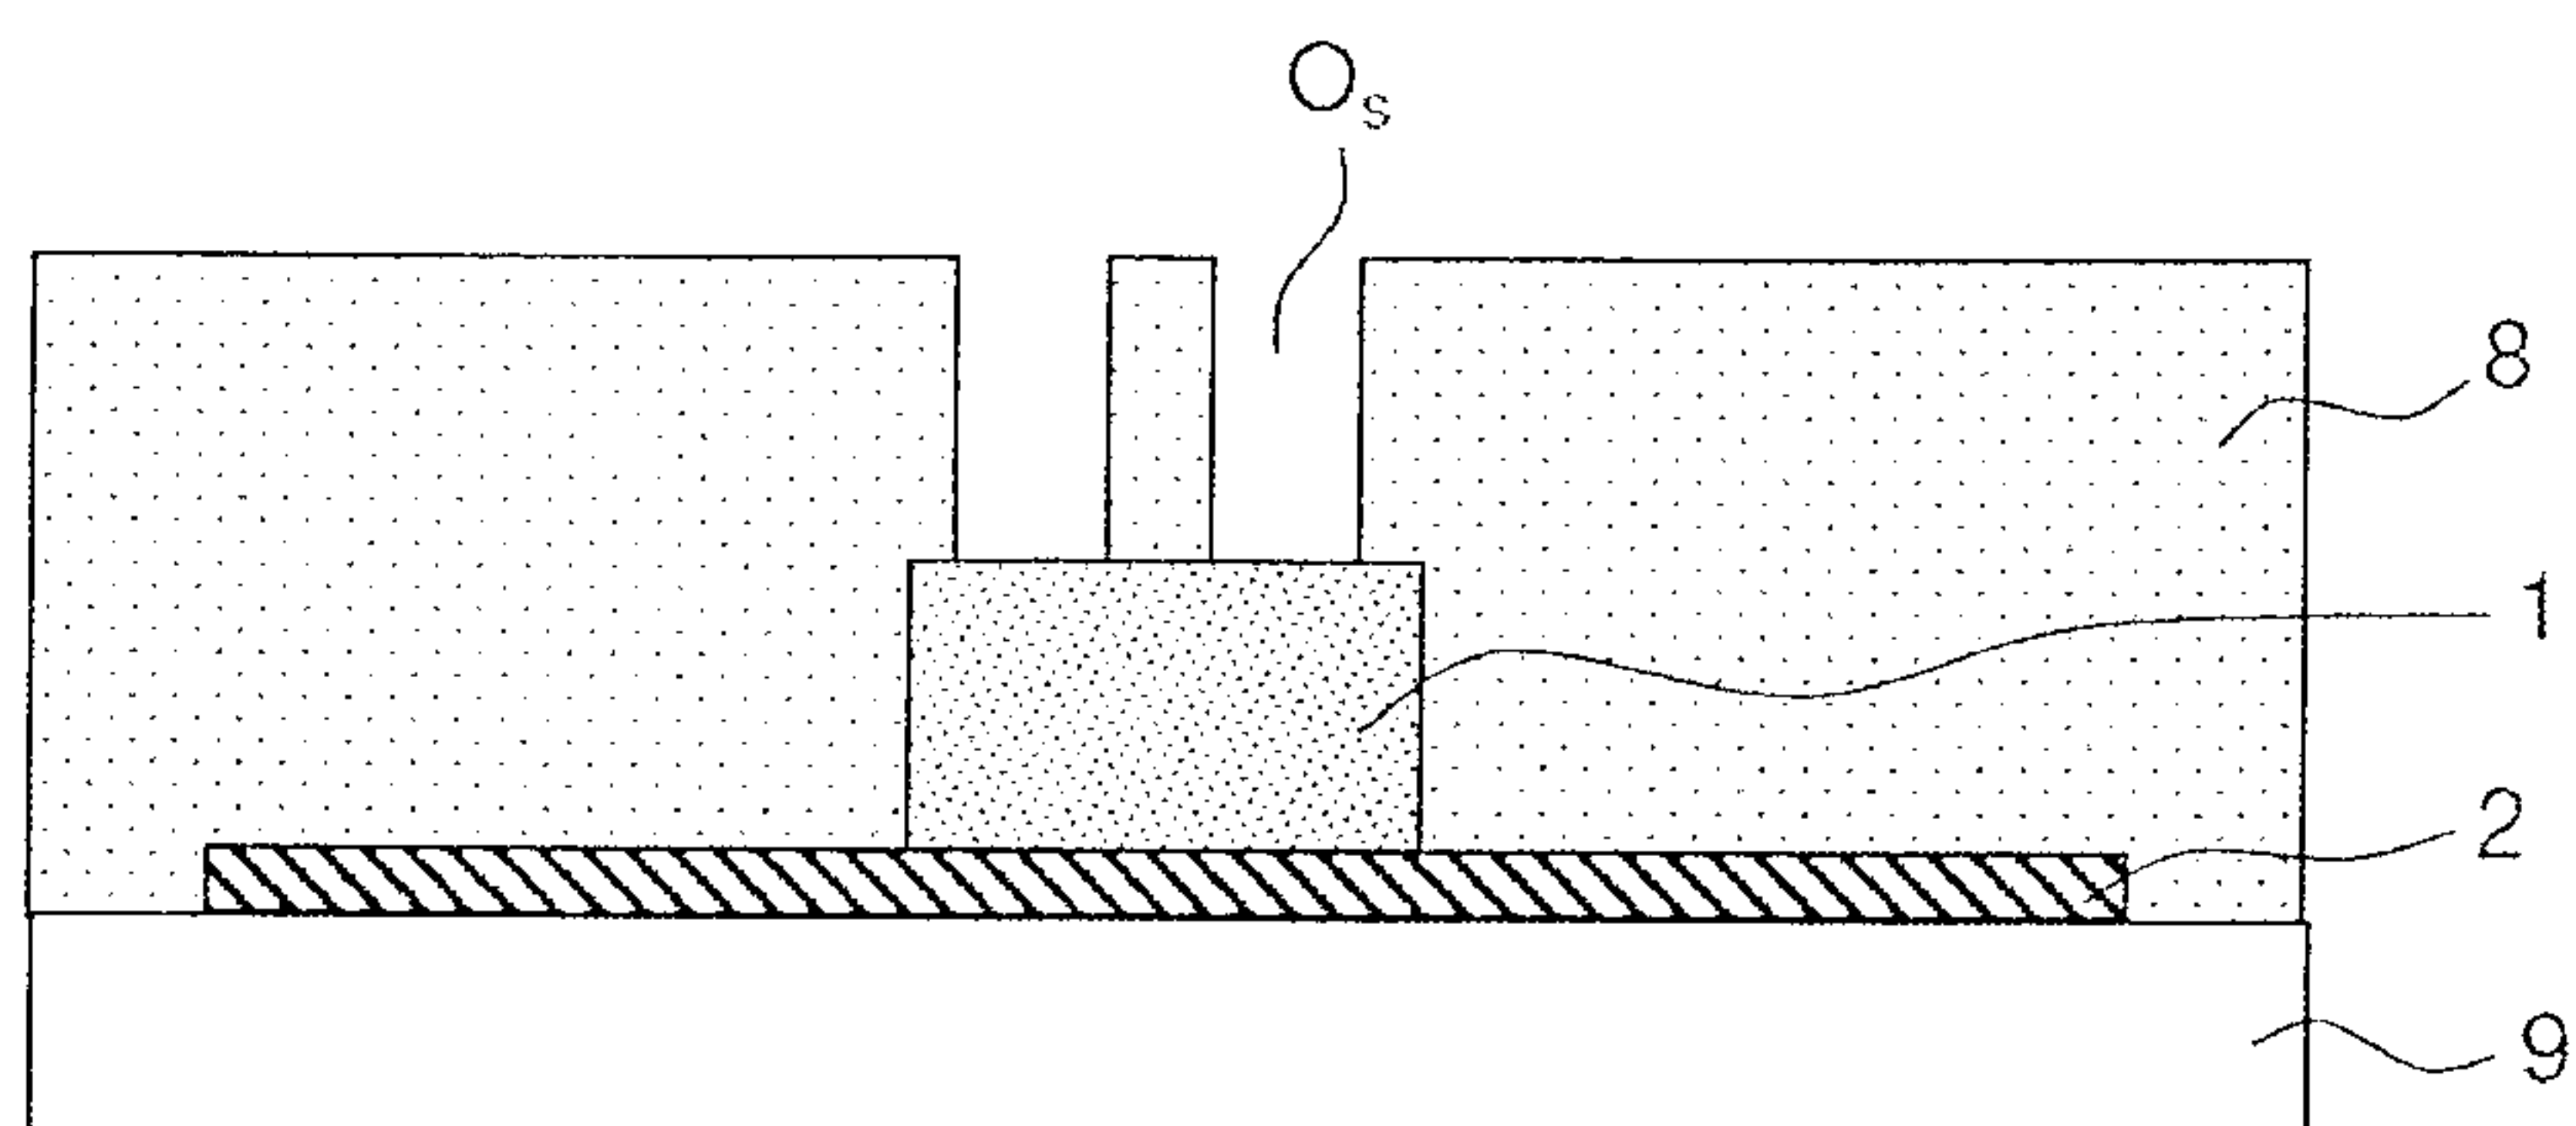


FIG. 5c

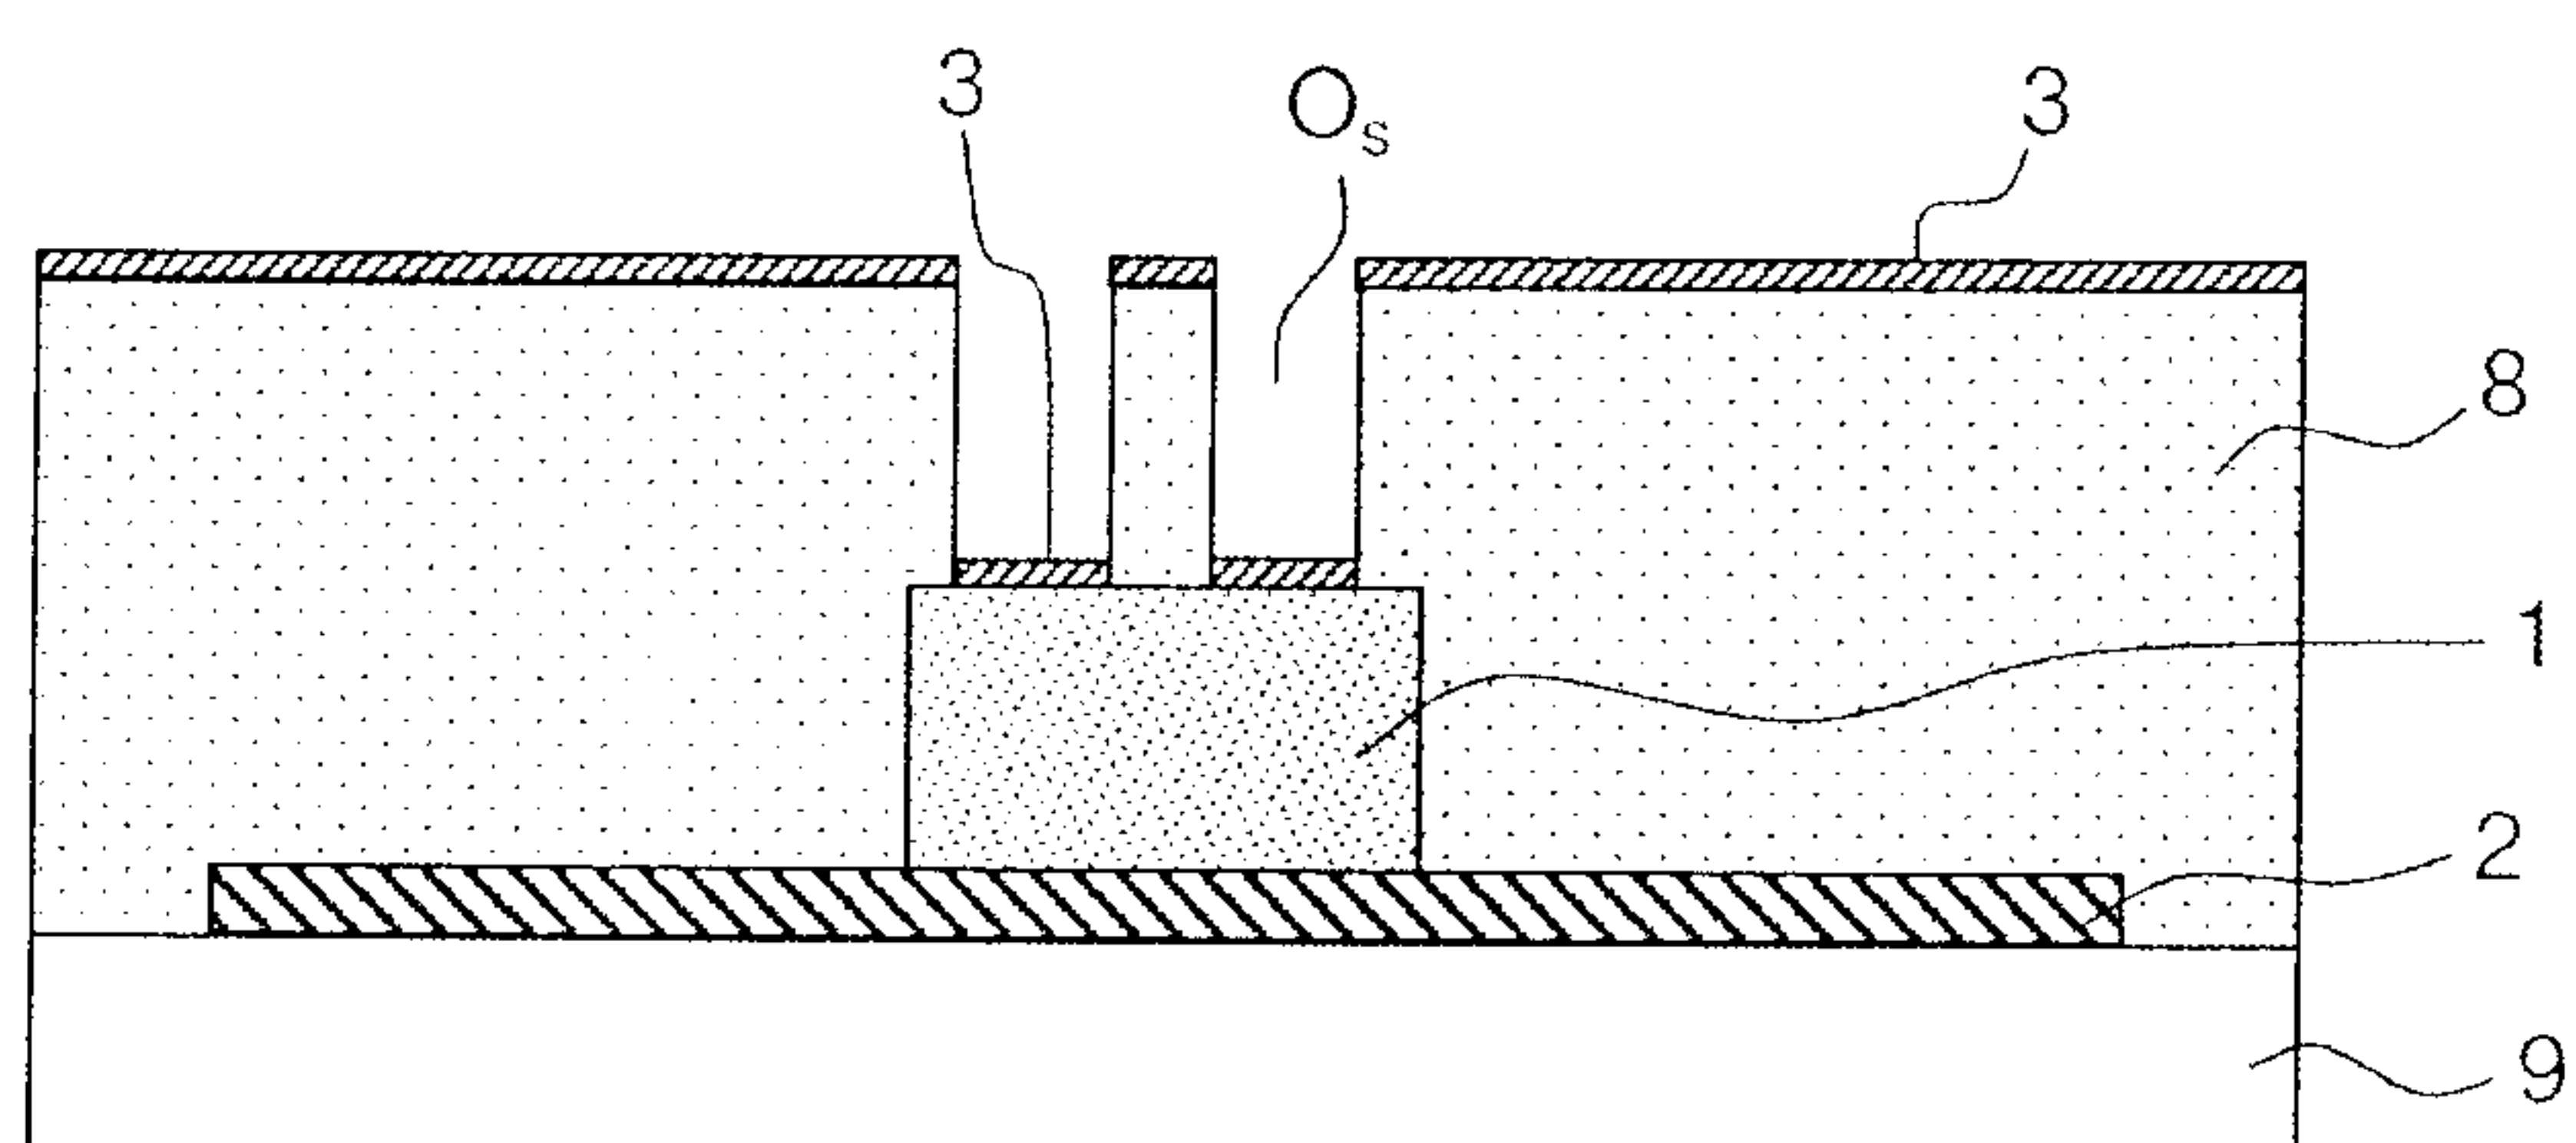


FIG. 5d

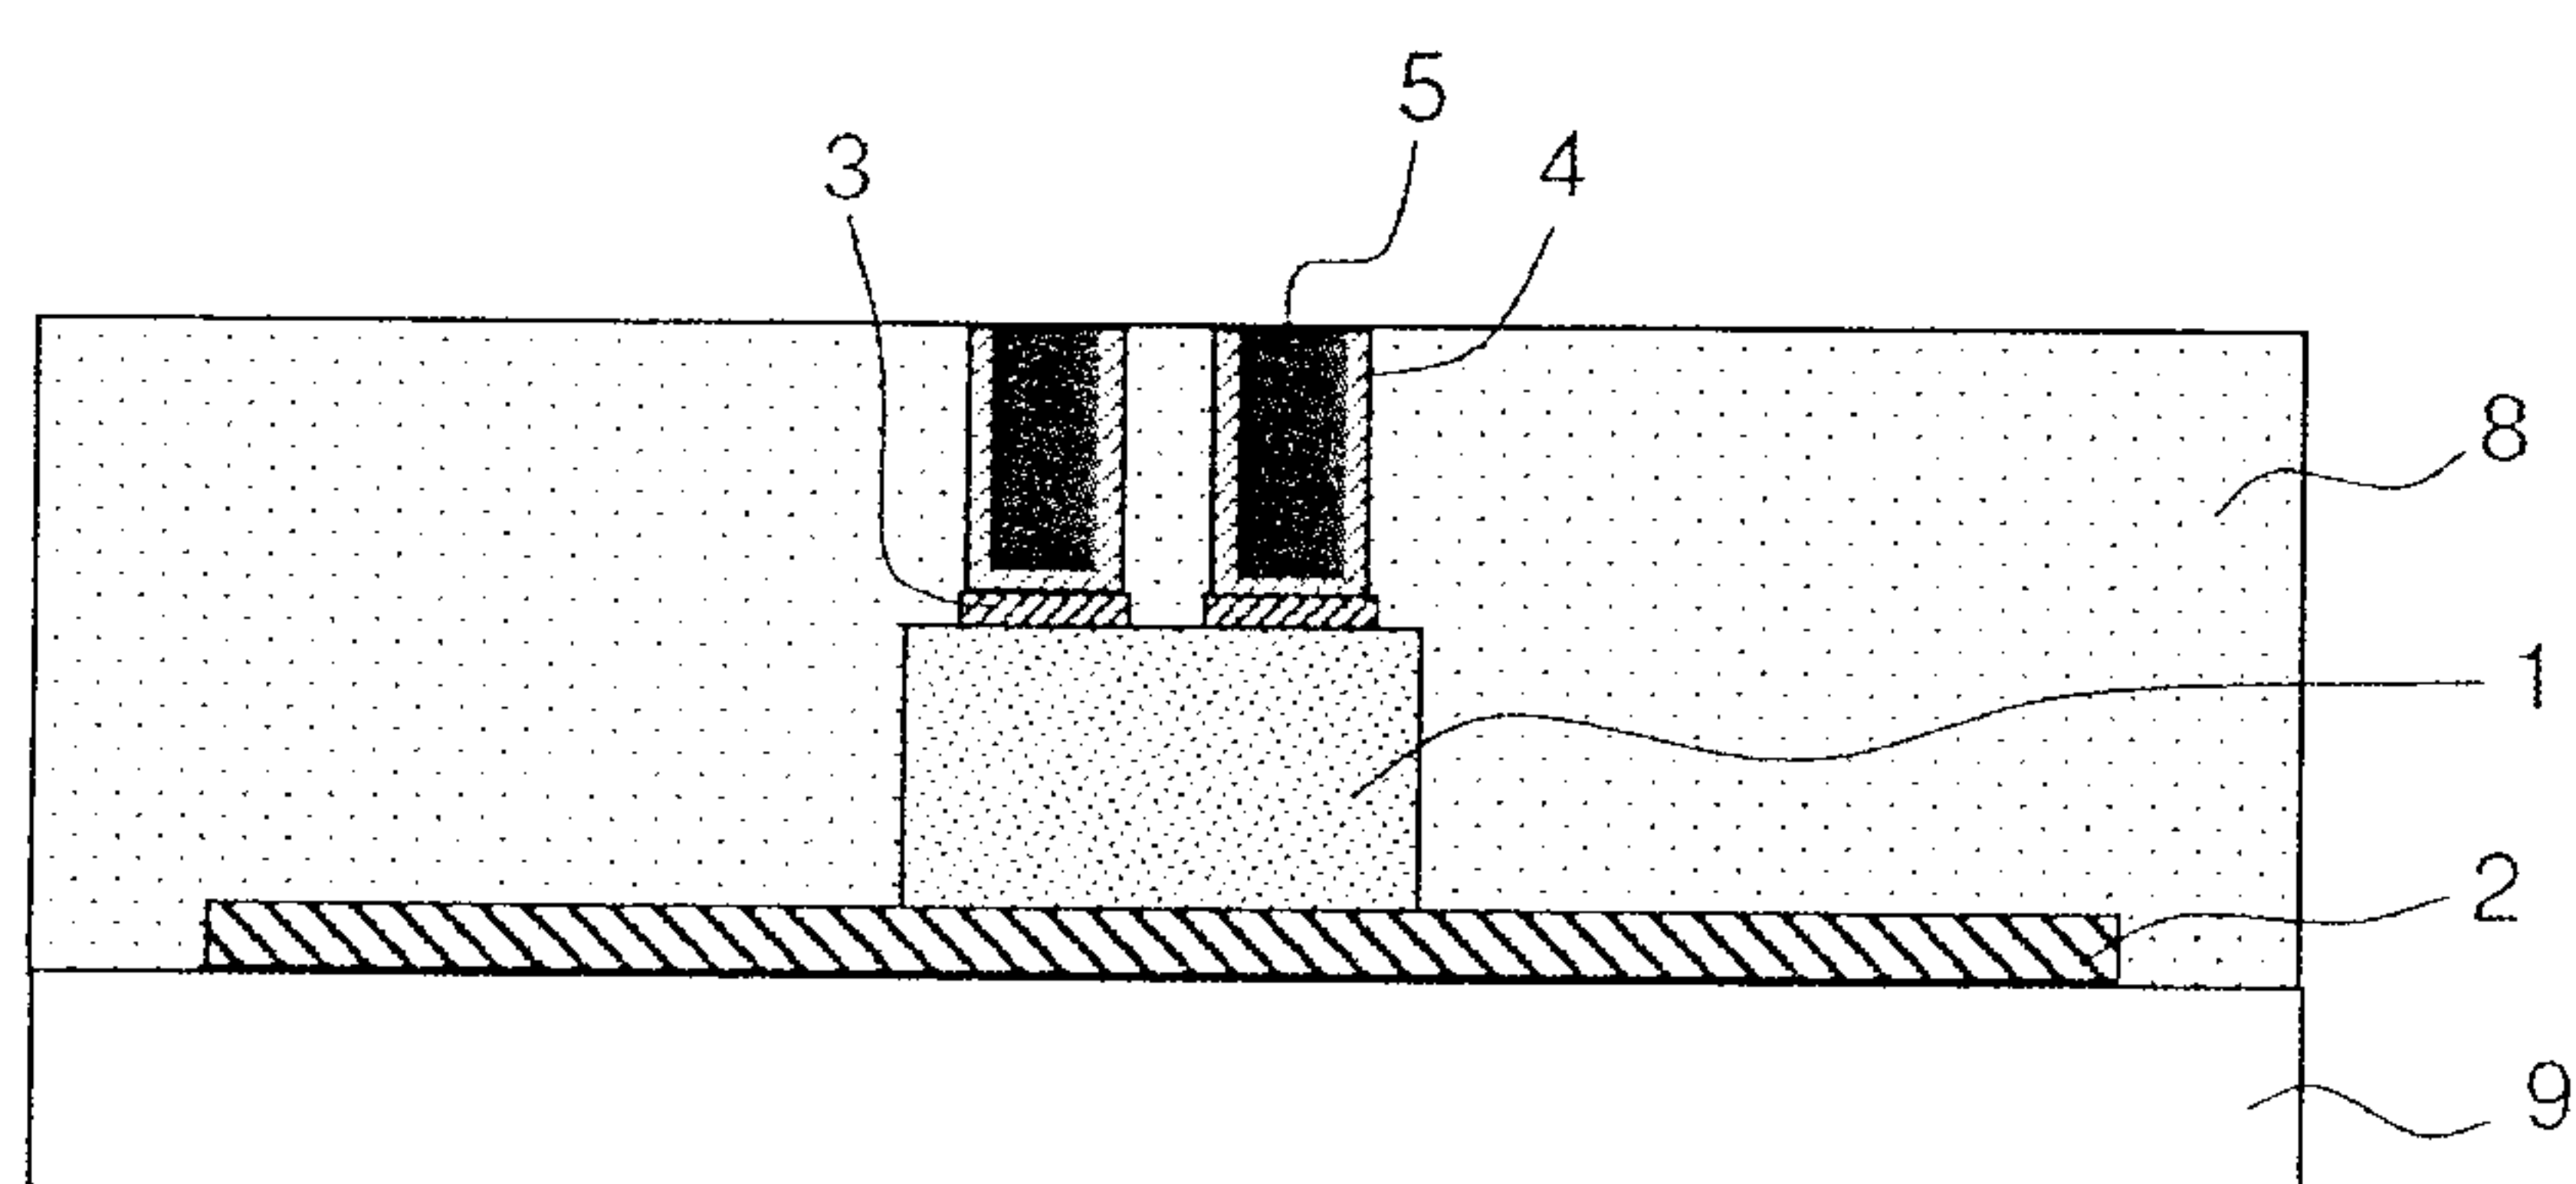


FIG. 5e

6/29

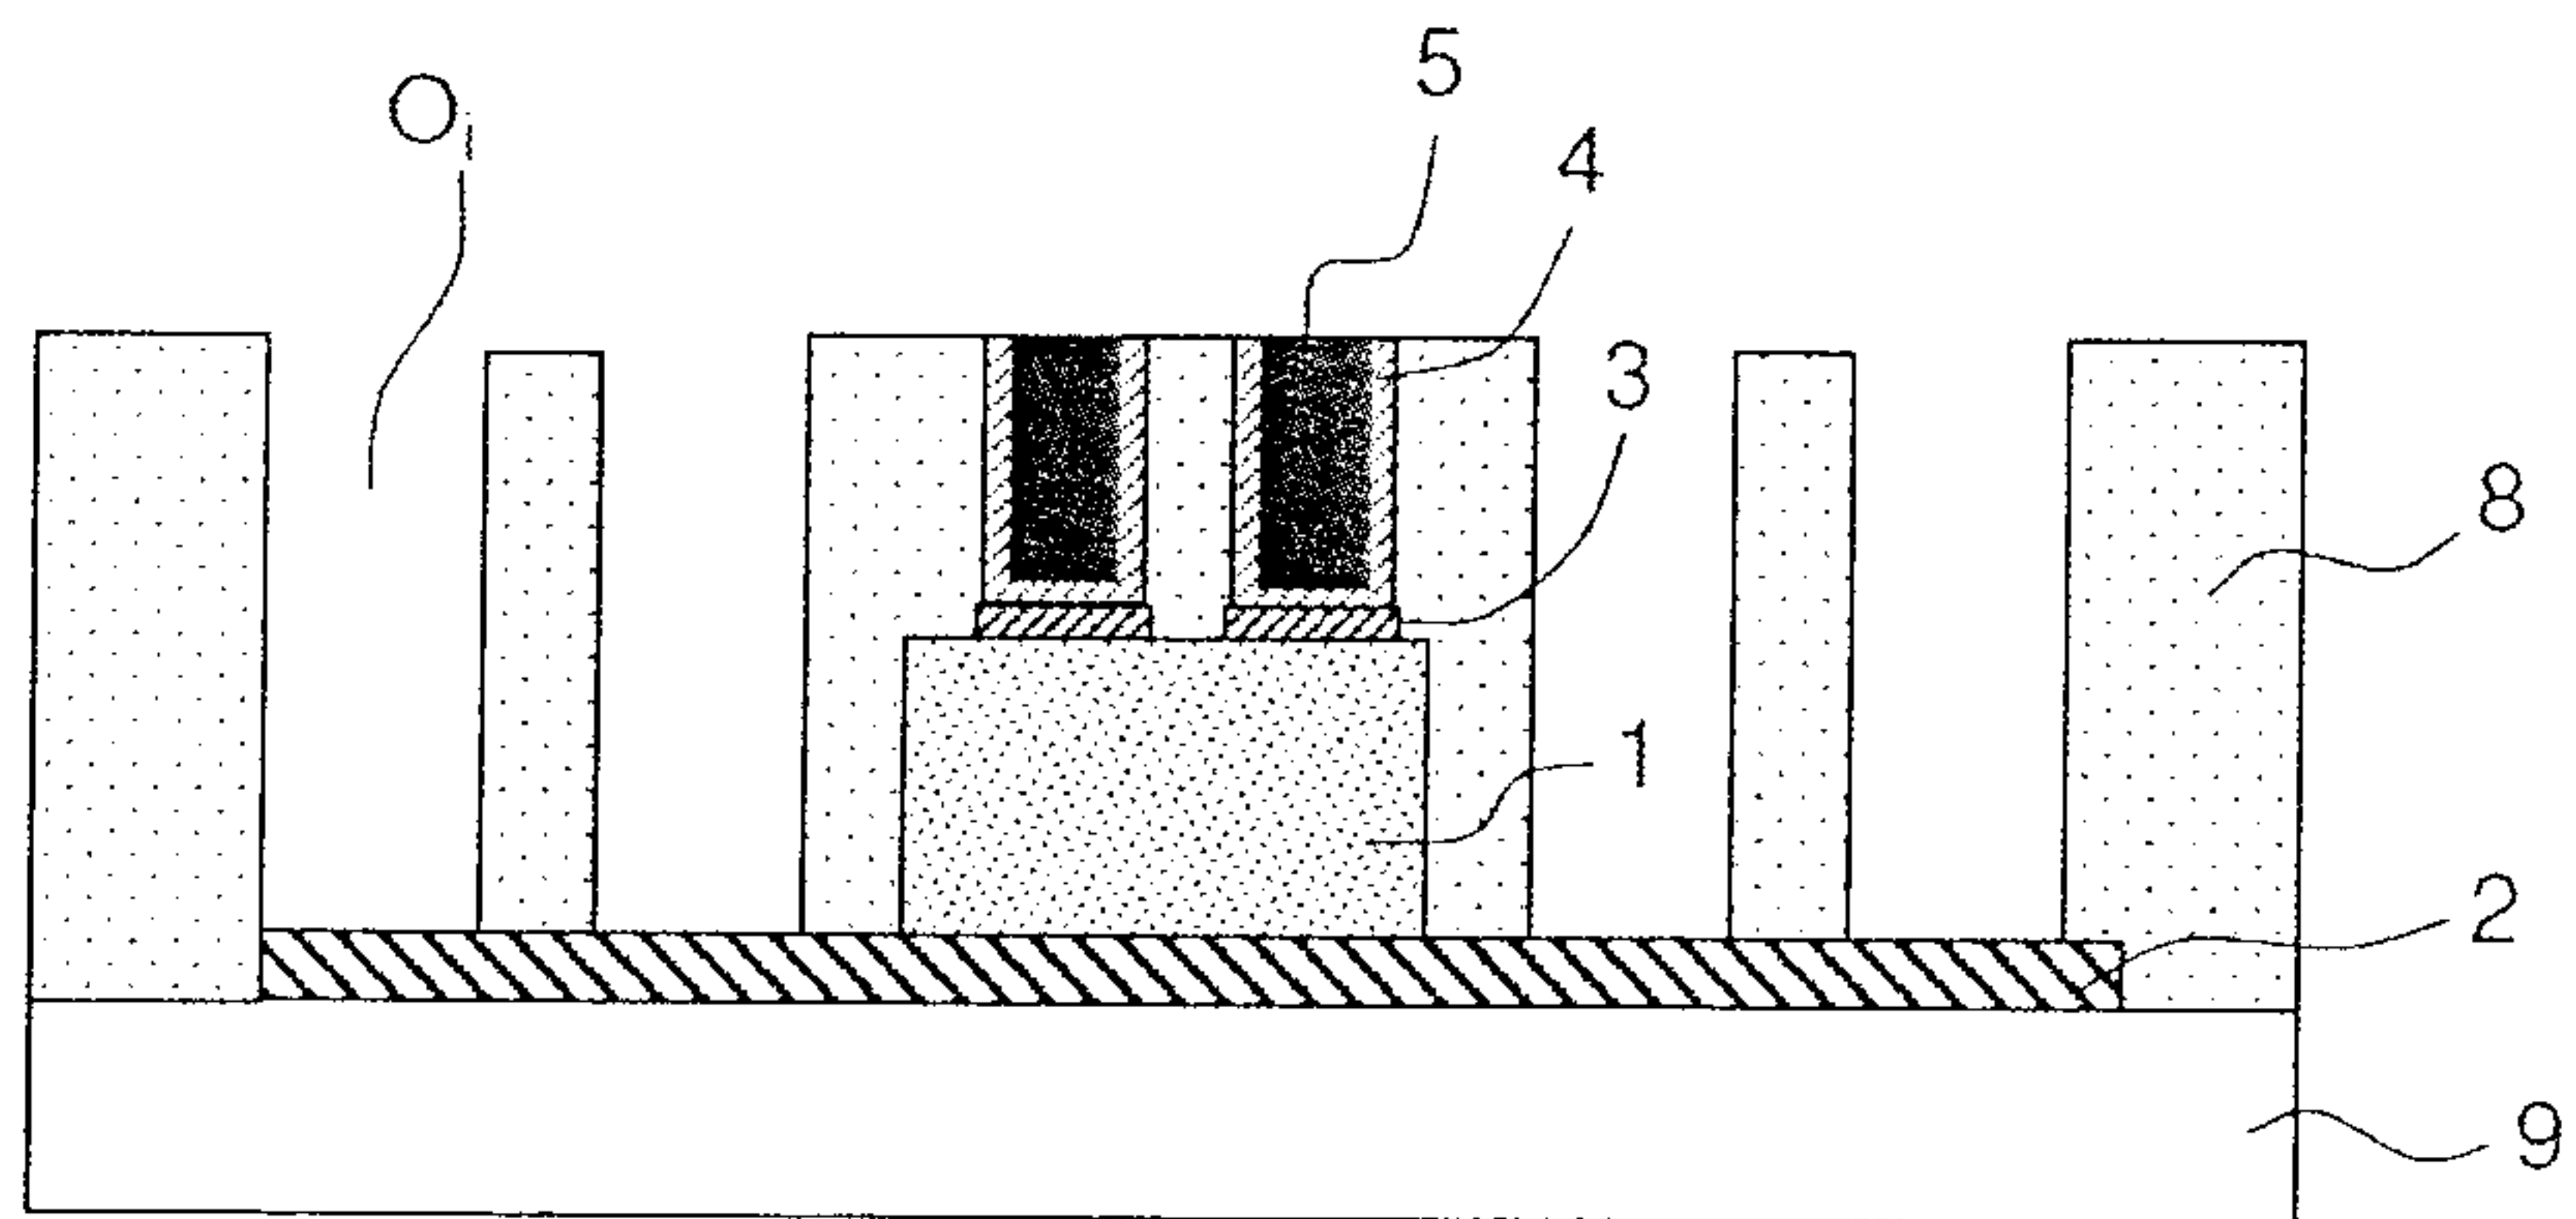


FIG. 5f

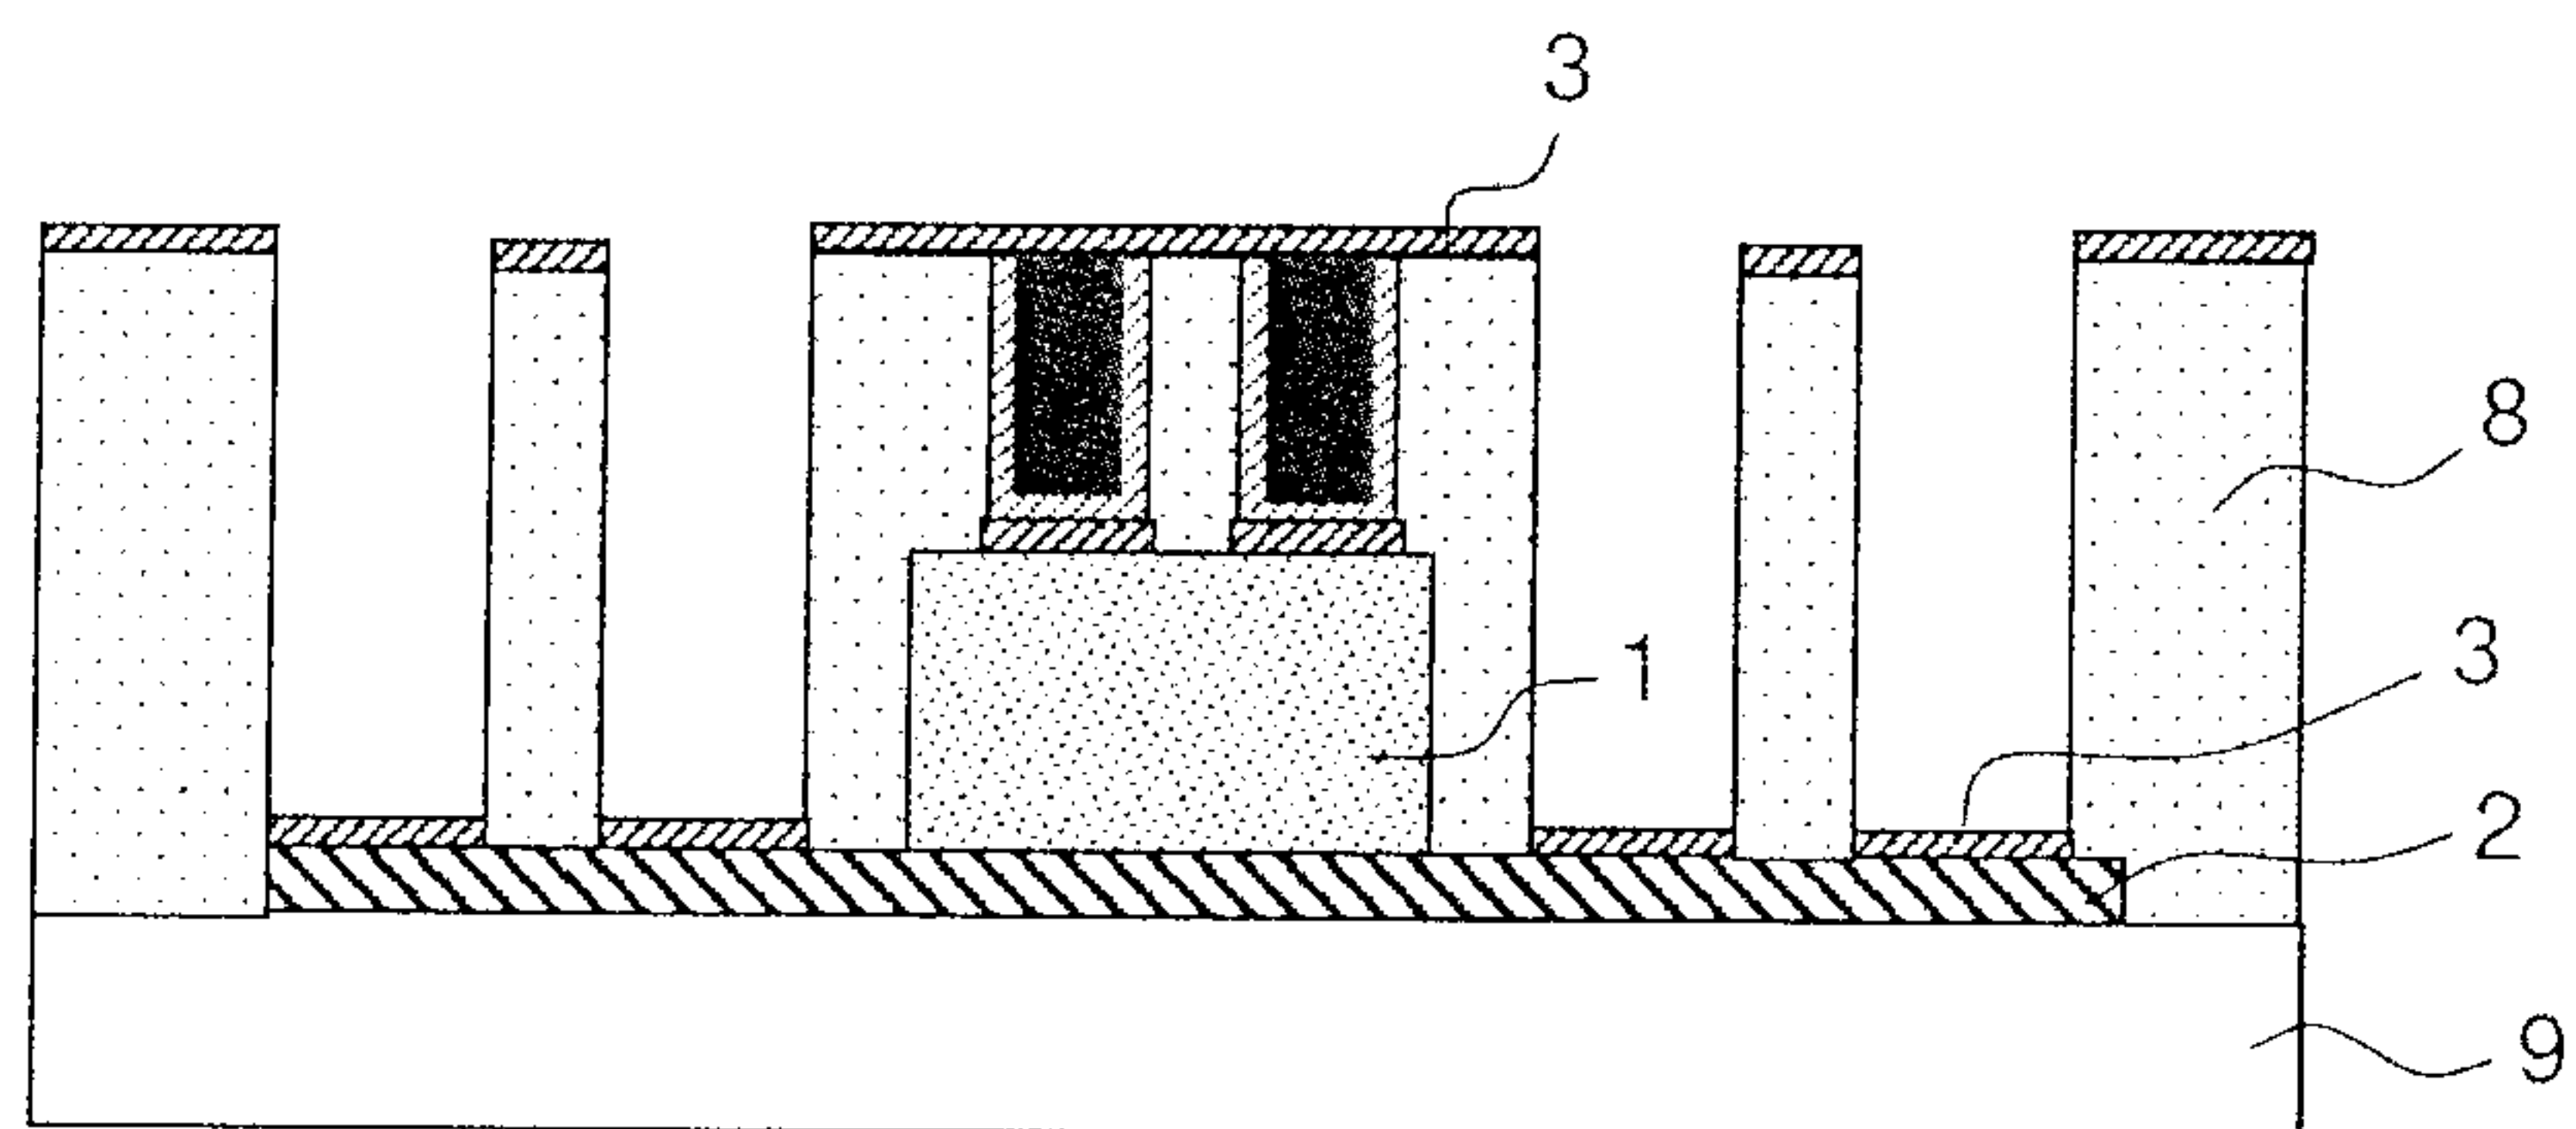


FIG. 5g

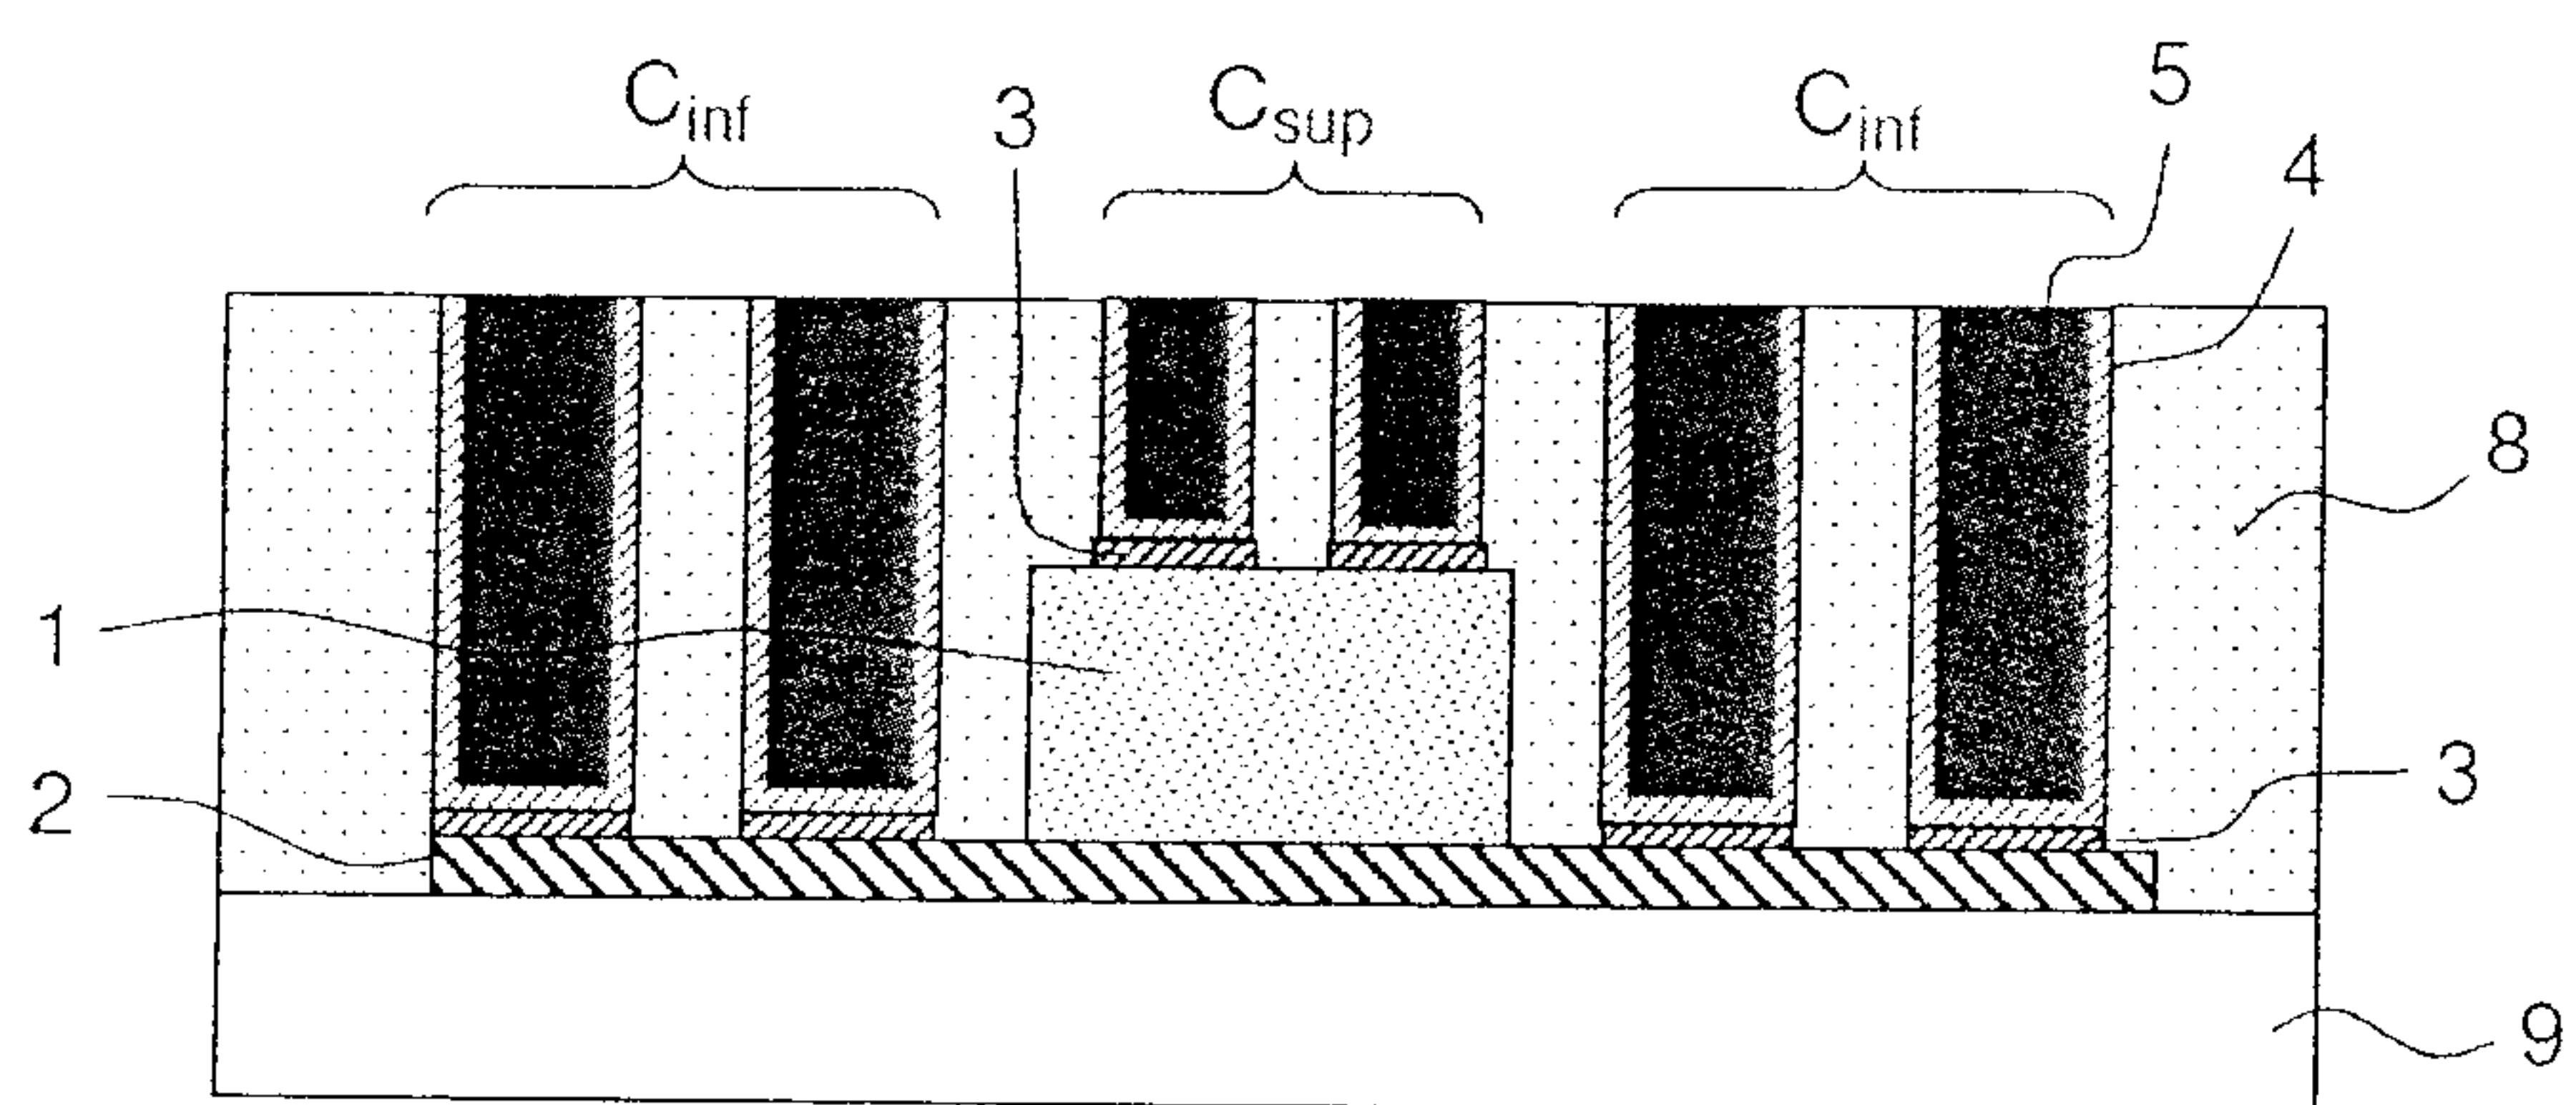


FIG. 5h

7/29

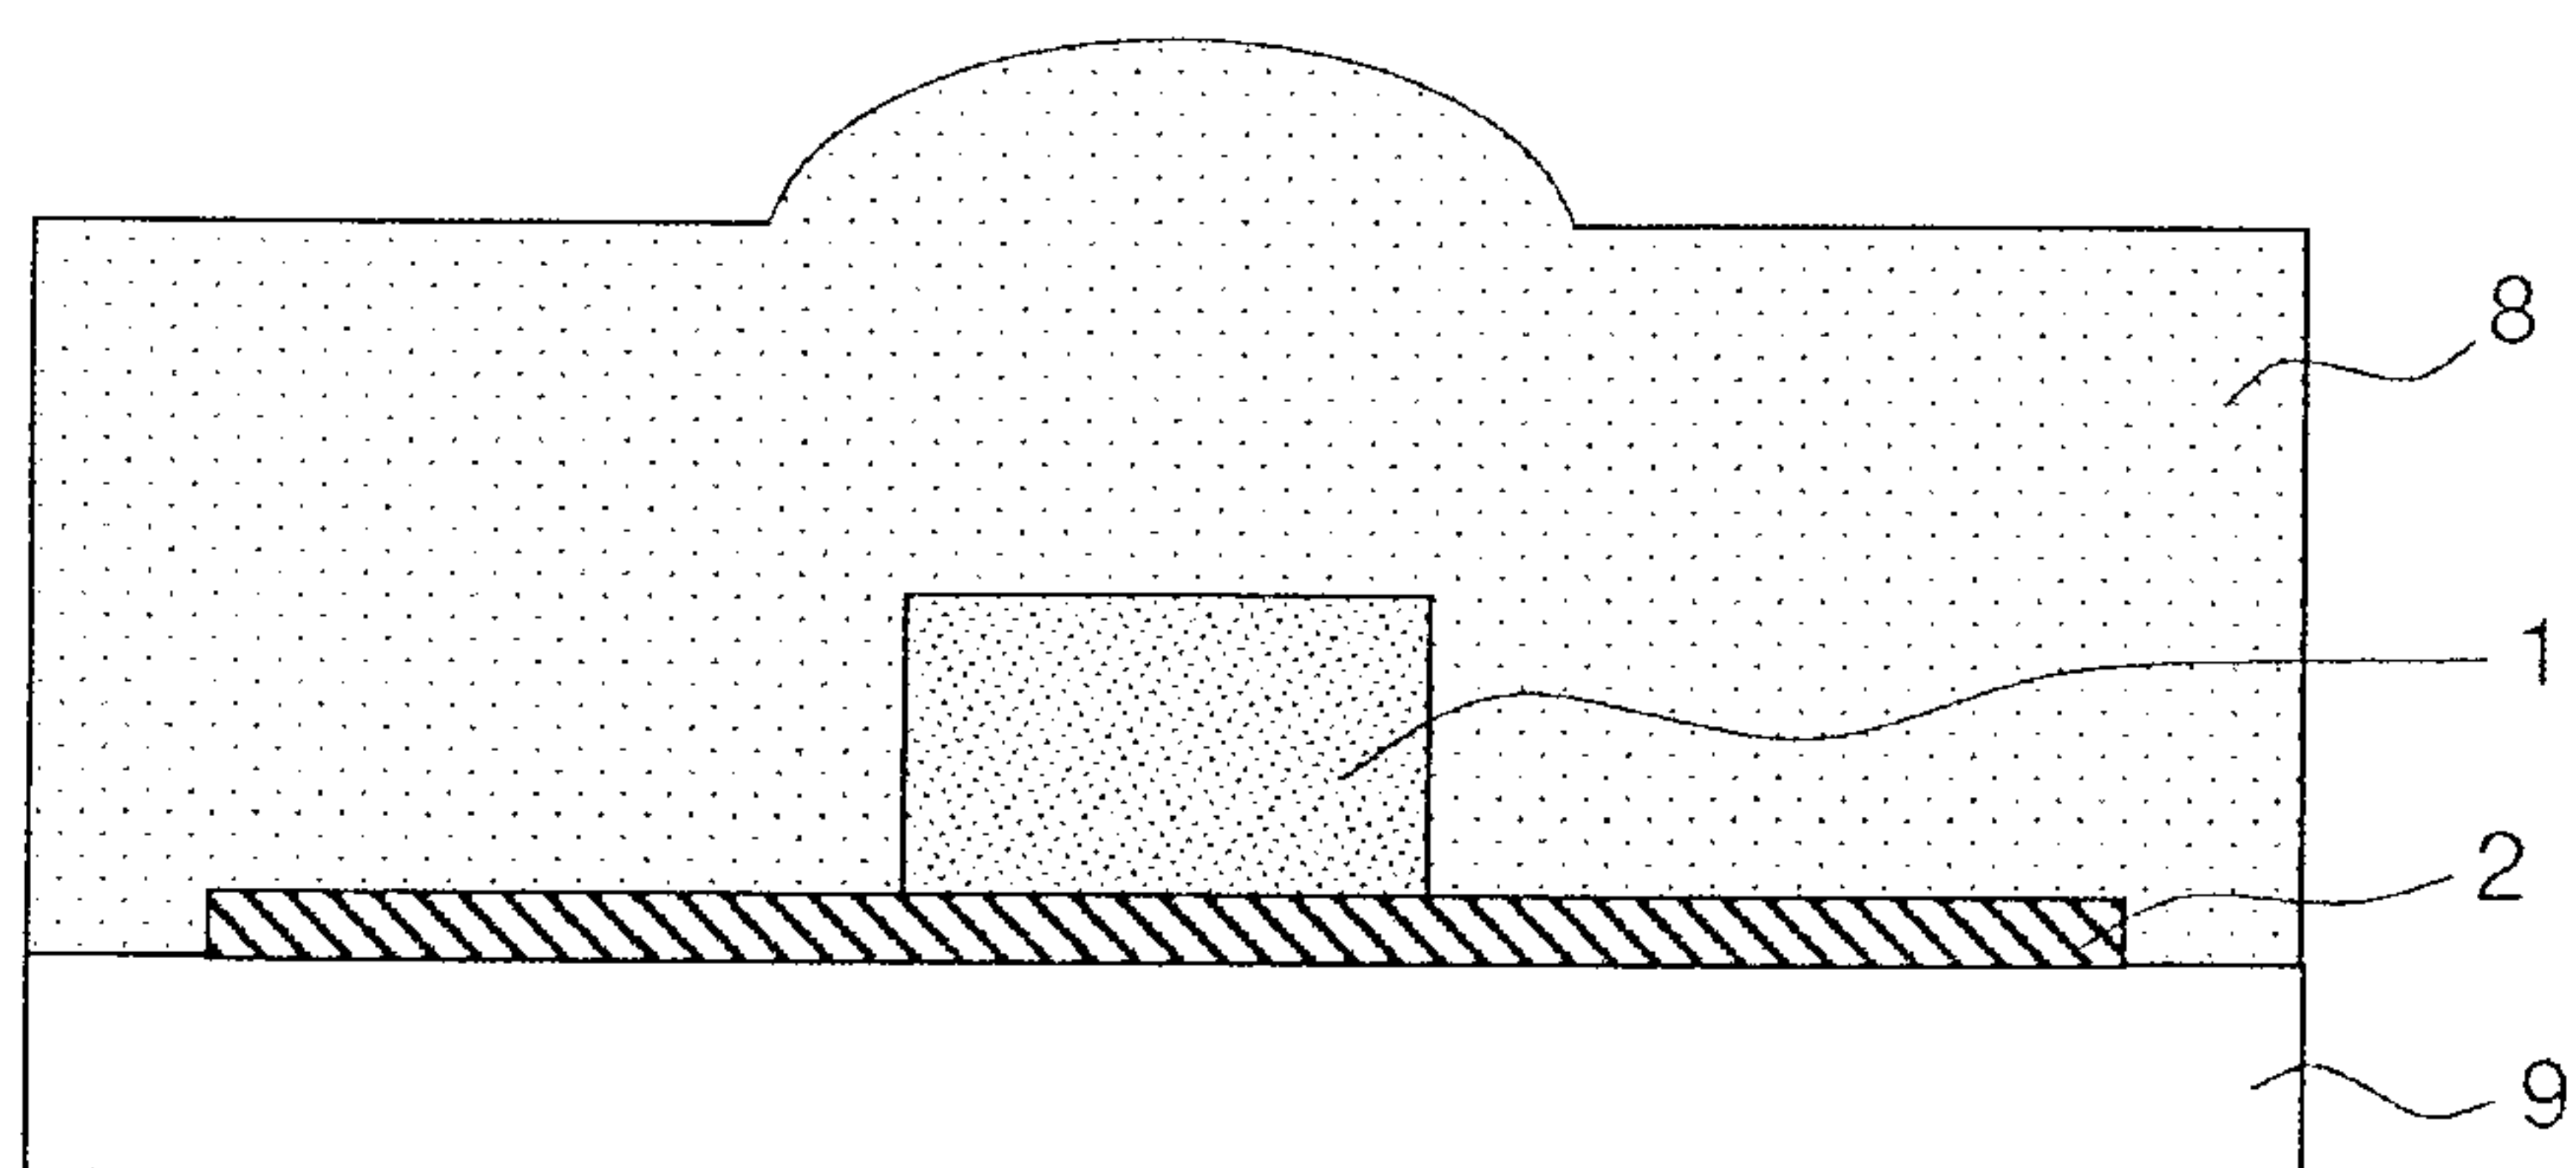


FIG. 6a

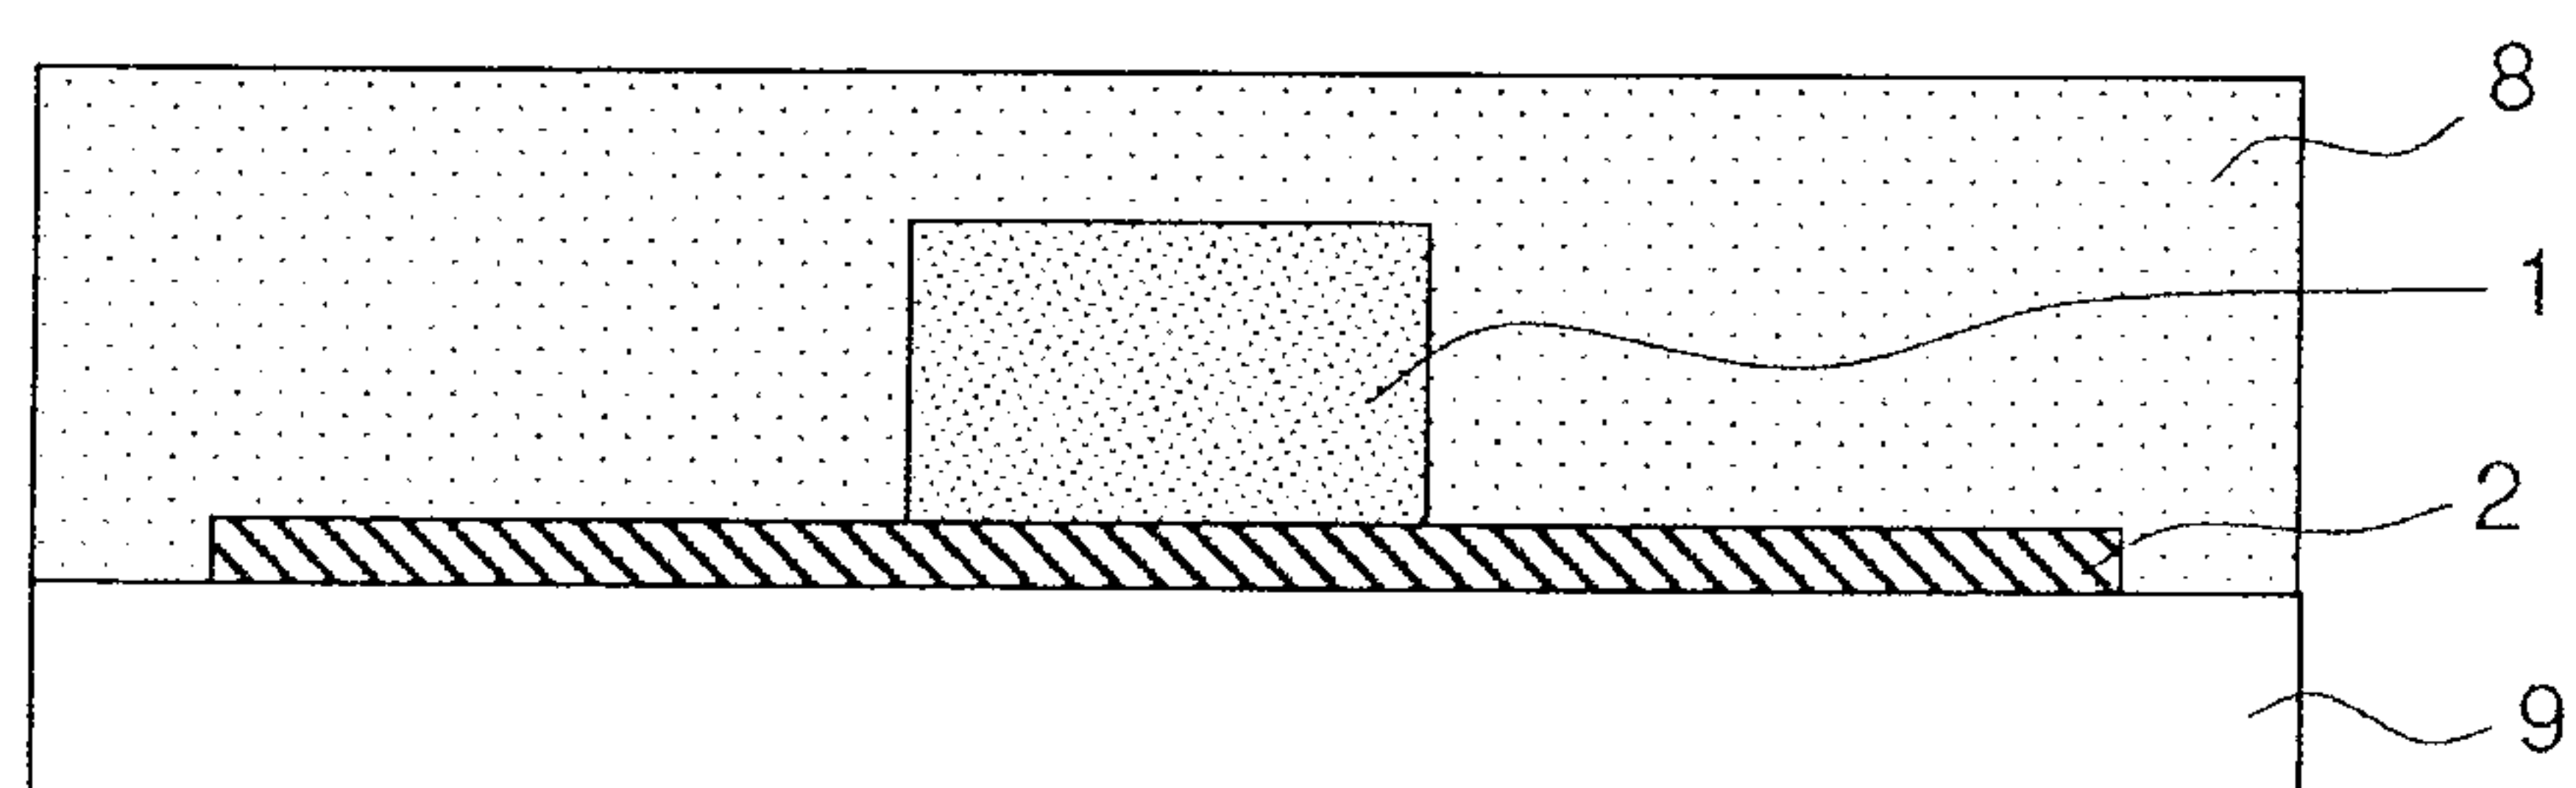


FIG. 6b

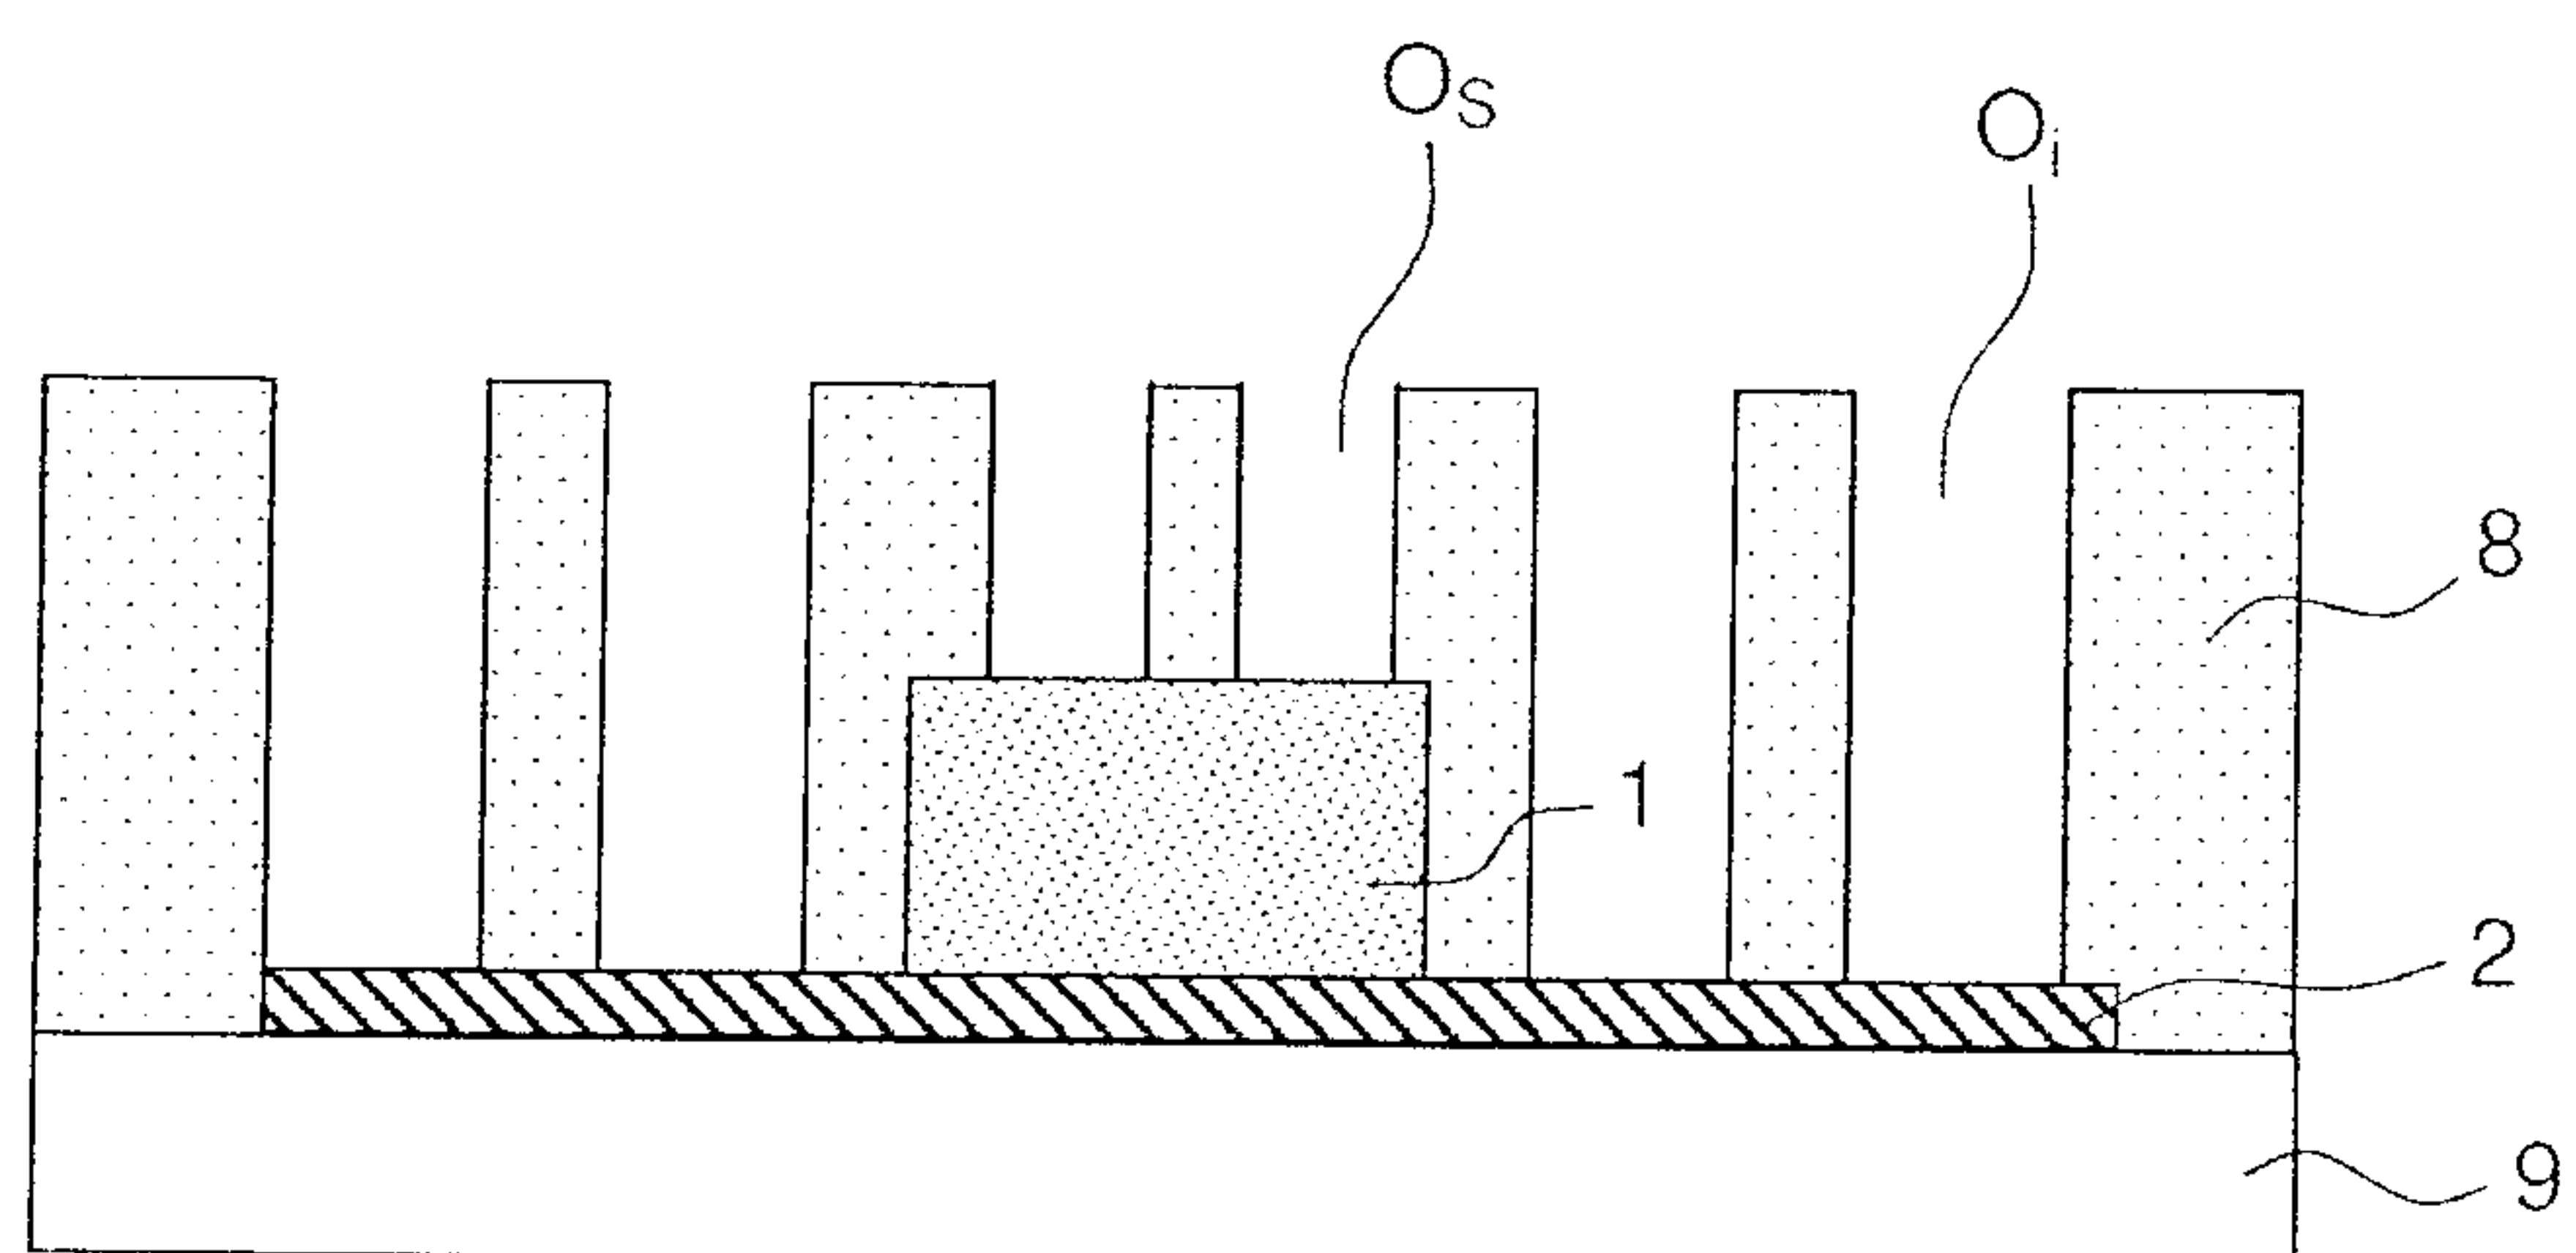


FIG. 6c

8/29

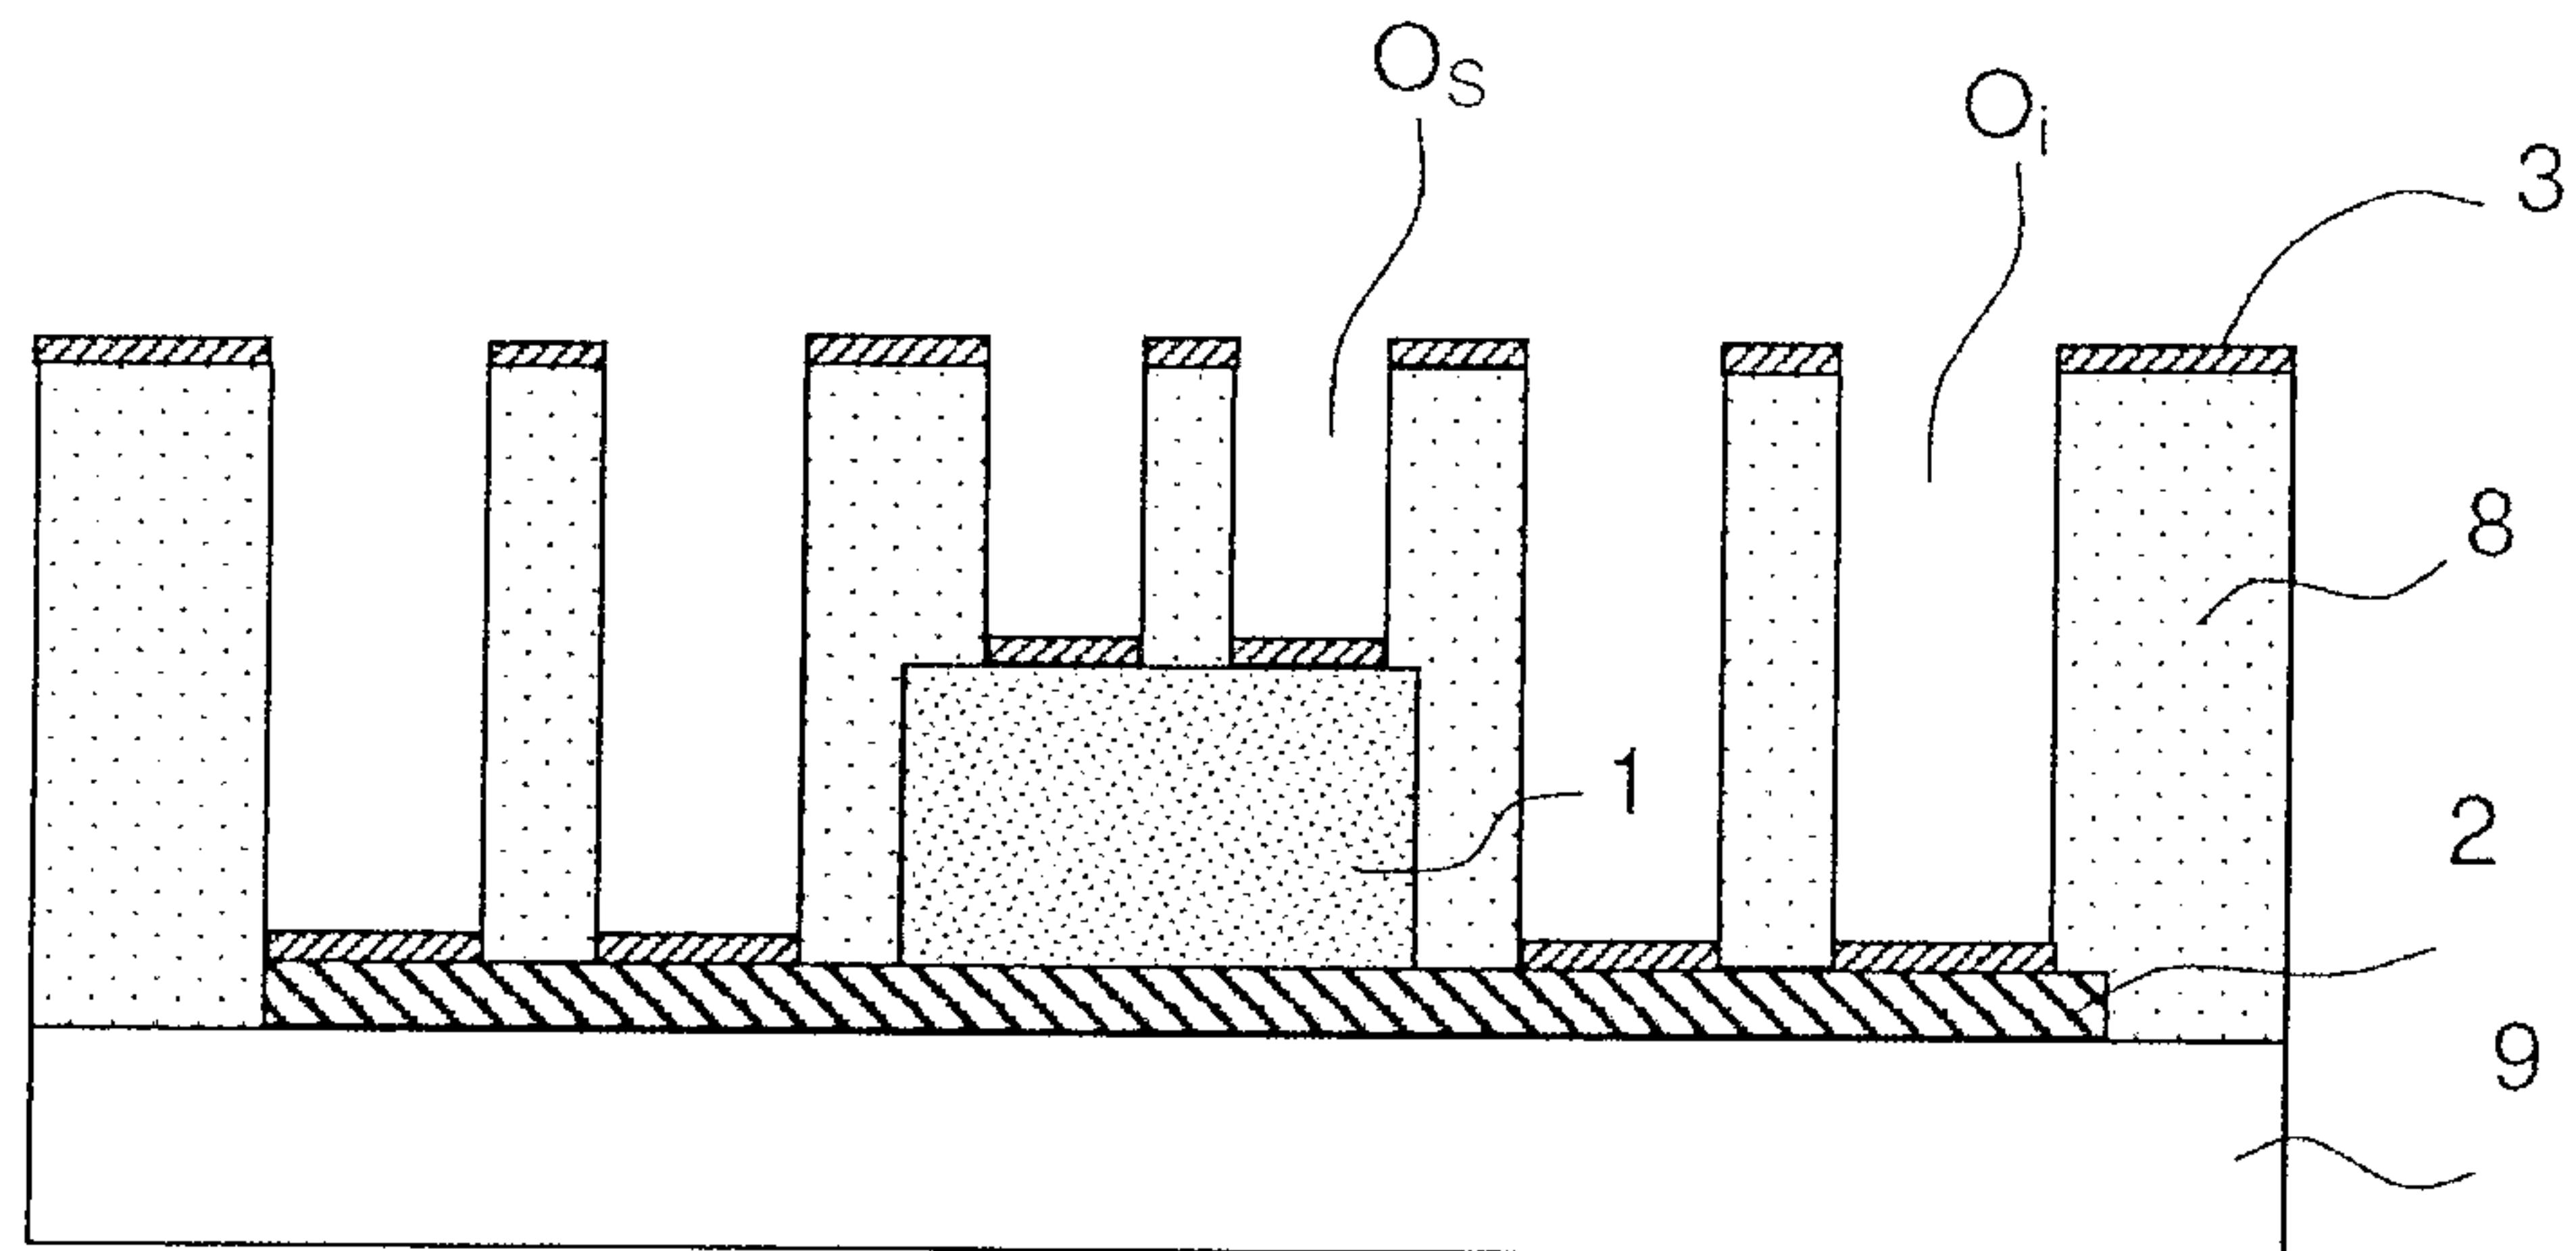


FIG. 6d

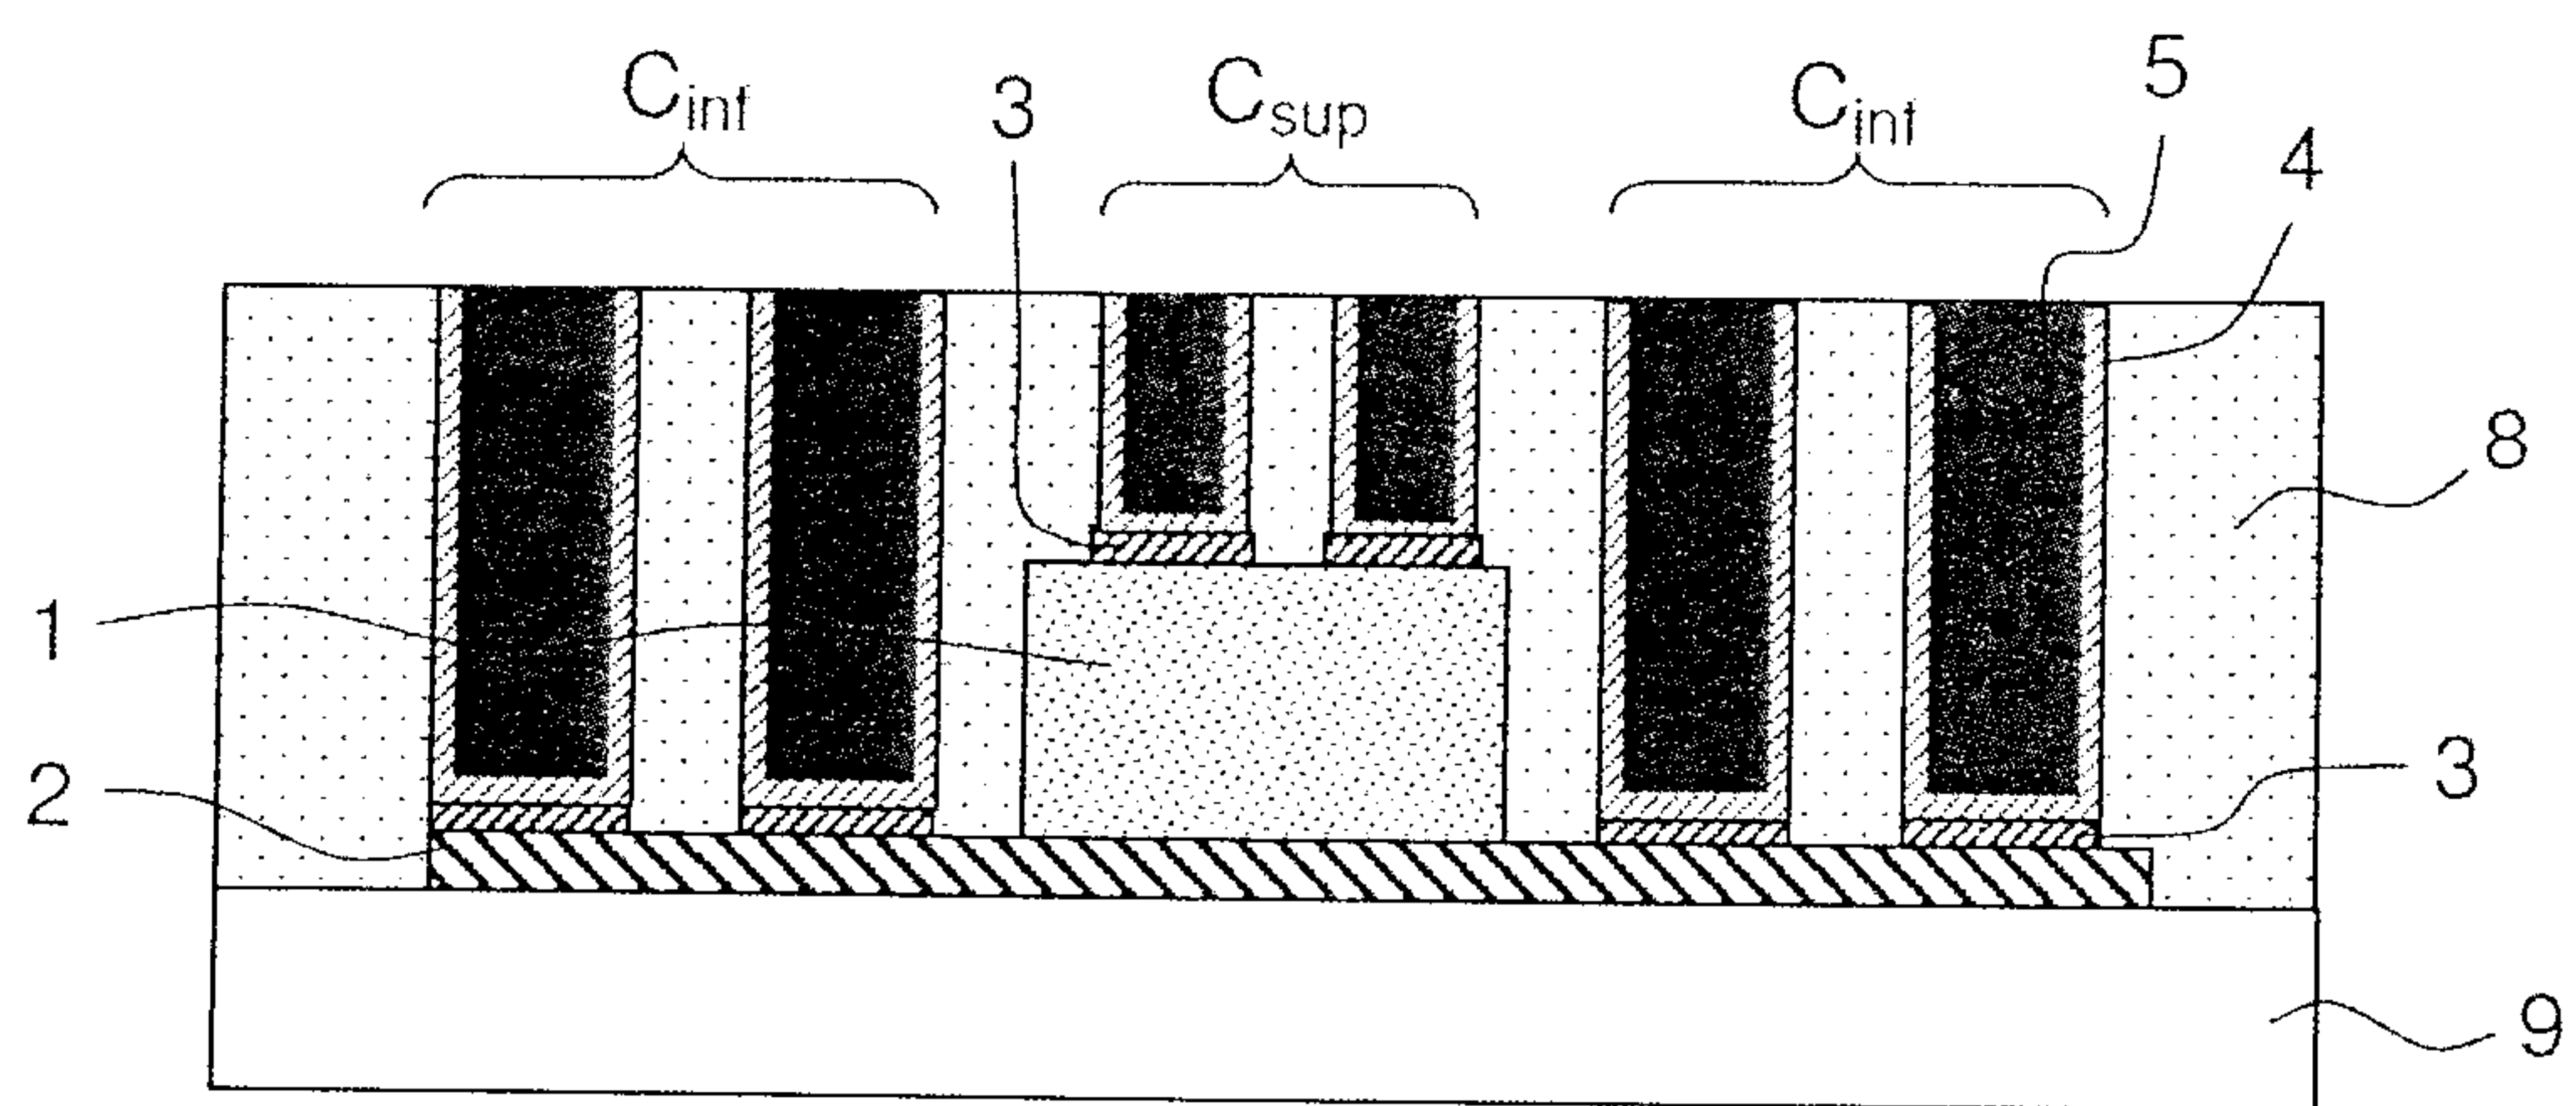


FIG. 6e

9/29

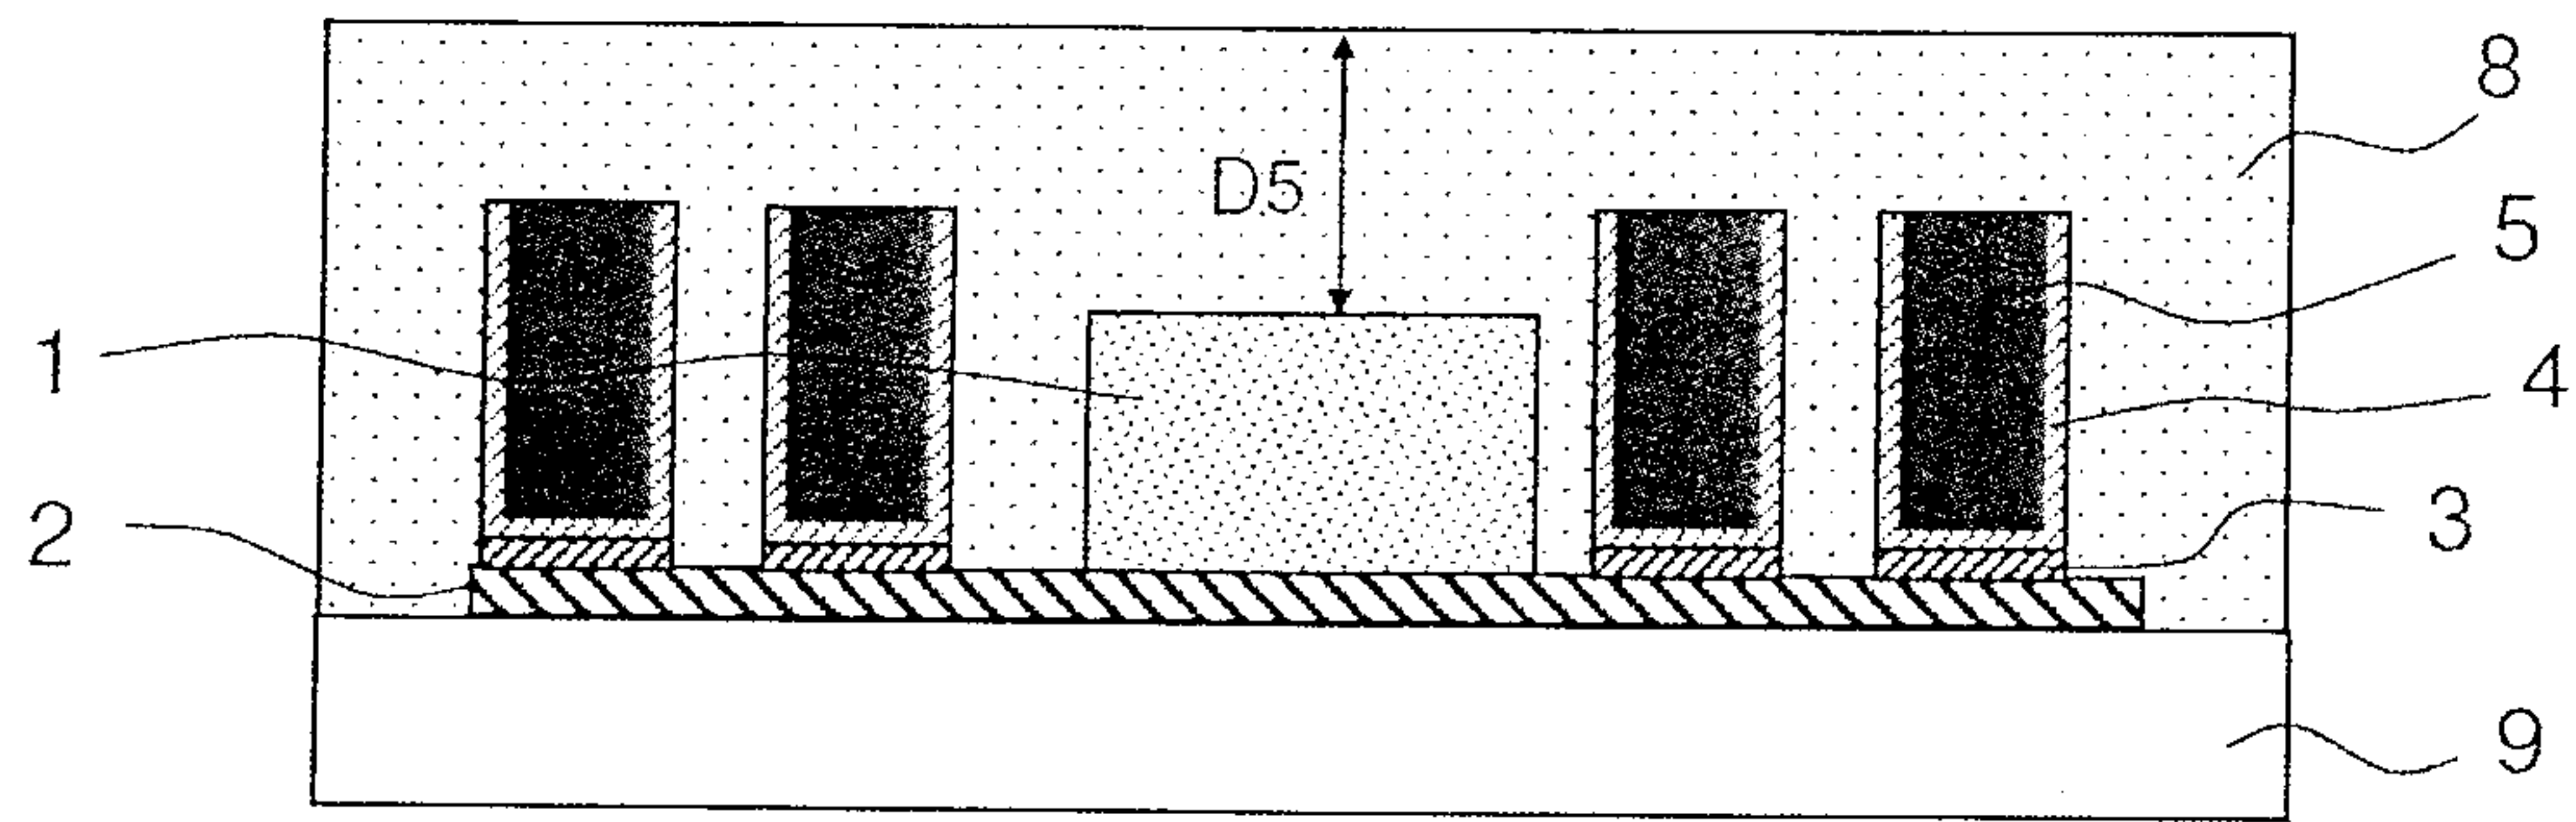


FIG. 7f

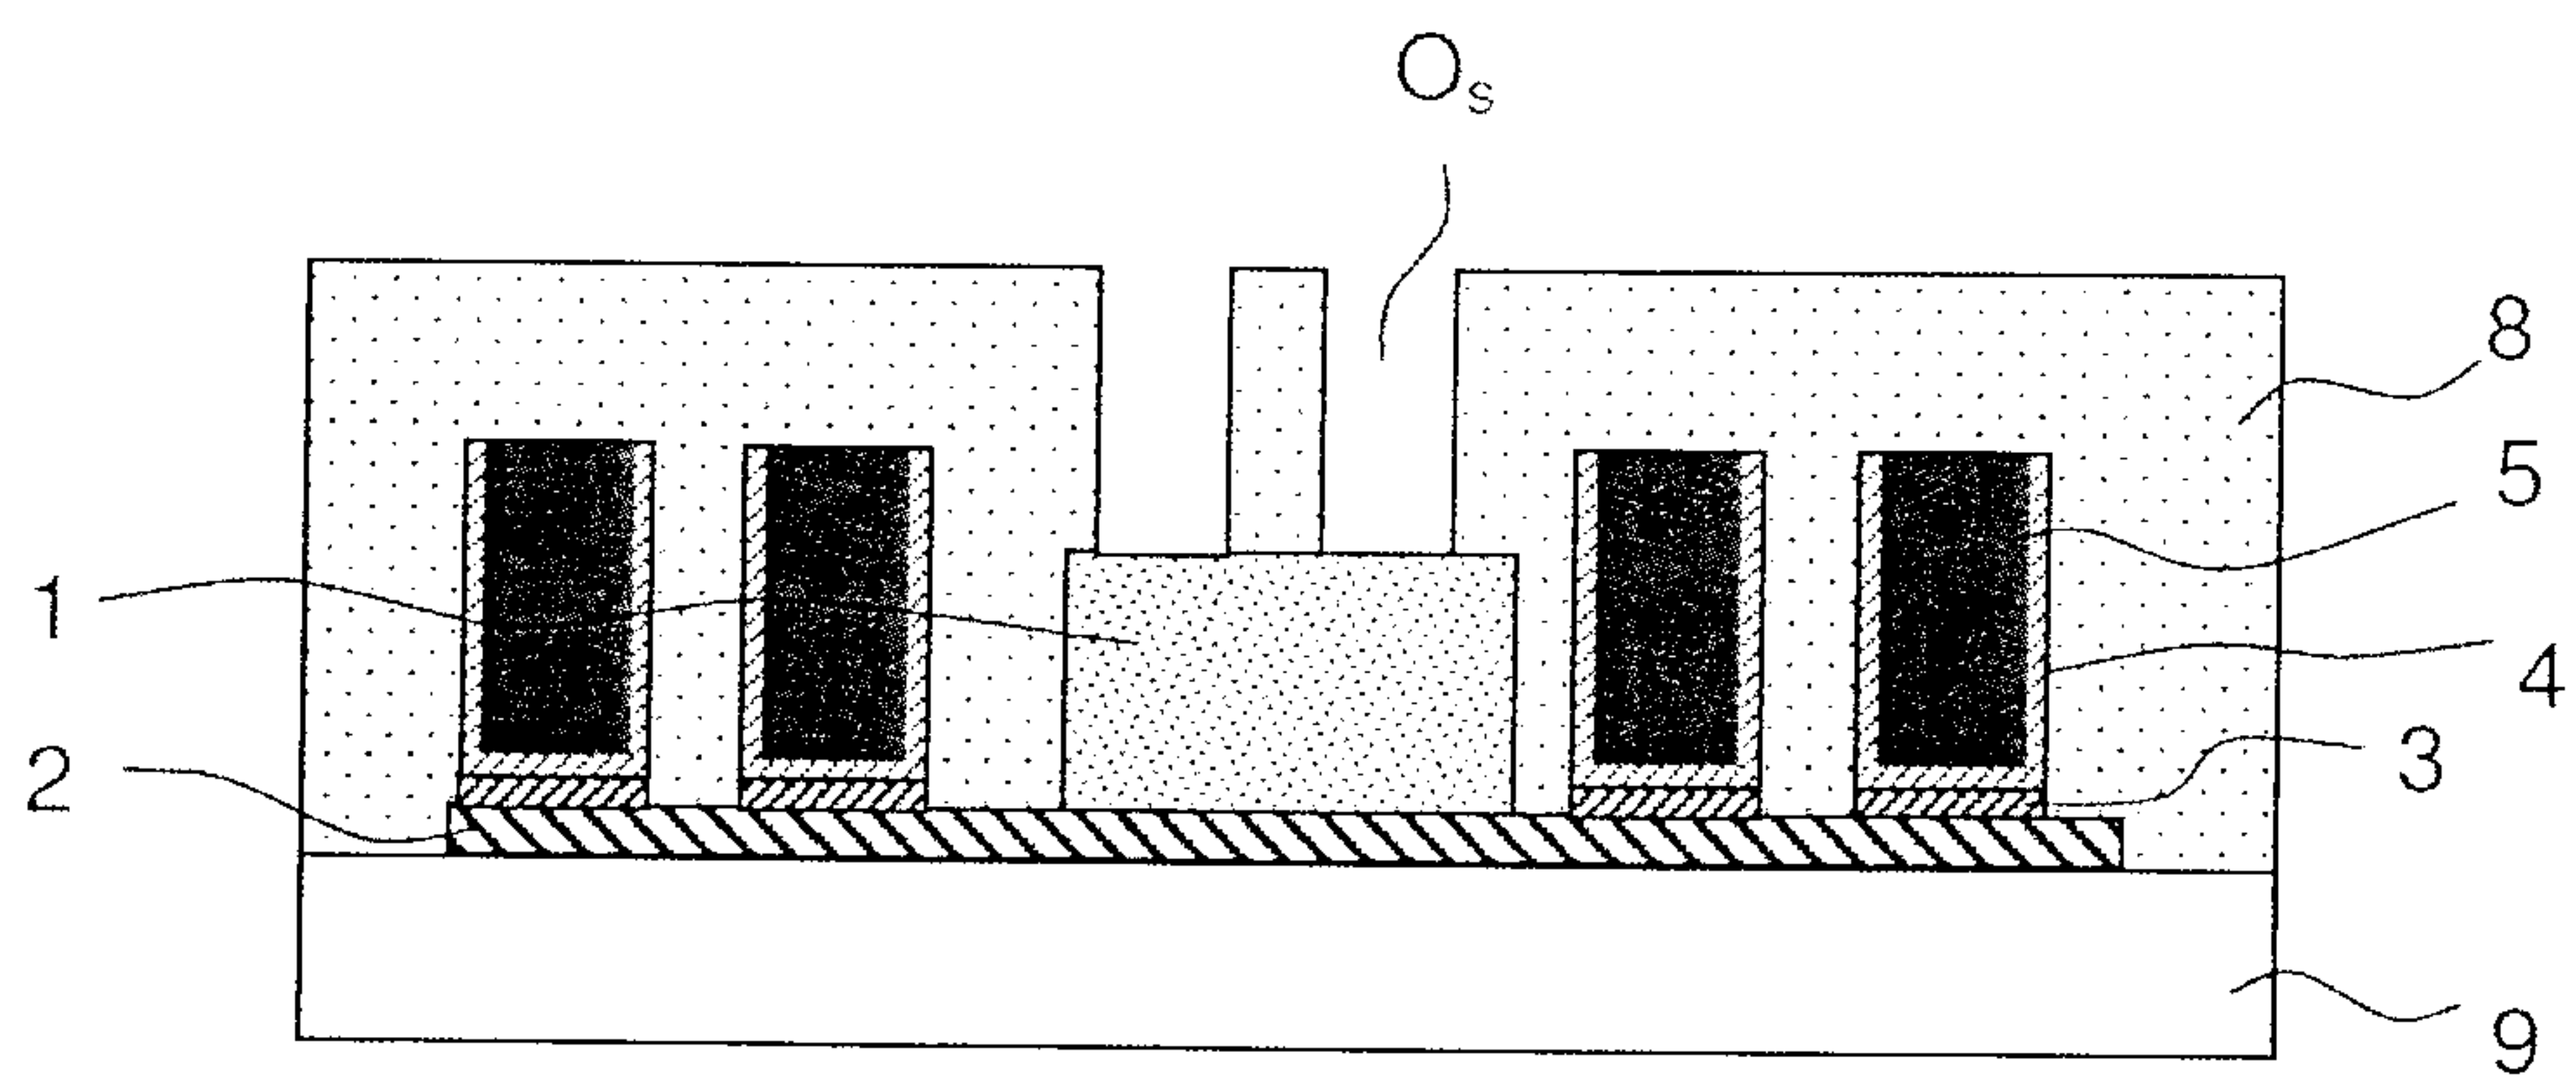


FIG. 7g

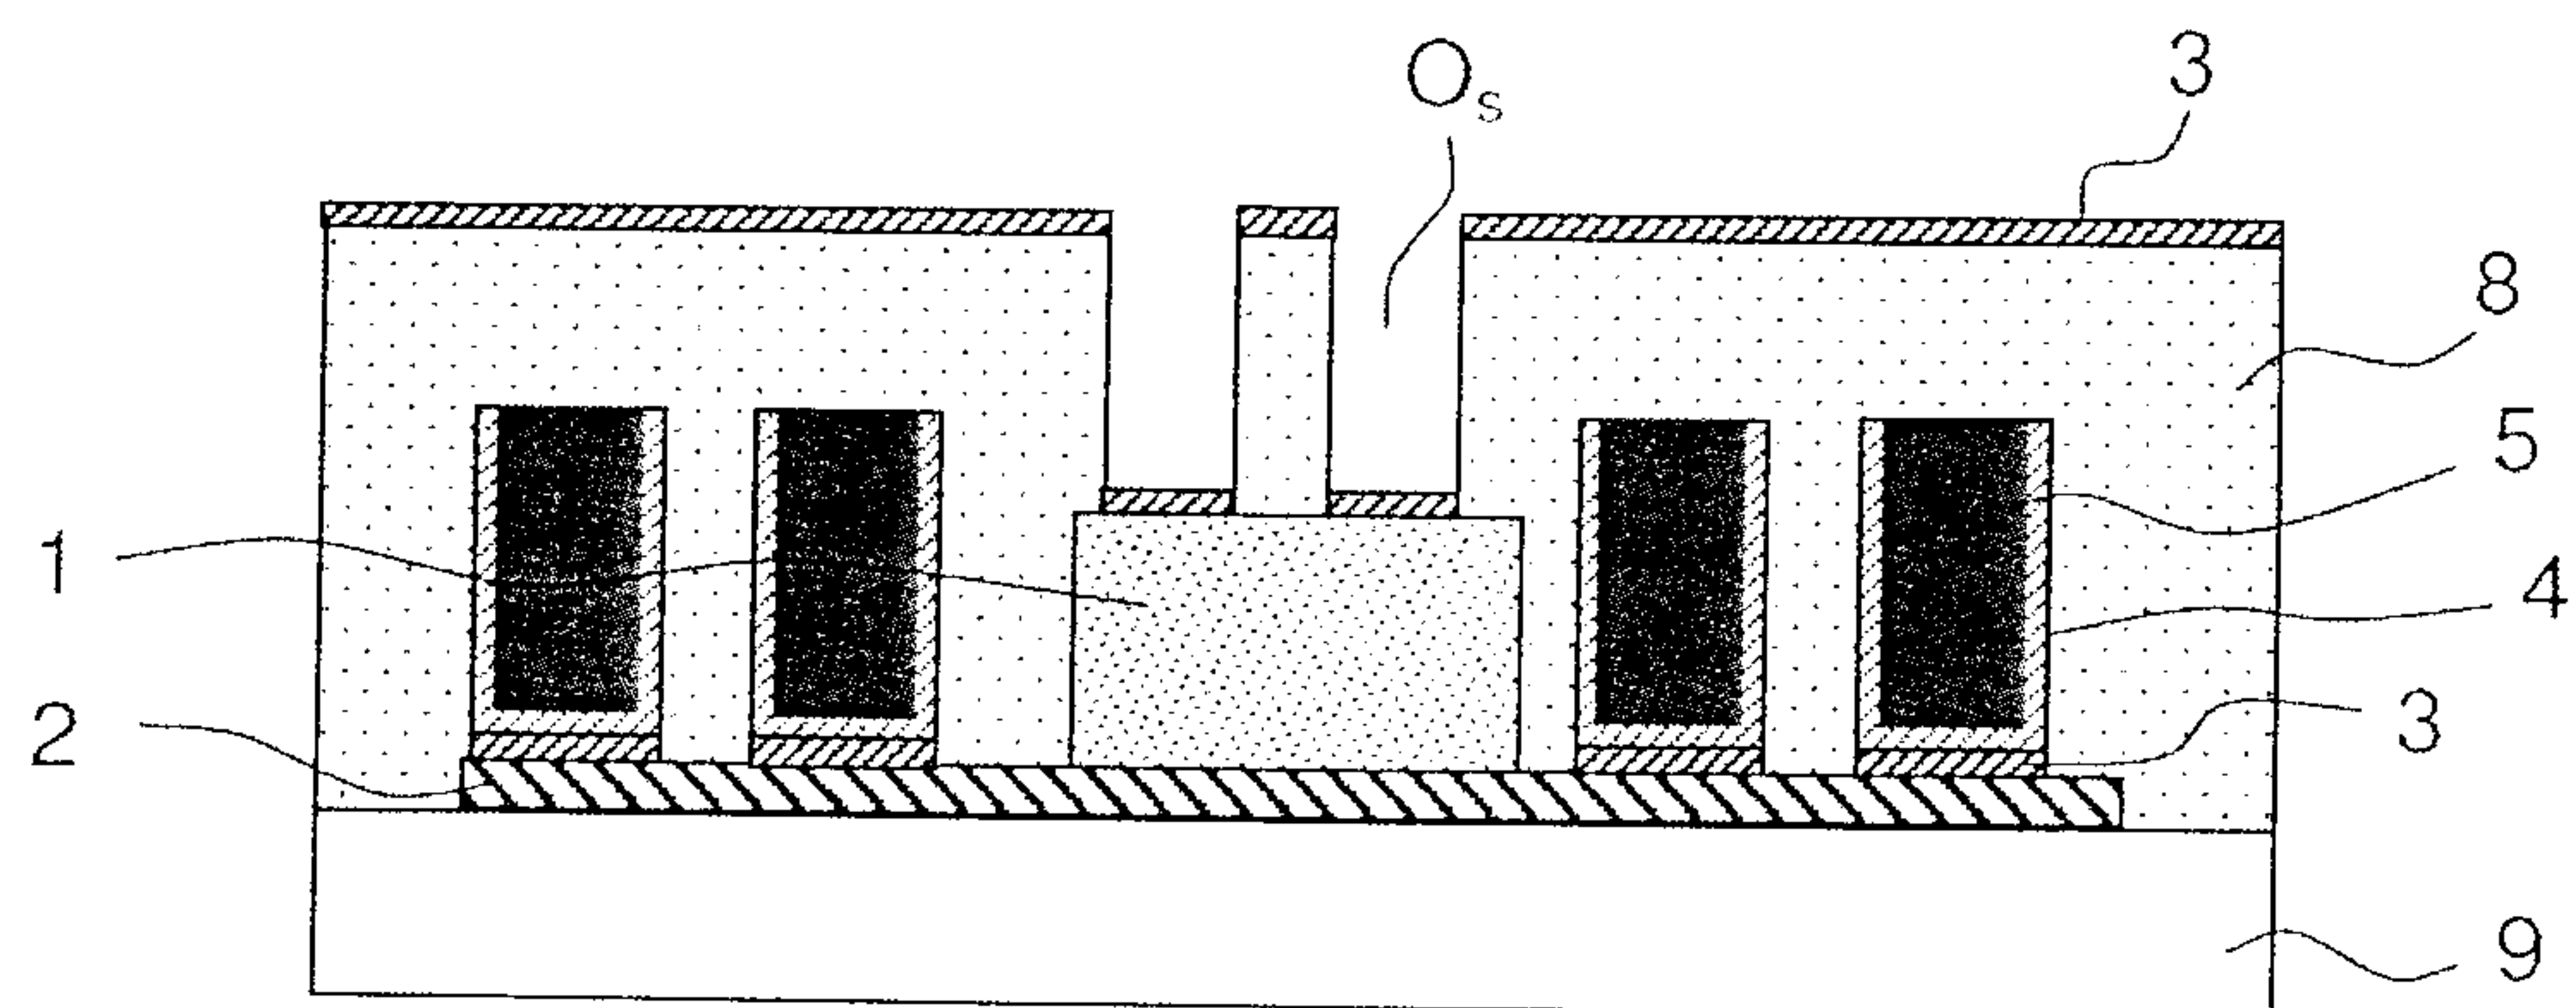


FIG. 7h

11/29

ANY REFERENCE TO FIG. 8A WILL BE
REGARDED AS NON-EXISTENT

12/29

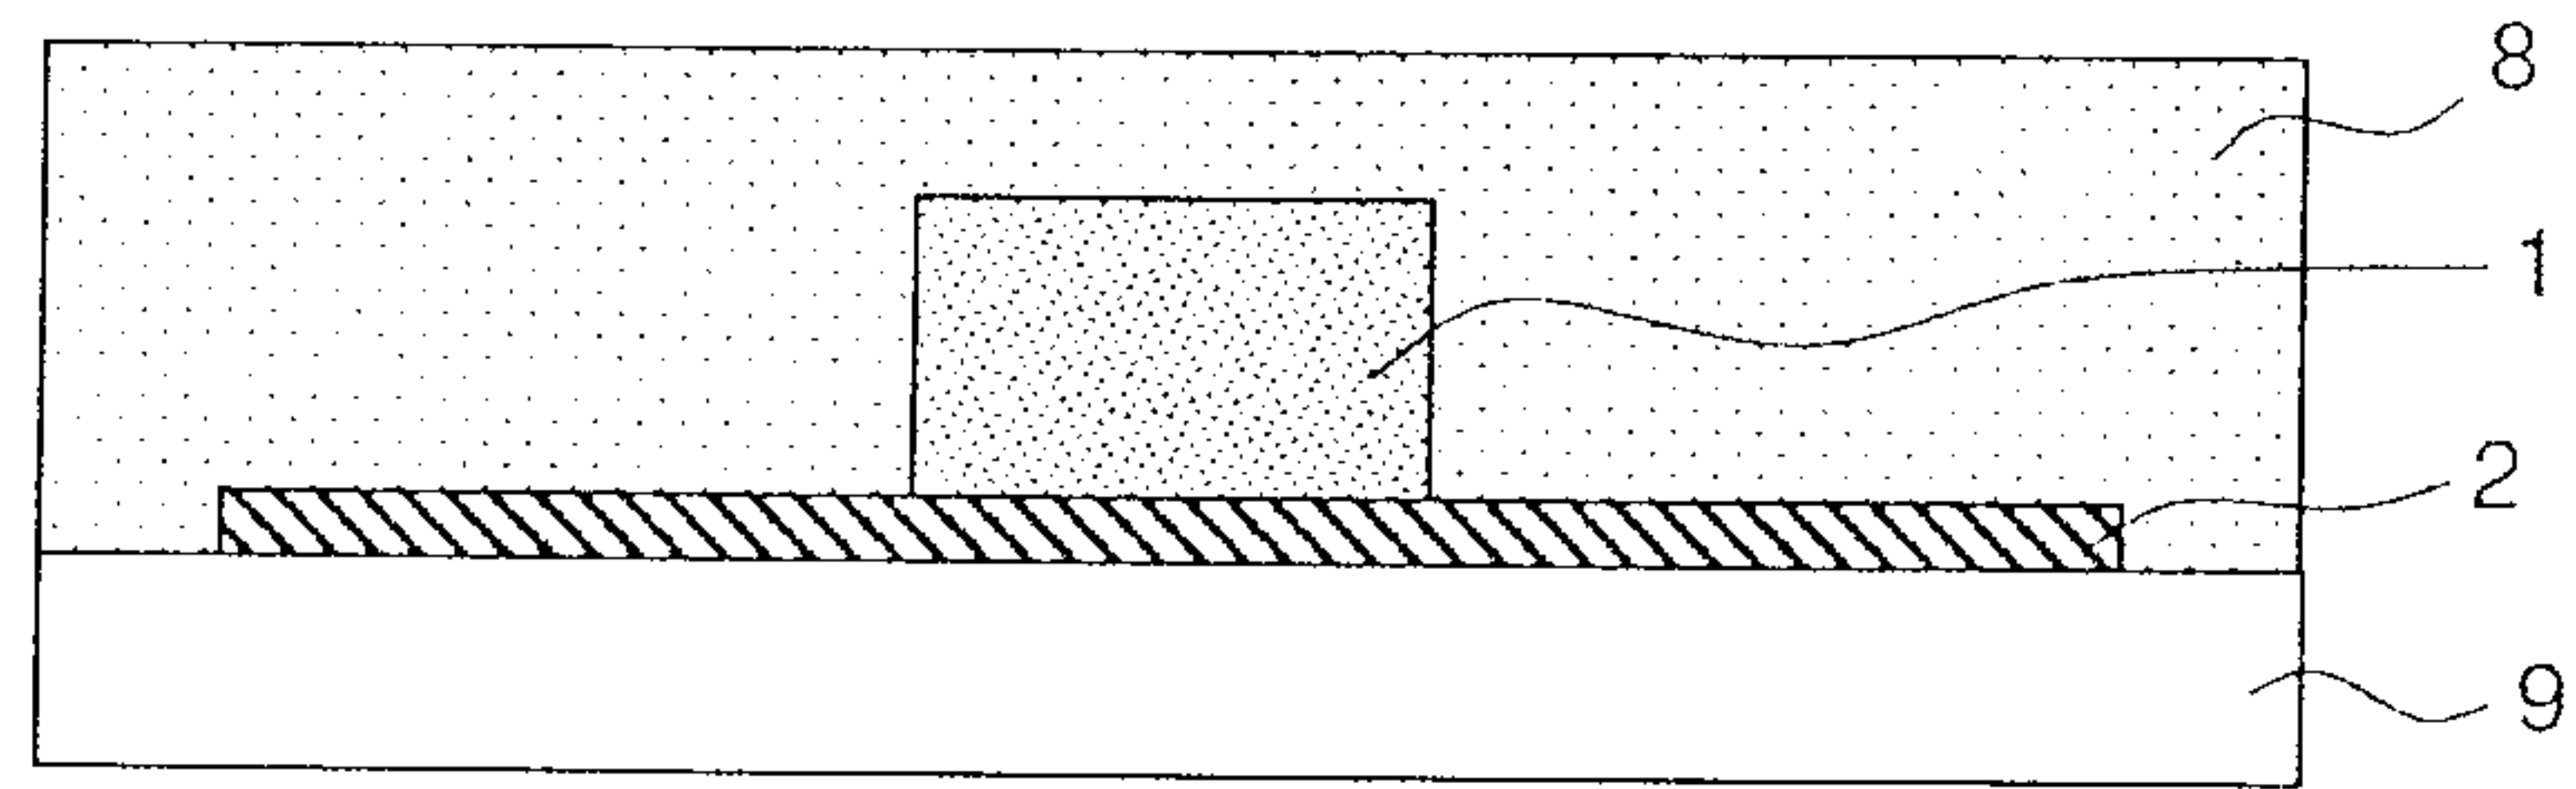


FIG. 8b

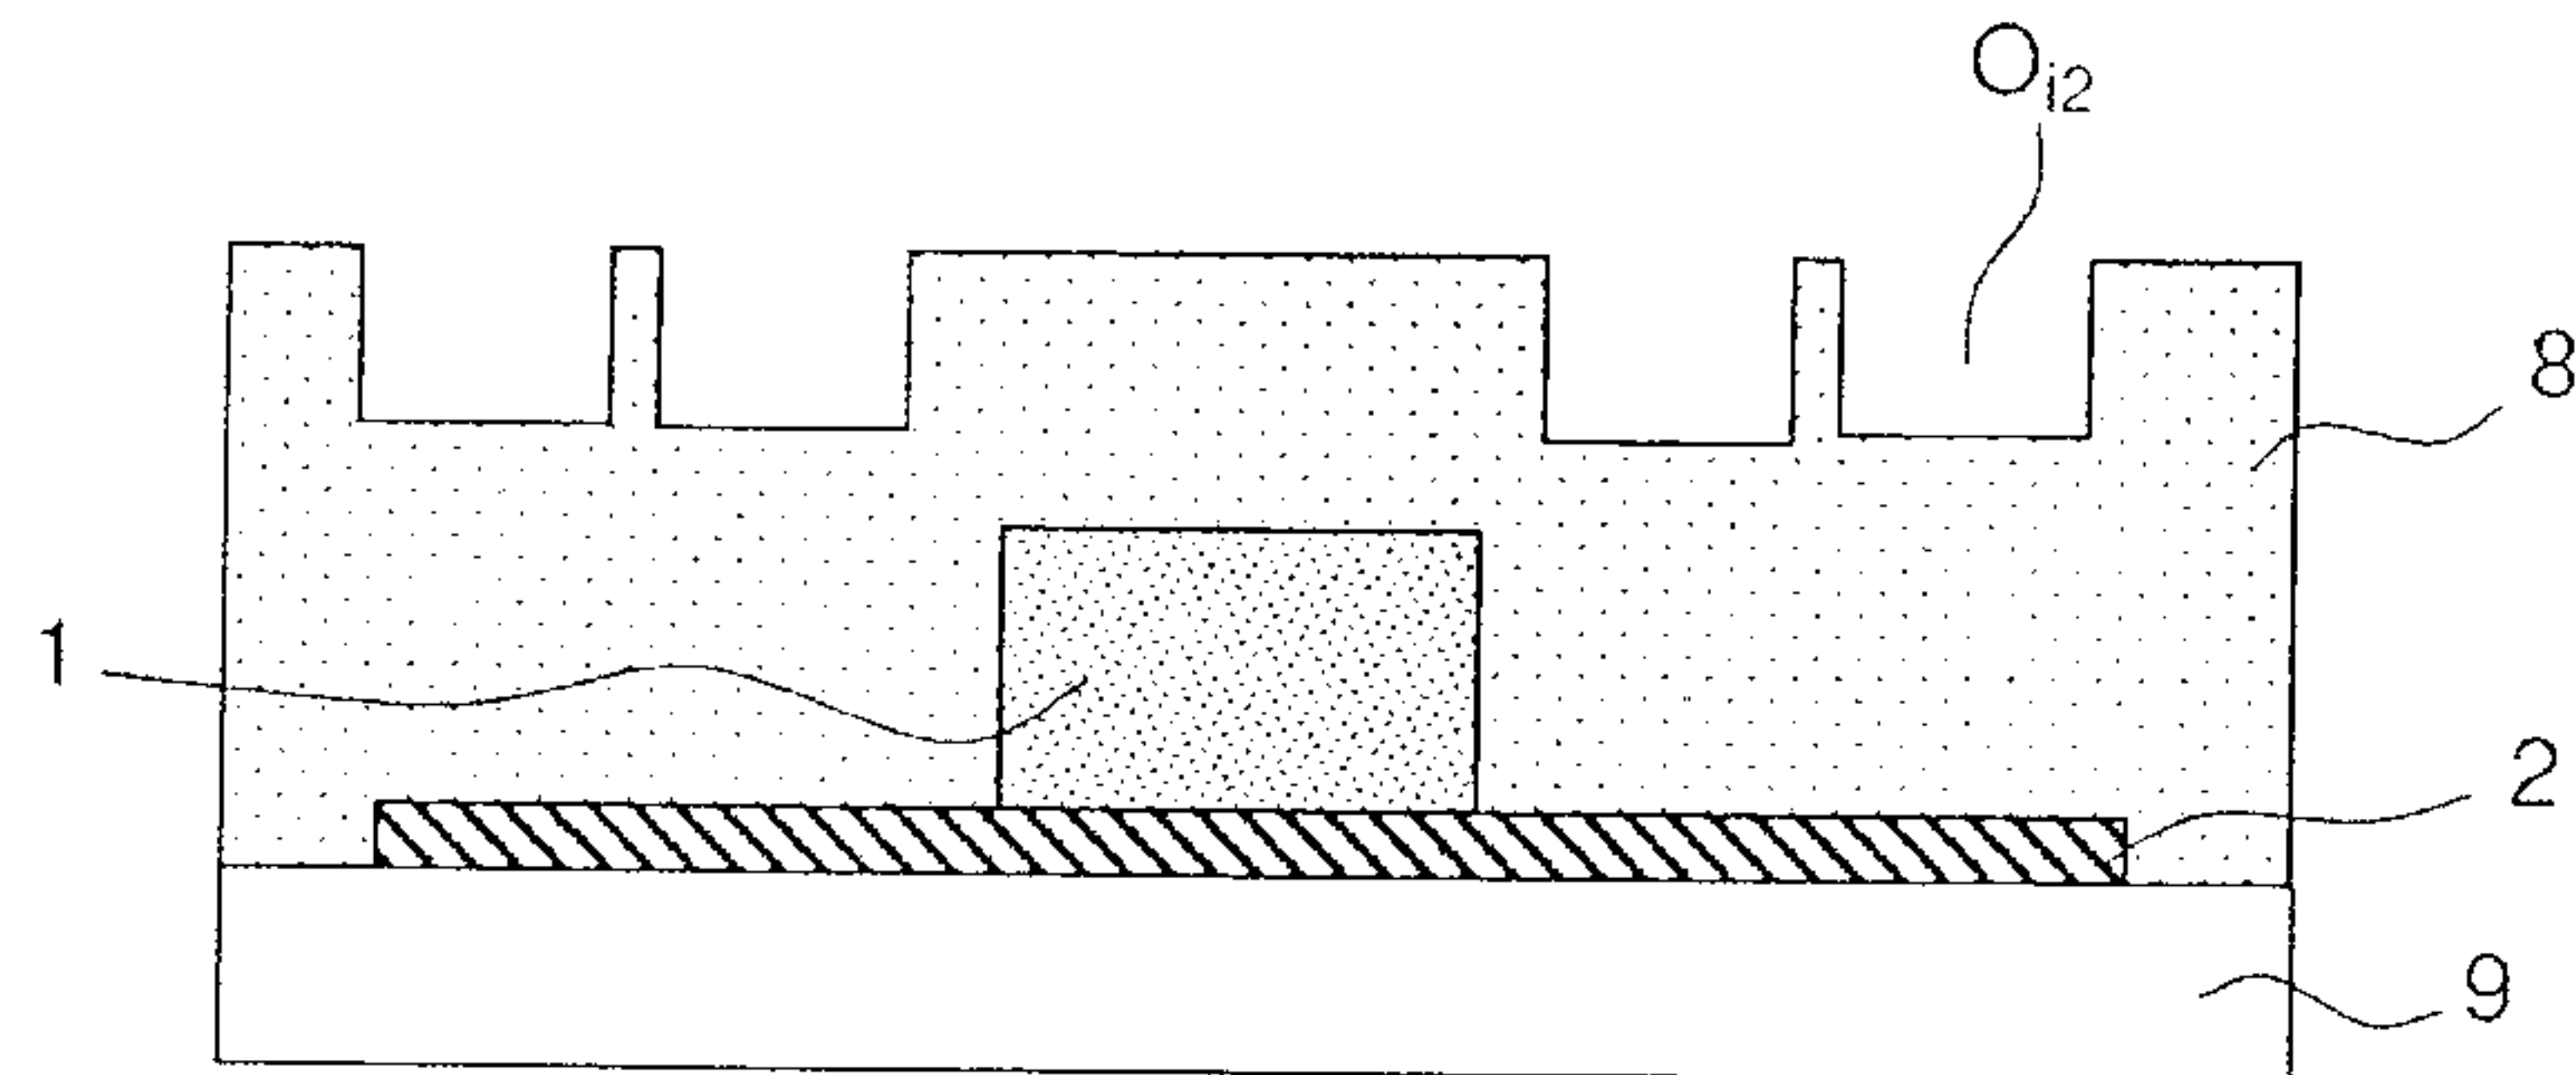


FIG. 8c

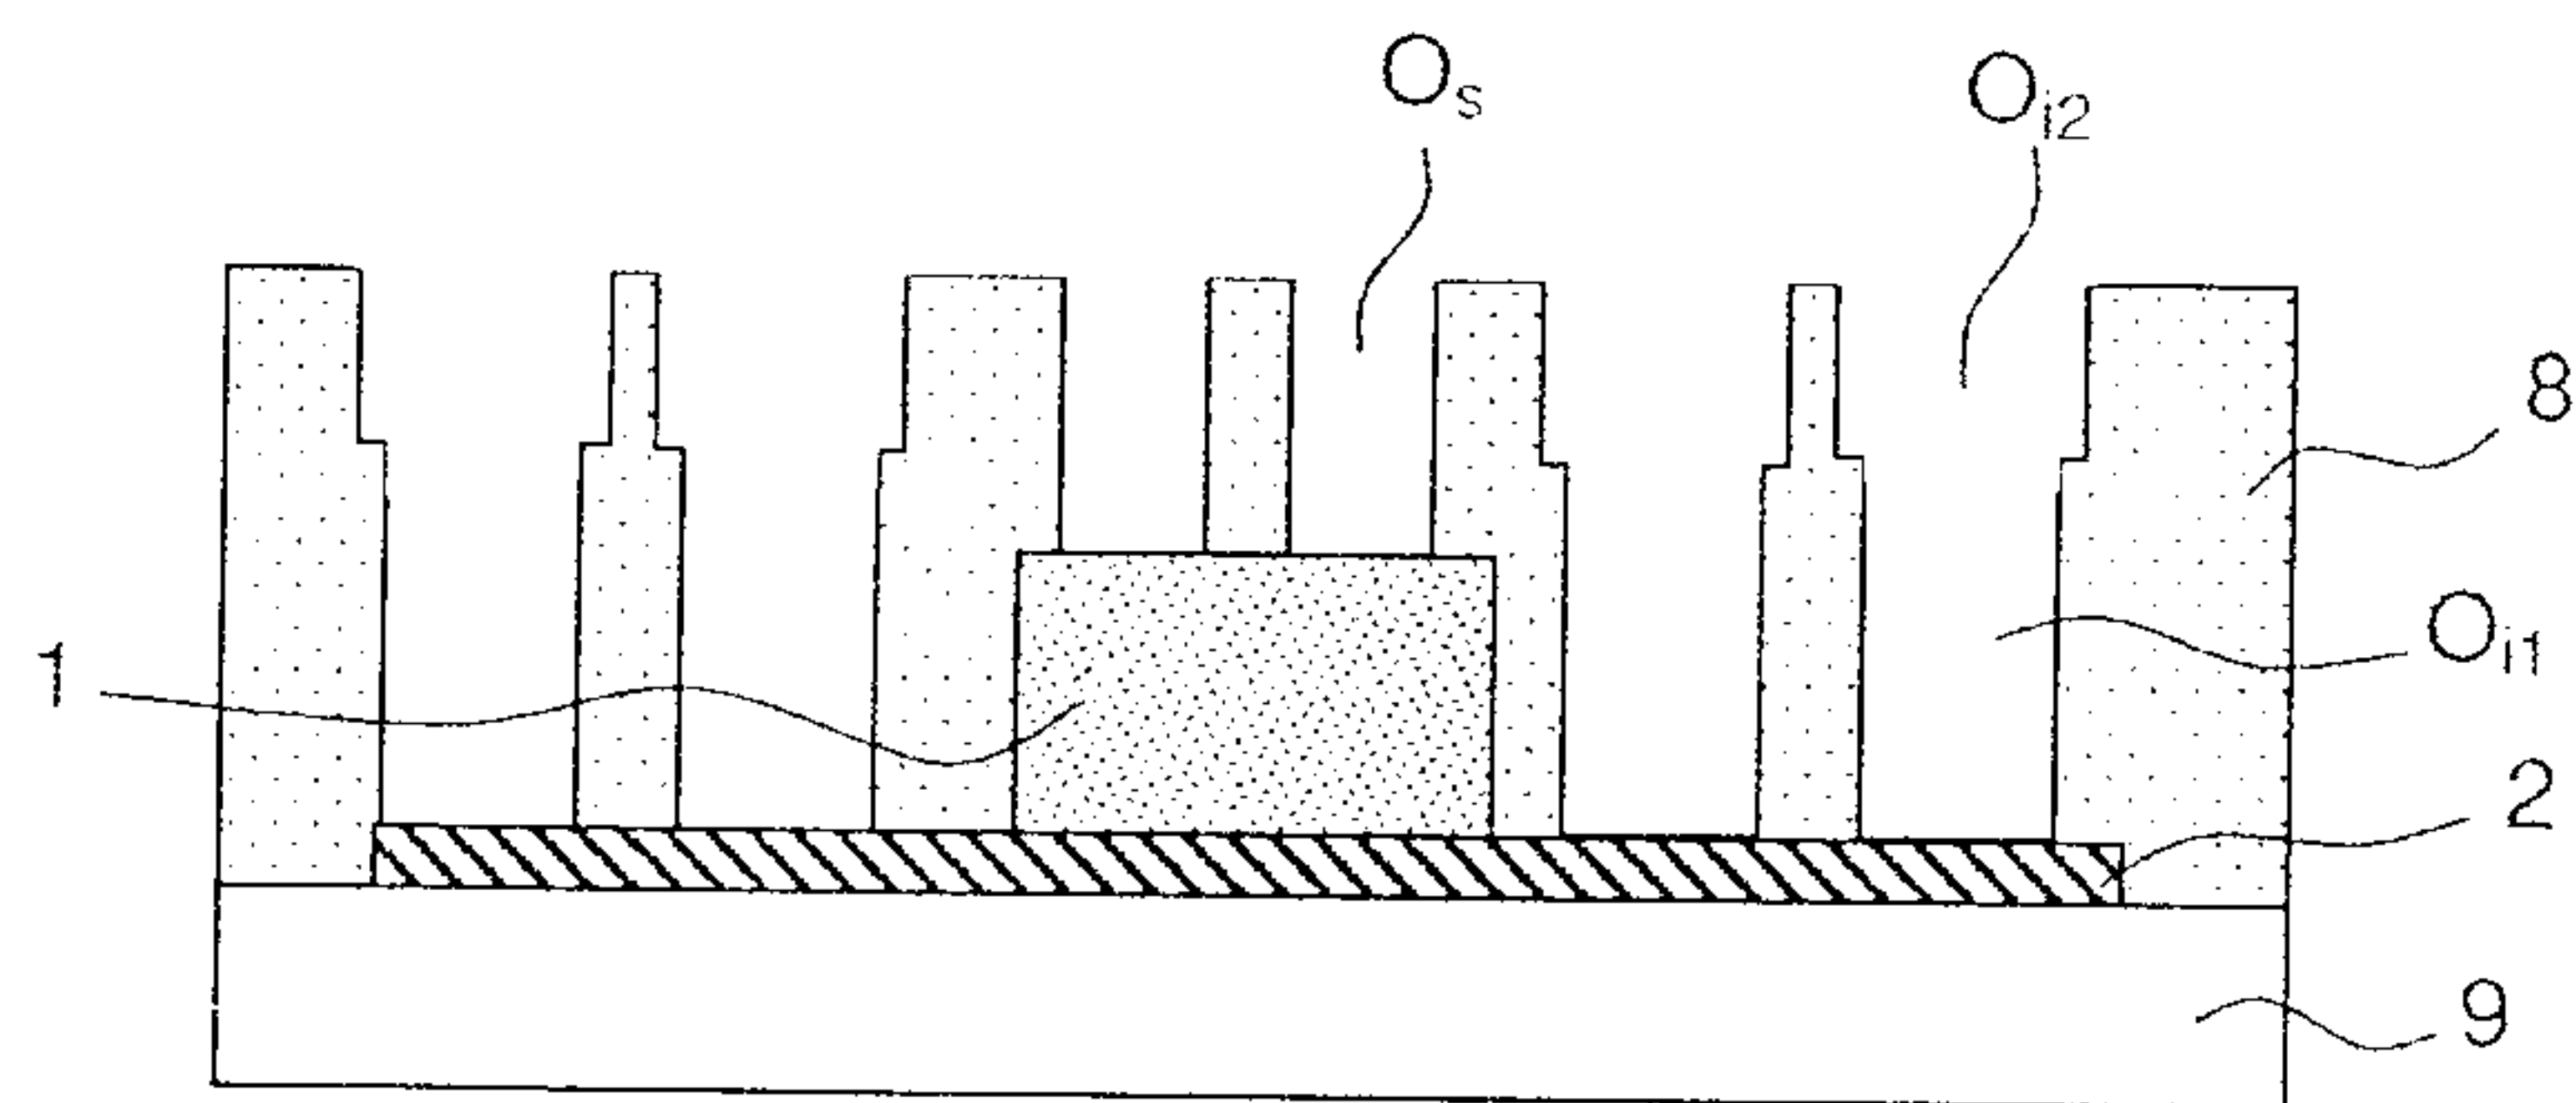


FIG. 8d

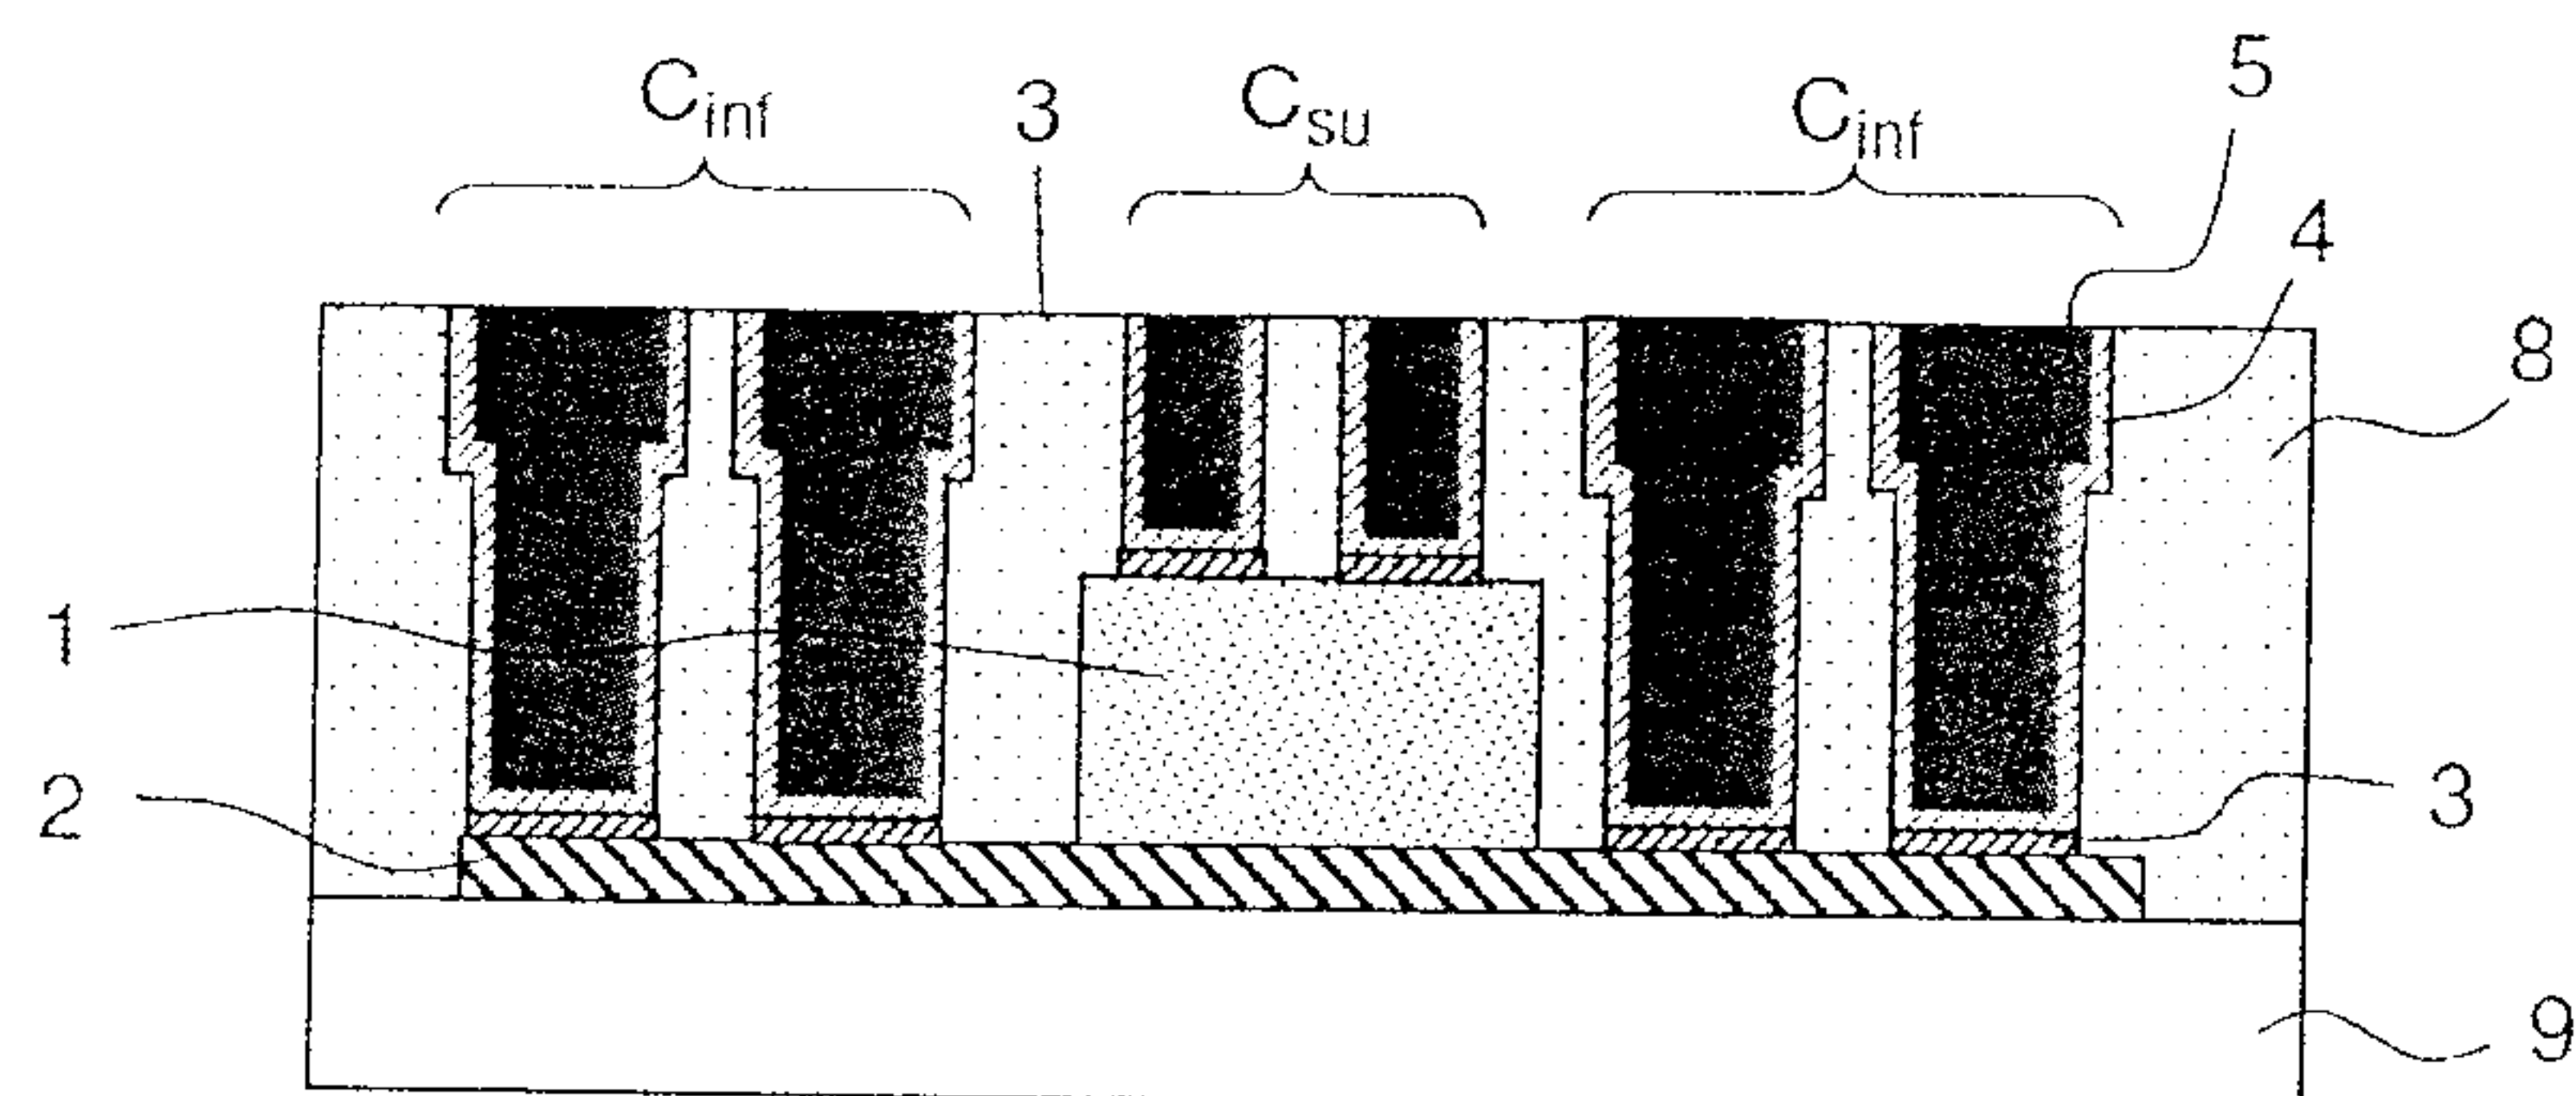


FIG. 8e

13/29

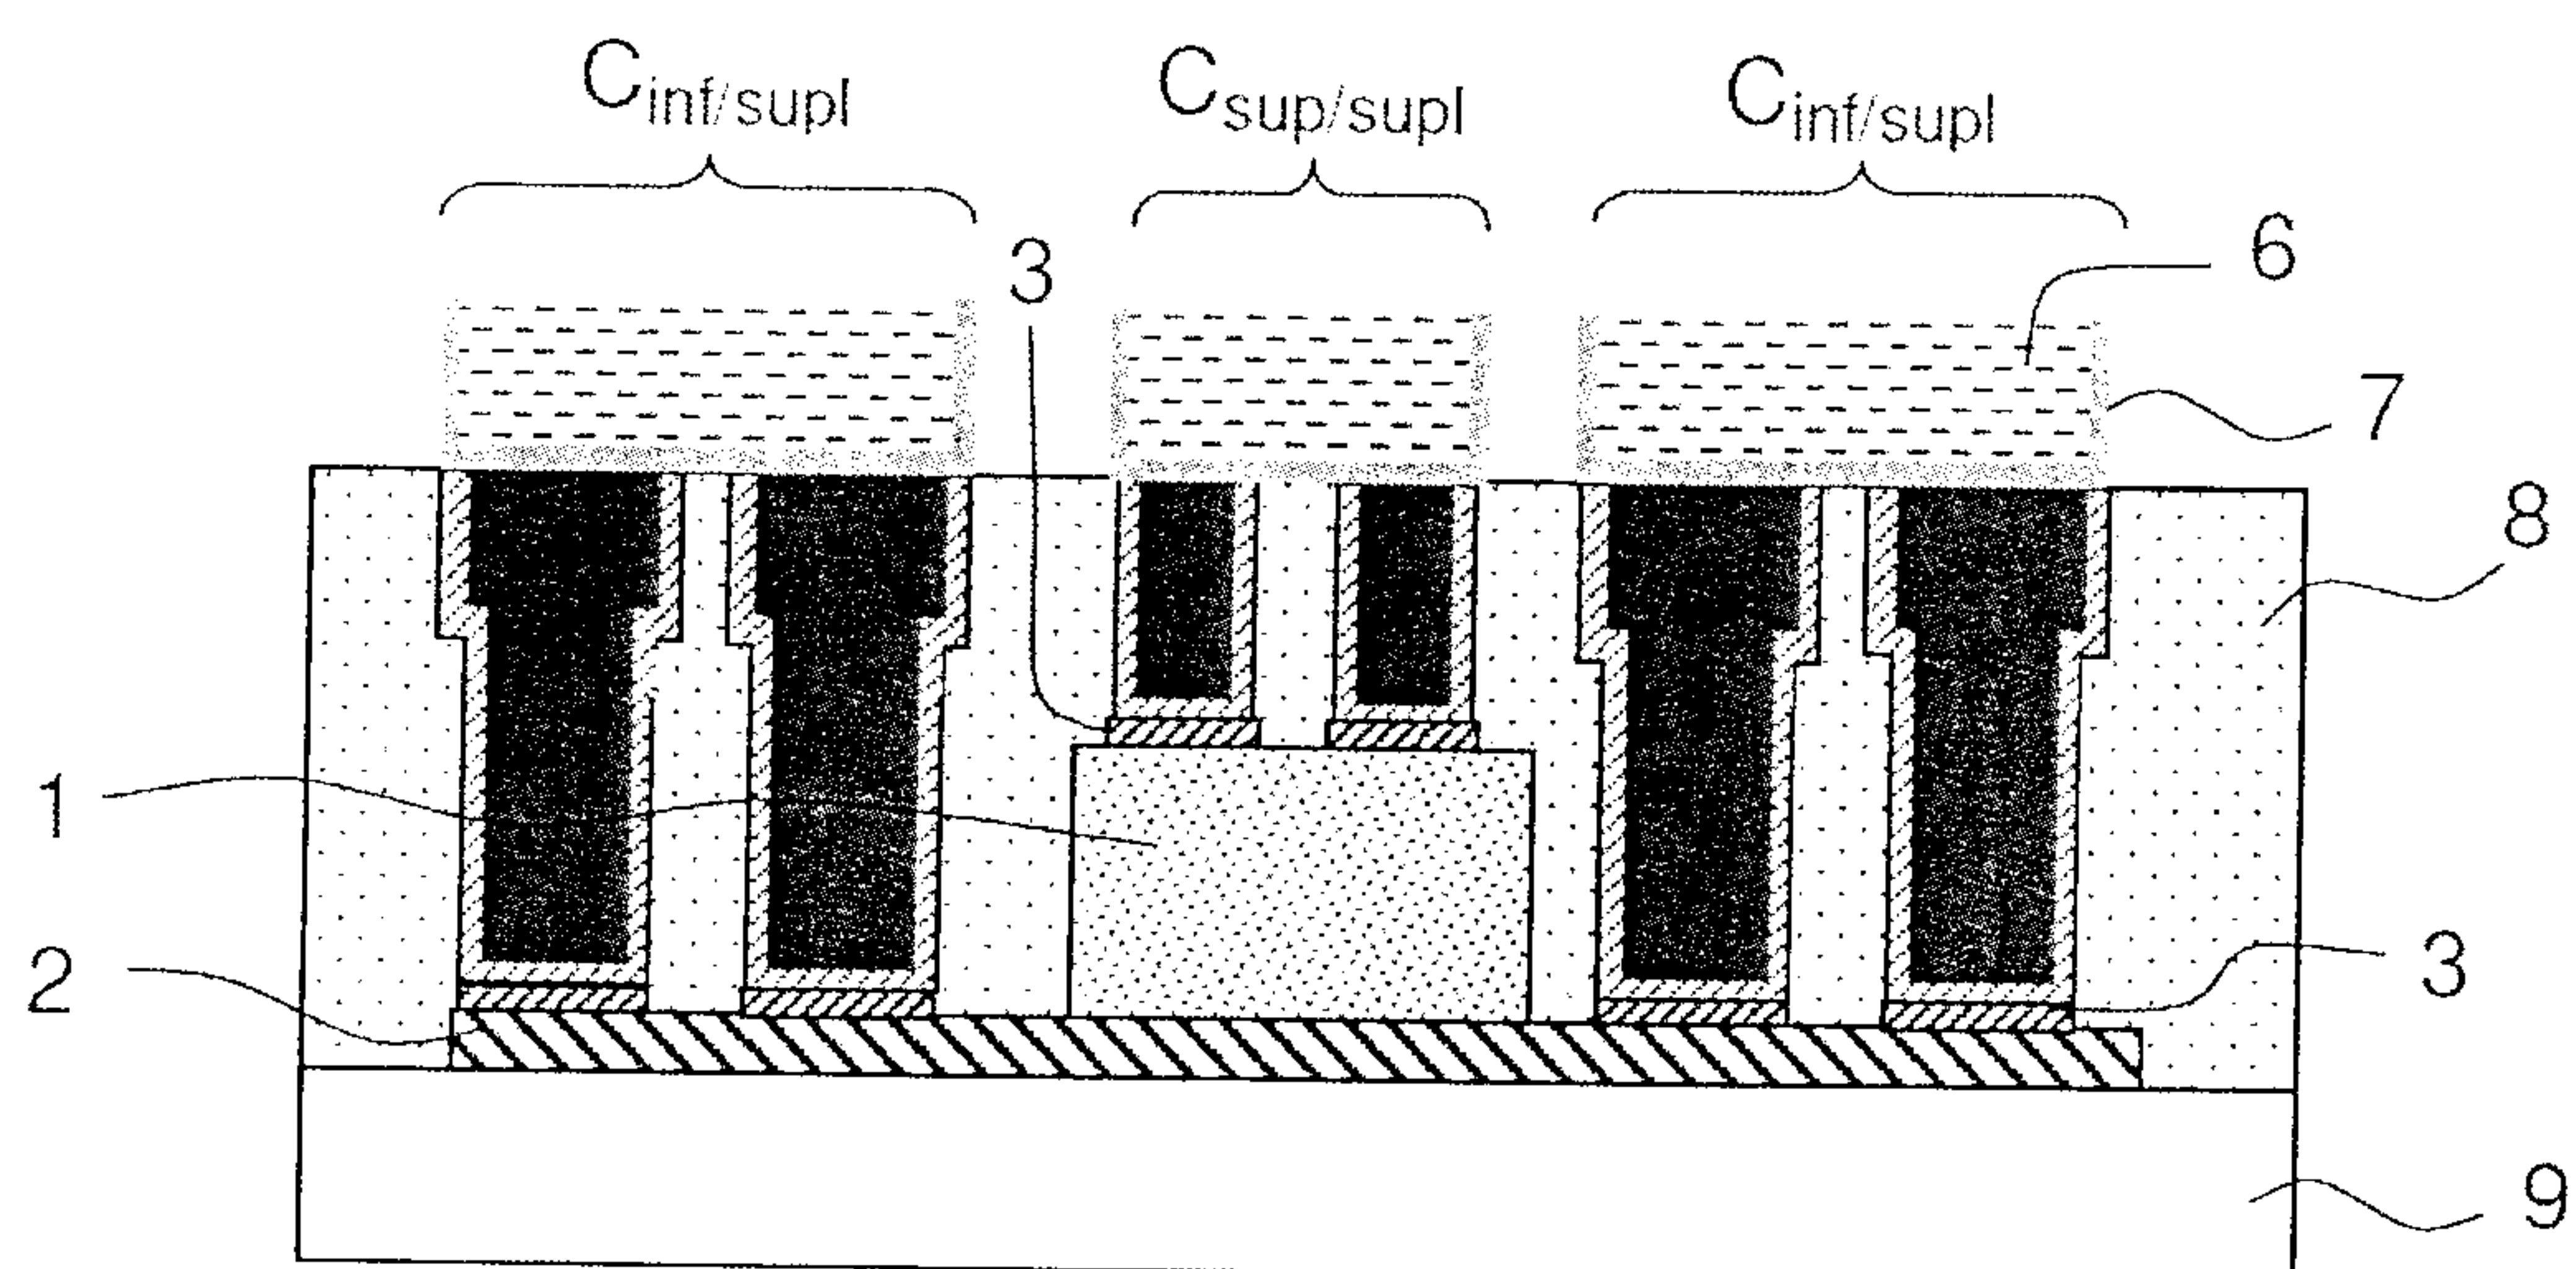


FIG. 9

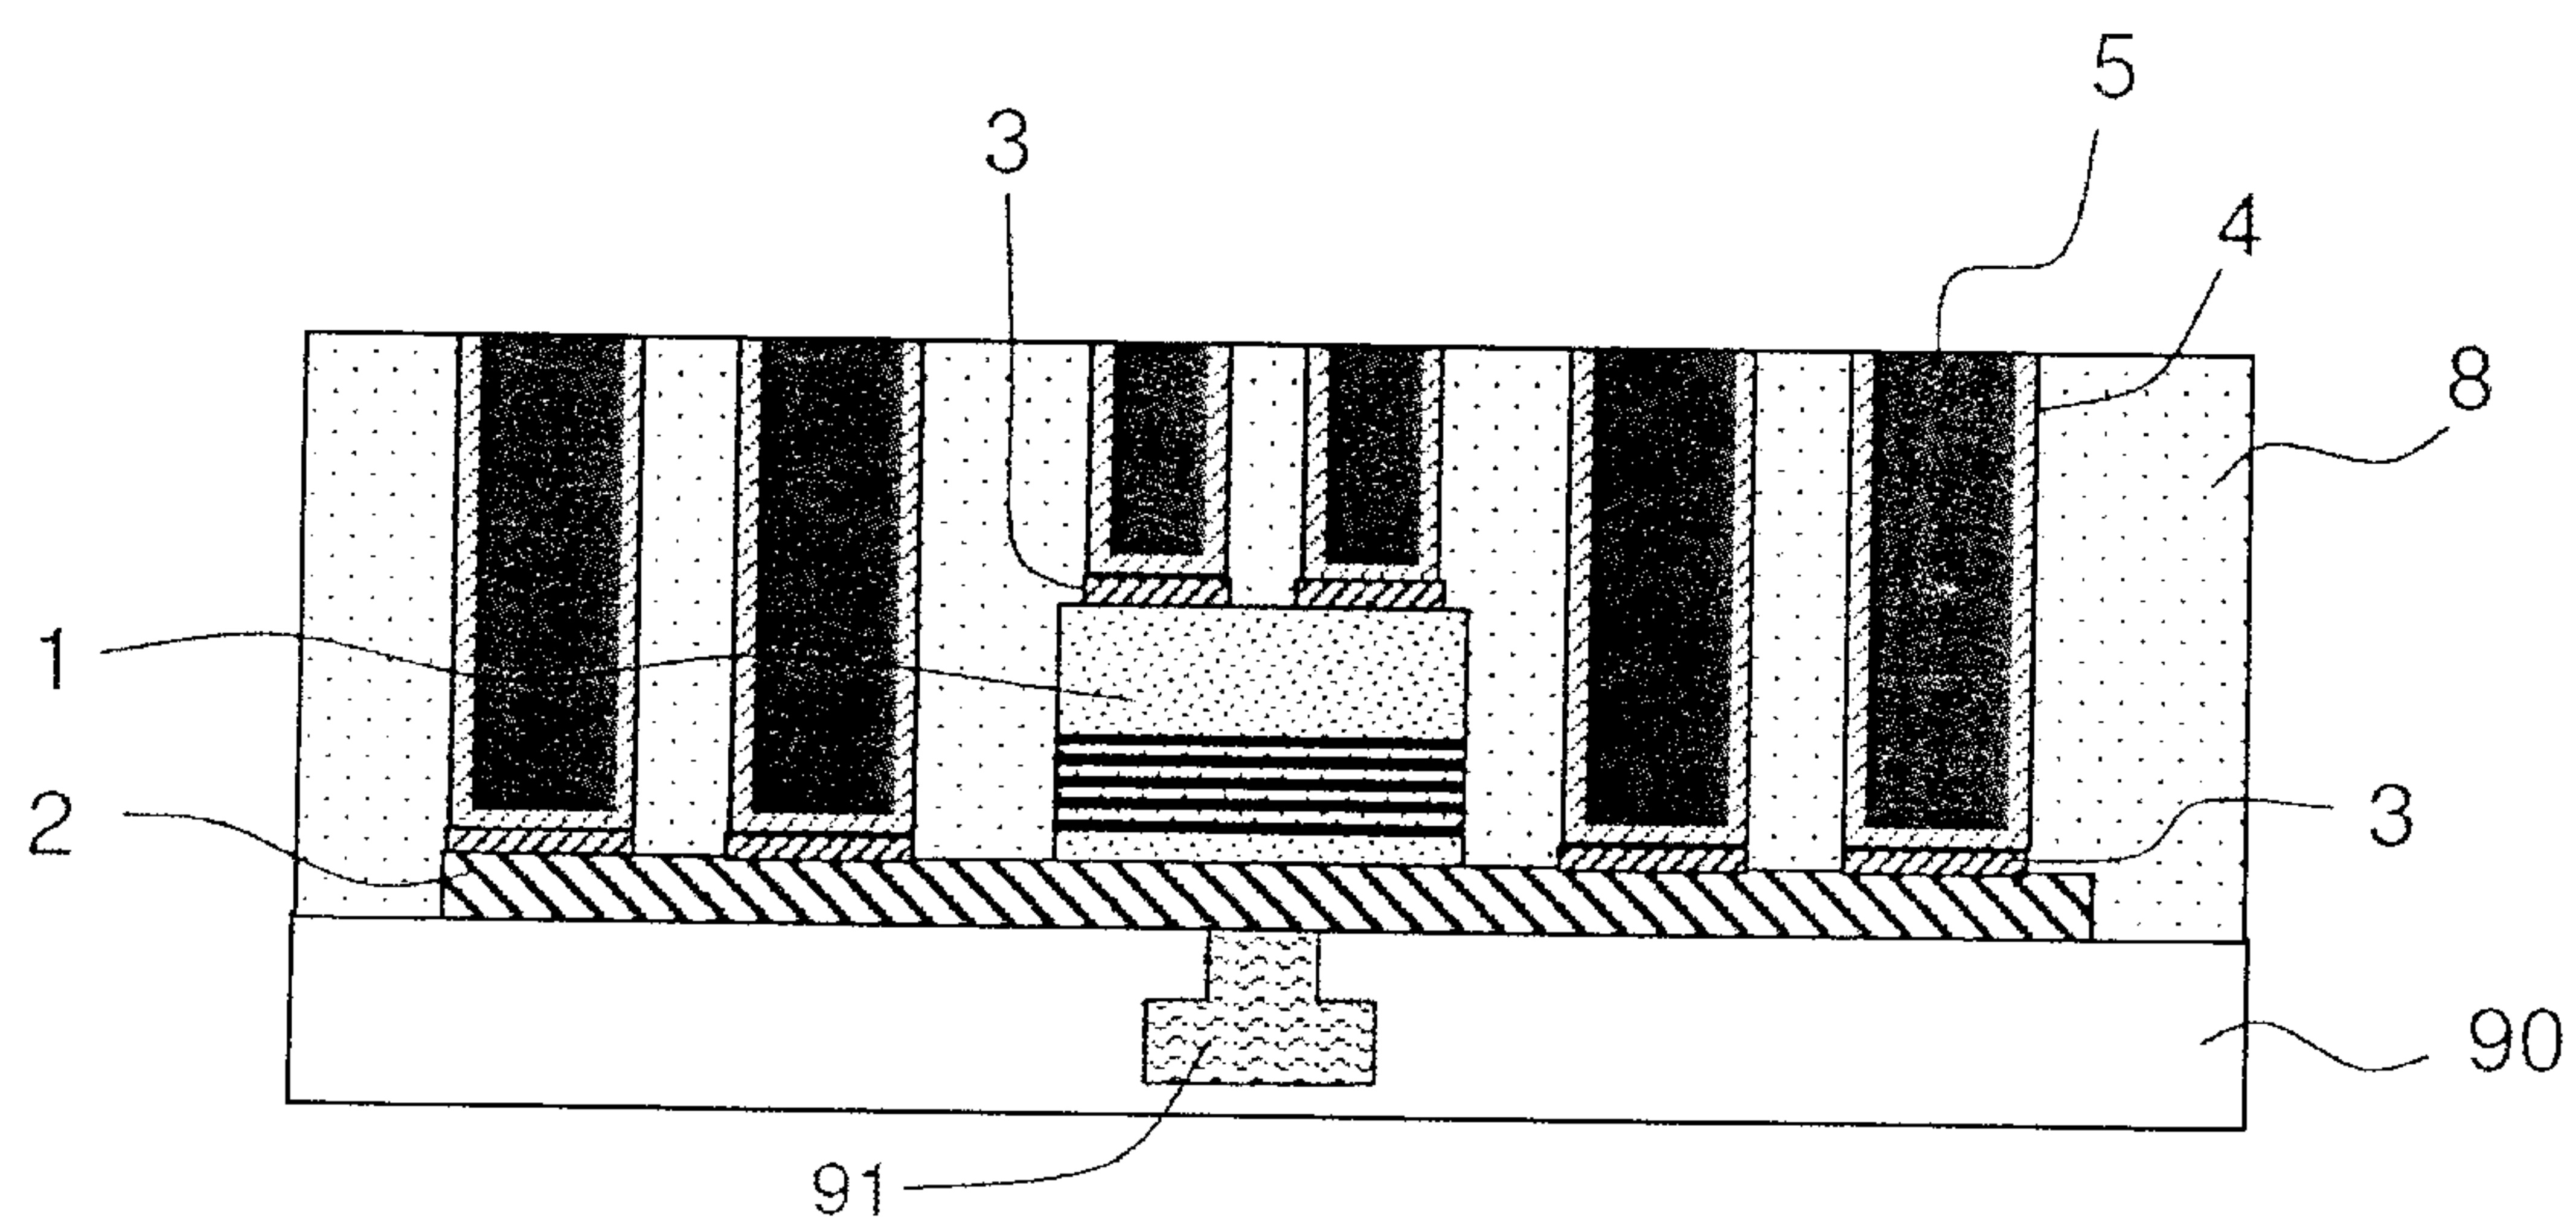


FIG. 10

14/29

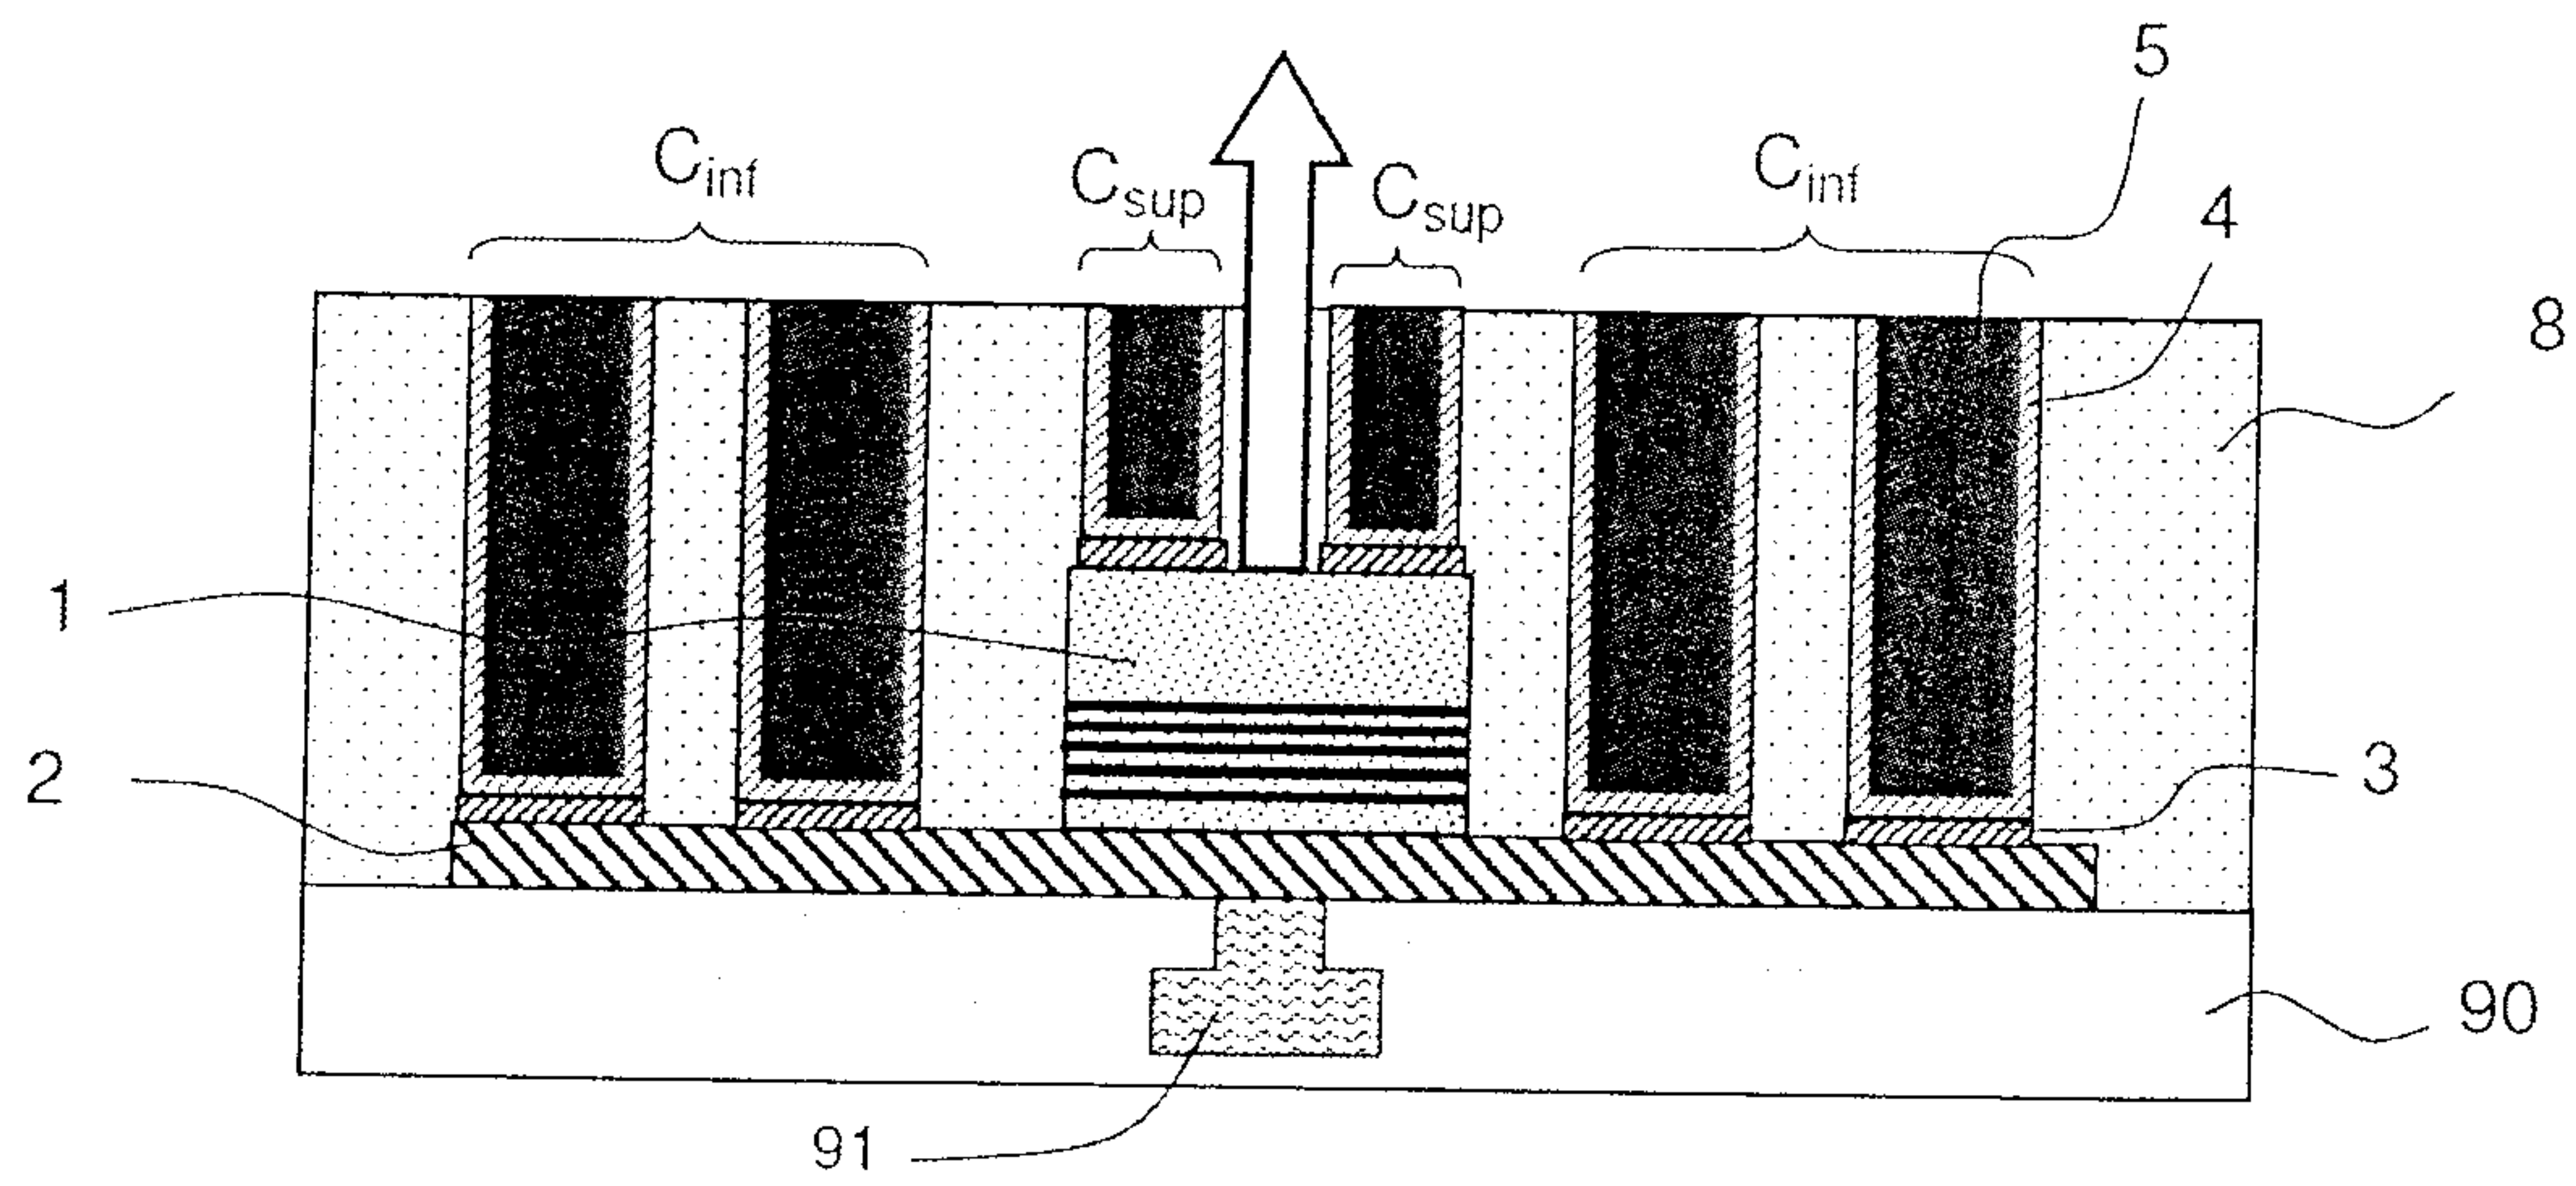


FIG.11

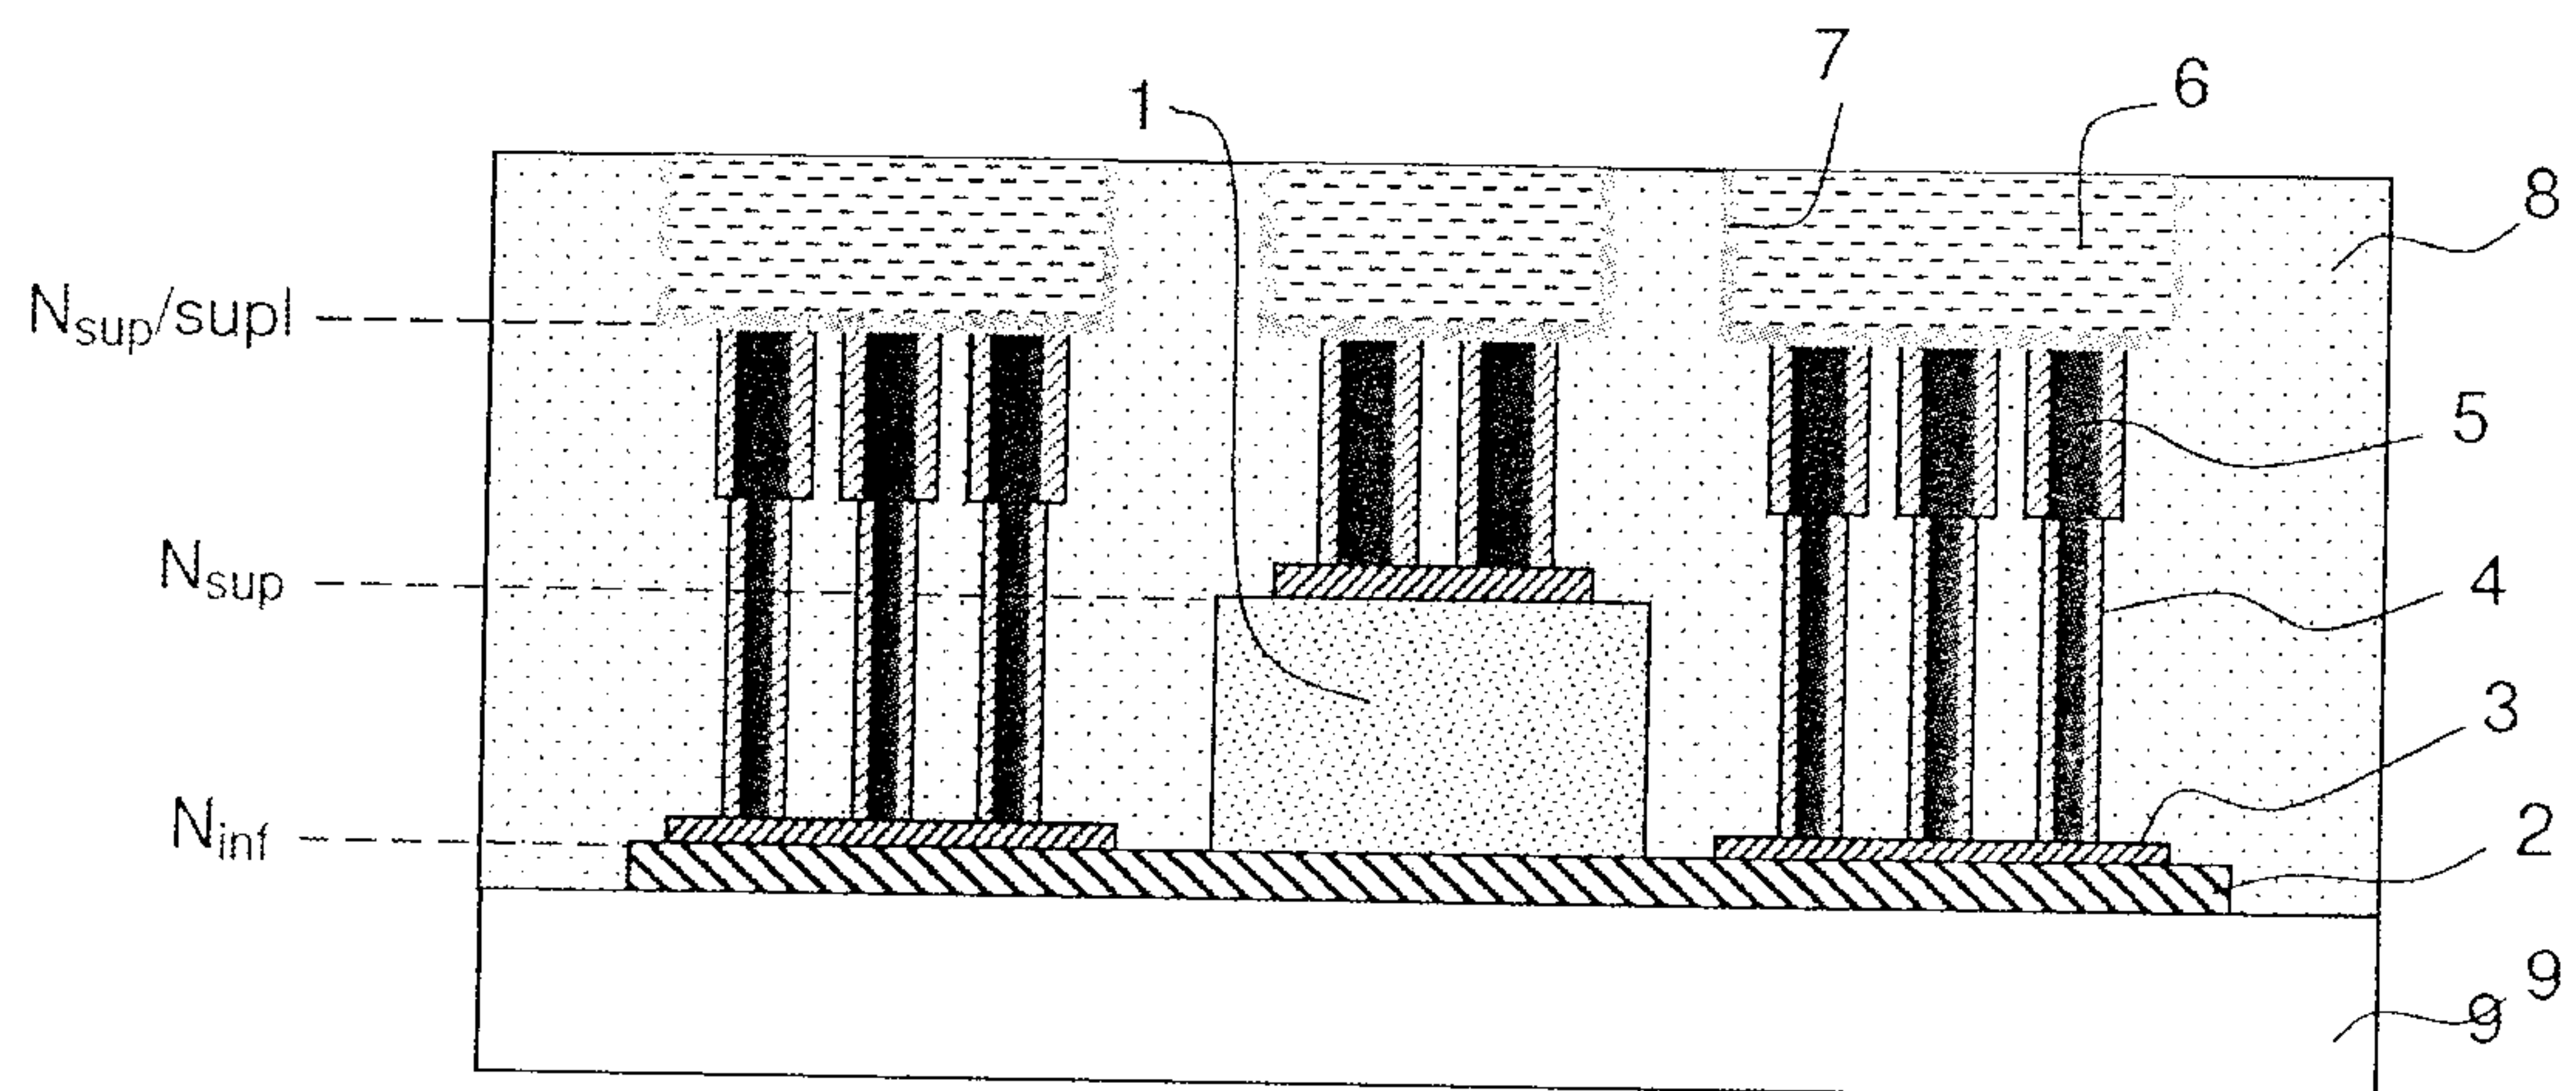


FIG.12

REPLACEMENT SHEET (RULE 26)

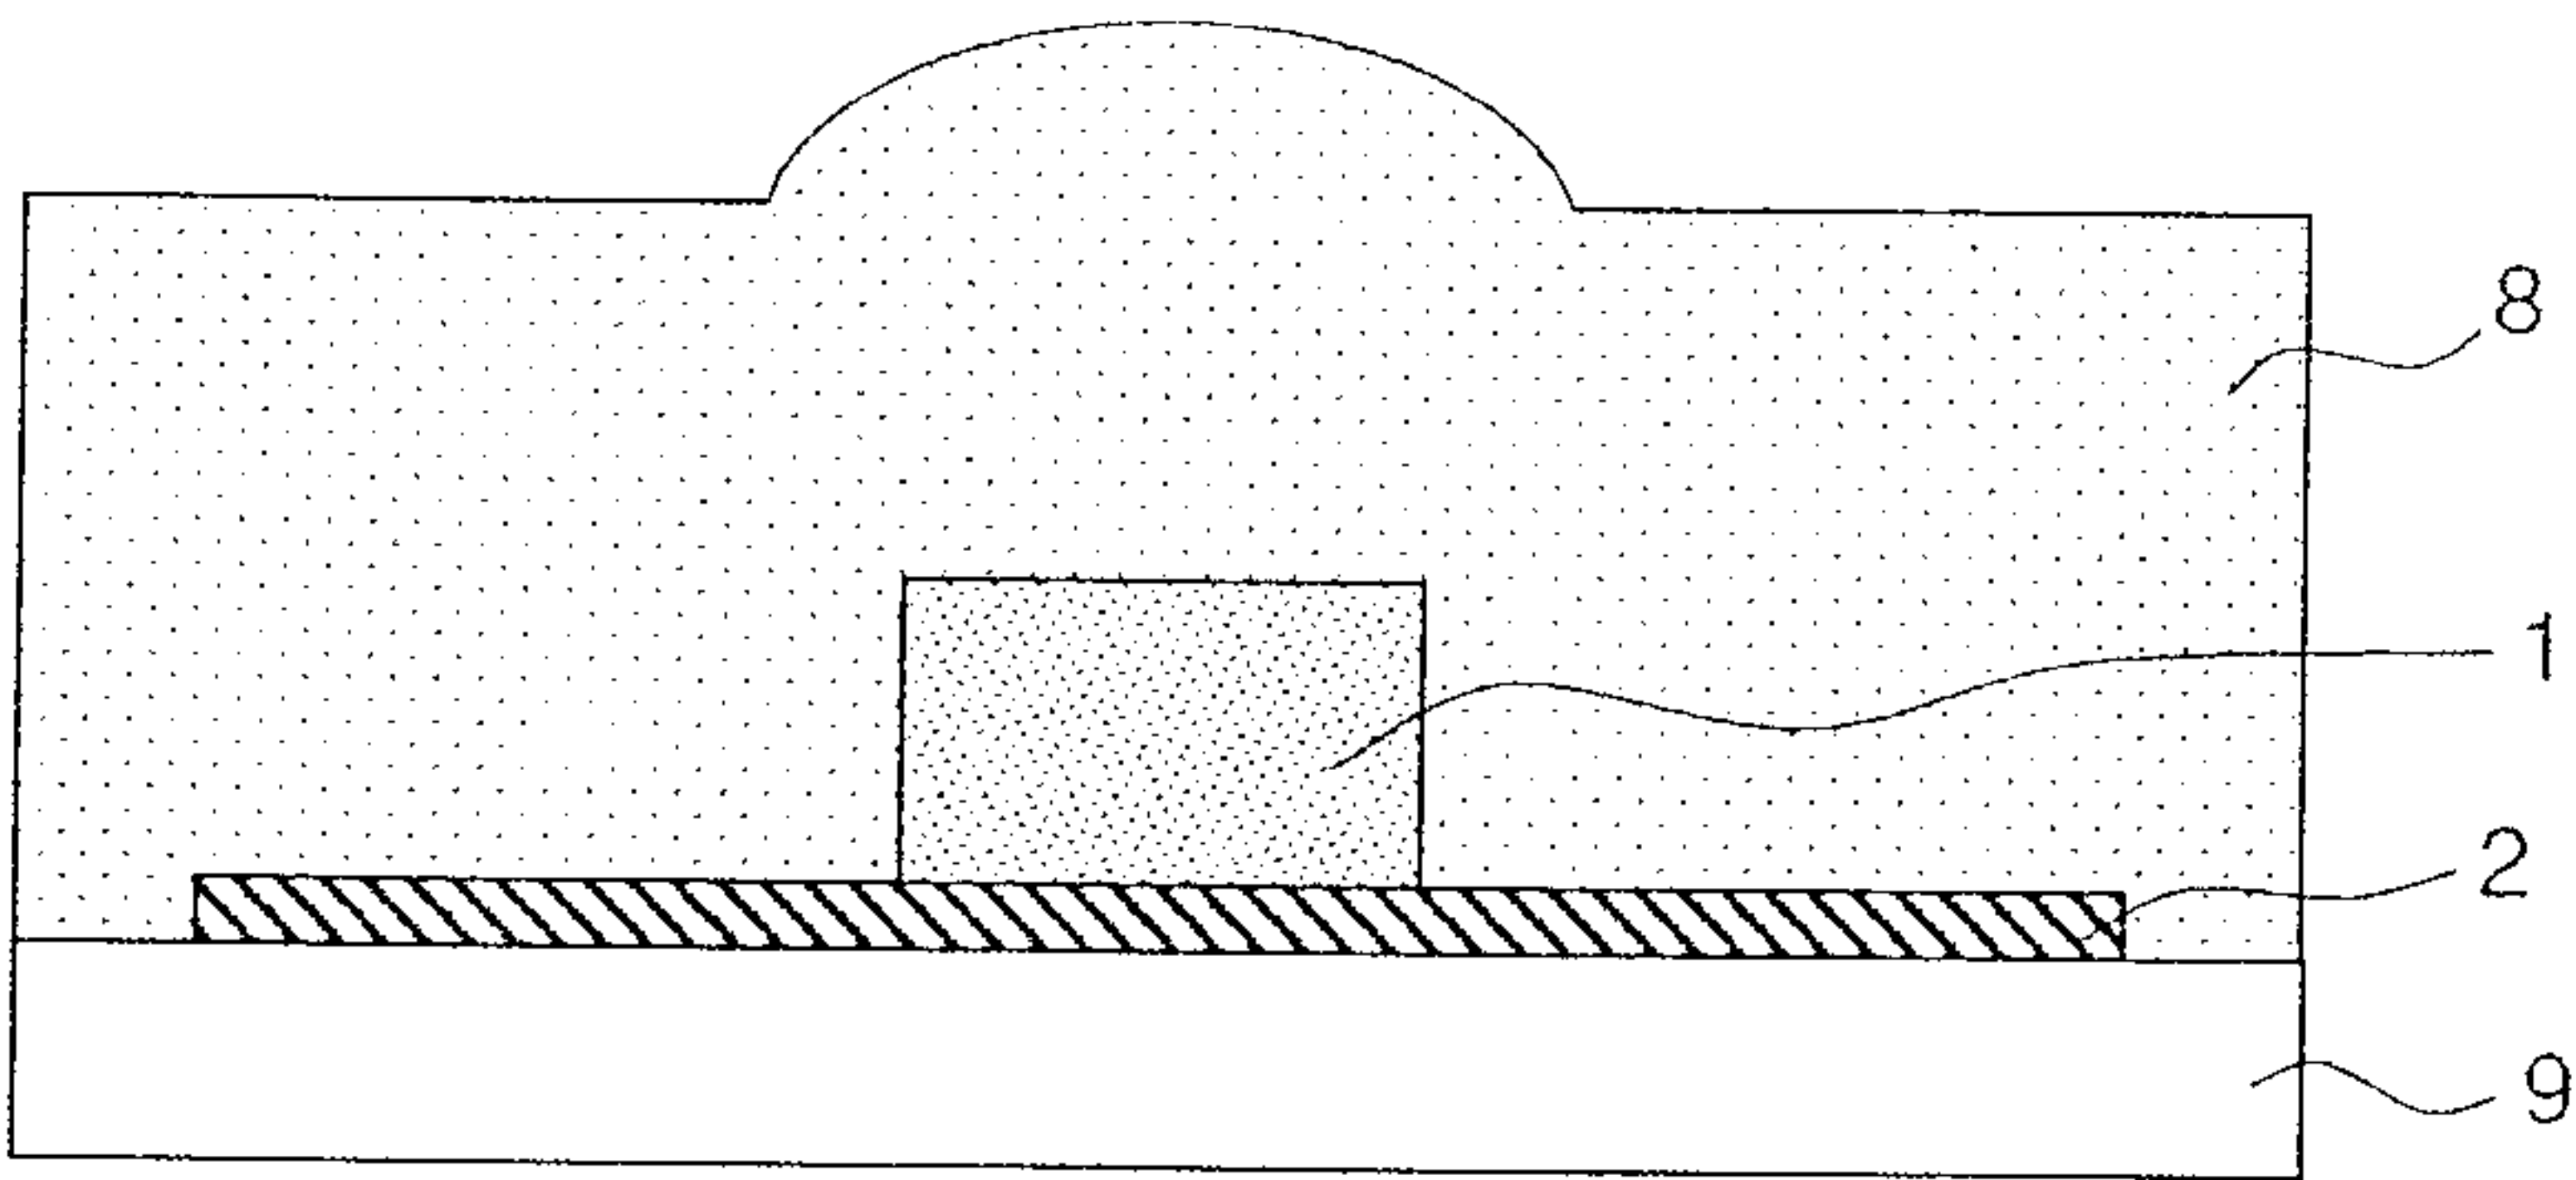


FIG. 13a

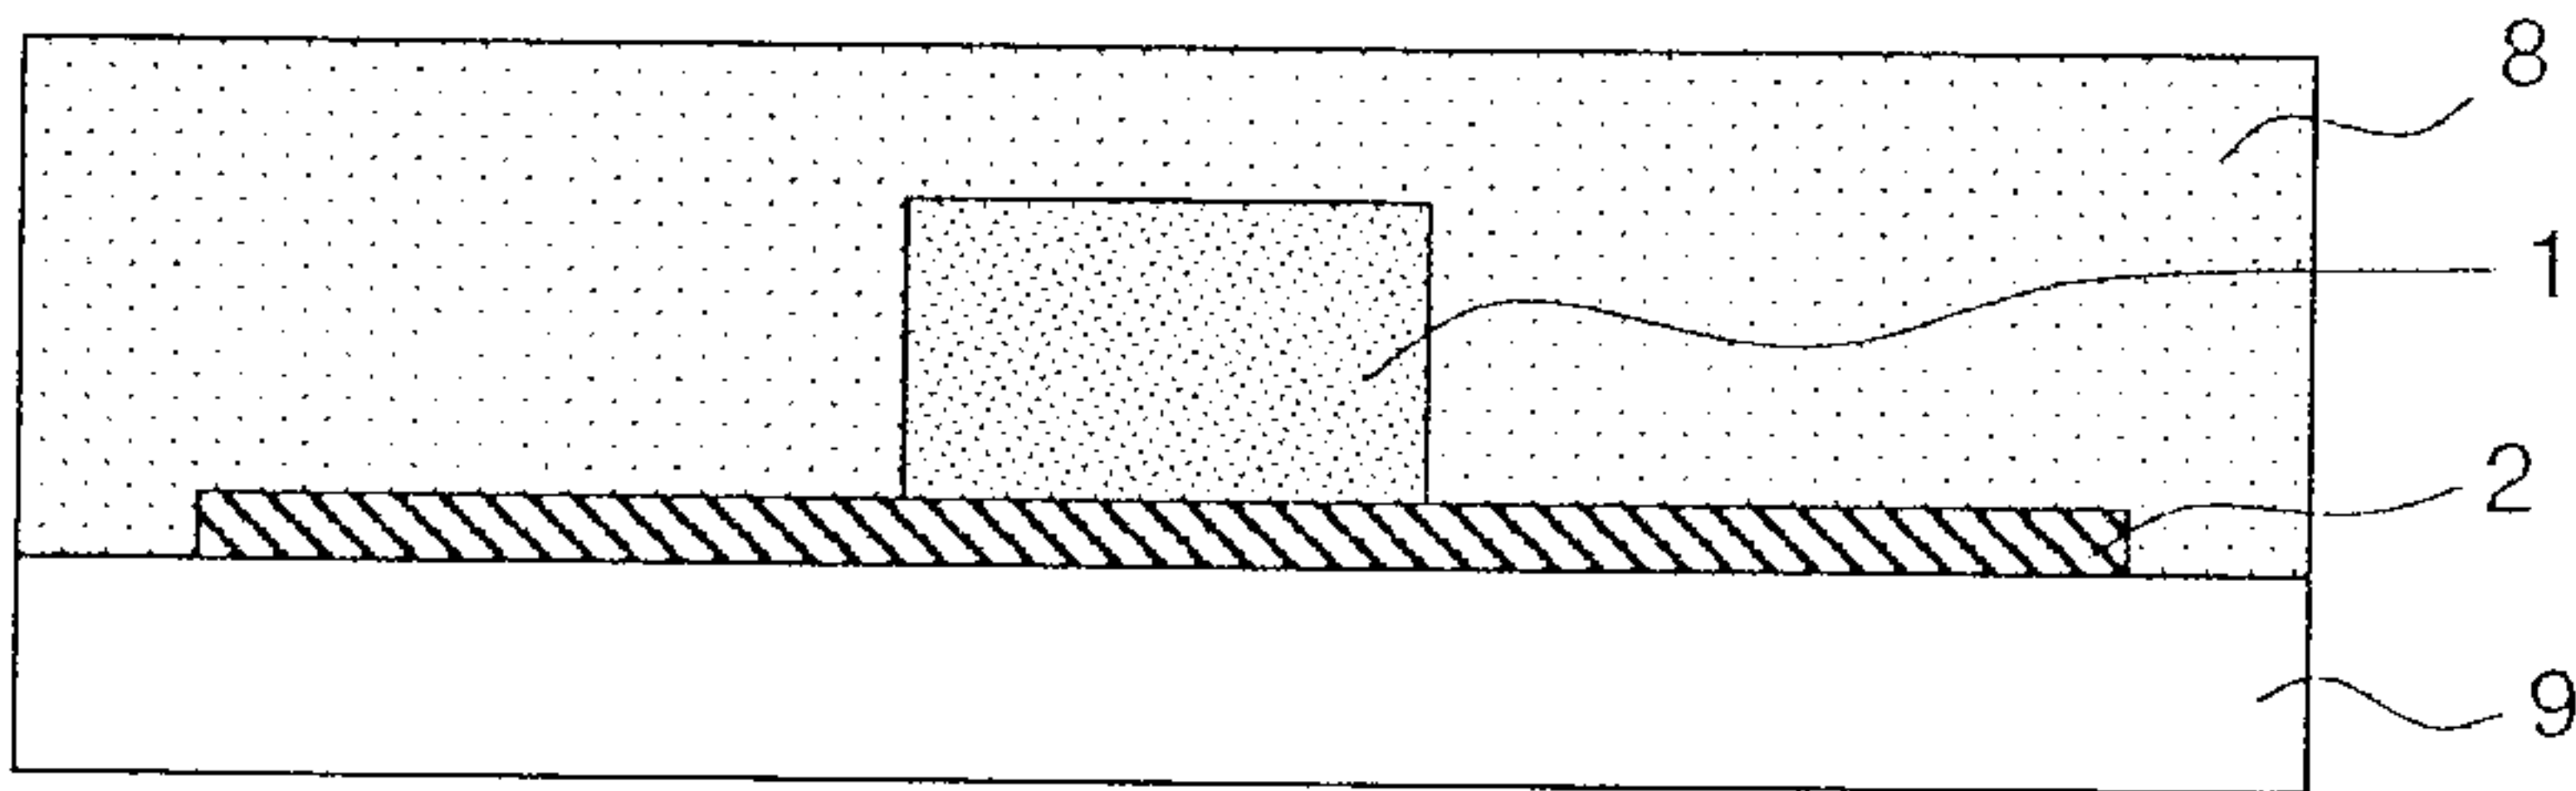


FIG. 13b

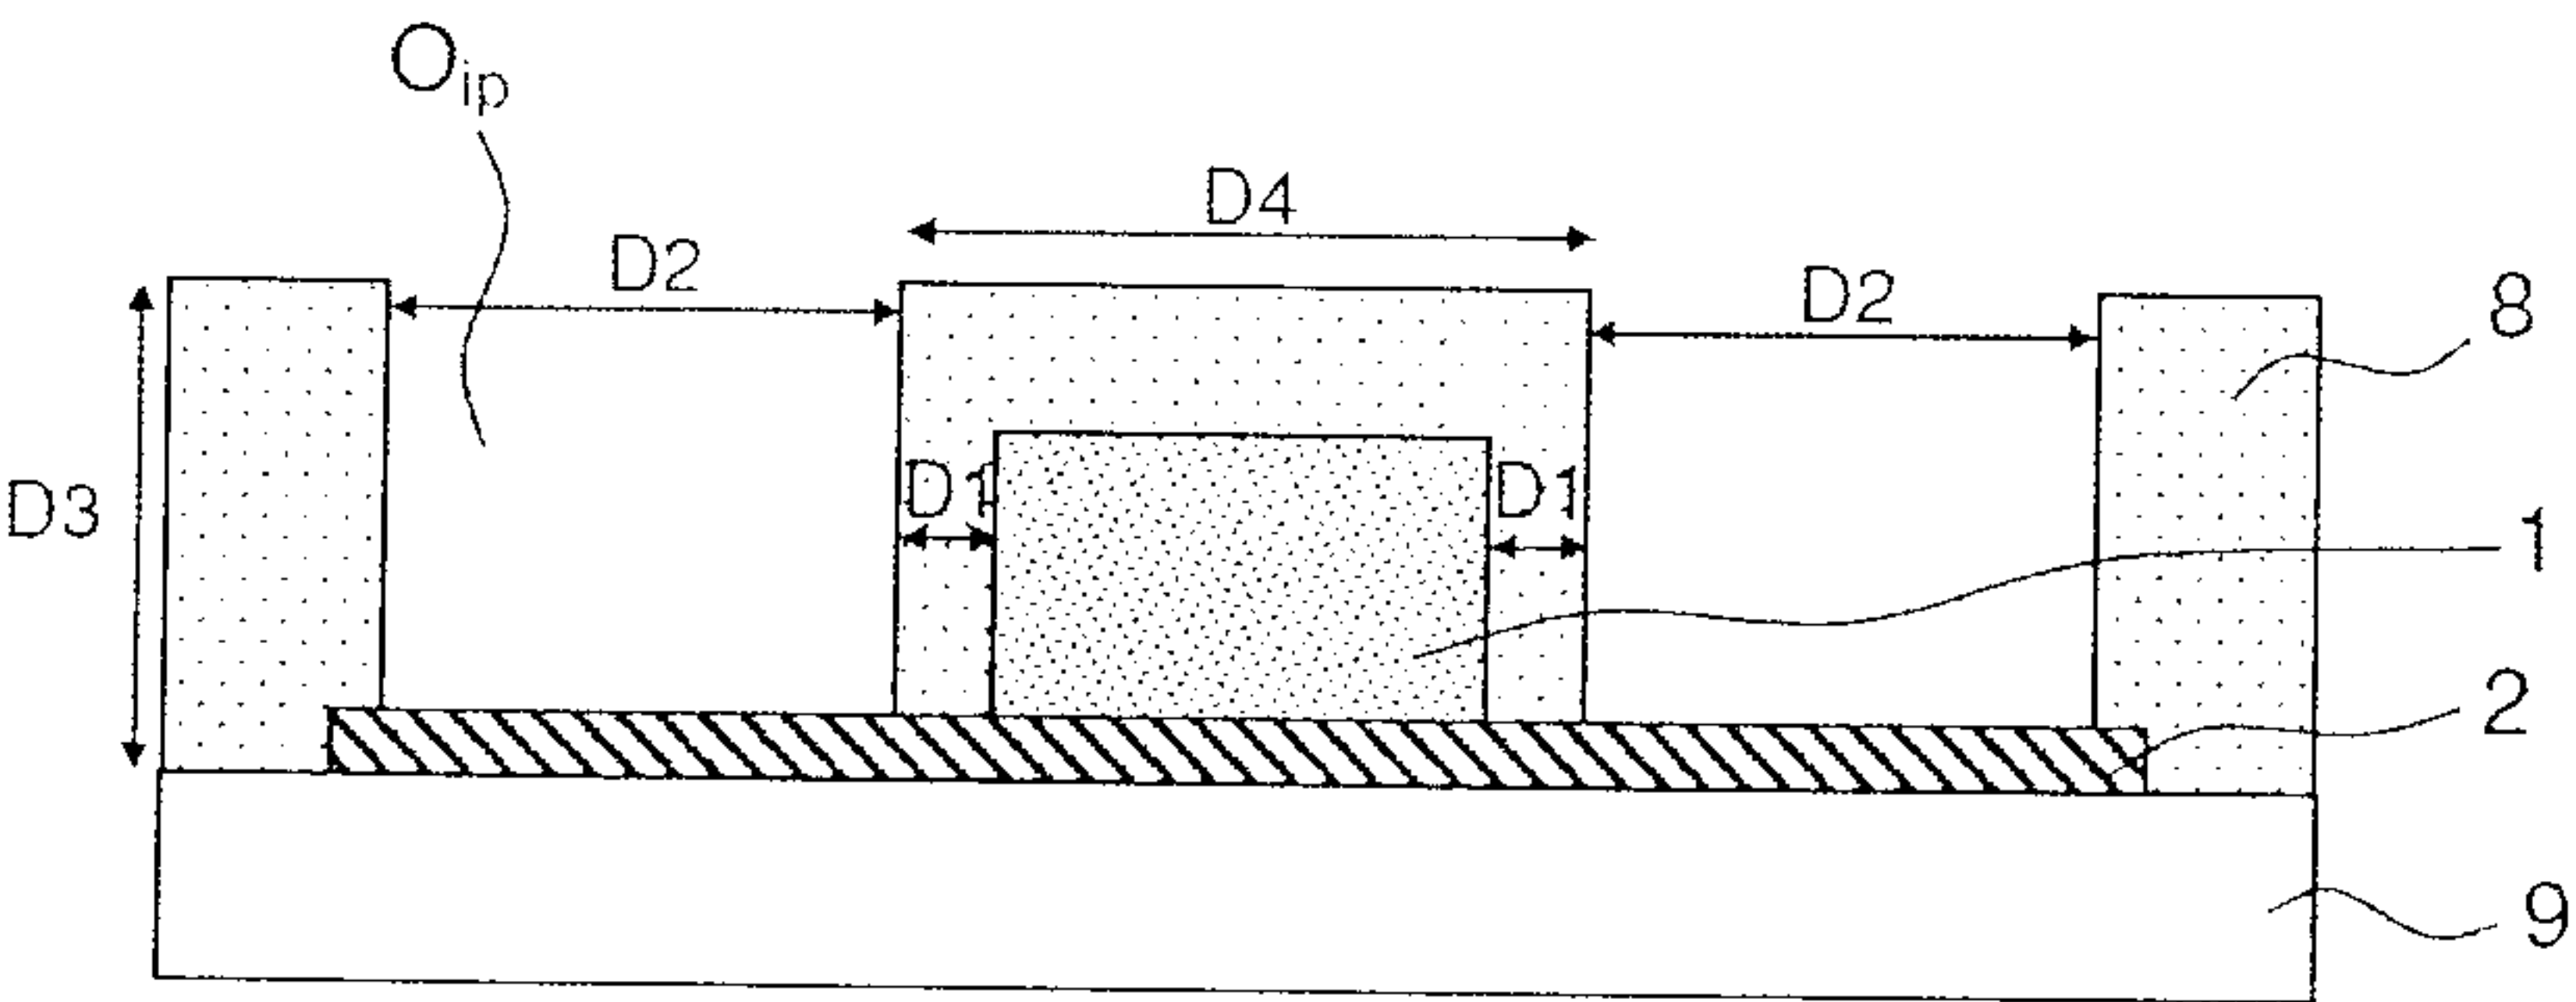


FIG. 13c

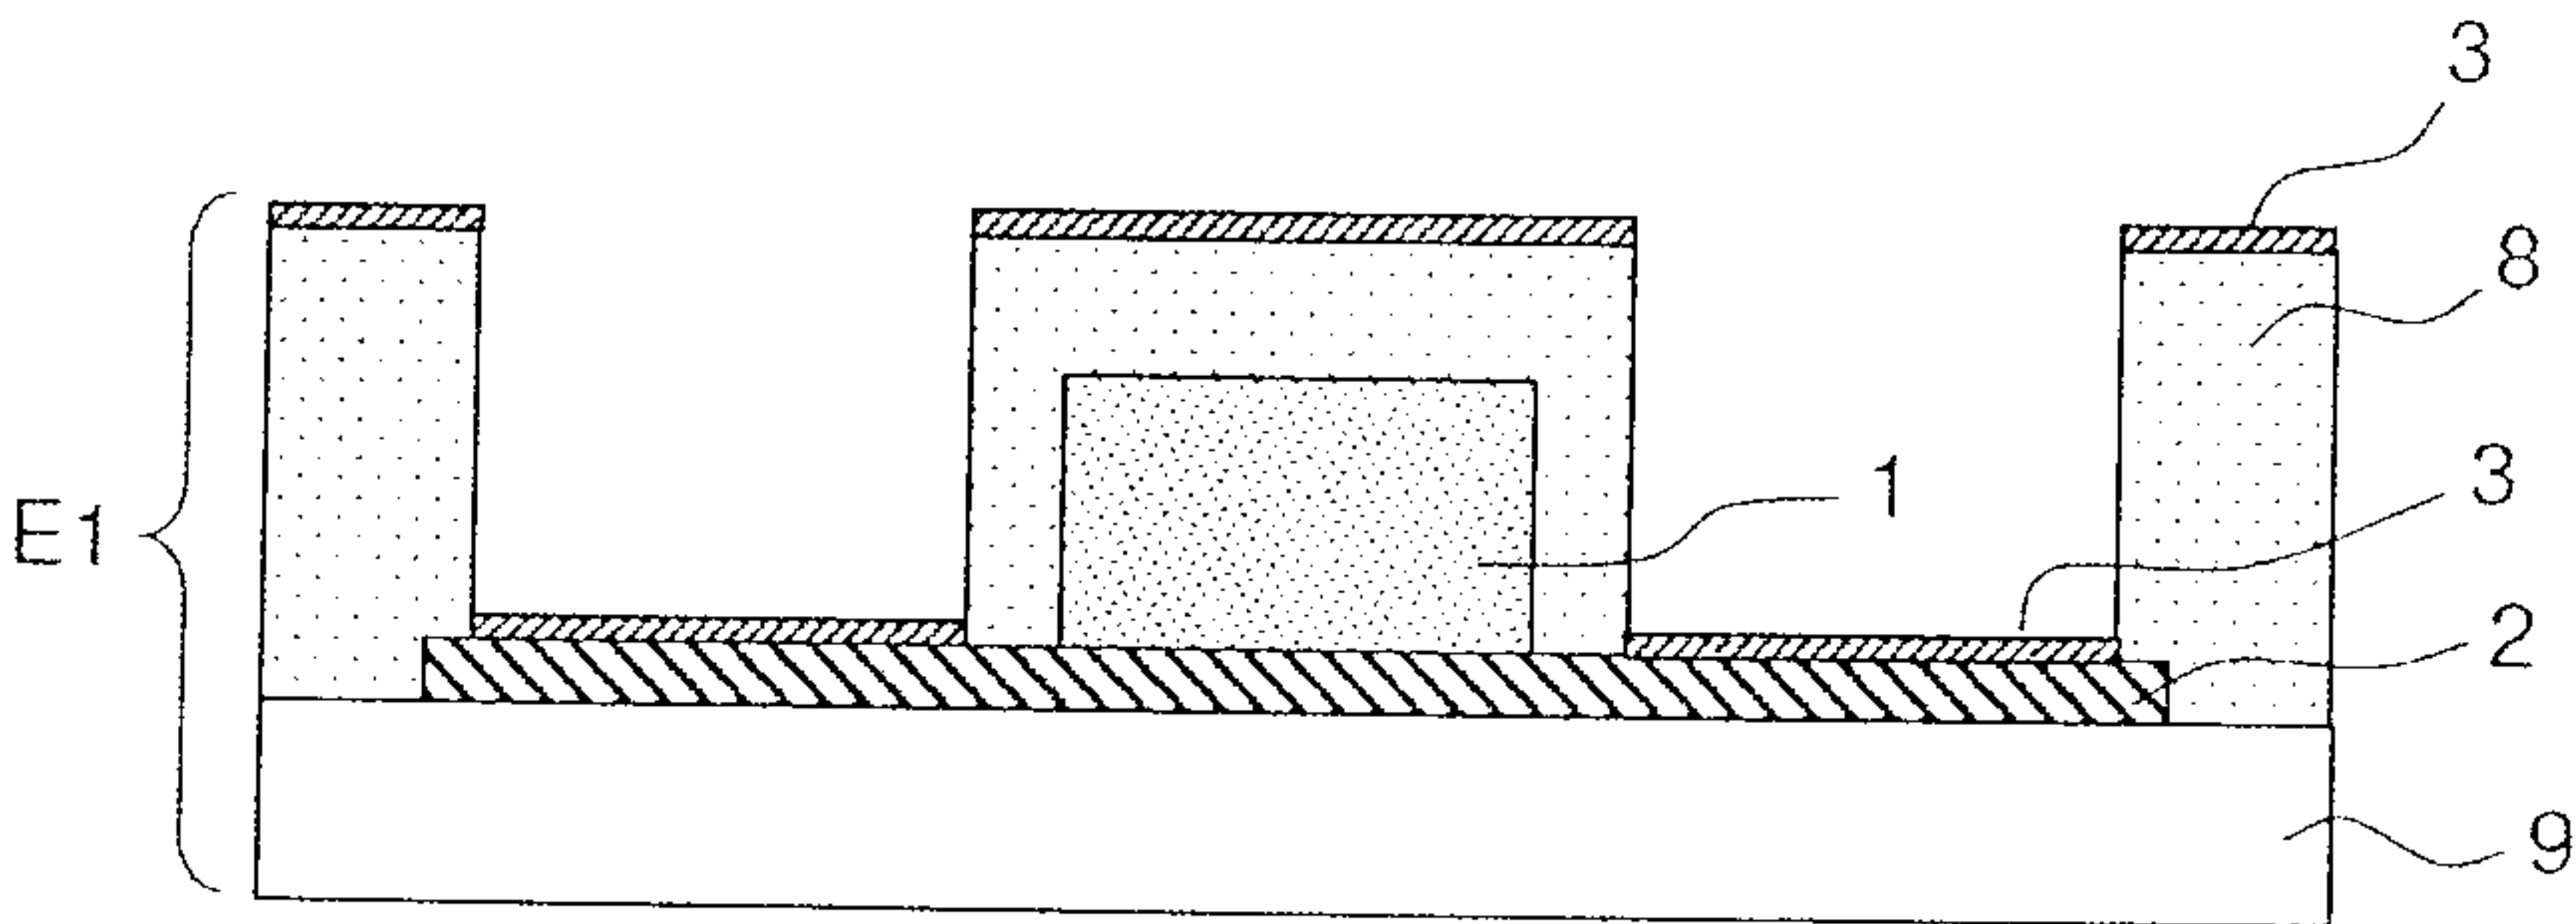


FIG. 13d

16/29

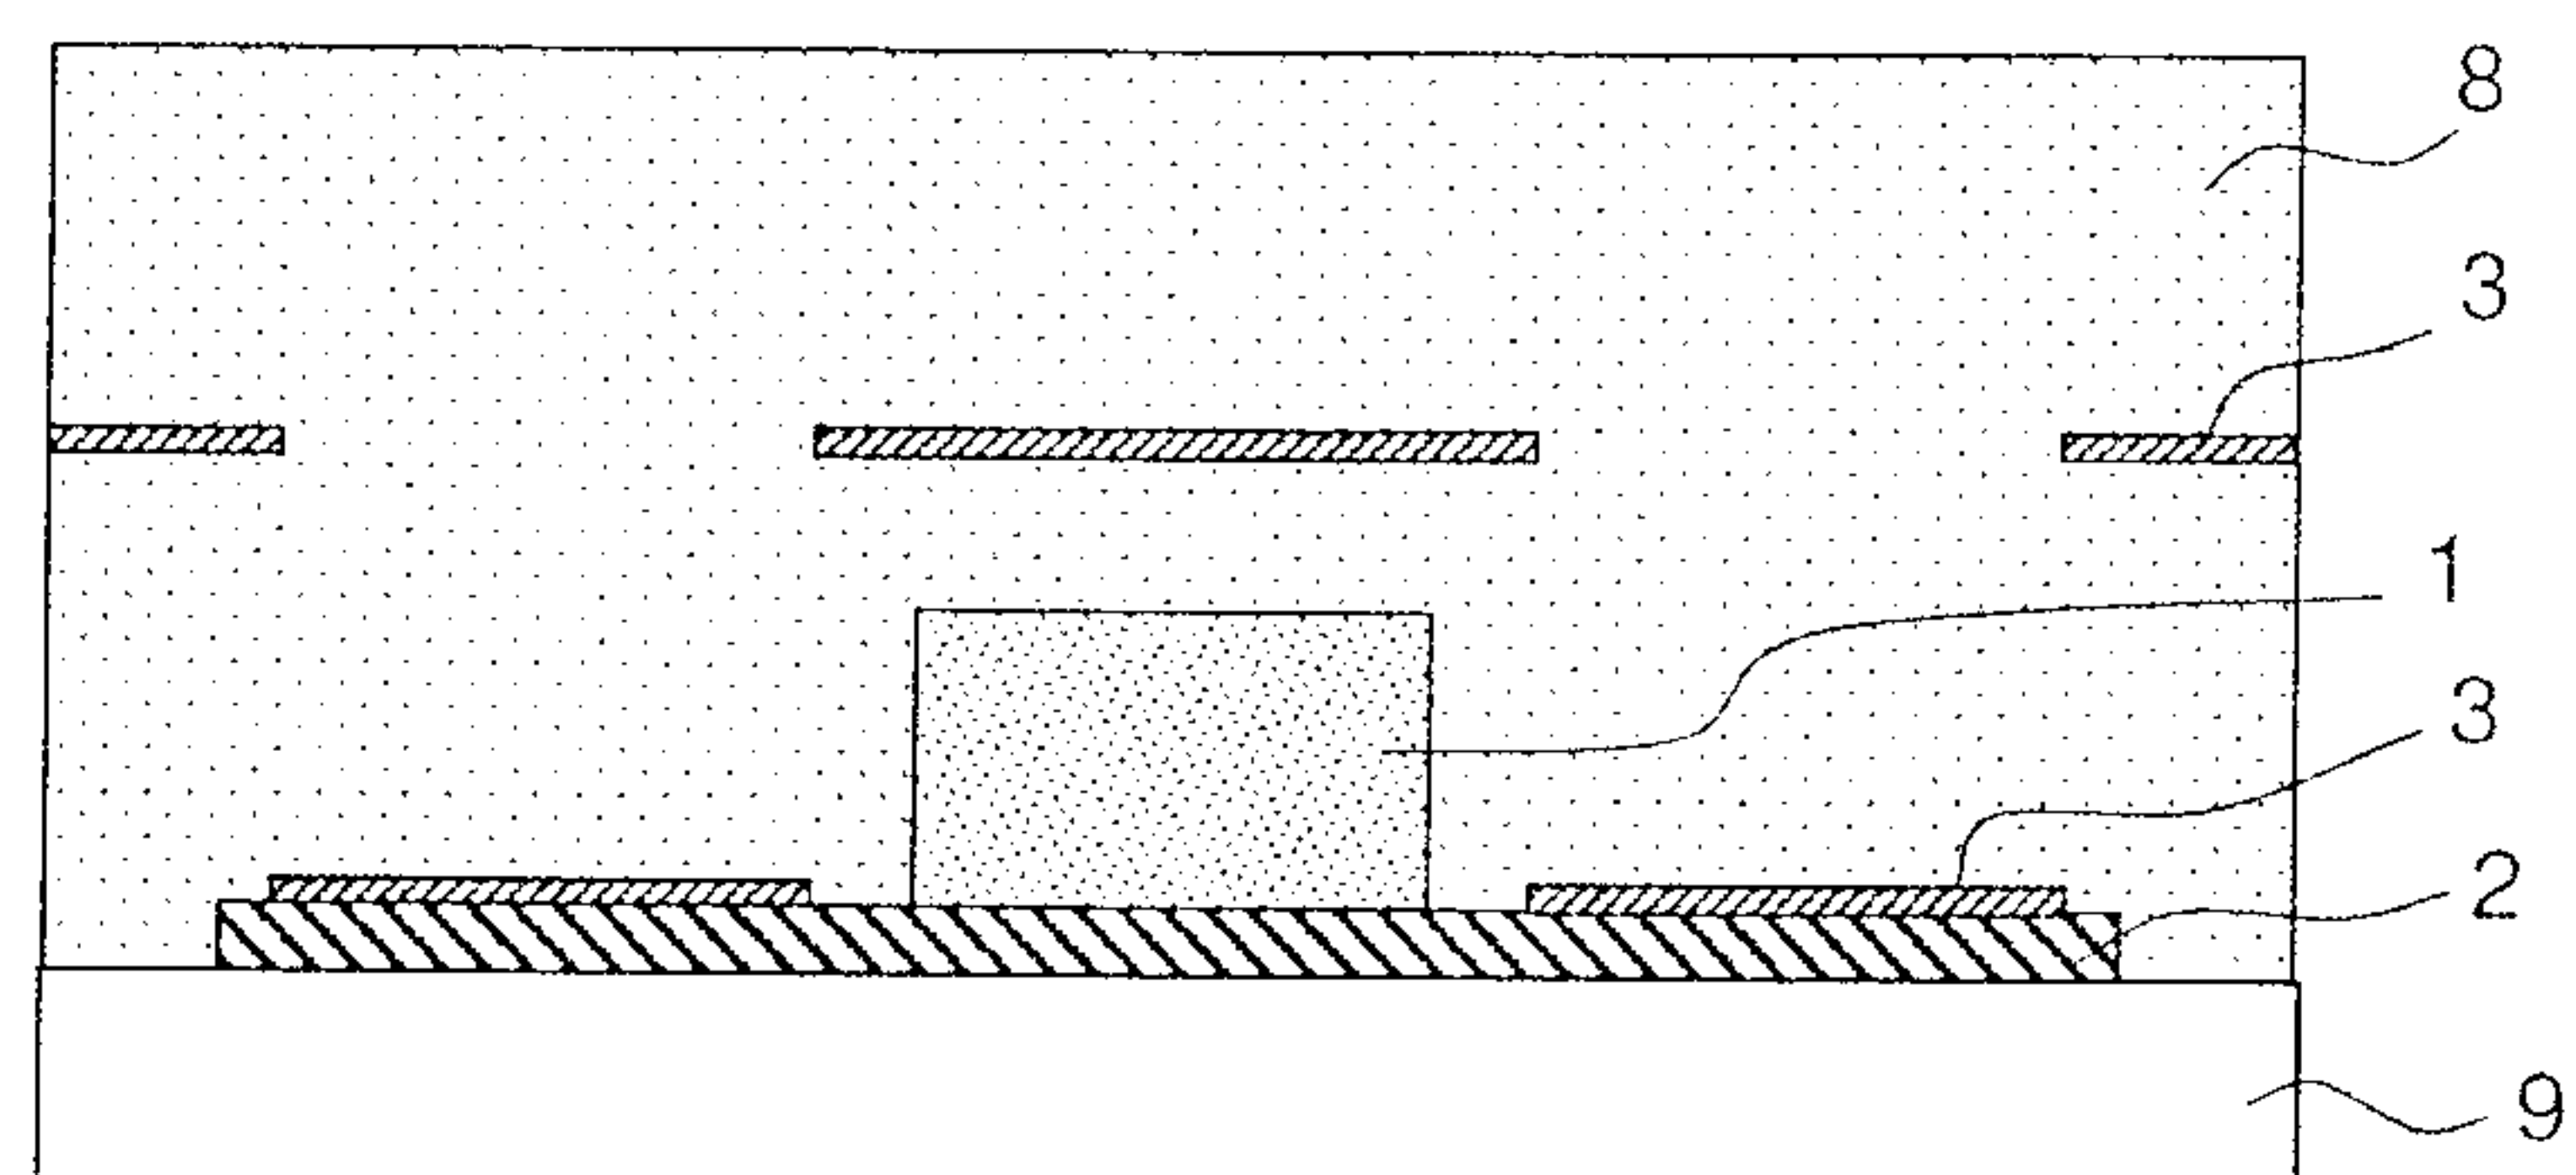


FIG. 13e

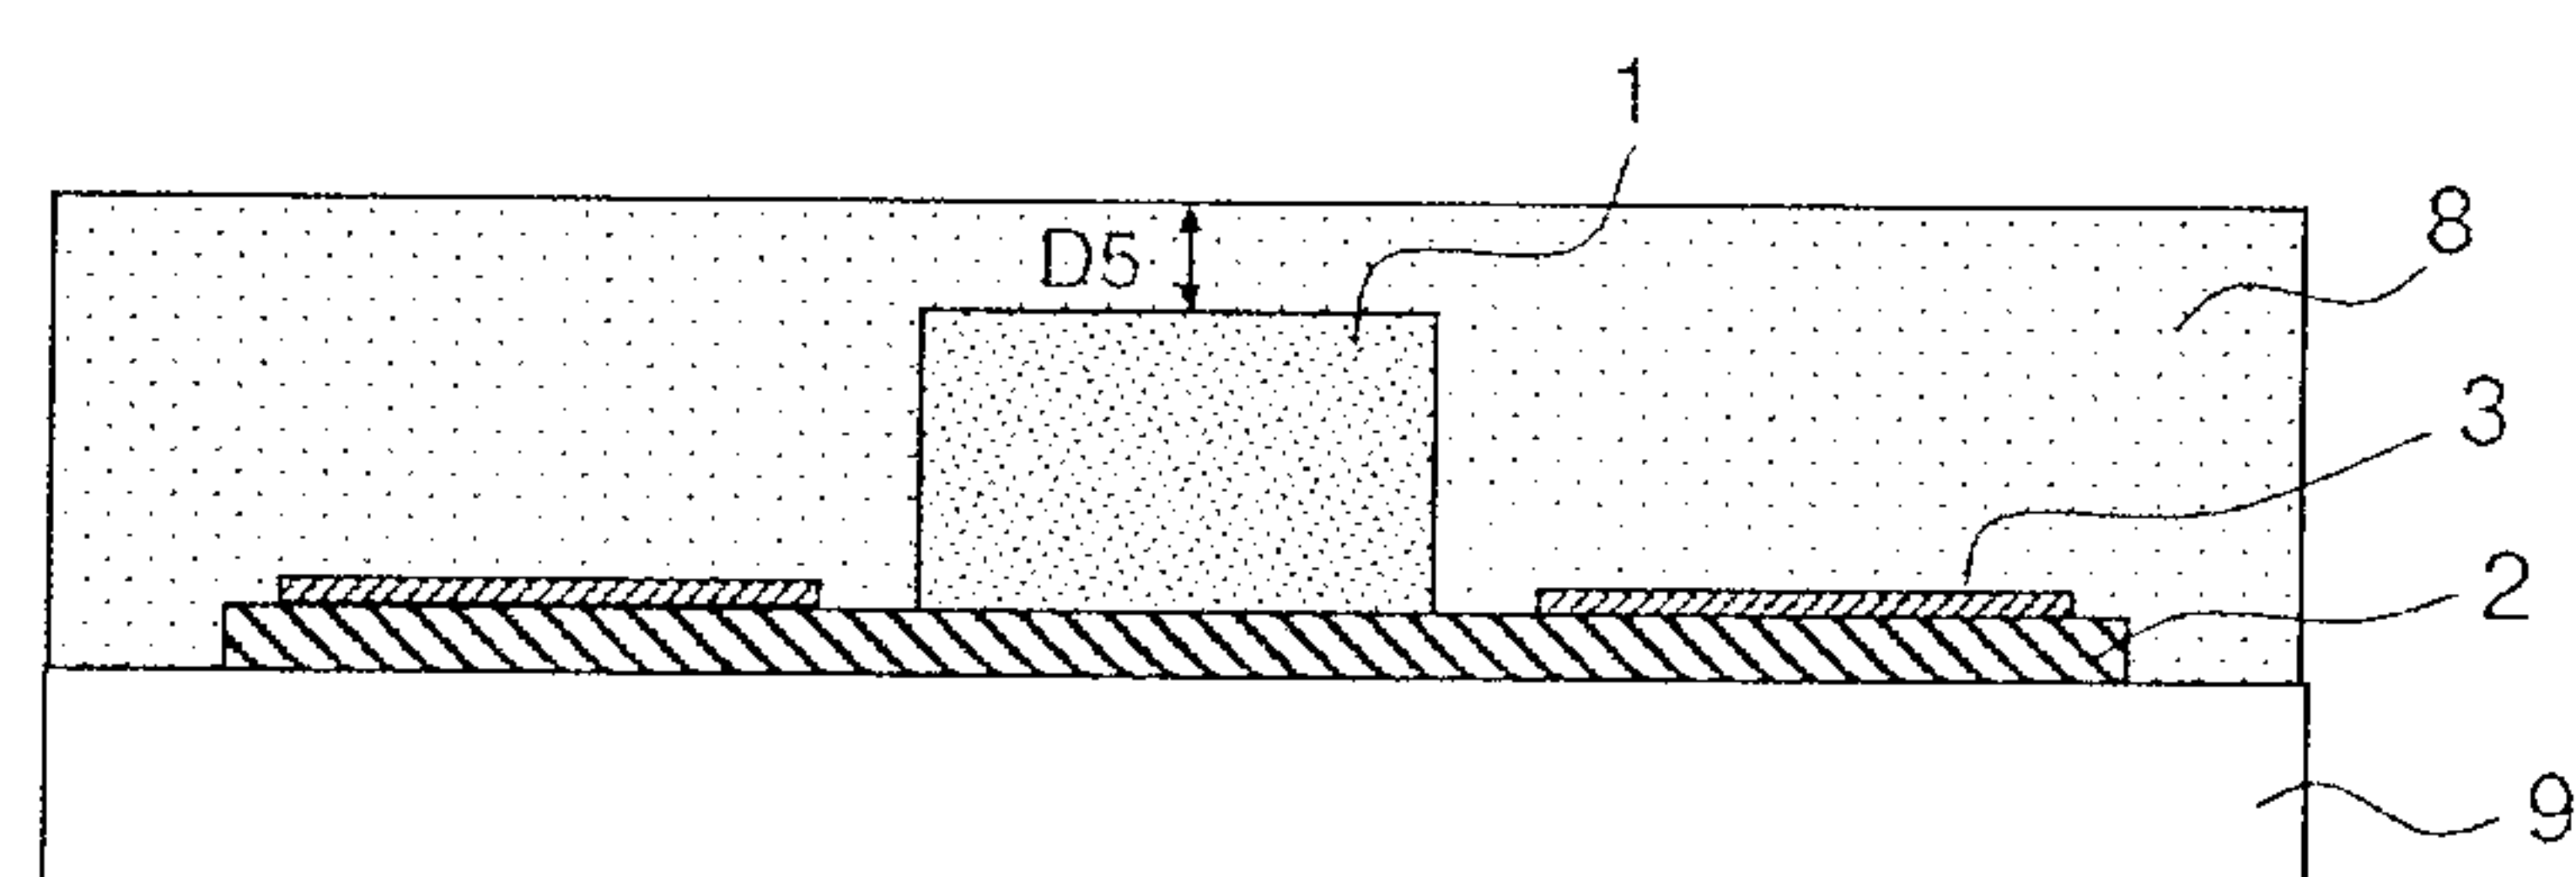


FIG. 13f

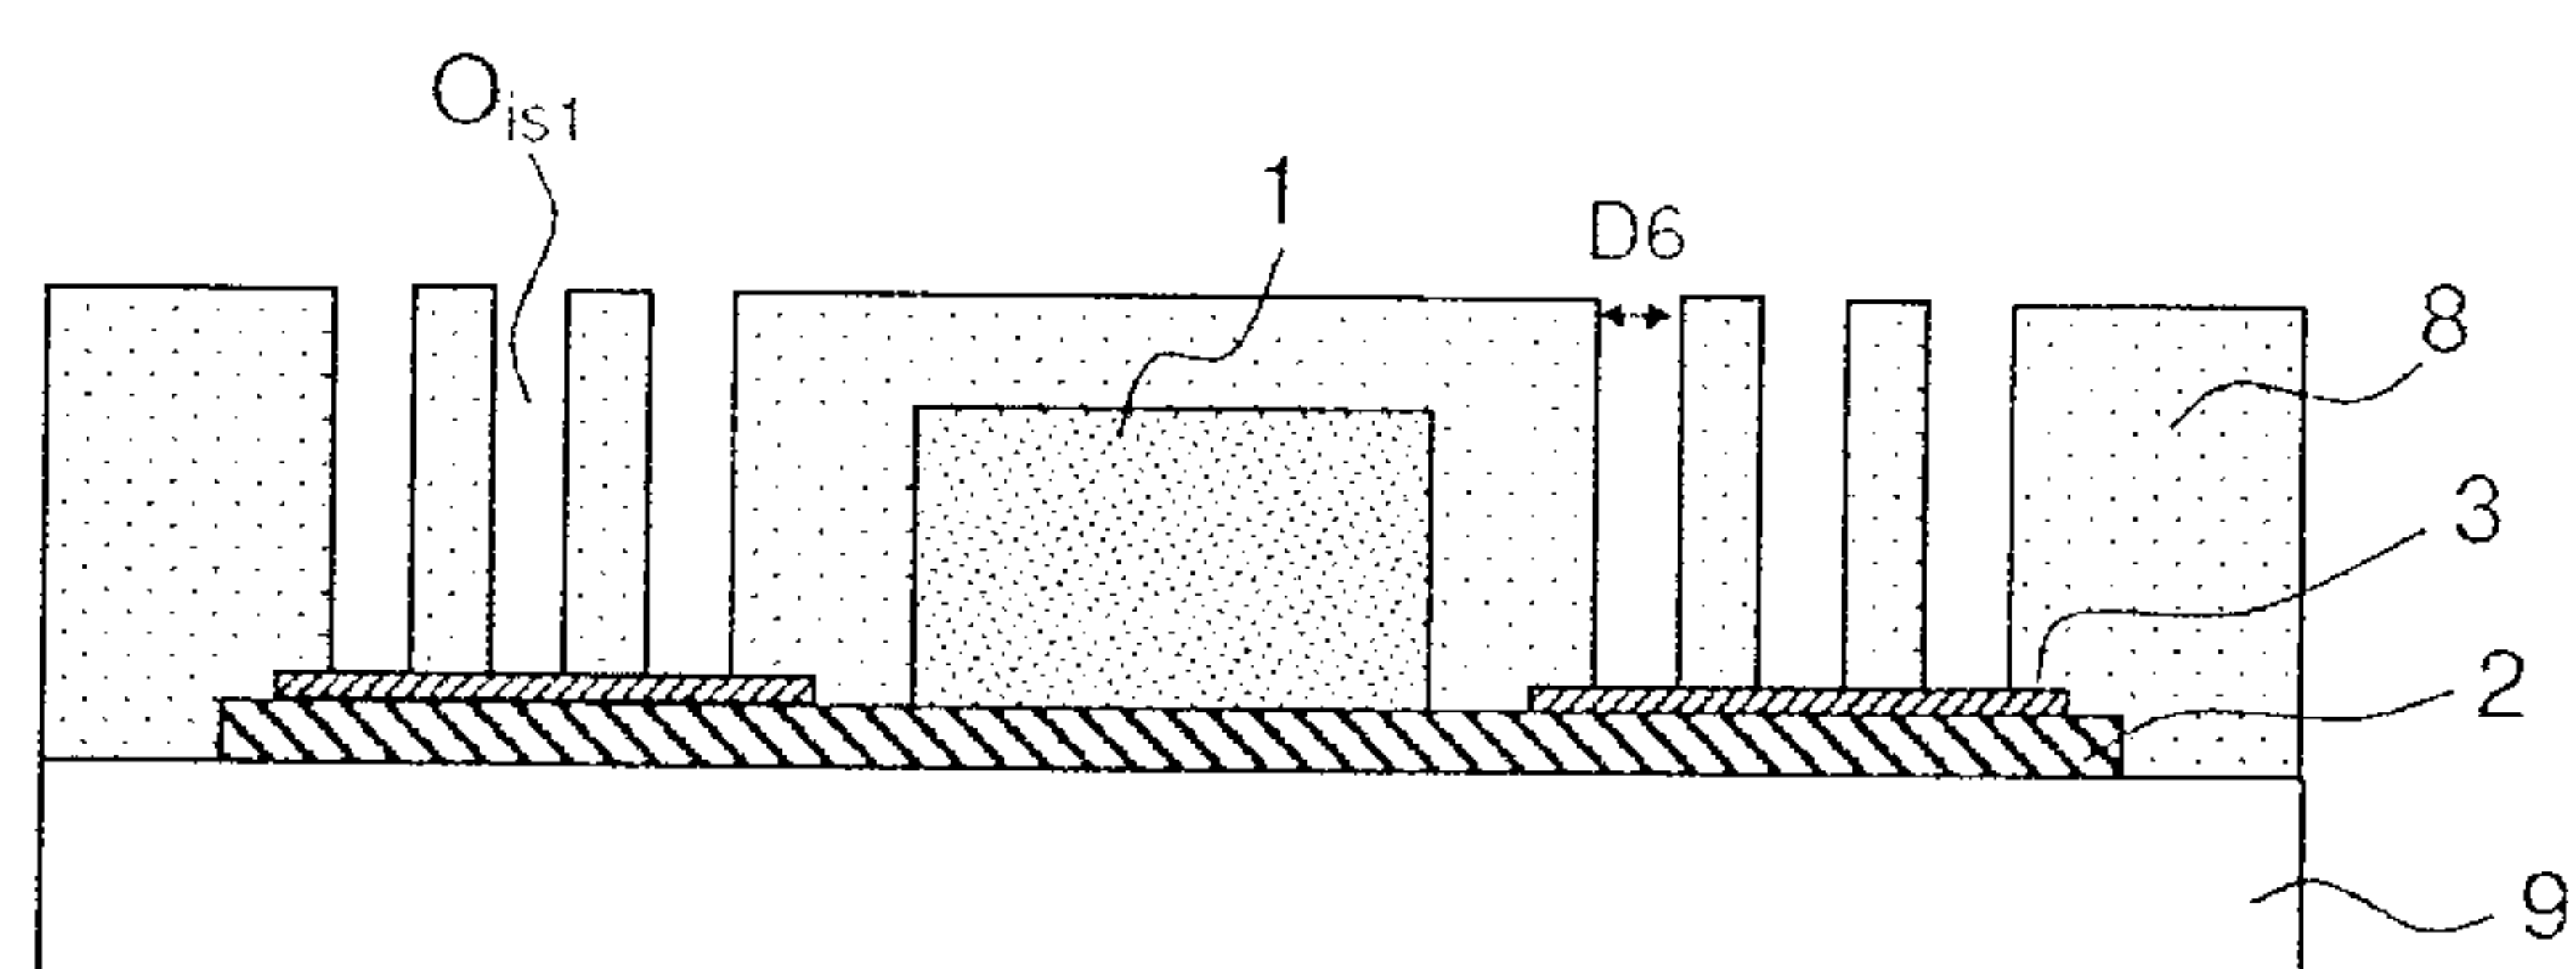


FIG. 13g

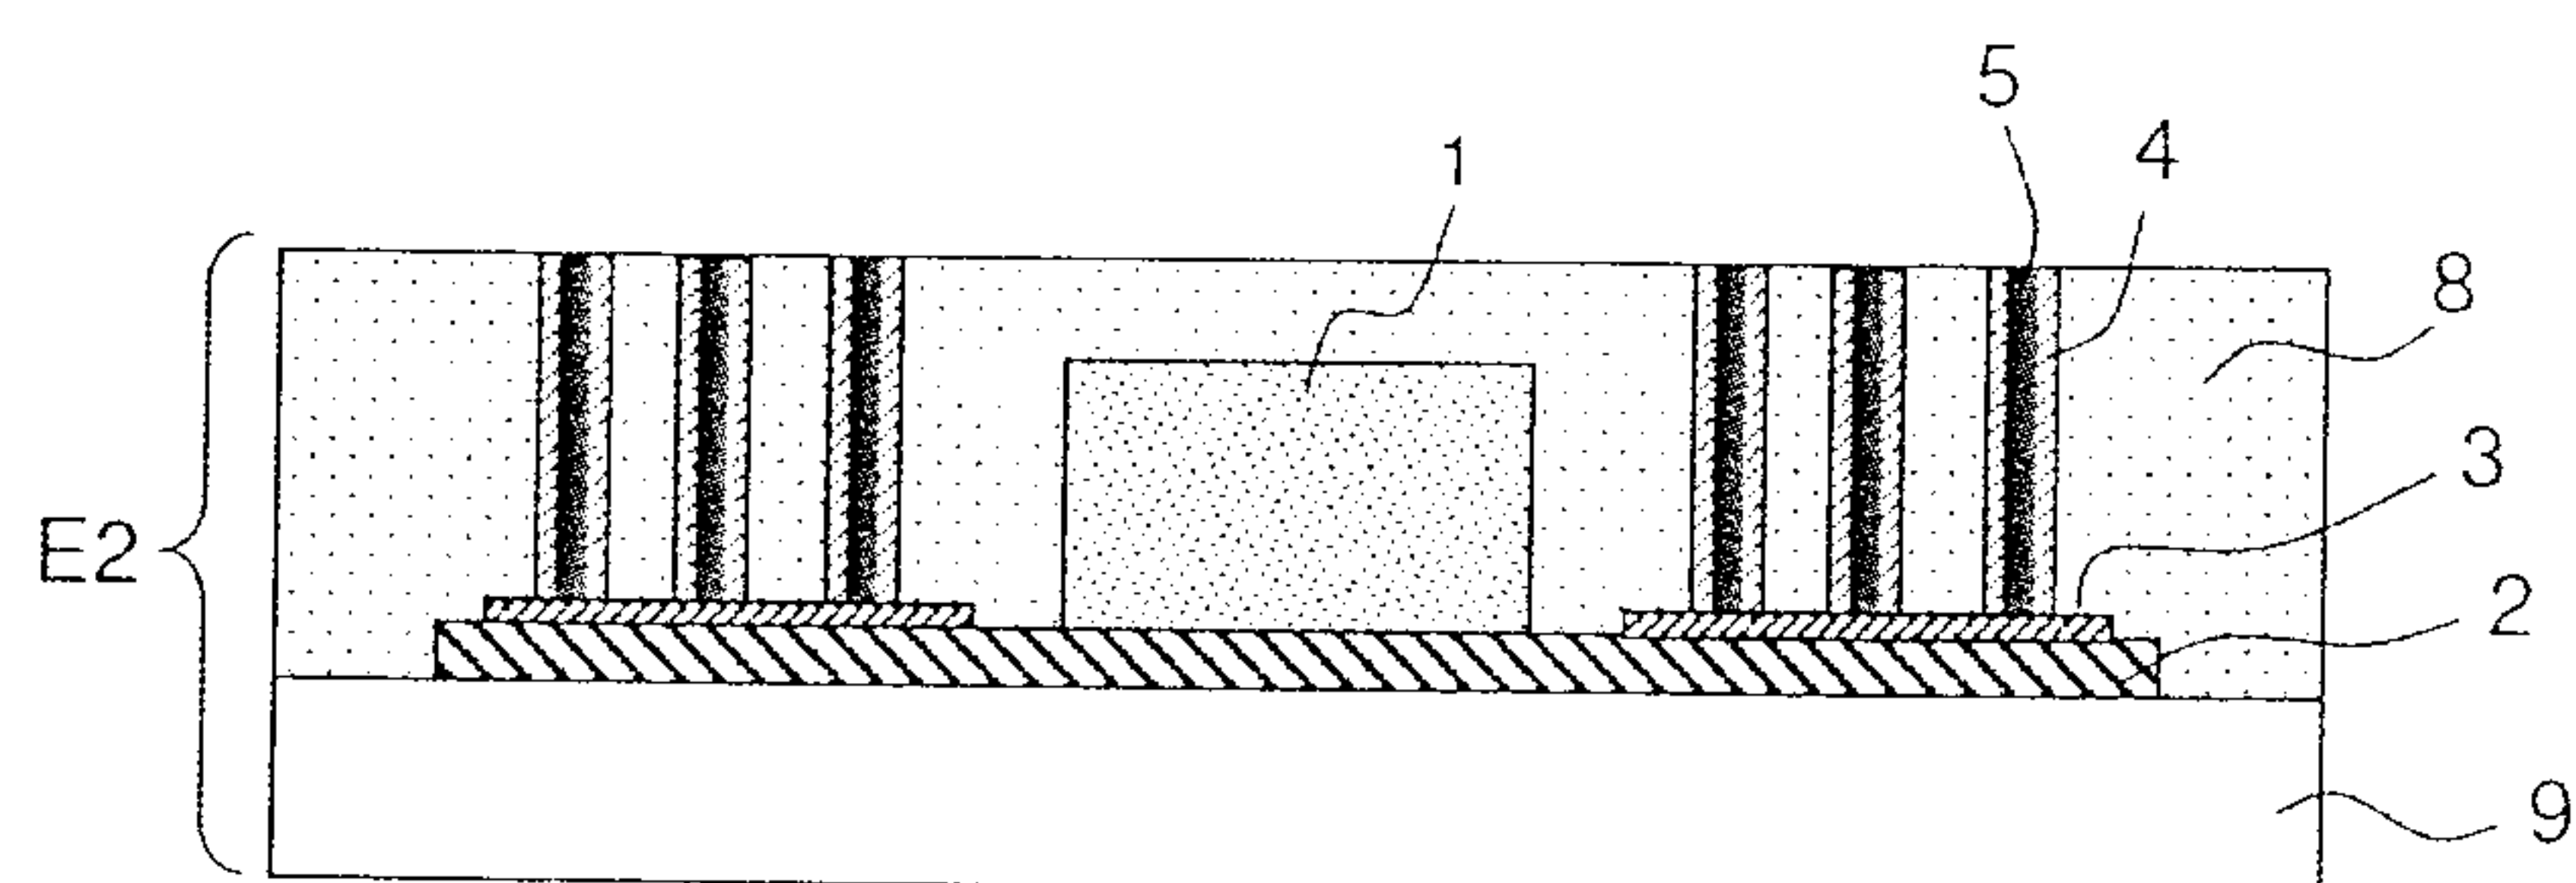


FIG. 13h

17/29

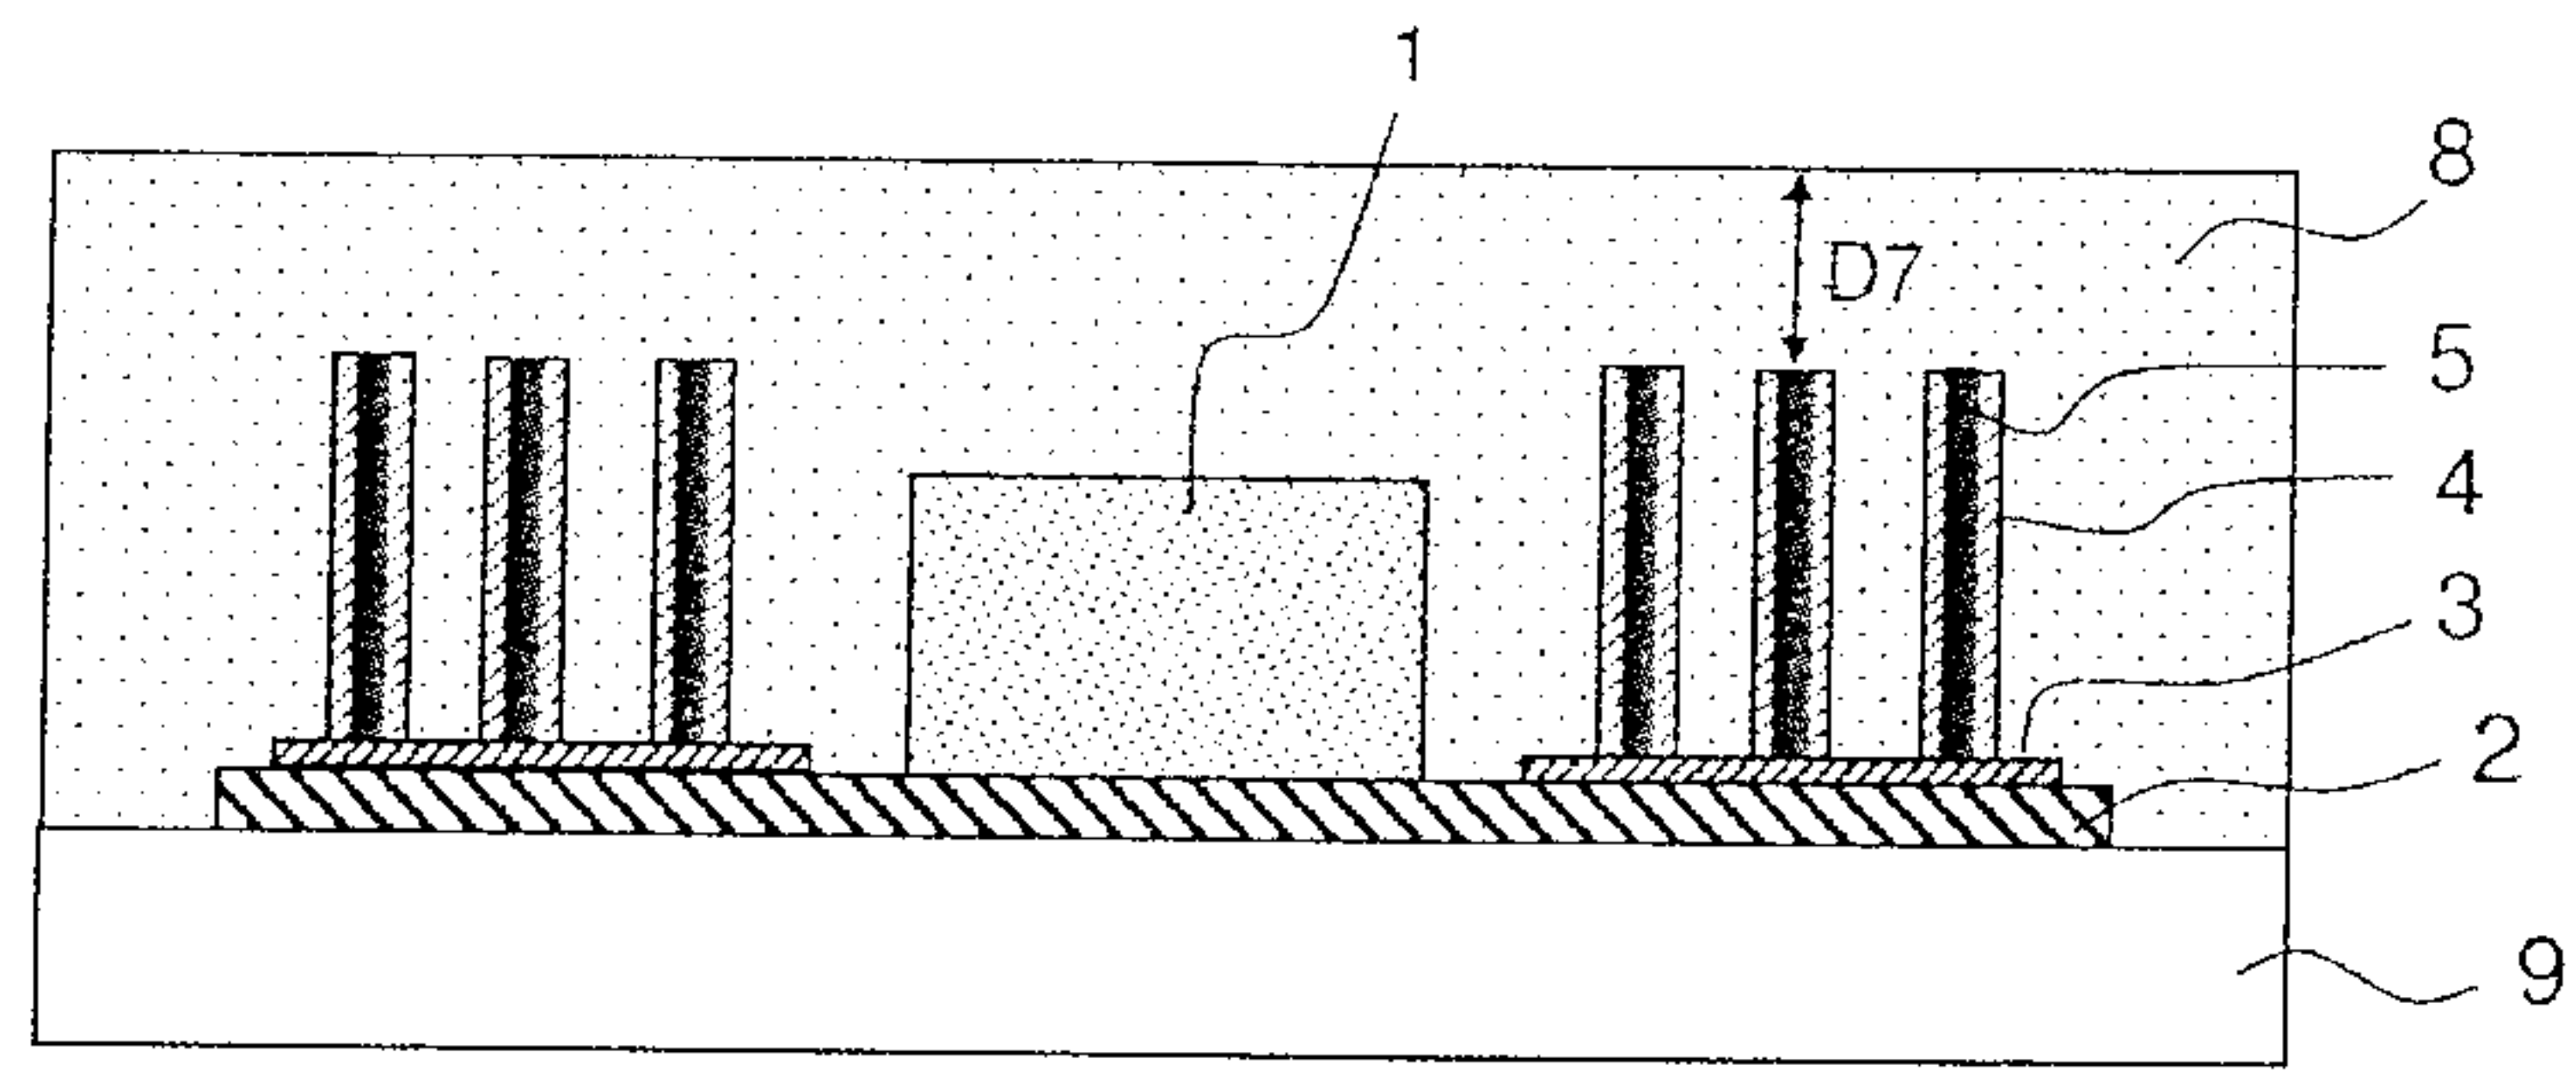


FIG. 13i

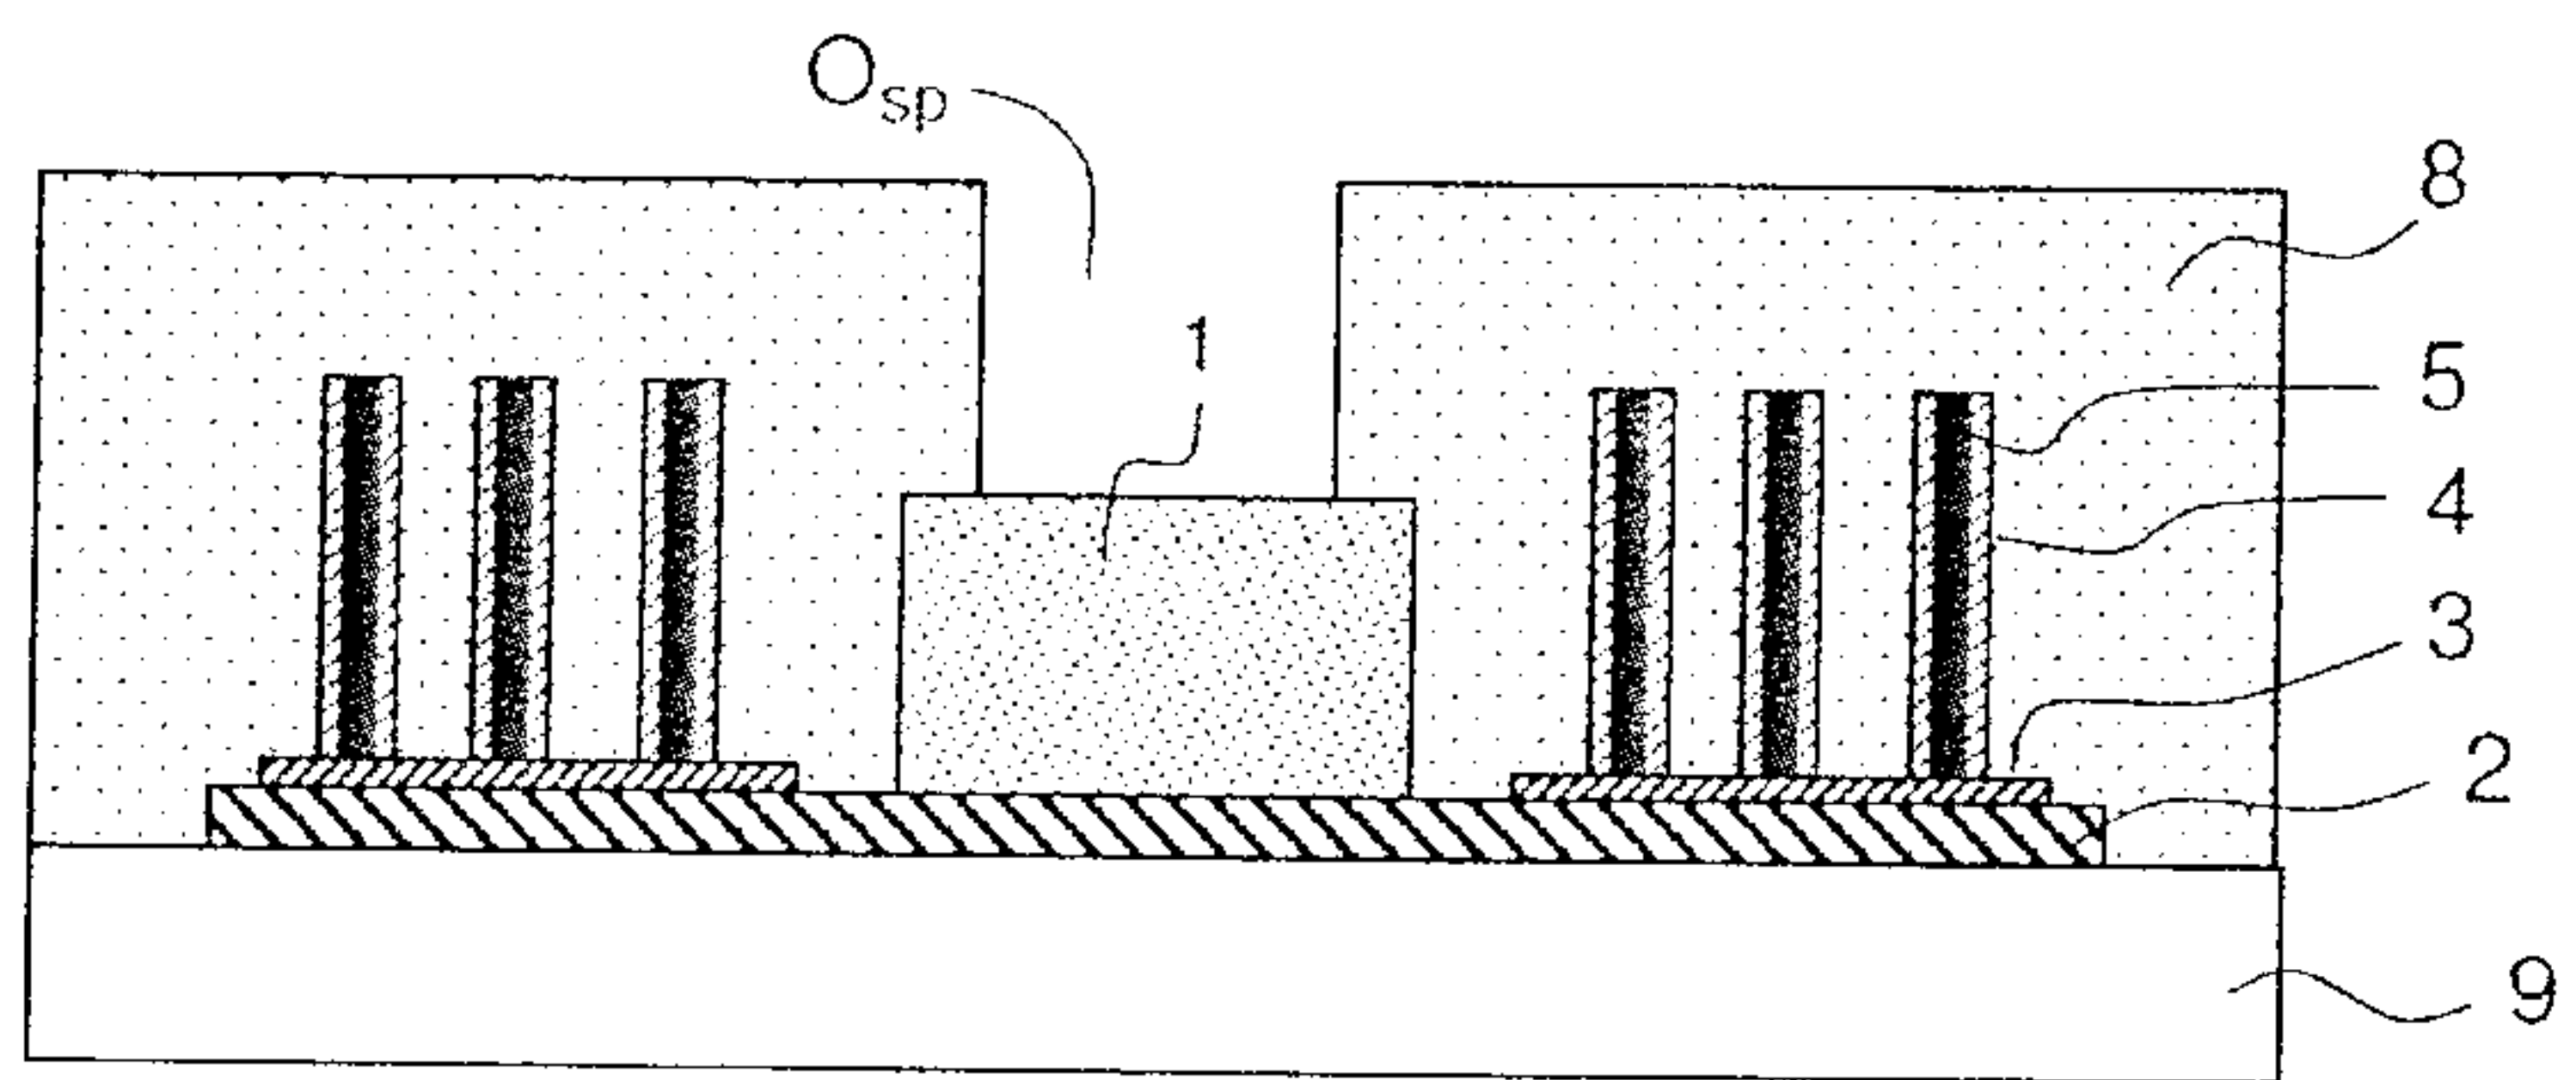


FIG. 13j

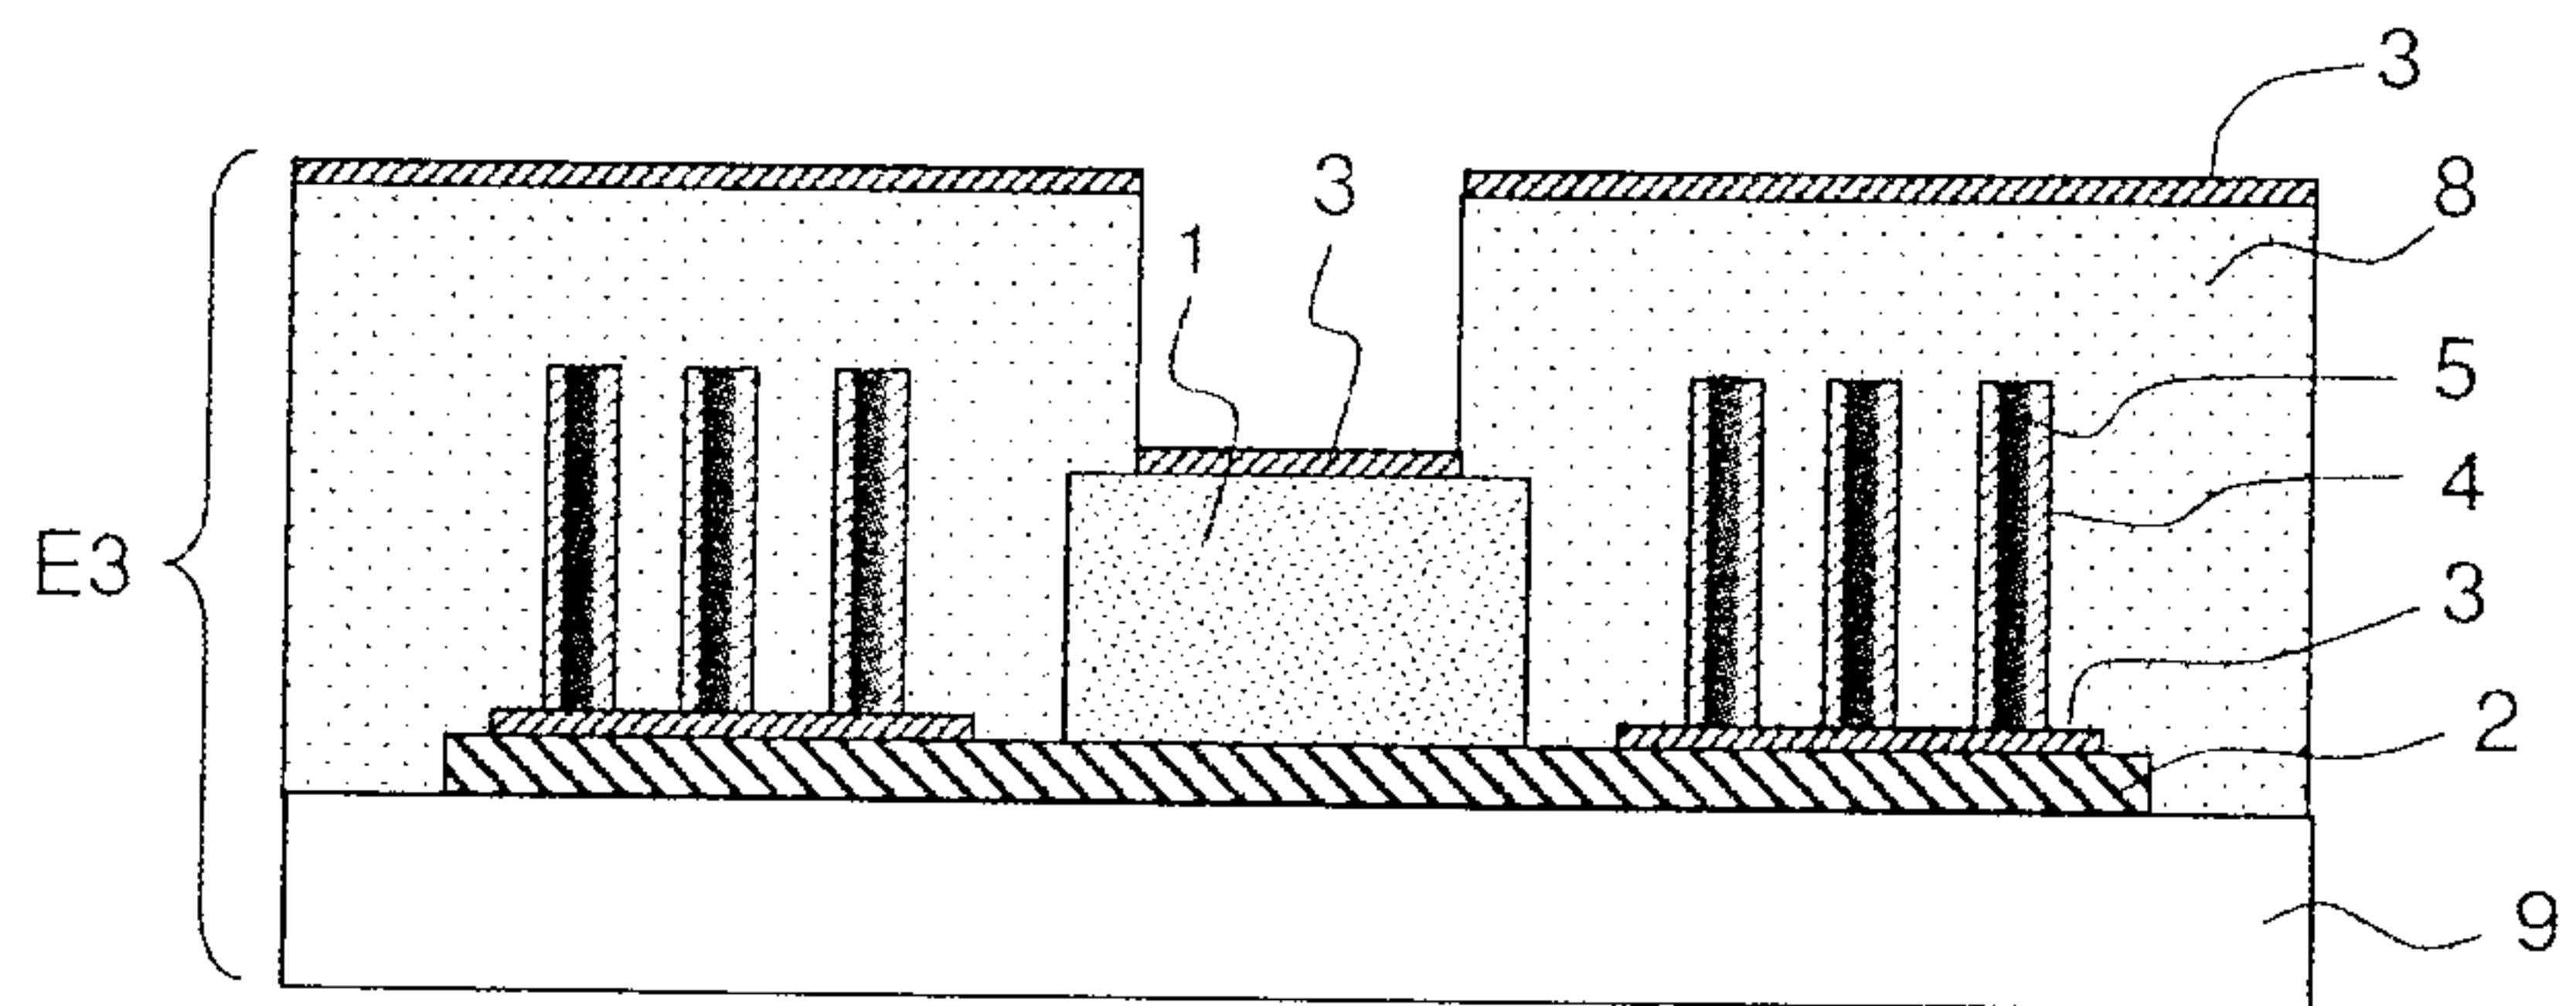


FIG. 13k

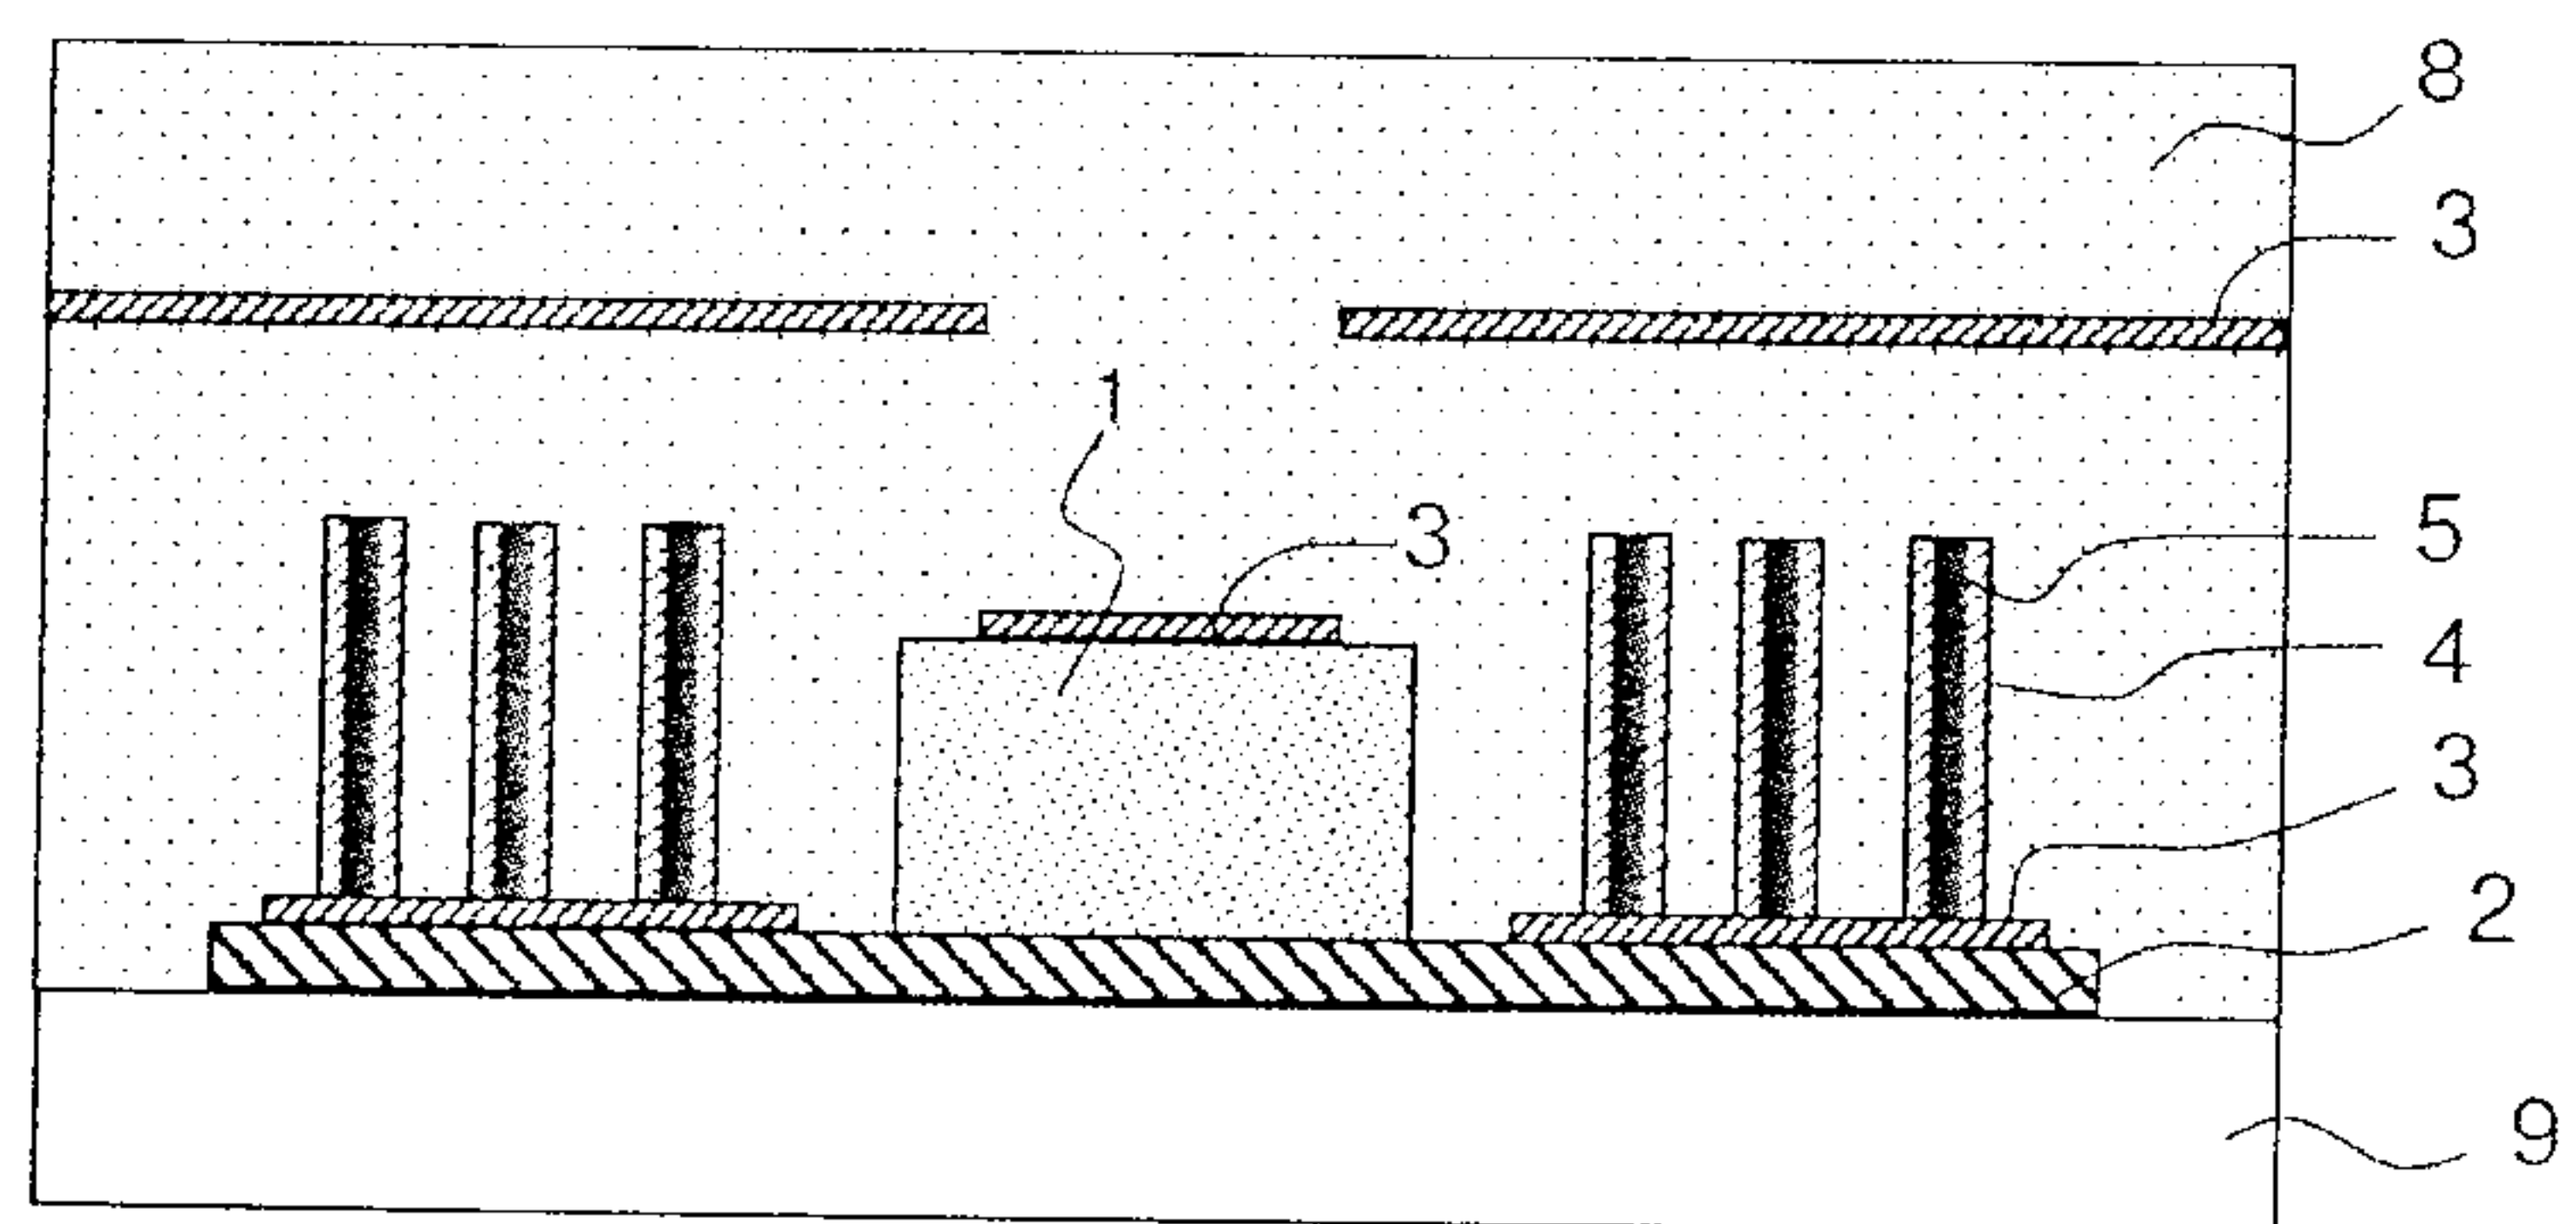


FIG. 13l

18/29

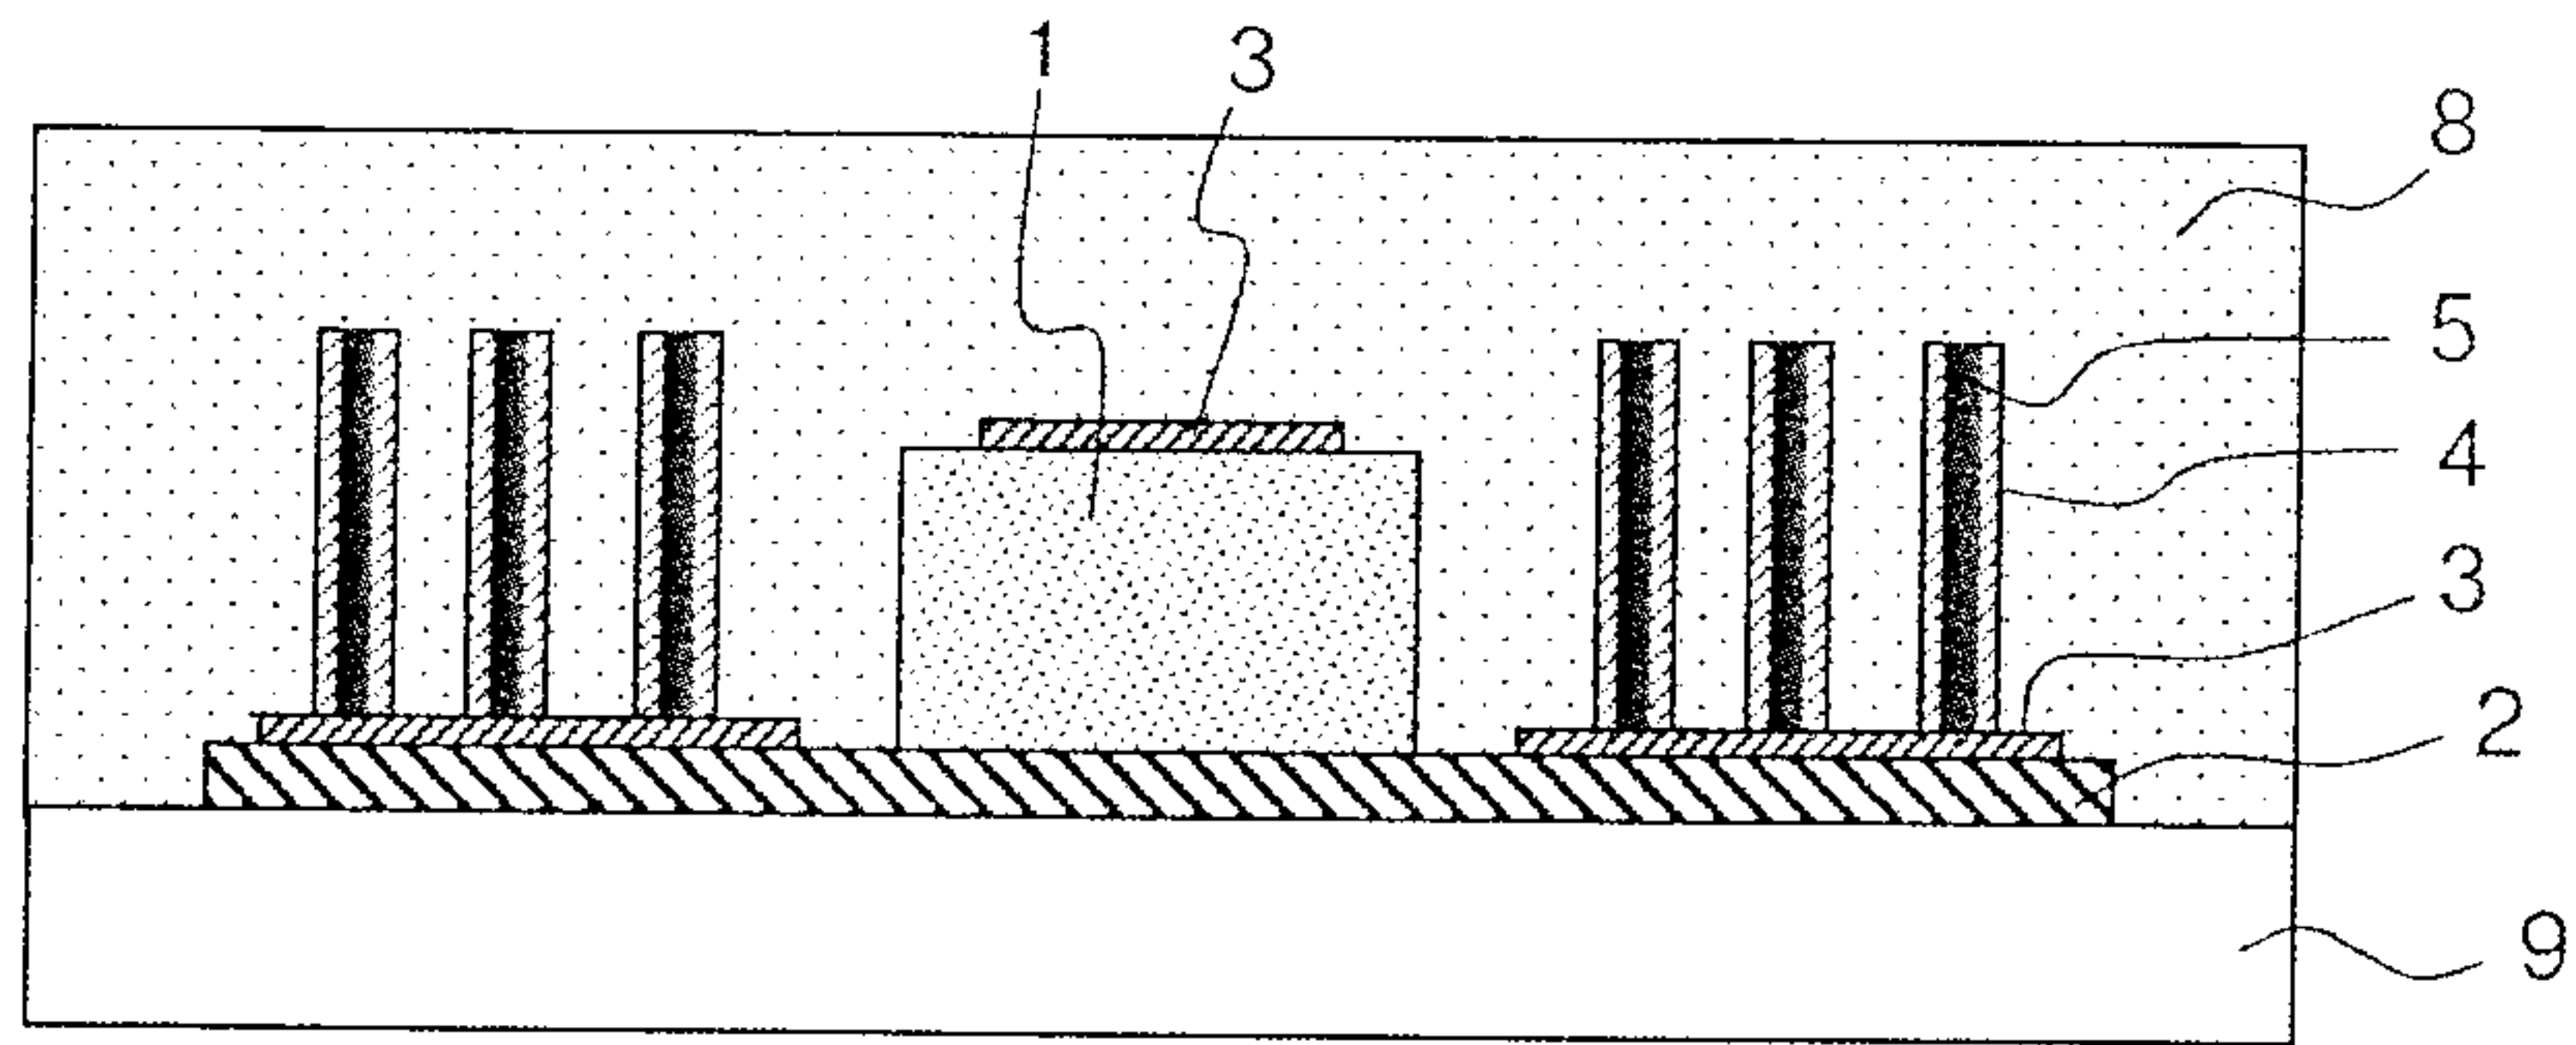


FIG.13m

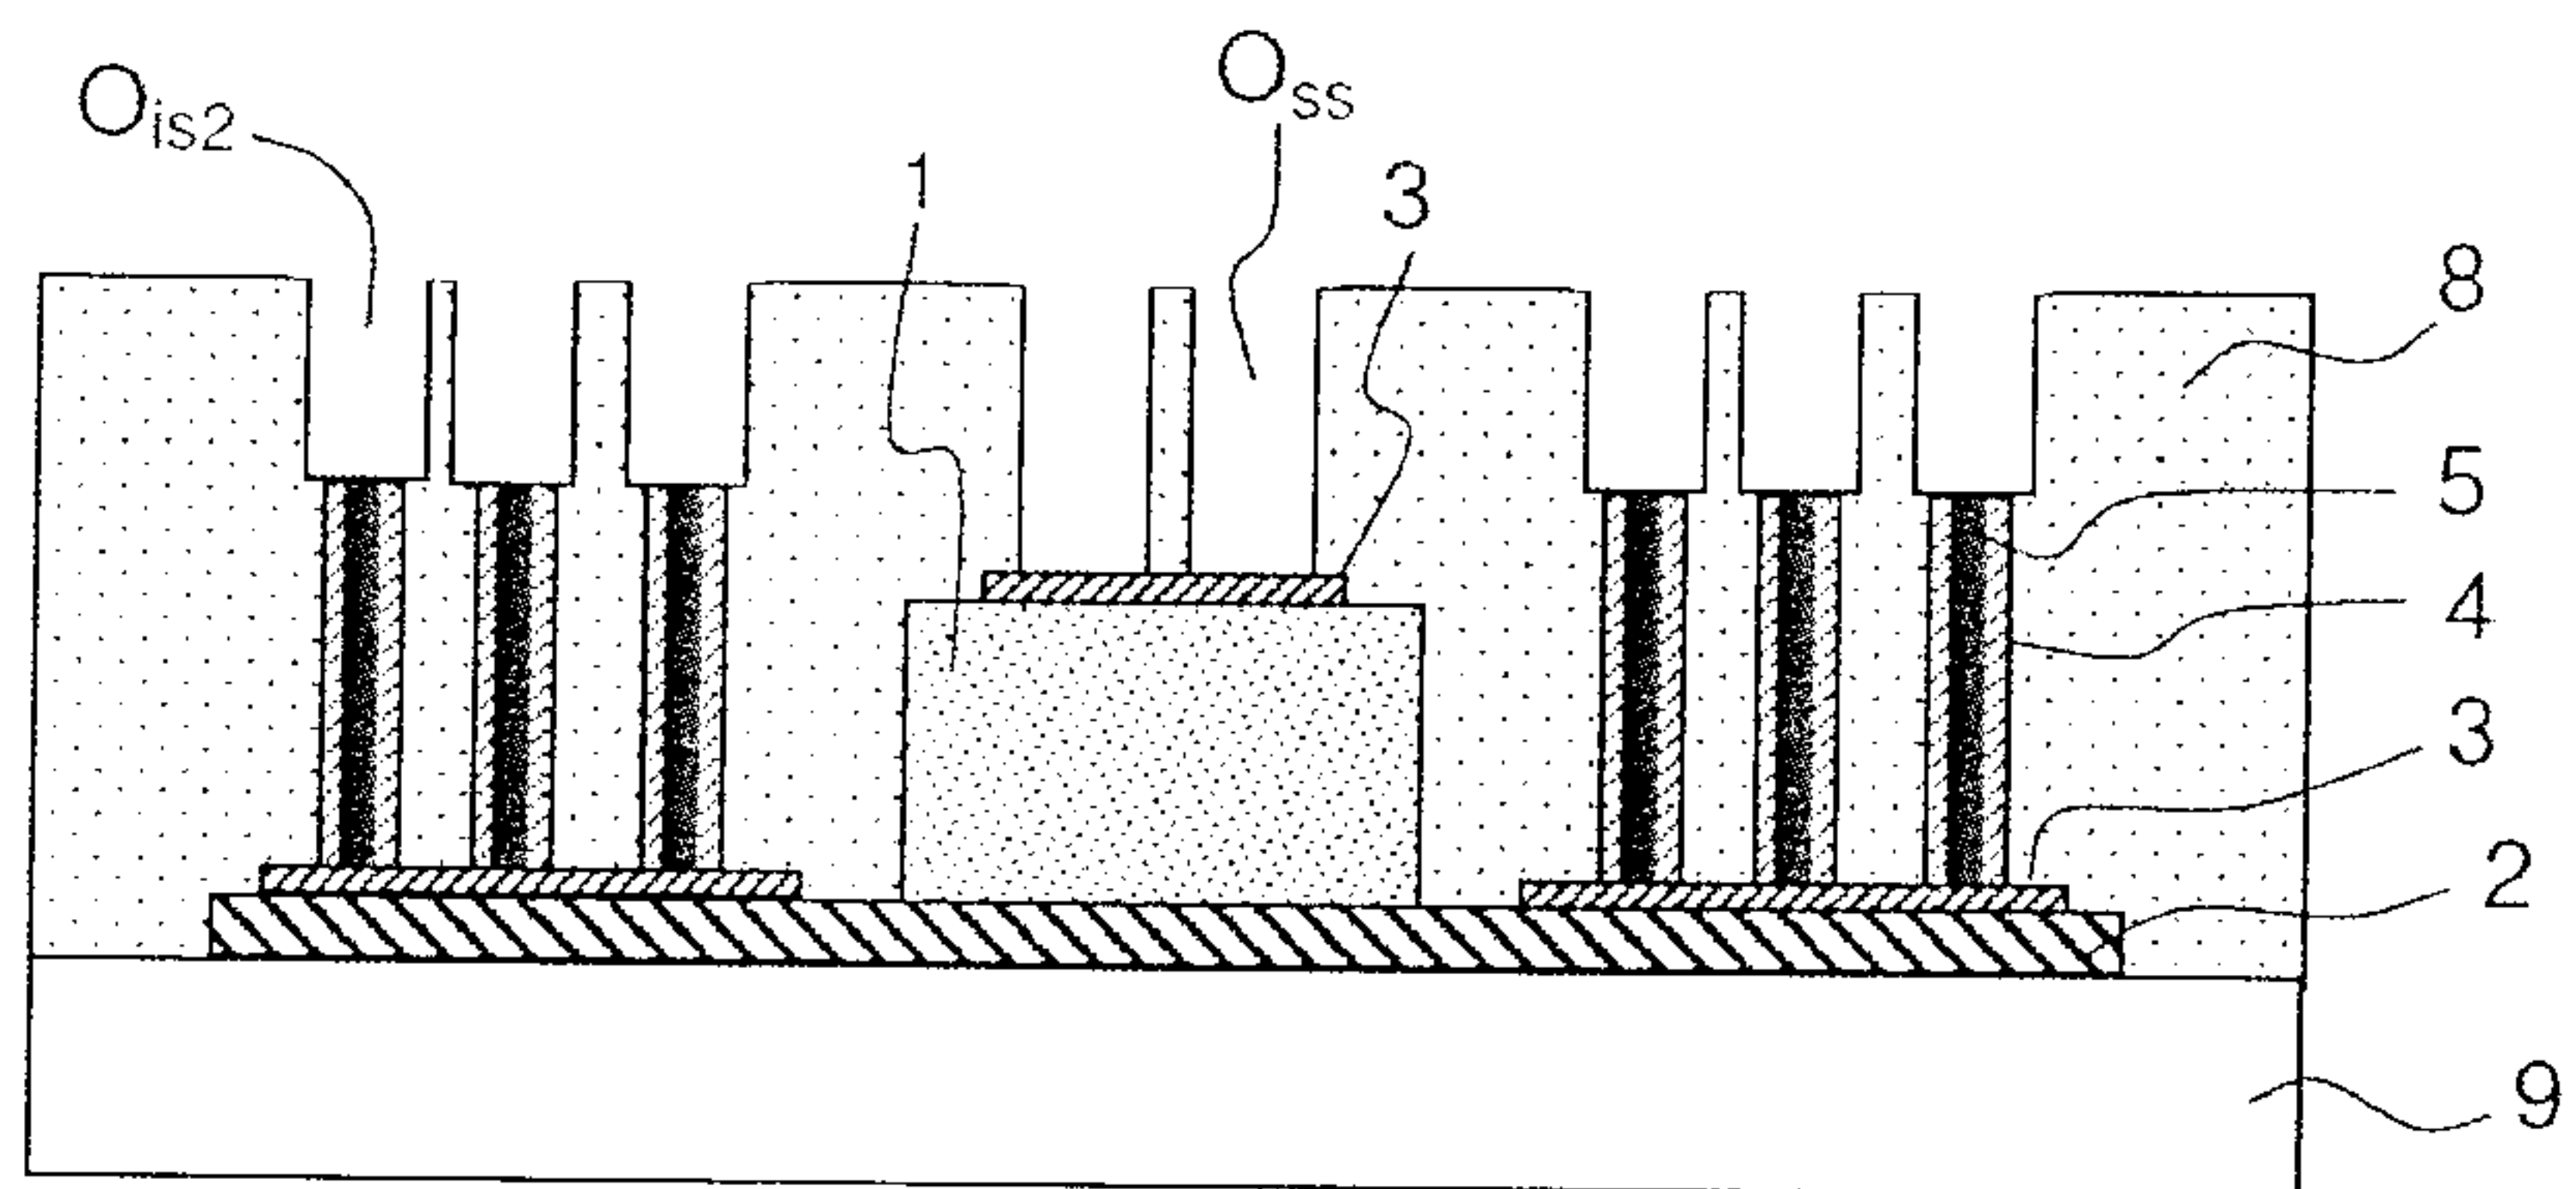


FIG.13n

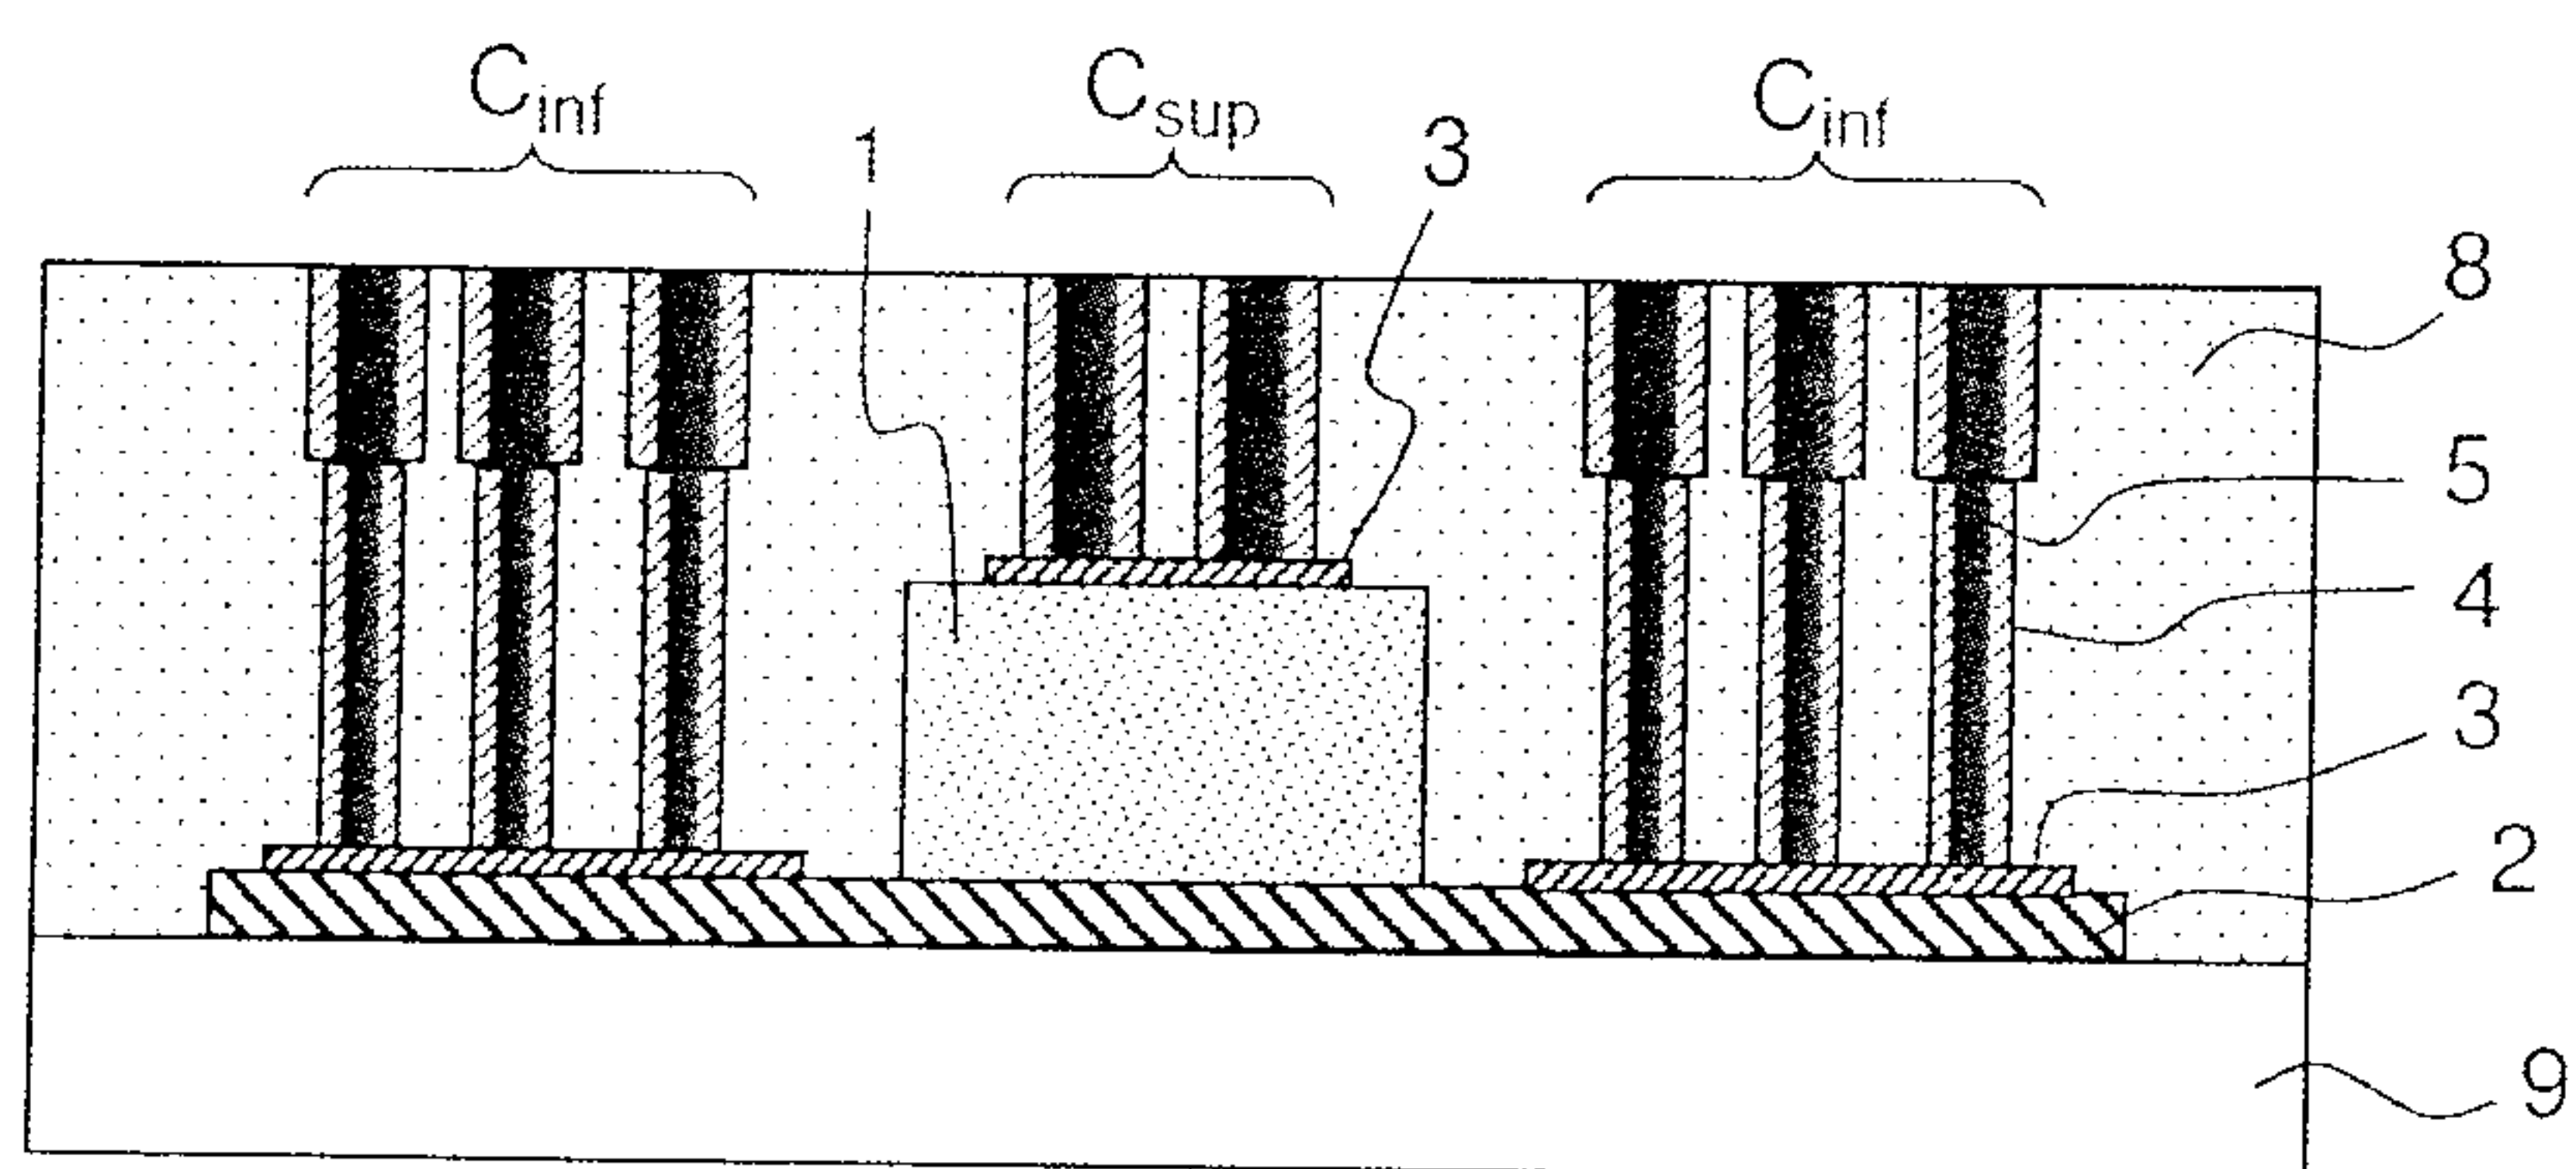


FIG.13o

19/29

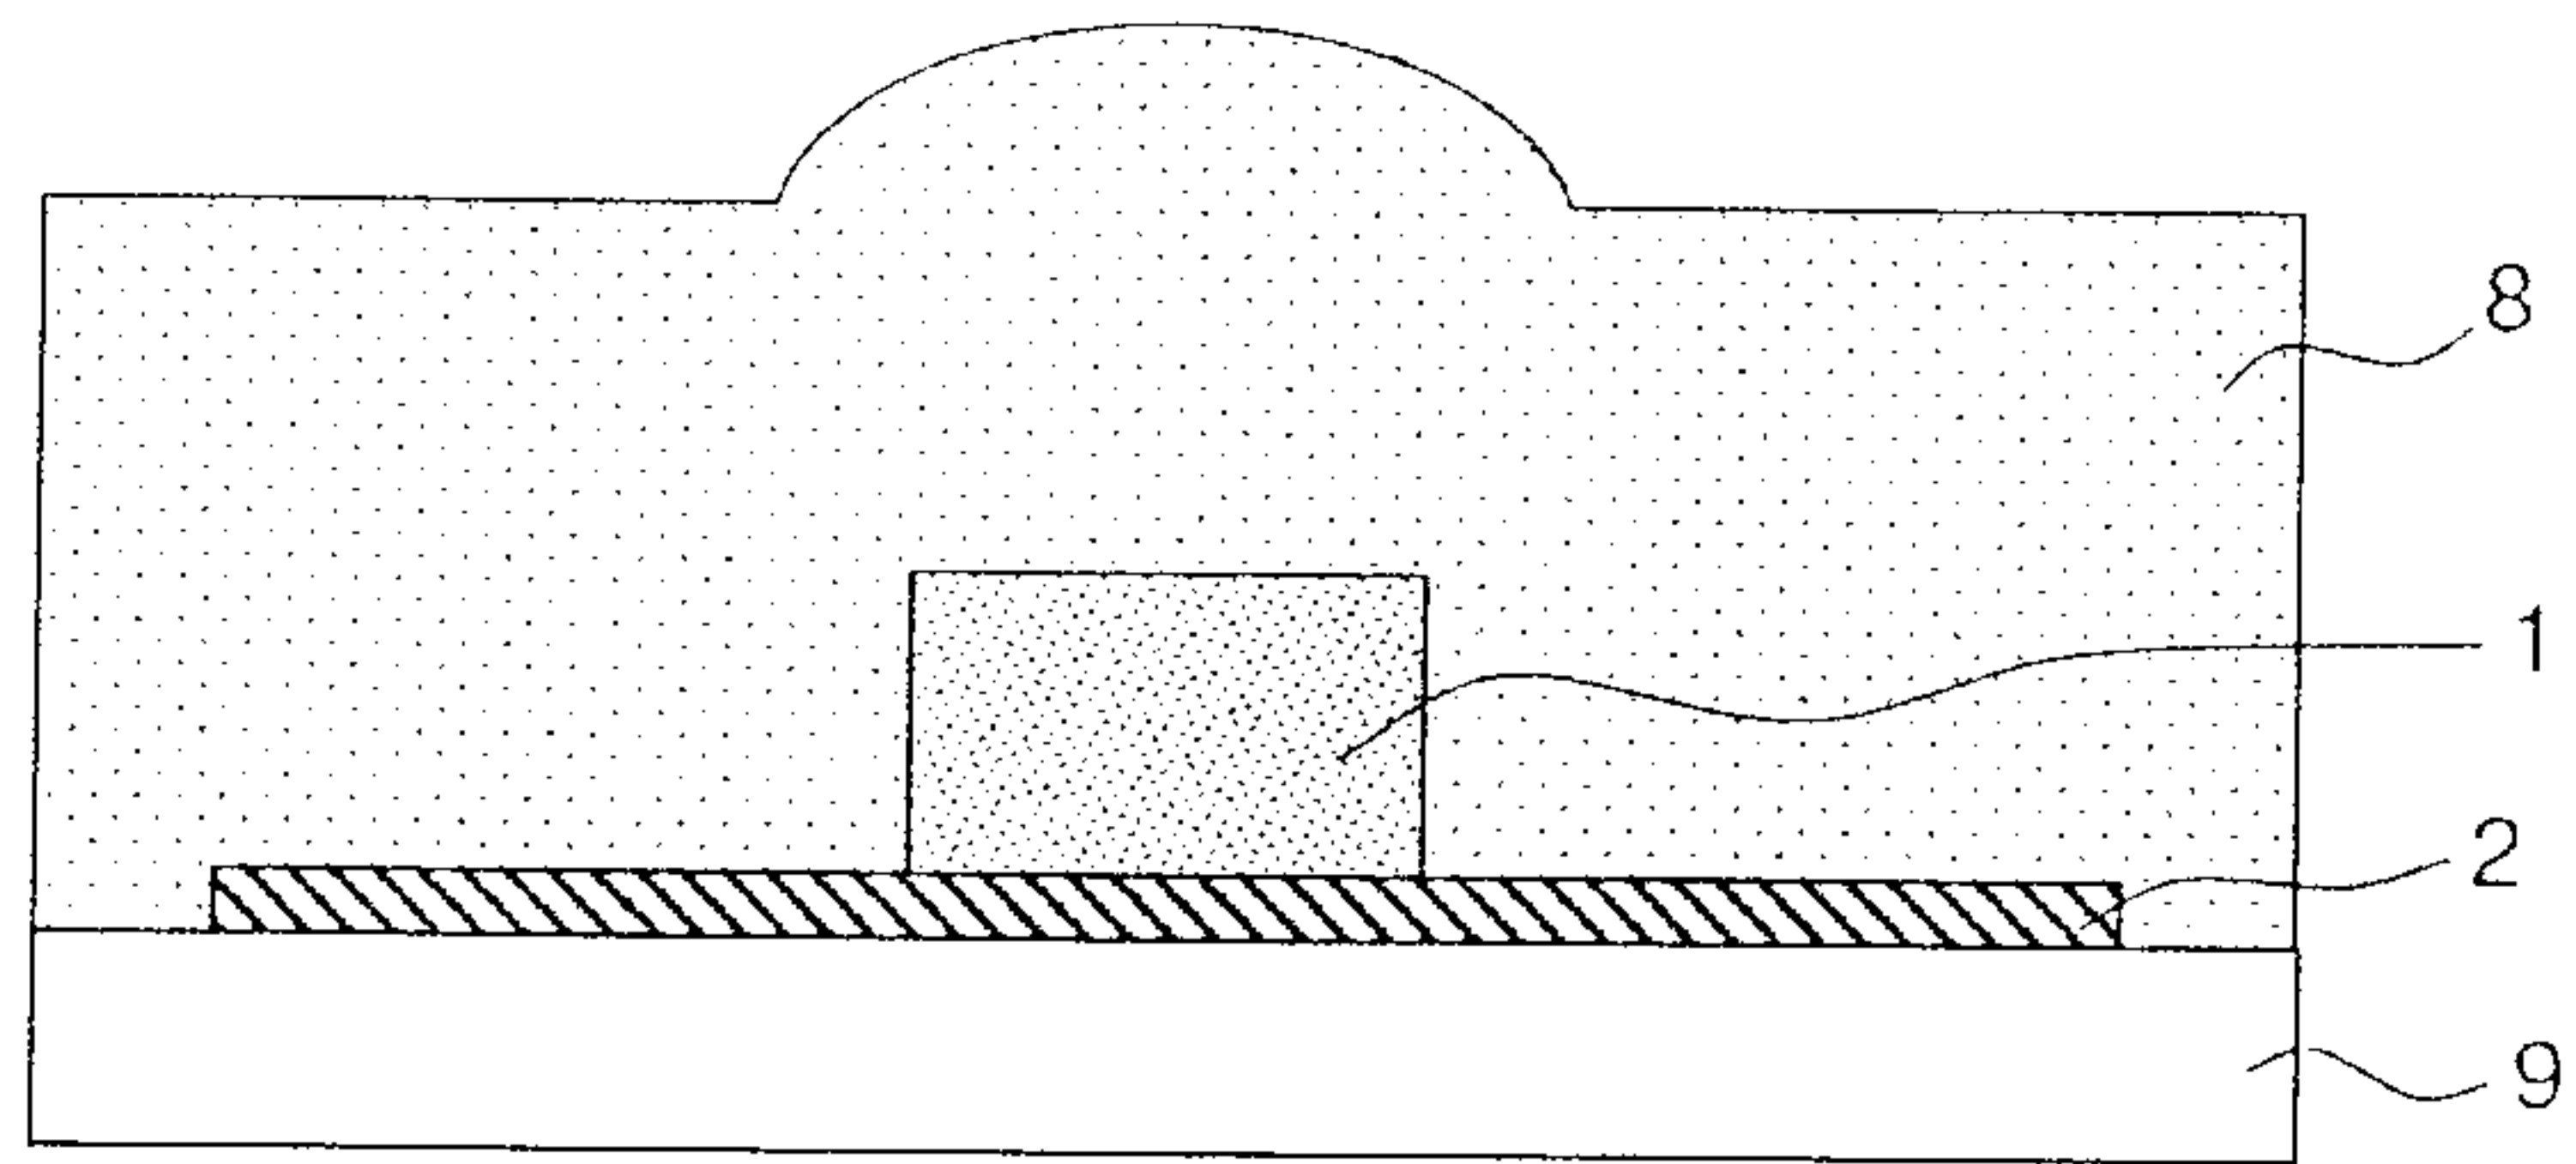


FIG. 14a

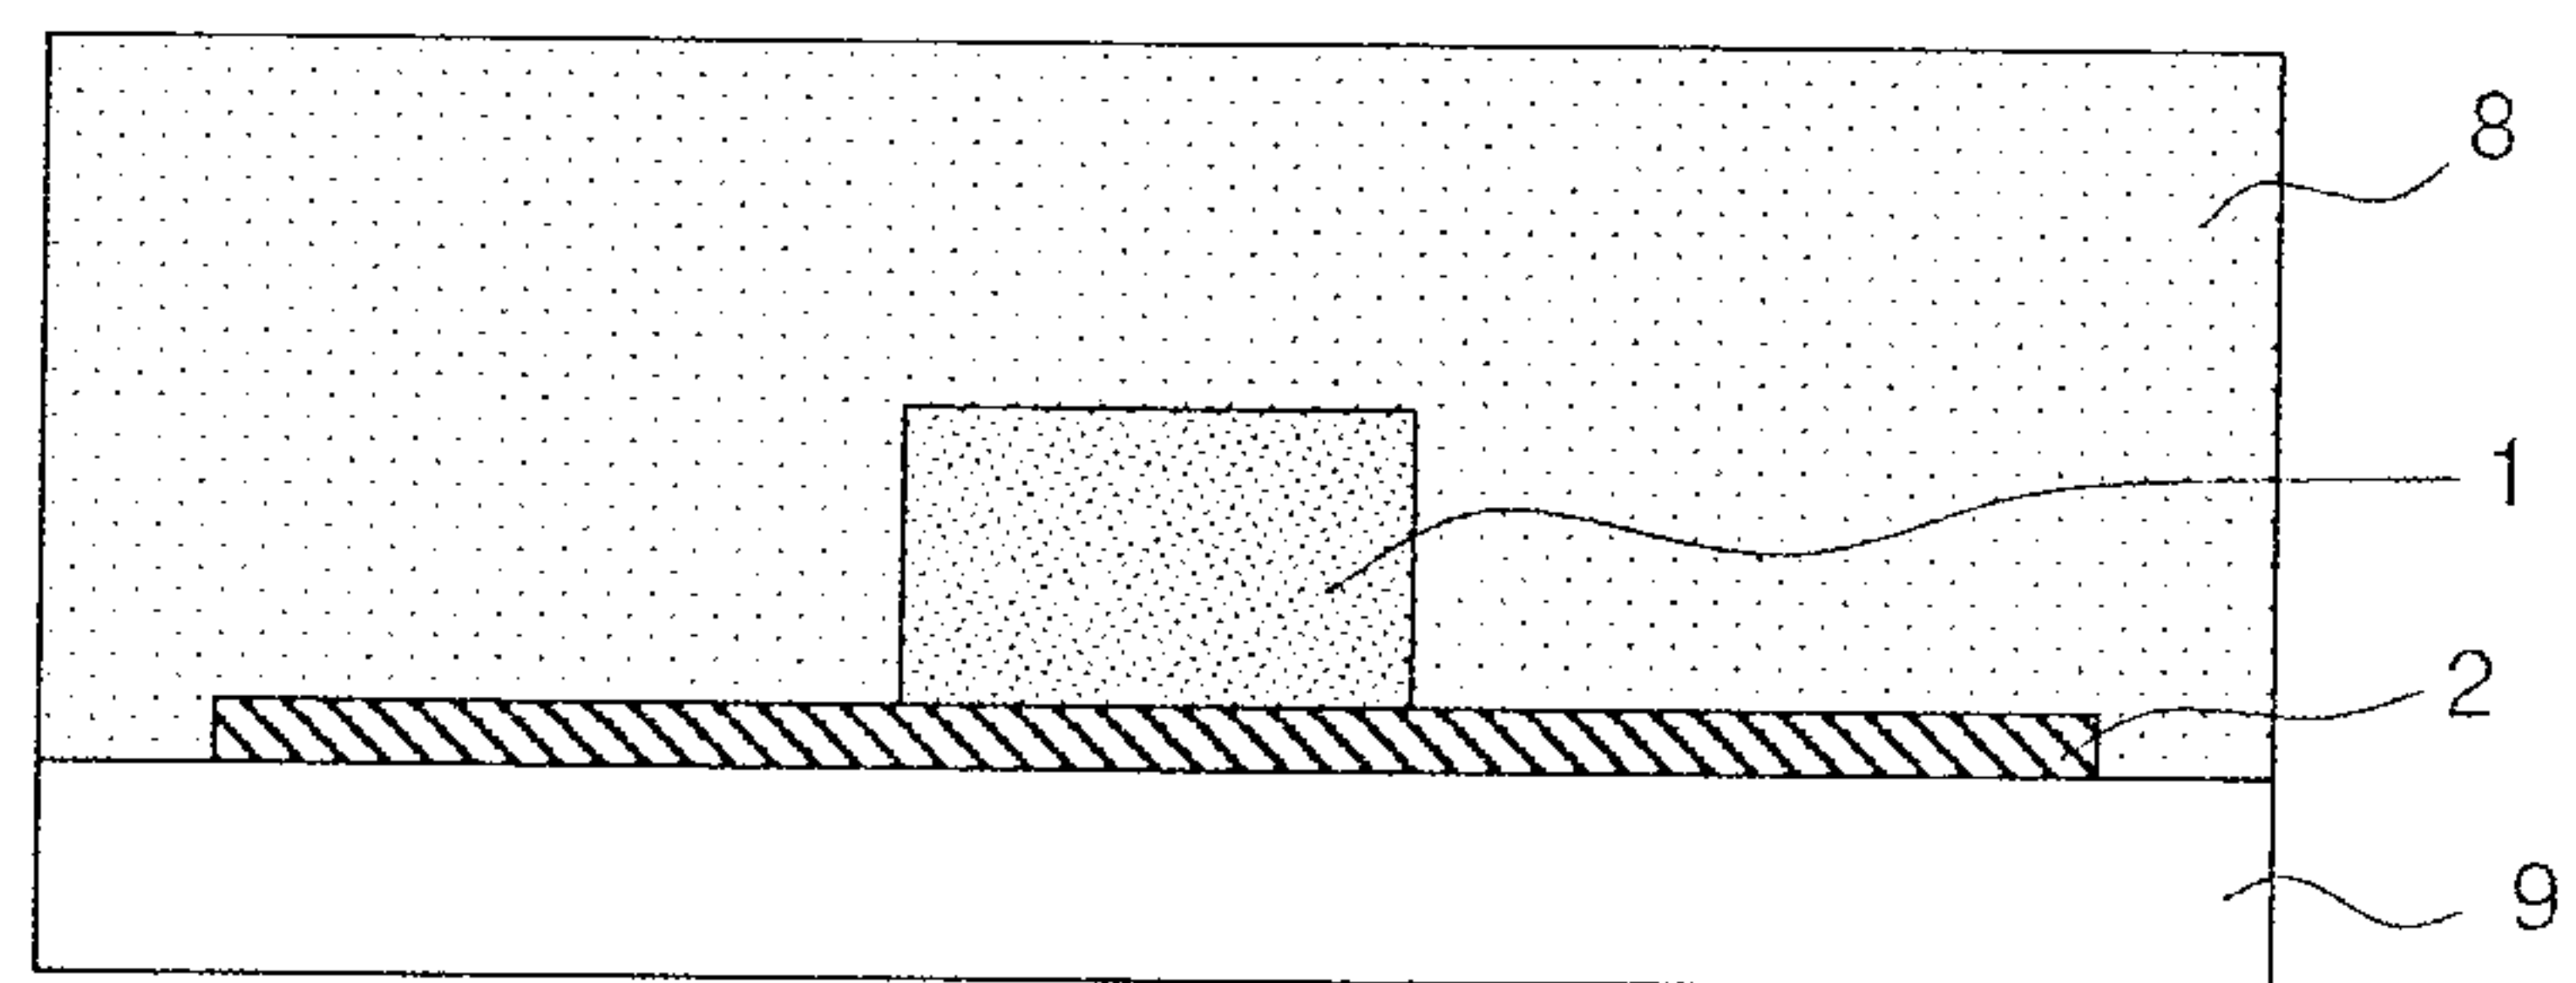


FIG. 14b

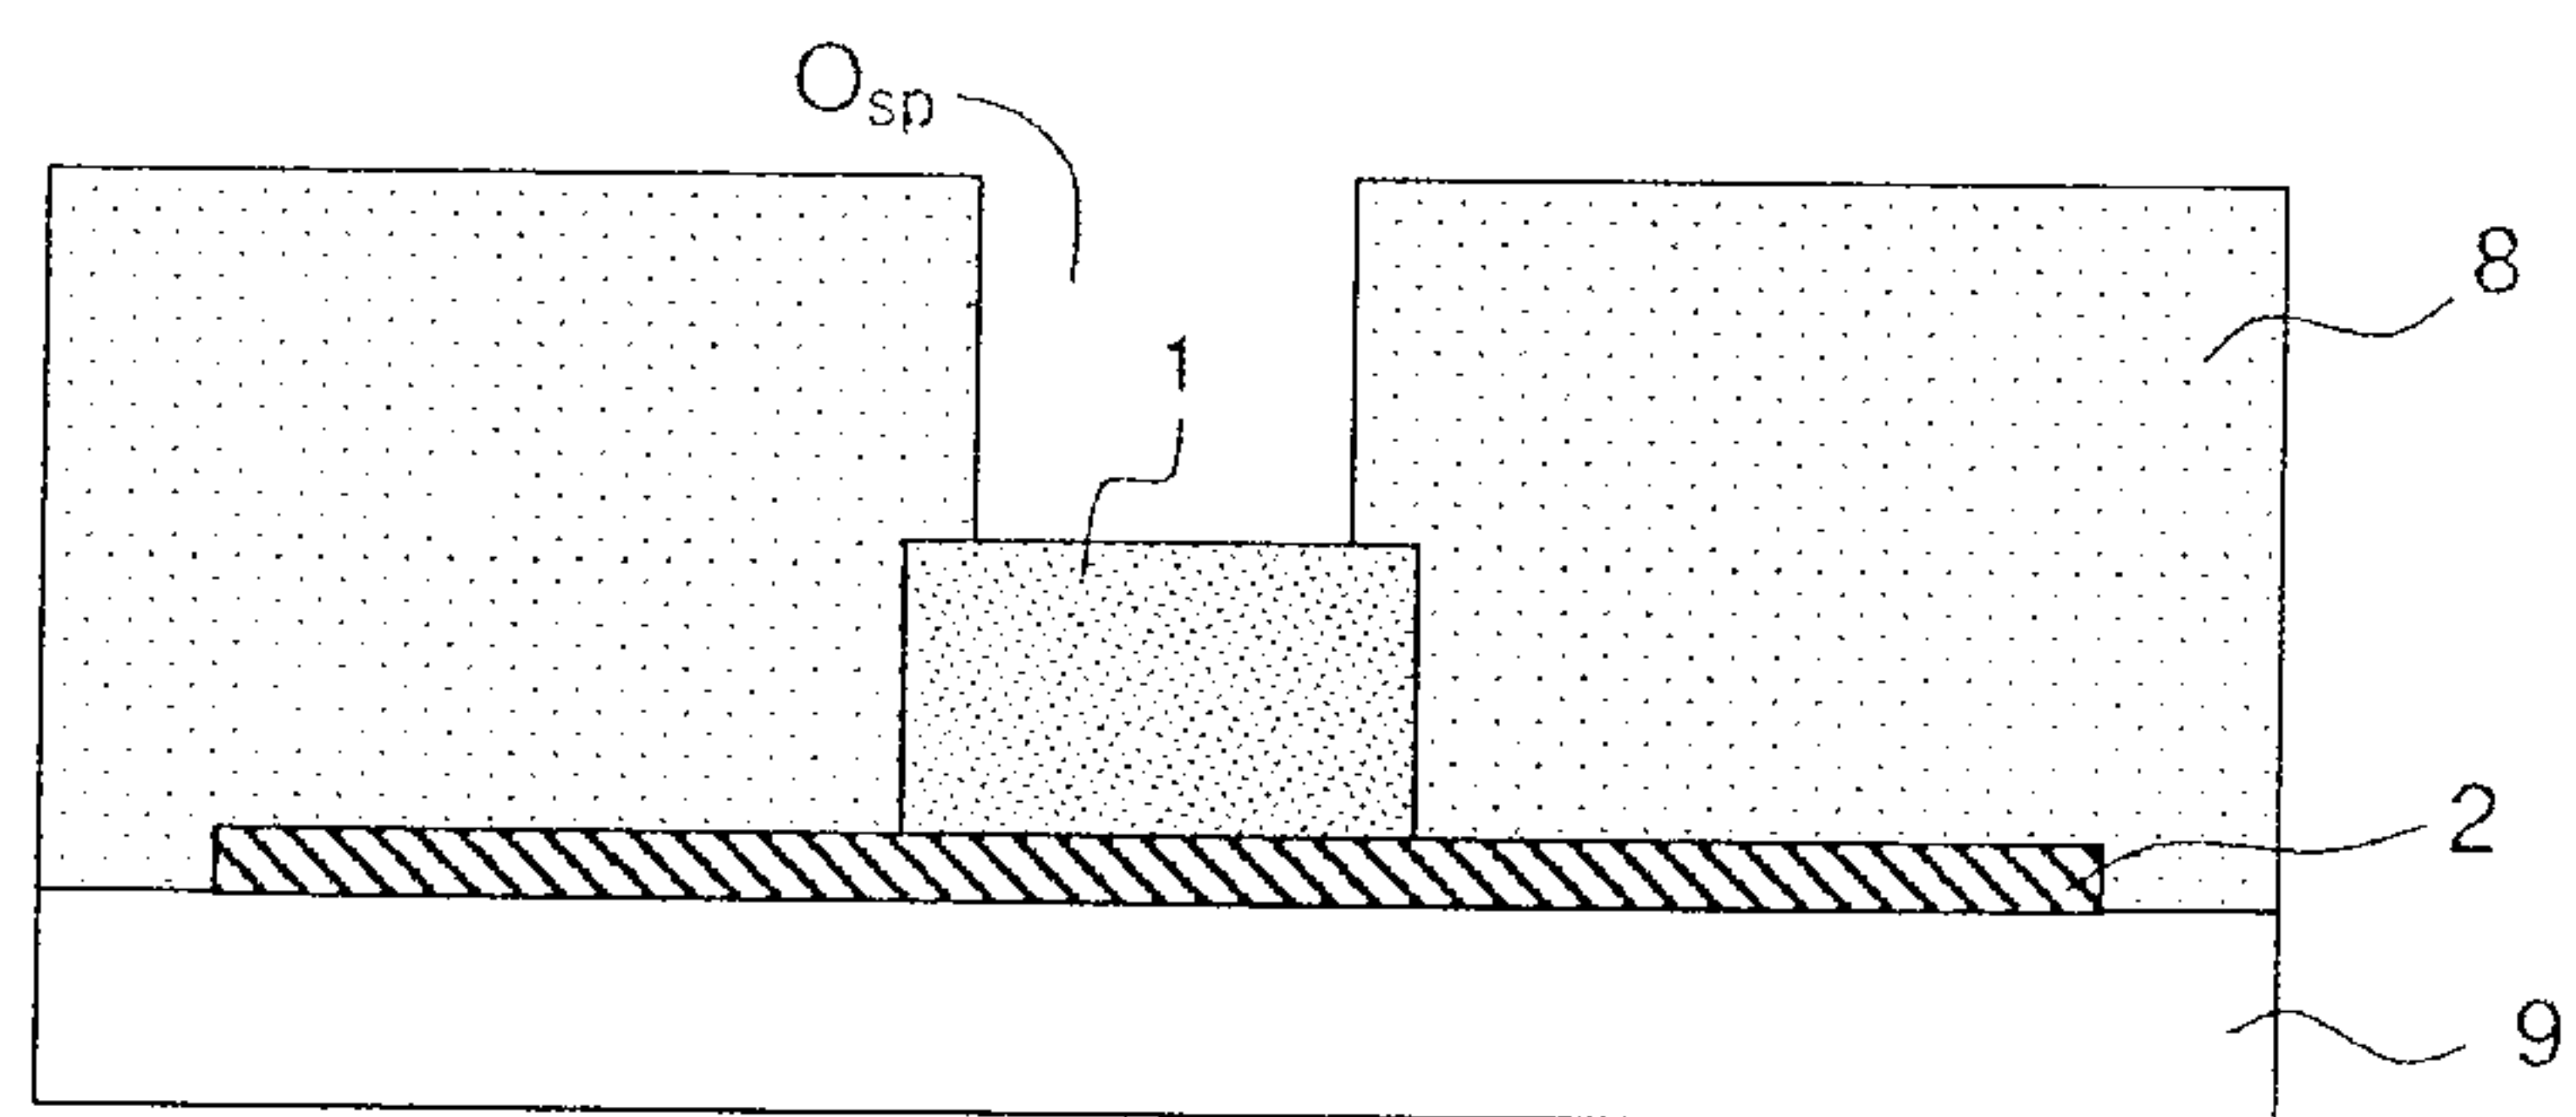


FIG. 14c

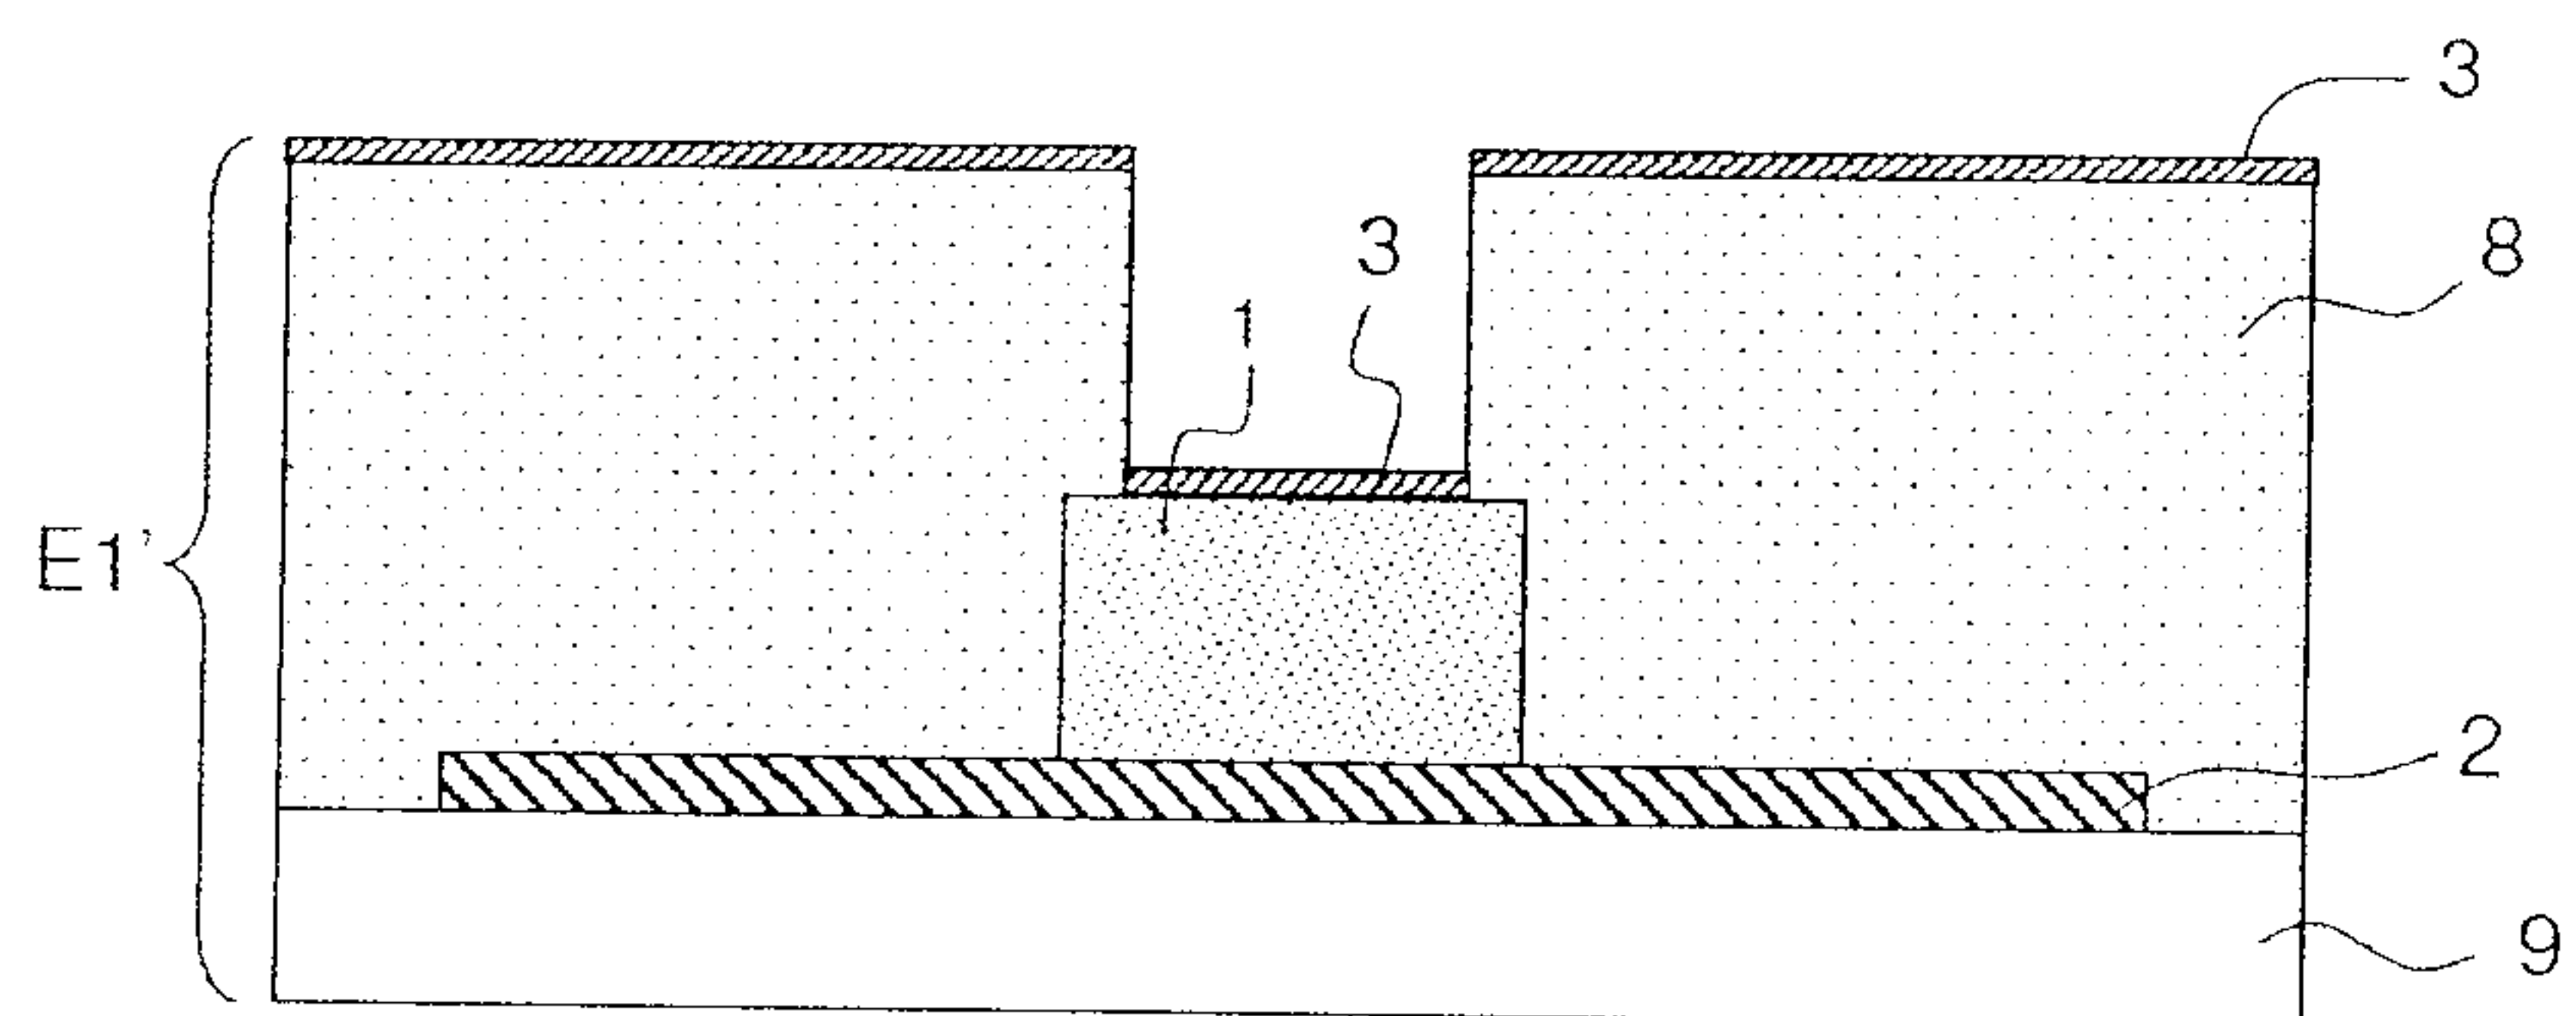


FIG. 14d

20/29

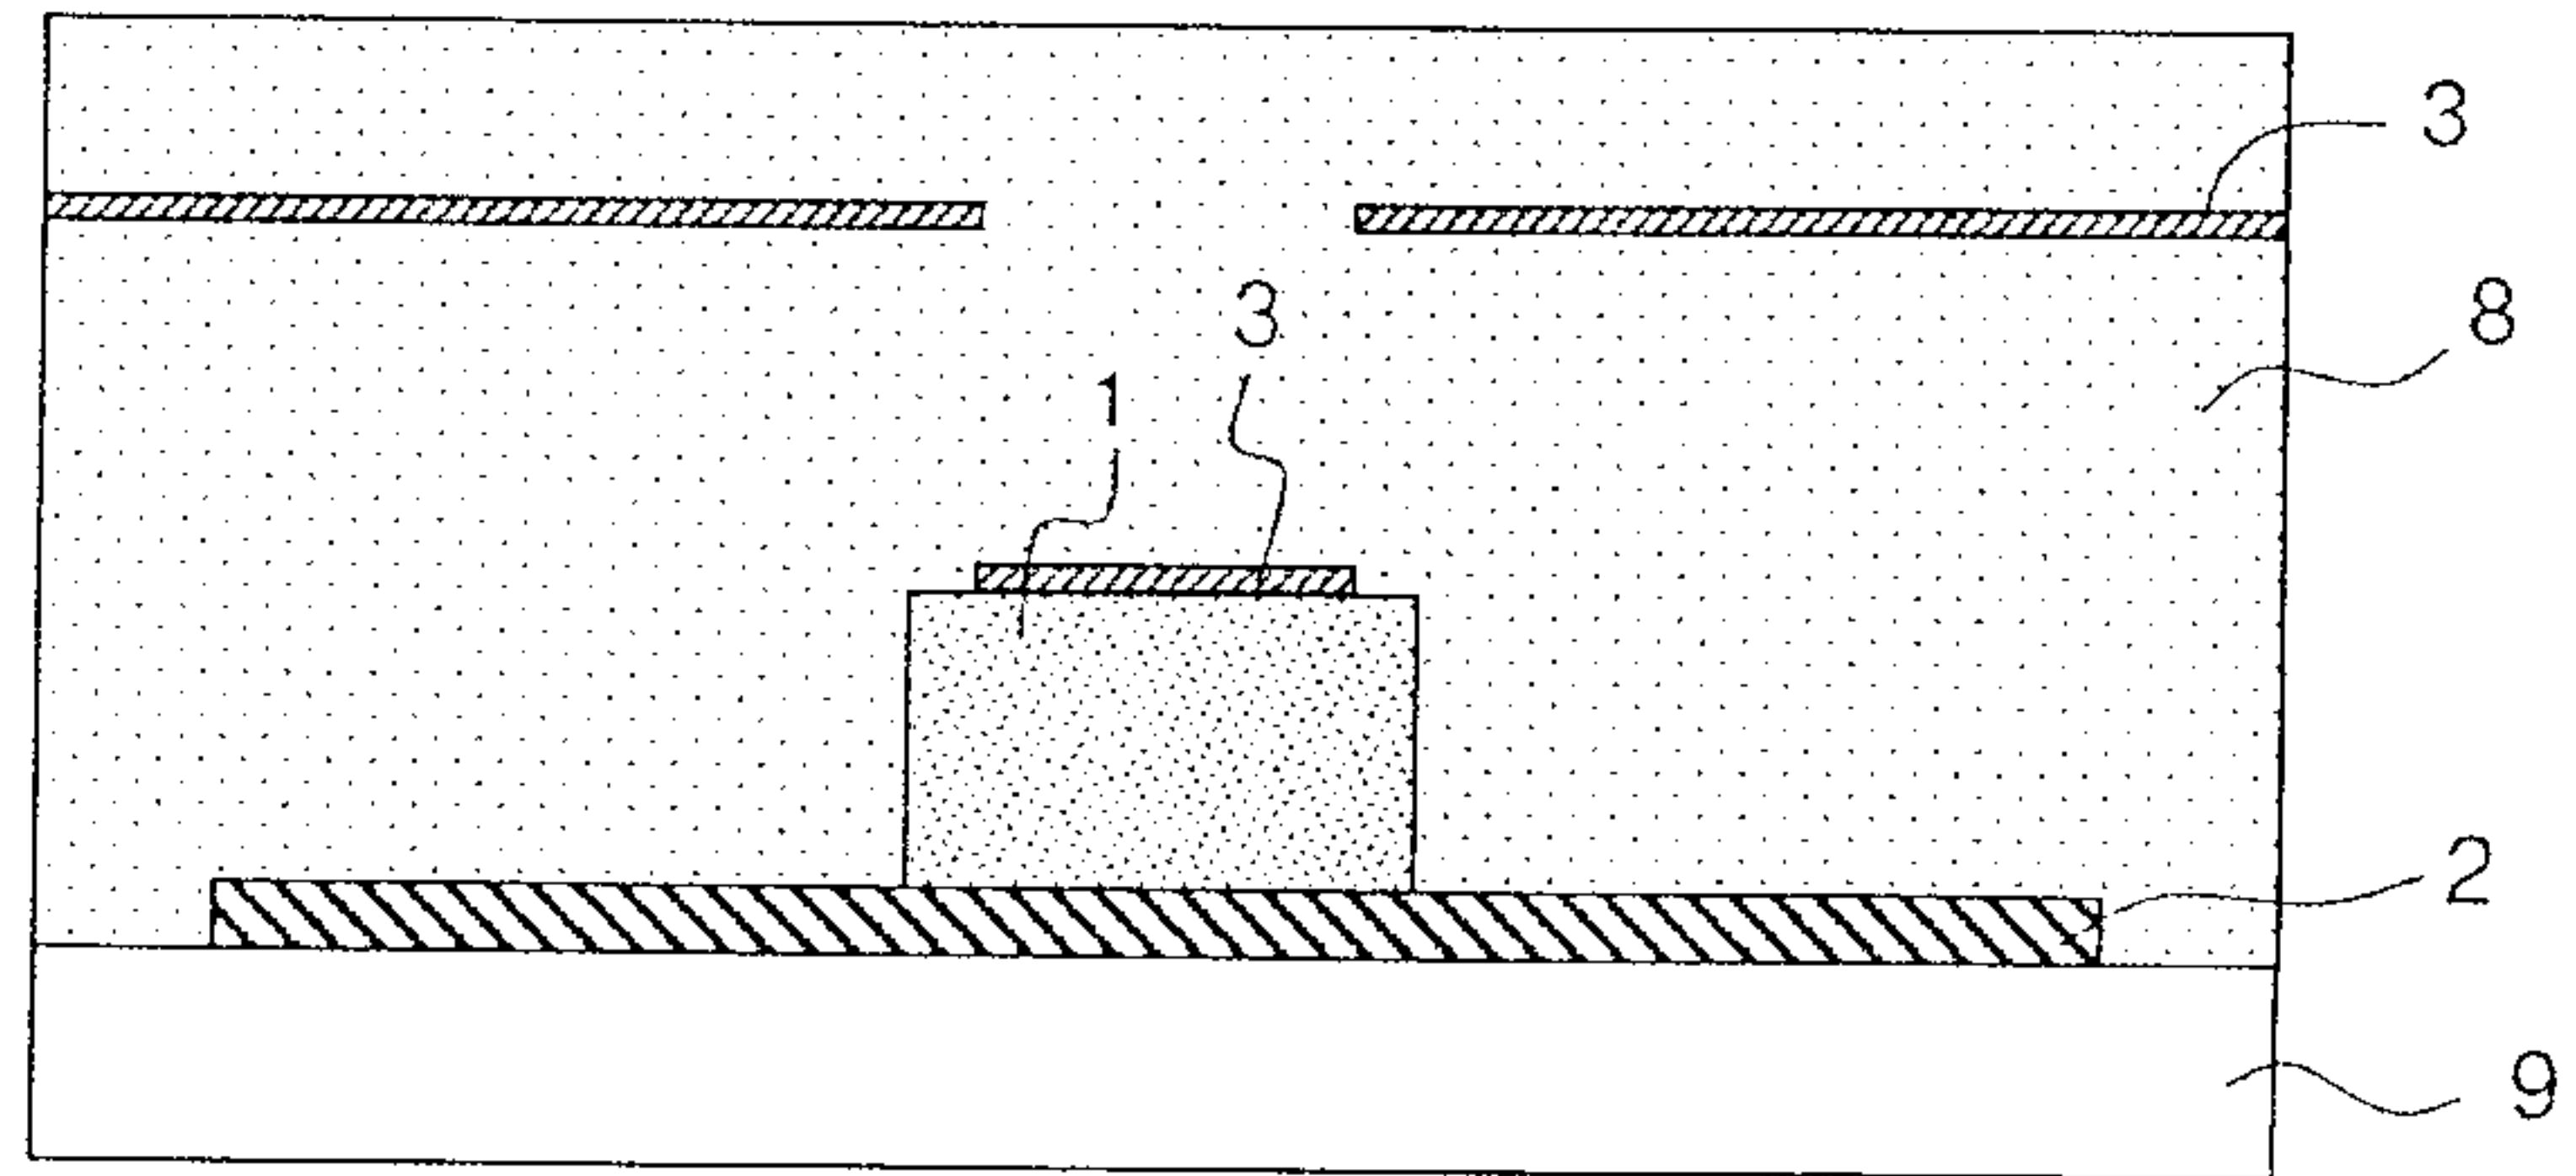


FIG. 14e

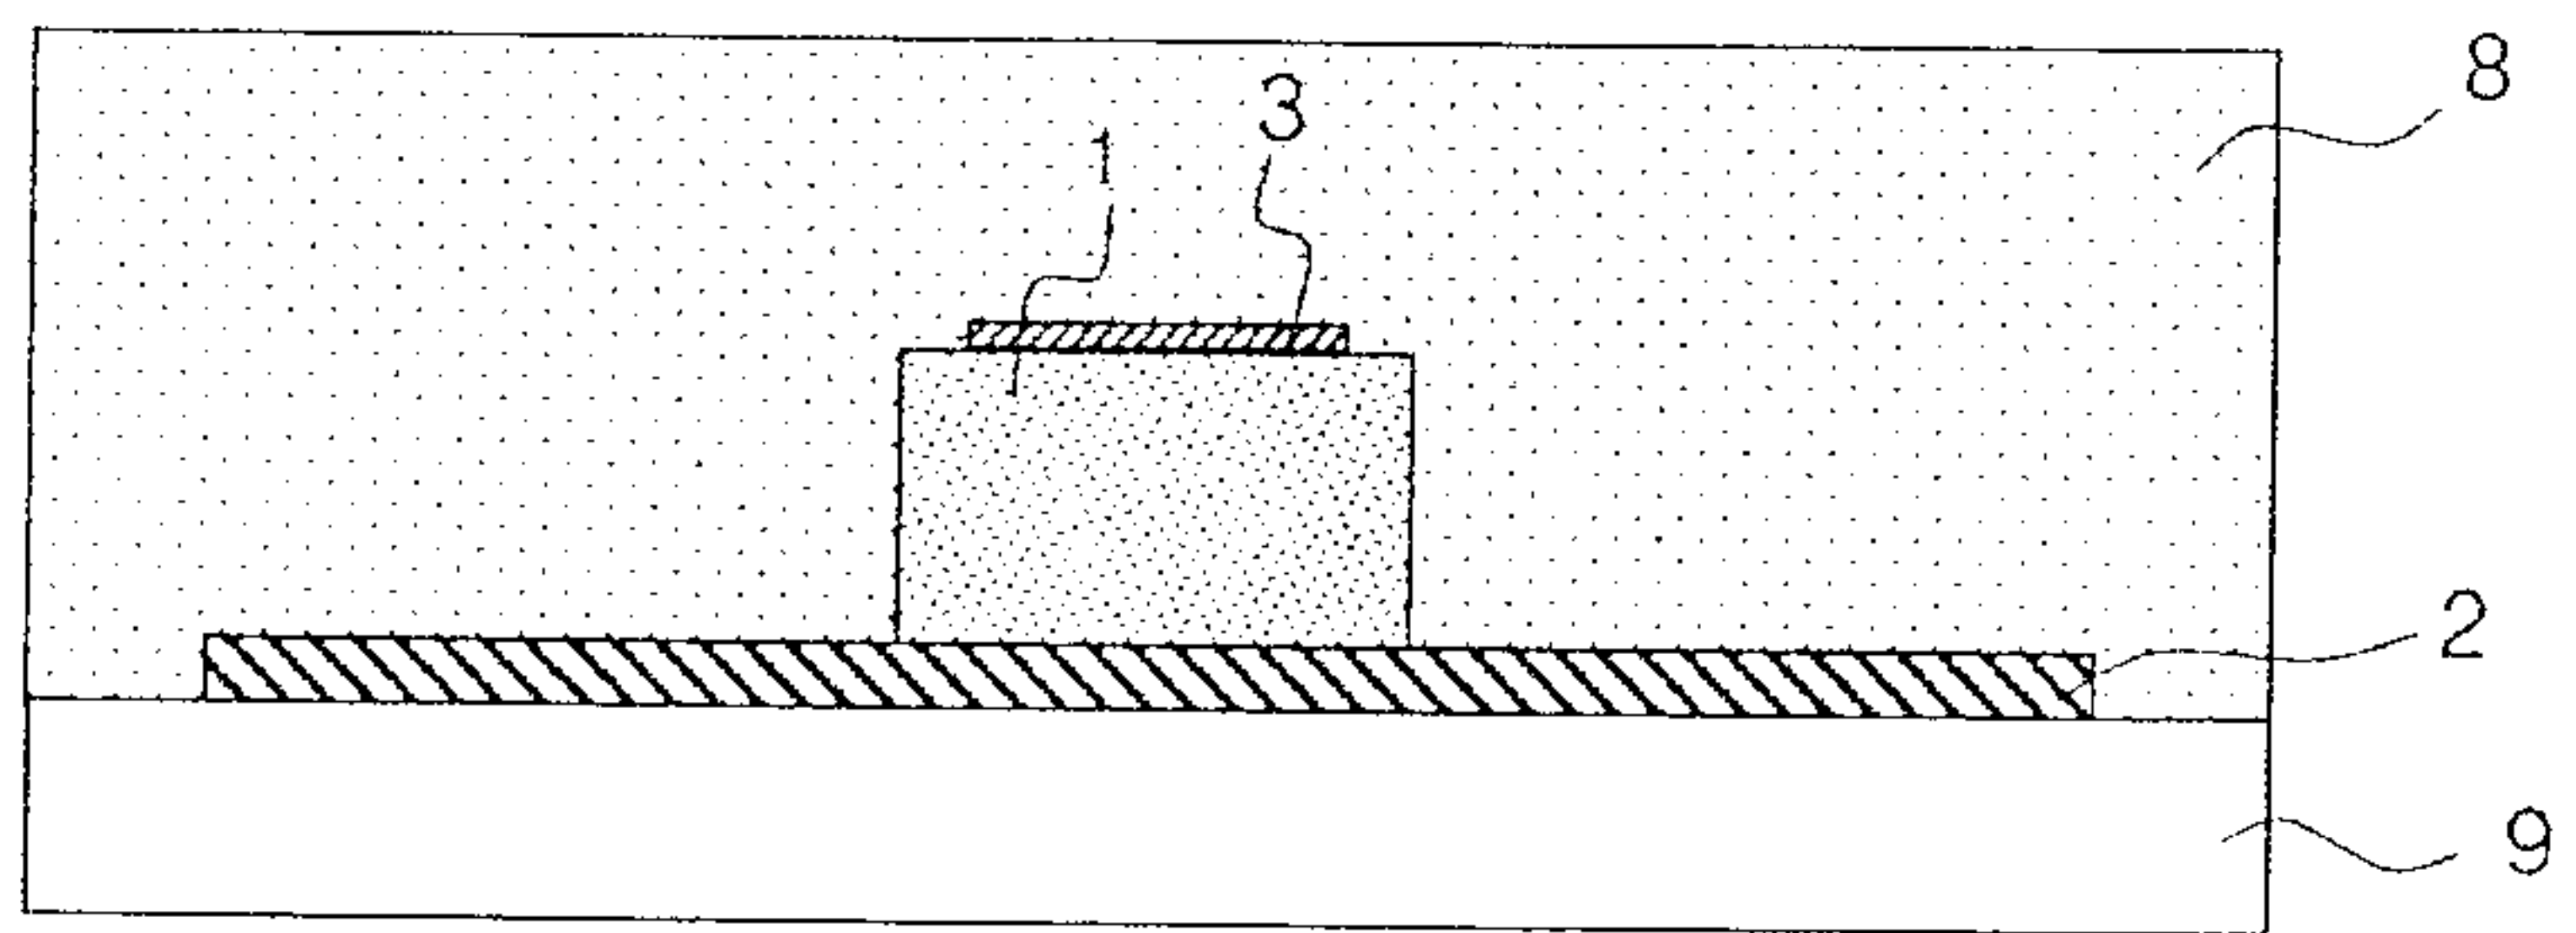


FIG. 14f

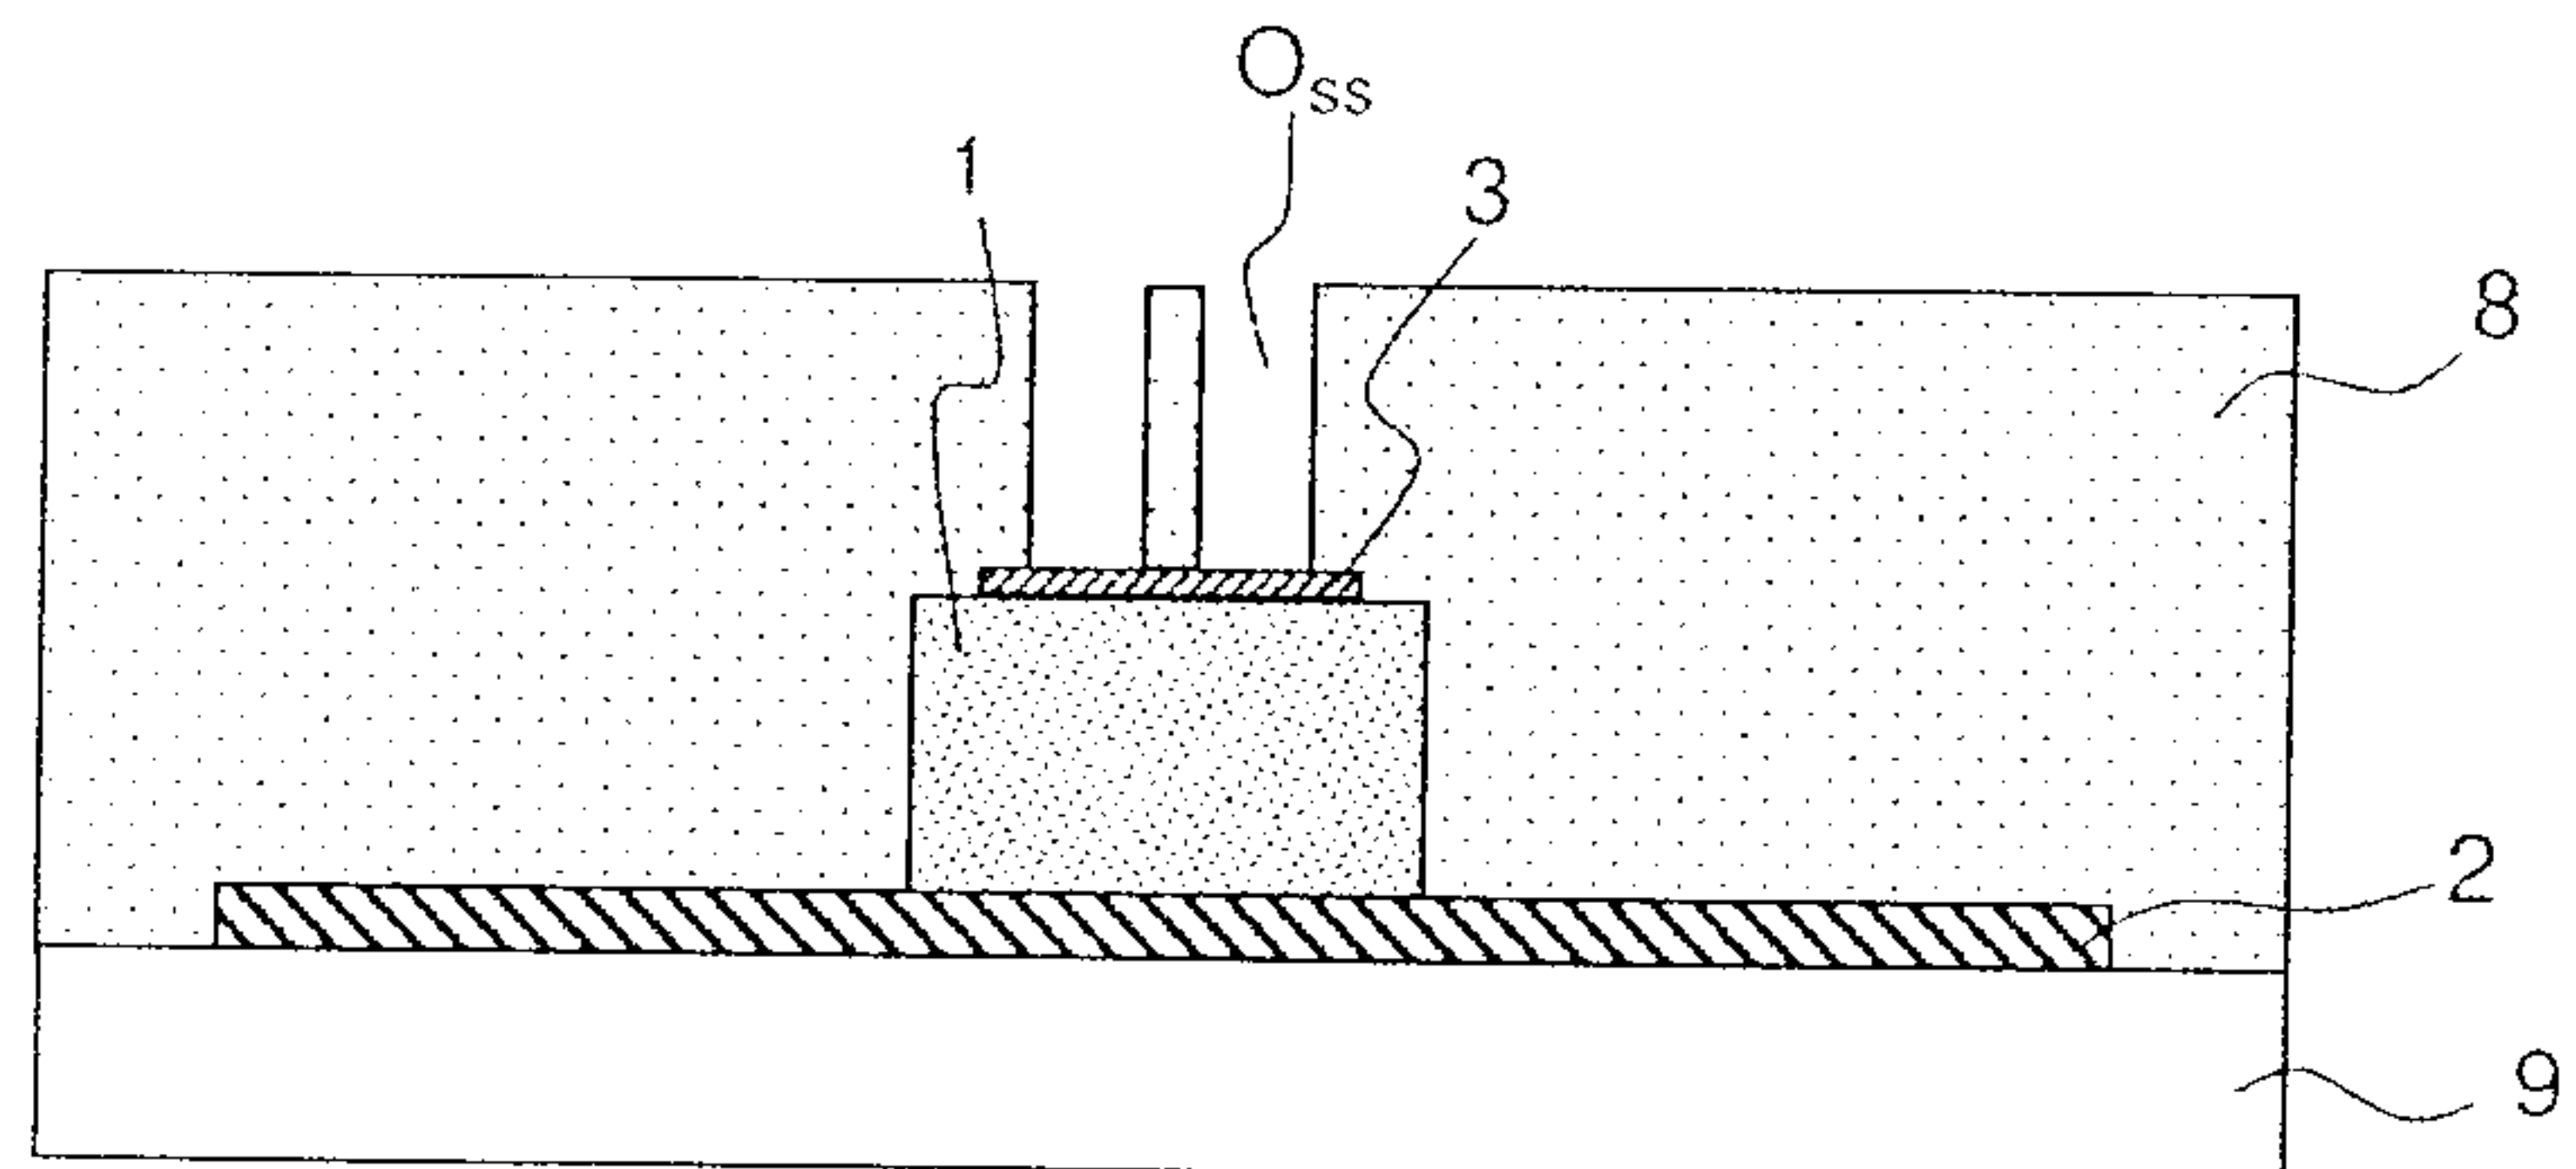


FIG. 14g

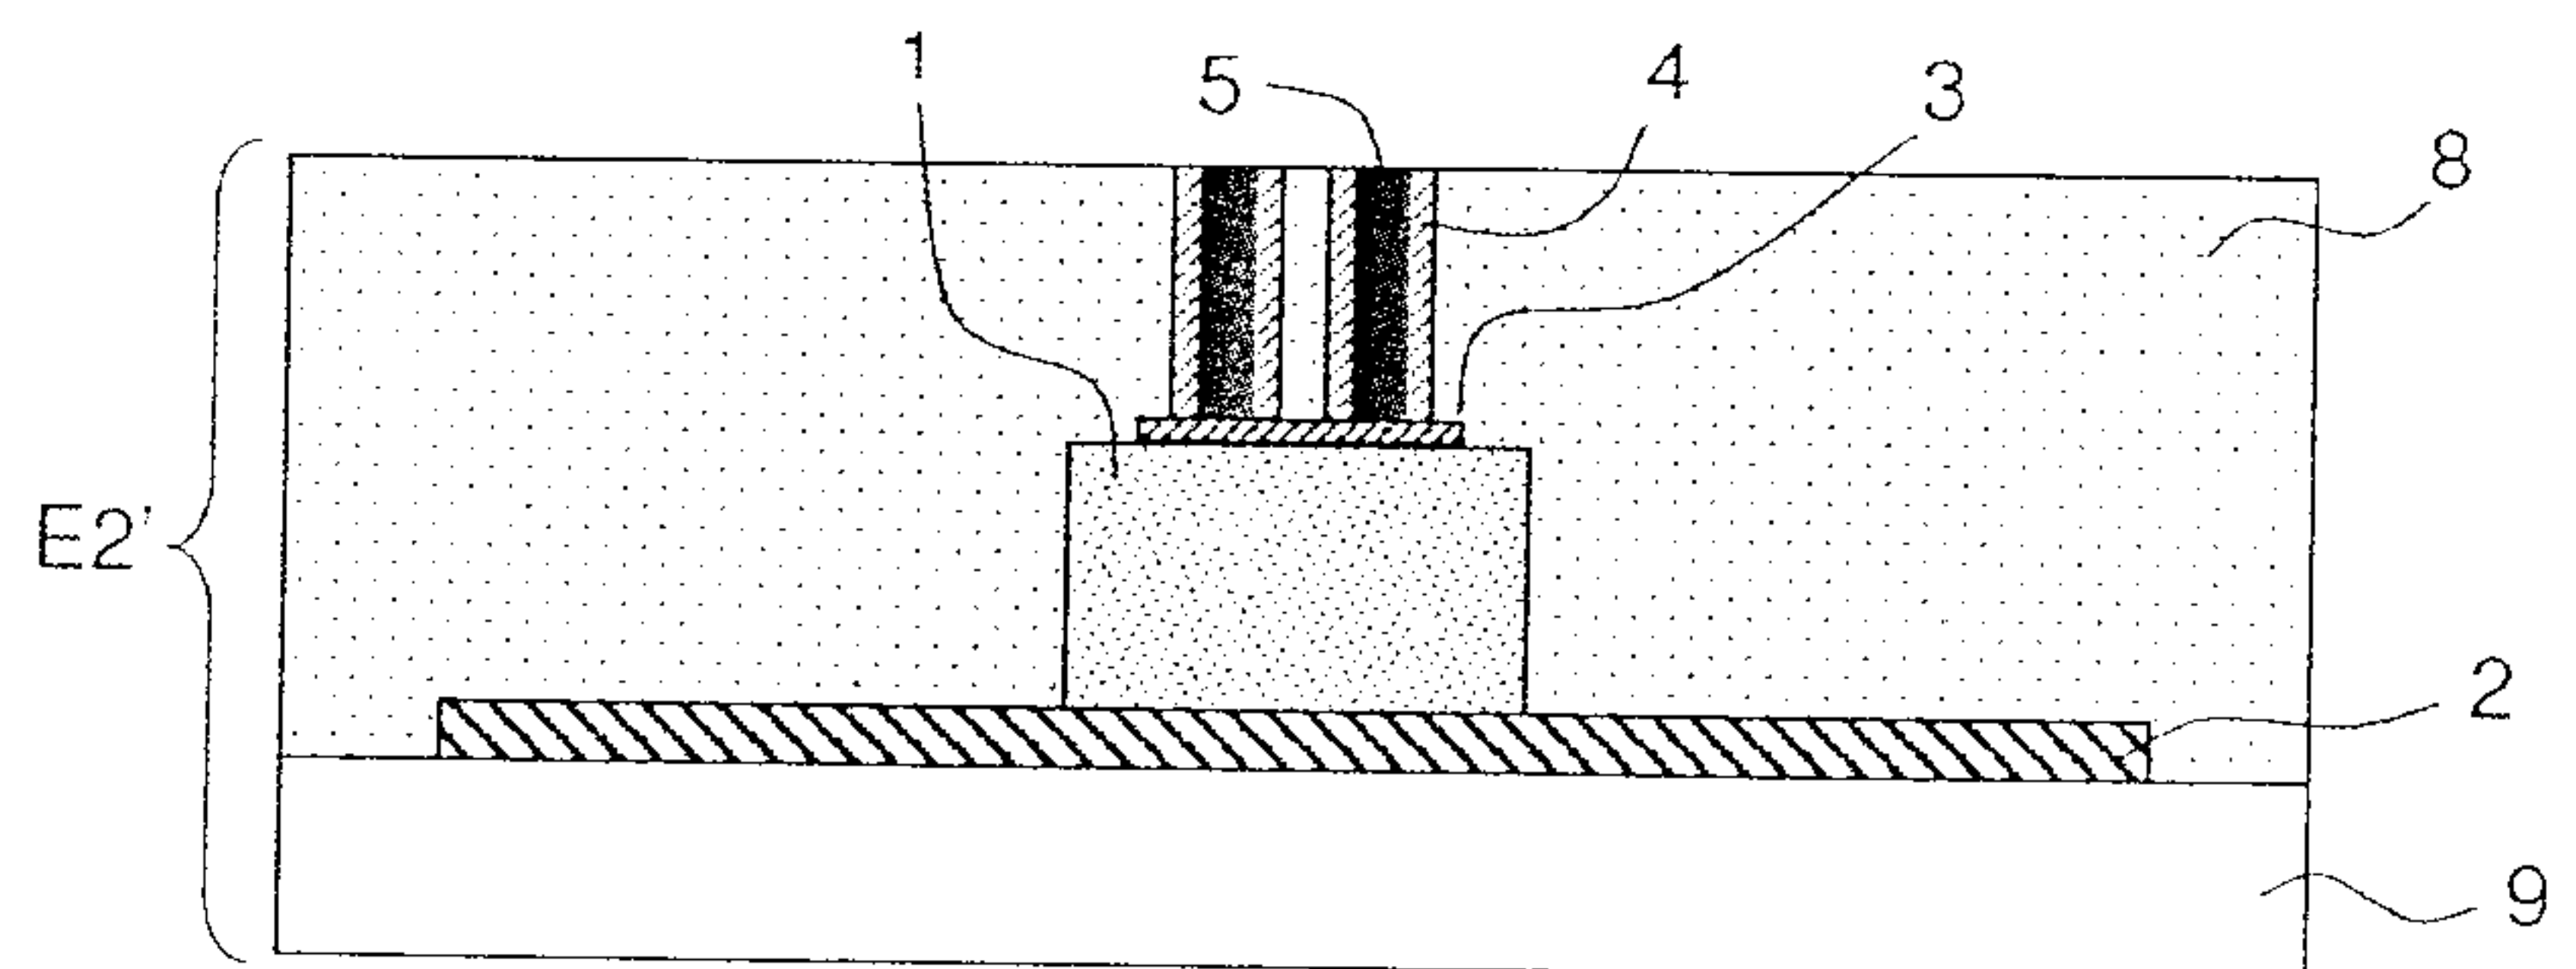


FIG. 14h

21/29

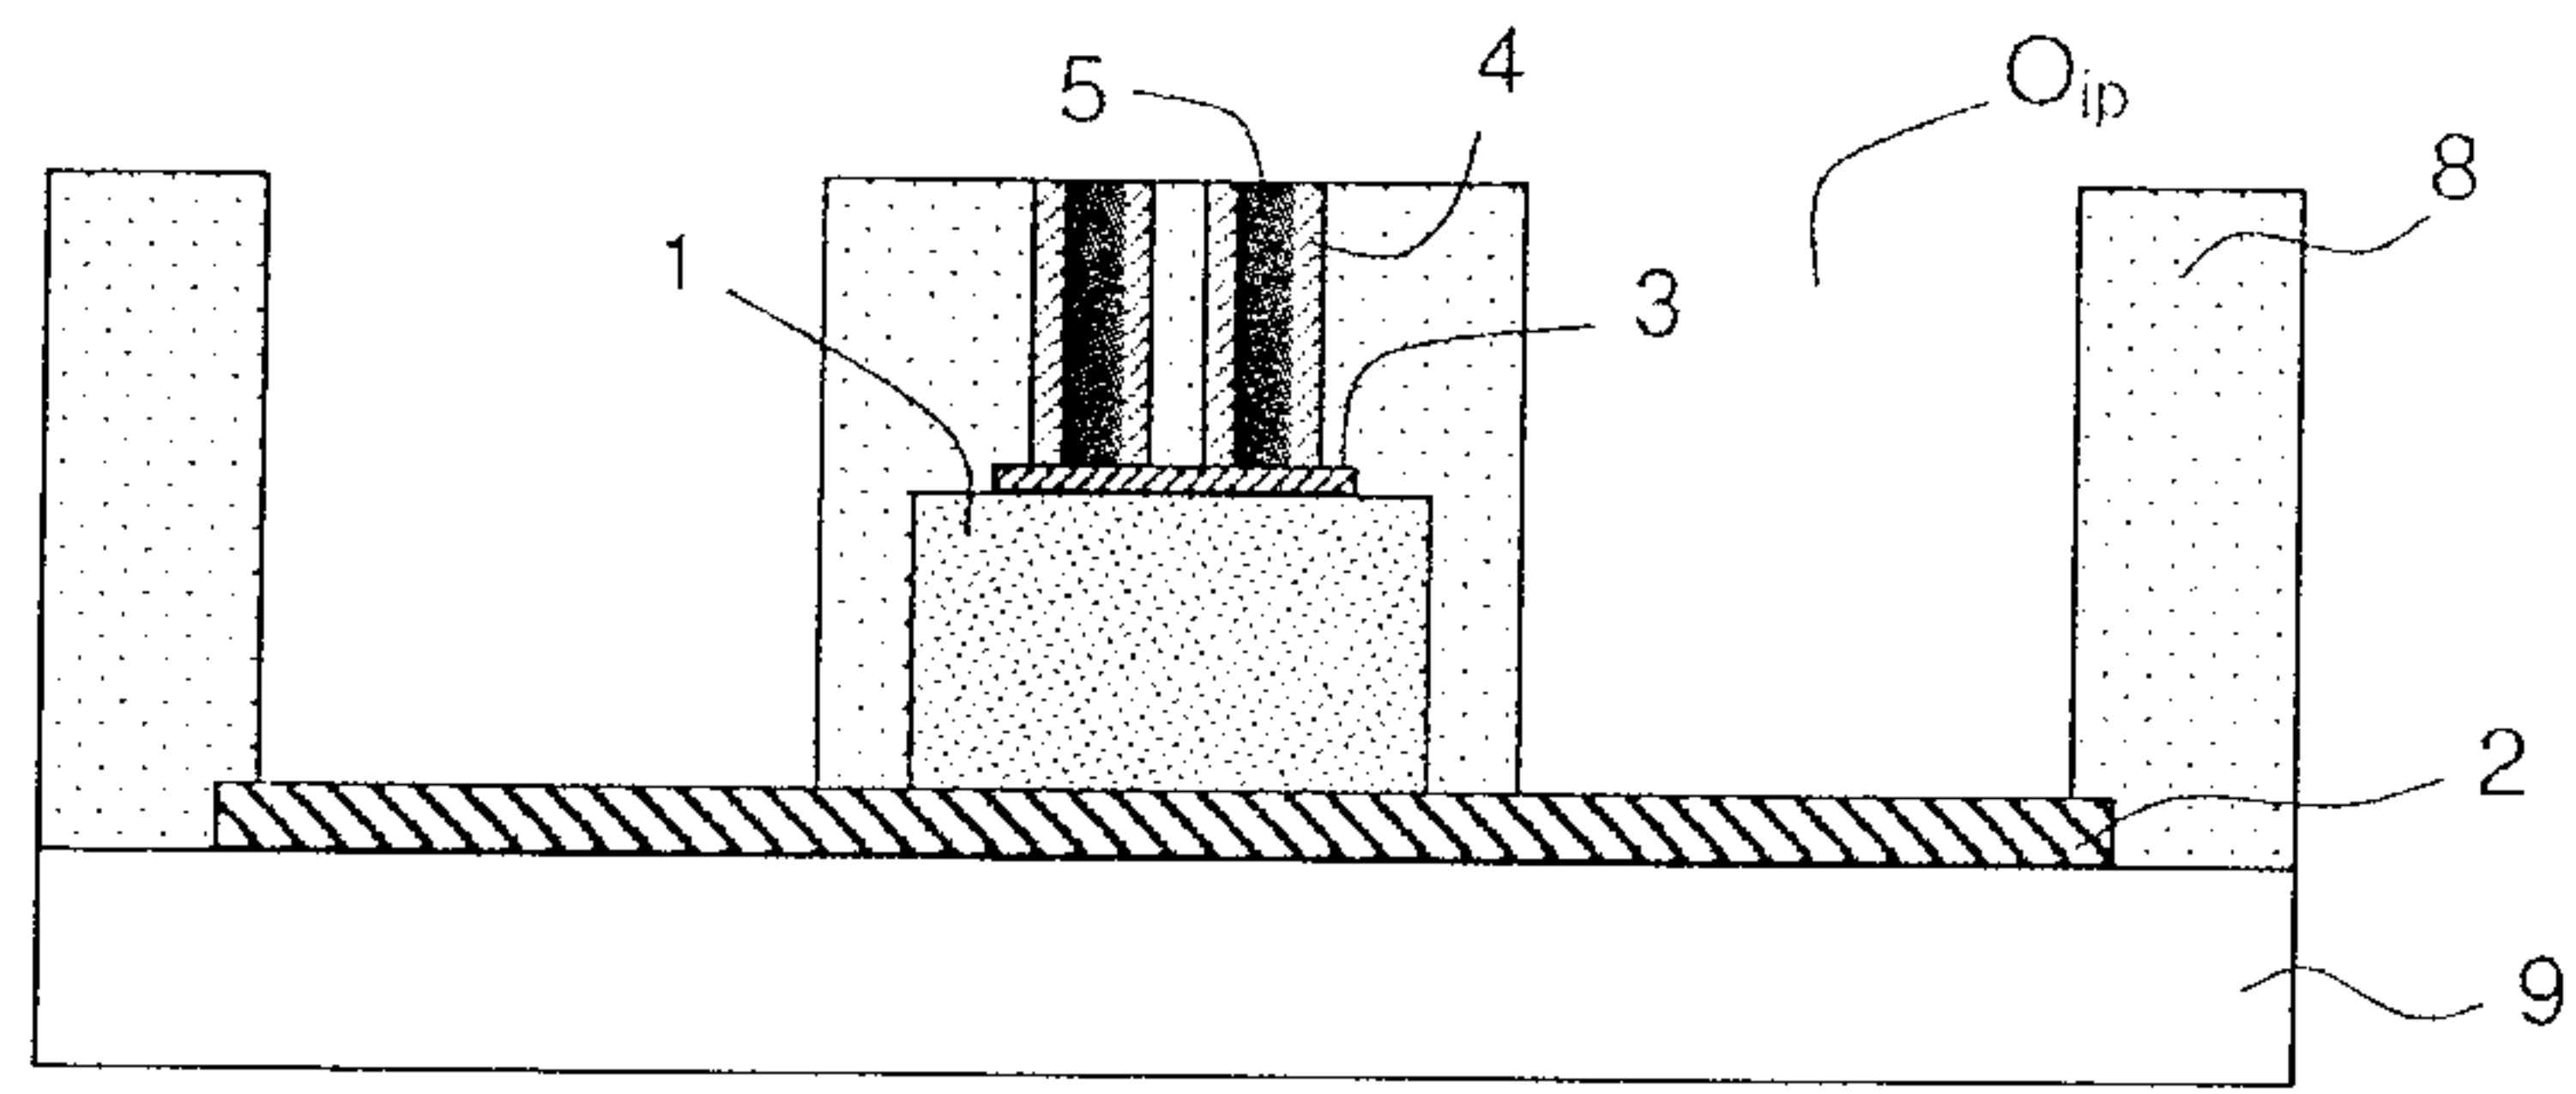


FIG. 14i

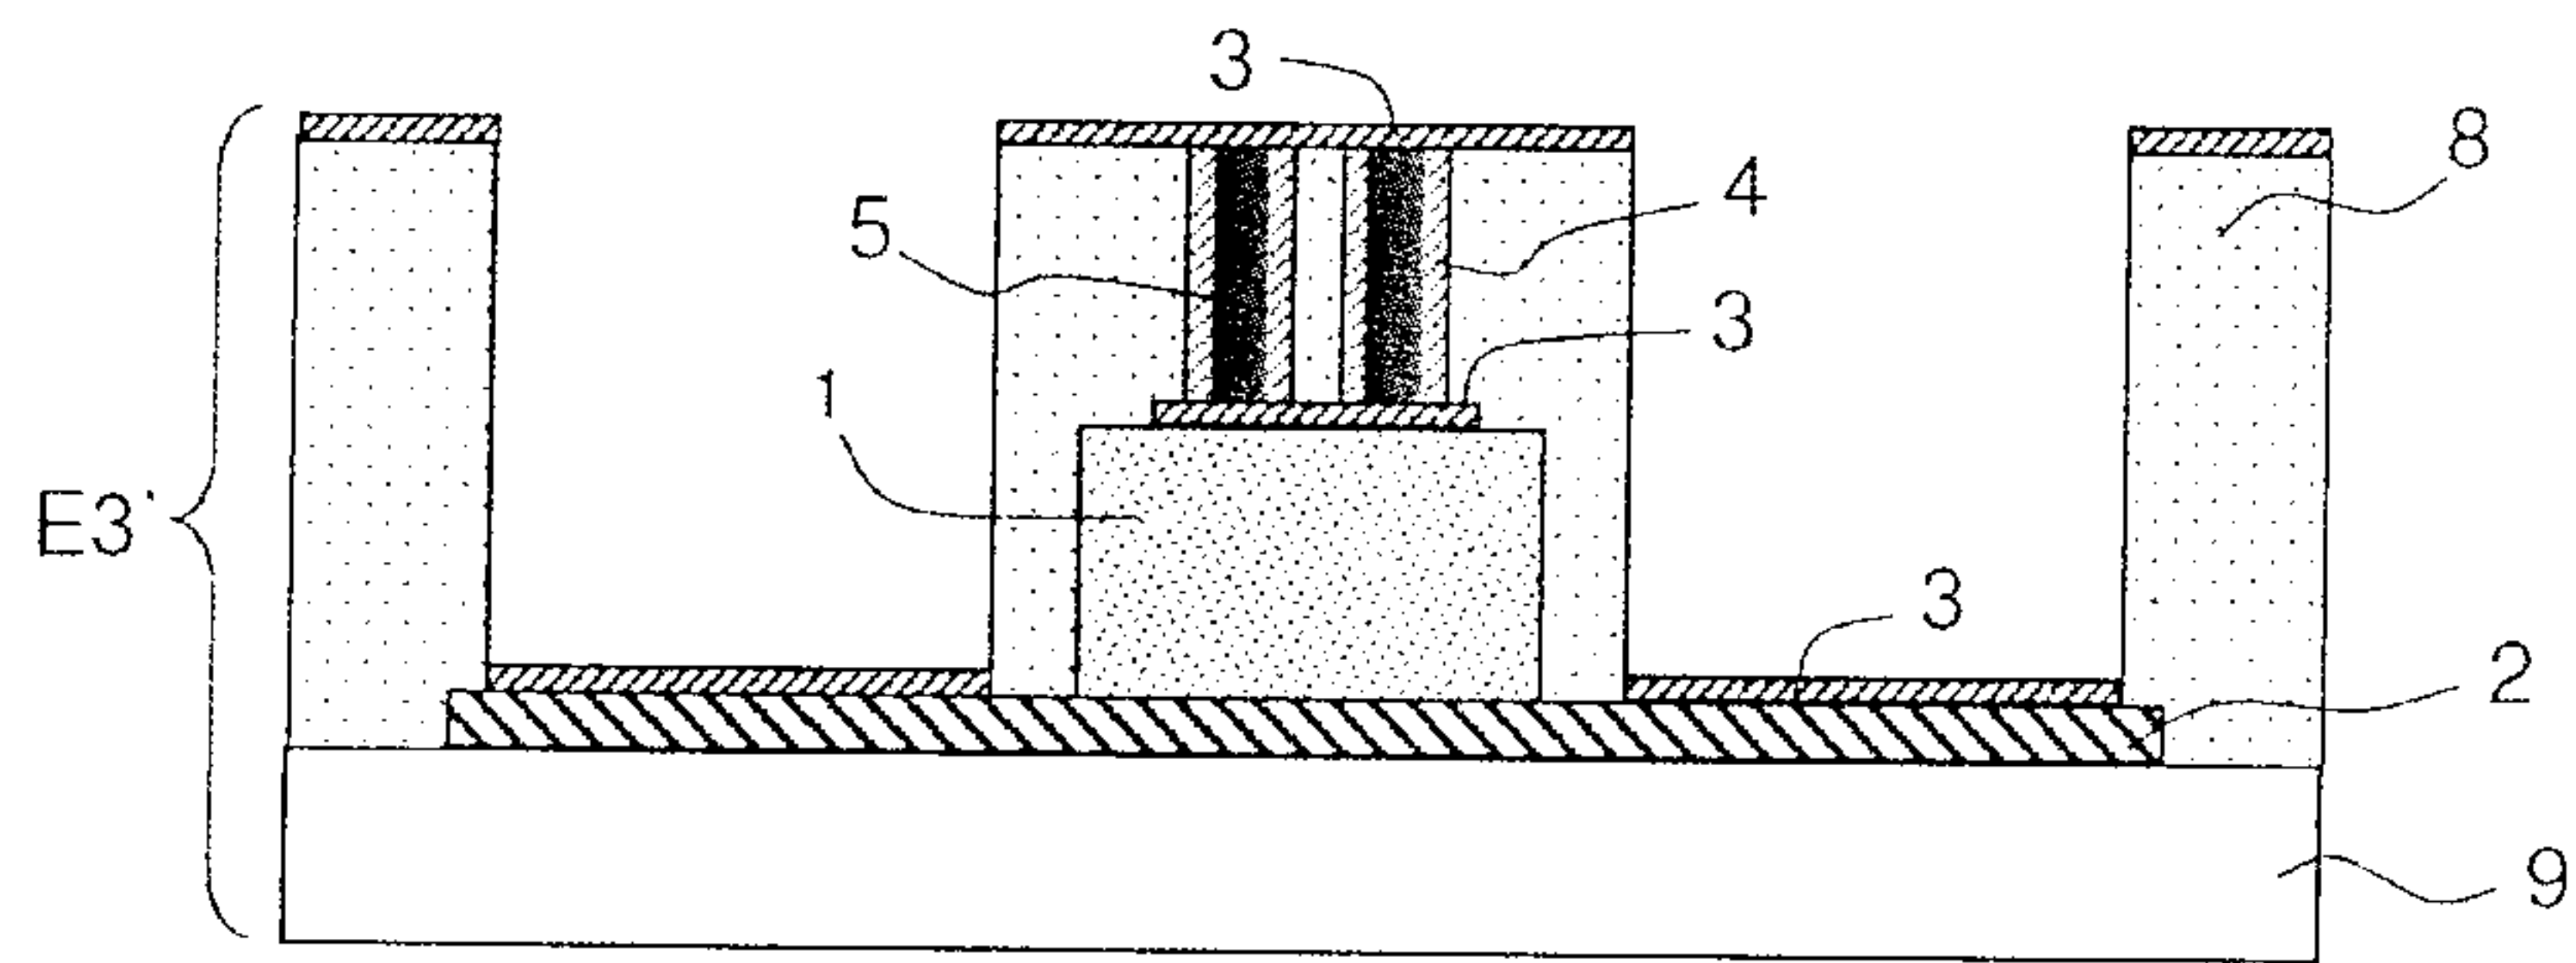


FIG. 14j

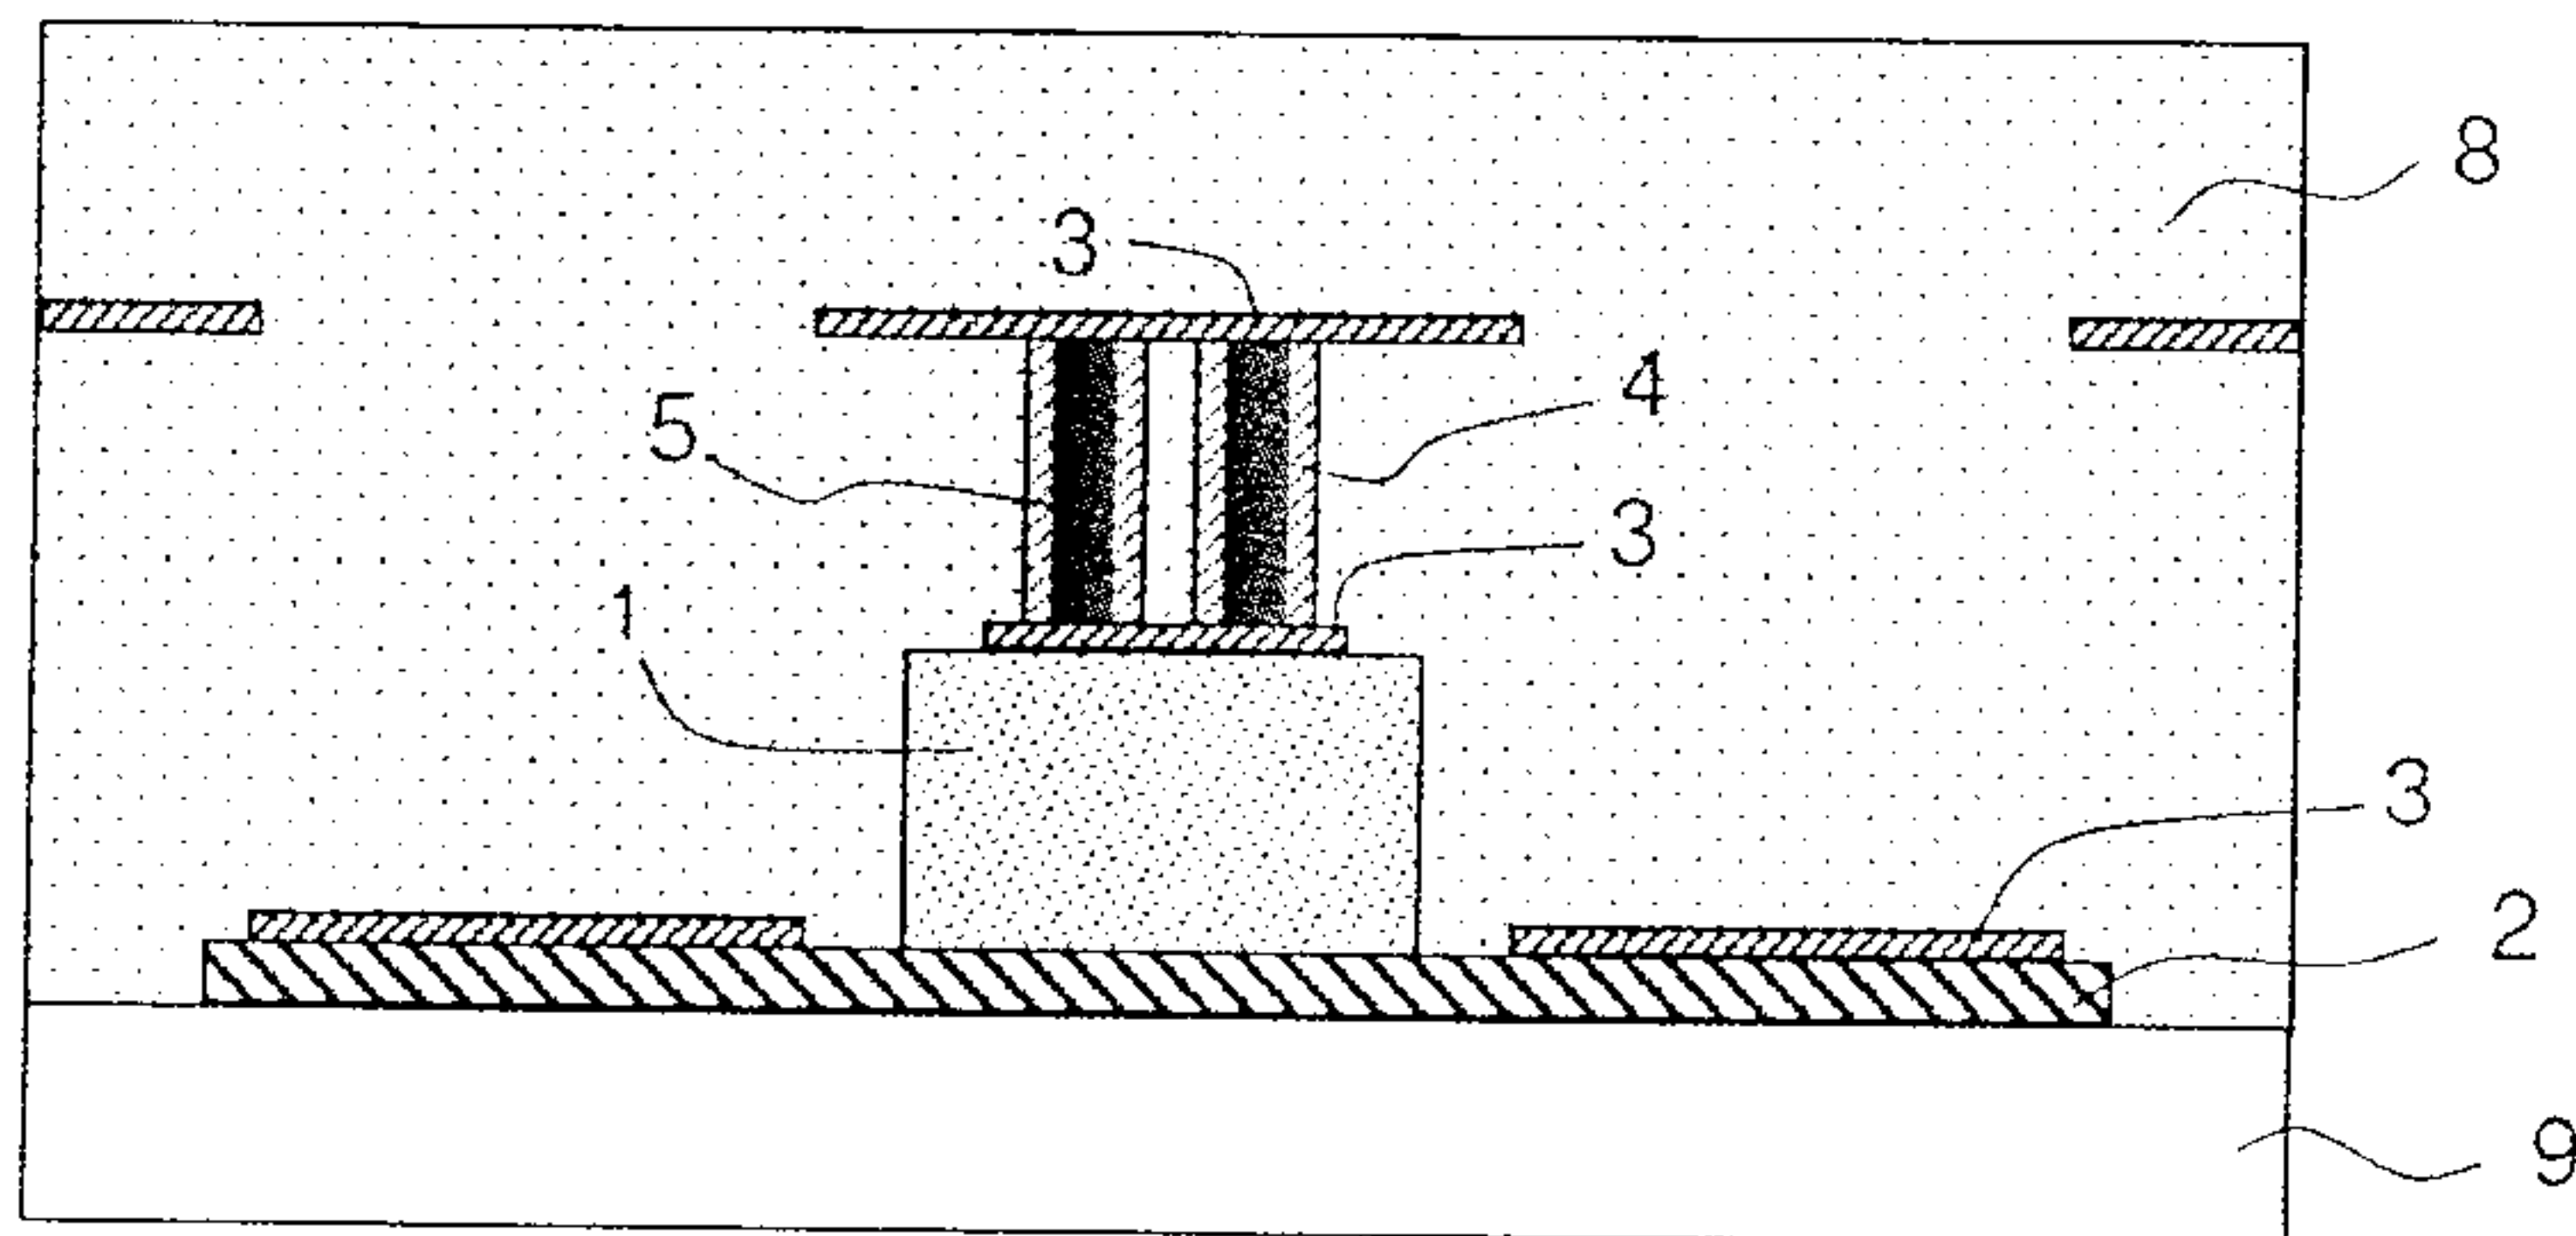


FIG. 14k

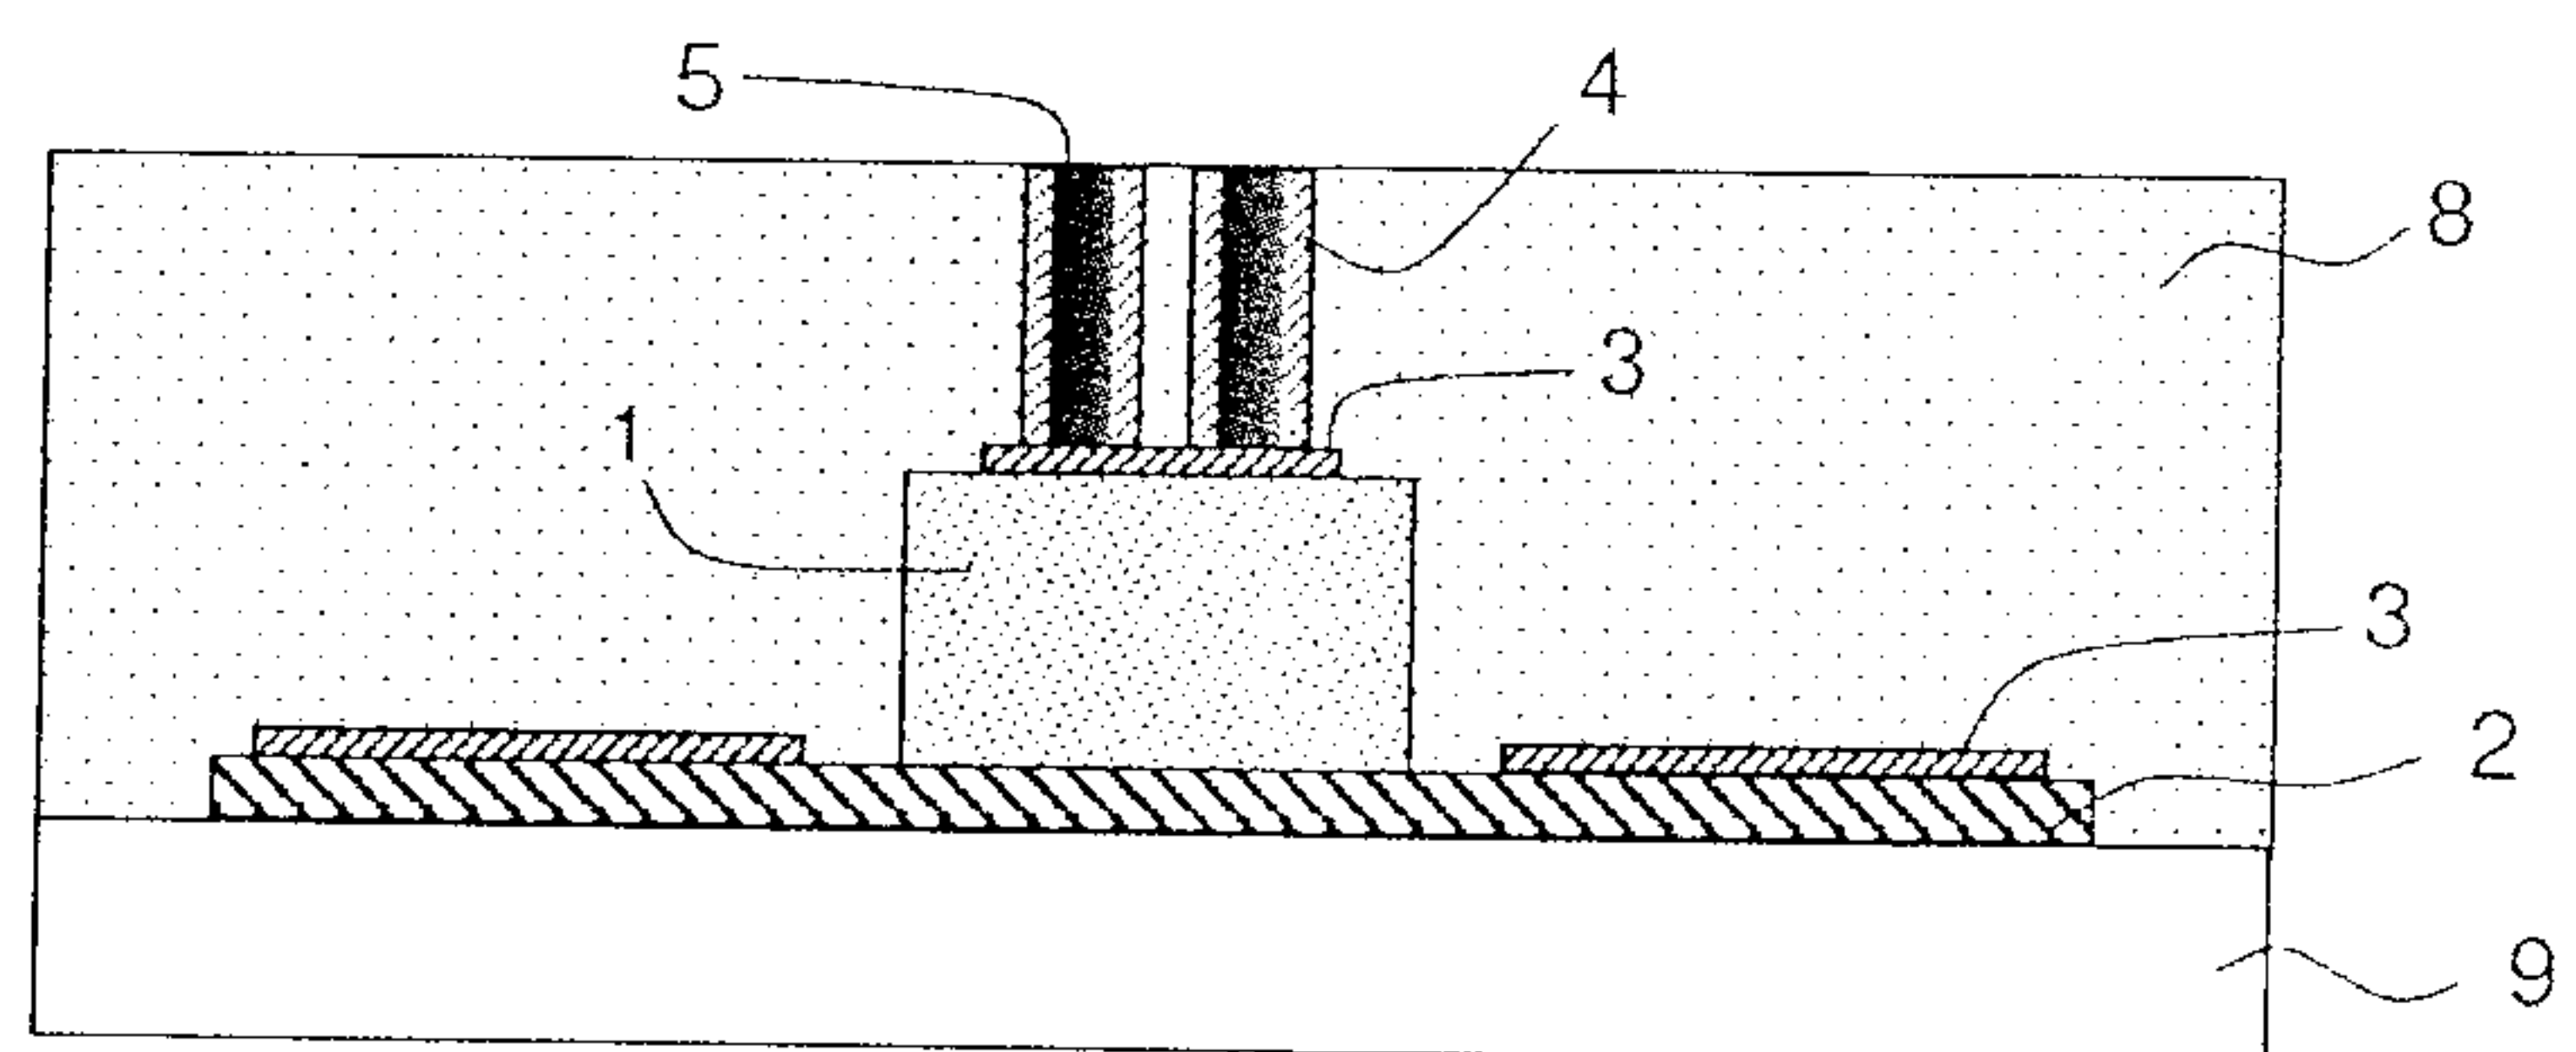


FIG. 14l

22/29

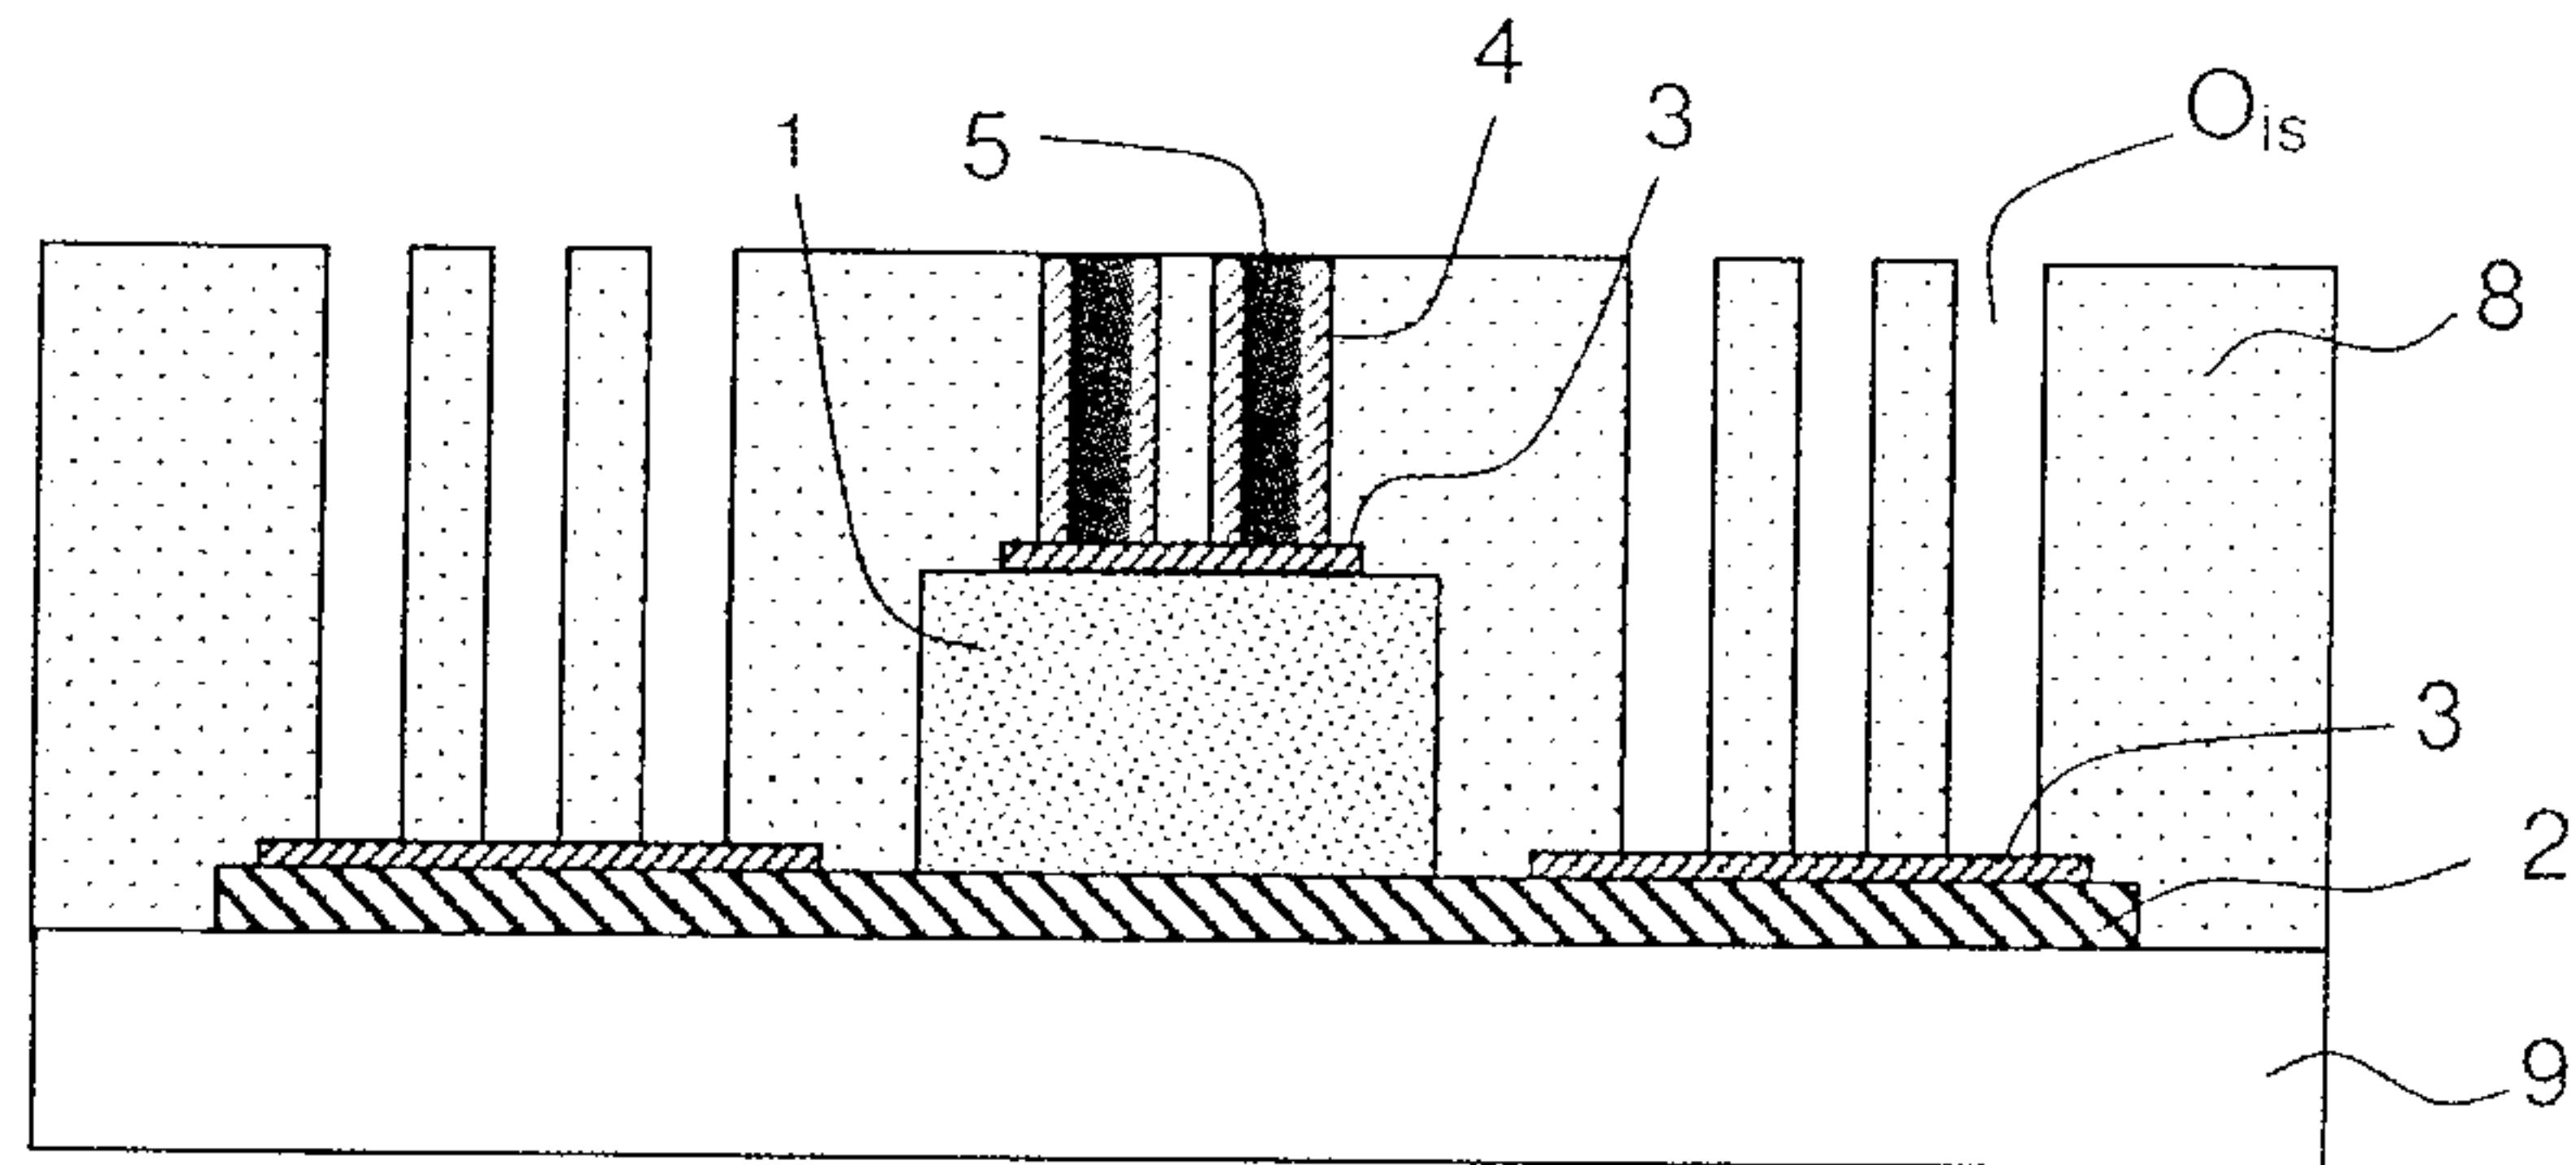


FIG. 14m

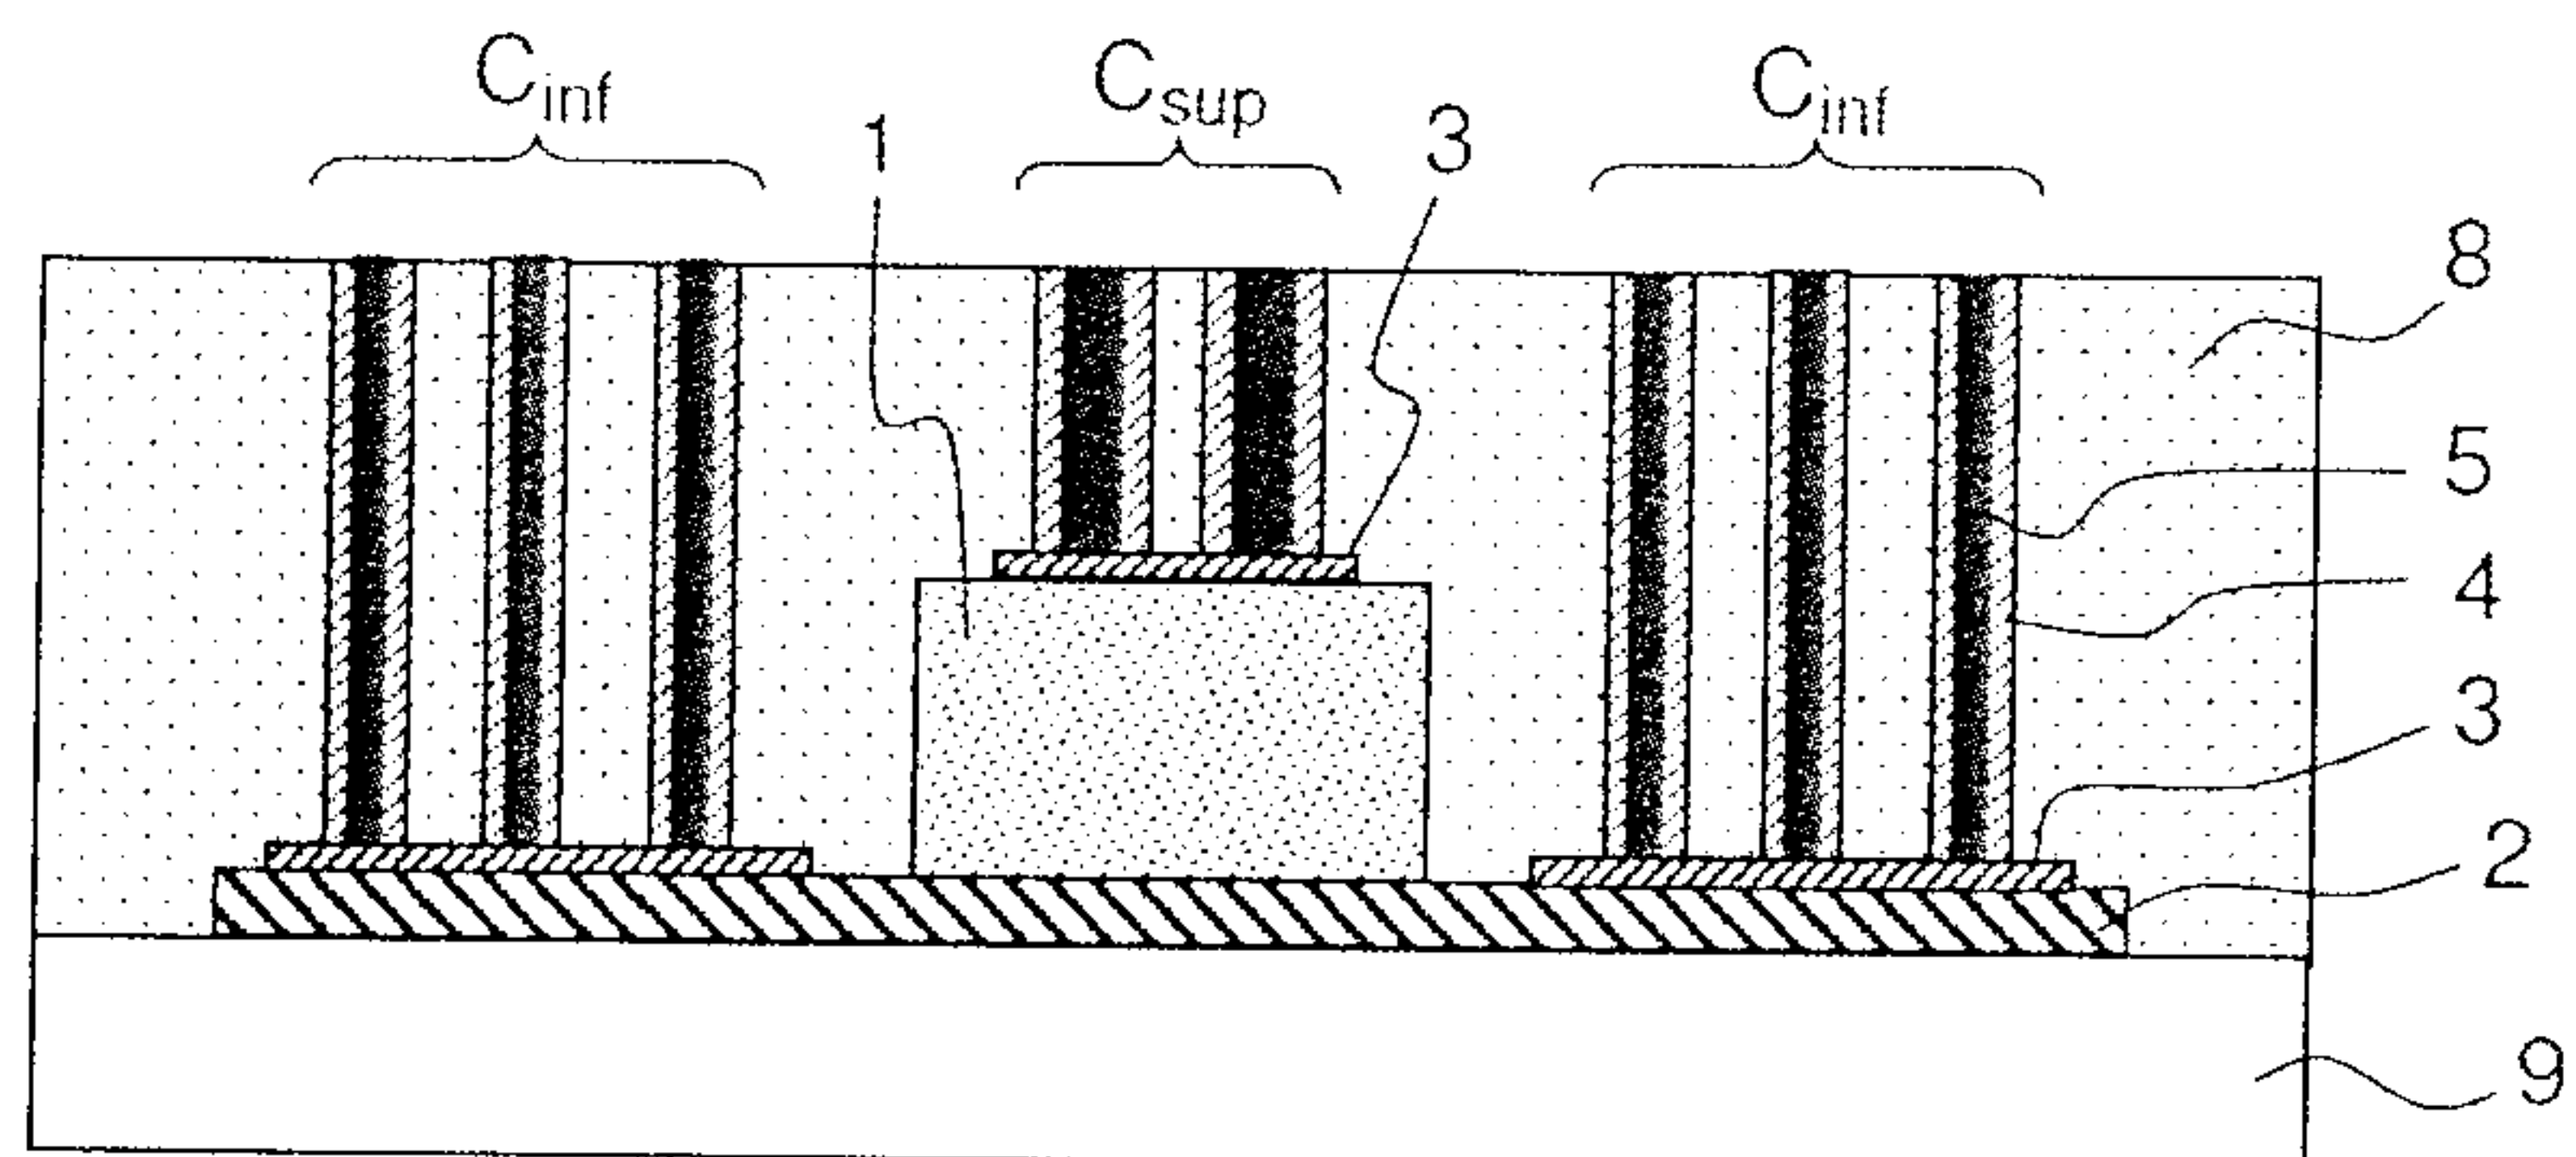


FIG. 14n

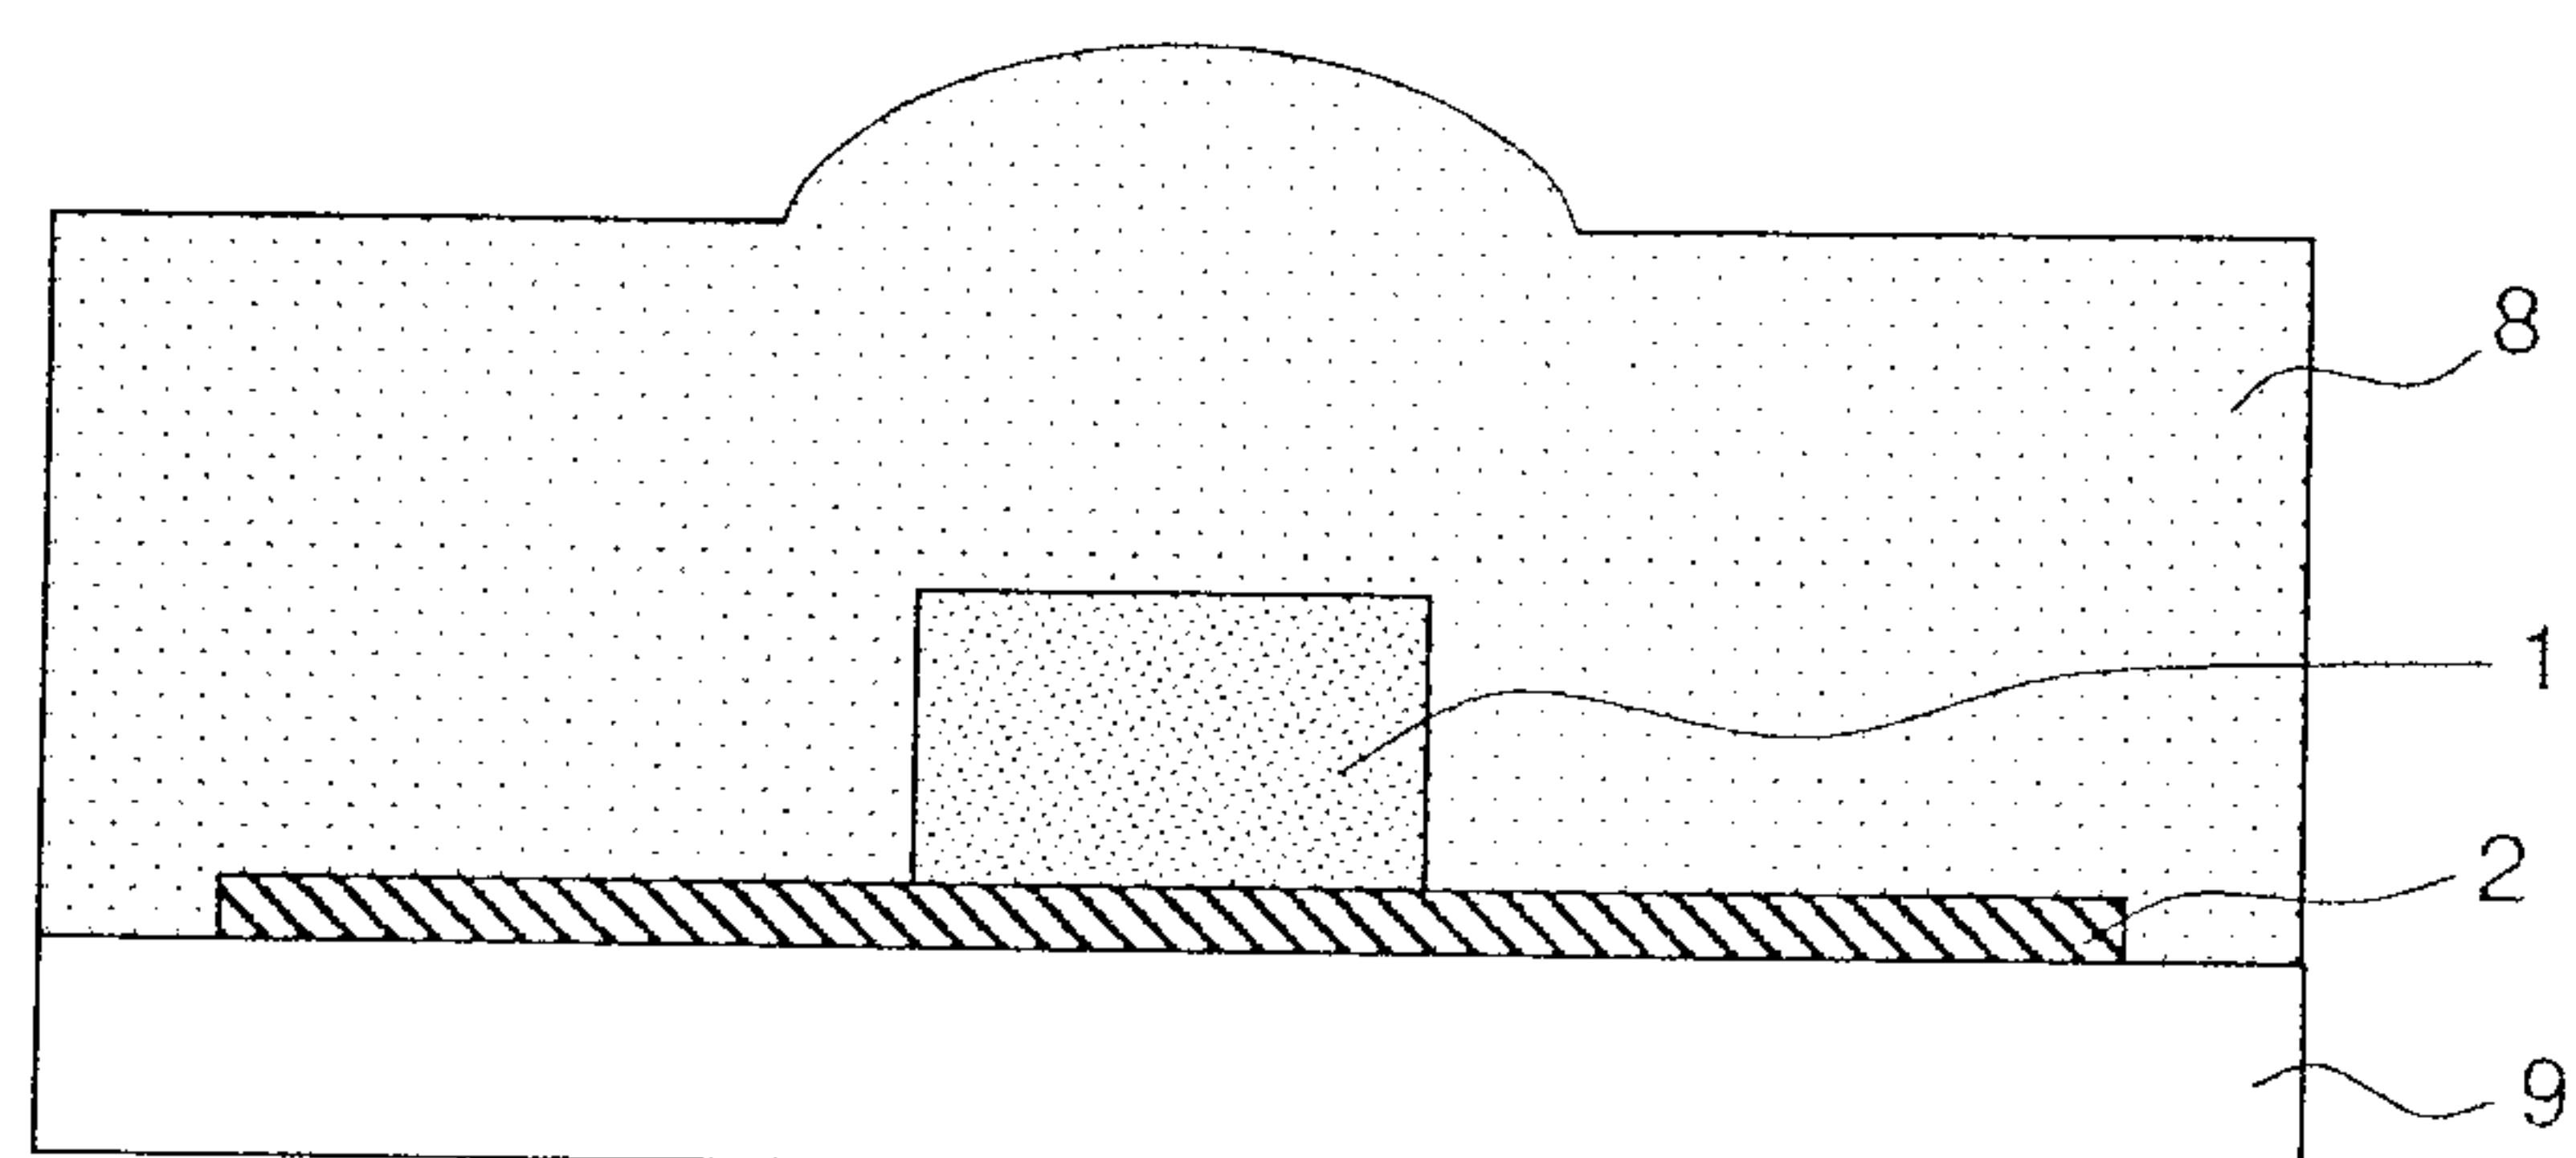


FIG. 15a

23/29

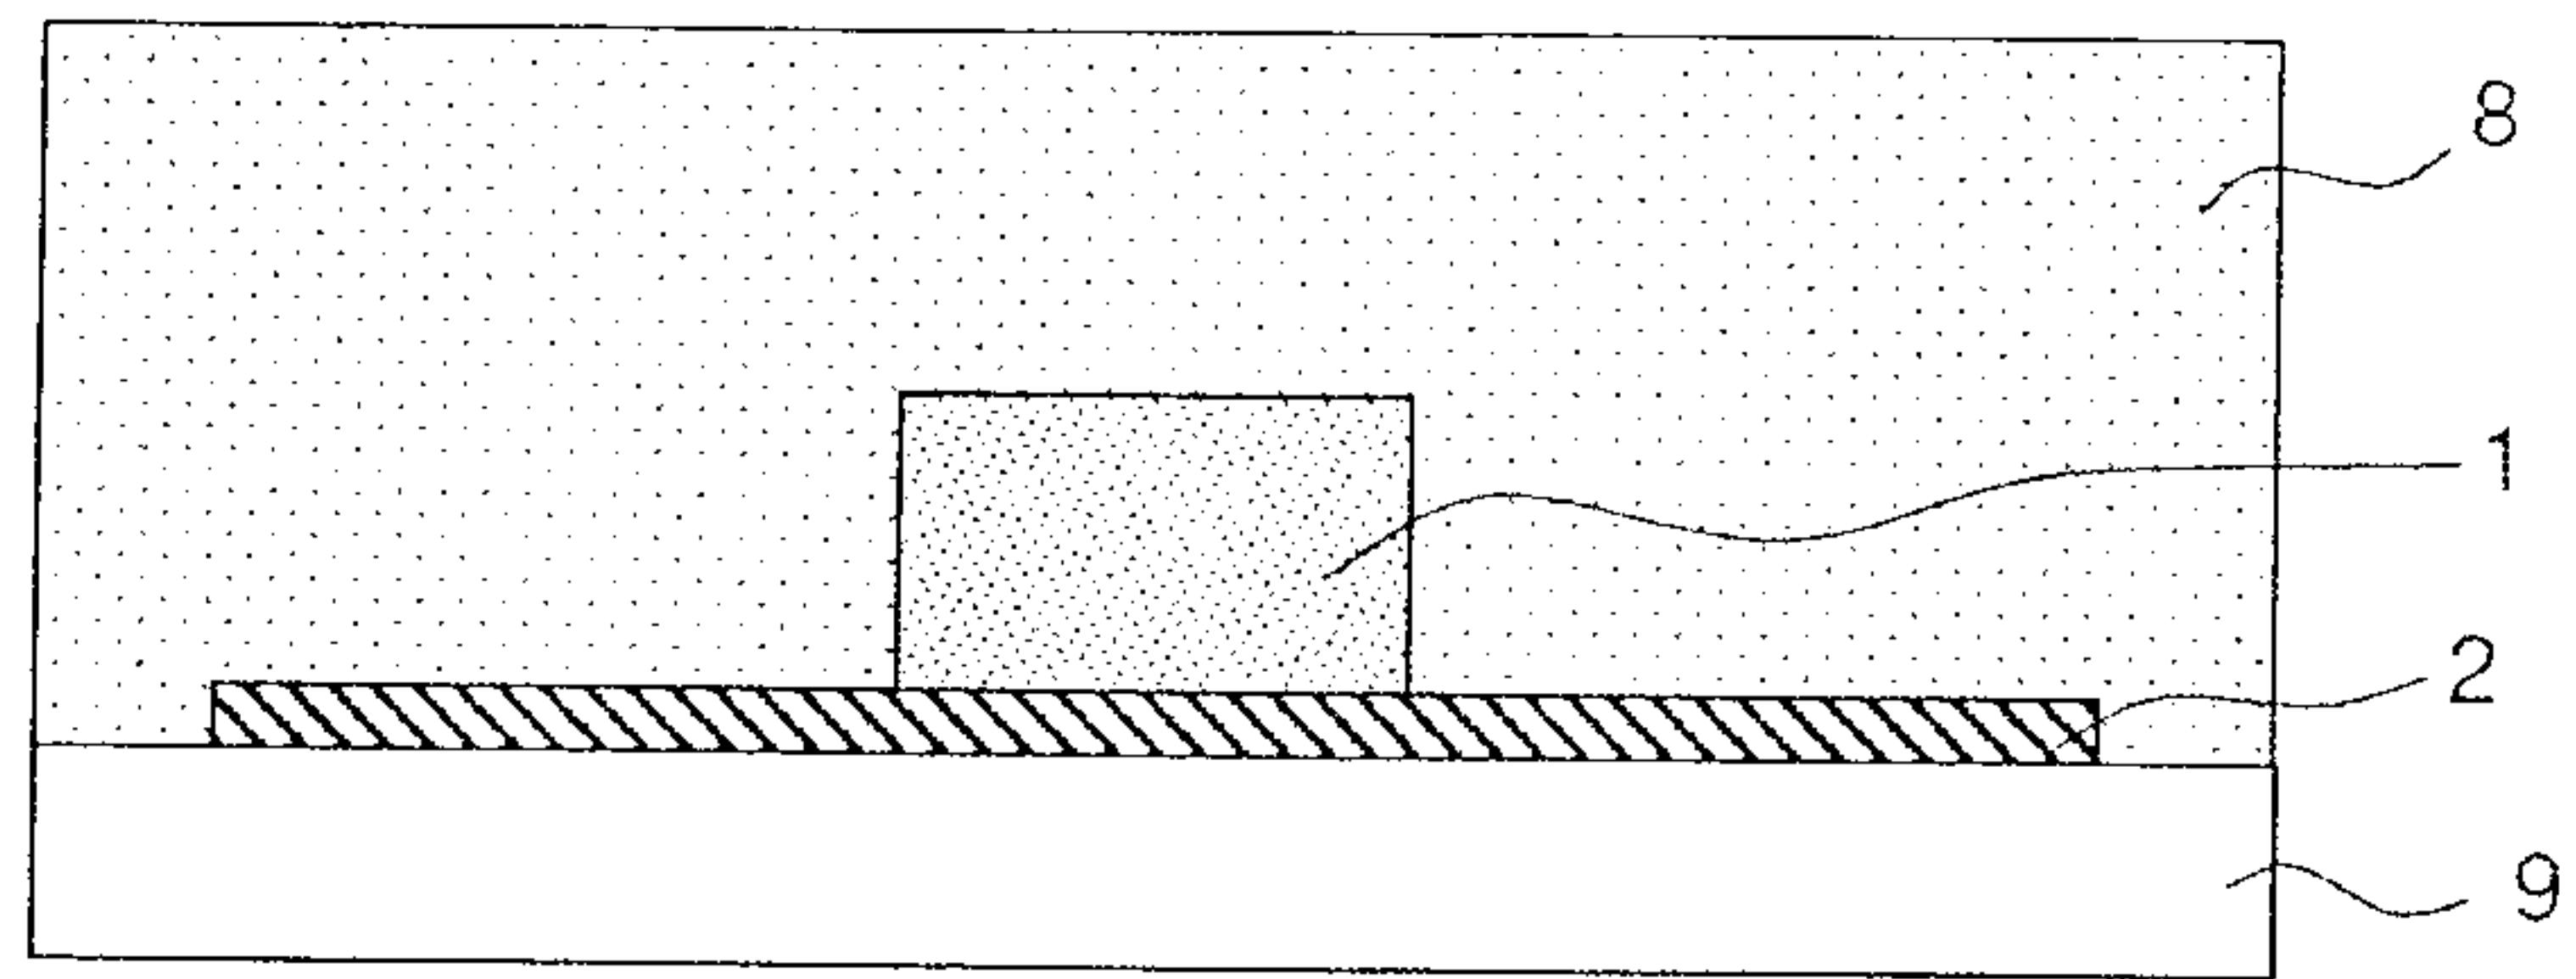


FIG. 15b

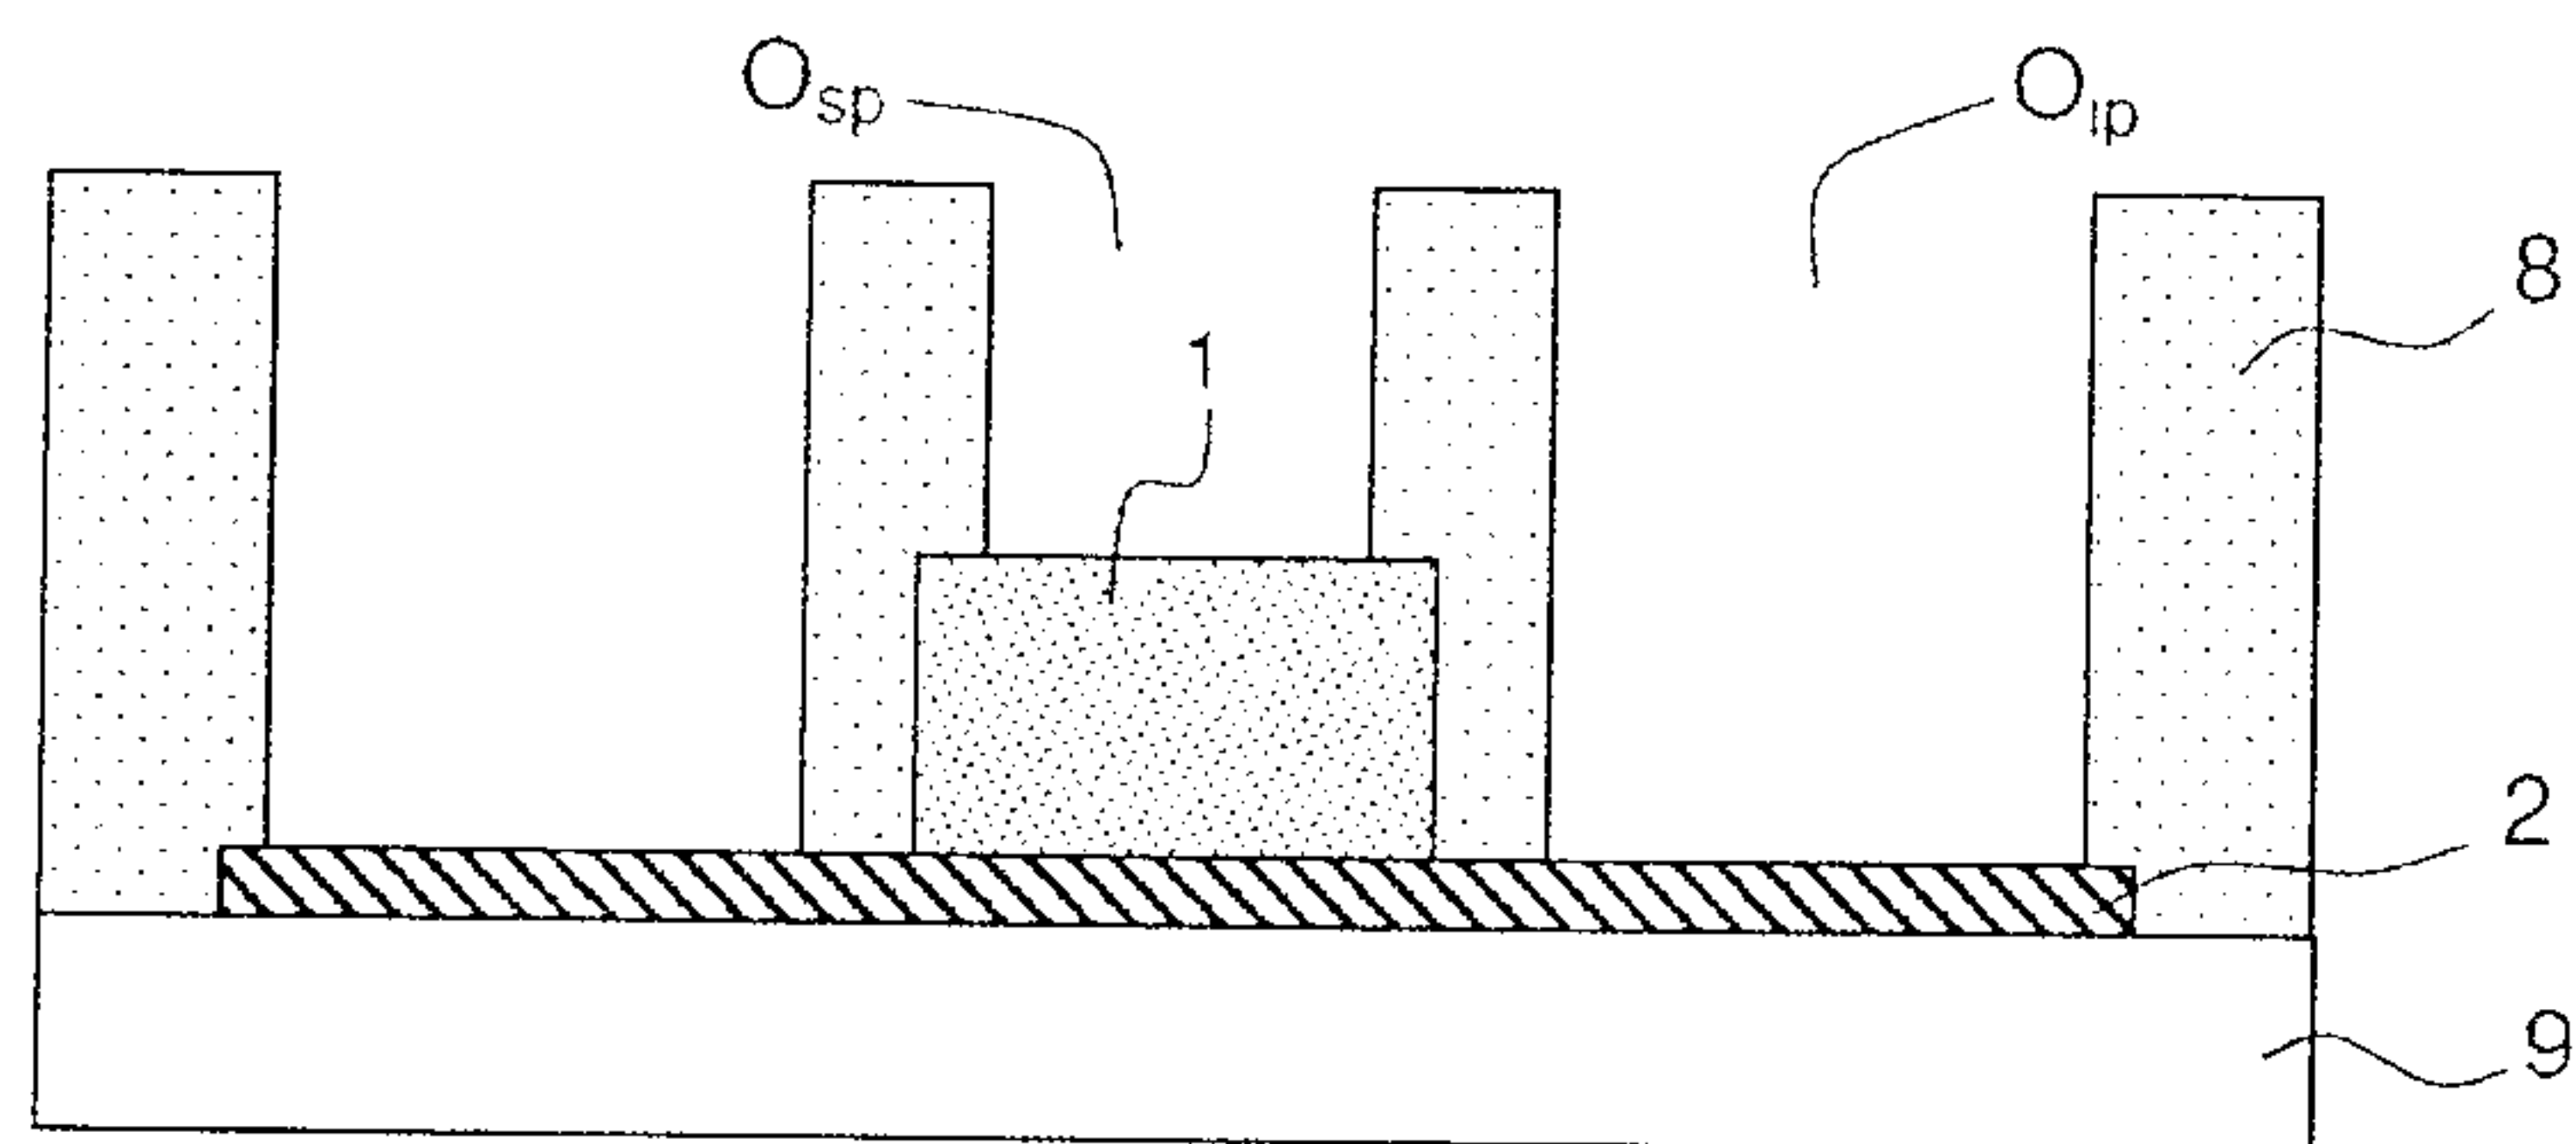


FIG. 15c

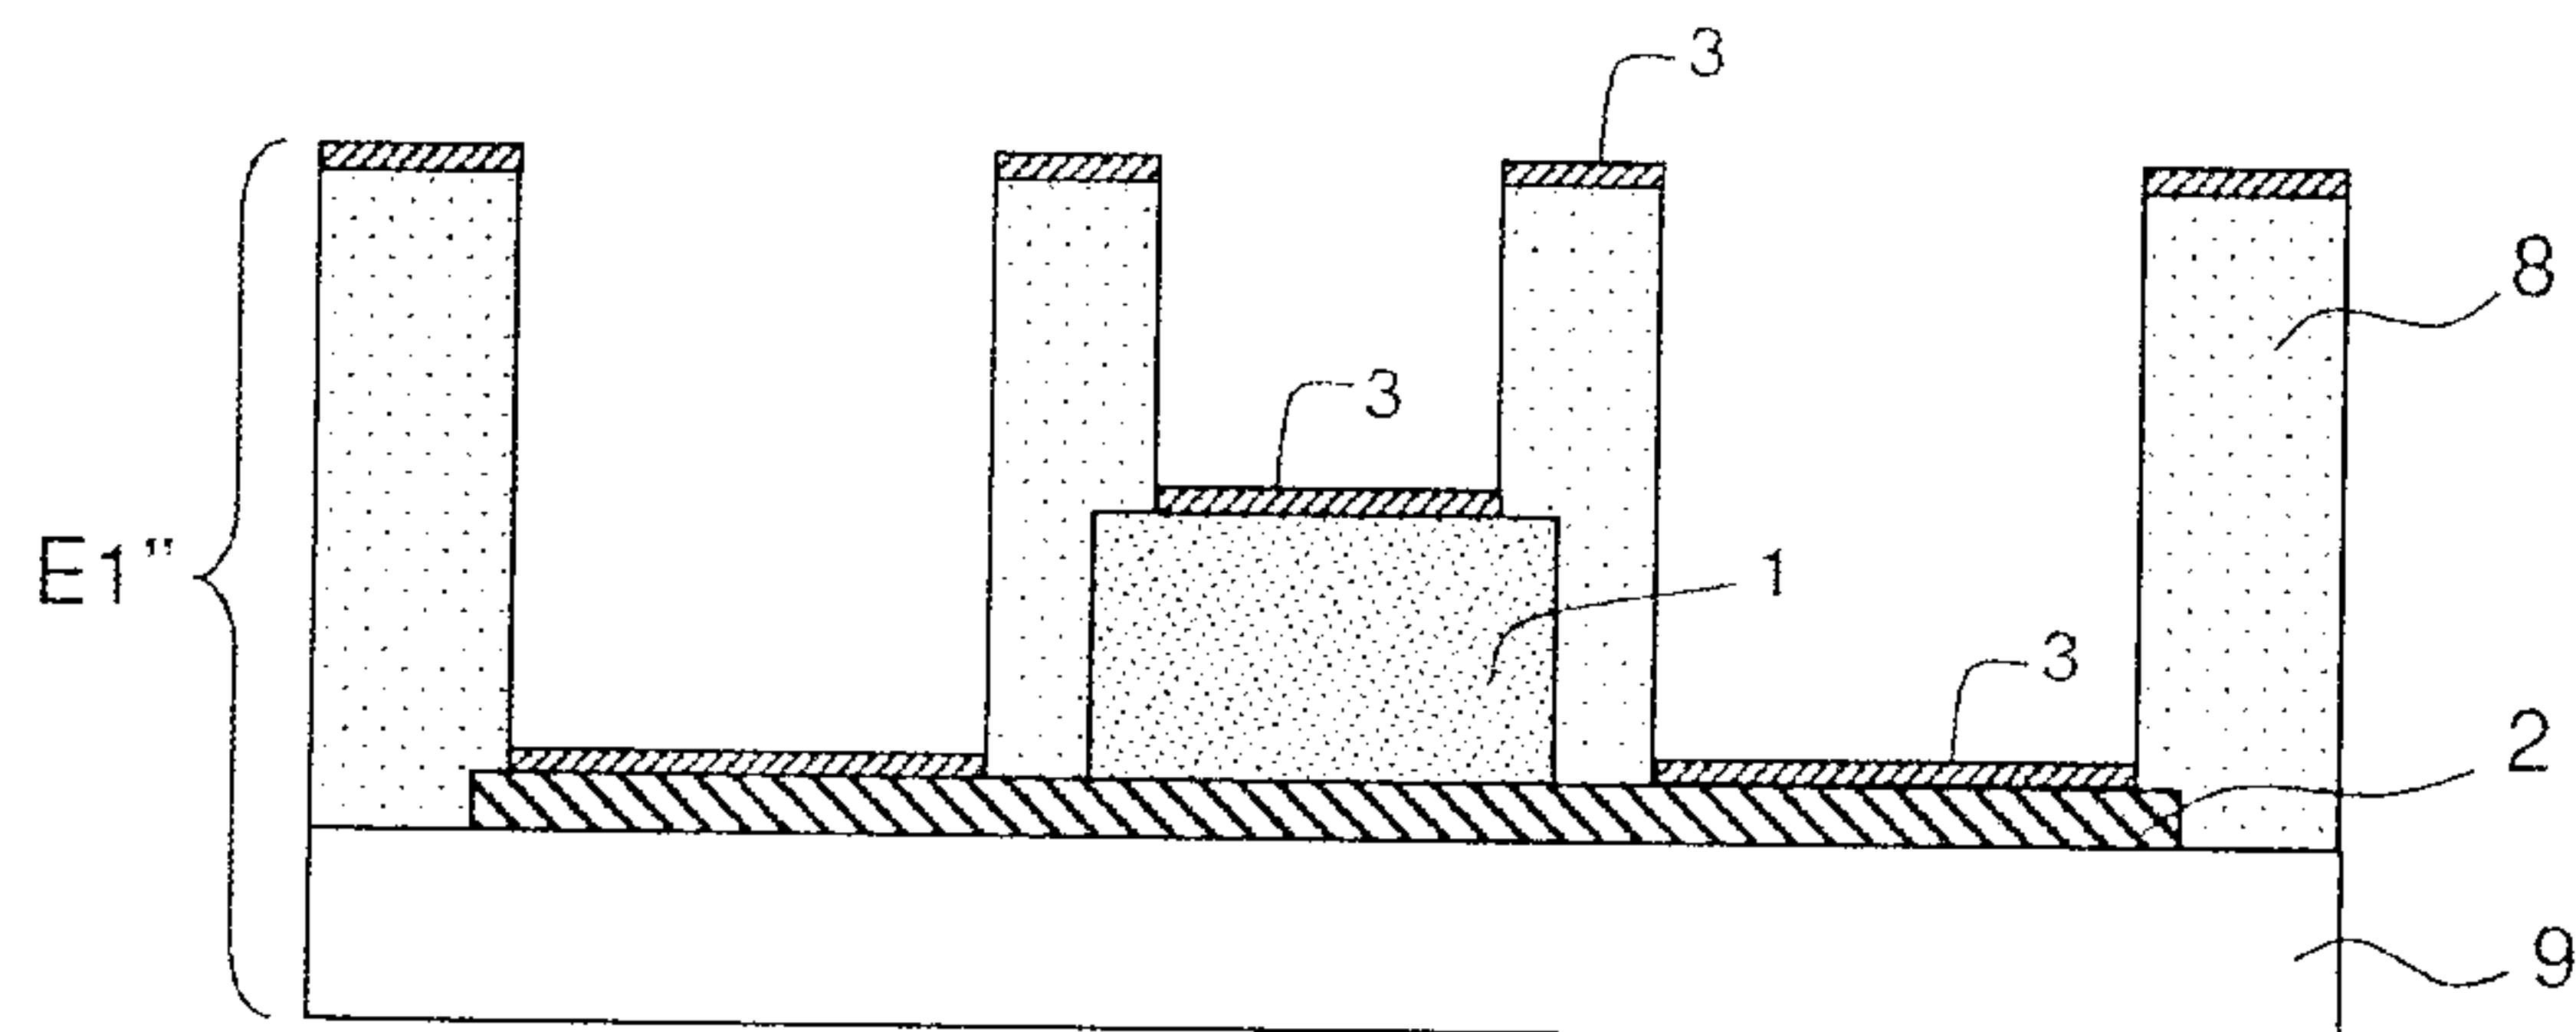


FIG. 15d

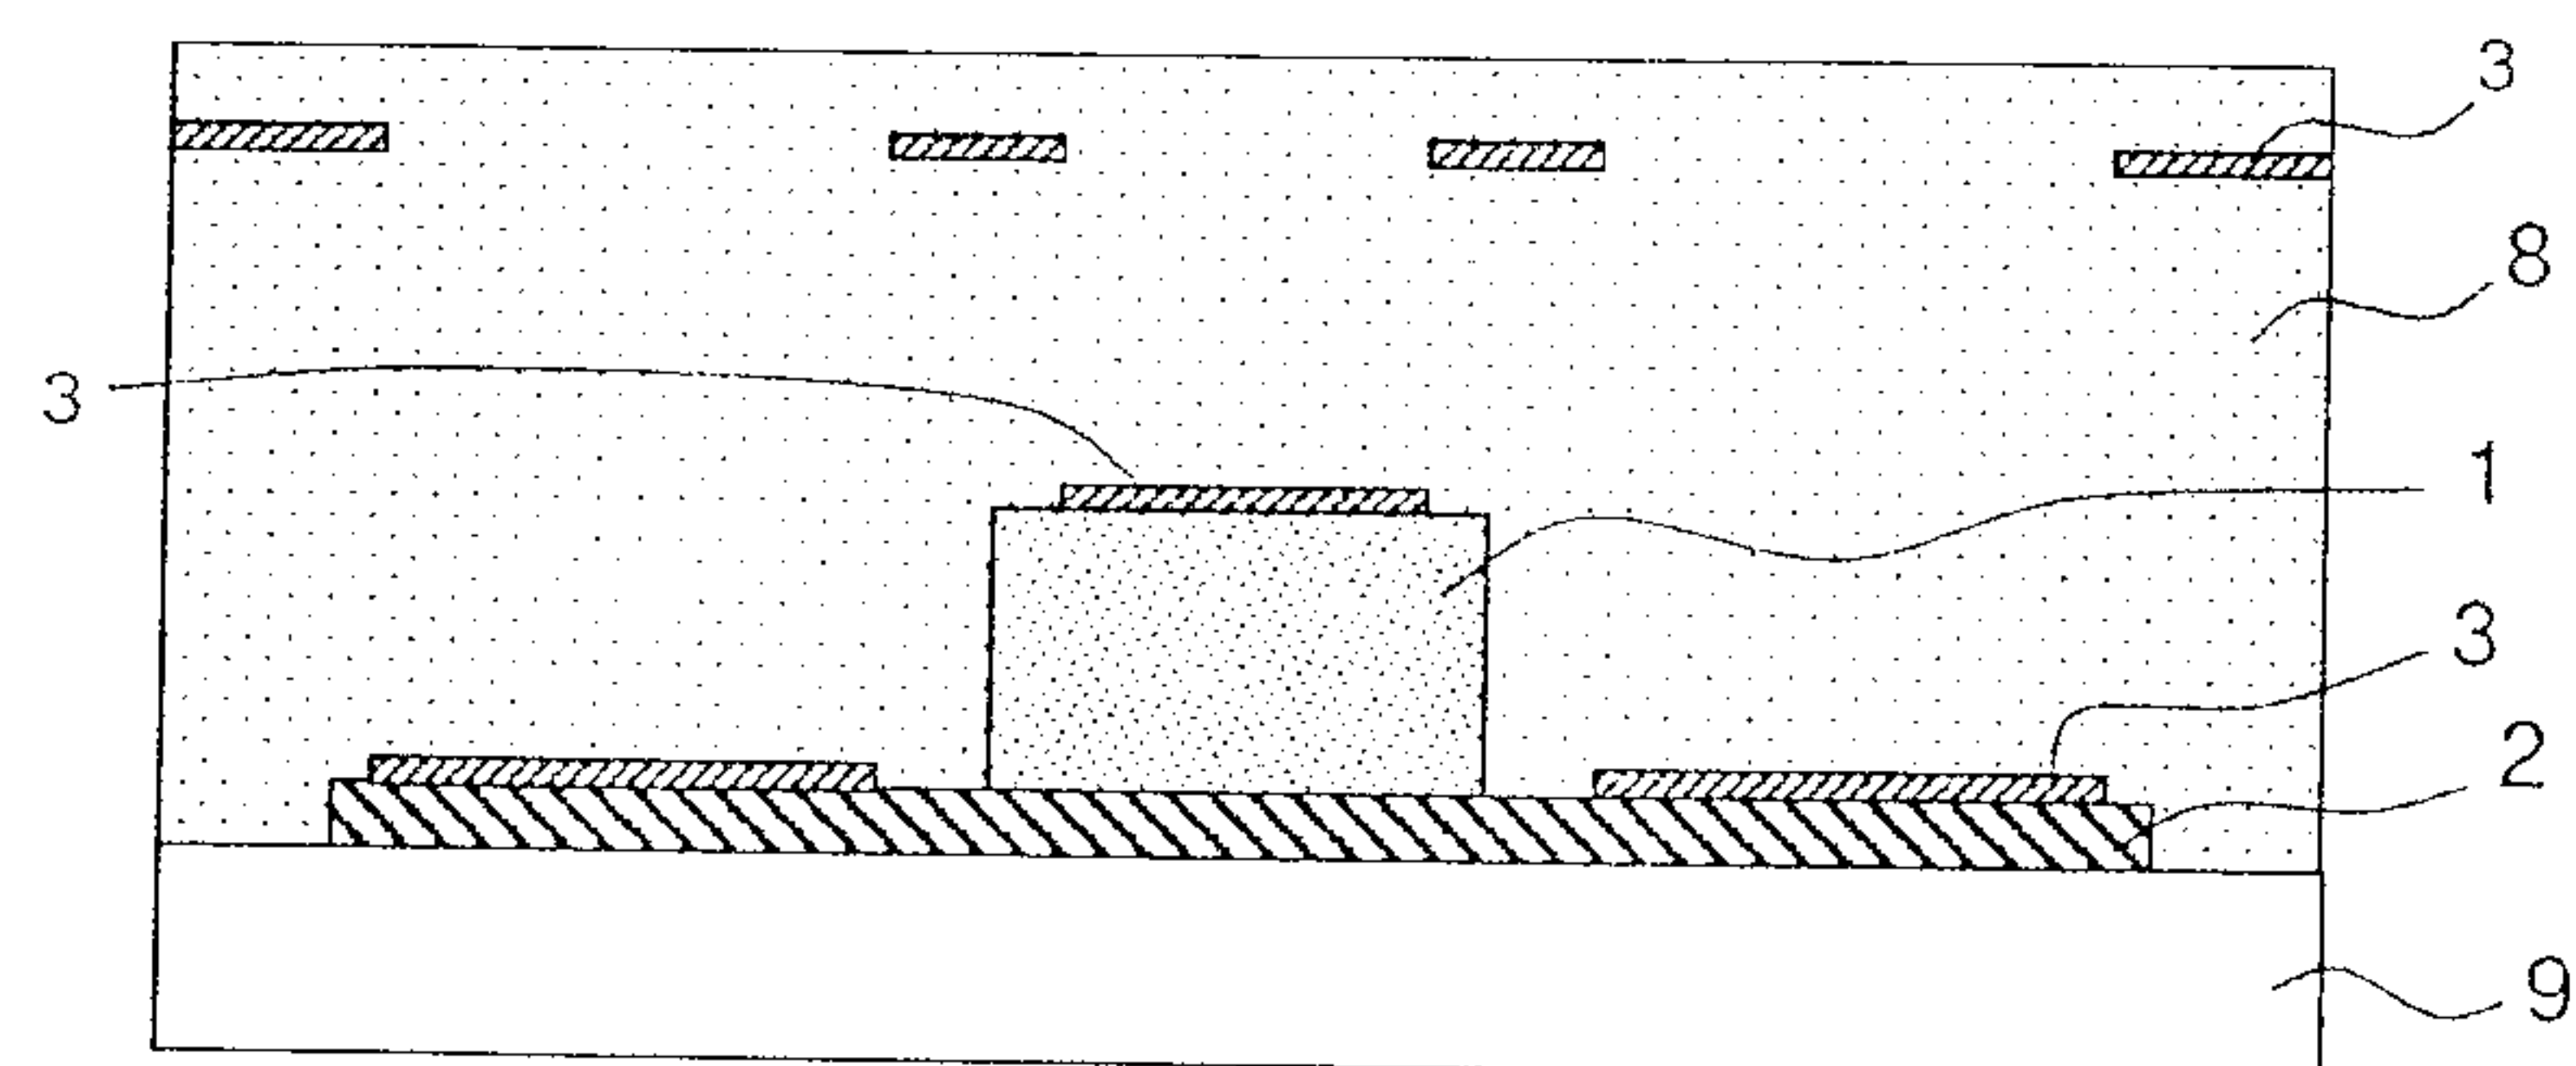


FIG. 15e

24/29

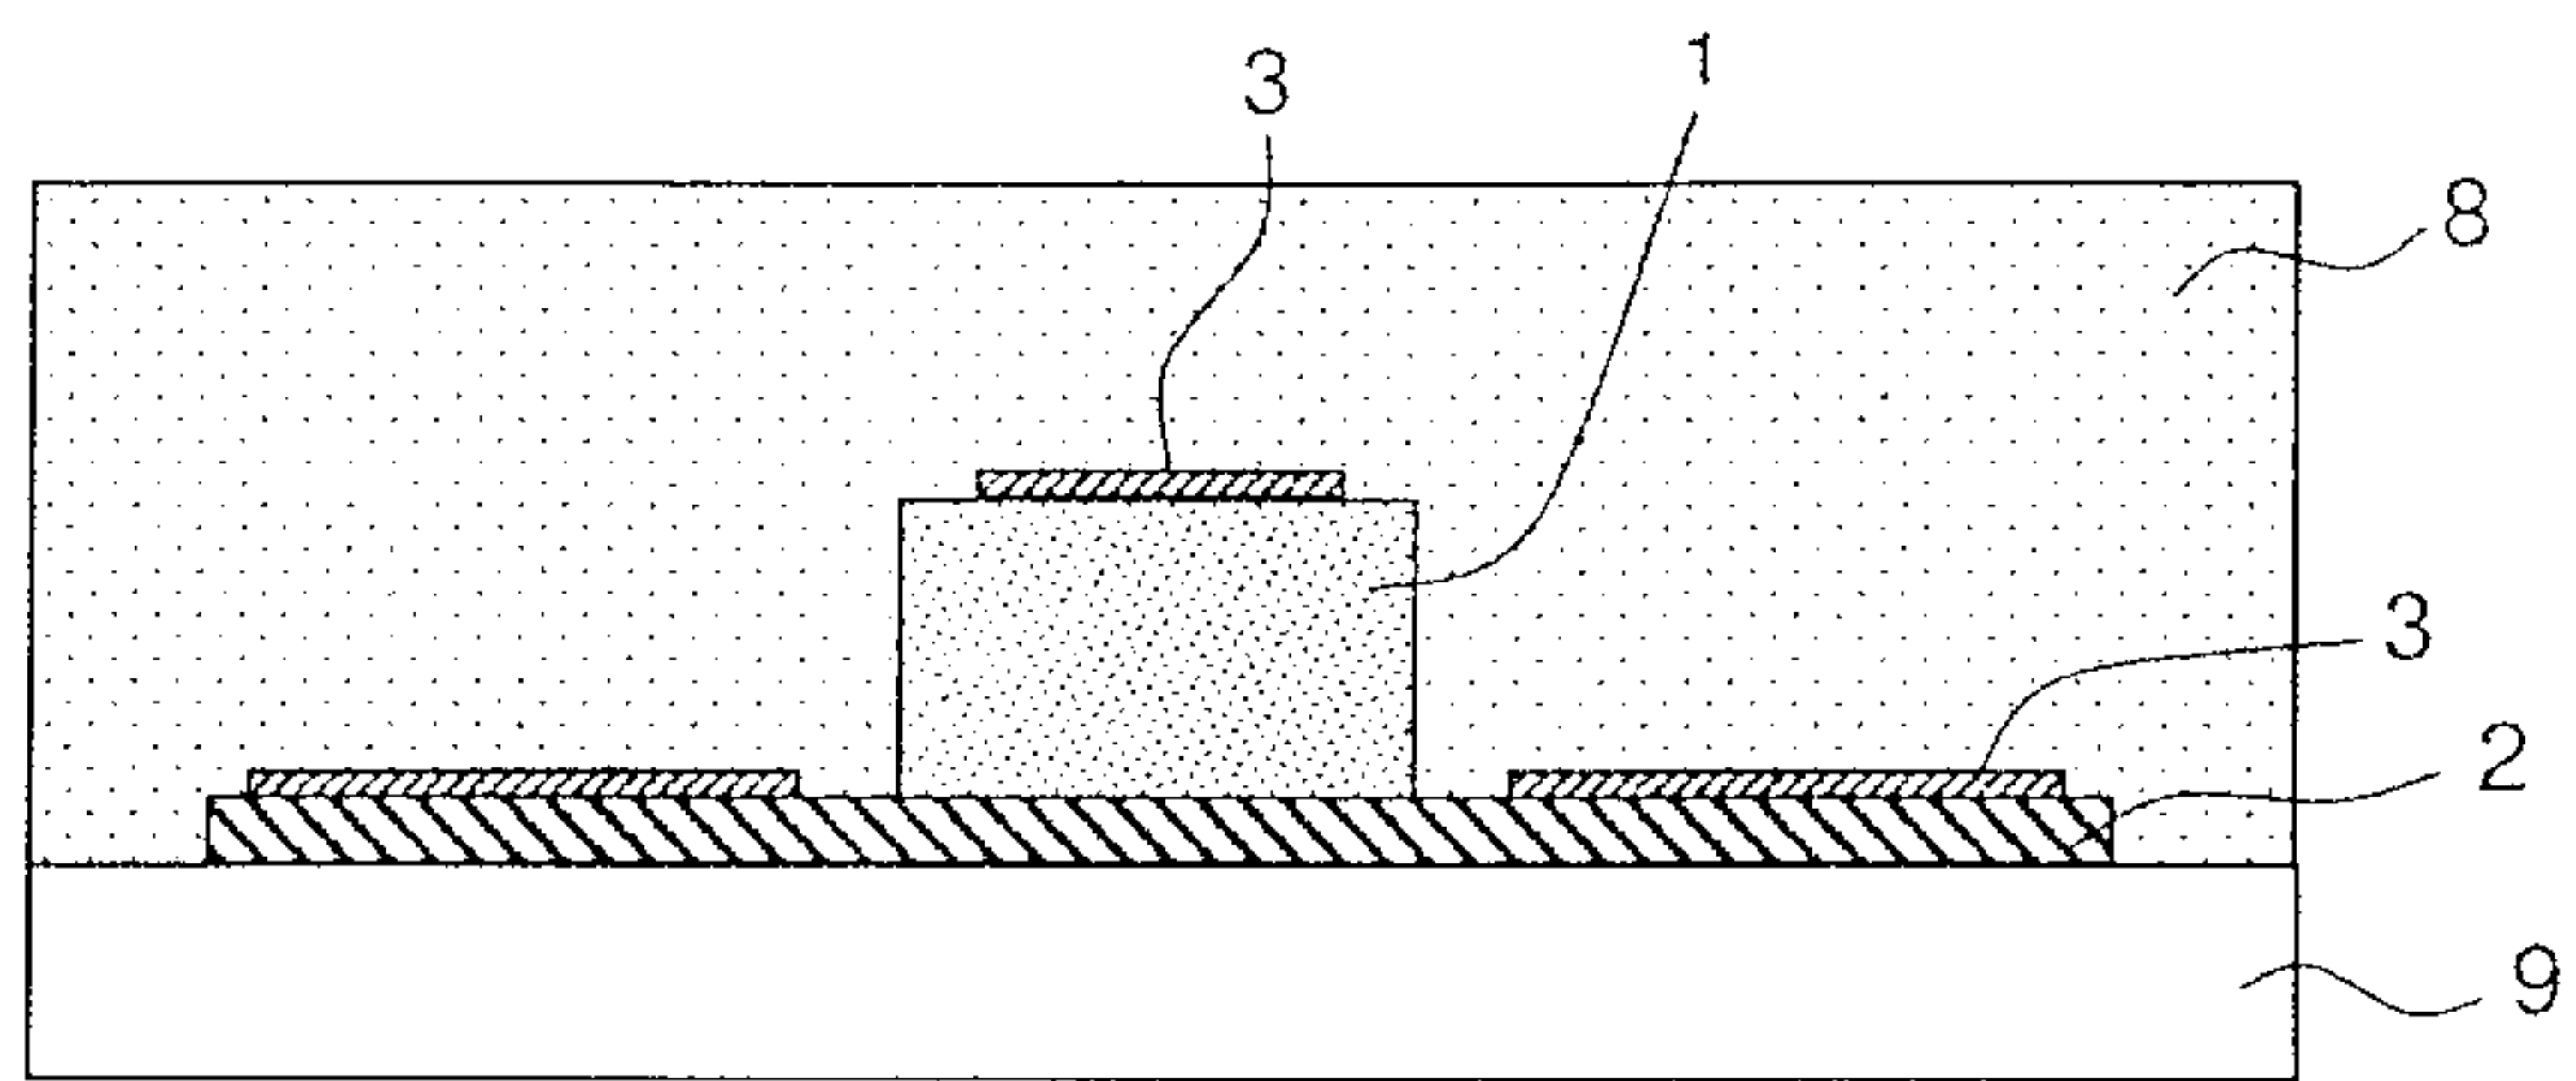


FIG. 15f

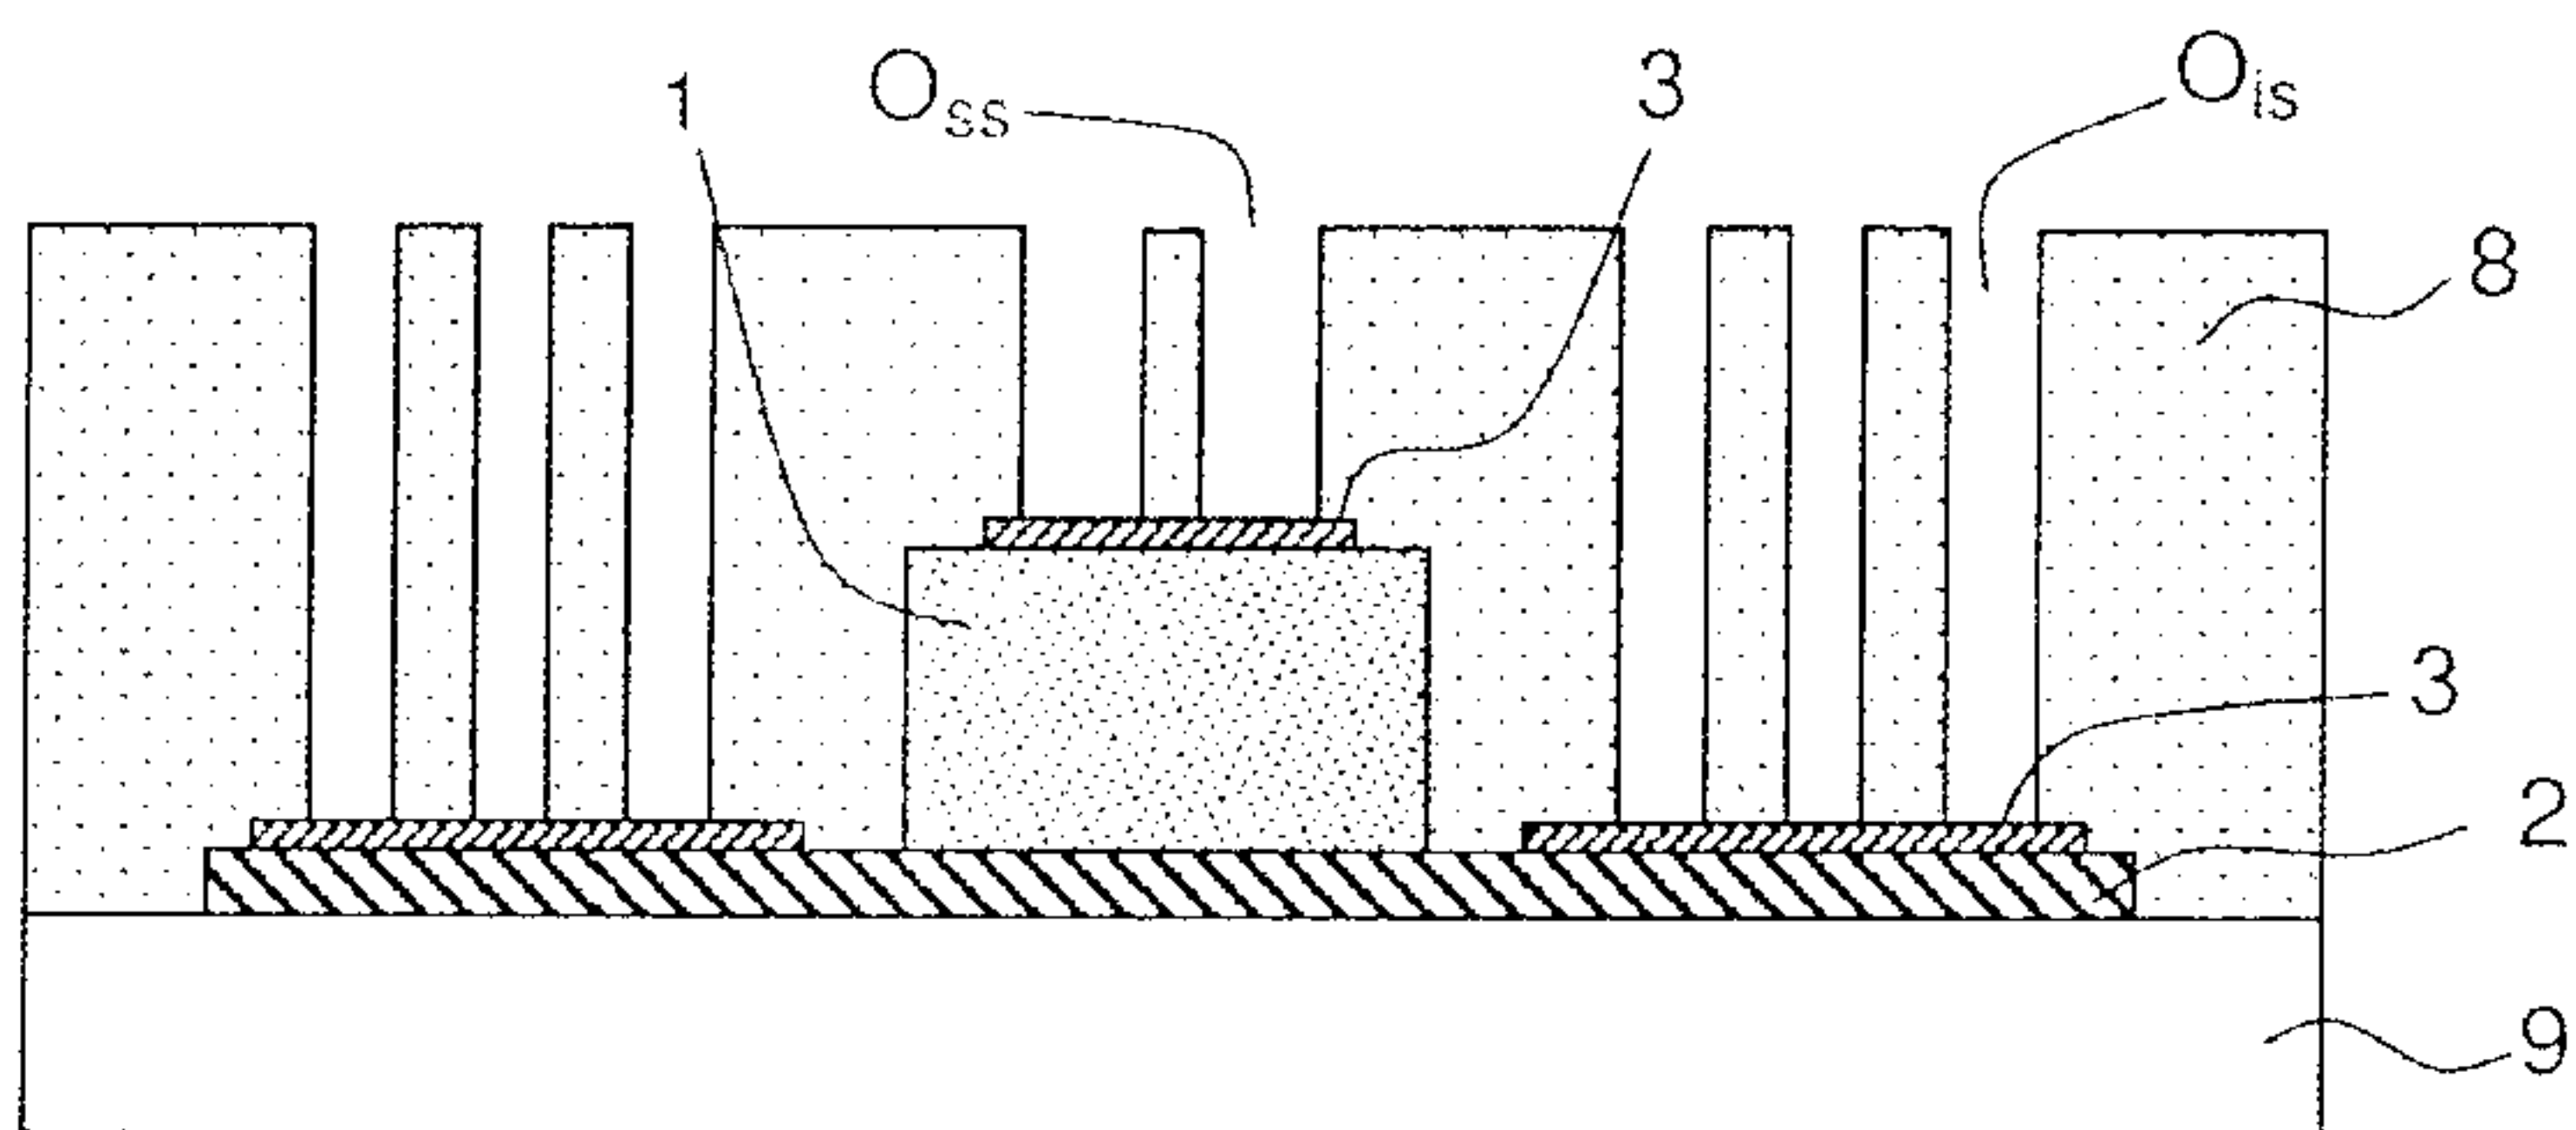


FIG. 15g

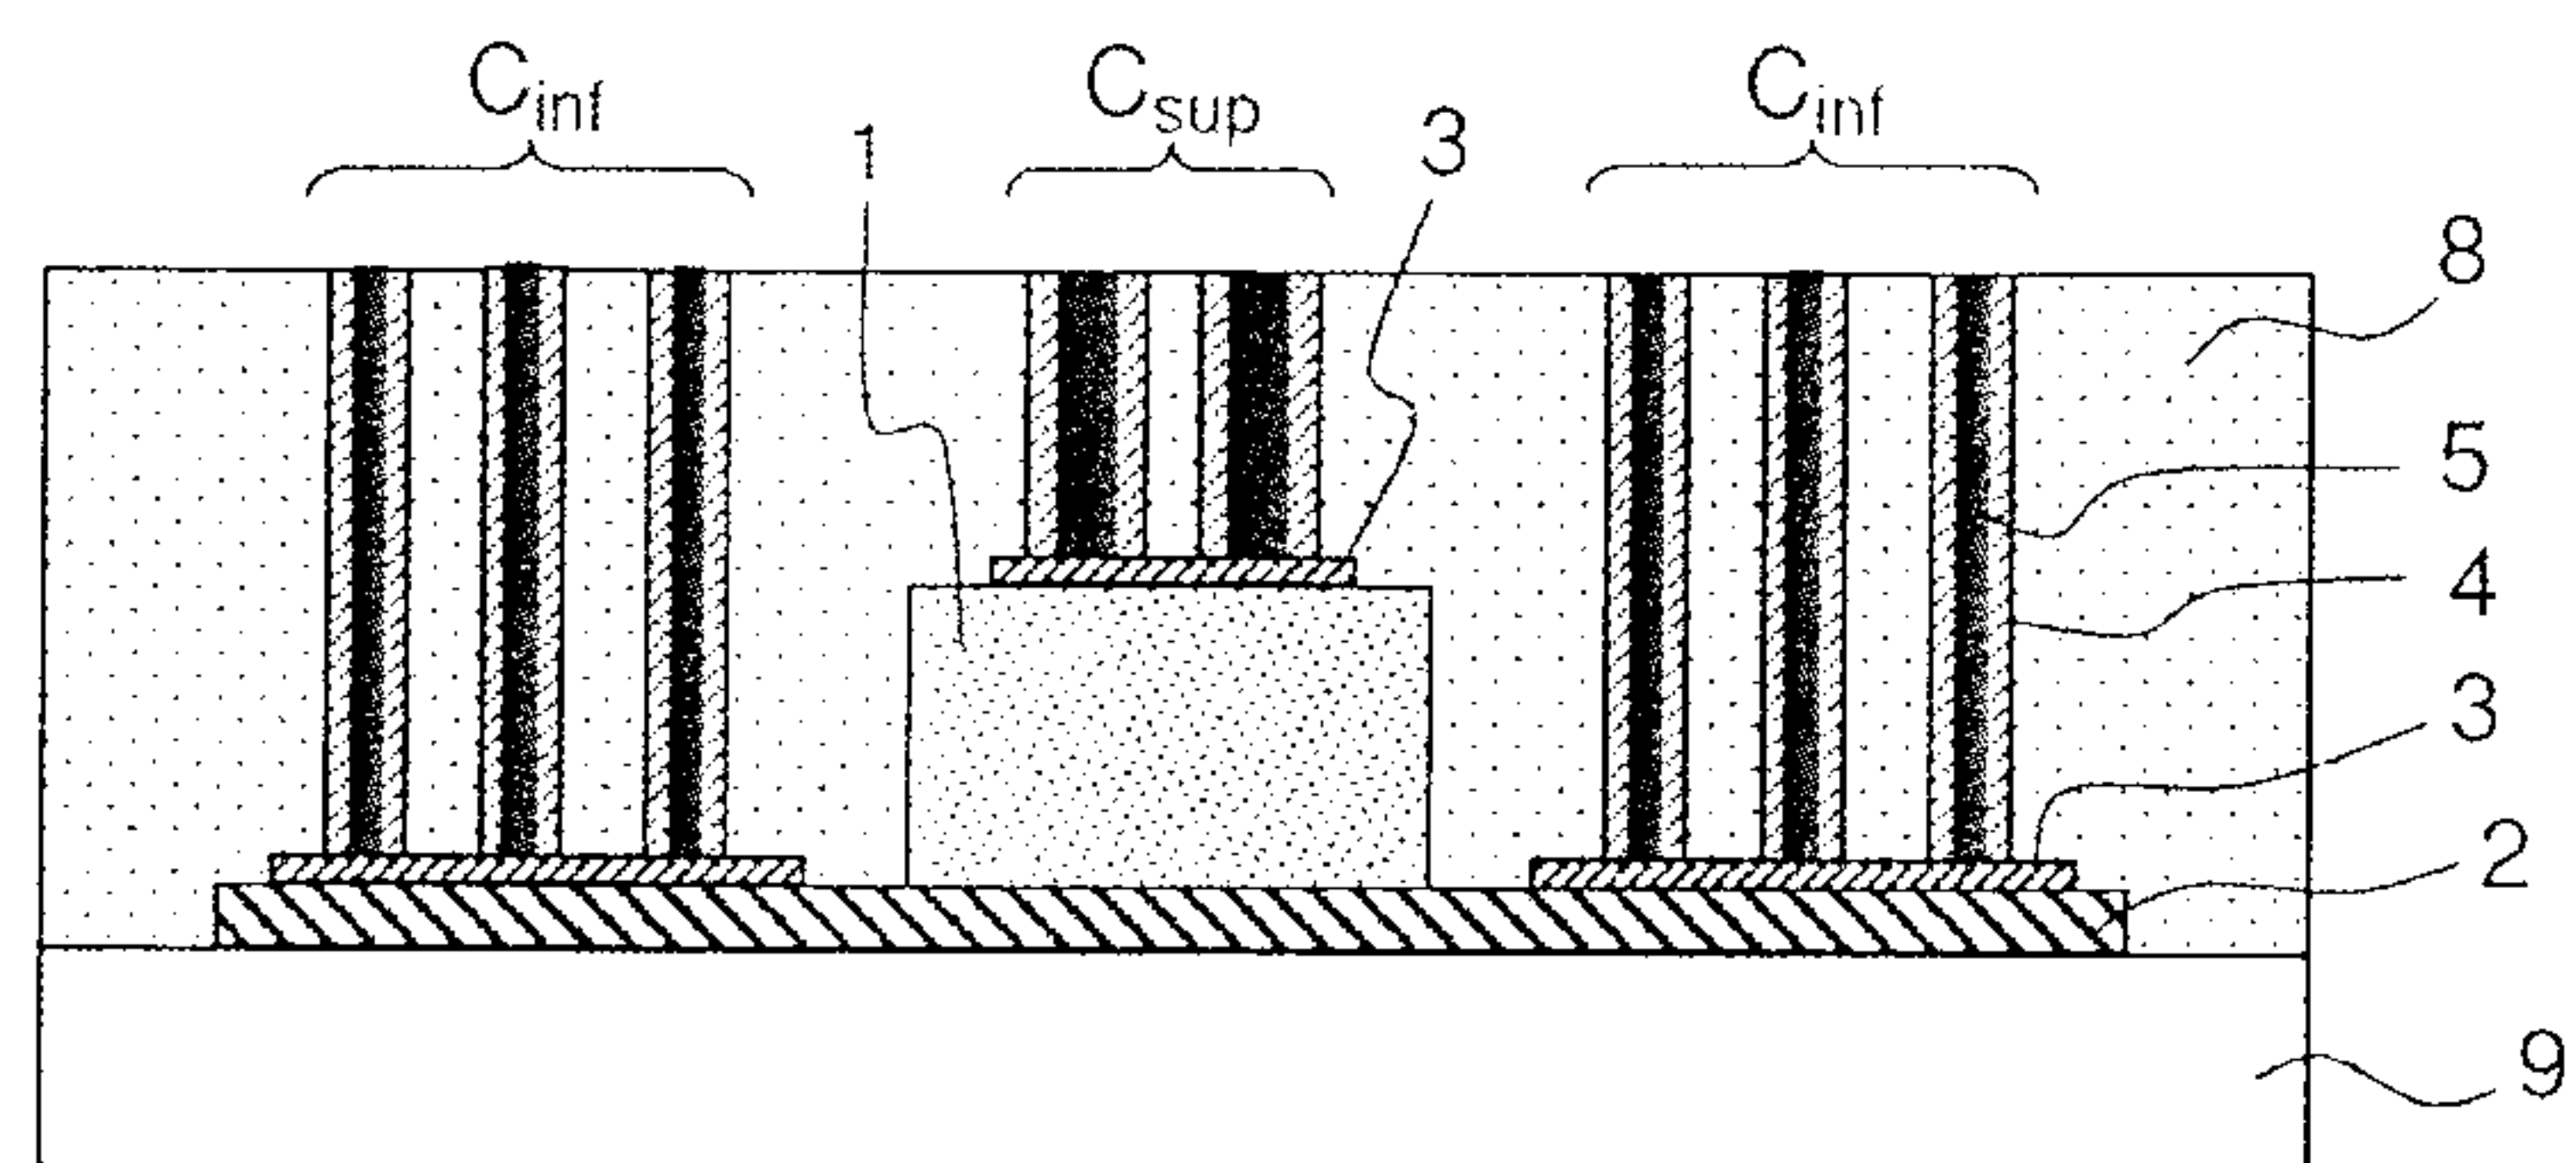


FIG. 15h

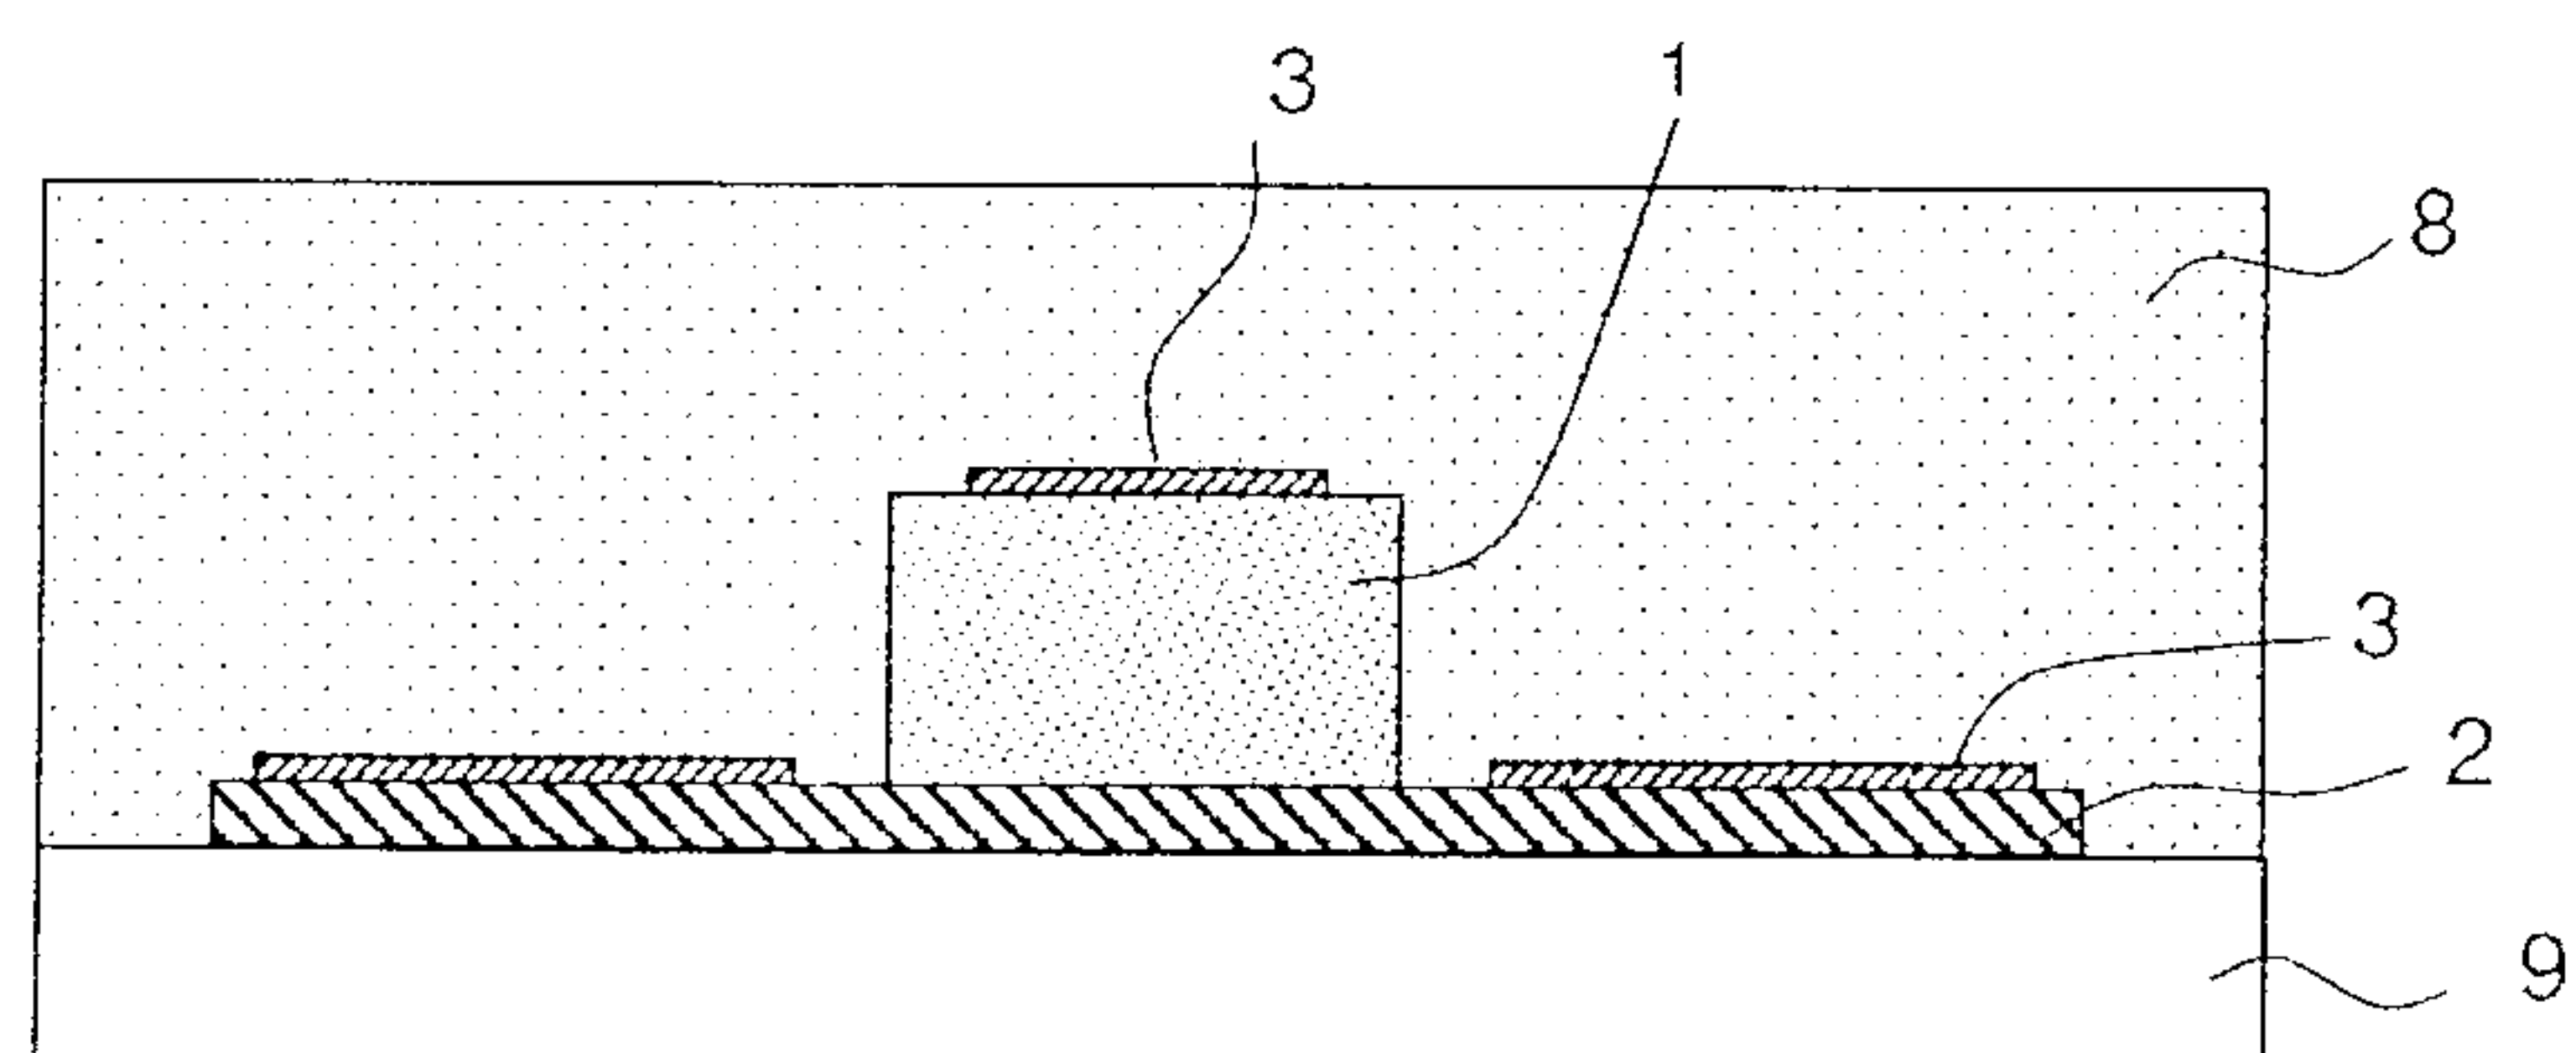


FIG. 16a

25/29

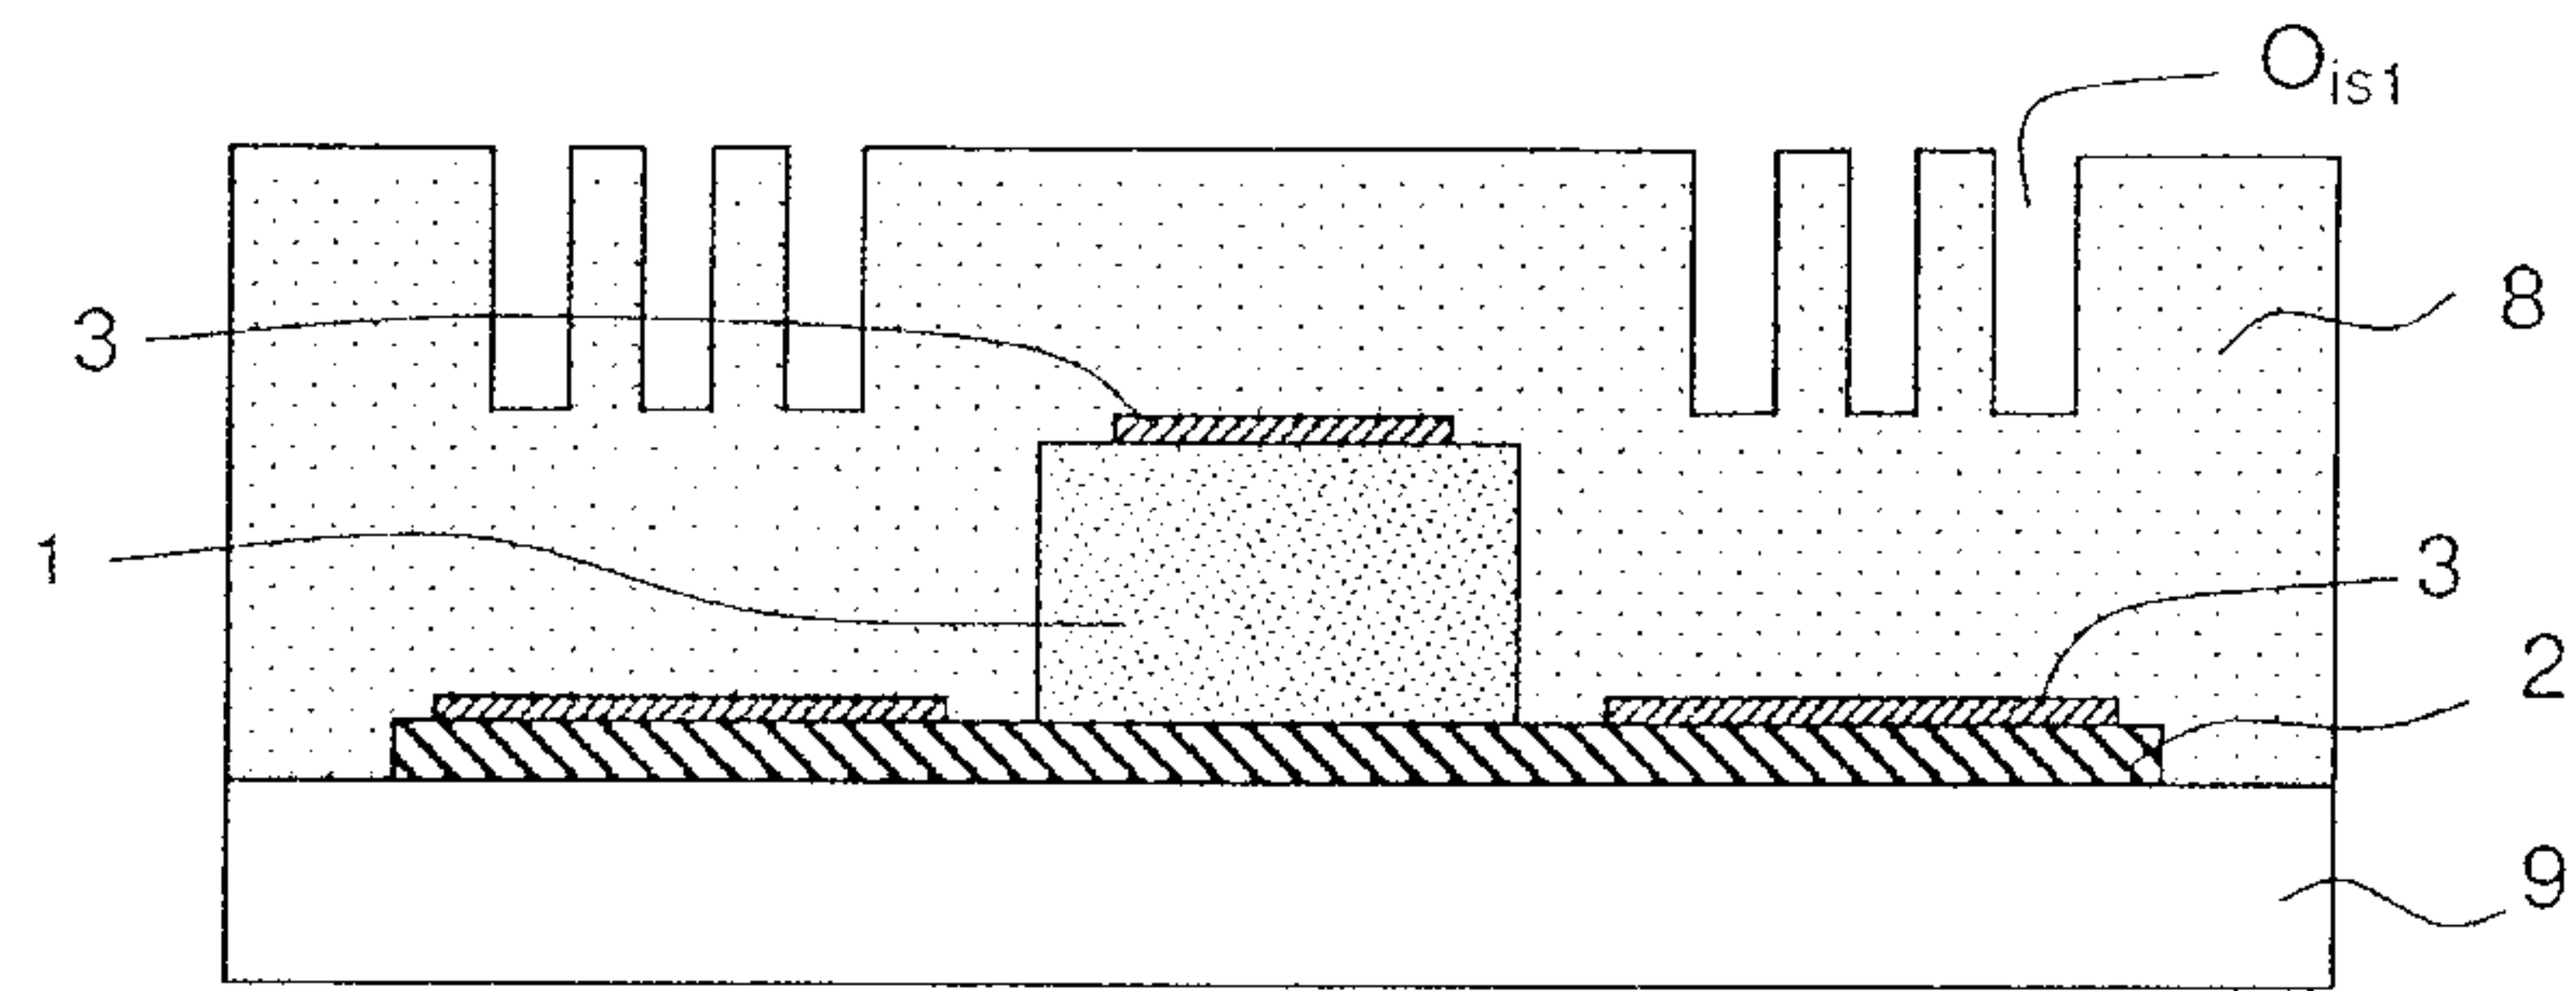


FIG. 16b

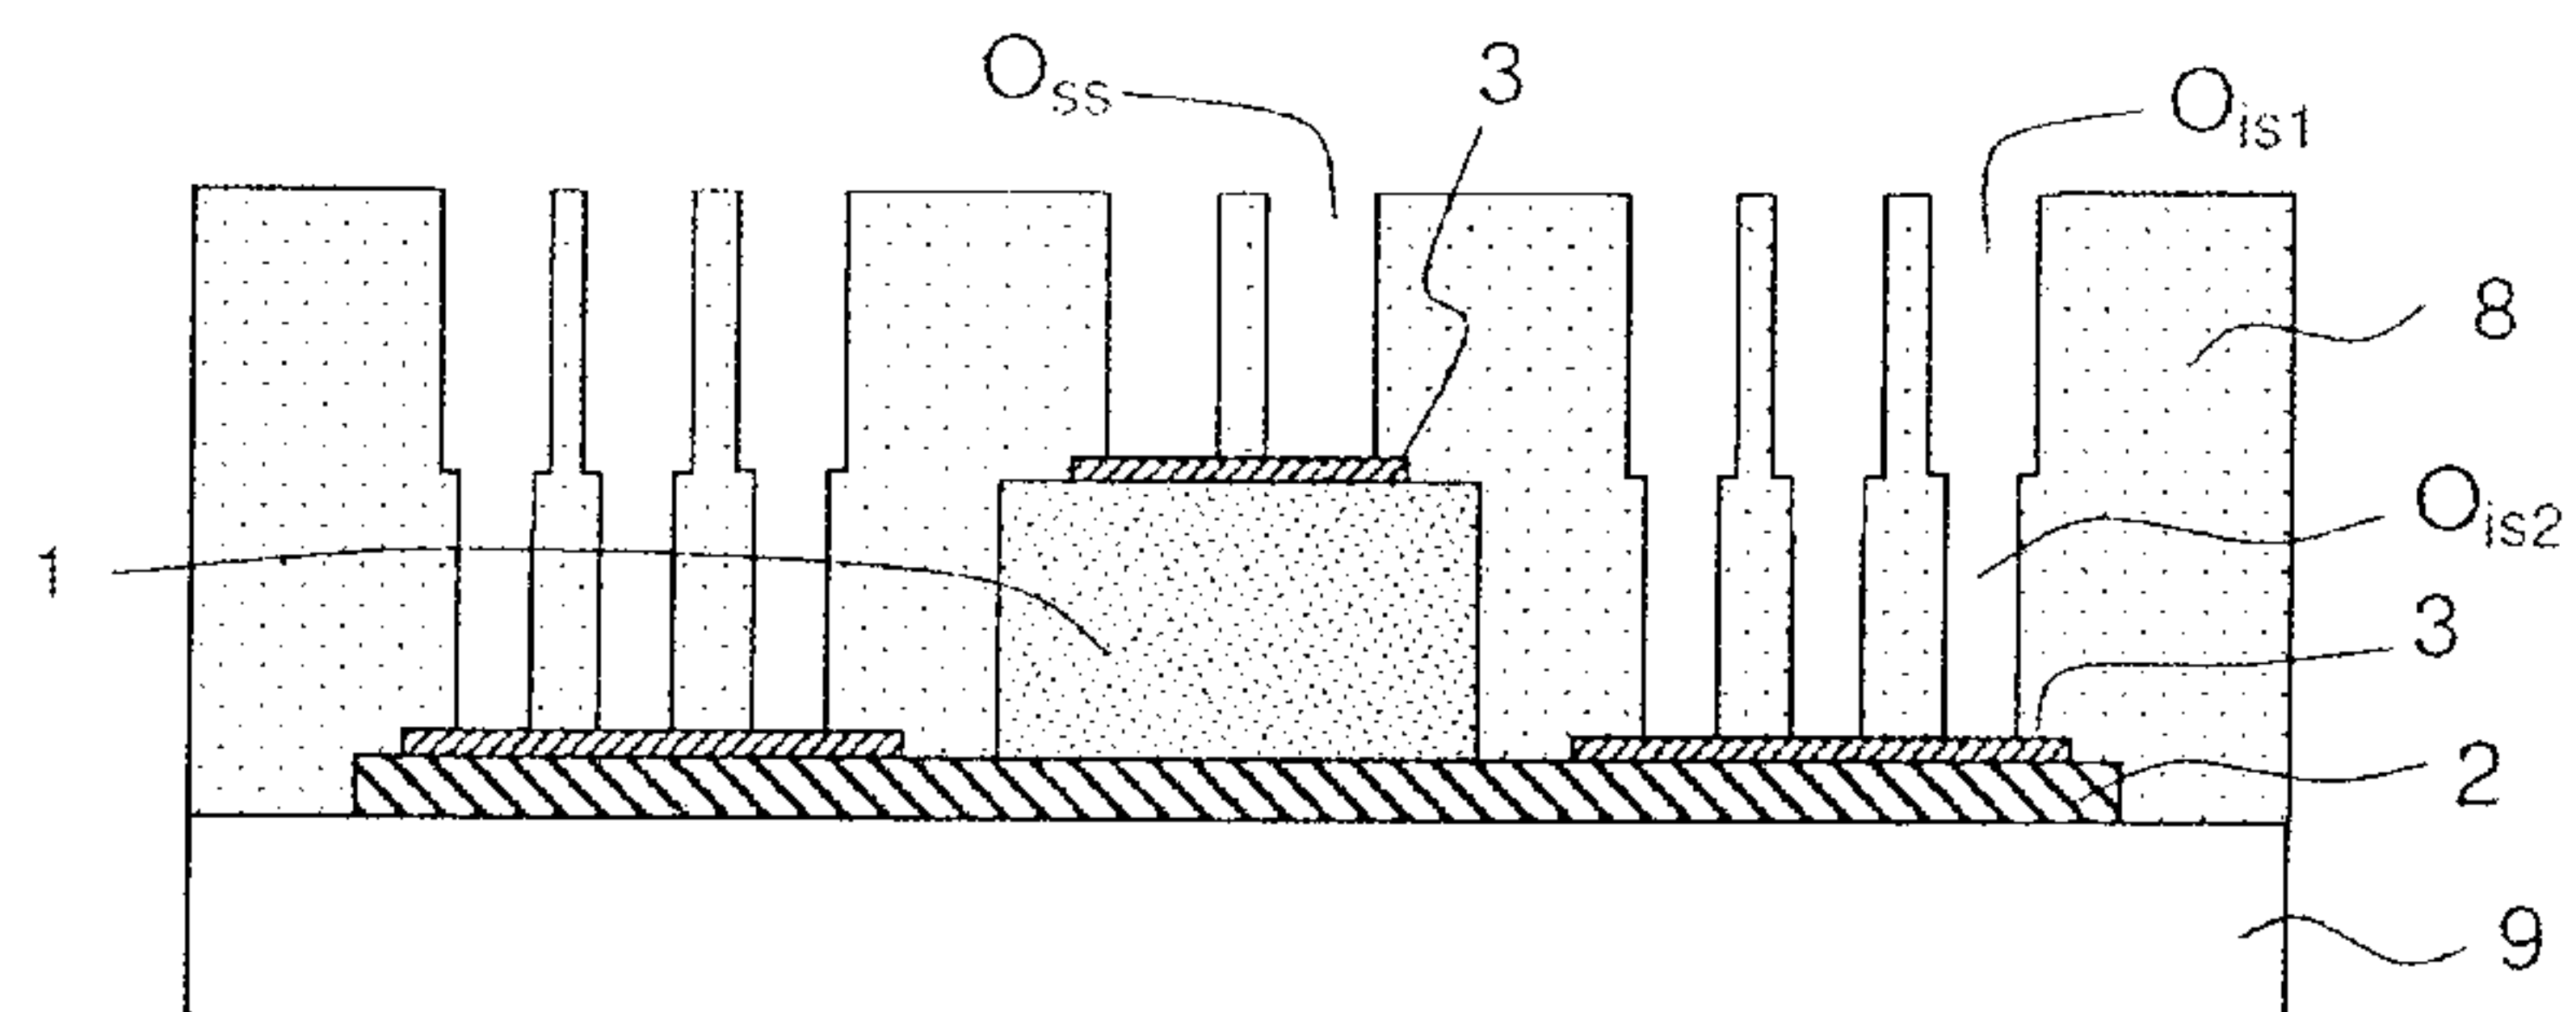


FIG. 16c

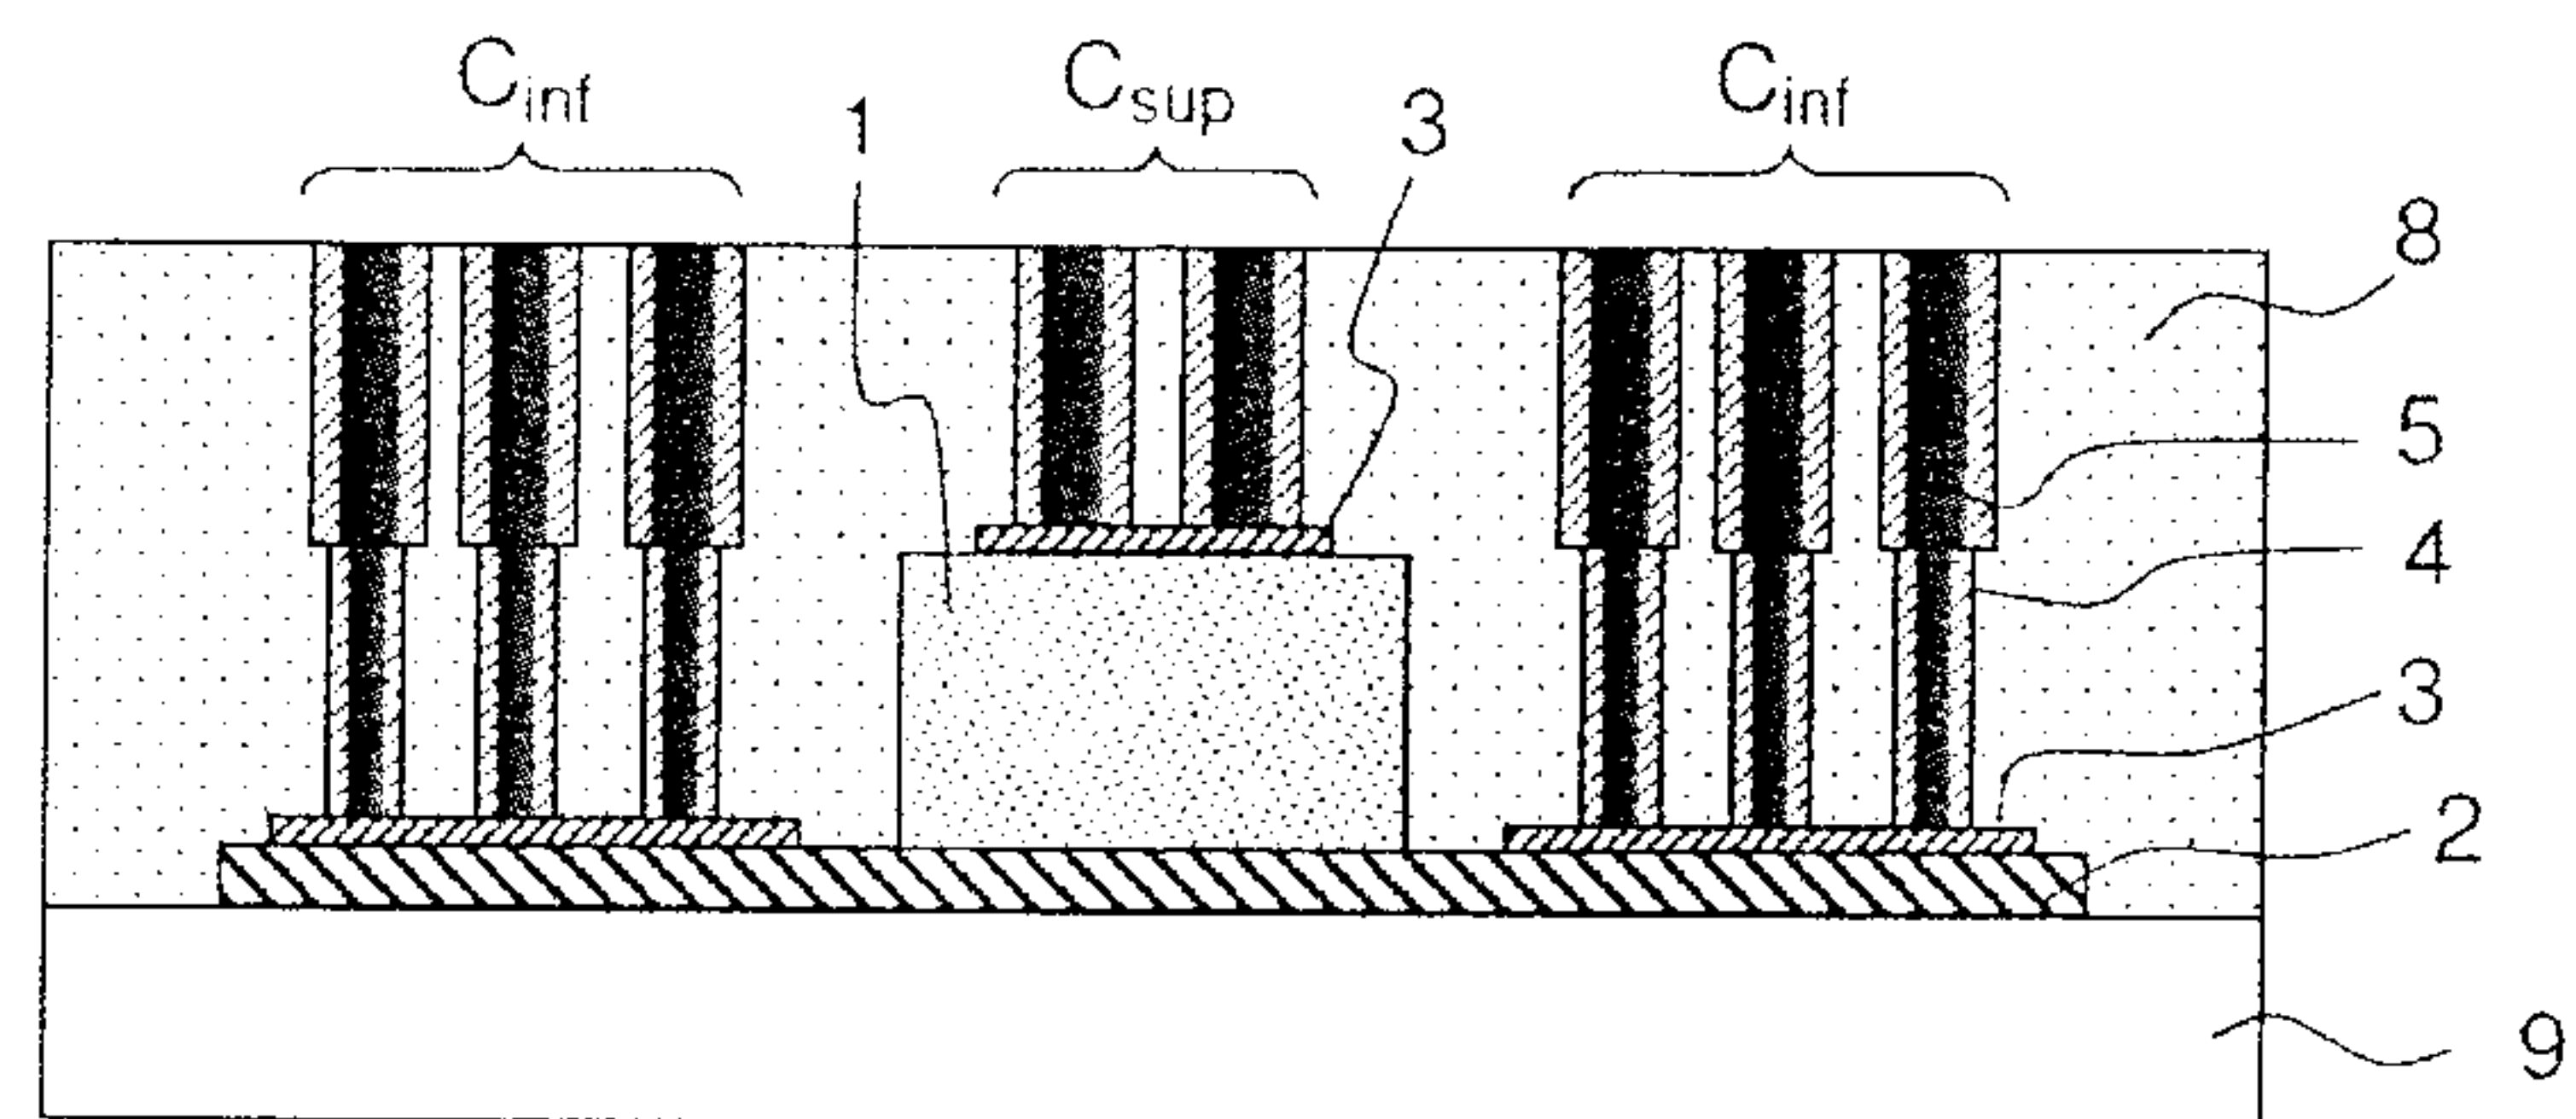


FIG. 16d

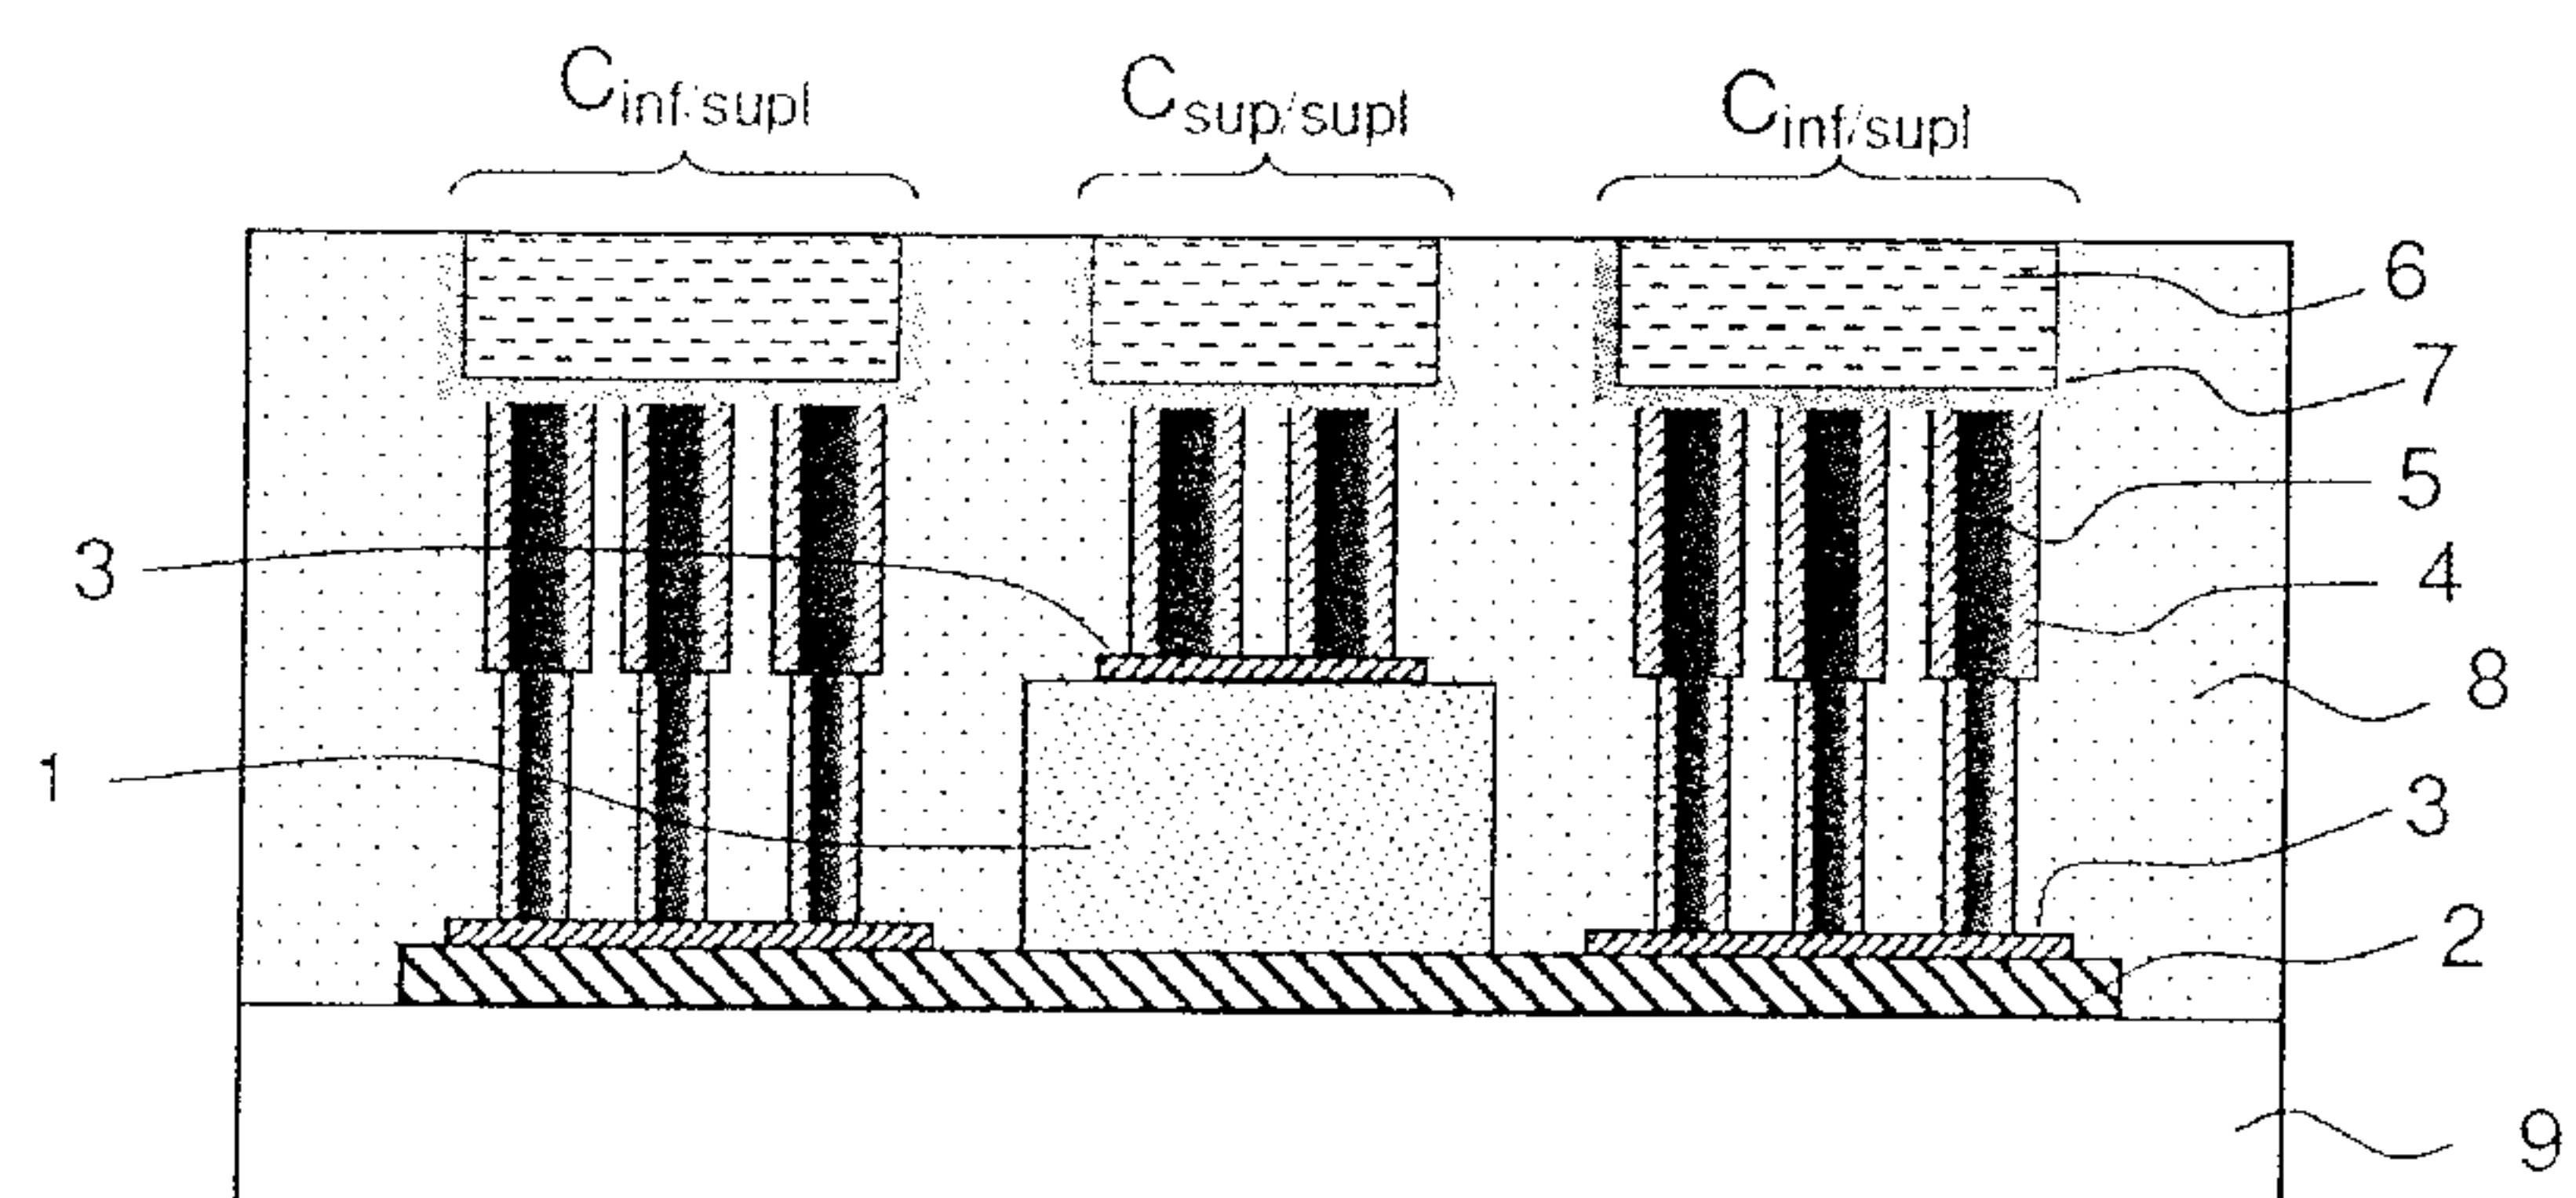


FIG. 17

26/29

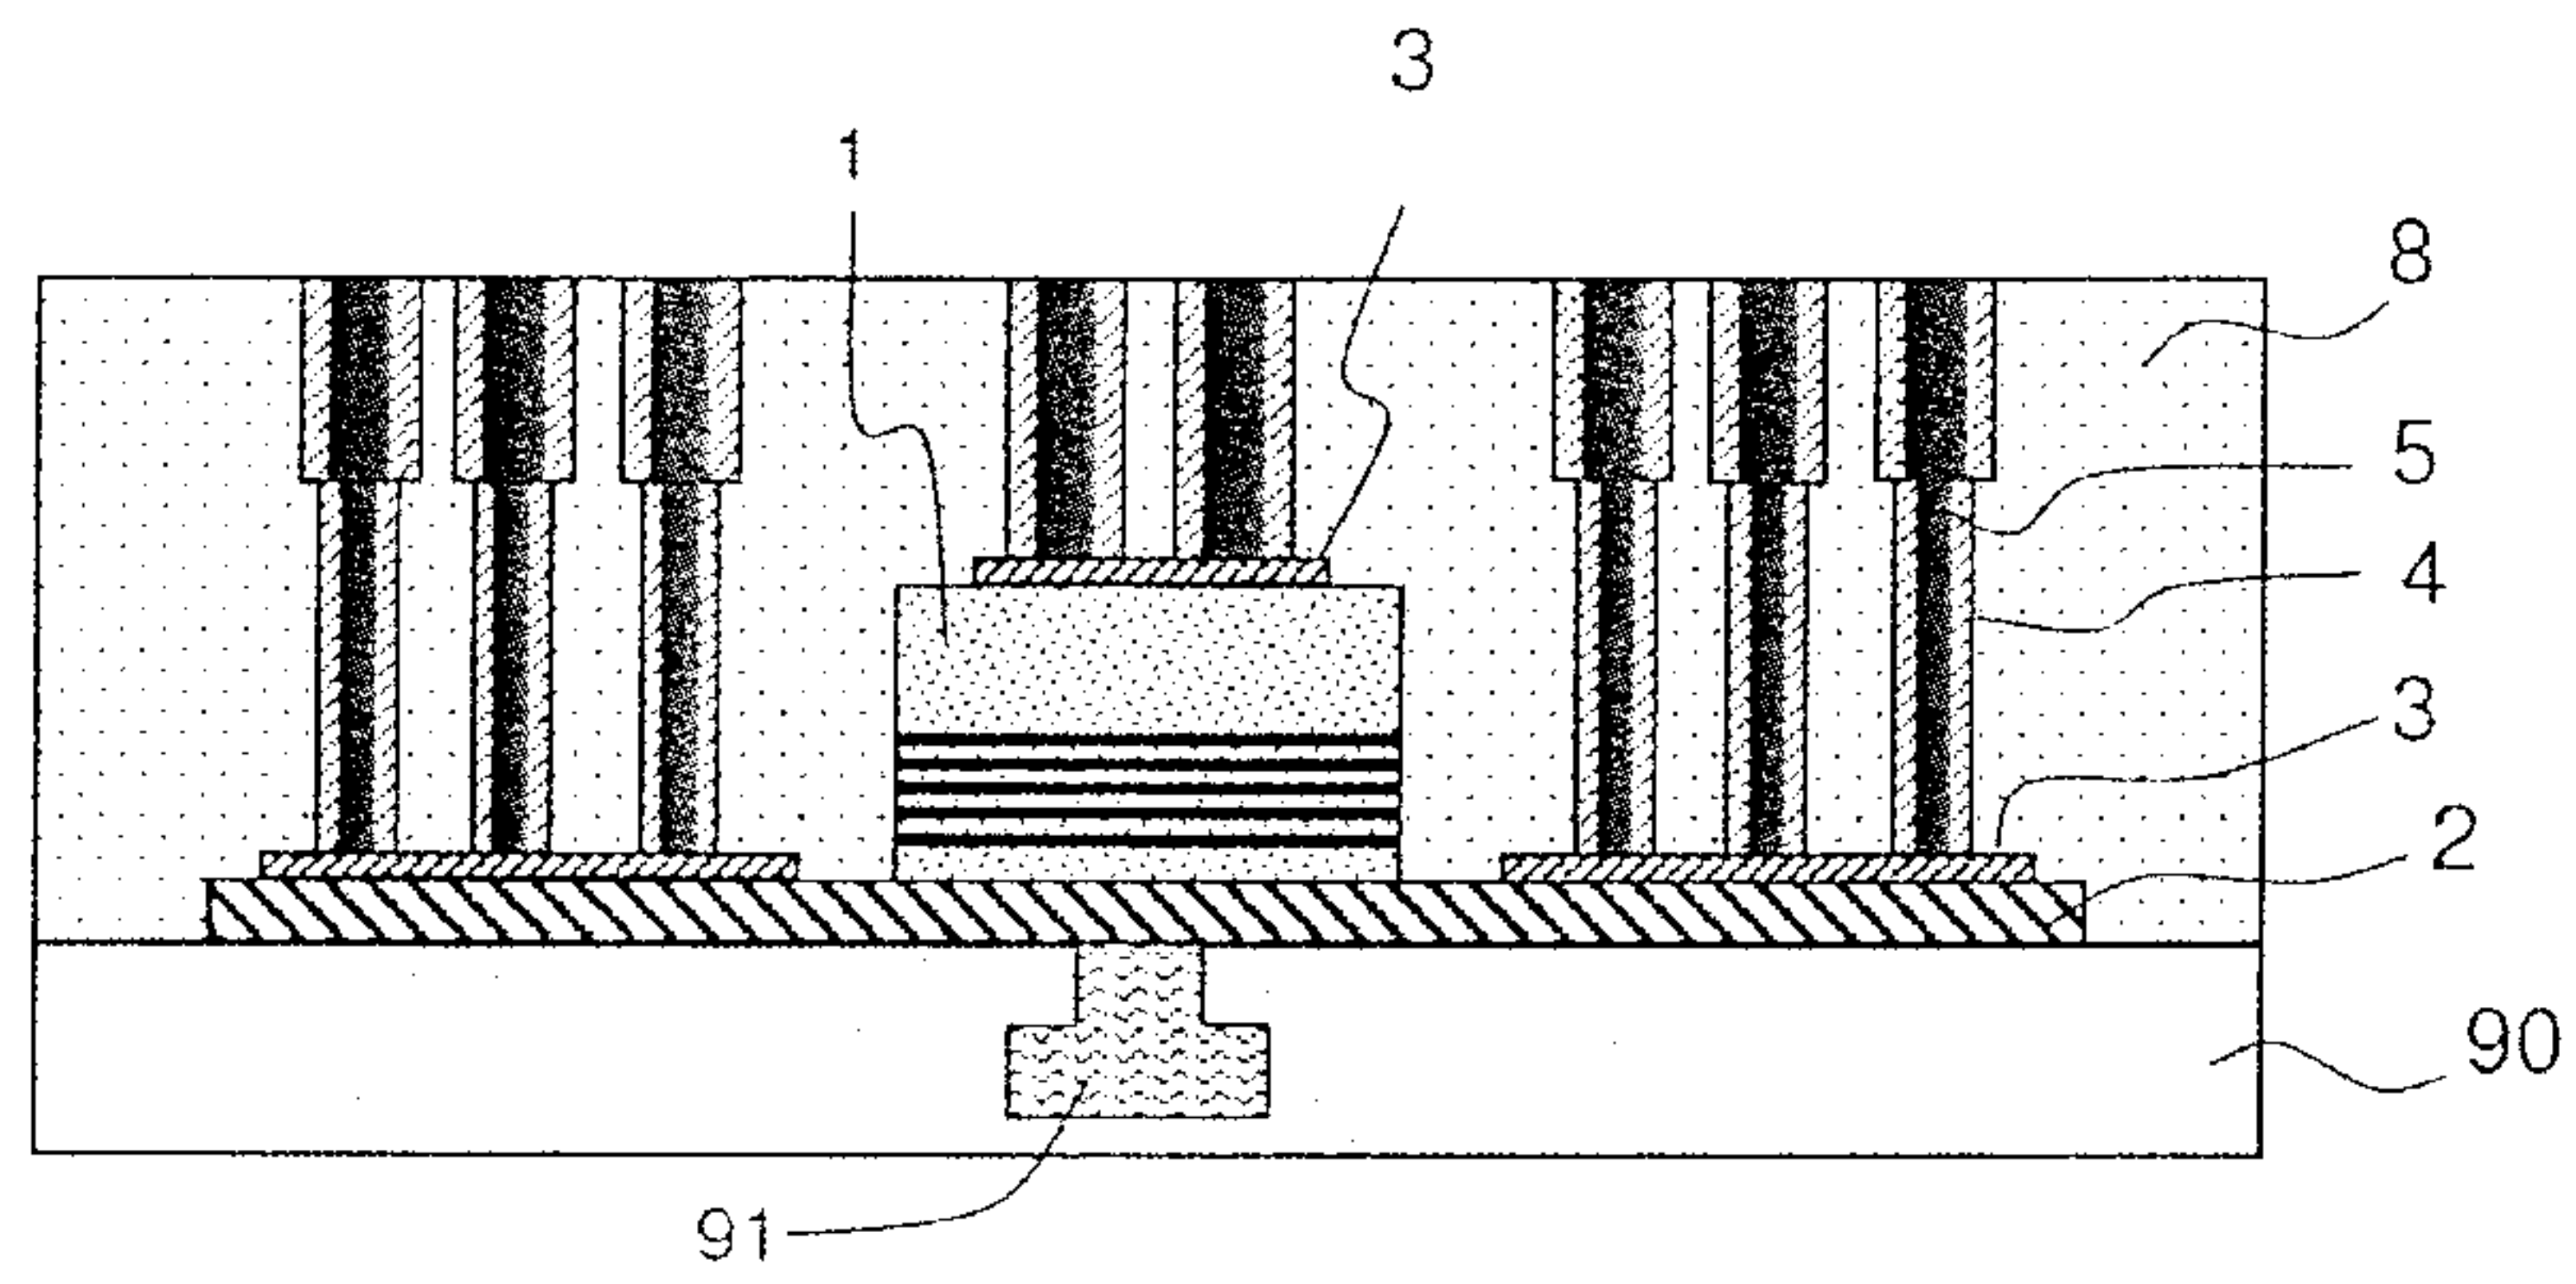


FIG. 18

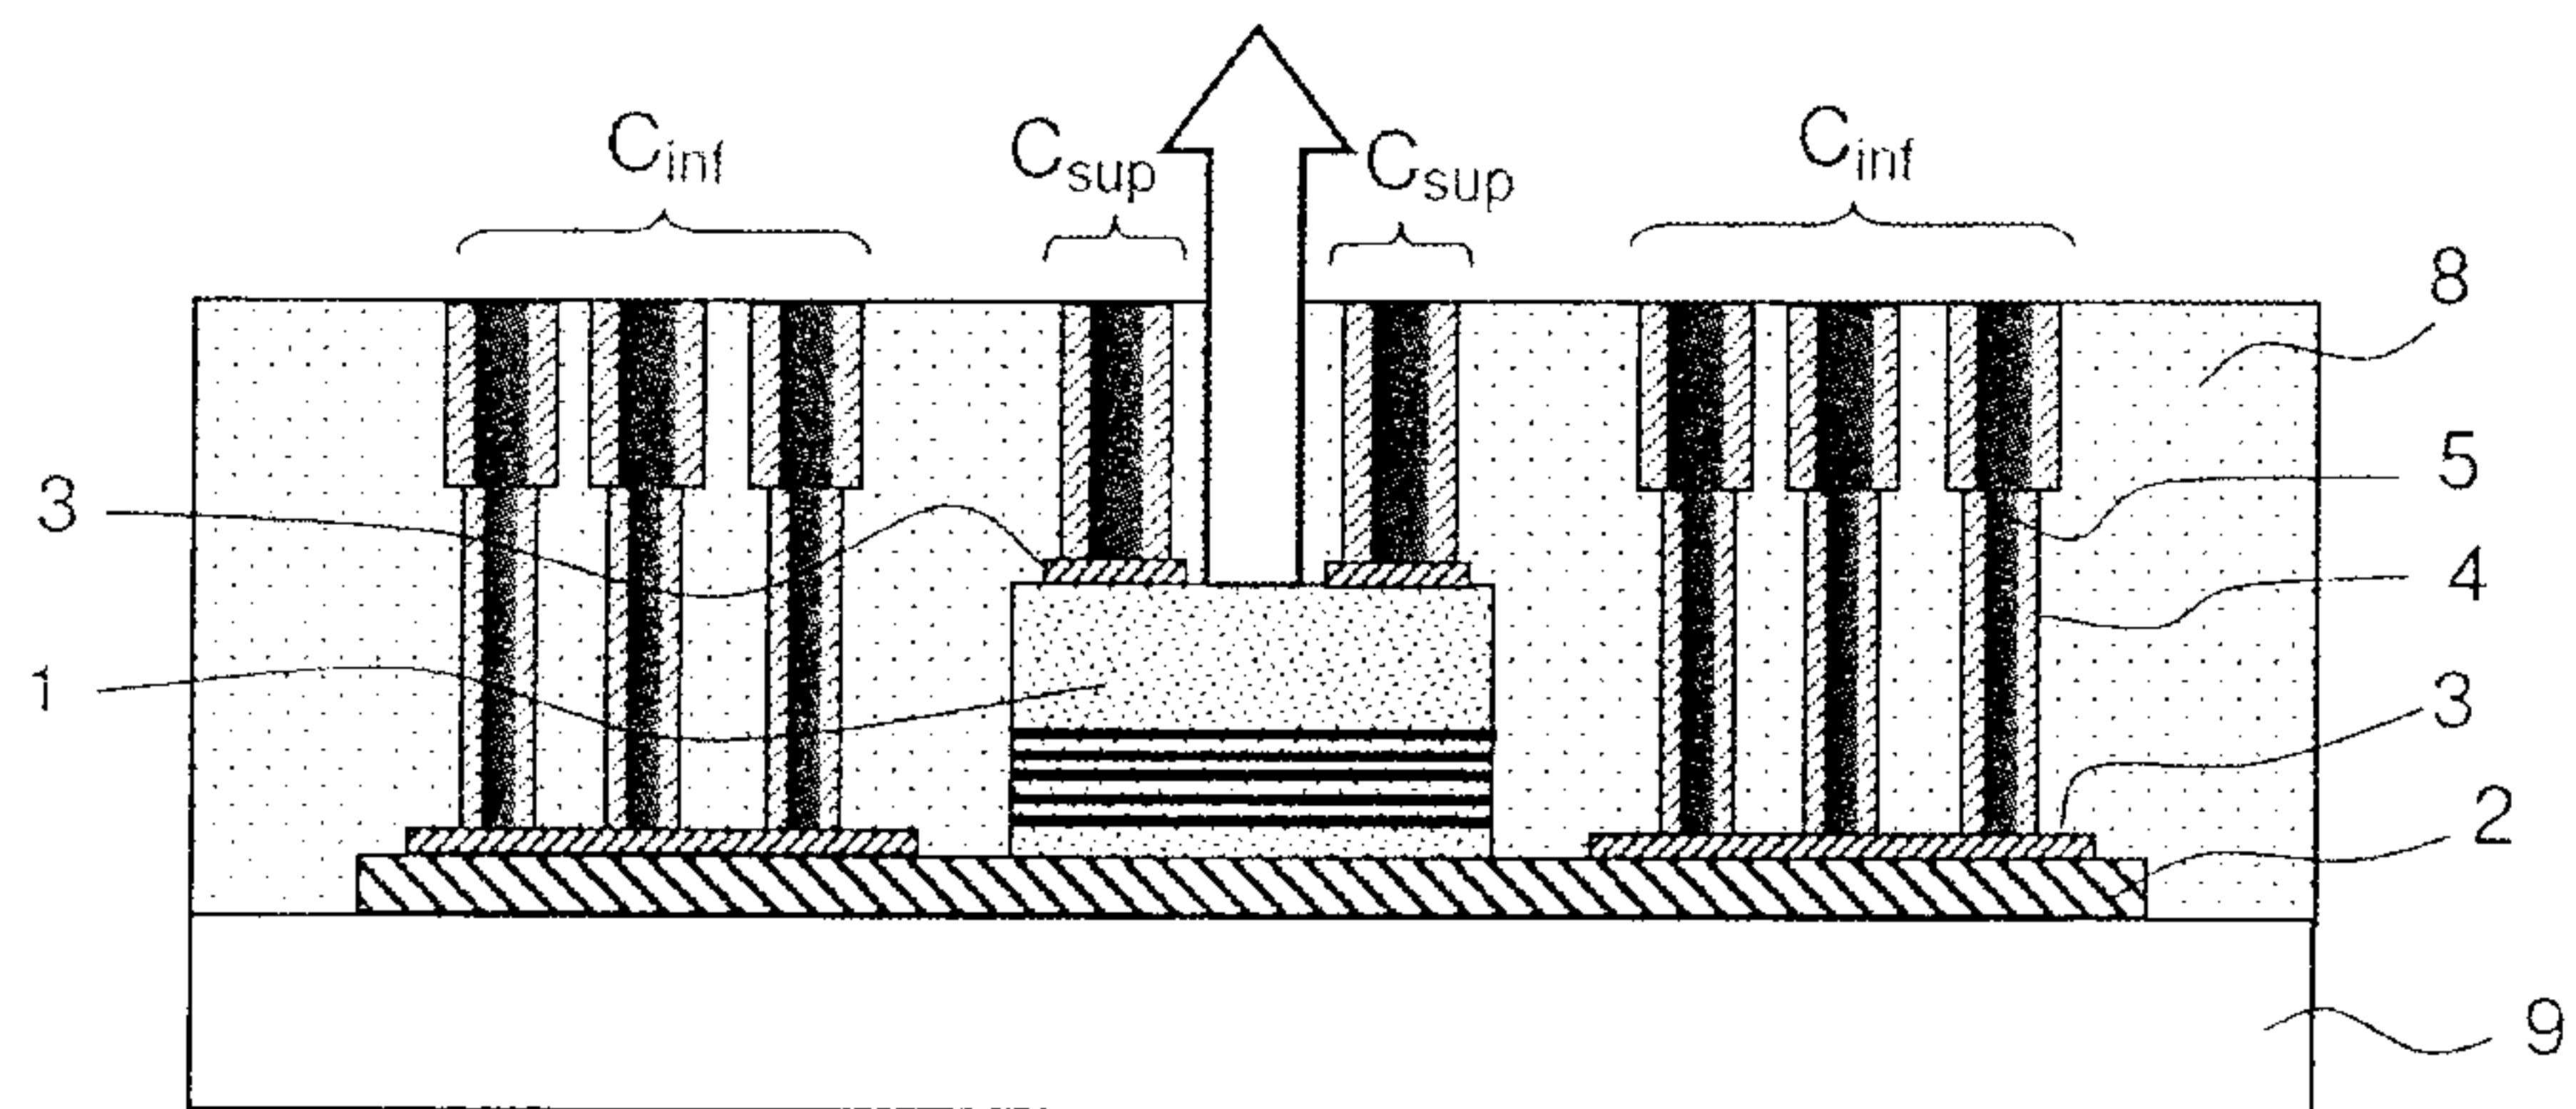


FIG. 19

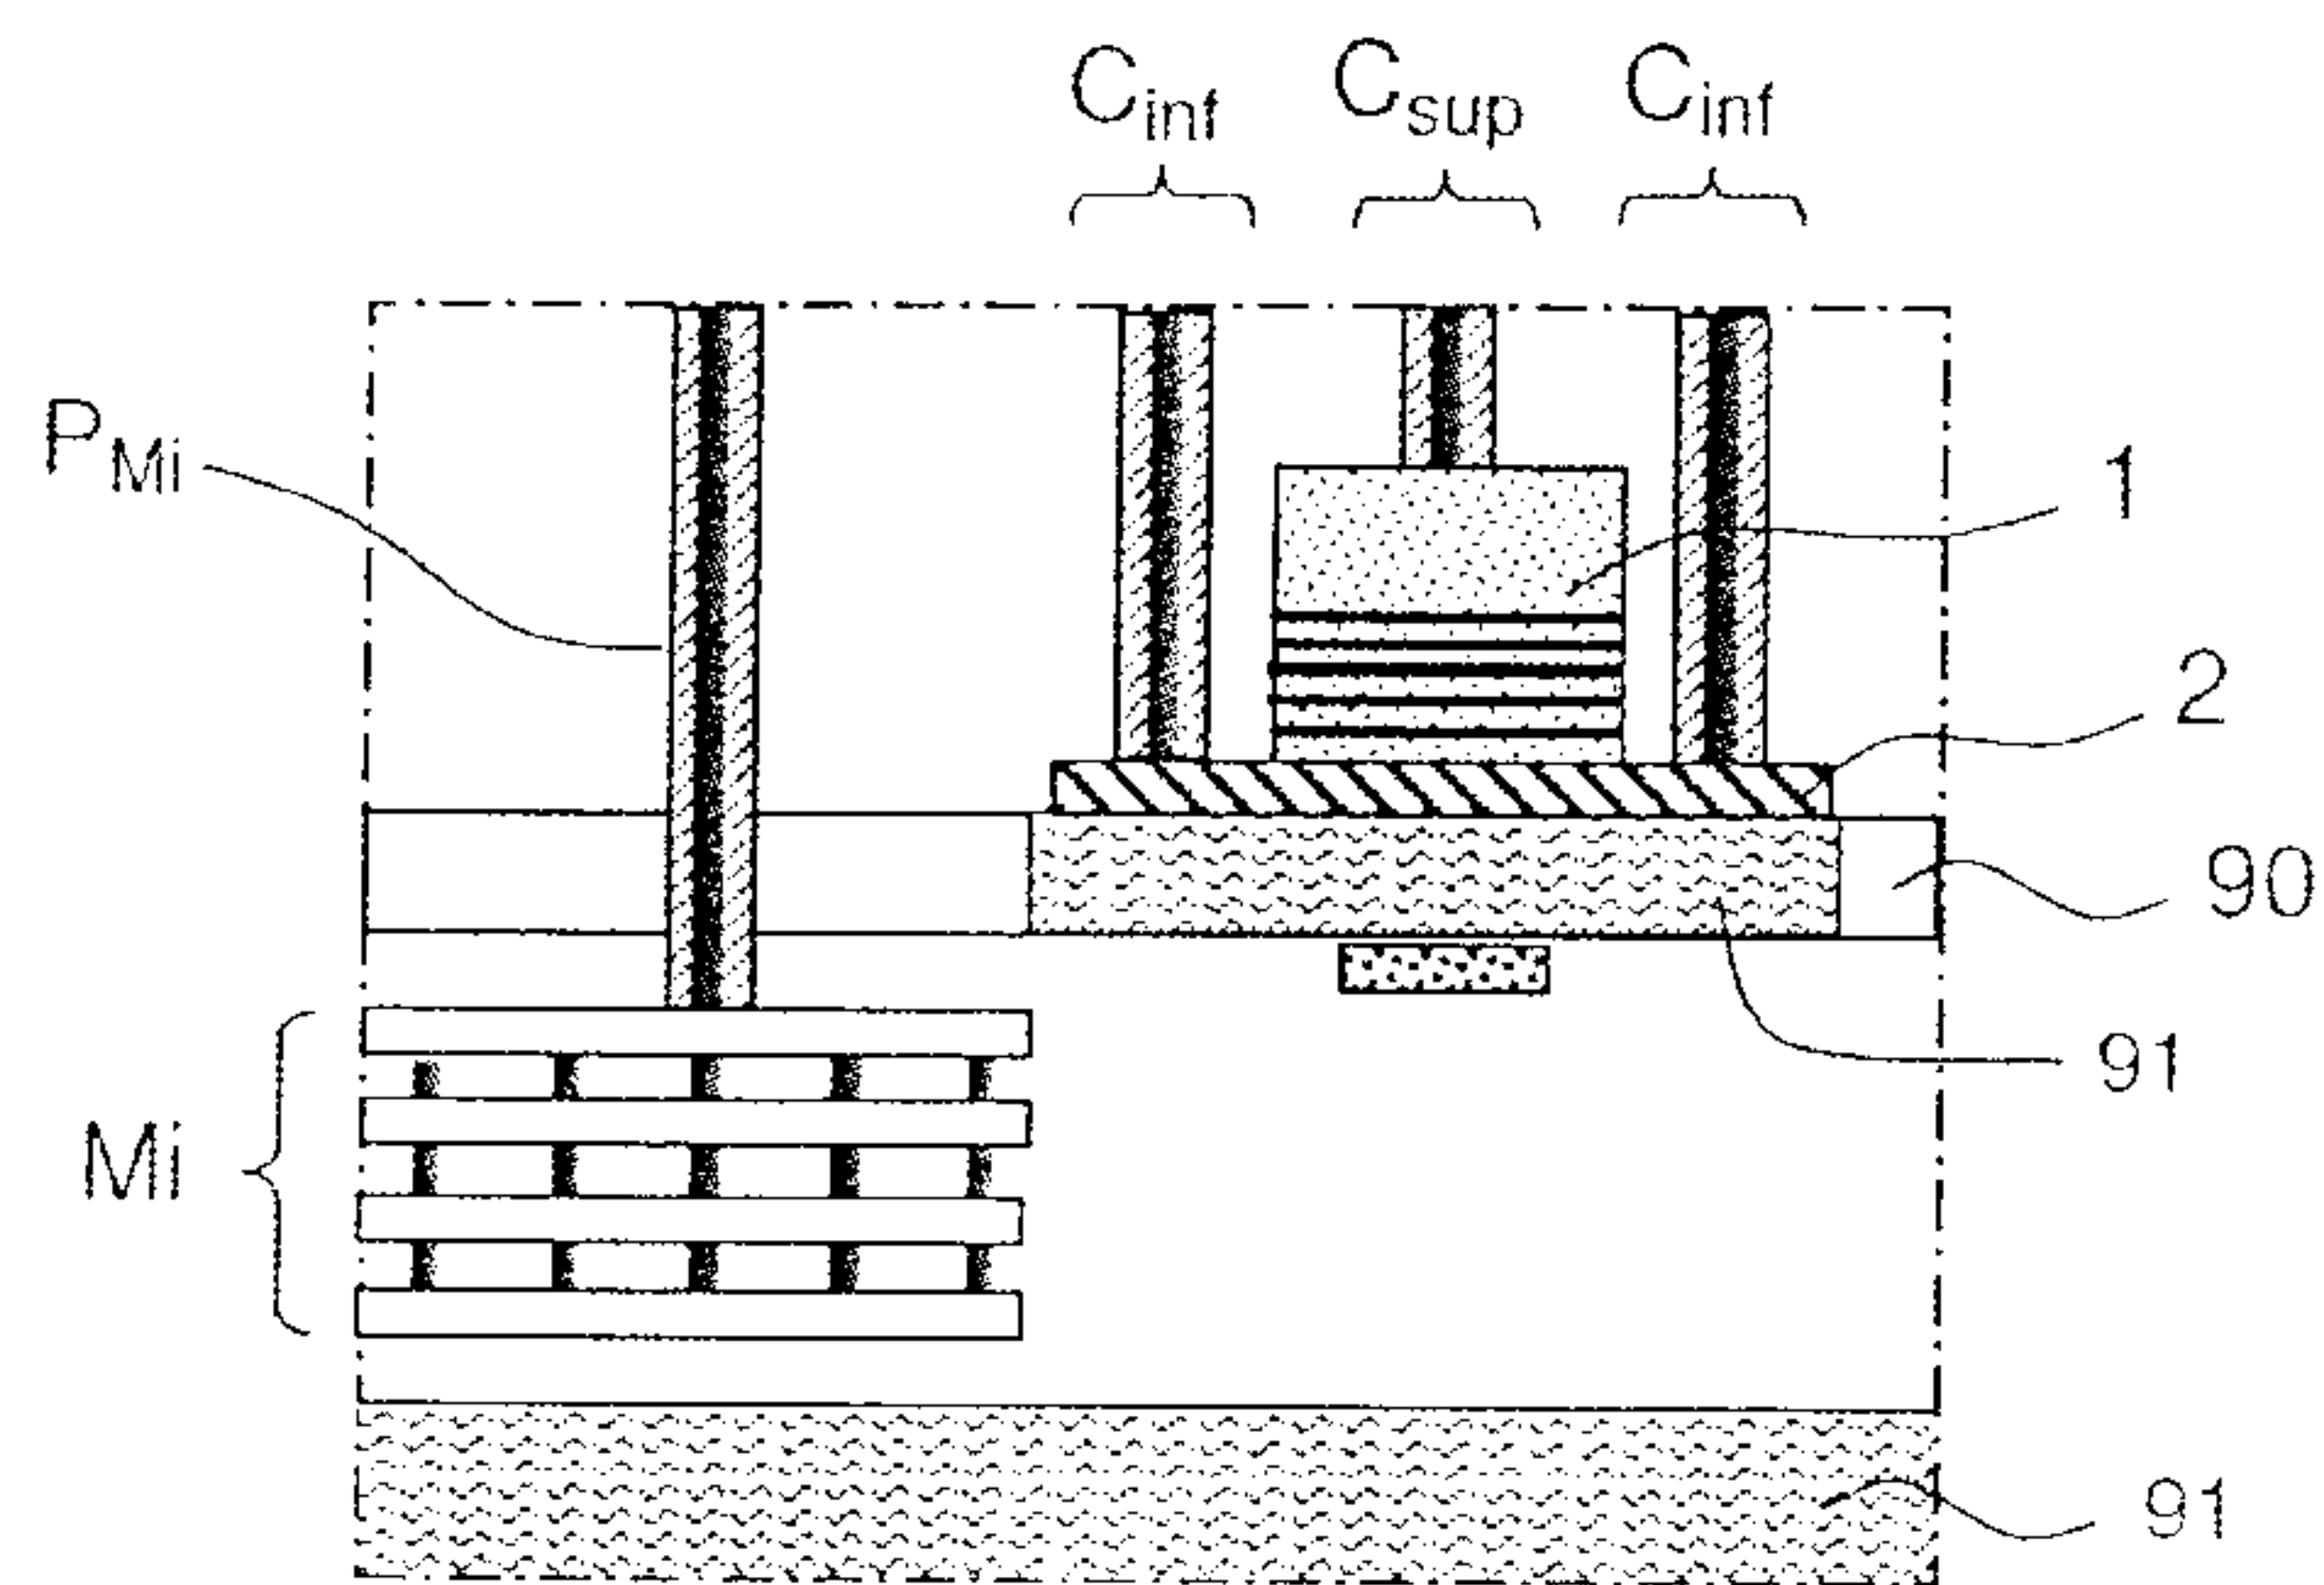


FIG. 20

27/29

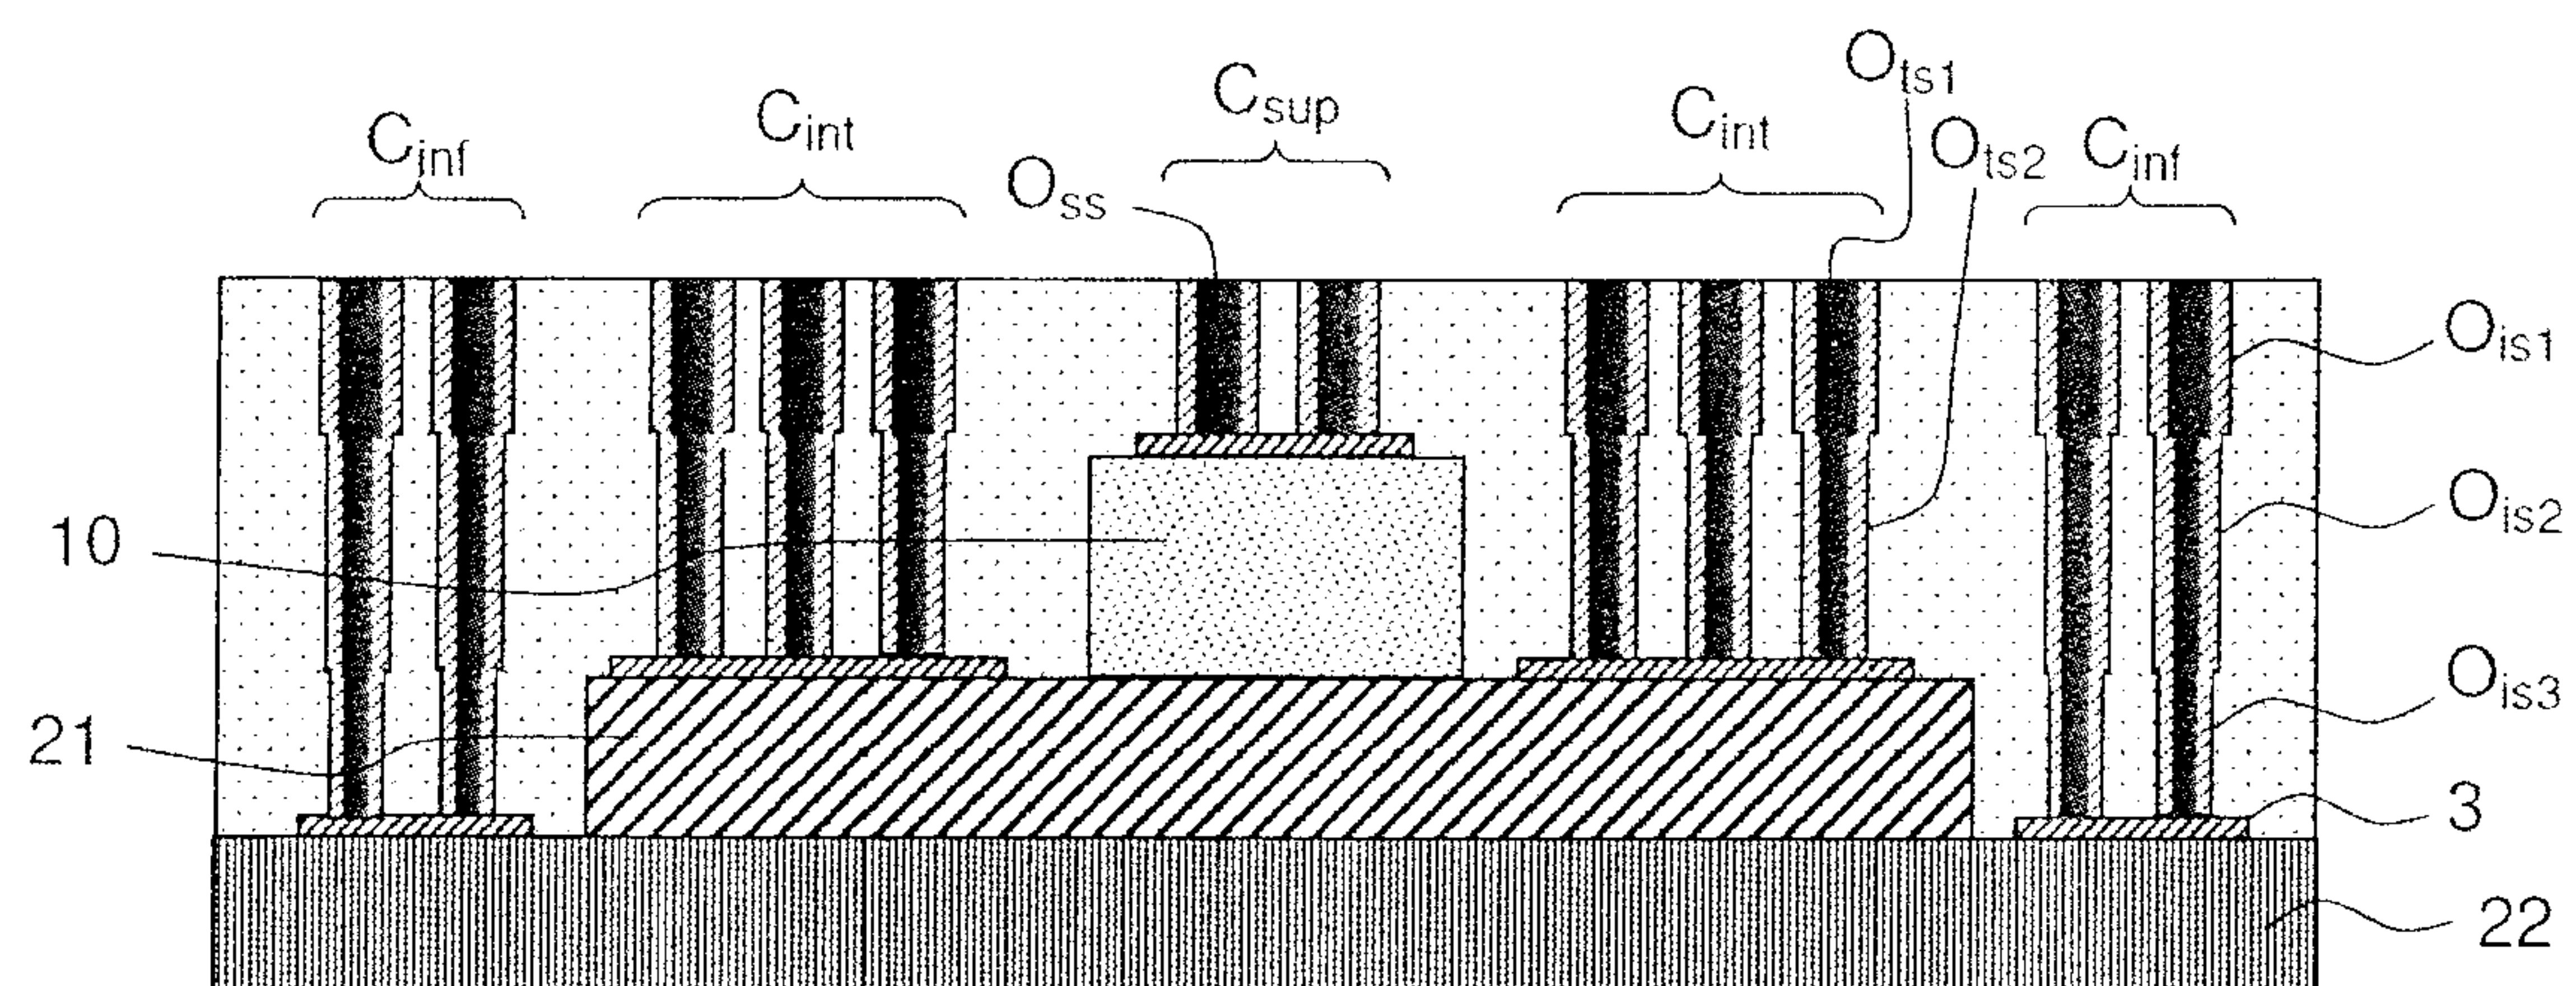


FIG.21

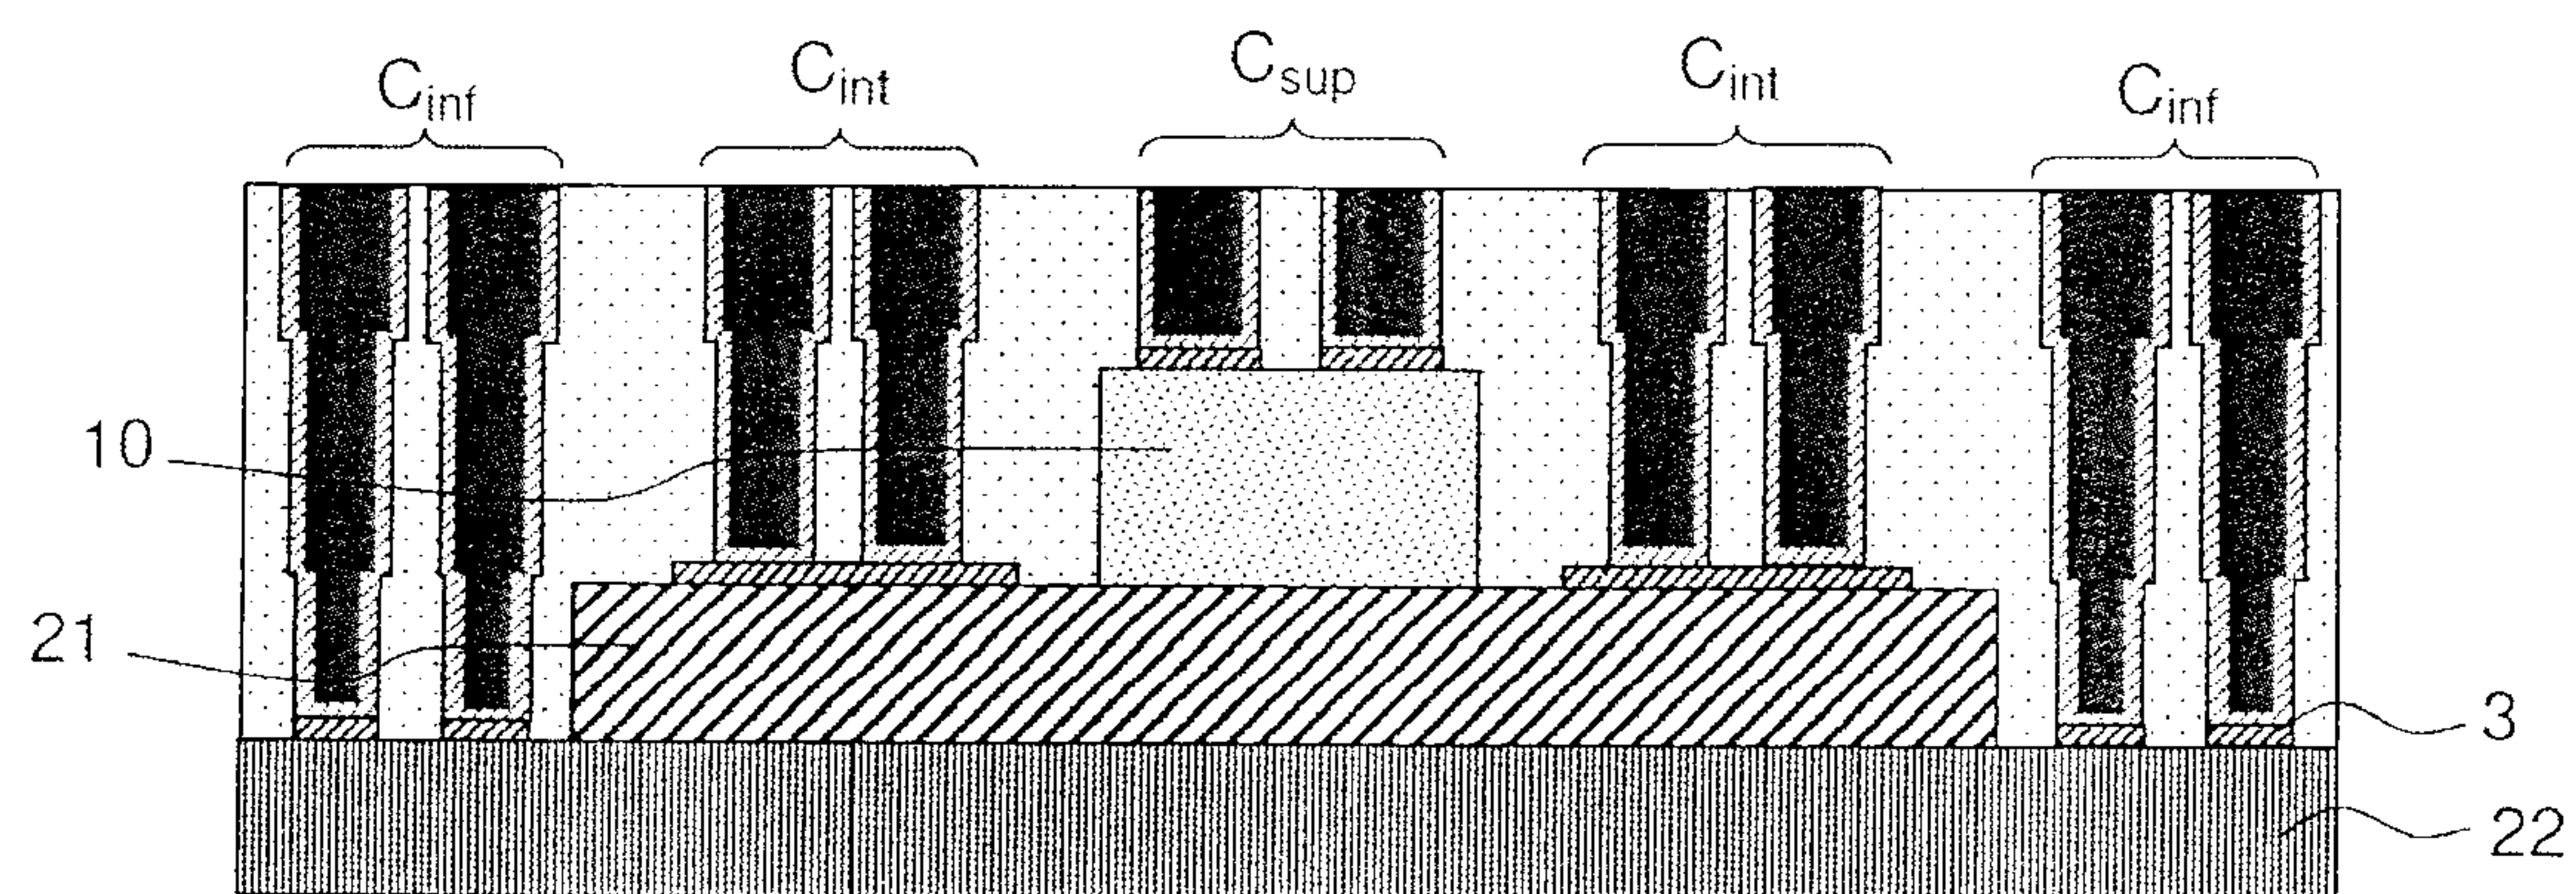


FIG.22

28/29

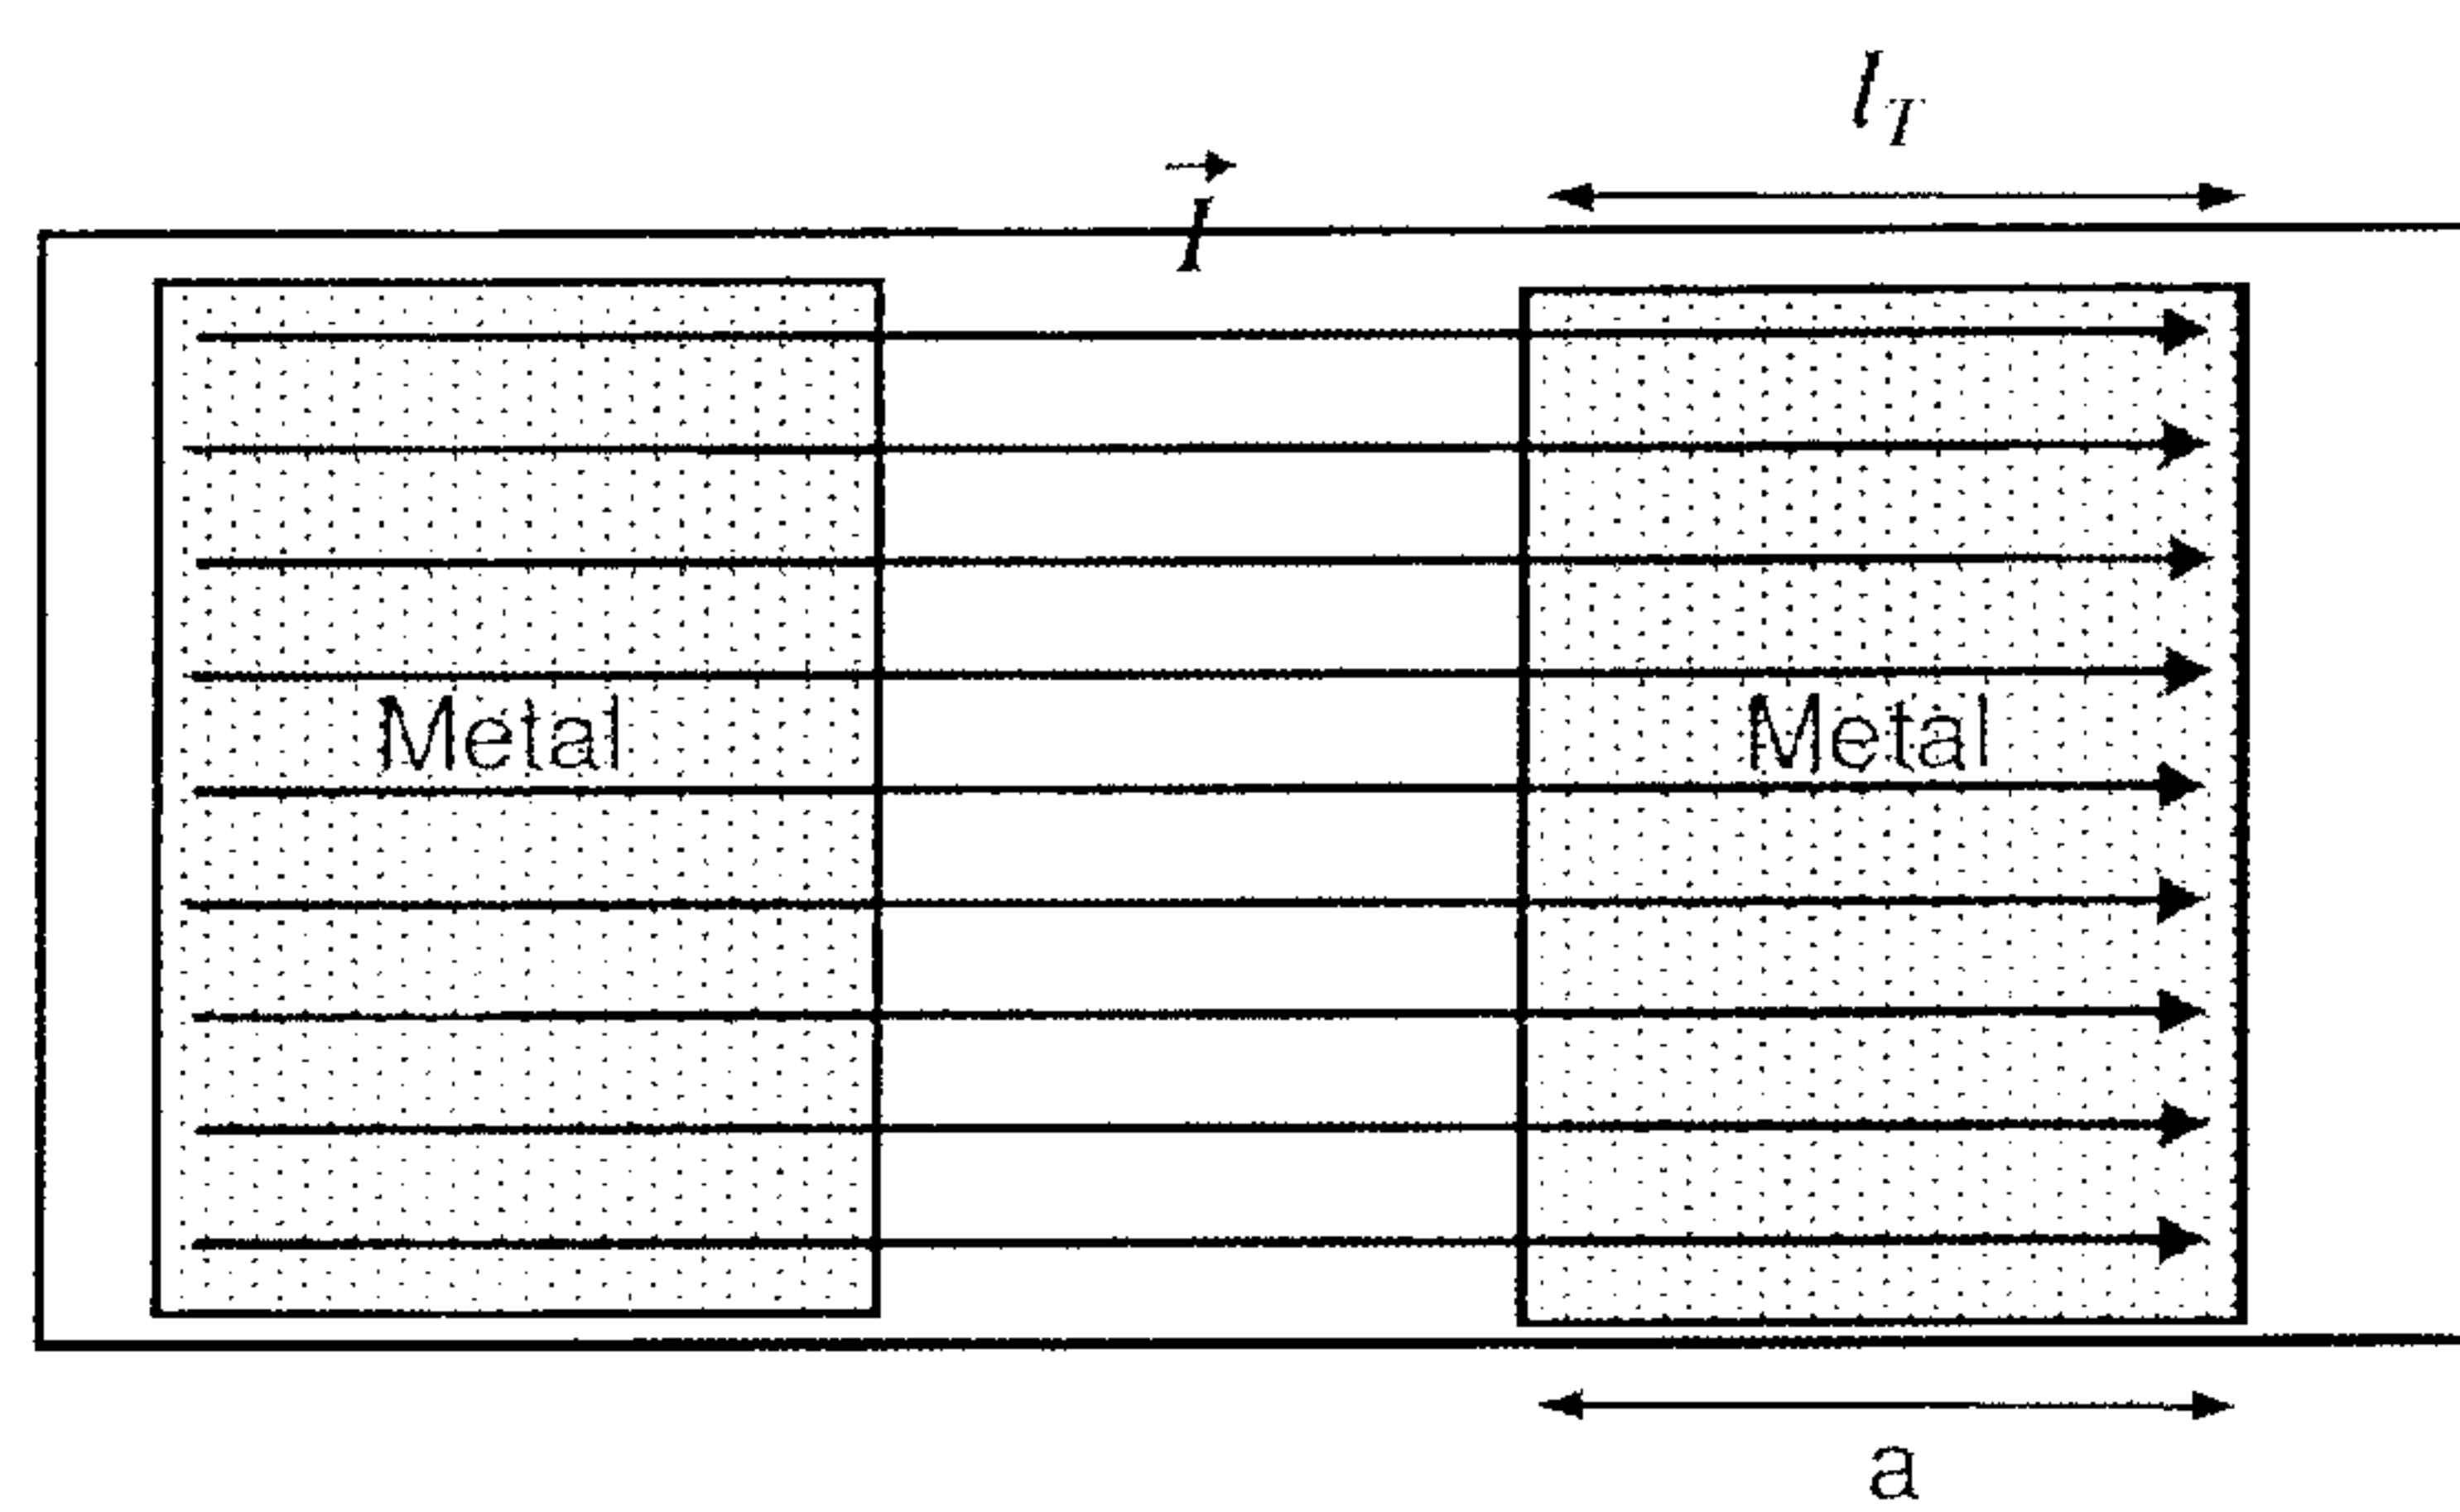


FIG.23a

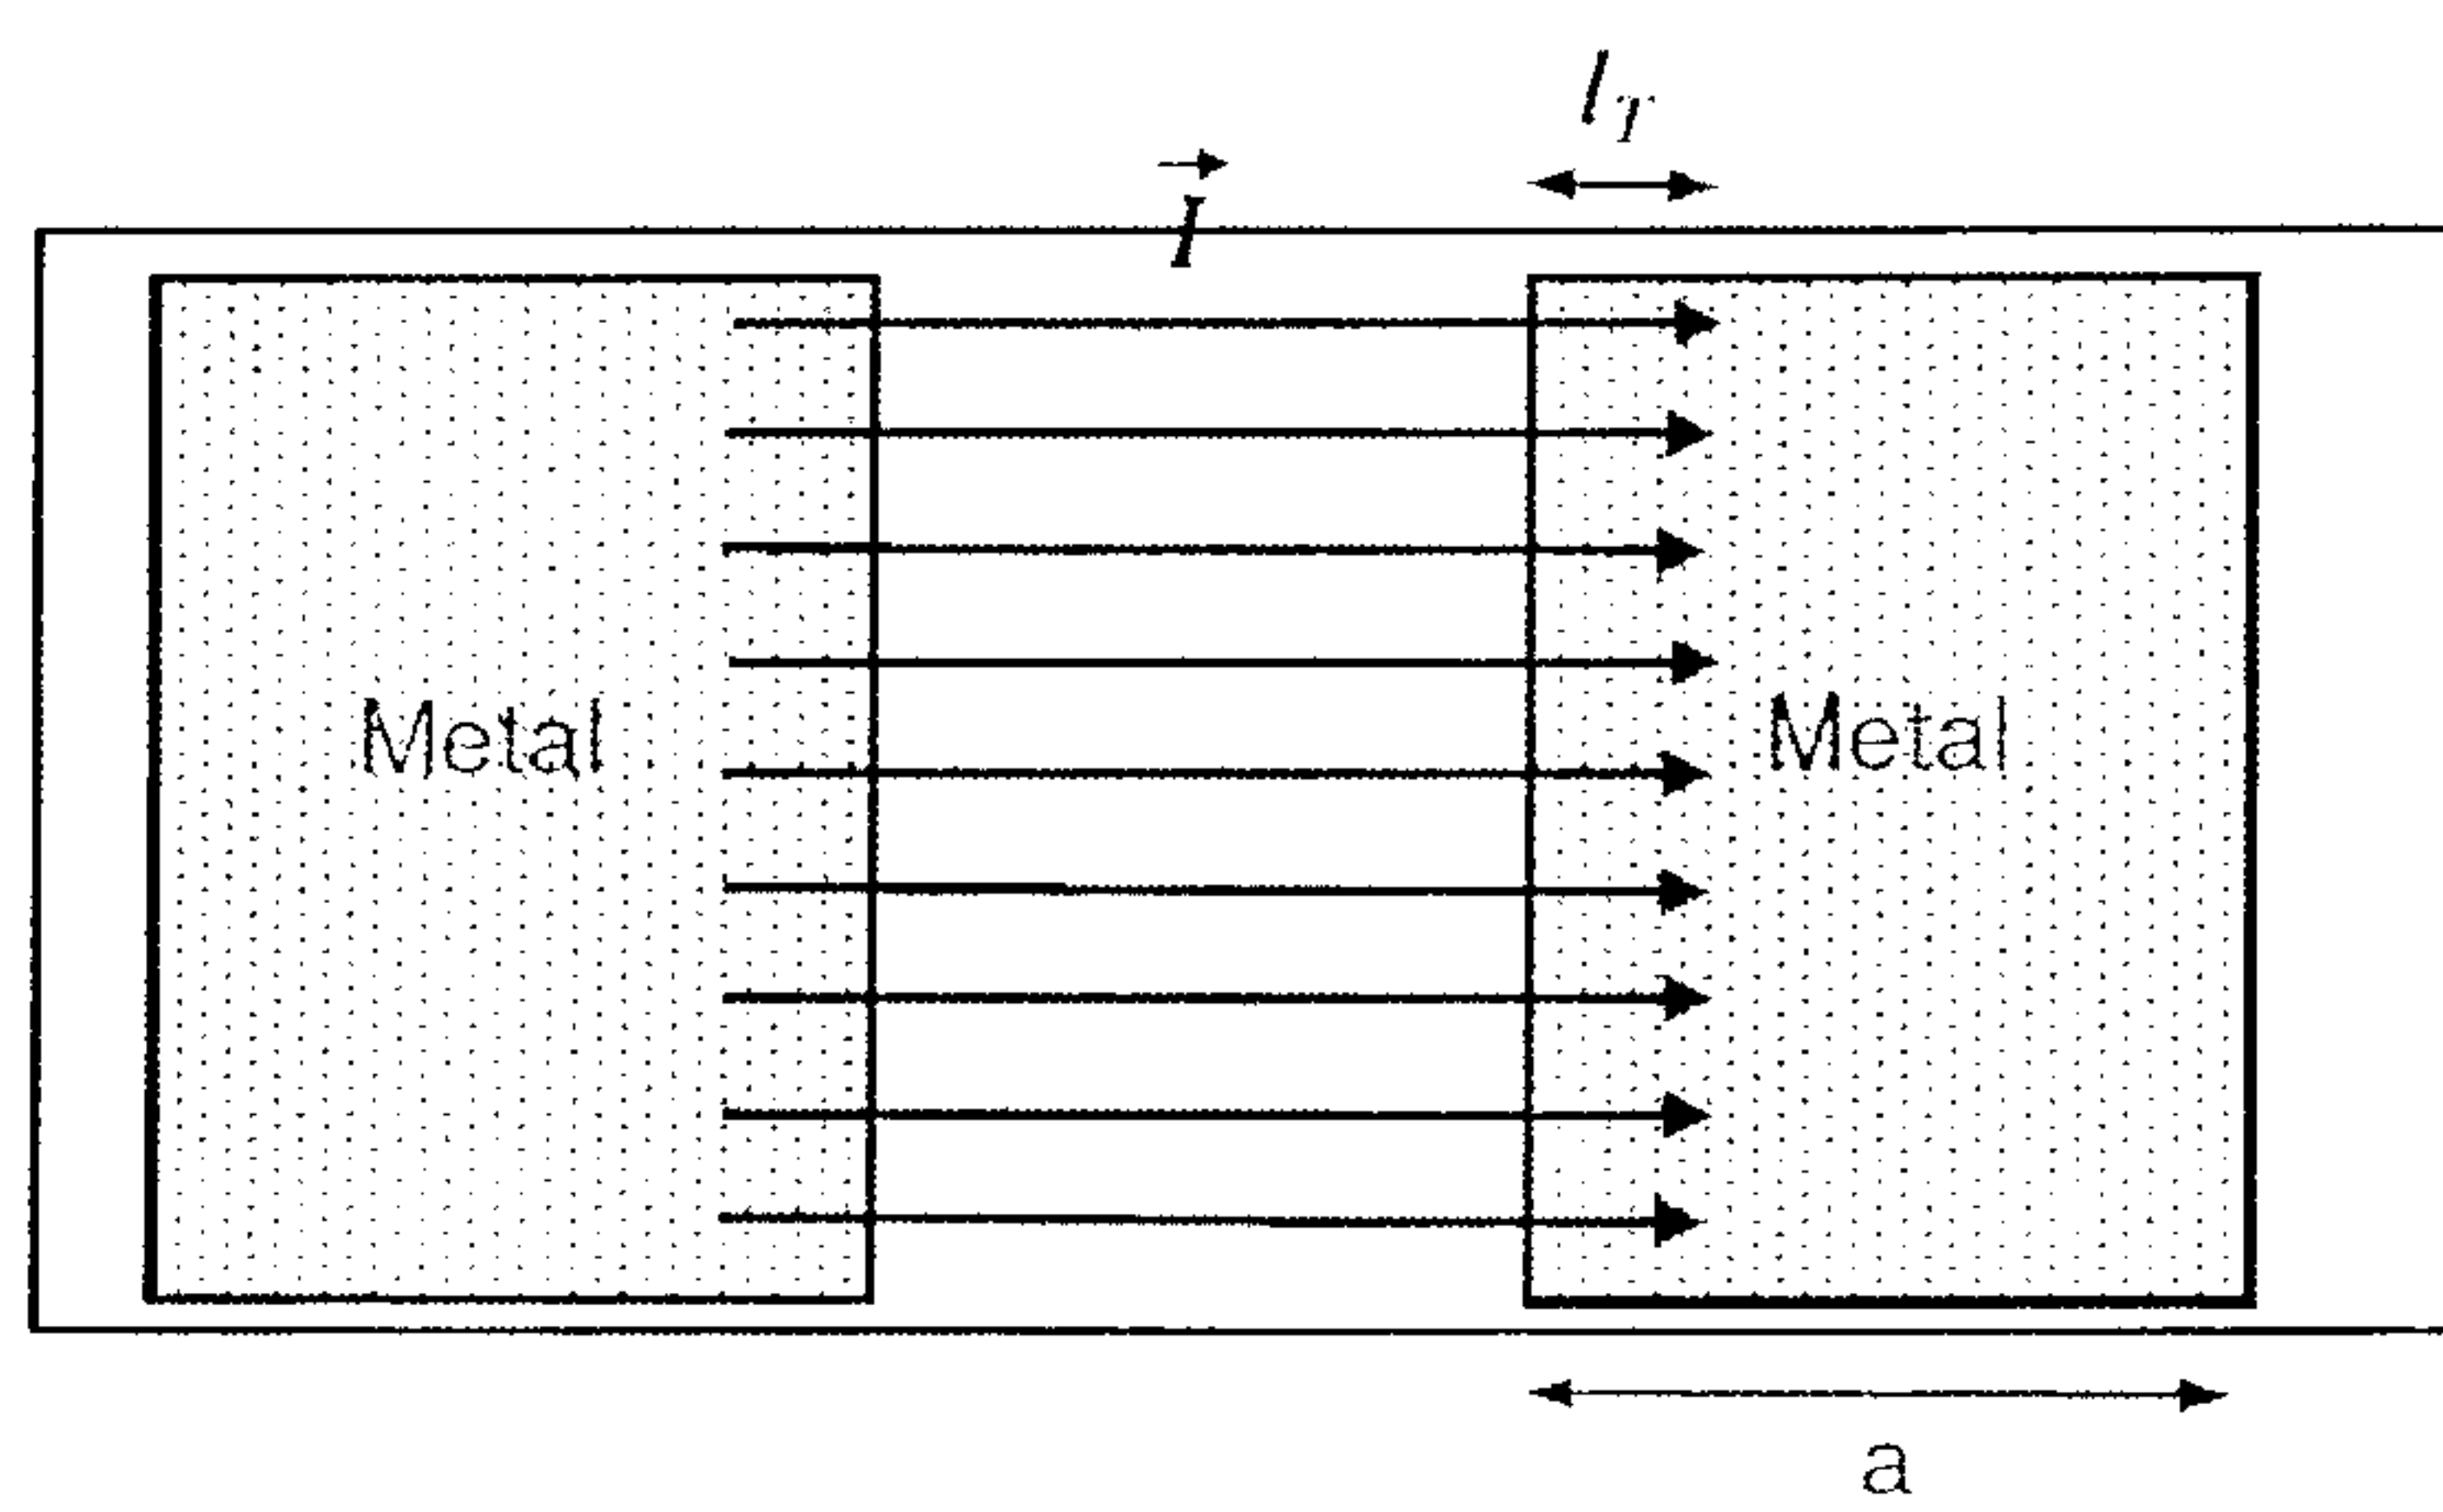


FIG.23b

29/29

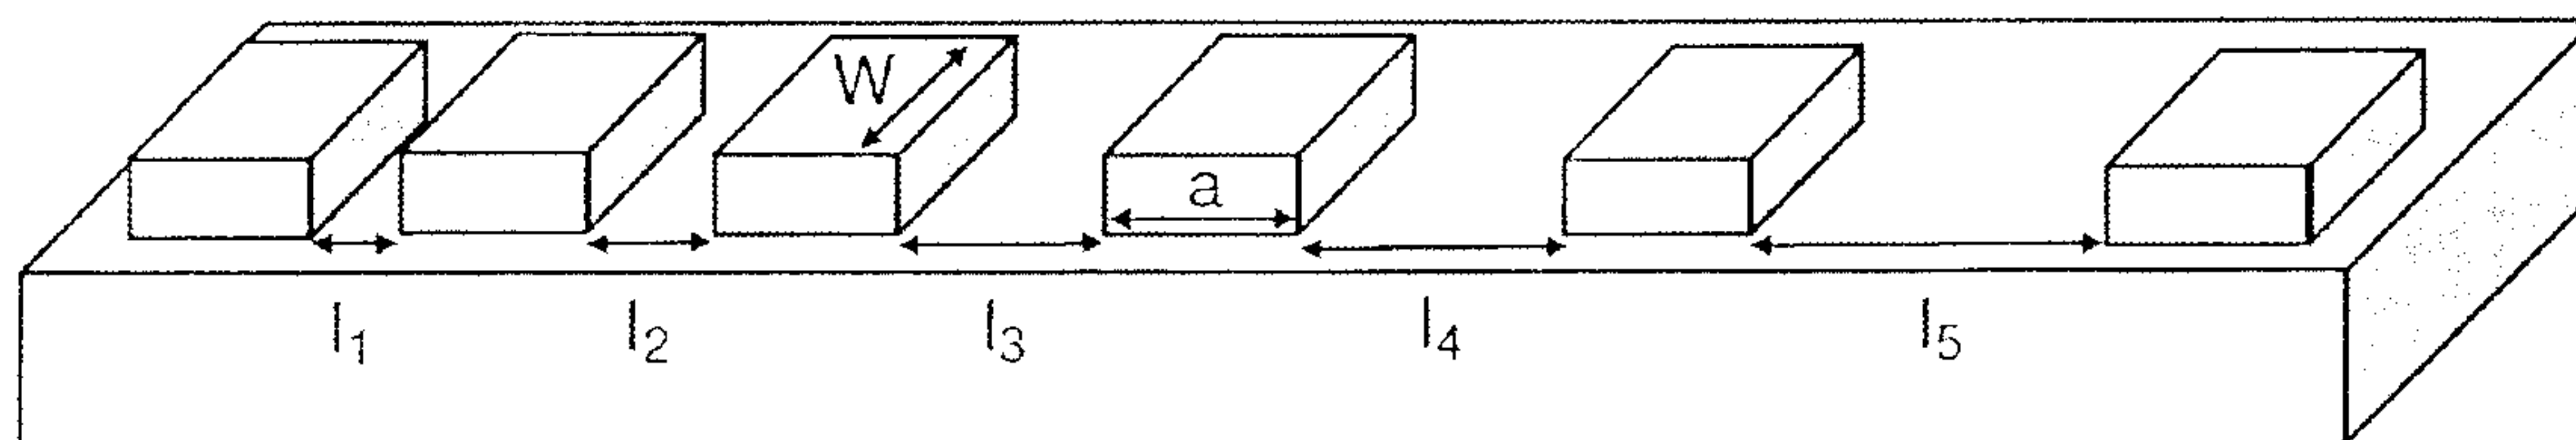


FIG.24

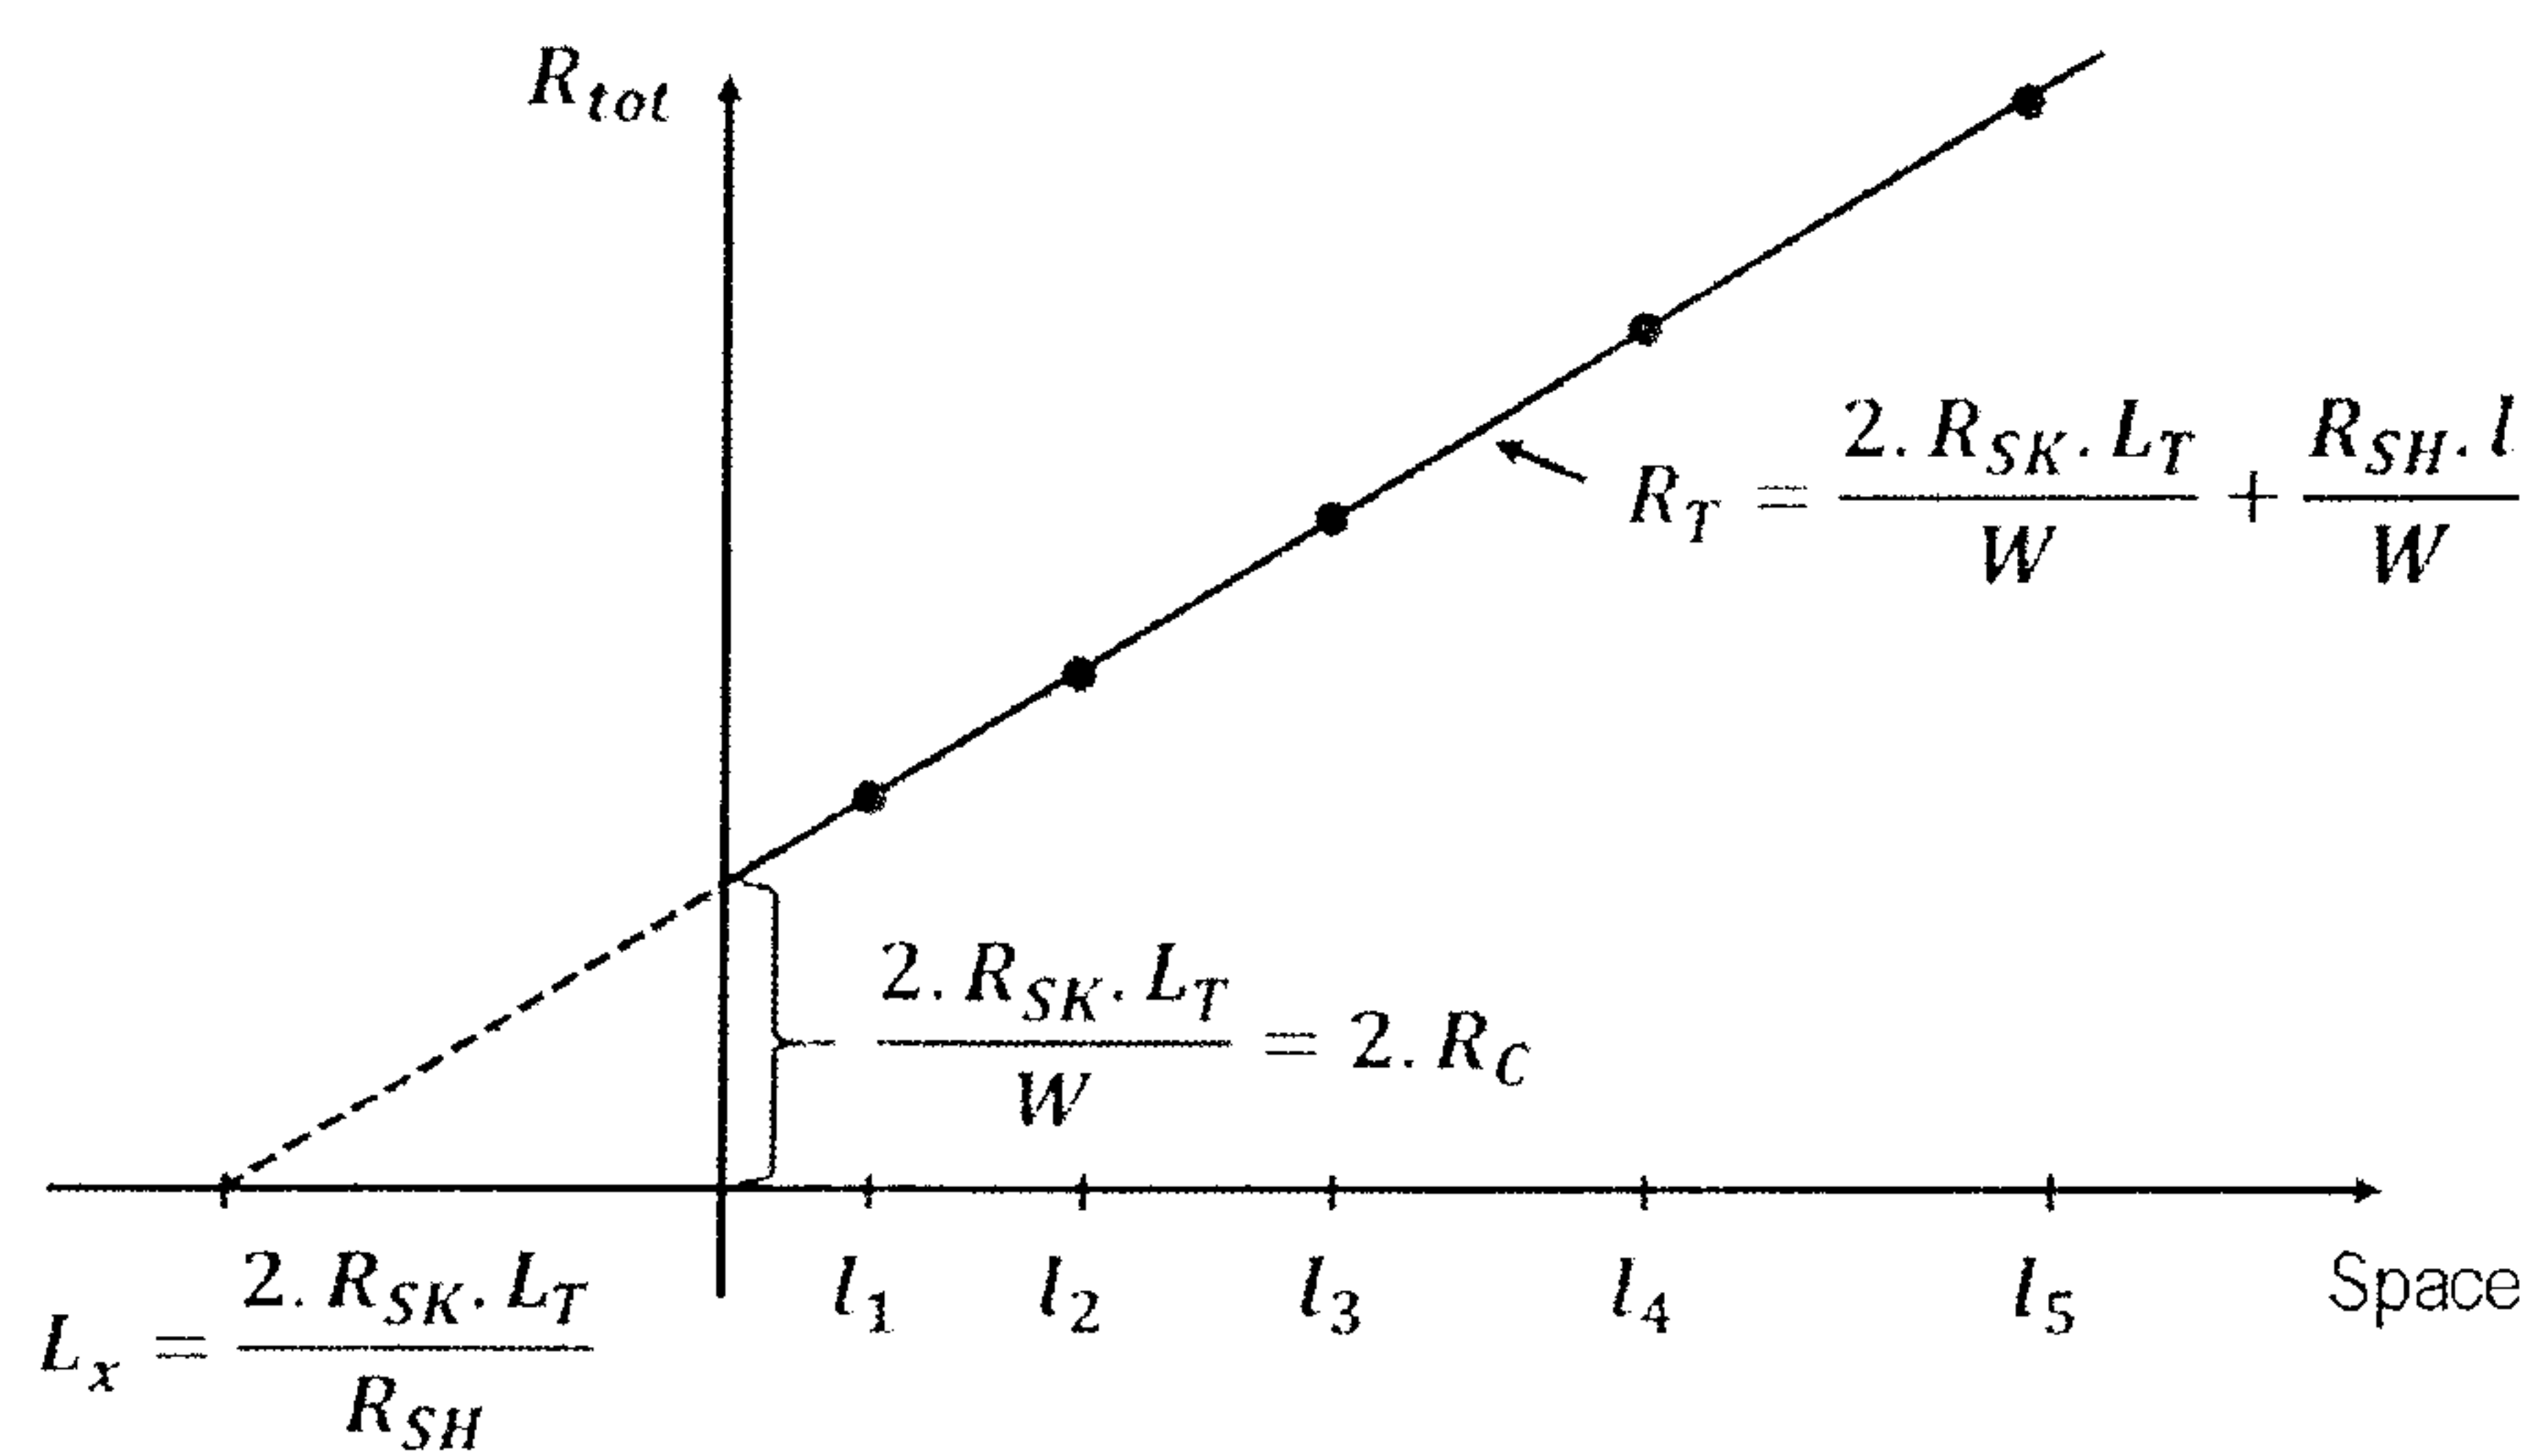


FIG.25

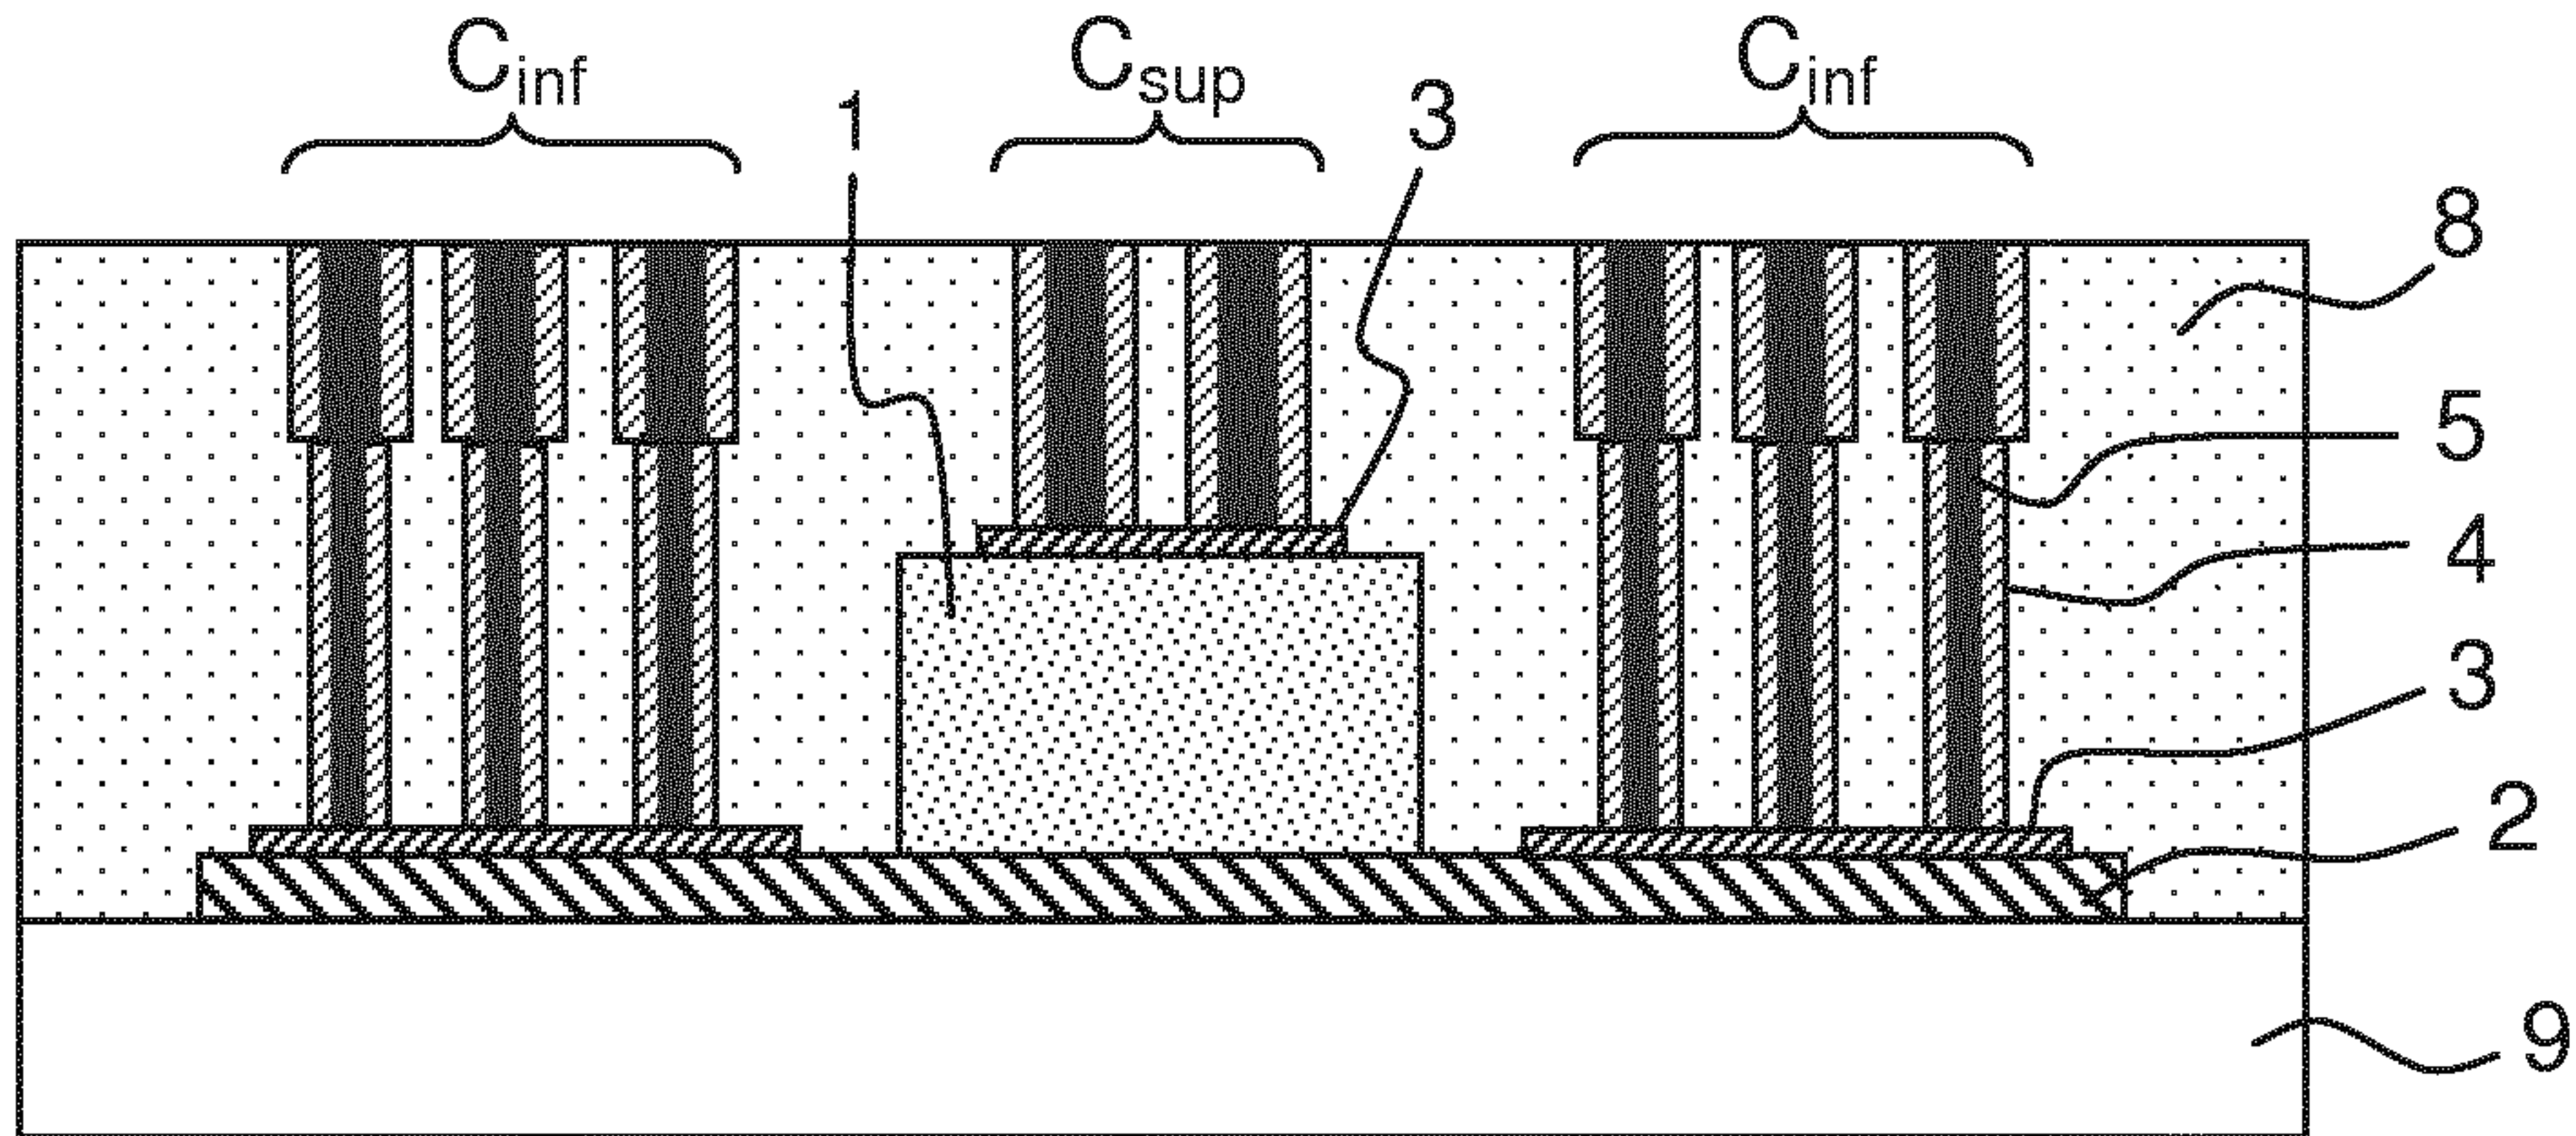


FIG. 13o