



US00RE41684E

(19) **United States**
(12) **Reissued Patent**
Fischer et al.

(10) **Patent Number:** **US RE41,684 E**
(45) **Date of Reissued Patent:** **Sep. 14, 2010**

(54) **SET OF INTEGRATED CAPACITOR ARRANGEMENTS, ESPECIALLY INTEGRATED GRID CAPACITORS**

6,858,916 B2 * 2/2005 Sakoh 257/530
2004/0151024 A1 * 8/2004 Fricke et al. 365/177

(75) Inventors: **Armin Fischer**, Munich (DE); **Franz Ungar**, Munich (DE)

(73) Assignee: **Infineon Technologies AG**, Munich (DE)

(21) Appl. No.: **12/175,170**

(22) PCT Filed: **Jun. 12, 2003**

(86) PCT No.: **PCT/DE03/01956**

§ 371 (c)(1),
(2), (4) Date: **Aug. 8, 2005**

(87) PCT Pub. No.: **WO2004/006334**

PCT Pub. Date: **Jan. 15, 2004**

FOREIGN PATENT DOCUMENTS

DE	31 24740	A1	*	4/1982
DE	196 52 325	C1	*	5/1998
EP	1 111 694			6/2001
EP	1 111 694	A1	*	6/2001
JP	60121757		*	6/1985
JP	62 155536			7/1987
JP	09 007887	A		1/1997
JP	10303061		*	11/1998
JP	2000323664	A1	*	11/2000
JP	2003323664	A1	*	11/2000
JP	2001308280		*	11/2001
JP	2000 323664			11/2004
WO	WO 01/93283		*	12/2001

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **7,079,375**
Issued: **Jul. 18, 2006**
Appl. No.: **10/520,742**
Filed: **Aug. 8, 2005**

(30) **Foreign Application Priority Data**

Jul. 8, 2002 (DE) 10230697

(51) **Int. Cl.**
H01G 4/38 (2006.01)

(52) **U.S. Cl.** **361/328; 361/329; 257/532; 257/530**

(58) **Field of Classification Search** **361/311-313, 361/328-330, 303, 301.1; 257/530, 534; 438/239-240, 244; 29/25.41, 25.42**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,766,308	A	10/1973	Loro	
4,152,714	A	* 5/1979	Hendrickson et al. 257/341
4,190,854	A	* 2/1980	Redfern	
5,659,182	A	8/1997	Cohen	
6,198,619	B1	3/2001	Fujioka	
6,417,557	B1	7/2002	Haruki	

OTHER PUBLICATIONS

European search report and opinion for related Application No. EP 05 10 669, mailed Apr. 4, 2007.

Japanese Patent Office communication for related Application No. 2004-518391, mailed Feb. 19, 2007.

International Search Report from PCT patent application No. PCT/DE03/01956.*

Preliminary Examination Report from PCT patent application No. PCT/DE03/01956.*

* cited by examiner


Primary Examiner—Eric Thomas

(74) *Attorney, Agent, or Firm*—Brinks Hofer Gilson & Lione

(57) **ABSTRACT**

A set of integrated capacitor arrangements is presented, each of which has a circuitry-effective main capacitor and a connectable correction capacitor. Each capacitor arrangement has an electrically conductive antifuse connection and antifuse interruption between the correction capacitor and the main capacitor, which are produced after the main capacitor has been formed. The connection and interruption enable the capacitance of the capacitor arrangement to be corrected.

12 Claims, 4 Drawing Sheets

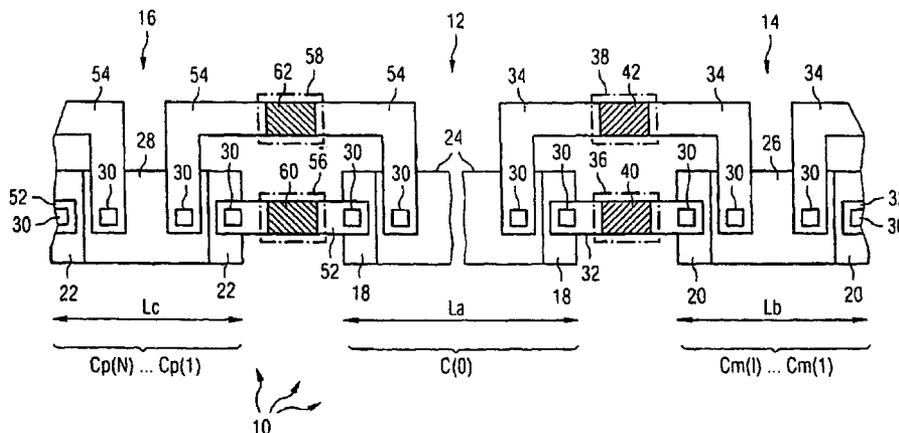

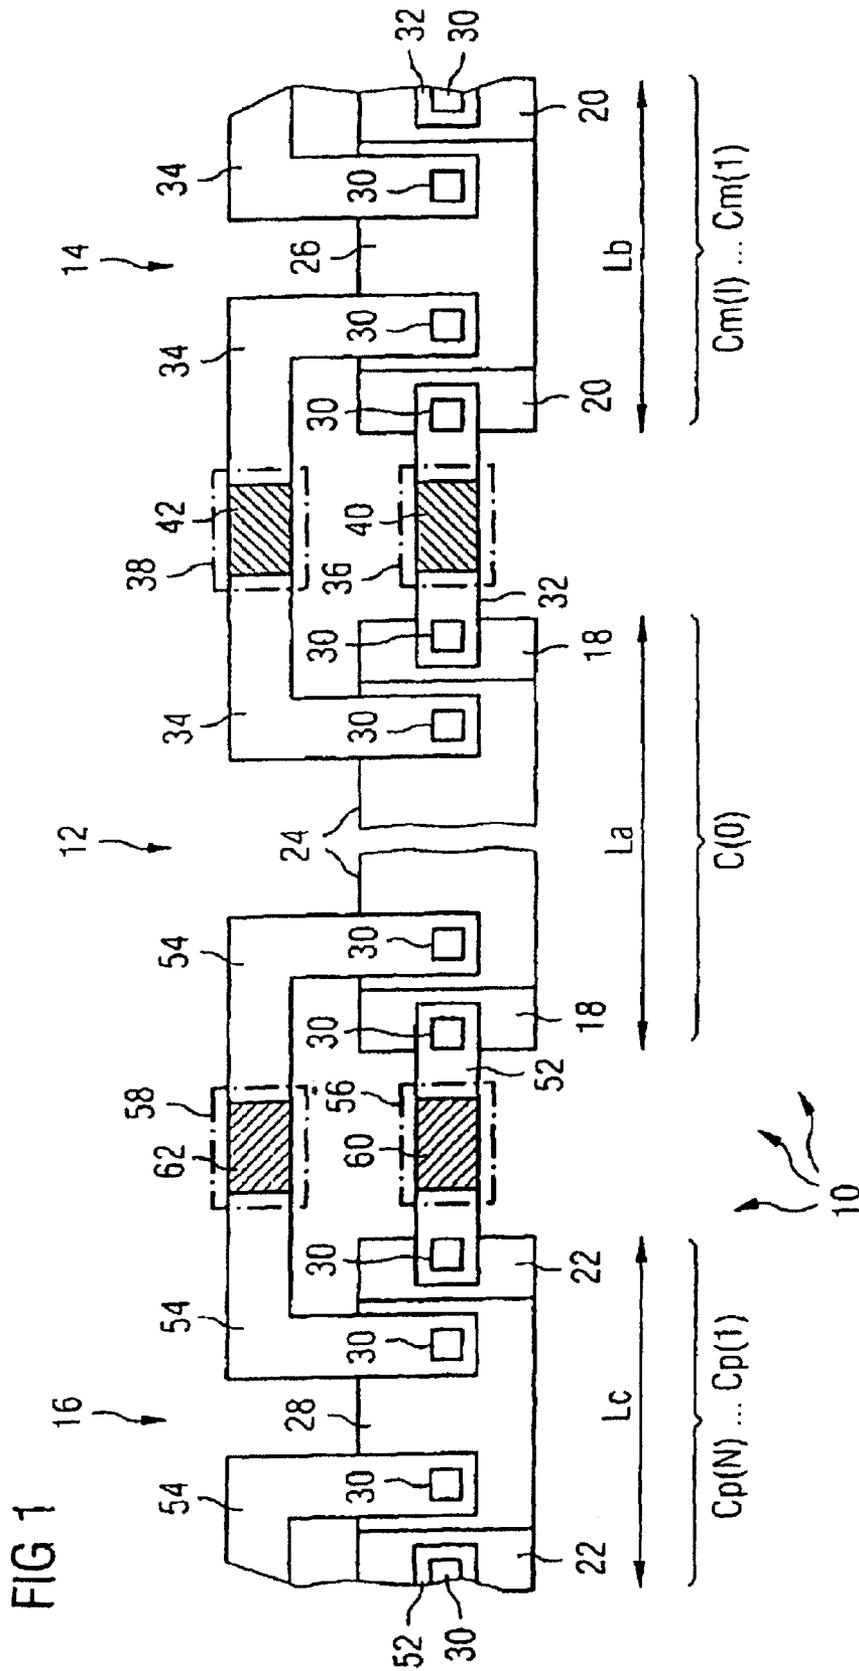


FIG 3

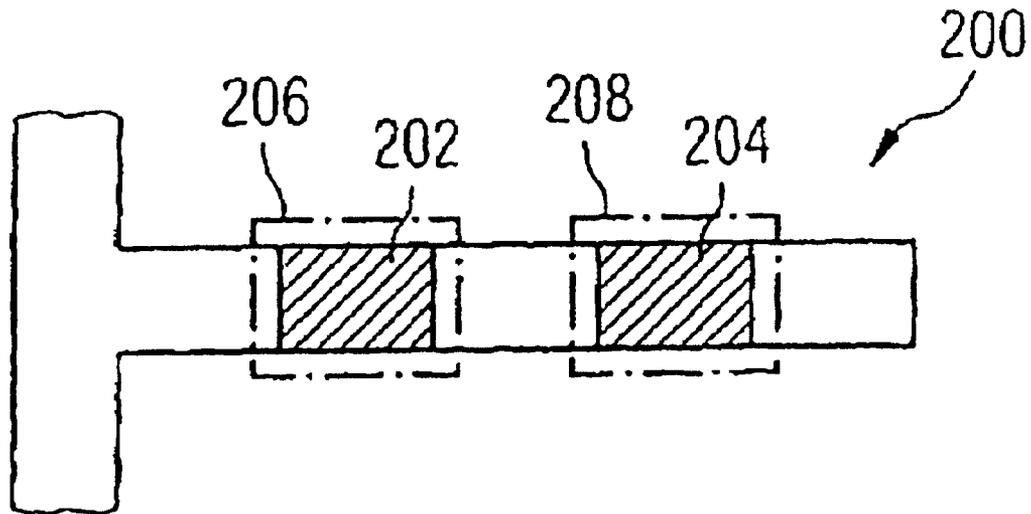


FIG 4


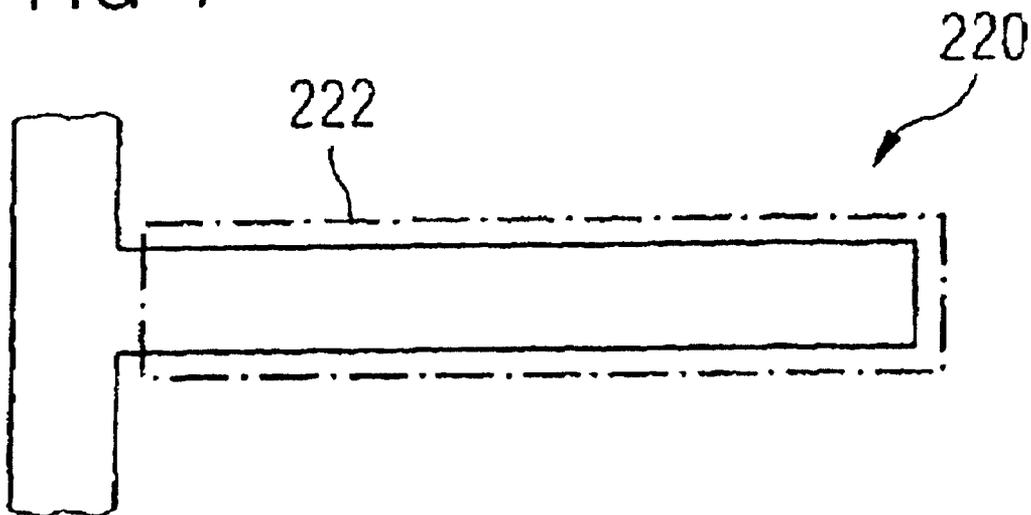


FIG 5

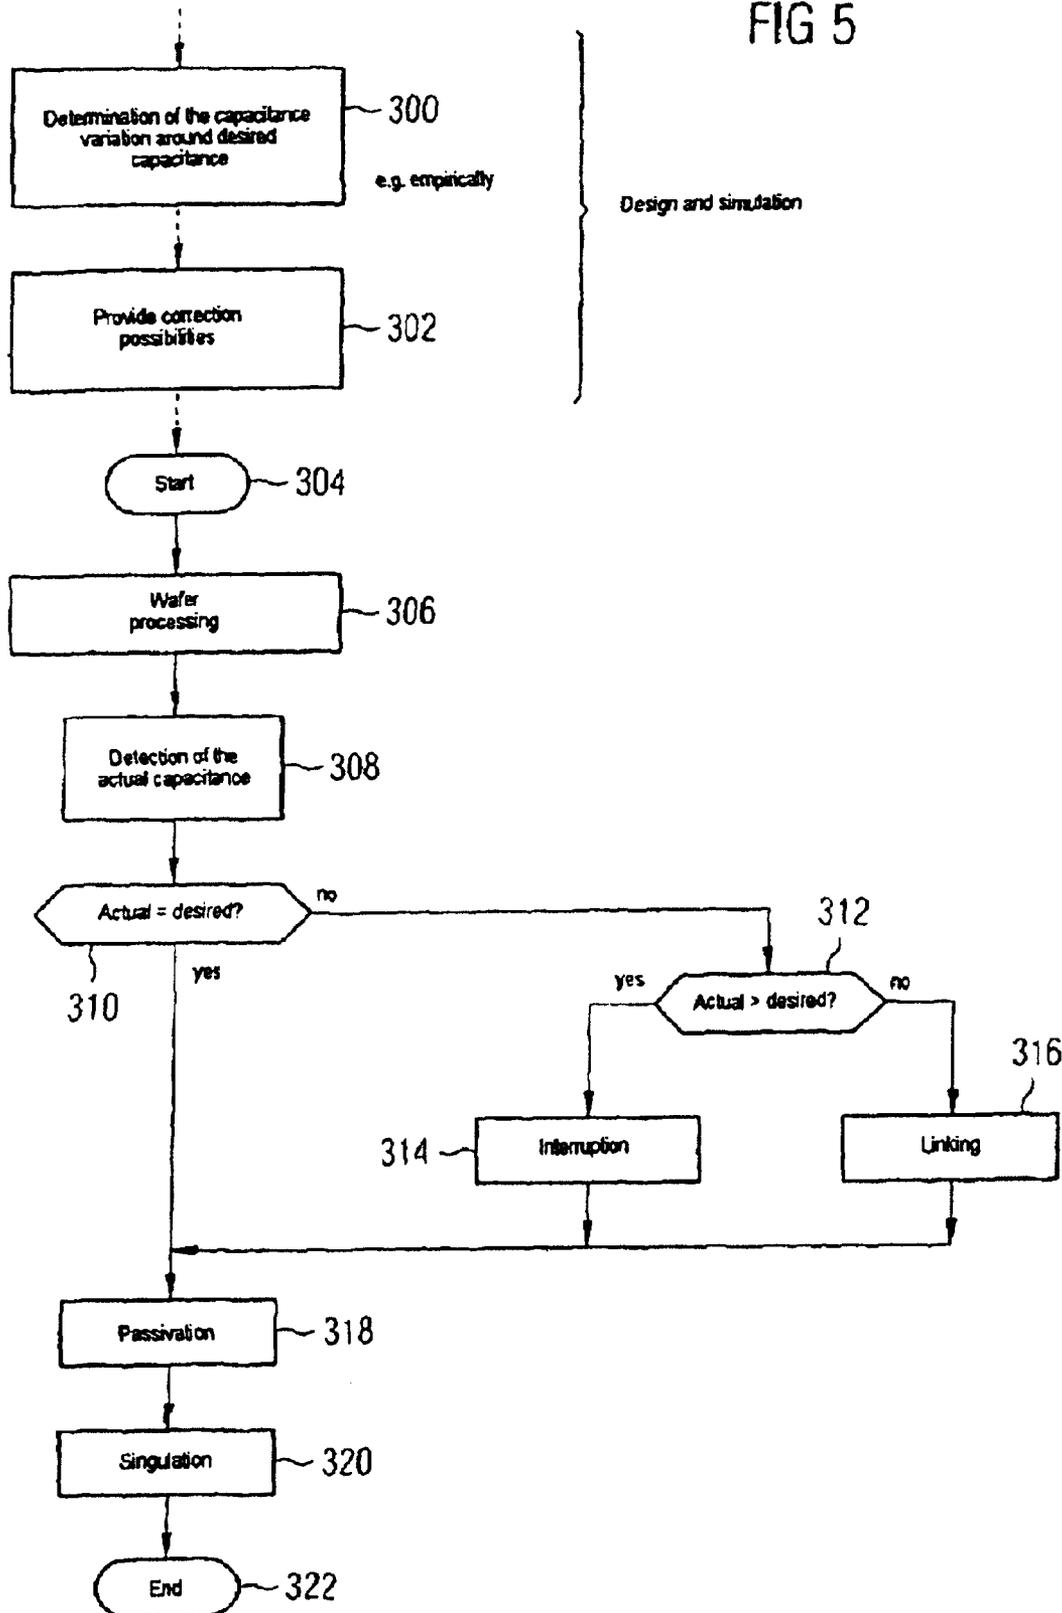

**SET OF INTEGRATED CAPACITOR
ARRANGEMENTS, ESPECIALLY
INTEGRATED GRID CAPACITORS**

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.

This application is the national stage application of international application number PCT/DE2003/01956, filed on Jun. 12, 2003, which claims the benefit of priority to German Patent Application DE 10230697.4, filed on Jul. 8, 2002, incorporated herein by reference.

The invention relates to an integrated capacitor arrangement containing at least one circuitry-effective main capacitor.

From an integrated arrangement, individual components cannot be mechanically separated from one another without destroying the components. Layer application methods and layer patterning methods, inter alia, are used as fabrication techniques for integrated arrangements.

A capacitor contains two electrodes opposite one another between which a dielectric is arranged. Examples of integrated capacitors are:

so-called MIM capacitors (Metal Insulator Metal),
stacked capacitors, also referred to as sandwich
capacitors, or
grid capacitors.

A capacitance is circuitry-effective if it is not only parasitic, i.e. actually undesired, but is also necessary for the functioning of the circuit arrangement. By way of example, circuitry-effective capacitors serve as:

blocking or backup capacitor,
part of a resonant circuit,
charging capacitor, or
for storing digital information.

In the fabrication of so-called BEOL capacitances (Back End of Line) or of a far BEOL capacitance in integrated form, considerable variations arise in the capacitance values. The variation results from geometry deviations on account of process inhomogeneities. The variations occur within a semiconductor wafer, within a production batch and also between different production batches. If the capacitance value of a capacitor lies outside the predetermined specification limits, then the result is a so-called loss of performance or even a loss of yield of the corresponding integrated circuit.

It is an object of the invention to specify a simple-to-fabricate set of capacitor arrangements whose capacitance is as near as possible to a predetermined desired capacitance. In particular, the intention is to specify a set of grid capacitors.

The set according to the invention contains at least two integrated capacitor arrangements, which have been produced in accordance with identical geometrical designs or layouts and which each contain a circuitry-effective main capacitor and at least one correction capacitor. One capacitor arrangement contains an electrically conductive connection between the correction capacitor and the main capacitor, the connection having been produced after the production of the main capacitor of this capacitor arrangement. The other capacitor arrangement contains an electrically insulating interruption between the same correction capacitor and the main capacitor, the interruption having been produced in accordance with the geometrical designs.

If corrections have to be carried out, for example, only in the case of 20% of the capacitor arrangements fabricated, in

order to achieve the desired capacitance, then the outlay decreases considerably compared with a correction possibility in which the correction can be performed only by disconnection of capacitors. This is because, in the case of such a correction, capacitors would need to be locally disconnected in 80% of the capacitor arrangements.

In one development, the connection is produced in a simple manner by local heating, so that components in proximity to the connection are protected from an increased thermal loading. Moreover, permanent links can be produced by local heating in a simple manner. Compared with the production of interruption by local heating, links can be implemented by local heating at lower temperatures. The thermal loading is thus low, particularly during the production of a multiplicity of links on a semiconductor wafer.

The local heating is carried out for example with the aid of a laser beam. This affords a possibility of increasing or decreasing the capacitance of the circuitry-effective main capacitor through connection in parallel or in series with the correction capacitors. This correction possibility allows integrated capacitor arrangements with predetermined capacitance values to be produced in a simple manner.

In one development, the connection contains two interconnect sections which are spaced apart from one another and between which only a dielectric is arranged. The materials of the interconnect sections and of the dielectric are chosen such that material warpages of the interconnect which penetrate through the dielectric arise during the heating. By way of example, it is possible here to utilize the otherwise undesirable "spiking" for producing an electrical connection. In an alternative configuration, the dielectric contains doping atoms which change the conductivity of the dielectric during the heating. Activation of the doping atoms is an expression that is also used in this context. However, there are also other possibilities for producing the connection, which is also referred to as an antifuse.

In a next development, the circuit arrangements contain at least one further correction capacitor, which is disconnected from the main capacitor or has been connected to the main capacitor.

The development is based on the consideration that the capacitance values of integrated capacitors that are actually to be constructed identically vary around a desired value both downward and upward. Corrections can be restricted to a minimum if it is both possible to correct the capacitance value toward larger capacitance values and possible to correct it toward smaller capacitance values. The further correction capacitor affords this second correction possibility in comparison with the abovementioned correction capacitor with the capacitors connected in parallel.

In one development, a further interruption for disconnecting the further correction capacitor is produced by local heating. The local heating can be carried out, for example, with the aid of a laser beam or with the aid of a current surge through an interconnect constriction.

In another development, dielectrics of the capacitors are formed by a dielectric between metallization layers in which connection sections of connections to integrated semiconductor components of the integrated capacitor arrangement are situated. It is possible to use a different dielectric in the region of the capacitor than in the remaining region between the metallization layers, e.g. a dielectric having a higher dielectric constant. Examples of such capacitors are stacked capacitors or grid capacitors. In other words, the electrodes of a capacitor lie in more than two metallization layers. In the case of such capacitors, in one configuration, not only electrodes in the topmost metallization layer but also elec-

trodes in lower metallization layers are disconnected in terms of circuitry or added in terms of circuitry during the correction. The linking elements and interruptions for the lower electrodes are situated either in the lower metallization layer, so that it is necessary, for example, to provide cutouts of corresponding depth for a laser beam, or in an upper metallization layer, to which connections from the lower metallization layer lead.

In another development, dielectrics of the capacitors have a thickness which is significantly less than the thickness of the dielectric between metallization layers. Examples of such capacitors are MIM capacitors. In other words, at least one electrode of the capacitor lies outside a metallization layer.

In a next development, the capacitance of a correction capacitor amounts to less than $\frac{1}{3}$, less than $\frac{1}{10}$, less than $\frac{1}{100}$ or less than $\frac{1}{1000}$ of the capacitance of a main capacitor. This measure means that fine trimming is possible. Thus, with possibilities for correction in the thousandths range, the capacitance values of two capacitor arrangements of the same integrated circuit arrangement can be coordinated with one another very precisely. This is absolutely necessary for some applications.

The invention additionally relates to a set of grid capacitors with correction transverse electrodes. Individual transverse electrodes of the grid capacitors also afford a possibility for correction of the capacitance during the production. The abovementioned technical effects therefore apply particularly to the grid capacitors.

Exemplary embodiments of the invention are explained below with reference to the accompanying drawings, in which:

FIG. 1 shows a plan view of an MIM capacitor arrangement,

FIG. 2 shows a plan view of a grid capacitor arrangement,

FIG. 3 shows a transverse electrode of a grid capacitor with two interruption possibilities,

FIG. 4 shows a transverse electrode of a grid capacitor with a continuous interruption possibility, and

FIG. 5 shows method steps for correcting the capacitance of an integrated capacitor.

FIG. 1 shows a plan view of an MIM capacitor arrangement 10, which contains a main capacitor 12 connected to an electronic circuit and a plurality of disconnectable capacitors situated to the right of the main capacitor 12, of which only one disconnectable capacitor 14 is illustrated. The dielectric is not illustrated in FIG. 1 for reasons of improved clarity.

In the capacitor arrangement 10, a plurality of connectable capacitors are situated to the left of the main capacitor 12, of which one connectable capacitor 16 is illustrated in FIG. 1. The capacitors 12 to 16 are constructed identically except for their longitudinal dimensions. The capacitors 12, 14 and 16 respectively contain a bottom electrode 18, 20 and 22 near the substrate and an electrode 24, 26 and 28 remote from the substrate. The bottom electrodes 18, 20 and 22 are longer than the respectively associated electrode 24, 26 and 28 remote from the substrate and project beyond the electrode 24, 26 and 28 remote from the substrate in the longitudinal direction on both sides, so that terminal regions for vertically running contacts 30 are produced at the bottom electrodes 18, 20 and 22 near the substrate.

The main capacitor 12 and the disconnectable capacitors 14 are electrically connected in parallel by interconnects 32 between the bottom electrodes 18, 20 and by interconnects 34 between the electrodes 24, 26 remote from the substrate. As seen geometrically, however, the disconnectable capacitors 14 are arranged in a row one behind the other. The

interconnects 32 and 34 are situated in an upper metallization layer. A cutout 36 and 38 in an insulating material (not illustrated) which covers the interconnects 32 and 34 respectively leads to each interconnect 32 and 34. Through the cutouts 36 and 38, during a correction of the capacitance of the main capacitor 12, regions 40 and 42 of an interconnect 32 and 34, respectively, can be vaporized with the aid of a laser beam, thereby producing an interruption.

On the other hand, the connectable capacitors 16 can be electrically connected in parallel with the main capacitor 12 with the aid of interconnects 52 between the bottom electrodes 18, 22 and interconnects 54 between the electrodes 24, 28 remote from the substrate. Geometrically, however, the connectable capacitors 16 are arranged in a row. The interconnects 52 and 54 are also situated in an upper metallization layer.

Cutouts 56 and 58 lead through an insulating material (not illustrated) as far as linking regions 60 and 62 of the interconnects 52 and 54, respectively. The linking regions 60, 62 form so-called antifuses, i.e. a connection possibility which forms a permanent electrically conductive connection between the sections of the interconnect 52 and an interconnect 54, respectively, upon the impingement of a laser beam.

The main capacitor 12 has a length L_a in the longitudinal direction of the capacitor arrangement 10, said length being greater than lengths L_b of the disconnectable capacitors 14 and lengths L_c of the connectable capacitors 16. As a result, a capacitance $C(0)$ of the main capacitor 12 is also greater than a capacitance $C_m(I)$ of the capacitor 14. In this case I is a natural number for designating the last disconnectable capacitor 14. The disconnectable capacitors not illustrated have capacitances $C_m(1)$ to $C_m(I-1)$ which are equal to the capacitance $C_m(I)$ in the exemplary embodiment explained.

The capacitance $C(0)$ of the main capacitor 12 is likewise greater than the capacitance $C_p(1)$ of the connectable capacitor 16. The connectable capacitors not illustrated in FIG. 1 have capacitances $C_p(2)$ to $C_p(N)$, which are equal to the capacitance $C_p(1)$ or $C_m(I)$. In this case, N is a natural number for designating the last connectable capacitor.

The correction of the capacitance of the electrode arrangement 10 is explained in more detail below with reference to FIG. 5.

In another exemplary embodiment, there is only one disconnectable capacitor 14 and one connectable capacitor 16 to the right and left, respectively, of the main capacitor 12. In a next exemplary embodiment there is only one or a plurality of connectable capacitors 16 and, respectively, only one or a plurality of disconnectable capacitors 14 beside the main capacitor 12. In a next exemplary embodiment the capacitances $C_m(1)$ to $C_m(I)$ of the capacitor arrangement 10 are different from one another. The capacitances $C_p(1)$ to $C_p(N)$ of the capacitor arrangement 10 can also be made different from one another.

FIG. 2 shows a plan view of a grid capacitor arrangement 110, which contains a main capacitor 112 connected to a circuit and a plurality of disconnectable capacitors, one capacitor 114 of which is illustrated in FIG. 2. Furthermore, the grid capacitor arrangement 110 contains a plurality of connectable capacitors, one capacitor 116 of which is illustrated in FIG. 2. Only the upper electrode of the main capacitor 112 and of the capacitor 114 and of the capacitor 116 is respectively illustrated in FIG. 2. In the underlying metallization layers there are further electrodes having the same profile as the upper electrodes. In a first exemplary embodiment, the electrodes of a capacitor 112, 114 and 116 which are situated in the different metallization layers are connected among one another in each case by at least one

vertical content. Interconnects between capacitors **112**, **114** and **116** are situated only in the upper metallization layer.

In the upper metallization layer, the main capacitor **112** contains two comb-shaped electrodes whose tines mesh with one another. By way of example, four transverse electrodes **120** to **126** lined up in a uniform grid dimension branch off from a longitudinal electrode **118**. On a longitudinal electrode **128** opposite the longitudinal electrode **118**, there are arranged, transversely with respect to the longitudinal electrode **128**, exactly as many transverse electrodes **130** to **136** as on the longitudinal electrode **118**, i.e. four transverse electrodes **130** to **136** which extend into the interspaces between the transverse electrodes **120** to **126**. A meandering interspace is thus formed between the transverse electrodes **120** to **126** and **130** to **136**, said interspace being filled by a dielectric. The length of the meander of the main capacitor **112** shall again be L_a .

The disconnectable capacitors and the connectable capacitors are constructed like the main capacitor **112**, but contain shorter longitudinal electrodes **140**, **142**, **144** and **146**, respectively from each of which, by way of example, only two transverse electrodes **150** to **160** branch.

Situated between the longitudinal electrode **118** and the longitudinal electrode **142** of the capacitor **114** is a region **162**, to which a cutout **164** leads from the surface of the integrated circuit. Situated between the longitudinal electrode **128** and the longitudinal electrode **140** of the capacitor **114** is a region **166**, to which a further cutout **168** leads. Through the cutouts **164** and **168**, it is possible, with the aid of a laser beam, to produce an interruption between the longitudinal electrodes **118** and **142** and the longitudinal electrodes **128** and **140** in the region **162** and **166**, respectively. As a result, all the disconnectable capacitors **114** can be disconnected from the main capacitor **112**. Situated between the further disconnectable capacitors are further regions **170** and **172**, to which cutouts **174** and **176** lead, so that disconnection can also be effected at other locations.

A linking region **180** is situated between the longitudinal electrode **118** and the longitudinal electrode **146** of the correction capacitor **116**. A linking region **182** is situated between the longitudinal electrode **128** and the longitudinal electrode **144** of the capacitor **116**. A cutout **184** and **186** leads to the linking region **140** and to the linking region **182**, respectively. Through the cutouts **184** and **186**, the linking regions **180** and **182** can be locally heated with the aid of a laser beam. During the local heating, a connection is produced between the longitudinal electrode **118** and the longitudinal electrode **146**, and between the longitudinal electrode **128** and the longitudinal electrode **144**. Electrically conductive connections to further connectable capacitors **116** can be produced with the aid of further linking regions **190**, **192** to which cutouts **194** and **196**, respectively, lead.

The meander of the main capacitor **112** has a length L_a , which is greater than a length L_b of a meander of the disconnectable capacitor **114** and a length L_c of a meander of the connectable capacitor **116**. As a result, a capacitance (C_0) of the main capacitor **112** is greater than a capacitance $C_m(I)$ of the disconnectable capacitor **114**. Further capacitances $C_m(1)$ to $C_m(I-1)$ of further disconnectable capacitors are equal to the capacitance $C_m(I)$. A capacitance $C_p(1)$ of the connectable capacitor **116** is equal to the capacitance $C_m(1)$. Capacitances $C_p(2)$ to $C_p(N)$ of the further disconnectable capacitors **116** are equal to the capacitance $C_p(1)$.

The correction of the capacitance of the circuit arrangement **110** is explained in more detail below with reference to FIG. 5.

In another exemplary embodiment, there are cutouts which lead into different metallization layers, for example to

connection or interruption possibilities which are arranged offset with respect to connection or interruption possibilities situated above or below the latter. In an alternative exemplary embodiment, linking regions or regions for interruptions are arranged in an upper metallization layer even though they also relate to electrodes in lower metallization layers. Furthermore, the capacitances $C_m(1)$ to $C_m(I)$ or $C_p(1)$ to $C_p(N)$ of the capacitor arrangement **110** may have capacitances that differ from one another.

FIG. 3 shows a transverse electrode **200** of a grid capacitor. The transverse electrode **200** has a region **202** over approximately one third of its length and a region **204** over approximately two thirds of its length. A cutout **206** leads to the region **202**. A cutout **208** leads to the region **204**. During the correction of the capacitance of the grid capacitor to which the transverse electrode **200** belongs, either an interruption is produced in the region **202** or an interruption is produced in the region **204**. If the interruption is produced in the region **202**, then only approximately one third of the transverse electrode **200** is circuitry-effective. By contrast, if an interruption is produced in the region **204**, then approximately two thirds of the transverse electrode **200** are circuitry-effective. Through the selection of a region **202** or **204**, it is possible to implement corrections of the capacitance of the grid capacitor in the thousandths range.

The length of the transverse electrode **200** is 10 micrometers, for example. The width is 0.5 micrometer, for example, so that a process of severing using a laser beam is possible without any difficulty.

FIG. 4 shows a transverse electrode **220**, to which a cutout **222** leads. The cutout **222** extends approximately over the entire length of the transverse electrode **220**. As a result, it is possible to interrupt the transverse electrode **220** at any desired location. In other words, the interruption points can be placed continuously along the longitudinal axis of the transverse electrode **220**.

In other exemplary embodiments of transverse electrodes **200** and **220**, linking regions are used instead of, or in combination with, the regions serving for interruption. The interruption regions and/or the linking regions are arranged either on one transverse electrode of a grid capacitor or on a plurality of transverse electrodes of the grid capacitor.

FIG. 5 shows method steps for correcting the capacitance of an integrated capacitor arrangement, e.g. according to FIG. 1, 2, 3 or 4. In the front end of the method, in a design and simulation stage, the variation of the capacitance of the integrated circuit arrangement around a desired capacitance is determined, for example empirically or on the basis of simulation runs, see method step **300**. Correction possibilities are provided depending on the capacitance variations, see method step **302**. The correction possibilities are, for example, disconnectable capacitors, connectable capacitors, disconnectable capacitor regions and/or connectable capacitor regions. The correction possibilities are prescribed in method step **302** taking account of the expected capacitance variation such that, with regard to the overall production, the fewest possible interruptions and links have to be produced by heating using the laser beam.

The actual correction method begins in a method step **304**, which is followed by the processing of a wafer, see method step **306**. By way of example, transistors are produced in a semiconductor material of the wafer. Afterward, metallization layers are applied, capacitors also being produced.

In a method step **308**, a measurement is used to detect the actual capacitance of an integrated capacitor arrangement, i.e. in particular the capacitance of the main capacitor **12**, **112** together with the capacitances of the disconnectable capacitors **14**, **114**.

In a subsequent method step **310**, the actual capacitance is compared with the desired capacitance. If the actual capacitance is less than or greater than the desired capacitance, in particular less than or greater than a predetermined tolerance range, then method step **310** is directly followed by a method step **312**. In method step **312**, a check is made to determine whether the actual capacitance is greater than the desired capacitance. If this is the case, then method step **312** is followed by a method step **314**, in which interruptions are produced in the integrated capacitor arrangement with the aid of a laser beam, disconnectable capacitors **14**, **114** being disconnected from the main capacitor **12**, **112**. The capacitance of the capacitor arrangement decreases. A disconnection of an electrode section from a transverse electrode is also carried out as an alternative.

By contrast, if it is ascertained in method step **312** that the actual capacitance is less than the desired capacitance, then method step **312** is directly followed by a method step **316**. In method step **316**, linking regions are heated with the aid of a laser beam. As a result, connectable capacitors **16**, **116** are supplementarily connected to the main capacitor **12**, **112** or to a main region. The capacitance of the capacitor arrangement thus increases in the direction of the desired capacitance. A connection of electrode sections of a transverse electrode is also carried out as an alternative.

By contrast, if it is ascertained in method step **310** that actual capacitance and desired capacitance match, then a method step **318** follows directly afterward. Method step **318** is also executed after method step **314** or method step **316**. The wafer is processed further in method step **318**. In this case, inter alia, a passivation layer is applied, which closes off the cutouts for the laser beam.

In a further method step **320**, the circuits arranged on the wafer are singulated and encapsulated in housings. The method is ended in a method step **322**.

In another exemplary embodiment, the correction is carried out after the singulation of the circuits. By way of example, current surges are used to heat the interruption regions or the linking regions. The interrogations in method steps **310** and **312** can also be formulated differently.

The method specified affords the following advantages:

the variations in the capacitances caused by geometry or process fluctuations can subsequently be corrected in a simple manner. The yield or the performance can thus be increased.

The possibility of subsequent correction furthermore allows individual capacitance matching for the respective integrated circuit. Capacitance matching specifically coordinate with other circuit elements can thus be performed, e.g. for the purpose of optimum setting of an operating point. This is advantageous, particularly when the other circuit elements can no longer be corrected.

By disconnecting or adding regions of the capacitor with the aid of so-called fuses or antifuses, it is thus possible to subsequently correct the influence of process and geometry fluctuations on the parameters of the main capacitor, in particular on the capacitance and on the resistance (and thus on the RC constant).

During the correction in method steps **310** to **316**, it is possible to use the following formula:

$$C_{\text{corr}} = C(0) - \sum_{i=1}^{\text{II}} C_m(i) + \sum_{n=1}^{\text{N1}} C_p(n),$$

where the quantities used have already been explained above, except for the quantities **II** and **N1**. The index *i* in the summation over the capacitances C_m must take account of

all the disconnected capacitors, where **II** designates the last disconnected capacitor. The index in the summation over the capacitances C_p must take account of all the connected capacitances, where **N1** designates the last connected capacitor. Furthermore, it must be taken into consideration that either capacitors are connected or disconnected.

If the capacitances C_m and C_p are identical, then it is possible, instead of the sum, to effect multiplication by a factor specifying the number of disconnected capacitors or connected capacitors.

In the determination of the capacitance variation, it is possible to use the following relationships applicable to a plate capacitor.

$$C = \epsilon_0 \cdot \epsilon_r \cdot A_{\text{eff}} / D_{\text{eff}},$$

where ϵ_0 , ϵ_r represent the corresponding dielectric constants, A_{eff} represents the effective electrode area and D_{eff} represents the effective distance between electrodes. A fluctuation in the area ΔA_{eff} or in the distance ΔD_{eff} then causes a change in the capacitance of:

$$\Delta C = \Delta A_{\text{eff}} / A_{\text{eff}} \text{ or } \Delta C = \Delta D_{\text{eff}} / D_{\text{eff}}$$

To a first approximation, the effective electrode area corresponds, in the case of:

a) the MIM capacitors: to the overlapping area of the electrodes,

b) the sandwich capacitors: to the area of the metal electrodes,

c) the grid capacitors: to the side area of the interconnects, which results from the length *L* and the thickness *T*.

The effective distance between electrodes corresponds, in the case of:

a) the MIM capacitors: to the thickness of the dielectric, which differs from the dielectric between the metallization layers,

b) the sandwich capacitors: to the thickness of the intermetal dielectric,

c) the grid capacitors: to the thickness of the intrametall dielectric, i.e. the so-called spacing.

In grid capacitors, for example, another influencing factor is the formation of corners. These influencing quantities can at least be detected by measurement and then be taken into account.

The fluctuations in the capacitances may have the following process-dictated causes:

a) MIM capacitors: fluctuations in the thickness of the MIM dielectric, e.g. due to inhomogeneous deposition rates over the wafer, or different roughness of the lower electrode.

b) Sandwich capacitors: fluctuations in the thickness of the intermetal dielectric, e.g. thickness fluctuations due to polishing inhomogeneities or fluctuations in the etching depth over the wafer.

c) Grid capacitors: fluctuations in the distance between electrodes due to variation of the thickness of the intrametall dielectric caused e.g. by lithography fluctuations, RIE pat-

tering (Reactive Ion Etching) with the use of aluminum or by trench etching with the use of copper. Further causes are fluctuations in the electrode area due to variation of the interconnect thickness or due to CMP fluctuations (Chemical Mechanical Polishing), so-called dishing, non-right-angled trench profile with the use of copper or due to inhomogeneous deposition rates.

In MIM capacitors and sandwich capacitors, the capacitance is corrected by direct disconnection or connection of M area segments of the electrode:

$$A=A_0\pm\sum_{i=1}^M \text{over } A_i,$$

where A_0 is the electrode basic area that can no longer be corrected, M is a natural number and A_i is the disconnectable or connectable discrete area elements. The minus sign applies to the disconnectable area elements. The plus sign applies to the connectable area elements.

In the grid capacitors, the electrode area A is set by way of the length L of the interconnect: $A=L\cdot T$, where T is the mean interconnect thickness within the capacitor structure. Through disconnection or connection of M interconnect segments, e.g. n discrete segments L_i of the electrode, correction is effected as follows:

$$L=L_0\pm\sum_{i=1}^M \text{over } L_i$$

where L_0 denotes the electrode basic length that can no longer be corrected, M denotes a natural number and L_i denotes the disconnectable or connectable discrete interconnect segments. The minus sign applies to the disconnectable interconnect segments. The plus sign applies to the connectable interconnect segments.

LIST OF REFERENCE SYMBOLS

10 MIM capacitor arrangement

12 Main capacitor

14 Disconnectable capacitor

16 Connectable capacitor

18, 20, 22 Bottom electrode near the substrate

24, 26, 28 Electrode remote from the substrate

30 Contact

32, 34 Interconnect

36, 38 Cutout

40, 42 Region

52, 54 Interconnect

56, 58 Cutout

60, 62 Linking region

L_a to L_c Length

$C(0)$, $C_m(1)$, $C_p(1)$ Capacitance

110 Grid capacitor arrangement

112 Main capacitor

114 Disconnectable capacitor

116 Connectable capacitor

118 Longitudinal electrode

120 to 126 Transverse electrode

128 Longitudinal electrode

130 to 136 Transverse electrode

140 to 146 Longitudinal electrode

150 to 160 Transverse electrode

162 Region

164 Cutout

166 Region

168 Cutout

170, 172 Region

174, 176 Cutout

180, 182 Linking region

184, 186 Cutout

190, 192 Linking region

194, 196 Cutout

5 200 Transverse electrode

202, 204 Region

206, 208 Cutout

220 Transverse electrode

222 Cutout

10 300 Determination of the capacitance variation

302 Provide correction possibility

304 Start

306 Wafer processing

308 Detection of the actual capacitance

15 310 Actual equal to desired?

312 Actual > desired?

314 Interruption

316 Linking

318 Passivation

20 320 Singulation

322 End

The invention claimed is:

1. A set of integrated capacitor arrangements, *comprising*,

25 **[having]** at least **[two]** *a first and second* integrated capacitor **[arrangements]** *arrangement*, which have been produced in accordance with identical geometrical designs and which each contain a circuitry-effective main capacitor and at least one correction capacitor,

30 **[having]** an electrically conductive antifuse connection between the correction capacitor and the main capacitor in **[a]** *the first [of the]* capacitor **[arrangements]** *arrangement*, the connection having been produced after the production of the main capacitor of the first capacitor arrangement,

35 **[having]** an electrically insulating antifuse interruption between the correction capacitor of the **[first]** *second* capacitor arrangement and the main capacitor in **[a]** *the second [of the]* capacitor **[arrangements]** *arrangement*, the interruption having been produced in accordance with the geometrical designs,

40 **[having]** at least one further correction capacitor in each capacitor arrangement,

45 **[having]** a further electrically conductive fuse connection between the further correction capacitor and the main capacitor in the first capacitor arrangement, the further connection having been produced in accordance with the geometrical designs, and

50 **[having]** a further electrically insulating fuse interruption between the further correction capacitor in the **[first]** *second* capacitor arrangement and the main capacitor in the second capacitor arrangement, the interruption having been produced after production of the main capacitor of the second capacitor arrangement.

55 2. The capacitor arrangements as claimed in claim 1, wherein the connection and the interruption are situated at identical positions in the capacitor arrangements.

60 3. The capacitor arrangements as claimed in claim 1, wherein at least one of: the connection has been produced by local heating and the connection contains a material warpage which penetrates through a dielectric.

65 4. The capacitor arrangements as claimed in claim 1, wherein at least one of: a material covering the connection contains a cutout leading to the connection, a material covering the interruption contains a cutout leading to the interruption, and the cutouts are filled with a passivating material.

11

5. The capacitor arrangements as claimed in claim 1, wherein the further interruption arose as a result of local heating and vaporization of an electrically conducting section.

6. The capacitor arrangements as claimed in claim 1, wherein dielectrics of the capacitors have a thickness which is equal to a thickness of a dielectric between metallization layers in which connection sections of connections to integrated semiconductor components are situated.

7. The capacitor arrangements as claimed in claim 1, wherein at least one of: the capacitors have electrodes situated in more than two metallization layers, and the electrodes are formed in a whole-area or grid-like manner.

8. The capacitor arrangements as claimed in claim 1, wherein dielectrics of the capacitors have a thickness which is less than a thickness of a dielectric between metallization layers in which connection sections of connections to integrated semiconductor components are situated.

9. The capacitor arrangements as claimed in claim 1, wherein a capacitance of one of the correction capacitors amounts to less than 1/3 of a capacitance of the main capacitor to which the correction capacitor is connected.

10. A method for producing a set of integrated grid capacitors, the method comprising:
forming at least two integrated grid capacitors in accordance with identical geometrical designs, each grid

12

capacitor containing a plurality of transverse electrodes forming a circuitry-effective main part of the grid capacitor,

forming at least two correction transverse electrodes arranged at identical positions in the grid capacitors to have circuitry-effective lengths of different magnitudes after the production of the main part, the circuitry-effective length of each correction transverse electrode that has been changed having been lengthened by production of an electrically conductive connection or having been shortened by at least one of an electrically insulating interruption and by vaporization of part of the correction transverse electrode, and, in a material covering the shortened correction transverse electrode, forming at least one cutout leading at least one of: to the shortened correction transverse electrode and to a region at which the shortened correction transverse electrode was arranged prior to the vaporization.

11. The method as claimed in claim 10, wherein the cutout is filled with a passivating material.

12. The method as claimed in claim 11, wherein a plurality of cutouts lead to a correction transverse electrode, or wherein one cutout which essentially covers the entire region of the original correction transverse electrode leads to a correction transverse electrode.

* * * * *