



(51) International Patent Classification:

E21B 49/08 (2006.01) *E21B 47/26* (2012.01)
E21B 41/00 (2006.01) *G06N 20/00* (2019.01)

(21) International Application Number:

PCT/US2020/042698

(22) International Filing Date:

20 July 2020 (20.07.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16/932,056	17 July 2020 (17.07.2020)	US
------------	---------------------------	----

(71) **Applicant: LANDMARK GRAPHICS CORPORATION** [US/US]; 3000 N. Sam Houston Pkwy E., Houston, Texas 77032 (US).

(72) **Inventor:** ZHANG, Jiazuo; Flat 162, Gladwin Tower, 50 Wandsworth Road, London SW8 2FA (GB).

(74) **Agent: BACA, Matthew W.** et al.; 7200 N. Mopac Expy., Suite 440, Austin, Texas 78731 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: CLASSIFYING DOWNHOLE TEST DATA

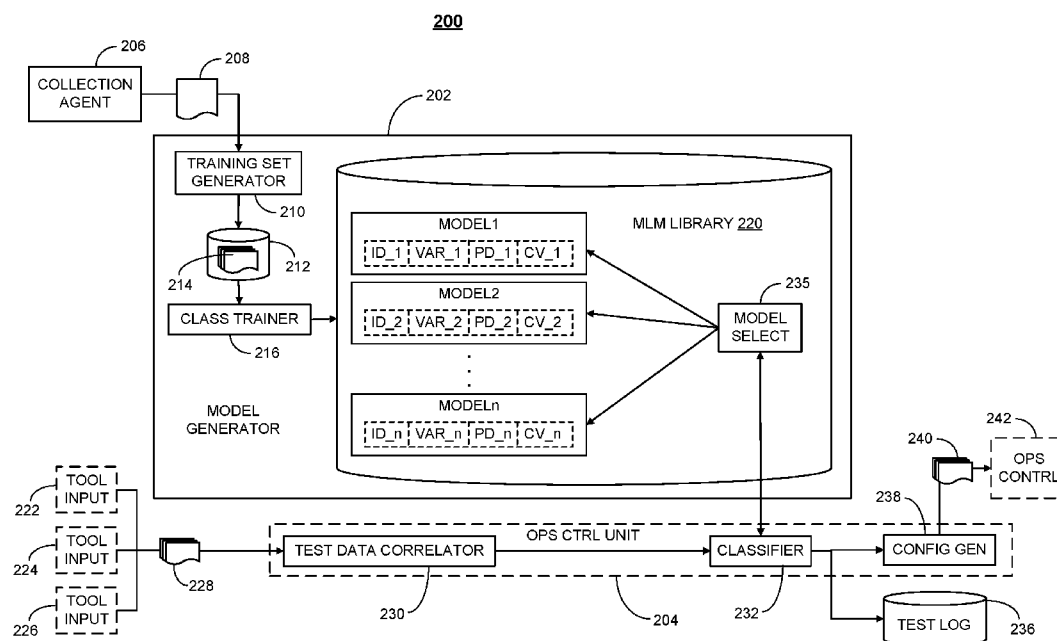


FIG. 2

(S7) Abstract: Disclosed embodiments include methods and systems for classifying test data. In one embodiment a method includes determining one or more variable types in a multivariate test vector within a data set, and for a plurality of machine -learning models, determining a closest match between variable types used by (to train) the machine -learning models and the determined variable types for the test vector. In response to determining a closest match for one machine-learning model, a corresponding machine -learning model is selected and the test vector is classified using the selected model. In response to determining a closest match for multiple machine -learning models, a similarity is determined between a probability distribution for the test data set and the probability distributions for the multiple machine- learning models to generate similarity values for each of the models. In response to one of the similarity values exceeding a threshold value, a machine-learning model is selected that corresponds to the exceeding similarity value and the test vector

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

CLASSIFYING DOWNHOLE TEST DATA

BACKGROUND

[0001] The disclosure generally relates to downhole testing and in particular to generating and utilizing supervised machine-learning models to classify downhole test data.

5 [0002] During drilling of a wellbore, downhole test tools may be deployed in a bottom hole assembly (BHA) or elsewhere along the drill string to detect and measure various formation properties. Such downhole testing may also or alternatively be implemented by wireline test tools deployed following or between drilling cycles. Such test tools may include multi-component induction (MCI) and nuclear magnetic resonance (NMR) tools that measure
10 electromagnetic return signals that can be interpreted to determine higher-level formation properties such as porosity, permeability, and density of formation materials such as rock strata and fluids. Many different downhole test tools are utilized for measuring various electrical, acoustic, nuclear radiation, and other measurable metrics that can be interpreted individually and/or in various combinations to determine mechanical, chemical, and other
15 formation properties. The directly measurable metrics may also be used to determine higher-level formation material classifications such as lithology. The interpretation process to determine property classifications from measured data may require substantial processing and user resources.

BRIEF DESCRIPTION OF THE DRAWINGS

20 [0003] Embodiments of the disclosure may be better understood by referencing the accompanying drawings.

[0004] FIG. 1 is a block diagram depicting a formation test system in accordance with some embodiments;

[0005] FIG. 2 is a block diagram of a test system that includes a test data classification
25 subsystem configured in accordance with some embodiments;

[0006] FIG. 3 is a flow diagram depicting operations and functions performed to generate a machine-learning model library or database in accordance with some embodiments;

[0007] FIG. 4 is a flow diagram illustrating operations and functions for classifying
30 downhole test data in accordance with some embodiments;

[0008] FIG. 5 depicts a drilling system in accordance with some embodiments;

[0009] FIG. 6 illustrates a wireline logging system in accordance with some embodiments; and

[0010] FIG. 7 depicts a computer system for implementing aspects of formation testing in accordance with some embodiments.

5 DESCRIPTION

[0011] The description that follows includes example systems, methods, techniques, and program flows that embody aspects of the disclosure. However, it is understood that this disclosure may be practiced without these specific details. In other instances, well-known instruction instances, protocols, structures and techniques have not been shown in detail in
10 order not to obfuscate the description.

Overview

[0012] Determining the rock and fluid properties during various stages of drilling is critical to efficient and successful formation exploration efforts. Such material properties determinations depend on obtaining measurable indicators such as measurable
15 electromagnetic, acoustic, nuclear, or other signal responses or conditions. Such measured test data can be interpreted such as by human lab analysts and/or processing component to determine or estimate material properties and higher-level material identifiers such as lithology.

[0013] Disclosed embodiments include methods, systems, tools, and components for
20 optimizing the use of supervised machine-learning models (MLMs) to interpret and classify sets of downhole test data. Downhole materials analysis is particularly complex due to the remoteness and relative inaccessibility of the formation materials from being physically collected in sufficiently large quantities and with sufficient frequency to enable direct chemical and physical analysis. Consequently, a large variety of test tools such as NMR
25 imaging tools, induction resistivity measurement tools, acoustic measurement tools and others provide lower-level properties measurements. The measurements may be interpreted individually or in various combinations to determine higher-level formation properties such as porosity, permeability, density, chemical composition, lithology, etc. Methods and systems may configure and utilize supervised MLMs in a manner that addresses the complexities of
30 using different types of measurement tools and different sets of different combinations of measurement tools that yield a vast variety of different types and combinations of test data. Disclosed embodiments may additionally or alternatively configure and utilize supervised

MLMs in a manner that addresses the vast spatial and temporal variability in downhole environments and conditions.

[0014] In some embodiments, the methods and systems implement a model database and model selection architecture configured to simultaneously address dual variabilities that may affect MLM accuracy for downhole test data applications. In one aspect, a supervised MLM library, database, or other form of programmatically accessible repository is configured to enable selective access to multiple MLMs during and as part of test data classification. The MLM repository is defined in part as including MLMs individually and mutually defined based on the training data sets used to train the MLMs. In another aspect, a model selection component is configured to apply a hierarchical sequence of criteria to efficiently and effectively match differently trained MLMs with multivariate test points (also referred to as multivariate test vectors) within downhole test data sets.

Example Illustrations

[0015] FIG. 1 is a block diagram depicting a formation test system 100 that includes components for collecting and classifying downhole test data in accordance with some embodiments. Formation test system 100 includes a well head 102 comprising components for drilling and testing within a formation 111, which may be a petroleum reservoir. Wellhead 102 comprises mechanical, electrical, and electronic systems, subsystems, devices, and components for drilling a wellbore 107 and performing downhole testing during drilling or following or between drilling intervals. The components within wellhead 102 include drilling and test equipment including top drive and steering equipment 104 and a communication interface 106. Top drive and steering equipment 104 include systems and components configured to provide torque to a drill string to drill wellbore 107. Top drive and steering equipment 104 further include a control interface for generating and transmitting steering control signals to steering components on the drilling string such as rotary steerable system components.

[0016] Communication interface 106 is configured to provide signal communication with locally networked components such as downhole measurement tools and a local processing interface unit 132. Communication interface 106 may include components configured to enable multi-lateral signal transmission between processing nodes within a machine-learning system 140, a downhole measurement tool 110, and other local components. During measurement logging operations, measurement tool 110 is disposed (e.g., via wireline or logging while drilling (LWD)) at various depths within wellbore 107 while communicatively coupled to communication interface 106 via a telemetry link 130.

Telemetry link **130** may comprise components and connectivity media for establishing acoustic, optical, electronic, and/or electromagnetic communications links between measurement tool **110**, interface unit **132**, and machine-learning system **140**.

[0017] Whether deployed in a wireline or LWD configuration, measurement tool **110** may be deployed within a tubing string **108** in wellbore **107**. Tubing string **108** may comprise drilling tubing such as drill pipes, production tubing, injection tubing, or other type of movable tubing. Wellhead **102** may include components for configuring and controlling deployment in terms of insertion and withdrawal within wellbore **107** of a test string that incorporates measurement tool **110**. The test string may be configured as a wireline test string deployed in the absence of or within tubing string **108** and may include a wireline cable represented as telemetry link **130** for moving and providing communication and power source connectivity for downhole test tools.

[0018] Measurement tool **110** comprises one or more logging sondes that house various downhole measurement tools including a multi-component induction (MCI) tool **112**, a nuclear magnetic resonance (NMR) tool **114**, and an acoustic measurement tool **116**. MCI tool **112** includes a multi-coil antenna array including a transmitter **118** and one or more receivers **120**. Resistivity measurement tools such as MCI tool **112** may use a triaxial antenna configuration that enables multi-component electromagnetic field measurements in three dimensions. Transmitter **118** may therefore include one or more transmit antennas configured to transmit at multiple different geometric orientations. Receivers **120** may comprise a set of receiver antennas configured to receive at multiple different geometric orientations.

[0019] The signals measured by receivers **120** may be translated by inversion computation processes into dimensionally specified resistivity and/or conductivity values. For example, if processed using a transverse isotropic modeling technique, the measured voltage signal components may be translated to a horizontal resistivity, R_h , that represents the x-y plane, and a vertical resistivity, R_v , in the z-direction. If processed using a biaxial anisotropy modeling technique, the measured voltage components are translated into three mutually orthogonal horizontal resistivity components. Similar to MCI tool **112**, NMR tool **114** and acoustic measurement tool **116** may include transmitter components for inducing responses and receiver components for measuring and, in some instances, translating corresponding signal responses.

[0020] Downhole measurement tool **110** further includes an electronics assembly comprising, in part, a digital signal processor (DSP) **126** configured to process and convert raw measurement signals from receivers within MCI tool **112**, NMR tool **114**, and acoustic

measurement tool **116** into measurement data. For example, DSP **126** may be configured to determine target metric values (e.g., voltage levels) corresponding to the signal information received directly from the measurement tools. The electronics assembly further includes a log unit **128** that is configured to compute measurement values from the target metric values
 5 determined by DSP **126**. In some embodiments, log unit **128** applies an inversion computation to derive the resistivity values from the raw measurement data from DSP **126**.

[0021] The generated measurement data may be recorded by log unit **128** in defined data object structures such as a log file **131**. Log file **131** is transmitted from the electronics assembly to communication interface **106** from which it may be routed to and recorded in a
 10 test measurement storage **136** within interface unit **132**. Log file **131** may also or alternatively be provided directly as streamed data or otherwise real-time formatted data to a processing node within machine-learning system **140**. As represented by illustrative records within test data records **138**, log file **131** includes multiple records that each associate a borehole depth (depicted as true vertical depth (TVD)) with the corresponding measurements
 15 collected at the depth. For instance, the third row-wise record within test data records **138** associates resistivity measurements $R_h=2.7$ and $R_v=2.5$ (e.g., ohms-m) with the TVD of **255** depth units (e.g., meters, feet) at which the measurements were collected. The third row-wise record further includes lower-level measurement datapoints including first and second transmitter values Tx1 and Tx2 (e.g., frequency and amplitude) and three received signal
 20 values rx, ry, and rz. In this manner, each row-wise record forms a multivariate test data vector having variable types R_h , R_v , Tx1, Tx2, rx, ry, and rz to be classified by processing components within machine-learning system **140**. The collection of multiple test data vectors within test data records **138** forms a test data set.

[0022] The systems, components, operations, and functions described herein implement
 25 a method by which supervised machine-learning type artificial intelligence mechanisms are utilized to accurately and efficiently process test data sets generated by downhole measurement tools. More specifically, machine-learning models (MLMs) are configured and selectively called and executed for individual input test data vectors within an input test data set to address issues relating to variations in training set input variables and variations in
 30 training data sets that significantly affect model performance. In some embodiments, machine-learning system **140** generates formation properties data from test data **136** that was generated by measurement tool **110**. The formation properties data may be stored, combined, and analyzed by formation analysis programs to evaluate the formation. Also, machine-learning system **140** in combination with interface unit **132**, wellhead **102**, and downhole

equipment may utilize the formation property data for controlling or modifying control of drilling and other operations.

[0023] In some embodiments, interface unit **132** and/or wellhead **102** include an operations controller **134** that generates and transmit control signals to top drive and steering equipment **104**. The control signals are transmitted to top drive and steering equipment **104** in direct, real-time sequential association with the sequence of formation properties data **141** received from a classifier model **152**. Operations controller **134** may utilize the formation properties data **141** as a supplement to or otherwise in conjunction with other input or pre-programmed information to generate and transmit control setting signals for setting and modifying drilling and steering operations.

[0024] Formation properties data **141** includes multiple records that each associate a borehole depth (depicted as true vertical depth (TVD)) with corresponding to measurement depths recorded in test data records **138**. For instance, the third row-wise record within formation properties data **141** corresponds by depth and time to the third row-wise record within test data records **138**. Each row-wise record of formation properties data **141** further includes three formation properties fields including a water saturation field, "Sat," a density field, "Density," and a lithology type field, "Type." In some embodiment, one or more of the Sat, Density, and Type fields contain a label or classifier generated by classifier model based on the input test data vector formed by the third row of test data records **138**. For example, the third row-wise record of formation properties data **141** classifies the test data pattern that includes resistivity measurements $R_h=2.7$ and $R_v=2.5$ and one or more of the transmitter values and receiver signal values forming the test pattern as corresponding to one or more of water saturation = 7.2, density = 2.25, and/or sandstone lithology type "SND."

[0025] Operations controller **134** generates the control settings in response to or otherwise based on classification information generated by and received from machine-learning system **140** via a local connection or via a wide area network **156**. Interface unit **132** includes components such as electronic transmission and/or fluid pressure signal generating components for remotely communicating the control settings. In some embodiments, interface unit **132** transmits control setting signals to downhole devices via communication interface **106**. Alternatively, interface unit **132** and downhole drilling and steering equipment may include wireless communication interfaces enabling communication with downhole and surface devices using, for example, acoustic telemetry via the metal piping of or fluid within tubing string **108**.

[0026] The depicted machine-learning system **140** includes a multi-processor system including multiple interconnected processing nodes that may collectively form a parallel processing system that implements one or more types of machine-learning such as a neural network in which each node is a respective node of the neural network. Machine-learning system **140** comprises any combination of hardware, firmware, and software program logic configured to implement one or more artificial intelligence schemas such as linear regression, support vector machines, k-Nearest Neighbor (k-NN), and other supervised learning algorithms.

[0027] Interface unit **132** generates test data records **138** from measurement data recorded in a test measurement storage **136**. Interface unit **132** transmits test data records **138** to one or more of the computation nodes, such as a node **142**, within machine-learning system **140**. Node **142** comprises processing and memory components as well other hardware and software components for receiving, storing, processing, and transmitting information to and from interface unit **132**. Operations controller **134** may generate test data records **138** based on various combinations of measurement data within test measurement storage **136** such as by correlating measurement depths and/or timestamp values between recorded measurements to provide a time sequence of temporally and spatially corresponding measurement data. The test data sequence can be processed by machine-learning system **140** to determine formation properties in the form of supervised classifications recorded in formation properties data **141**.

[0028] Node **142** includes a communication interface **144** that comprises any combination of hardware and software, such as network adapter components, configured to enable communication with the other nodes within machine-learning system **140** and interface unit **132**. Node **142** further includes a processor **146** and a memory **148** for storing, executing, and otherwise processing program code and input data including classifier model **152** and a test data vector **150**. Classifier model **152** may comprise a runtime-selectable plugin program or routine including program instructions configured to determine formation property classifications based on the content of test data vector **150**. The formation property classifications may comprise a fixed set of labels (e.g., high, medium, low permeability) that each characterize various levels physical properties such as porosity, density, lithology, etc. As depicted and described in further detail with reference to **FIG. 2**, classifier model **152** may be generated, in part, by a model generator that generates pattern recognition code by executing a classification trainer program.

[0029] Test data vector **150** may comprising one of the test data vectors within test data records **138**. Test data vector **150** is a multivariate vector data construct that includes specified parameters that in combination indicate a multivariate pattern. In some

embodiments, the pattern includes multiple formation measurements and associated test input signals for a given test cycle. A series of test data vectors such as test data vector **150** may be included within a test data set such as test data records **138** and received as input and processed by classifier models such as classifier model **152** to generate formation property classifications. A current operational configuration (e.g., drilling) can be modified based on the formation property classifications and the entire process repeated as necessary based on a series of subsequent measurement cycles. In this manner, operational adjustments may be implemented based on changes in formation properties, which are identified based on the combined formation property classifications.

[0030] FIG. 2 illustrates a test system **200** that includes a test data classification subsystem configured in accordance with some embodiments. The systems, subsystems, devices, and components depicted in FIG. 2 may be incorporated by and perform the function of the various of the test data collection devices and the processing devices in the machine-learning system shown in FIG. 1. Test system **200** includes a model generator **202** comprising components for generating an MLM repository in the form of an MLM library **220**. Model generator **202** includes a training set generator **210** that is configured to generate and record statistical properties of training sets **214** within a training set database **212**.

[0031] In the depicted embodiment, training set generator **210** receives measurement and formation properties data **208** such as may be collected by a collection agent **206** that retrieves the data from a variety of information sources such as well field data repositories. Measurement and formation properties data **208** may include lower level measurement tool data such as voltages, signal frequencies, and radiation levels as well as higher level, translated measurement tool data including resistivities, densities, etc. Data **208** may further include higher-level formation properties such as lithologies and chemical compositions. Training set generator **210** is configured, using any combination of program instructions and data, to correlate the test measurement data with lower level properties data to form classified (sometimes referred to as “labelled”) training sets within training sets **214**. Specifically, a lower level property may be assigned as the classifier label for a multivariate set of measurement data points and/or other properties. Training set generator **210** is also configured to correlate the test measurement data and lower level properties data with higher level formation properties data to form classified training records within the training sets in which a higher-level property (e.g., lithology type) is assigned as the classifier label for a multivariate set of any combination of lower-level measurements and lower-level properties. Each of training sets **214** therefore includes a multivariate set of training variables (e.g., tool

measurements and/or lower-level properties) associated with a classifier label (e.g., lower-level or high-level property).

[0032] Model generator **202** further includes a classification trainer **216** that is configured, using any combination of program instructions and data, to generate trained
5 MLM models that each include respectively configured pattern recognition code.

Classification trainer **216** requests or otherwise receives a training data set in the form of a subset of the supervised learning training sets **214** to generate a given model. Classification trainer **216** is configured to execute a supervised learning function on the labelled training data to generate the pattern recognition code. Classification trainer **216** processes the
10 classifier-labeled training sets to generate multiple MLM models MODEL1 - MODELn each having different sets of training variables (types of training data) and different sets of training data within the types.

[0033] The models MODEL1 – MODELn are recorded actually or via index within MLM library **220**, which includes a model select unit **235** that is configured to selectively
15 access and retrieve one or more of the models. The models each include respectively configured pattern recognition code based on the training data content and training variables used to generate each model. As depicted, each of models MODEL1 – MODELn also includes metadata fields for recording several categories of selection information. In the depicted embodiment, each model includes an identifier field “ID_x” that records, for
20 example, an alphanumeric model identifier. Each model also includes three metadata fields that record information relating to the training data set used to train that model. A training variable types field “VAR_x” records the set of variable types (e.g., voltage, frequency, density) included in the training set (set of training records) used to train the model. A probability distribution field “PD_x” records the probability distribution of the training data
25 values used to train the model, and a cross-validation field “CV_x” records a cross-validation score for the model. In some embodiments, the cross-validation score represents classification accuracy based on a subset of the training data.

[0034] The models within MLM library **220** may be accessed by a control unit **204** that is configured to determine formation properties from input test data and provide the properties
30 data for use in formation evaluation. Control unit **204** may also use the determined formation properties to determine or modify drilling or other operation configurations. Control unit **204** is configured to determine the formation properties as classifications generated by one or more of the models within MLM library **220**. Control unit **204** includes a test data correlator **230** that receives and processes test data records **228** from one or more of multiple
35 measurement tool test data sources **222**, **224**, and **226**. Test data correlator **230** may process

the test data by correlating various related measurements and low-level properties that may be usefully evaluated in combination to determine higher-level formation properties. The resultant unclassified data set comprises individual test data vectors, each comprising a respective combination of multivariate test data points.

5 **[0035]** A test data set comprising individual test data vectors are transmitted to or otherwise received by a classifier **232** that is configured, using any combination of program instructions and data, to process the test data set using the models within MLM library **220**. In some embodiments, classifier **232** is configured to call or otherwise select one or more mutually distinct models from MLM library **220** to be used to classify individual test data
10 vectors. As described and depicted in further detail with reference to **FIG. 4**, classifier **232** and model select unit **235** are configured to select a model for each test vector using a sequence of criteria that reduces MLM inaccuracies caused by the wide varieties of the input variable types and the training data values used to generate the models.

[0036] A test data classification sequence for a test data vector begins with classifier **232**
15 or model select unit **235** determining the set of variable types in the test vector. For example, as part of a model request, classifier **232** may perform the determination or may transmit the test vector to be analyzed by model select unit **235**. In response to model select unit **235** determining, directly or via indication from classifier **232**, the set of variable types, model select unit **235** compares the set with the sets of variable types for each of the models (i.e.,
20 variable types included in the training sets for each model). Model select unit **235** performs the comparison in part by reading the associated via the VAR_x fields. In response to determining a closest match (e.g., largest set of matching variable types), model select unit **235** calls or otherwise selects the corresponding MLM model to be used to classify the test vector.

25 **[0037]** In response to determining that multiple models have closest matching sets of variable types, model select unit **235** and/or classifier **232** use comparison of probability distributions of the training data and test data values as the selection criterion. For example, classifier **232** may have pre-processed the values of the test data set in which the test vector is included to generate a probability distribution. For example, model select unit **235** and/or
30 classifier **232** may calculate probability distributions using mean and covariance probability distribution calculations. Model select unit **235** may compare the probability distribution of the test data set with the probability distributions of each of the models that were determined to have the closest matching sets of variable types. The probability distributions for the models may be determined by reading the PD-x fields. For each comparison, model select
35 unit **235** calculates a corresponding similarity values such as in the form of a numeric

fractional or percent value. Model select unit **235** then determines whether one or more of the similarity values exceeds or otherwise meets a threshold value. In response to determining that only one of the similarity values exceeds the threshold value, model select unit **235** calls or otherwise selects the model corresponding to the exceeding similarity value and the model is used to classify the test vector.

[0038] In response to determining that two or more of the similarity values exceed the threshold value, model select unit **235** reads and compares cross-validation values stored in the CV_x field of each of the models for which the similarities values exceed the threshold value. Model select unit **235** identifies the model having the highest cross-validation value and calls or otherwise selects the model to be used to classify the test vector.

[0039] Having classified one or more test vectors in the test data set, classifier **232** transmits the classifications in the form of formation property data to configuration generator **238**. Configuration generator **238** is configured to control or otherwise modify the operation settings of well equipment such as drilling and/or testing equipment. For example, configuration generator **238** may generate operation configuration control information/instructions **240** to an operational controller **242** such as a drilling controller.

[0040] FIG. 3 is a flow diagram depicting operations and functions performed to generate an MLM library or database in accordance with some embodiments. For example, the operations and function depicted and described with reference to FIG. 3 may be utilized to generate MLM library **220** in FIG. 2. The process begins as shown at block **302** with a training set generator generating training sets using multiple different combinations of training variables. As shown at block **304**, the training sets are also generated using different data value content for the variables such that collections of the training sets will have different probability distributions.

[0041] Model training begins at block **306** with a classification trainer training models using training sets having differing combinations of training variables and different combinations of training data sets. As a result, a set of suitably variable models are generated that may be selectively called to classify individual test data points that may vary within a data set. For each individual model, the classification trainer or a processing unit that maintains the MLM library records data associated with the training data set used to train the model (block **308**). For example, the classification trainer may record the set of training variables and the probability distribution for the training data set such as in metadata included in the model. At block **310**, the classification trainer performs a cross-validation test for each model. For example, a subset of the training data set may be withheld from the pattern

matching configuration training of a model and that data input to determine the accuracy of the model. The process ends as shown at block 312 with the classification trainer recording, such as within model metadata, the cross-validation values/scores for each of the models.

[0042] FIG. 4 is a flow diagram illustrating operations and functions for classifying downhole test data in accordance with some embodiments. The operations and functions depicted and described with reference to FIG. 4 may be implemented by one or more of the systems, devices, and components depicted in FIGS. 1 and 2. The process begins as shown at block 402 with a model generator, such as model generator 202 in FIG. 2, generating a supervised MLM library as described with reference to FIGS. 2 and 3. A test data set is generated such as via the downhole test system in FIG. 1 and received by a MLM system such as shown in FIGS. 1 and 2 to produce a data set comprising multiple multivariate data vectors (block 404).

[0043] Classification processing of the data set is performed by classifying at least some of the multivariate data vectors individually in a sequence beginning with block 406 with classification of a next test data vector in the set. The test data vector classification sequence begins at block 408 with a classifier and/or model select unit determining the set of variable types within the test data vector. At block 410, the classifier/model select unit compares the variable type set for the test data vector with the training variable type sets for the MLM models in the library to identify one or more closest matches. In response to determining a single closest match at inquiry block 412, control passes to block 414 with the classifier/model select unit selecting and calling the closest matching model by model ID. In response to determining more than one closest match at inquiry block 412, control passes to block 416 with the classifier/model select unit using probability distribution similarity as a model selection criterion. For example, the model select unit may determine a probability distribution for the test data set that includes the test vector. The model select unit compares the test data probability distribution with the probability distributions of each of the models determined at block 410 to have a variable type set closest matching to the variable type set of the test vector. For example, each comparison may be implemented by calculating a similarity value, such as a fraction or percent, between the test data set probability distribution and the probability distributions of the training data sets for the models. In some embodiments, determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models comprises calculating distance between data points in the probability distribution for the test data set and data points in the probability distributions for the machine-learning models. Furthermore, determining a similarity between a probability distribution for the test data set and the

probability distributions for the multiple machine-learning models may include comparing probability distributions for the same variable types.

[0044] In response to determining that only one calculated similarity value exceeds a threshold value (block 418), control passes to block 420 with the model select unit selecting and calling the model having a probability distribution similarity above the threshold. In response to determining that more than one calculated similarity value exceeds the threshold (block 418), control passes to block 422 with the model select unit selecting and calling the model, among the models corresponding to the exceeding similarity values, a model having a highest cross-validation score. Following selection of a model to classify the test data vector at one of blocks 414, 420, or 422, a classifier processes the selected model to determine a formation property classification (block 424). If additional test vectors within the test data set remain to be classified as determined at inquiry block 426, control returns to block 406 to begin processing the next test vector until all of the test vectors are classified and the process ends.

[0045] FIG. 5 illustrates a drilling system 500 in accordance with some embodiments. Drilling system 500 is configured to include downhole measurement tools and sensors for measuring properties of downhole material such as formation material and downhole fluids. The measurements may be processed as test data for example to determine, using the machine-learning model generation and selection procedure described above, the lithological class and chemical composition of the downhole materials. The resultant downhole material properties information may be utilized for various purposes such as for modifying a drilling parameter or configuration, such as penetration rate or drilling direction, in a measurement-while-drilling (MWD) and a logging-while-drilling (LWD) operation. Drilling system 500 may be configured to drive a bottom hole assembly (BHA) 504 positioned or otherwise arranged at the bottom of a drill string 506 extended into the earth 502 from a derrick 508 arranged at the surface 510. Derrick 508 may include a kelly 512 and a traveling block 513 used to lower and raise kelly 512 and drill string 506.

[0046] BHA 504 may include a drill bit 514 operatively coupled to a tool string 516 that may be moved axially within a drilled wellbore 518 as attached to the drill string 506. During operation, drill bit 514 penetrates the earth 502 and thereby creates wellbore 518. BHA 504 may provide directional control of drill bit 514 as it advances into the earth 502. Tool string 516 can be semi-permanently mounted with various measurement tools (not shown) such as, but not limited to, MWD and LWD tools, that may be configured to perform downhole measurements of downhole conditions. In some embodiments, the measurement tools may be self-contained within tool string 516, as shown in FIG. 5.

[0047] Drilling fluid from a drilling fluid tank **520** may be pumped downhole using a pump **522** powered by an adjacent power source, such as a prime mover or motor **524**. The drilling fluid may be pumped from the tank **520**, through a stand pipe **526**, which feeds the drilling fluid into drill string **506** and conveys the same to drill bit **514**. The drilling fluid
5 exits one or more nozzles arranged in drill bit **514** and in the process cools drill bit **514**. After exiting drill bit **514**, the drilling fluid circulates back to the surface **510** via the annulus defined between wellbore **518** and drill string **506**, and in the process, returns drill cuttings and debris to the surface. The cuttings and mud mixture are passed through a flow line **528** and are processed such that a cleaned drilling fluid is returned down hole through stand
10 pipe **526**.

[0048] Tool string **516** may further include a downhole measurement tool **530** similar to the downhole tools described herein. Downhole tool **530** may be controlled from the surface **510** by a computer **540** having a memory **542** and a processor **544**. Accordingly, memory **542** may store commands that, when executed by processor **544**, cause computer **540** to
15 perform at least some steps in methods consistent with the present disclosure.

[0049] FIG. 6 illustrates a wireline system **600** that may employ one or more principles of the present disclosure. In some embodiments, wireline system **600** may be configured to deploy and operate downhole measurement tools. After drilling of wellbore **518** is complete, it may be desirable to determine details regarding formation material and composition of
20 formation fluids and associated properties through wireline sampling. Wireline system **600** may include a downhole tool **602** that forms part of a wireline logging operation that can include one or more measurement components **604**, as described herein, as part of a downhole measurement tool. Wireline system **600** may include the derrick **508** that supports the traveling block **513**. Wireline logging tool **602**, such as a probe or sonde, may be lowered by
25 a wireline cable **606** into wellbore **518**.

[0050] Downhole tool **602** may be lowered to potential production zone or other region of interest within wellbore **518** and used in conjunction with other components such as packers and pumps to perform downhole measurements and other well testing and sampling. Measurement components **604** may be configured to measure conditions and responses of the
30 formation materials and fluids, and any measurement data generated by downhole tool **602** and its associated measurement components **604** can be real-time processed for decision-making, or communicated to a surface logging facility **608** for storage, processing, and/or analysis. Logging facility **608** may be provided with electronic equipment **610**, including processors for various types of data and signal processing including perform at least some
35 steps in methods consistent with the present disclosure.

Example Computer

[0051] FIG. 7 is a block diagram depicting an example computer system that may be utilized to implement control operations for implementing a formation testing operation in accordance with some embodiments. The computer system includes a processor 701 (possibly including multiple processors, multiple cores, multiple nodes, and/or implementing multi-threading, etc.). The computer system includes a memory 707. The memory 707 may be system memory (e.g., one or more of cache, SRAM, DRAM, etc.) or any one or more of the above already described possible realizations of machine-readable media. The computer system also includes a bus 703 (e.g., PCI, ISA, PCI-Express, InfiniBand® bus, NuBus, etc.) and a network interface 705 which may comprise a Fiber Channel, Ethernet interface, SONET, or other interface.

[0052] The system also includes a test data classification system 711, which may comprise hardware, software, firmware, or a combination thereof. Test data classification system 711 may be configured similarly to the data processing systems illustrated in FIGS. 1 and 2. For example, test data classification system 711 may comprise instructions executable by the processor 701 to implement any of the previously described functionalities that may be partially (or entirely) implemented in hardware and/or on the processor 701. For example, the functionality may be implemented with an application specific integrated circuit, in logic implemented in the processor 701, in a co-processor on a peripheral device or card, etc.

Example Embodiments

[0053] EMBODIMENT 1: A method for classifying test data, said method comprising: determining one or more variable types in a multivariate test vector within a data set; for a plurality of machine-learning models, determining a closest match between variable types used by the machine-learning models and the determined variable types for the test vector; in response to determining a closest match for one machine-learning model, selecting a corresponding machine-learning model and classifying the test vector using the selected machine-learning model; and in response to determining a closest match for multiple machine-learning models, determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models to generate similarity values for each of the multiple machine-learning models; and in response to one of the similarity values exceeding a threshold value, selecting a machine-learning model corresponding to the exceeding similarity value and classifying the test vector using the selected machine-learning model. The method may further comprise in response to two or more of the similarity values exceeding the threshold value, selecting a machine-learning

model having a highest cross-validation value among the two or more machine-learning models corresponding to the exceeding two or more similarity values. Said selecting a machine-learning model having a highest cross-validation value may comprise comparing cross-validation values that each represent classification accuracy based on testing using a subset of the training data. Said determining a closest match between variable types may comprise determining a largest number of matching variable types between the test vector and variables included in training data sets for each of the machine-learning models. Said determining one or more variable types in the test vector may include: identifying all variable types test data set; and determining the variable types present in the test vector from among all variable types in the test data set. Said determining a closest match between variable types used by the machine-learning models and the determined variable types for the test vector may comprise determining a closest match between variable types used to train the machine-learning models and the determined variable types for the test vector. Said determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models may comprise calculating distance between data points in the probability distribution for the test data set and data points in the probability distributions for the machine-learning models. Said determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models may include comparing probability distributions for the same variable types.

[0054] EMBODIMENT 2: A non-transitory, machine-readable medium having instructions stored thereon that are executable by a computing device to perform operations comprising: determining one or more variable types in a multivariate test vector within a data set; for a plurality of machine-learning models, determining a closest match between variable types used by the machine-learning models and the determined variable types for the test vector; in response to determining a closest match for one machine-learning model, selecting a corresponding machine-learning model and classifying the test vector using the selected machine-learning model; and in response to determining a closest match for multiple machine-learning models, determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models to generate similarity values for each of the multiple machine-learning models; and in response to one of the similarity values exceeding a threshold value, selecting a machine-learning model corresponding to the exceeding similarity value and classifying the test vector using the selected machine-learning model. The machine-readable medium may further comprise instructions executable by the computing device to perform operations comprising: in response to two or more of the similarity values exceeding the threshold value, selecting a

machine-learning model having a highest cross-validation value among the two or more machine-learning models corresponding to the exceeding two or more similarity values. Said selecting a machine-learning model having a highest cross-validation value may comprise comparing cross-validation values that each represent classification accuracy based on testing using a subset of the training data. Said determining a closest match between variable types may comprise determining a largest number of matching variable types between the test vector and variables included in training data sets for each of the machine-learning models. Said determining one or more variable types in the test vector may include: identifying all variable types test data set; and determining the variable types present in the test vector from among all variable types in the test data set. Said determining a closest match between variable types used by the machine-learning models and the determined variable types for the test vector may comprise determining a closest match between variable types used to train the machine-learning models and the determined variable types for the test vector. Said determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models may comprise calculating distance between data points in the probability distribution for the test data set and data points in the probability distributions for the machine-learning models. Said determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models may include comparing probability distributions for the same variable types.

[0055] EMBODIMENT 3: An apparatus for classifying test data, said system comprising: a processor; and a computer-readable medium having instructions stored thereon that are executable by the processor to cause the apparatus to, determine one or more variable types in a multivariate test vector within a data set; for a plurality of machine-learning models, determine a closest match between variable types used by the machine-learning models and the determined variable types for the test vector; in response to determining a closest match for one machine-learning model, selecting a corresponding machine-learning model and classifying the test vector using the selected machine-learning model; and in response to determining a closest match for multiple machine-learning models, determine a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models to generate similarity values for each of the multiple machine-learning models; and in response to one of the similarity values exceeding a threshold value, select a machine-learning model corresponding to the exceeding similarity value and classifying the test vector using the selected machine-learning model. The instructions may further comprise instructions that are executable by the processor to cause the apparatus to in response to two or more of the similarity values exceeding the

- threshold value, select a machine-learning model having a highest cross-validation value among the two or more machine-learning models corresponding to the exceeding two or more similarity values. Said selecting a machine-learning model having a highest cross-validation value may comprise comparing cross-validation values that each represent classification
- 5 accuracy based on testing using a subset of the training data. Said determining a closest match between variable types may comprise determining a largest number of matching variable types between the test vector and variables included in training data sets for each of the machine-learning models.

CLAIMS

1. A method for classifying test data, said method comprising:
determining one or more variable types in a multivariate test vector within a data set;
for a plurality of machine-learning models, determining a closest match between
variable types used by the machine-learning models and the determined
5 variable types for the test vector;
in response to determining a closest match for one machine-learning model, selecting
a corresponding machine-learning model and classifying the test vector using
the selected machine-learning model; and
in response to determining a closest match for multiple machine-learning models,
10 determining a similarity between a probability distribution for the test data set
and the probability distributions for the multiple machine-learning
models to generate similarity values for each of the multiple
machine-learning models; and
in response to one of the similarity values exceeding a threshold value,
15 selecting a machine-learning model corresponding to the exceeding
similarity value and classifying the test vector using the selected
machine-learning model.
2. The method of claim 1, further comprising:
in response to two or more of the similarity values exceeding the threshold value,
20 selecting a machine-learning model having a highest cross-validation value
among the two or more machine-learning models corresponding to the
exceeding two or more similarity values.
- 25 3. The method of claim 2, wherein said selecting a machine-learning model having a
highest cross-validation value comprises comparing cross-validation values that each
represent classification accuracy based on testing using a subset of the training data.
4. The method of claim 1, wherein said determining a closest match between variable
types comprises determining a largest number of matching variable types between the test
30 vector and variables included in training data sets for each of the machine-learning
models.

5. The method of claim 1, wherein said determining one or more variable types in the test vector includes:

identifying all variable types test data set; and

determining the variable types present in the test vector from among all variable types
5 in the test data set.

6. The method of claim 1, wherein said determining a closest match between variable types used by the machine-learning models and the determined variable types for the test vector comprises determining a closest match between variable types used to train the machine-learning models and the determined variable types for the test vector.

10 7. The method of claim 1, wherein determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models comprises calculating distance between data points in the probability distribution for the test data set and data points in the probability distributions for the machine-learning models.

15 8. The method of claim 7, wherein determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models includes comparing probability distributions for the same variable types.

9. A non-transitory, machine-readable medium having instructions stored thereon that are executable by a computing device to perform operations comprising:

20 determining one or more variable types in a multivariate test vector within a data set;
for a plurality of machine-learning models, determining a closest match between
variable types used by the machine-learning models and the determined
variable types for the test vector;
in response to determining a closest match for one machine-learning model, selecting
25 a corresponding machine-learning model and classifying the test vector using
the selected machine-learning model; and
in response to determining a closest match for multiple machine-learning models,
determining a similarity between a probability distribution for the test data set
and the probability distributions for the multiple machine-learning
30 models to generate similarity values for each of the multiple
machine-learning models; and
in response to one of the similarity values exceeding a threshold value,
selecting a machine-learning model corresponding to the exceeding

similarity value and classifying the test vector using the selected machine-learning model.

10. The machine-readable medium of claim 9, further comprising instructions that are executable by the computing device to perform operations comprising:

5 in response to two or more of the similarity values exceeding the threshold value, selecting a machine-learning model having a highest cross-validation value among the two or more machine-learning models corresponding to the exceeding two or more similarity values.

10

11. The machine-readable medium of claim 10, wherein said selecting a machine-learning model having a highest cross-validation value comprises comparing cross-validation values that each represent classification accuracy based on testing using a subset of the training data.

15

12. The machine-readable medium of claim 9, wherein said determining a closest match between variable types comprises determining a largest number of matching variable types between the test vector and variables included in training data sets for each of the machine-learning models.

20

13. The machine-readable medium of claim 9, wherein said determining one or more variable types in the test vector includes:
identifying all variable types test data set; and
determining the variable types present in the test vector from among all variable types in the test data set.

25

14. The machine-readable medium of claim 9, wherein said determining a closest match between variable types used by the machine-learning models and the determined variable types for the test vector comprises determining a closest match between variable types used to train the machine-learning models and the determined variable types for the test vector.

30

15. The machine-readable medium of claim 9, wherein determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models comprises calculating distance between data points in

the probability distribution for the test data set and data points in the probability distributions for the machine-learning models.

16. The machine-readable medium of claim 15, wherein determining a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models includes comparing probability distributions for the same variable types.

17. An apparatus for classifying test data, said system comprising:

a processor; and

a computer-readable medium having instructions stored thereon that are executable

by the processor to cause the apparatus to,

determine one or more variable types in a multivariate test vector within a data set;

for a plurality of machine-learning models, determine a closest match

between variable types used by the machine-learning models and the

determined variable types for the test vector;

in response to determining a closest match for one machine-learning model,

selecting a corresponding machine-learning model and classifying

the test vector using the selected machine-learning model; and

in response to determining a closest match for multiple machine-learning models,

determine a similarity between a probability distribution for the test data set and the probability distributions for the multiple machine-learning models to generate similarity values for each of the multiple machine-learning models; and

in response to one of the similarity values exceeding a threshold value, select a machine-learning model corresponding to the exceeding similarity value and classifying the test vector using the selected machine-learning model.

18. The apparatus of claim 17, wherein the instructions further comprise instructions that are executable by the processor to cause the apparatus to:

in response to two or more of the similarity values exceeding the threshold value, select a machine-learning model having a highest cross-validation value among the two or more machine-learning models corresponding to the exceeding two or more similarity values.

19. The apparatus of claim 18, wherein said selecting a machine-learning model having a highest cross-validation value comprises comparing cross-validation values that each represent classification accuracy based on testing using a subset of the training data.

5 20. The apparatus of claim 17, wherein said determining a closest match between variable types comprises determining a largest number of matching variable types between the test vector and variables included in training data sets for each of the machine-learning models.

10


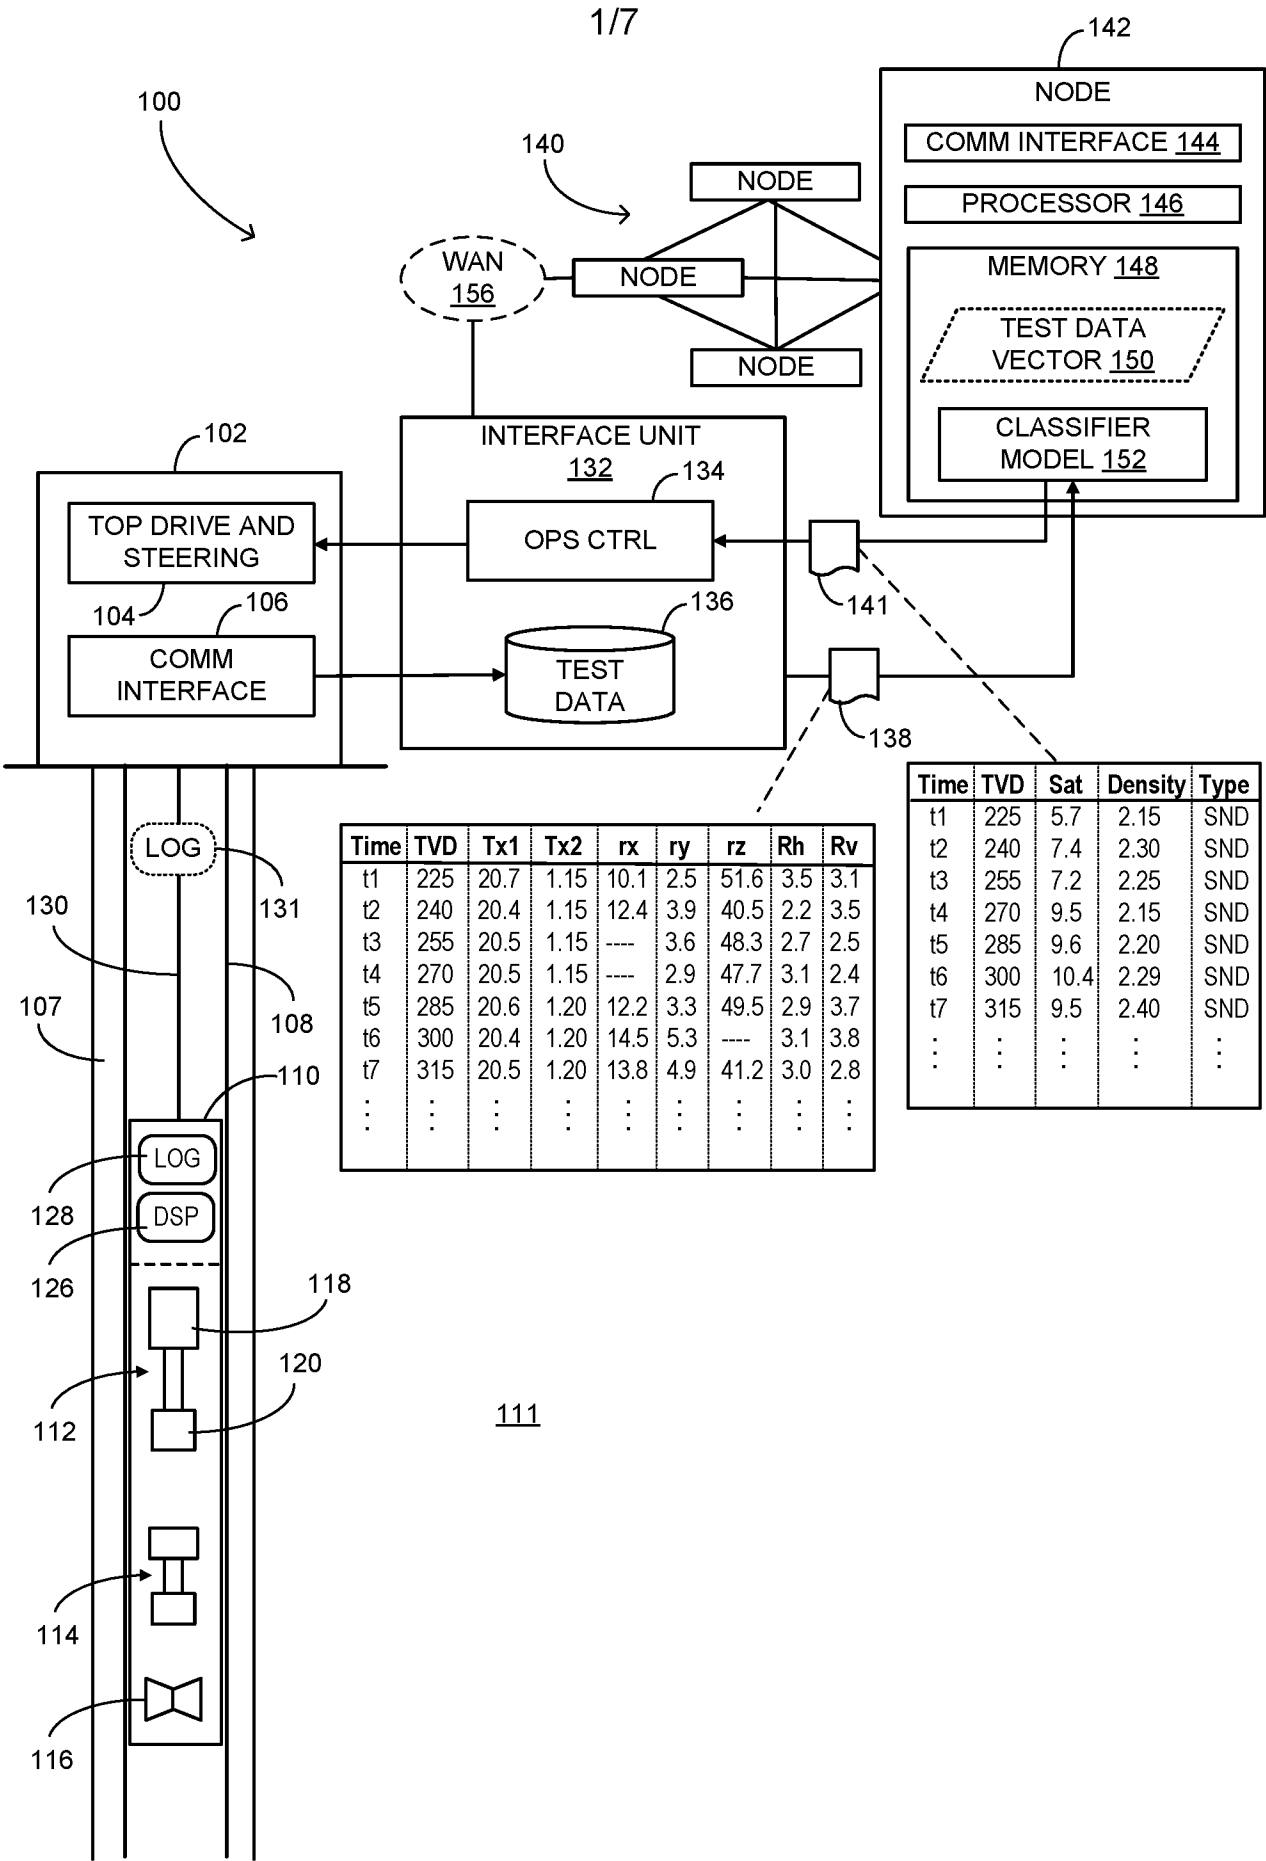


FIG. 1

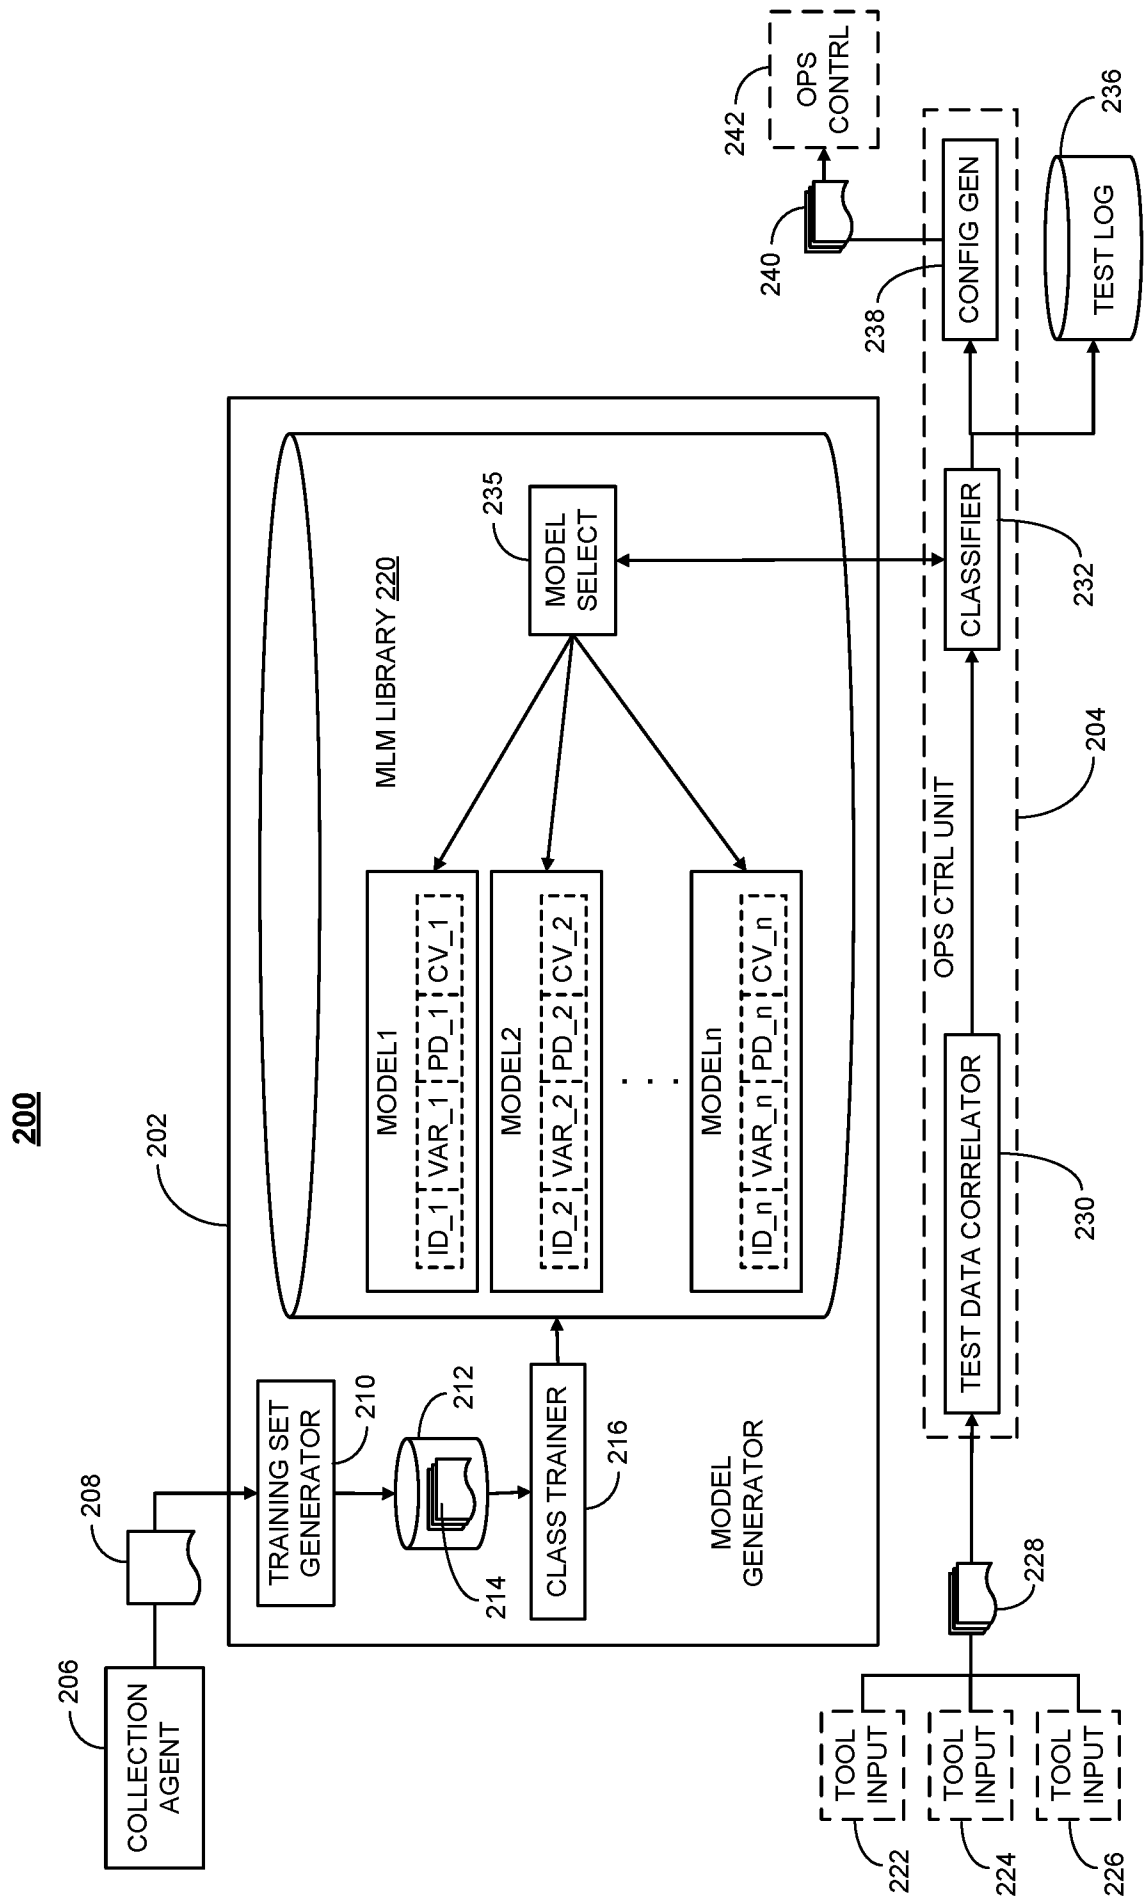

3/7

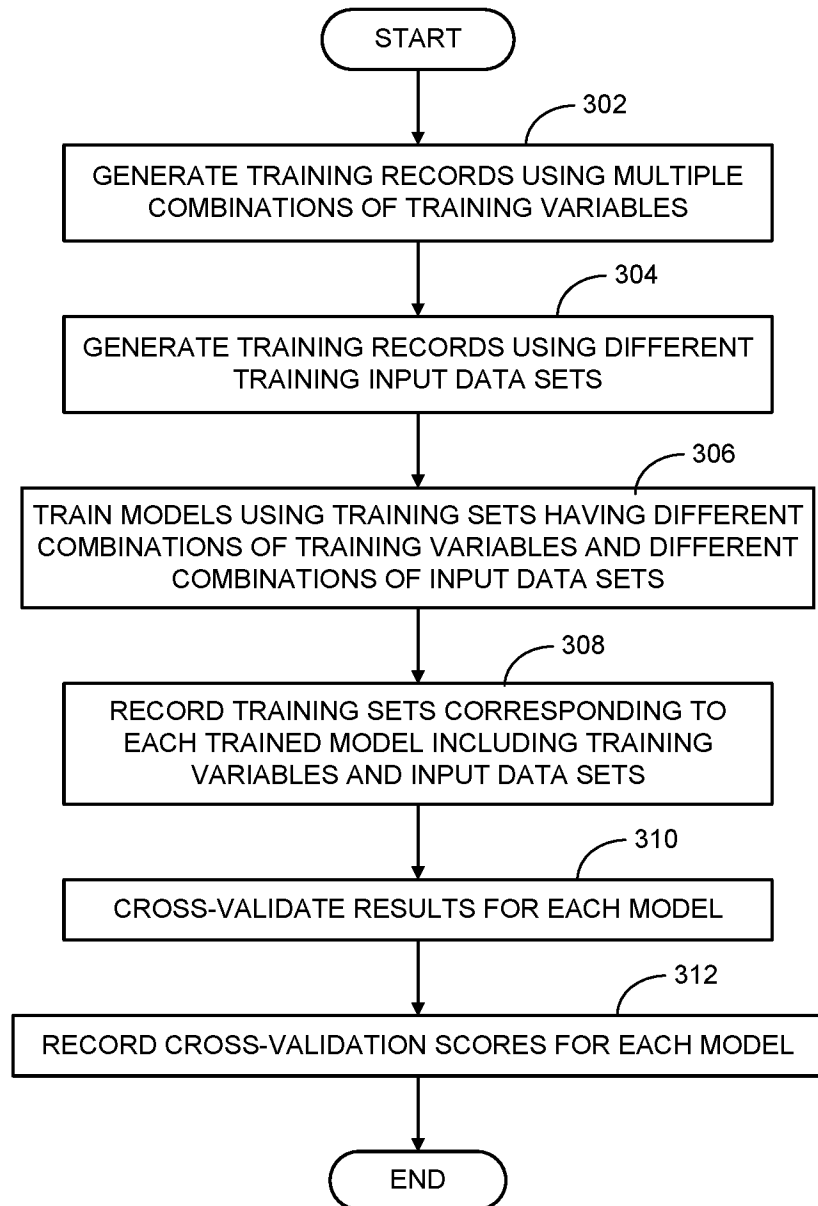


FIG. 3

4/7

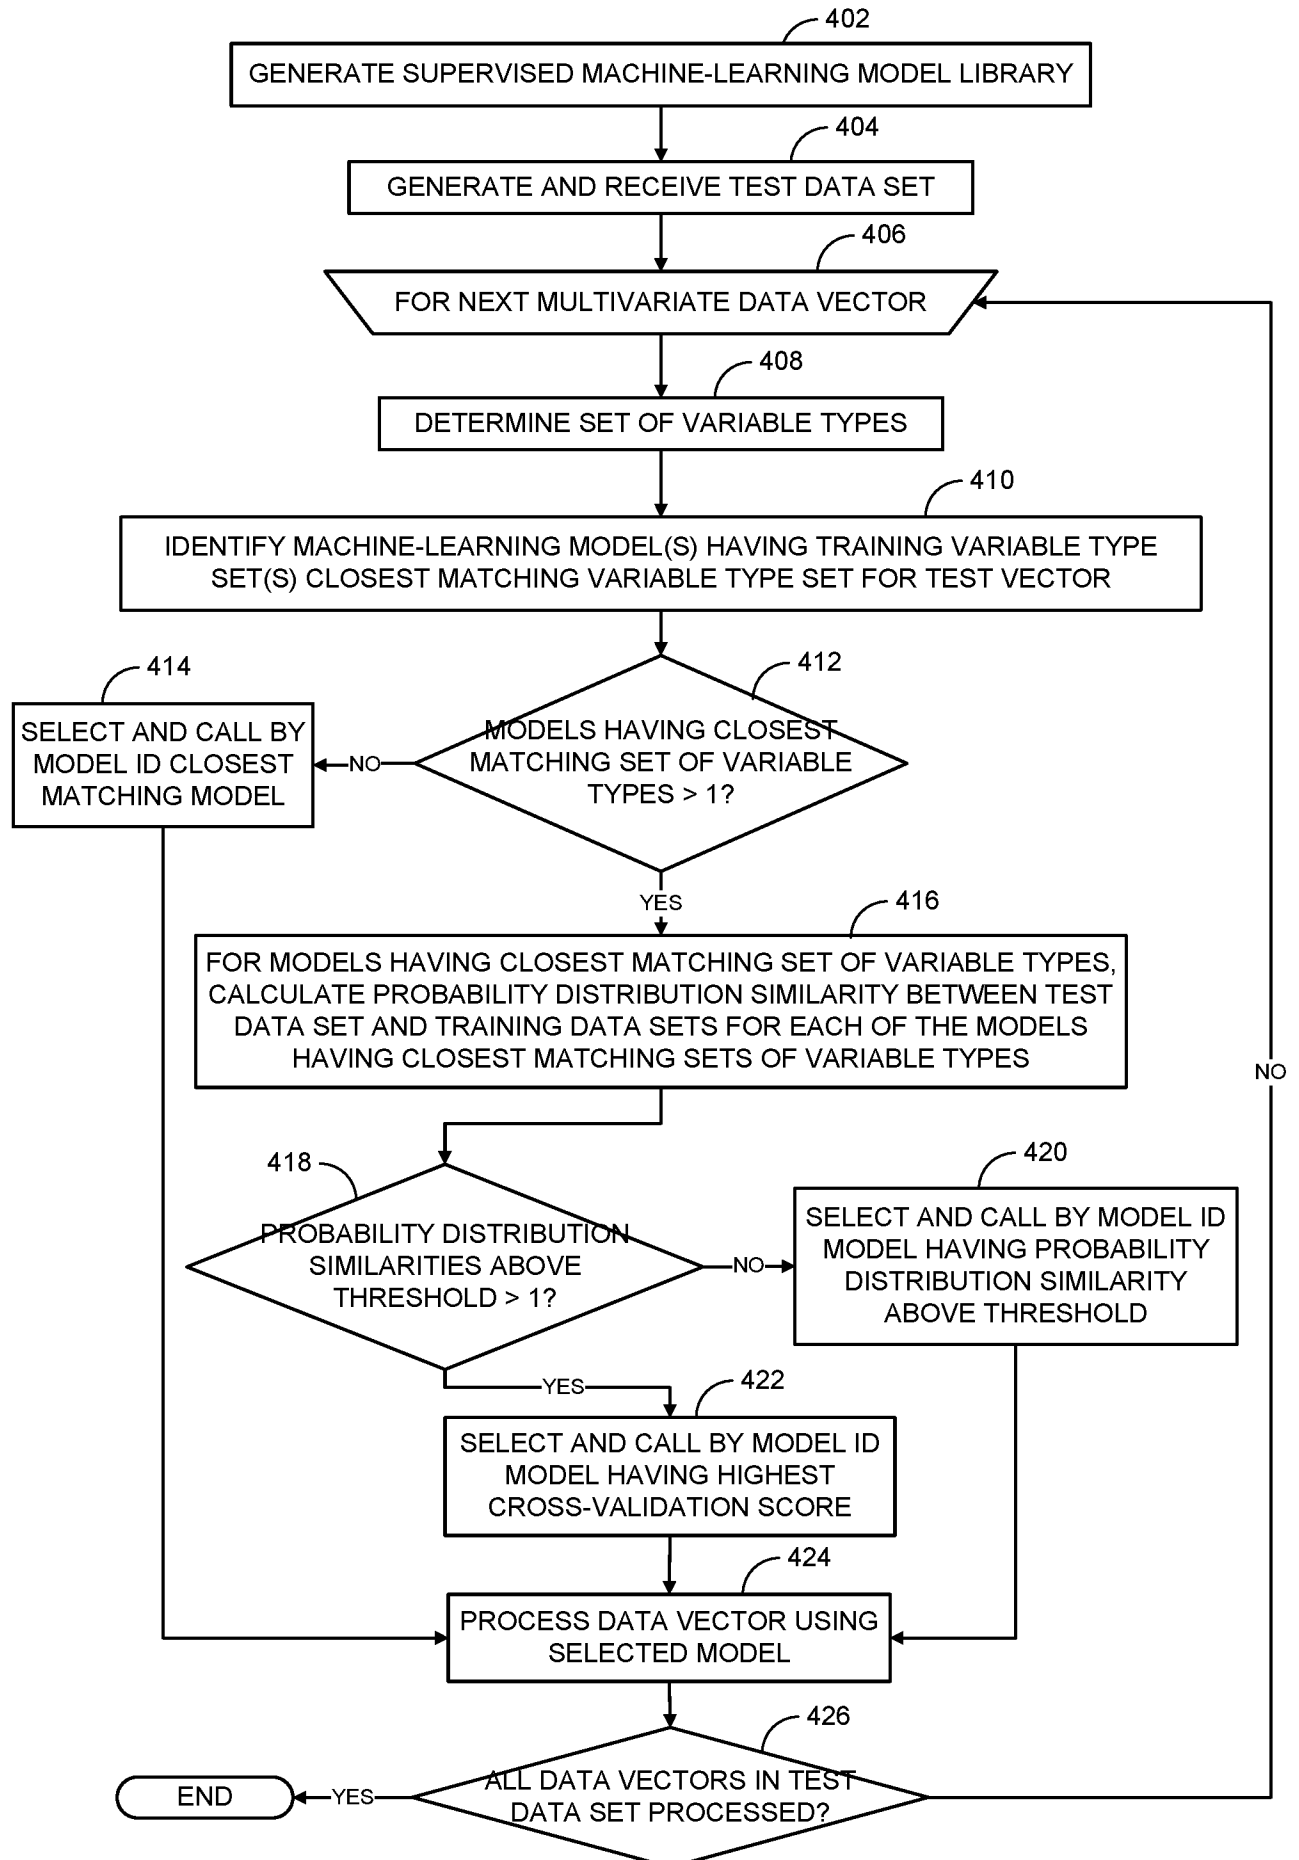


FIG. 4

5/7

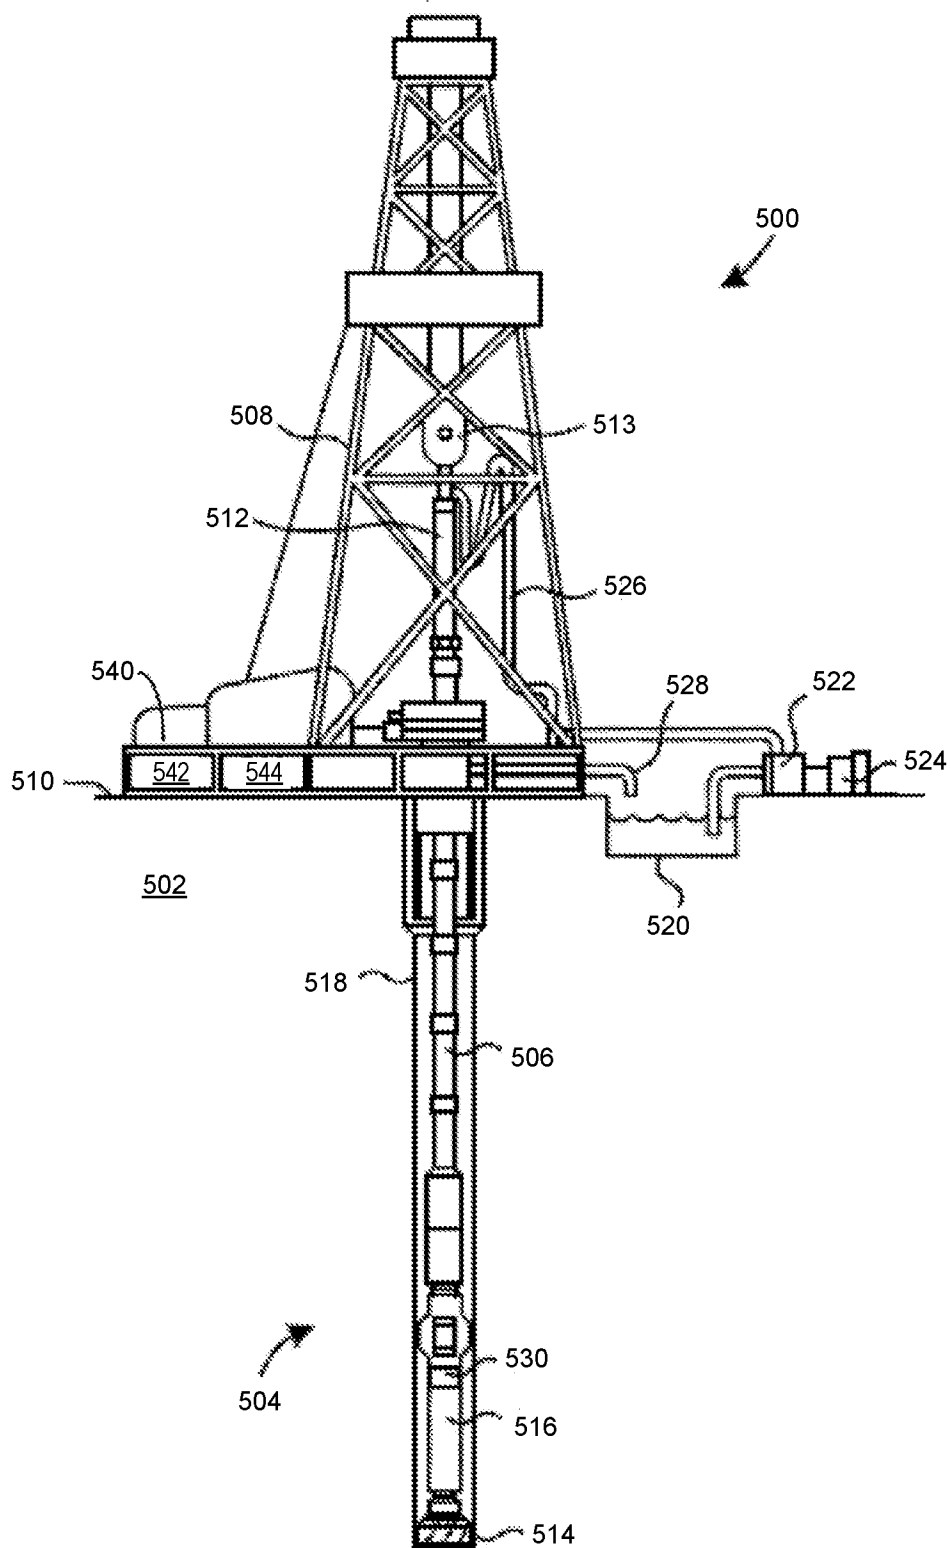


FIG. 5

6/7

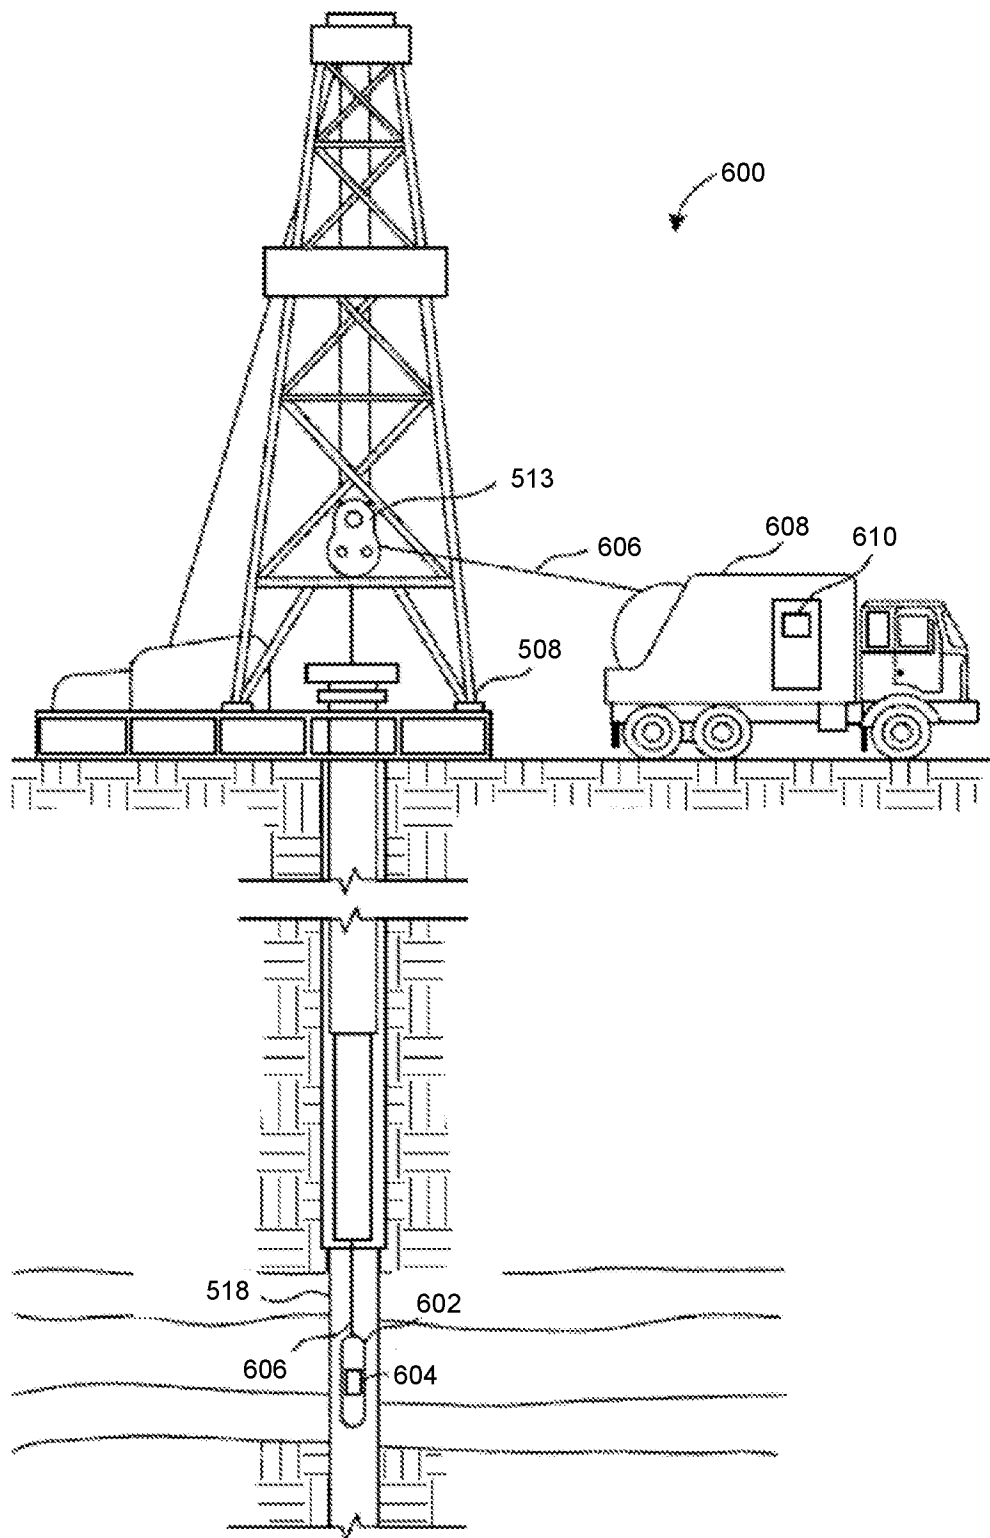


FIG. 6

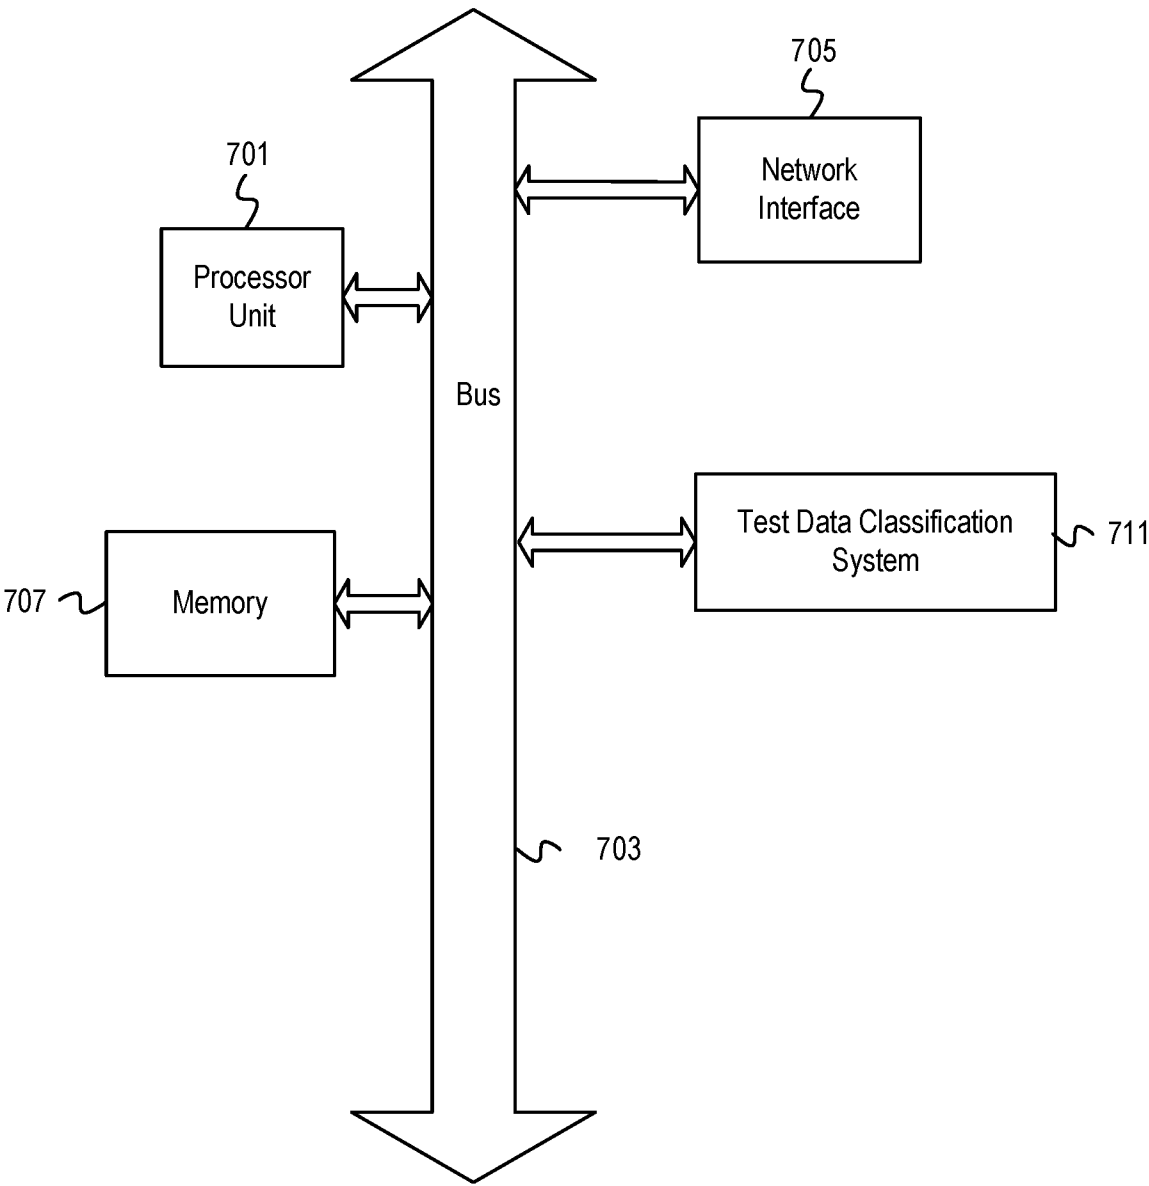


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2020/042698

A. CLASSIFICATION OF SUBJECT MATTER**E21B 49/08(2006.01)i; E21B 41/00(2006.01)i; E21B 47/26(2012.01)i; G06N 20/00(2019.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 49/08(2006.01); E21B 43/26(2006.01); E21B 49/00(2006.01); G01N 33/24(2006.01); G06F 15/18(2006.01); G06F 17/00(2006.01); G06F 17/30(2006.01); G06N 99/00(2010.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: a plurality of machine-learning models, multivariate test vector, closest match, corresponding machine-learning model, similarity, determine, select, classify

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2018-117890 A1 (SCHLUMBERGER TECHNOLOGY CORPORATION et al.) 28 June 2018 (2018-06-28) paragraphs [0001]-[0253]; and figures 1-18	1-20
Y	US 2018-0347354 A1 (SAUDI ARABIAN OIL COMPANY) 06 December 2018 (2018-12-06) paragraphs [0002]-[0113]; and figures 1-29	1-20
A	US 2013-0124176 A1 (FOX et al.) 16 May 2013 (2013-05-16) paragraphs [0002]-[0147]; and figures 1-8B	1-20
A	WO 2013-188241 A2 (LANDMARK GRAPHICS CORPORATION) 19 December 2013 (2013-12-19) paragraphs [0001]-[0053]; claims 1-11; and figures 1-12	1-20
A	US 2019-0108460 A1 (SAS INSTITUTE INC.) 11 April 2019 (2019-04-11) paragraphs [0002]-[0031]; claims 1-30; and figures 1-34	1-20

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“D” document cited by the applicant in the international application

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

01 April 2021

Date of mailing of the international search report

02 April 2021

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon
35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

BAHNG, SEUNG HOON

Telephone No. +82-42-481-5560

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2020/042698

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
WO	2018-117890	A1	28 June 2018	None			
US	2018-0347354	A1	06 December 2018	CA	3055385	A1	20 September 2018
				CN	110662962	A	07 January 2020
				EP	3596638	A1	22 January 2020
				WO	2018-170035	A1	20 September 2018
				WO	2018-170035	A8	11 October 2018
US	2013-0124176	A1	16 May 2013	US	9507754	B2	29 November 2016
				WO	2013-074093	A1	23 May 2013
WO	2013-188241	A2	19 December 2013	AU	2013-274606	A1	19 December 2013
				AU	2013-274606	B2	17 September 2015
				CA	2876266	A1	19 December 2013
				CA	2876266	C	23 October 2018
				EP	2859484	A2	15 April 2015
				RU	2014153646	A	27 July 2016
				RU	2600497	C2	20 October 2016
				US	2014-0351183	A1	27 November 2014
				US	9934338	B2	03 April 2018
				WO	2013-188241	A3	24 April 2014
US	2019-0108460	A1	11 April 2019	US	10169720	B2	01 January 2019
				US	10474968	B2	12 November 2019
				US	2015-0302432	A1	22 October 2015
				US	2015-0302433	A1	22 October 2015
				US	2017-0228661	A1	10 August 2017