


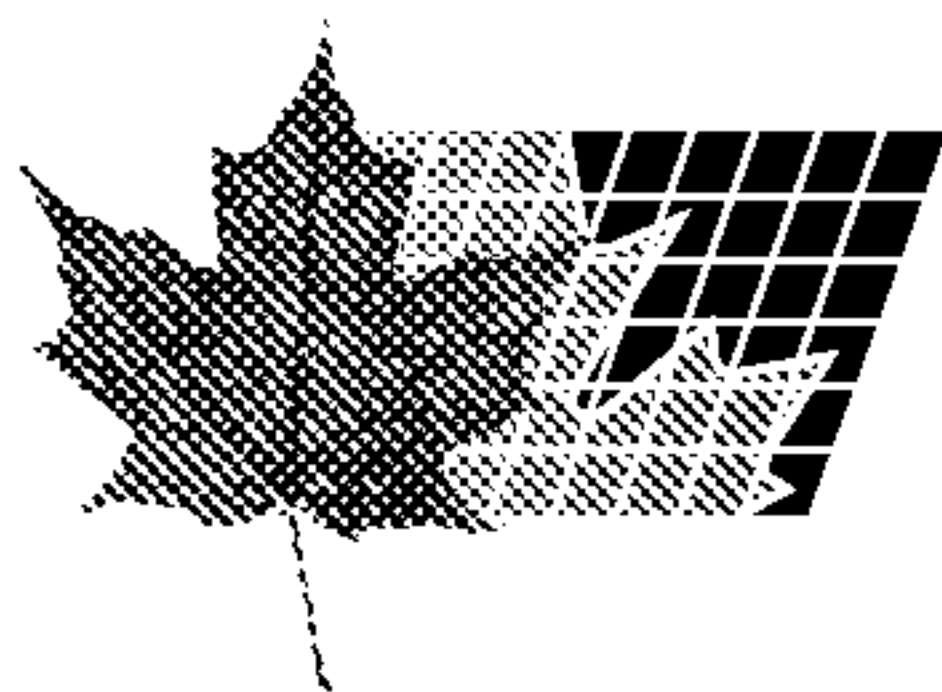

(72) BREUER, Wolfgang, DE

(72) SCHUETZ, Robert, DE

(72) UPHUES, Guenther, DE

(72) HEROLD, Claus-Peter, DE

(72) PI, Rafael, ES





(71) HENKEL KOMMANDITGESELLSCHAFT AUF AKTIEN, DE

(51) Int.Cl.⁶ C23F 11/14, E21B 41/02

(30) 1996/11/28 (196 49 285.8) DE

(54) **PROCEDE DE PROTECTION DE SURFACES METALLIQUES
CONTRE LA CORROSION DUE AU CONTACT AVEC DES
SUBSTANCES LIQUIDES OU GAZEUSES**


(54) **METHOD FOR PROTECTING METAL SURFACES AGAINST
CORROSION IN LIQUID OR GASEOUS MEDIA**

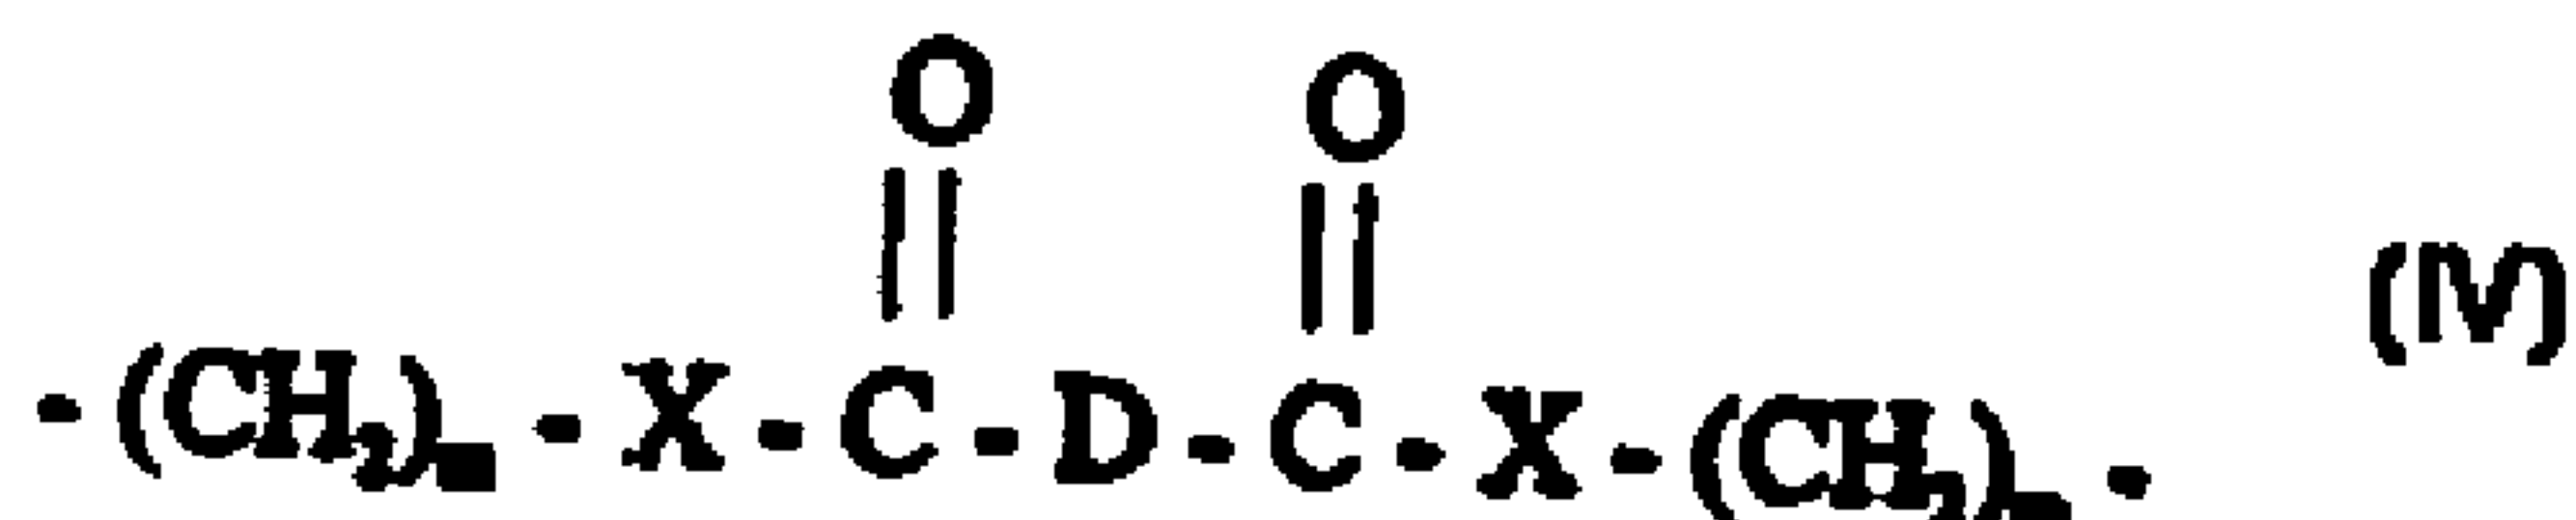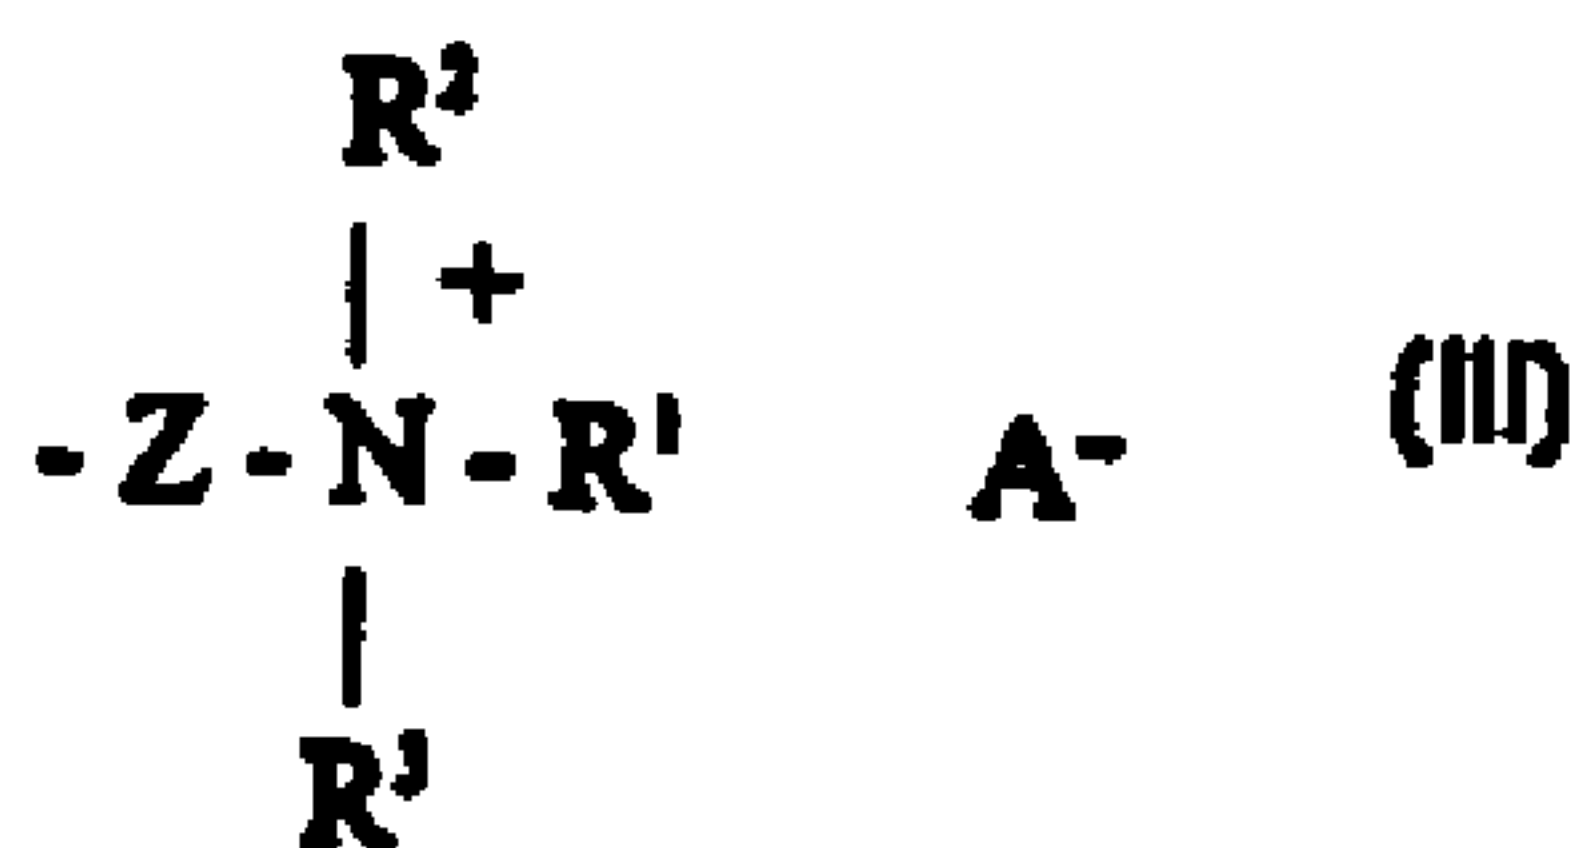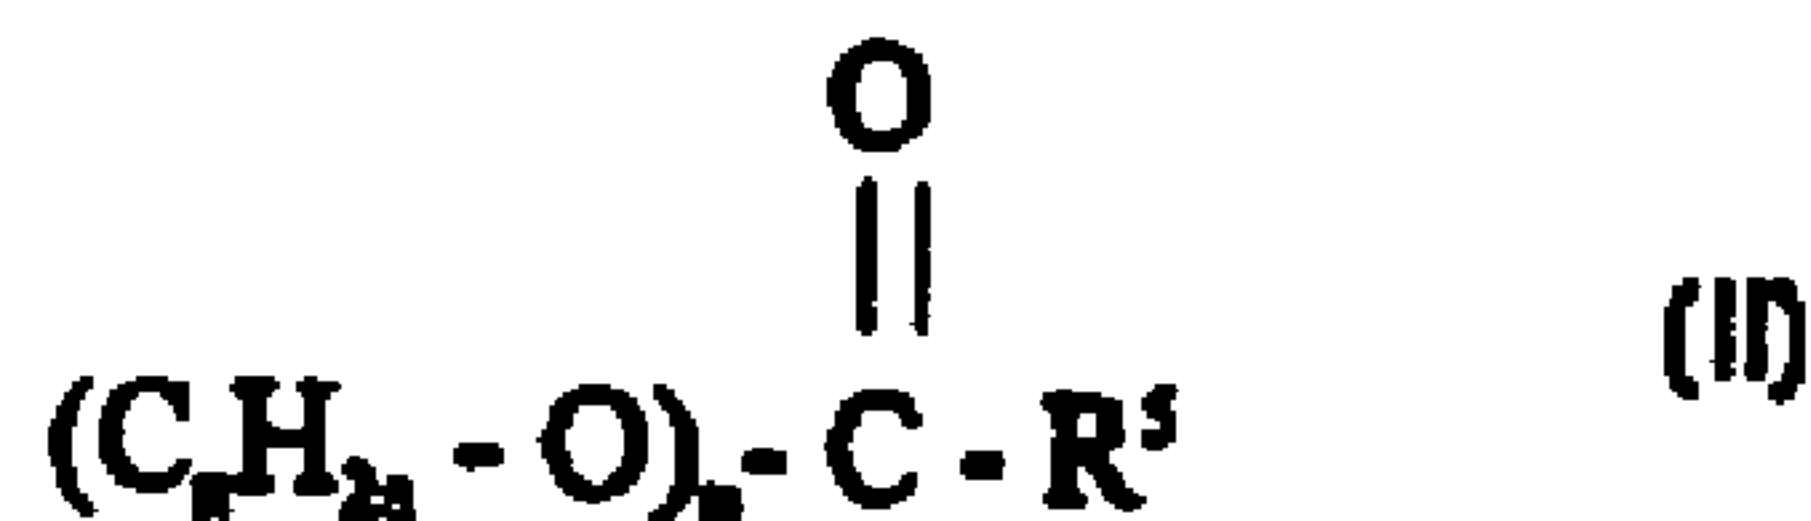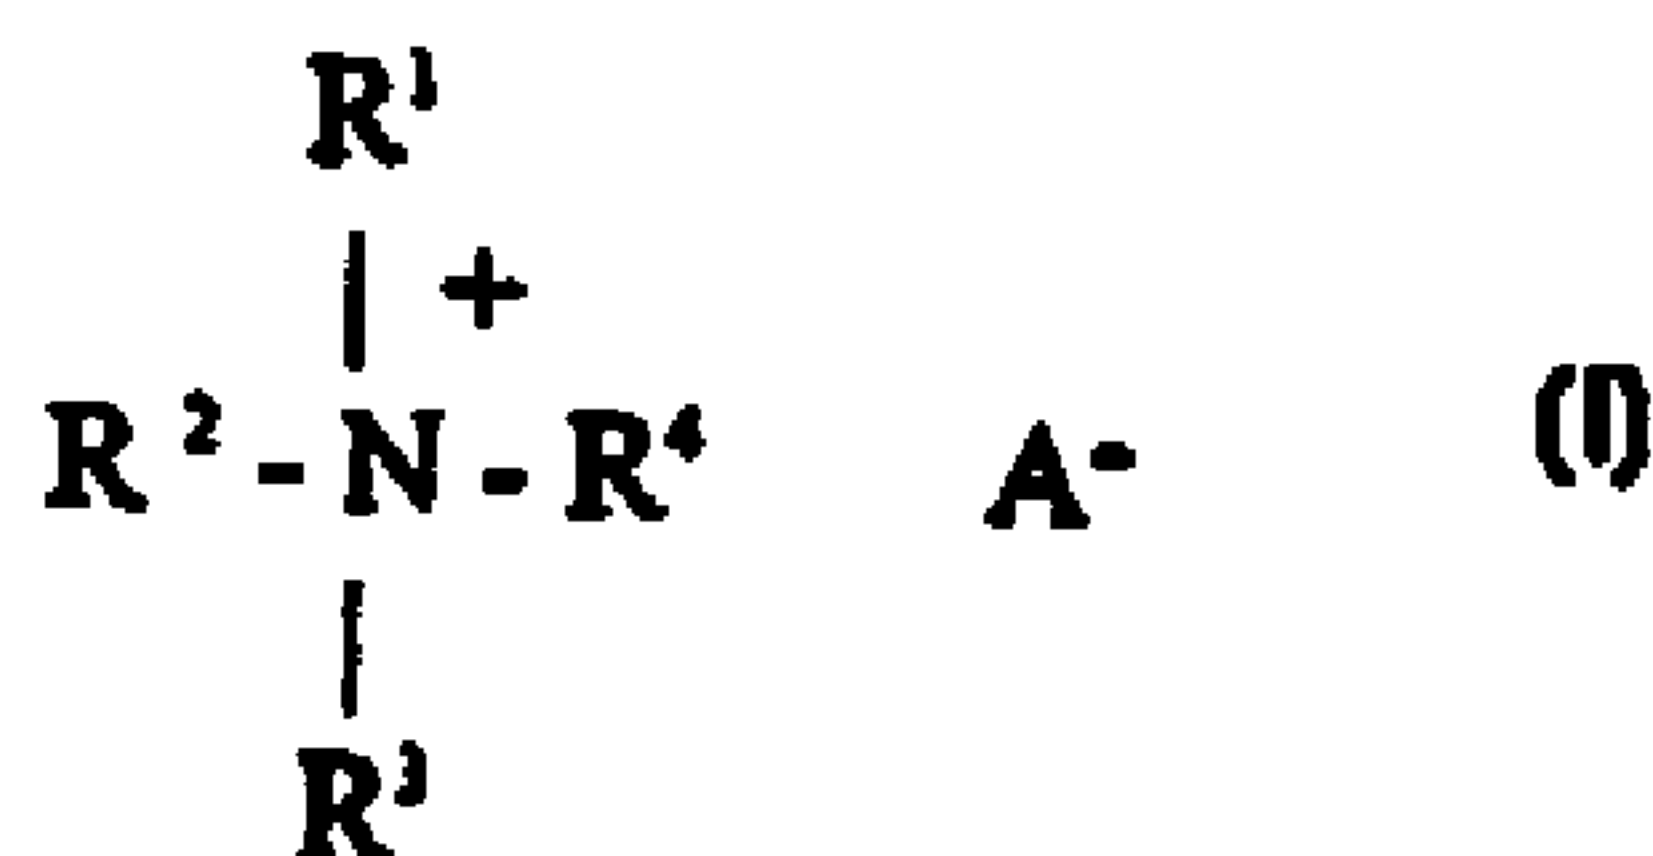

(57) L'invention concerne un procédé permettant de protéger des surfaces métalliques contre la corrosion due au contact avec des substances liquides aqueuses ou non aqueuses, ou bien gazeuses, caractérisé en ce que l'on ajoute auxdites substances des composés de la formule (I), dans laquelle: R¹, R² et R³ représentent, indépendamment les uns des autres, un reste alkyle ou hydroxyalkyle possédant 1 à 4 atomes de C, un reste

(57) Disclosed is a method for protecting metal surfaces against corrosion in liquid, aqueous, non-aqueous or gaseous media, characterized in that compounds of formula (I) are added to the media, whereby in formula (I) the radicals R¹, R² and R³ mean individually an alkyl or hydroxy alkyl radical with 1 to 4 C atoms, an alkyl or alkyl aryl radical or a radical of formula (II), in which n stands for 2 or 3, p is



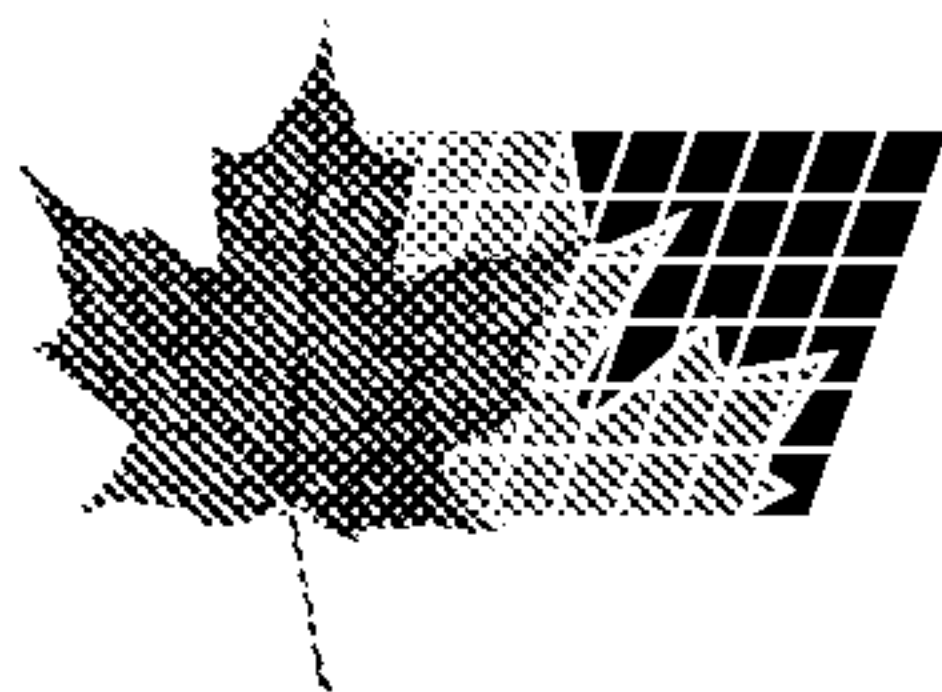

(21) (A1) **2,273,268**
(86) 1997/11/19
(87) 1998/06/04

aryle ou alkylaryle, ou un reste correspondant à la formule (II), dans laquelle n vaut 2 ou 3, p peut valoir de 1 à 3 et R^5 représente un reste alkyle ou alcényle possédant de 7 à 23 atomes de C et 0, 1, 2 ou 3 doubles liaisons; A^- représente un anion; et R^4 représente un reste correspondant à la formule (II) ou à la formule (III), formule (III) dans laquelle R^1 , R^2 et R^3 ont la signification donnée ci-dessus et Z représente un groupe $-(CH_2)_m-$ ou un groupe de la formule (IV) où m représente un nombre entier compris entre 1 et 6, X représente un groupe NH ou oxygène, et D représente un reste acide gras dimérisé possédant en moyenne 36 à 54 atomes de C.

1 to 3 and R^5 means an alkyl or alkenyl radical with 7 to 23 C atoms and 0, 1, 2 or 3 double bonds, A^- represents an anion, and R^4 means a radical of formula (II) or formula (III), wherein R^1 , R^2 and R^3 have the above-cited meaning and Z stands for a group $(CH_2)_m-$ or a group of formula (IV) where m represents a whole number between one and 6, X is a group NH or oxygen and D means a dimer fatty acid radical with in average 36 to 54 C atoms.





PCT
WELTORGANISATION FÜR GEISTIGES EIGENTUM
Internationales Büro
INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE
INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation⁶:

C23F 11/14, E21B 41/02

A1

(11) Internationale Veröffentlichungsnummer: WO 98/23792

(43) Internationales
Veröffentlichungsdatum:

4. Juni 1998 (04.06.98)

(21) Internationales Aktenzeichen: PCT/EP97/06451

(22) Internationales Anmeldedatum: 19. November 1997
(19.11.97)(30) Prioritätsdaten:
196 49 285.8 28. November 1996 (28.11.96) DE(71) Anmelder (für alle Bestimmungsstaaten ausser US): HENKEL
KOMMANDITGESELLSCHAFT AUF AKTIEN [DE/DE];
Henkelstrasse 67, D-40589 Düsseldorf (DE).





(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): BREUER, Wolfgang
[DE/DE]; Clara-Schumann-Strasse 13, D-41352 Ko-
rschenbroich (DE). SCHÜTZ, Robert [DE/DE]; Westring
82, D-47918 Tönisvorst (DE). UPHUES, Günther
[DE/DE]; Robert-Koch-Strasse 45, D-40789 Monheim
(DE). HEROLD, Claus-Peter [DE/DE]; Ostpreussenstrasse
26, D-40822 Mettmann (DE). PI, Rafael [ES/ES]; Roger
de Flor, 10, 8^o-2^a, E-08400 Ganollers (ES).(81) Bestimmungsstaaten: AU, CA, HU, NO, TR, US, eu-
ropäisches Patent (AT, BE, CH, DE, DK, ES, FI, FR, GB,
GR, IE, IT, LU, MC, NL, PT, SE).

Veröffentlicht

Mit internationalem Recherchenbericht.
Vor Ablauf der für Änderungen der Ansprüche zugelassenen
Frist. Veröffentlichung wird wiederholt falls Änderungen
eintreffen.

(54) Title: METHOD FOR PROTECTING METAL SURFACES AGAINST CORROSION IN LIQUID OR GASEOUS MEDIA

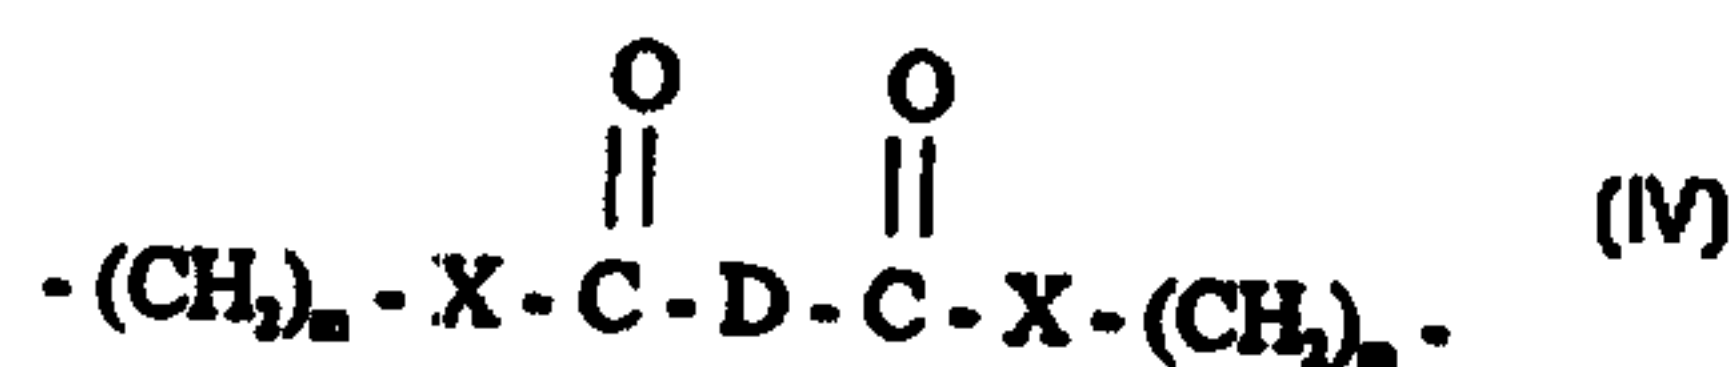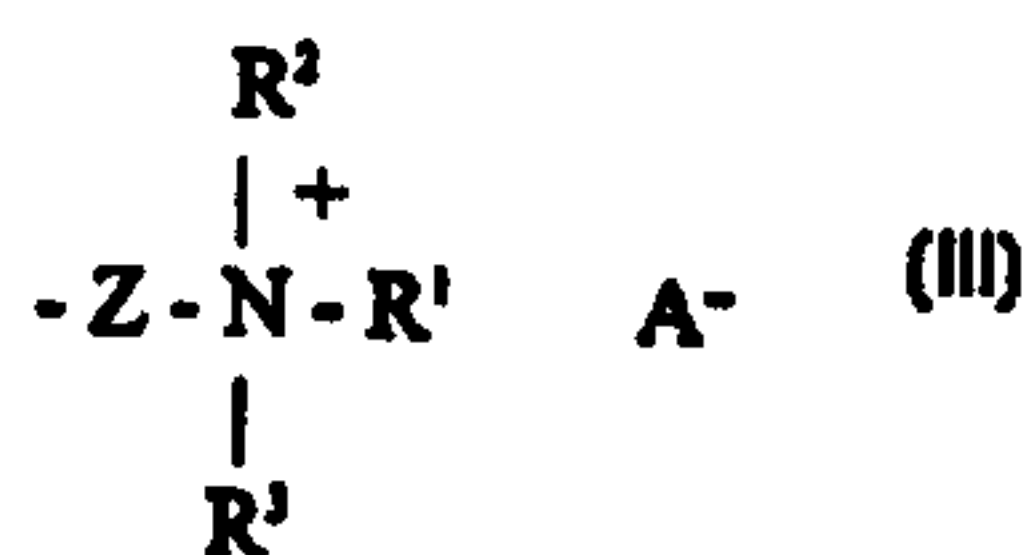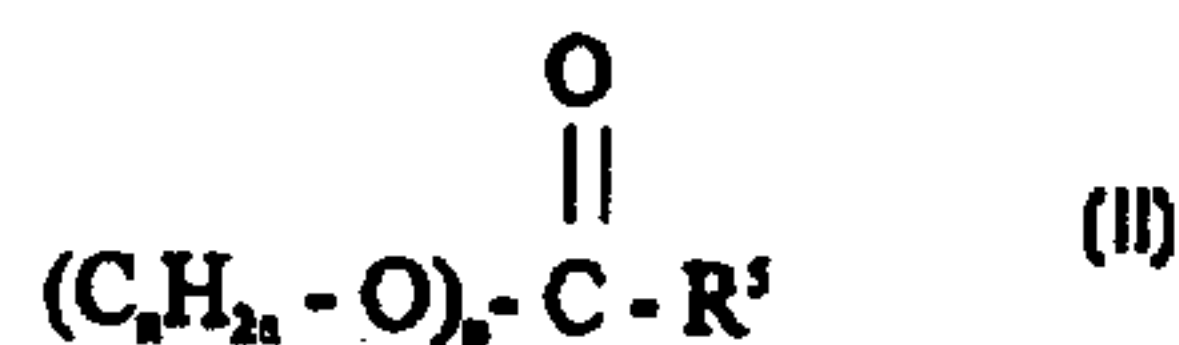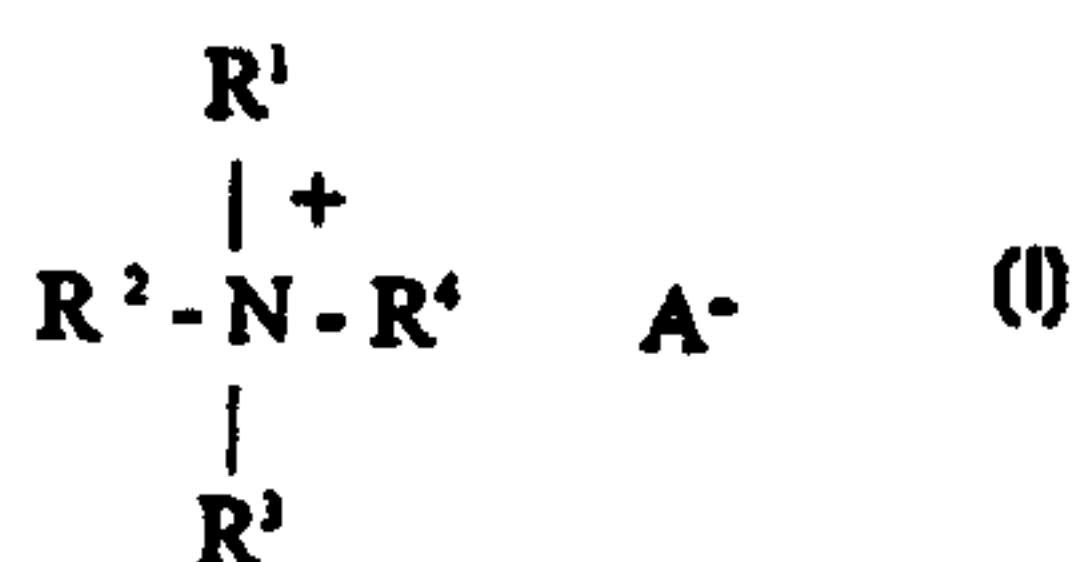(54) Bezeichnung: VERFAHREN ZUM SCHUTZ VON METALLOBERFLÄCHEN GEGENÜBER KORROSION IN FLÜSSIGEN
ODER GASFÖRMIGEN MEDIEN

(57) Abstract

Disclosed is a method for protecting metal surfaces against corrosion in liquid, aqueous, non-aqueous or gaseous media, characterized in that compounds of formula (I) are added to the media, whereby in formula (I) the radicals R^1 , R^2 and R^3 mean individually an alkyl or hydroxy alkyl radical with 1 to 4 C atoms, an alkyl or alkyl aryl radical or a radical of formula (II), in which n stands for 2 or 3, p is 1 to 3 and R^5 means an alkyl or alkenyl radical with 7 to 23 C atoms and 0, 1, 2 or 3 double bonds, A^- represents an anion, and R^4 means a radical of formula (II) or formula (III), wherein R^1 , R^2 and R^3 have the above-cited meaning and Z stands for a group $(CH_2)_m-$ or a group of formula (IV) where m represents a whole number between one and 6, X is a group NH or oxygen and D means a dimer fatty acid radical with in average 36 to 54 C atoms.

**Method for Protecting Metal Surfaces Against Corrosion in
Liquid or Gaseous Media**

This invention relates to a process for protecting metal surfaces against corrosion in liquid aqueous or non-aqueous or gaseous media and to the use of certain quaternized ammonium compounds as corrosion inhibitors.

5 The corrosion of metals in liquid or gaseous media is an age-old problem. In the field of geological exploration in particular, the metal surfaces of the equipment used have to be protected against corrosion, for example under the effect of the mildly acidic or deaerated saline aqueous solutions which are used in the production and processing of petroleum
10 and natural gas. Petroleum and natural gas and the water accompanying them contain corrosive constituents, for example CO₂ or H₂S and salts, which lead to serious corrosion of metal surfaces. In addition, the working fluids, for example drilling muds, used in this field also contribute towards corrosion.

15 Accordingly, so-called corrosion inhibitors are used to provide protection against corrosion, being added to the liquids or gases which come into contact with the metal surfaces. The corrosion inhibitors either form a film on the metal surface or reduce the corrosion process by physicochemical reactions on the metal surface (cf. P.H. Ogden,
20 **Chemicals in the Oil Industry, The Royal Society of Chemistry, 1991, pages 21-22** and O. Lahodny-Šarc, **Corrosion Inhibition in Oil and Gas Drilling and Production Operations, Eur. Fed. Corros., Publ. 1994, 11, pages 104-112**).

 Various substances, normally containing nitrogen, have already
25 been proposed as corrosion inhibitors (O. Lahodny-Šarc, pages 112-113). Mitzlaff et al. (**Werkstoff und Korrosion, 40, 629-634 (1989)**) describe quaternary ammonium compounds as corrosion inhibitors for the

production of petroleum and natural gas. Phillips et al. (**Proceedings of the 8th European Symposium on Corrosion Inhibitors, Suppl. N. 10, 1995, 1213-1227**) describe certain betaines, for example cocoamidopropyl compounds, for the same purpose. **EP 320 769 A2** discloses ethoxylated quaternized ammonium compounds specifically for use in the w/o emulsions encountered in the production and processing of petroleum.

More recently, corrosion inhibitors have also had to satisfy more stringent requirements in regard to their biodegradability and aquatic toxicity. **EP 651 074** describes N-ethoxyimidazolines substituted in the 2-position which not only have a favorable corrosion-inhibiting effect, they also show low aquatic toxicity (EC_{50} in *Skeletonema costatum* < 1 ppm).

Since it is precisely the chemicals used in the production of petroleum and natural gas which are having to meet increasingly more stringent environmental compatibility requirements, there is still a need to protect metal surfaces exposed to corrosive liquid or gaseous media against corrosion without using substances which have only limited environmental compatibility.


It has now been found that certain quaternized ammonium compounds which contain at least one ester group in the molecule have a favorable corrosion-inhibiting effect, are readily biodegradable and show low aquatic toxicity.

Accordingly, the present invention relates to a process for protecting metal surfaces against corrosion in liquid aqueous or non-aqueous or gaseous media, characterized in that compounds corresponding to formula (I):

WO 98/23792

3

PCT/EP97/06451

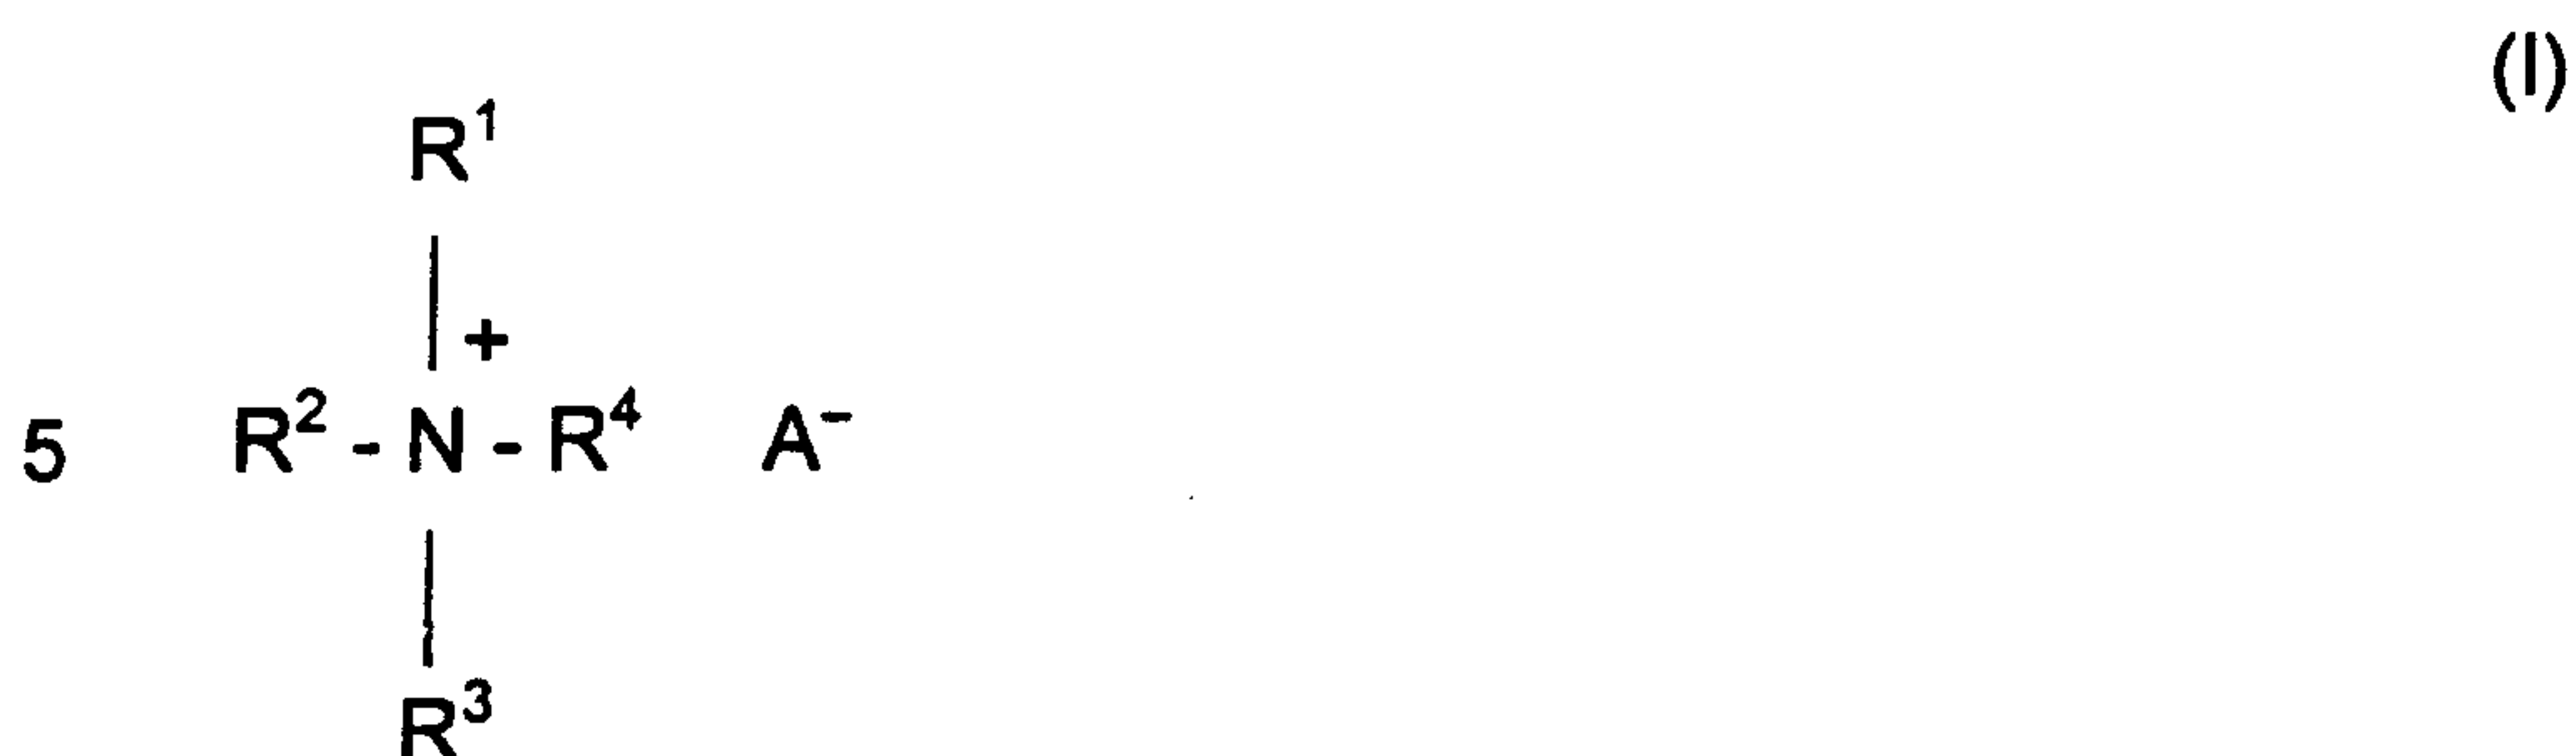

in which R^1 , R^2 and R^3 independently of one another represent an alkyl or hydroxyalkyl group containing 1 to 4 carbon atoms, an aryl or alkylaryl group or a group corresponding to formula (II):

10



A^- is an anion, n is the number 2 or 3, p is a number of 1 to 3 and R^5 is an alkyl or alkenyl group containing 7 to 23 carbon atoms and 0, 1, 2 or 3 double bonds,


20

and R^4 is a group corresponding to formula (II) or (III):



where R^1 , R^2 and R^3 are as defined above and Z is a group $-(CH_2)_m-$ or a group corresponding to formula (IV):

30

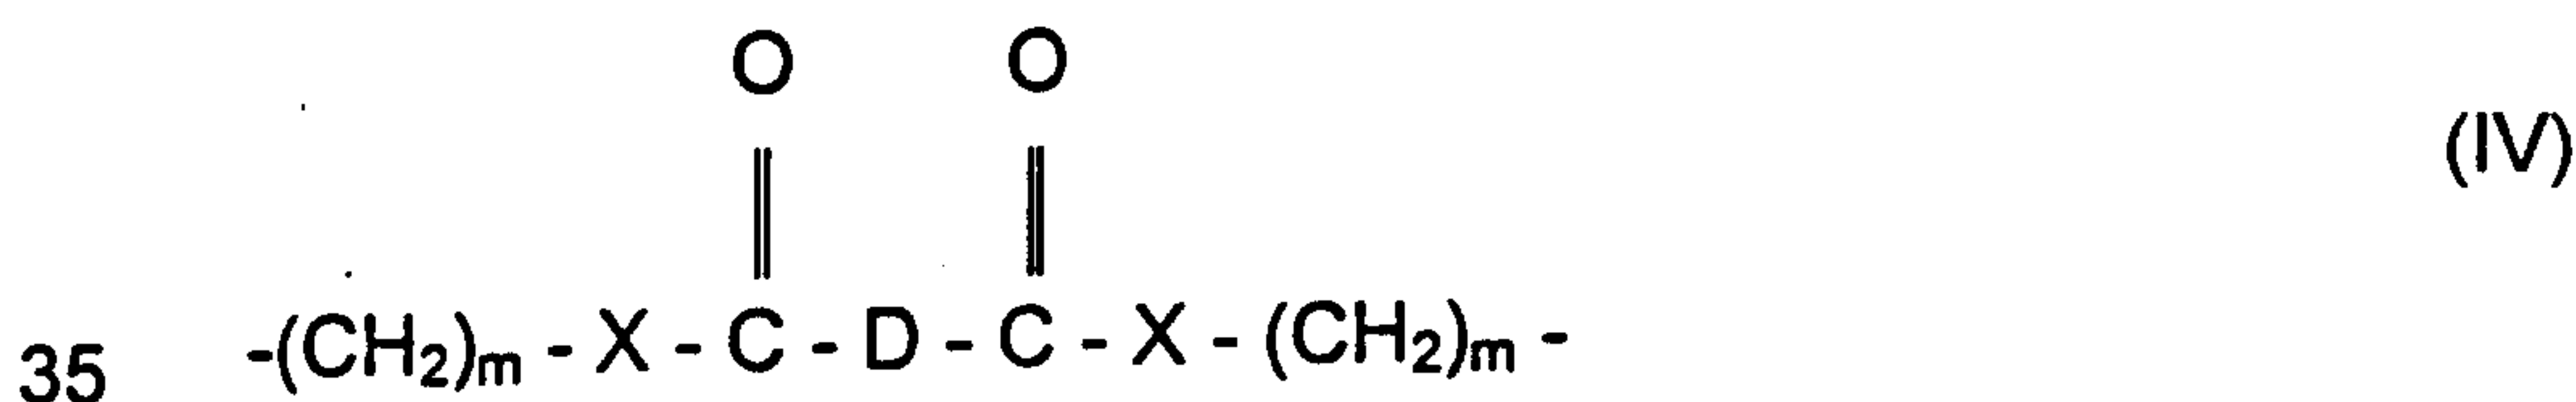

and m is an integer of 1 to 6, X is a group NH or an oxygen atom and D is a dimer fatty acid residue containing on average 36 to 54 carbon atoms, are added to the media.

The process according to the invention is preferably used to protect
5 metal surfaces, such as occur in the technical equipment used in drilling operations, i.e. for example in pipelines, valves or delivery tubes, against corrosion in liquid aqueous or non-aqueous or gaseous media. The equipment in question is generally made of steel. However, the process according to the invention may also be used to prevent corrosion in other
10 metals, for example aluminium, lead or copper, or alloys containing these metals.

The media to which the metals are exposed may be liquid or gaseous. In geological exploration work, the principal gaseous medium encountered is natural gas. A typical liquid non-aqueous medium is, for
15 example, crude oil. Typical aqueous media preferably contain between 10 and 90% by weight of water. The water encountered in oil and gas production can have salt contents from 0.2% to saturation level and, accordingly, can seriously corrode metal surfaces. However, purely aqueous media can also be encountered, for example in the drilling of
20 drinking water wells. Another medium often encountered are water/oil mixtures or emulsions used, for example, as drilling muds which can contain up to 99% by weight of oil. Besides crude oil, the oil phase can also contain environmentally compatible organic esters, for example of the type described in EP 374 671 A1, EP 374 672 A1 or EP 386 636 A1. In
25 addition, the drilling muds contain suspended clay and other additives which are used to control the properties of the drilling mud.

The compounds corresponding to formula (I) are known and today are mainly used as fabric-softening components or for the antistatic finishing of fabrics. Examples of compounds corresponding to formula (I)
30 where R^4 is a group of formula (II) can be found in applicants' WO

94/06899 and DE 42 03 489 A1 which disclose diester amine compounds in fabric softeners. EP 239 910 A1 also describes fabric softeners containing readily biodegradable quaternized mono- and diester amine compounds. In addition, it is known from the literature that ammonium compounds of the type in question are distinguished by ready biodegradability (Hauswirtschaft und Wissenschaft, Vol. 42, No. 2, 1994, pages 72-74 and S.T. Giolano et al., Chemosphere, Vol. 30, No. 6, pages 1067-1083, 1995).

Compounds corresponding to formula (I), in which R^4 is a group of formula (III), are described in DE 195 03 277 C1. These compounds are readily biodegradable and, by virtue of their softening and antistatic effect, are used as fiber and textile auxiliaries and in hair cosmetics. However, the corrosion-inhibiting properties of these substances are neither mentioned nor suggested in any of the documents mentioned above.

Compounds corresponding to formula (I) where R^4 is a group of formula (II) are preferably used in the process according to the invention. These compounds are technically quaternized mono-, di- or trifatty acid amine ester compounds which can be obtained by known synthesis methods. Compounds containing one and preferably two fatty acid ester groups are normally used. The quaternized compounds may be obtained, for example, by esterification of tertiary mono-, di- or trialkanolamines, preferably triethanolamine or triisopropanolamine, with fatty acid chlorides and subsequent quaternization of the esters formed with methyl chloride, benzyl chloride or dimethyl sulfate. Particulars of the production of these cationic ester amine compounds can be found, for example in EP 293 955 A2 and EP 293 953 A2.

Besides the preferred compounds of formula (I) where R^4 is a group corresponding to formula (II), compounds containing two quaternized nitrogen atoms per molecule corresponding to formula (I), where R^4 is a group of formula (III), may also be used. Of these compounds, those in

which the group Z stands for a dimer fatty acid group of formula (IV) are preferred.

The synthesis of these compounds is carried out, for example, in accordance with the teaching of DE 195 03 277 C1. To this end, tertiary
 5 amines corresponding to formula (V):



in which R^6 is an NH_2 or OH group and R^1 , R^2 and m are as defined above, are condensed with dimer fatty acids containing on average 36 to 54 carbon atoms and the dimer fatty acid esters or amides obtained are subsequently
 15 quaternized with known alkylating agents, for example dimethyl sulfate or dimethyl carbonate, to form the compounds of formula (I) used in accordance with the invention, in which R^4 is a group corresponding to formula (III) and Z is a group corresponding to formula (IV).

20 In the context of the invention, dimer fatty acids are understood to be oligomeric fatty acids which may be obtained in known manner by thermal or catalytic oligomerization of unsaturated fatty acids, for example oleic acid or erucic acid, or technical fatty acid mixtures with iodine values in the range from 45 to 115. In the course of the dimerization, which is an
 25 electrocyclic ene reaction, two fatty acids or, in small quantities, even three fatty acids are linked to form an unsaturated, but normally non-aromatic ring system.

In the synthesis of these compounds, N,N-dimethylaminopropyl amine or N,N-dimethylaminopropanol is preferably used as the tertiary
 30 amine while oligomerization products of technical oleic acid are used as preferred dimer fatty acids. The molar ratio of amine to dimer fatty acid is

preferably adjusted to a value of 1:1.5 to 1:2.2 in accordance with the teaching of DE 195 03 277.

Compounds of formula (I), in which R^4 stands for a group corresponding to formula (III), where Z is a methylene group $-(CH_2)_m-$,
5 preferably a polymethylene group containing 6 carbon atoms, may also be used. Of these compounds, those in which both quaternized nitrogen atoms each carry two ester groups of formula (II) are preferably used. These compounds are prepared by conventionally reacting an alkylene-diamine, preferably hexamethylenediamine, with ethylene oxide in a first
10 step, then esterifying the reaction product with a carboxylic acid and finally quaternizing the ester with suitable compounds, for example dimethyl sulfate.

The alkyl group R^5 corresponding to formula (II) in the compounds of formula (I) used in the process according to the invention is preferably
15 linear and contains between 7 and 23 carbon atoms. Groups containing from 7 to 21 carbon atoms are preferred. The alkyl group may be saturated or unsaturated. Unsaturated alkyl groups may contain 1, 2 or 3 double bonds, but preferably contain only 1 double bond.

A particularly preferred process is one which uses compounds of
20 formula (I) in which the ester groups are obtained by esterification of fatty acid mixtures, preferably palm oil, rapeseed oil or coconut oil fatty acids. Other suitable fatty acids are, for example, caprylic, capric, lauric, myristic, palmitic and stearic acids and unsaturated acids, such as oleic acid, erucic acid, linoleic acid or linolenic acid, behenic acid or mixtures of these
25 compounds. Compounds in which one of the groups R^1 to R^3 is a hydroxyalkyl group, preferably containing 2 to 4 carbon atoms, and/or an aryl or alkylaryl group, more particularly containing 6 to 12 carbon atoms, preferably a benzyl group, are also preferably used.

Another preferred embodiment of the process according to the
30 invention is characterized by the use of compounds corresponding to

formula (I) in which one or more of the substituents R^1 , R^2 or R^3 is/are also a group corresponding to formula (II).

The anions A^- of the compounds corresponding to formula (I) used in the process according to the invention are determined by the
5 quaternizing agent used in the synthesis, such as methyl chloride, benzyl chloride or dimethyl sulfate. The anions are preferably selected from the group of halides, methosulfate and methophosphate.

The compounds corresponding to formula (I) may be used in the process according to the invention by addition to the medium to be treated
10 in effective quantities. Mixtures of compounds corresponding to formula (I) or mixtures with other known inhibitors, for example N-alkyl betaines, N-alkyl imidazolines, polyalkoxylated amines, amides and imidazolines or phosphoric acid esters, may also be used. The process is preferably carried out by adding the compounds corresponding to formula (I) in such
15 quantities that their concentration, based on the total quantity of medium, is between 5 and 1,000 ppm.

Processes in which the compounds of formula (I) are used in the form of aqueous solutions are preferred. These solutions contain the compounds of formula (I) in quantities of preferably 5 to 50% by weight
20 and, more preferably, 10 to 30% by weight, based on the total weight of the solutions. The solutions may also contain alcohols, preferably C_{1-6} alcohols, such as isopropanol, ethylene glycol or propylene glycol, or mixtures thereof in quantities of 5 to 30% by weight, based on the quantity of the aqueous solutions.

25 Besides the ingredients already mentioned, the aqueous solutions may also contain other additives, including for example emulsifiers, such as fatty amines or dimer or trimer fatty acids, and H_2S or O_2 scavengers, such as sodium thiosulfate or sodium hydrogen sulfite. These additives are added to the solutions in typical quantities, i.e. in quantities of 1 to 10% by
30 weight.

In another preferred embodiment of the process according to the invention, the compounds corresponding to formula (I) are used in the form of a solution in a non-aqueous solvent selected from aliphatic or aromatic hydrocarbons liquid at room temperature, the solutions containing the
5 compounds of formula (I) in quantities of 5 to 50% by weight and preferably in quantities of 10 to 30% by weight.

Suitable hydrocarbons are, for example, spirit, paraffins liquid at room temperature or aromatic hydrocarbons, such as toluene, xylene or diethyl benzene, and mixtures of these compounds.

10 It has proved to be of advantage to use the non-aqueous solvents in admixture with short-chain C_{1-8} alcohols in the process according to the invention, the ratio by weight of non-aqueous solvent to alcohol being from 1:10 to 10:1 and, more particularly, from 4:1 to 1:4. Suitable alcohols are, for example, ethanol, propanol, isopropanol, 2-ethylhexanol, or glycols, for
15 example ethylene or butylene glycol and mixtures thereof. However, the compounds of formula (I) may also be used in the form of solutions in alcohols. In addition, solutions of the compounds (I) in non-aqueous solvents may contain other suitable additives, for example H_2S or O_2 scavengers.

20 If the process according to the invention is used to protect metals exposed to gaseous media, the compounds of formula (I) in the form of aqueous or non-aqueous solutions are sprayed as an aerosol in the gaseous medium.

The present invention also relates to the use of compounds
25 corresponding to formula (I) as corrosion inhibitors for metals in liquid aqueous or non-aqueous or gaseous media.

The use according to the invention is by no means confined to oil or gas production (for example as an additive to drilling muds or as a corrosion inhibitor for pipelines and other pipes), instead the compounds
30 corresponding to formula (I) are generally suitable for use as corrosion

inhibitors for metal surfaces, preferably steel surfaces.

Examples

5 Example 1

The corrosion-inhibiting properties were determined by a so-called wheel test. In this coupon test, the erosion caused by the corrosion of inhibited systems is compared with the erosion occurring in non-inhibited systems.

10 To this end, steel coupons (Mild Steel 1018, sand-blasted) were degreased with acetone and weighed, subsequently immersed in a corrosive medium and stored therein for 72 hours at 60°C while turning (60 r.p.m.). The corrosive medium used was a mixture of a salt-containing aqueous phase (5% by weight NaCl, 0.5% by weight acetic acid) and spirit
15 (boiling range at normal pressure 145-200°C), the mixture being saturated with CO₂ and H₂S. The mixing ratio (v/v) of water to spirit was 50:50.

The inhibiting substances were used in the form of a 30% by weight aqueous solution. The concentration in each case was 30 ppm (based on the quantity of corrosive medium).

20 The coupons were then washed with an acetone/isopropanol mixture (50:50, v/v), dried and reweighed. The protective effect compared with coupons stored without corrosion control was determined from the difference in weight of the coupons before and after the treatment in the corrosive medium. A weight loss of 0 mg represents a protective effect of
25 100%.

Table 1 below shows these values for inhibitors 1 to 5 according to the invention and, for comparison, the value of a conventional betaine inhibitor. Inhibitors 1 to 5 according to the invention clearly show a significantly better protective effect.

Table 1

Inhibitor	Protective effect (in %)
1	71
2	77
3	89
4	87
5	85
C	37

Composition of the inhibitors:

- 1: Methyl-N,N-bis-(coco-oxyethyl)-N-(2-hydroxyethyl) ammonium methosulfate
- 2: N,N,N-trimethyl-N-(coco-oxyethyl) ammonium methosulfate
- 3: N,N-dimethyl-N-benzyl-N-(coco-oxyethyl) ammonium chloride
- 4: N,N,N-trimethyl-N-(palmoxyethyl) ammonium methosulfate
- 5: N,N-dimethyl-N-benzyl-N-(palmoxyethyl) ammonium chloride

V: N,N-dimethyl-N-(cocoamidopropyl)-N-acetyl betaine

Example 2

Besides the pure inhibitors, mixtures containing additional additives needed, for example, in the petroleum industry were also investigated. The mixtures in question are ready-to-use formulations for use under typical conditions, for example during drilling or in the production of petroleum or natural gas. The mixtures were subjected to the above-described wheel test in which the corrosive medium was the same mixture as in Example 1,

except that the water-to-spirit ratio (v/v) was 10:90 (for the results, see Table 2). The mixtures contained 20% by weight of inhibitor, 10% by weight of isopropanol as co-solvent, 2% by weight of a cocofatty amine reacted with 12 moles of ethylene oxide, 2% by weight of trimer tall oil fatty acid, 2% by weight of sodium thiosulfate as H₂S scavenger and, for the rest, water. The inhibitors used were compounds 3 and 4 mentioned above.

Table 2

Inhibitor	Protective effect (in %)
3	89
4	87

Example 3

Inhibitors 2 to 5 were dissolved in a solvent mixture of 40% by weight of isopropanol and 60% by weight of aromatic hydrocarbons (Solvesso 150®, a product of Exxon). The solutions each contained 25% by weight of the inhibitor. They were subjected to the above-described wheel test (concentration of the inhibitors 10 ppm, based on the corrosive medium):

Table 3

Inhibitor	Protective effect (in %)
2	88
3	89
4	90
5	86

Example 4

Corrosion inhibitors 6 and 7 according to the invention were subjected to the wheel test under the conditions of Example 3. The ratio by volume of water to organic phase was 90:10. The organic phase consisted of equal parts by volume of isopropanol and Solvesso® 150.

Inhibitor 6 was prepared by initially reacting 436 g of hexamethylenediamine (3.8 moles) with 995 g of ethylene oxide (22.6 moles) in the absence of a catalyst at 120-130°C/1 bar pressure.

410 g (1.3 moles) of this ethoxylated hexamethylenediamine were esterified with 590 g of stearic acid (2.1 moles) and 1.5 g of phosphinic acid at 170°C/0.4 bar pressure until the acid value of the product had fallen to a value below 5. 795 g of the ester were then mixed with 500 g of isopropyl alcohol and heated to 60°C, after which 213 g (2 moles) of dimethyl sulfate were added for quaternization. The mixture was then heated for 4 hours to 80°C, after which the product was obtained as a light yellow paste.

Inhibitor 7 is a commercially available dimer fatty acid amidoamine (Empol 1014, a product of Henkel KGaA) which has been quaternized with dimethyl sulfate.

The results are set out in Table 4:

WO 98/23792

14

PCT/EP97/06451

Table 4

Inhibitor	Protective effect (in %)
6	92
7	93


The results of these tests show that even the ready-to-use mixtures retain their favorable protective effect.

CLAIMS

1. A process for protecting metal surfaces against corrosion in liquid aqueous or non-aqueous or gaseous media, characterized in that compounds corresponding to formula (I):



in which R^1 , R^2 and R^3 independently of one another represent an alkyl or hydroxyalkyl group containing 1 to 4 carbon atoms, an aryl or alkylaryl group or a group corresponding to formula (II):

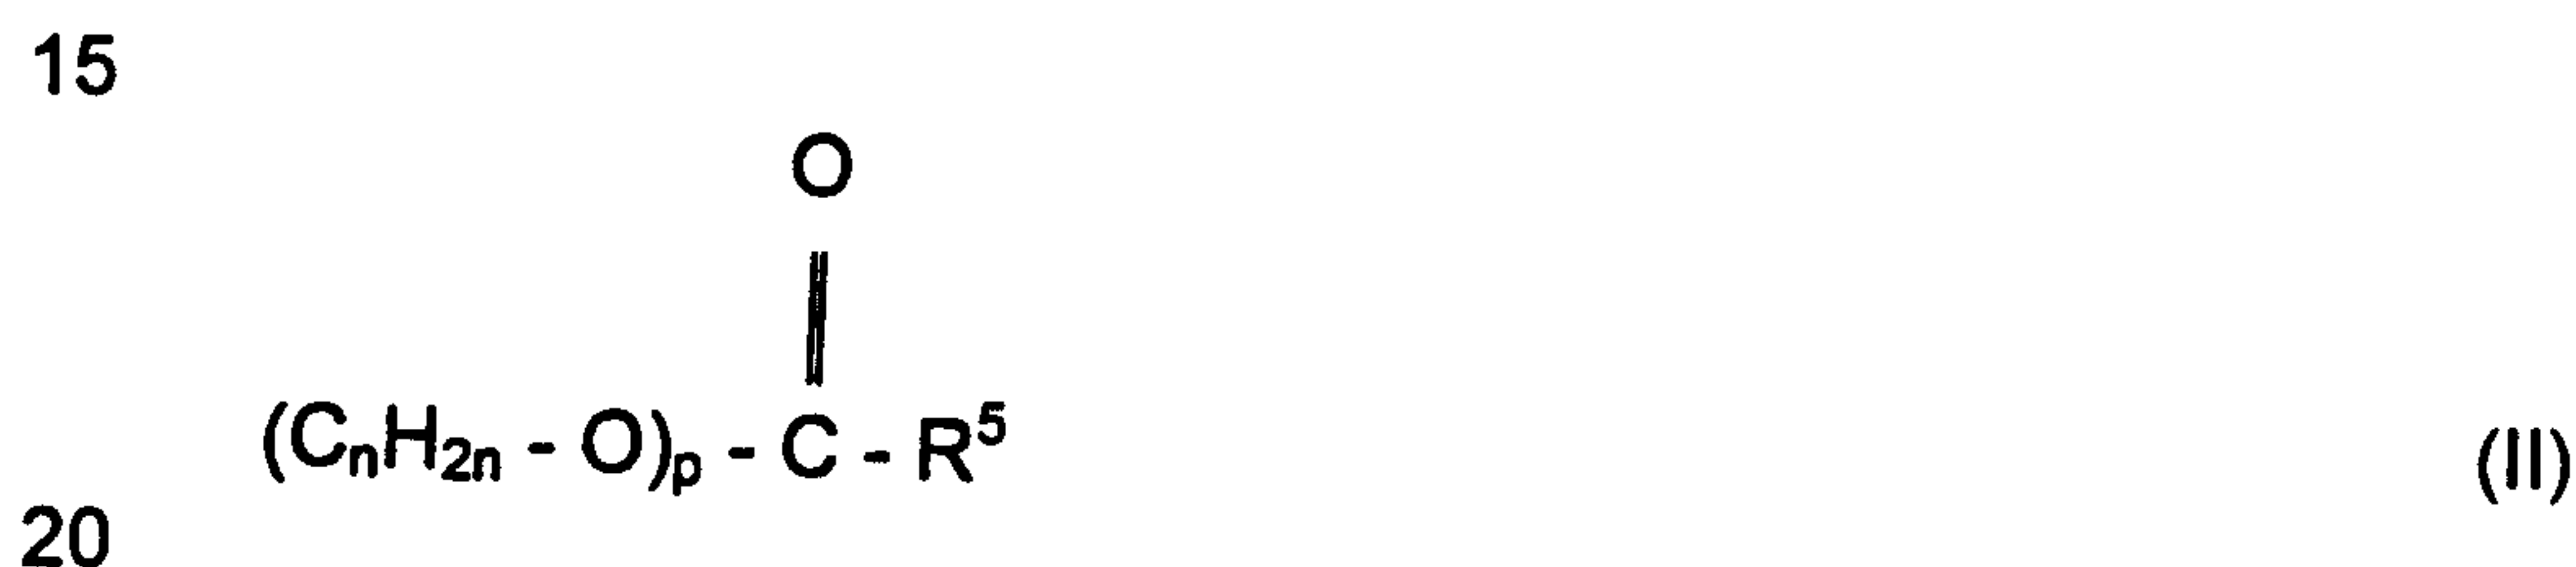


A^- is an anion, n is the number 2 or 3, p is a number of 1 to 3 and R^5 is an alkyl or alkenyl group containing 7 to 23 carbon atoms and 0, 1, 2 or 3 double bonds,

and R^4 is a group corresponding to formula (II) or (III):



where R^1 , R^2 and R^3 are as defined above and Z is a group $-(\text{CH}_2)_m-$ or a group corresponding to formula (IV):

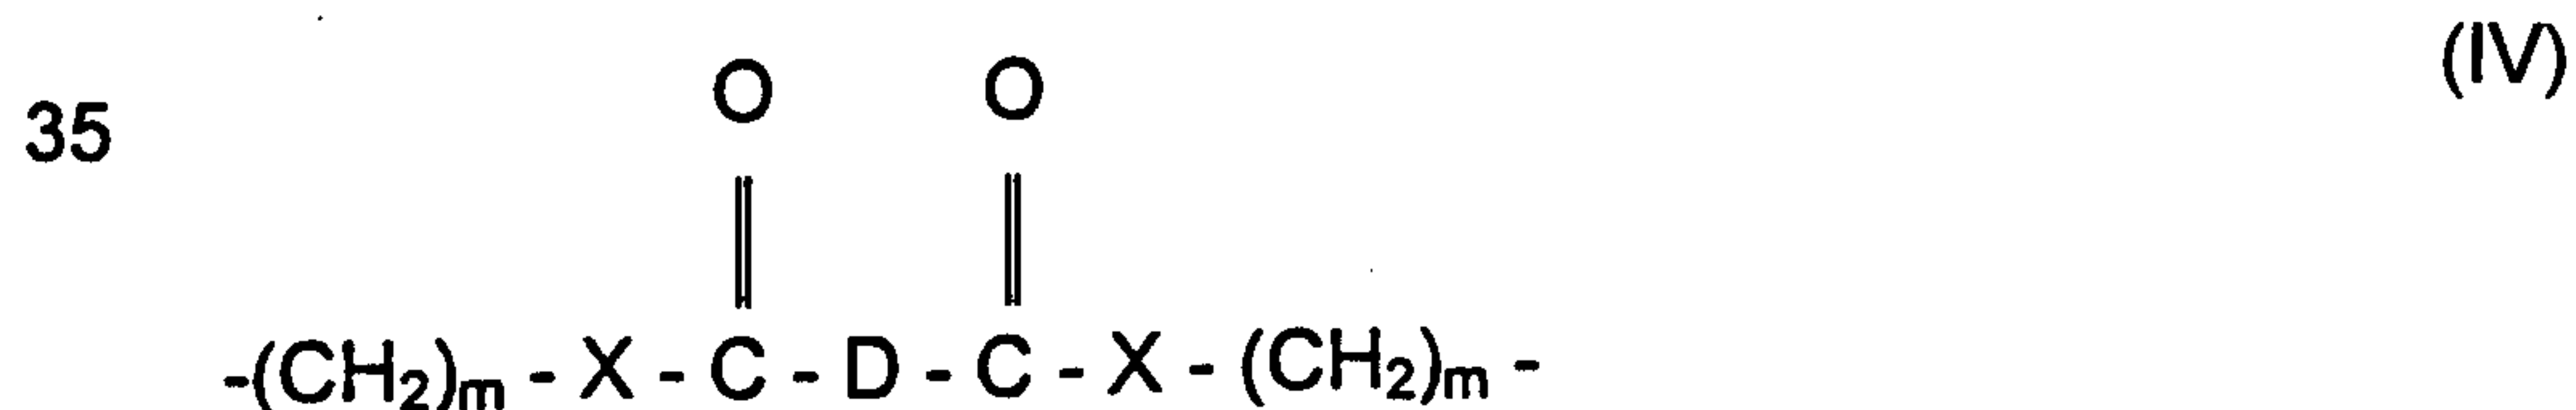

and m is an integer of 1 to 6, X is a group NH or an oxygen atom and D is a dimer fatty acid residue containing on average 36 to 54 carbon atoms, are added to the media.

2. A process as claimed in claim 1, characterized in that compounds of formula (I) where R^4 is a group corresponding to formula (II) are used.

3. A process as claimed in claim 1 or 2, characterized in that compounds of formula (I) where R^1 , R^2 or R^3 is a group corresponding to formula (II) are used.

4. A process as claimed in any of claims 1 to 3, characterized in that compounds of formula (I) where the anions are selected from the group consisting of halide, methosulfate and methophosphate are used.

5. A process as claimed in any of claims 1 to 4, characterized in that the compounds of formula (I) are added to the liquid, aqueous or non-aqueous or gaseous media in such quantities that the concentration of these compounds, based on the total quantity of media, is between 5 and 1,000 ppm.

6. A process as claimed in any of claims 1 to 5, characterized in that the compounds corresponding to formula (I) are used in the form of an aqueous solution containing between 5 and 50% by weight and preferably between 10 and 30% by weight of compounds corresponding to formula (I).

7. A process as claimed in claim 6, characterized in that the aqueous solution contains isopropanol, ethylene glycol or propylene glycol or mixtures thereof in quantities of 5 to 30% by weight, based on the quantity of aqueous solution.

8. A process as claimed in any of claims 1 to 5, characterized in that the compounds of formula (I) are used in the form of a solution in a non-aqueous solvent selected from aliphatic or aromatic hydrocarbons liquid at room temperature and the solutions contain between 5 and 50% by weight and preferably between 10 and 30% by weight of compounds corresponding to formula (I).

WO 98/23792

17

PCT/EP97/06451

9. A process as claimed in claim 8, characterized in that the solutions contain C₁₋₈ alcohols.
10. A process as claimed in claim 8 or 9, characterized in that the ratio by weight of non-aqueous solvent to alcohol is between 1:10 and 10:1 and
5 preferably between 1:4 and 4:1.
11. The use of compounds corresponding to formula (I) according to the claim 1 for protecting metal surfaces against corrosion in liquid aqueous or non-aqueous or gaseous media.