

18



Europäisches Patentamt
European Patent Office
Office européen des brevets

11 Publication number:

**0 116 704
B1**

12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification: **04.03.87**

51 Int. Cl.⁴: **E 01 C 19/17 // F16K31/122**

21 Application number: **83112237.9**

22 Date of filing: **06.12.83**

54 **Spray bar valve.**

30 Priority: **10.02.83 SE 8300723**

43 Date of publication of application:
29.08.84 Bulletin 84/35

45 Publication of the grant of the patent:
04.03.87 Bulletin 87/10

84 Designated Contracting States:
DE FR GB IT

58 References cited:
**DE-A-2 323 852
DE-B-1 195 123
FR-A-1 018 718
FR-A-2 455 125
SE-A-8 204 205**

73 Proprietor: **DYNAPAC AKTIEBOLAG**
Box 1103
S- 171 22 Solna (SE)

72 Inventor: **Ketola, Rainer**
Hantverksgatan 16B
S-371 35 Karlskrona (SE)

EP 0 116 704 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

Description

The present invention relates to a device for spreading bituminous binder and in particular to a valve device for achieving improved regulation of the amount of binder it is intended to spread, according to the prior art part of claim 1.

When spreading bituminous binder in liquid form on roads the equipment generally used is a vehicle-mounted tank equipped with a spray tube or spray bar arranged transversely to the direction of travel of the tank. Arranged along the spray bar are a number of openings or nozzles through which the binder is sprayed, these being equipped with valves which can be opened and closed.

The control system for opening and closing the spray bar valves is generally arranged so as to enable simultaneous operation of an arbitrary number of valves as well as individual operation of each separate valve, which is essential for attaining the desired spreading conditions.

It is also important that movement of the valve during the opening and closing operations is not adversely affected by the design of the valve and its mounting in the spray bar.

In valve systems so far known (as shown for example in DE—A—2 323 852), radial forces on the valve spindle often arise with wear in the spindle seal and spindle guide as a result. In the valve system according to the present invention (as defined in claim 1), purely axial movement of the valve spindle is obtained which results in longer cylinder and valve seat life and consequently more effective opening and closing of the valve.

The invention will be described in greater detail with reference to the enclosed drawing, where Fig. 1 shows a longitudinal cross-section of a valve and its mounting in a spray bar. Fig. 2 shows a cross-section through the valve along the line A—A in Fig. 1.

Shown in Fig. 1 is a spray bar 1 in which a valve 2 is mounted. The valve is controlled by means of a pressure medium and is constructed like a conventional compressed air cylinder with attendant piston and piston rod. The cylinder portion 3 is threaded into the spray bar 1 and the piston rod, which in the present case is called valve spindle 4, is extended and protrudes out of cylinder 3 into spray bar 1.

Valve spindle 4 is fitted at the end inside the cylinder portion 3 with a piston 5 and the other end with a valve cone 6 and extends diametrically from the cylinder portion 3 to the opposite wall of spray bar 1, into which a valve seat 7 corresponding to valve cone 6 is screwed. Valve 2 opens and closes as valve cone 6 is moved into and out of contact with valve seat 7.

Valve piston 5 is capable of movement inside cylinder space 8, which communicates with an opening 9 in the cylinder wall through which pressure medium can be admitted to cylinder space 8, thus causing the piston 5 and with it valve cone 6 of valve spindle 4 to move away

from contact with valve seat 7. The valve is returned to contact with valve seat 7 by means of a spring 10, which is so pretensioned that it keeps the valve closed in the event of a loss of pressure medium. Another purpose of spring 10 is to pretension the seal 11 which is designed to prevent binder from seeping out of spray bar 1 into cylinder 2 during the movement of the valve. The seal 11 consists of V-rings which owing to the wedging effect are pressed against valve spindle 4 and cylinder housing 3.

The spring 10 is in this connection so dimensioned that it keeps the seal pretensioned even after a certain amount of wear has arisen in seal 11.

The cylinder space 8 is limited at the top by a sleeve-shaped cover 12 screwed onto the cylinder. The outer wall of the cylinder housing is hexagonal in order to provide a better grip for an adjustable spanner, for example, when the housing is screwed into position in the wall of the spray bar. The cover 12 is cylindrical, however, and so sized that gaps 13 are formed between the cylinder housing and the cover 12. These gaps serve as bleed channels for the air present above piston 5 when pressure medium is injected through opening 9 to press piston 5 upwards and consequently open the valve so that binder can flow out of spray bar 1 through the valve opening 14. To prevent pressure medium from entering spray bar 1 the cylinder space 8 is sealed at the bottom by means of a sealing ring 15 which seals against valve spindle 4 and cylinder housing 3. If leakage of pressure medium or binder occurs as a result of wear in seal 15 or seal 11, for example, it will be diverted through a drain channel 16 arranged in the wall of the cylinder housing.

Since cylinder housing 3 and valve seat 7 are mounted so far away from each other, a high degree of mounting precision is necessary to ensure that an effective valve seal will be obtained. To eliminate this problem valve cone 6 is bowl-shaped and fitted over the lower end of valve spindle 4 with a certain degree of radial clearance. By means of a pin 17 which passes through a hole 18 in the lower end of spindle 4 and extends on either side of the spindle through holes in the cone wall, cone 6 is retained in place on valve spindle 4. The diameter of hole 18 is larger than the diameter of pin 17, which enables cone 6 to move axially in relation to valve spindle 4.

The mounting of cone 6 accordingly permits both axial and radial movement relative to valve spindle 4, as a result of which the requirement of precision in connection with fitting the cylinder housing and valve seat can be substantially reduced without necessitating any sacrifice of the sealing requirement.

In order to satisfy the sealing requirement still further, a sealing ring 19 is fitted in valve seat 7. This ring is of soft material and one of its properties is that the binder in spray bar 1 does not adhere to it. Since ring 19 is of soft material, sealing between it and valve cone 6, is assured

even if a solid particle should find its way between the cone and the valve seat ring during the valve closing operation. The solid particle will in such event be pressed into the ring without any gap arising. Next time the valve is opened the solid particle will be flushed out with the binder through opening 14.

The hole in spray bar 1 into which the cylinder portion 3 is screwed can be suitably reinforced with an internally threaded bush 20. The cylinder portion 3 is screwed into bush 20 until a stop nut or stop ring 21 on the cylinder housing abuts against a flange 22 arranged on bush 20. To prevent binder from seeping out between the threads of the bush, a sealing ring 23 is arranged between the cylinder housing and the bush.

Claims

1. A device for spreading bituminous binder comprising a spray bar (1) and a number of pressure medium controlled valves (2) arranged along it for opening and closing the spray bar nozzles, the said valves (2) each consisting of a pressure cylinder (3) mounted in the spray bar, a piston (5) which is actuated by the pressure medium and capable of axial movement inside the cylinder and a valve spindle (4) connected to the piston and extending into the spray bar for internal sealing of a valve seat mounted in the wall of the spray bar and oriented diametrically in relation to the pressure cylinder the end of the valve spindle (4) facing the valve seat (7) being equipped with a valve cone (6), characterized in that said valve cone (6) is capable of axial and radial movement in relation to the valve spindle (4) and in that a sealing ring (19) of resilient material is arranged on the valve seat (7).

2. A device as in Claim 1, characterized in that the valve spindle (4) is fitted with a pretensioned spring (10) for the purpose of keeping the valve cone (6) pressed against the valve seat (7) and pretensioning the seal (11) in the event of a loss of pressure medium.

3. A device as in Claim 1, characterized in that the valve cone (6) is bowl-shaped and by means of a pin (17) mounted in it the cone is pivoted at the lower end of the valve spindle (4), whereby the cone (6) is so sized that it surrounds the lower end of the valve spindle (4) with a radial clearance and in that the pin (17) extends diametrically from one side of the cone (6) to the other side and through the lower end of the valve spindle (4), whereby the hole in the valve spindle (4) is larger than the diameter of the pin (17) and so enables the cone (6) to move axially in relation to the valve spindle (4).

Patentansprüche

1. Vorrichtung zum Verteilen von bituminösem Bindemittel, mit einer Sprühtraverse (1) und einer Reihe von an derselben entlang angebrachten, druckmittelgesteuerten Ventilen (2) zum Öffnen und Schließen von an der Sprühtraverse sit-

zenden Düsen, wobei die Ventile (2) jeweils einen an der Sprühtraverse angebrachten Druckzylinder (3), einen durch das Druckmittel betätigten, axial im Zylinder beweglichen Kolben (5) und eine mit dem Kolben verbundene, sich in die Sprühtraverse zwecks inwendigem Verschließen eines in die Sprühtraversenwand eingebauten Ventilsitzes erstreckende und diametral gegenüber dem Druckzylinder liegende Ventilspindel (4) aufweisen, wobei jeweils das Ende der Ventilspindel (4) mit einem vor dem Ventilsitz (7) liegenden Ventilkegel (6) ausgestattet ist, dadurch gekennzeichnet, daß der Ventilkegel (6) axial und radial gegenüber der Ventilspindel (4) beweglich ist, und daß ein Dichtungsring (19) aus elastischem Werkstoff auf dem Ventilsitz (7) vorgesehen ist.

2. Vorrichtung nach Patentanspruch 1, dadurch gekennzeichnet, daß die Ventilspindel (4) mit einer vorgespannten Feder (10) versehen ist, um den Ventilkegel (6) gegen den Ventilsitz (7) ange-drückt zu halten, und die Dichtung (11) für den Fall vorzuspannen, daß das Druckmittel ausfällt.

3. Vorrichtung nach Patentanspruch 1, dadurch gekennzeichnet, daß der Ventilkegel (6) becherförmig und durch einen darin angebrachten Stift (17) am unteren Ende der Ventilspindel (4) angelenkt und so bemessen ist, daß er das untere Ende der Ventilspindel (4) mit einem radialen Spiel umgibt, und daß sich der Stift diametral von der einen Seite des Kegels zur anderen Seite desselben sowie durch das untere Ende der Ventilspindel (4) erstreckt, wobei die Bohrung in der Ventilspindel (4) größer als der Durchmesser des Stiftes (17) ist und es somit dem Kegel (6) ermöglicht, sich axial gegenüber der Ventilspindel (4) zu bewegen.

Revendications

1. Un dispositif pour étaler un liant bitumineux comprenant une barre de dispersion (1) et un certain nombre de soupapes (2), commandées par un milieu sous pression et disposées le long de la barre afin d'ouvrir et de fermer les buses de la barre de dispersion, lesdites soupapes (2) comprenant chacune un cylindre sous pression (3), monté sur la barre de dispersion, un piston (5) qui est actionné par le milieu sous pression et capable d'effectuer un mouvement axial à l'intérieur du cylindre et un axe de soupape (4), relié au piston et se prolongeant dans la barre de dispersion pour assurer l'étanchéité interne d'un siège de soupape, monté dans la paroi de la barre de dispersion et orienté diamétralement par rapport au cylindre sous pression, l'extrémité de l'axe de soupape (4), orientée vers le siège de soupape (7) étant équipée d'un cône de soupape (6), caractérisé en ce que ledit cône de soupape (6) peut effectuer un mouvement axial et un mouvement radial par rapport à l'axe de soupape (4) et en ce qu'une bague d'étanchéité (19) en matériau élastique est montée sur le siège de soupape (7).

2. Un dispositif selon la revendication 1, caractérisé en ce que l'axe de soupape (4) est équipé d'un ressort tendu au préalable (10) dans le but de

maintenir le cône de soupape (6), comprimé contre le siège de soupape (7) et de contraindre la garniture (11) en cas d'absence du milieu sous pression.

3. Un dispositif selon la revendication 1, caractérisé en ce que le cône de soupape (6) a la forme d'une coupelle et en ce que, grâce à une goupille (17), montée dans ce cône, le cône pivote à l'extrémité inférieure de l'axe de soupape (4), le cône (6) étant dimensionné de façon à entourer

l'extrémité inférieure de l'axe de soupape (4) avec un certain jeu radial et en ce que la goupille (17) s'étend diamétralement d'un côté du cône (6) à l'autre côté et traverse l'extrémité inférieure de l'axe de soupape (4), le trou de l'axe de soupape (4) ayant un diamètre supérieur au diamètre de la goupille (17), ce qui permet donc au cône (6) de se déplacer dans la direction axiale par rapport à l'axe de soupape (4).

5

10

15

20

25

30

35

40

45

50

55

60

65

4

Fig.1

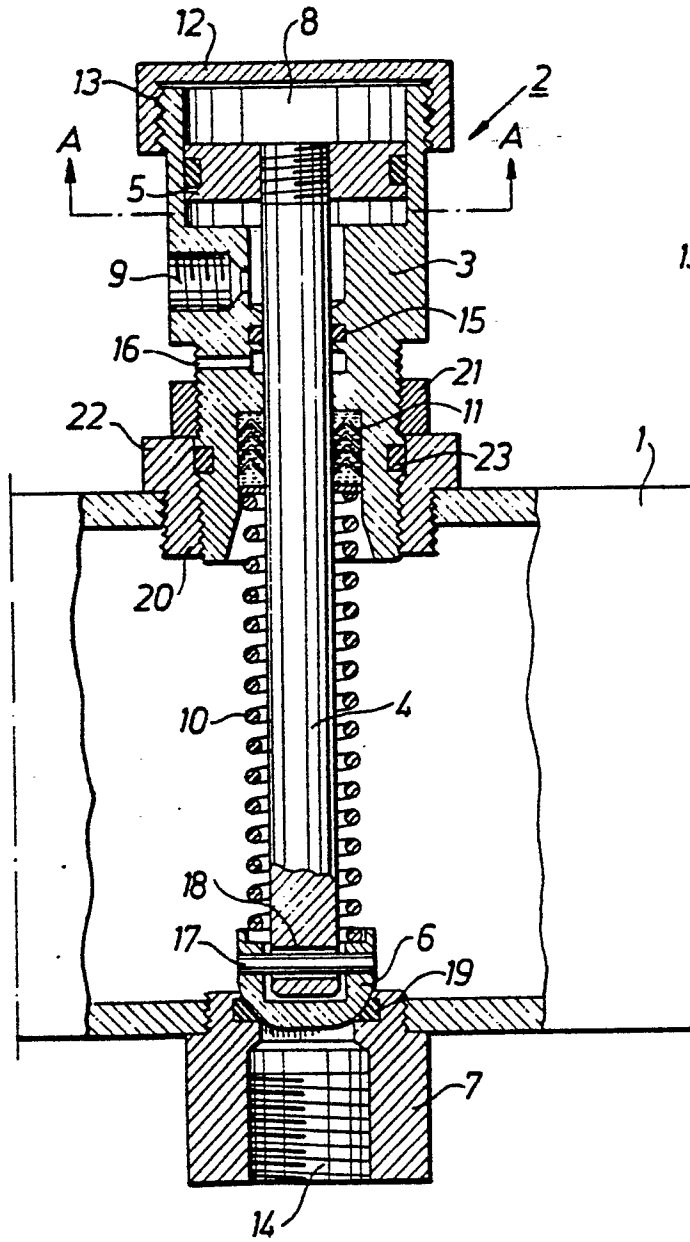


Fig.2

