



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.11.2020 Bulletin 2020/45

(51) Int Cl.:
E06B 3/667 (2006.01)

(21) Application number: **20166472.9**

(22) Date of filing: **27.03.2020**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Grzywacz, Cezary**
97-510 Reczno (PL)

(72) Inventor: **Grzywacz, Cezary**
97-510 Reczno (PL)

(74) Representative: **Malcherek, Piotr**
Rzecznicy Patentowi INVENT Sp. z o.o.
ul. Gen. Ch. de Gaulle'a 8
43-100 Tychy (PL)

(30) Priority: **29.03.2019 PL 42942619**

(54) **PLUG CONNECTOR FOR CONNECTING ENDS OF WINDOW PROFILES**

(57) Plug-in joining member (1) designed to make connections between ends of window frame profiles is formed as an elongated piece with nearly U-shaped cross-section and comprising a bottom wall (2) and side walls (3) adjacent to the bottom wall (2) down its side edges. Side walls (3) of the joining member (1) are provided with friction claws (4), arranged at the both sides

of the central line (O) and turned towards the central line (O) of the joining member (1). The bottom wall (2) has a longitudinal central beading (9) and two longitudinal side beadings (10) arranged at the both sides of the central beading (9), where the bottom (11) of the central beading (9) extends lower than bottoms (12) of side beadings (10).

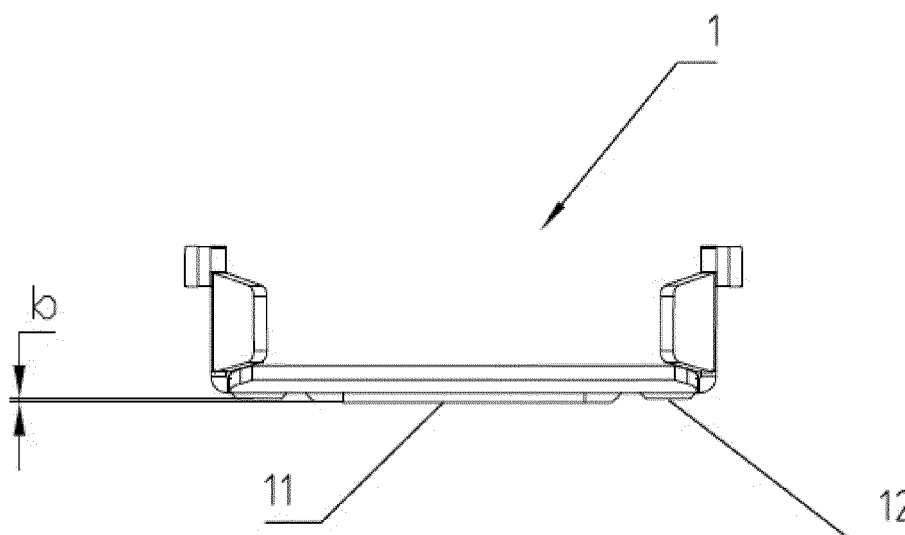


Fig. 5

Description

Subject of the invention

[0001] The invention refers to a plug-in joining member designed to make connections between ends of profiles for window frames, in particular hollow profiles for frames of insulating struts for glass panels.

State of the art

[0002] The patent description PL 205223 B1 discloses a plug-in joining member for hollow profiles, in particular for strut frames or ladder insulating profiles for glass panels, where the joining member has a formed body with the U-shaped cross-section. The body contains a bottom wall, also referred to as the central wall, together with two side walls adjacent thereto provided with a plurality of side stopping members shaped as friction claws arranged one after another in line with the direction of hollow profile insertion. At least some of the friction claws on the both side walls is arranged crosswise to the direction of insertion with an offset and with some space between them. The middle wall also has longitudinal deformations to form longitudinal beads for guiding the joining member on the inner perforation lines of the hollow profiles.

[0003] In turn, the description of the utility model PL 65674 Y1 discloses an U-shaped straight joining member for sandwich-glazed glass panels, where the joining member comprises a central wall and two side walls with springy wedged latches arranged in side walls and central stopping latches that are bent outwardly of side walls planes. The middle wall along its entire length, on both sides of the longitudinal axis, there are longitudinal embossing stiffening the joining member structure. Moreover, in the middle wall, on both sides of the central line, transverse humps are formed, which form recesses in the inner surface of the central wall, the depth of which is equal to the depth of the longitudinal embossments. The bending offsets outwards the side walls planes are different for springy wedged latches and central stopping latches and gradually increase for each subsequent springy wedged latch being located closer to the central line of the joining member, where the bending offset outwards the side wall planes is the largest for central stopping latches. The length of the springy wedged latches located closest to the front plane exceeds the lengths of other spring wedged lathes. For needs of that description the central line of the implement is understood as a straight line perpendicular to the longitudinal central axis of the joining member and passing its mid-length point.

Aim of the invention

[0004] The aim of the invention is to develop a plug-in joining member structure, thanks to which it is possible to install the joining member connector in the profile chan-

nel in a simpler and easier way, while ensuring its secure and effective installation in this profile channel.

Essence of the invention

[0005] The invention is described with details in the independent Claim 1 and refers to a plug-in joining member for connecting ends of window profiles. The plug-in joining member is formed as an elongated piece with an U-shaped cross-section and comprises a bottom wall and side walls adjacent to the bottom wall down its side edges, whereas the joining member has a beading in the bottom wall. Further the joining member has friction claws on side walls at the both sides which are turned towards the central line of the joining member. Moreover, the joining member comprises at least one central stop. The essence of the invention consists in the fact that the beading in the bottom wall is a longitudinal central beading and further the bottom wall has two longitudinal side beadings arranged at the both sides of the central beading, where the bottom of the central beading extends lower than bottoms of side beadings.

[0006] The use of a joining member structure with such a configuration of beading, including a different height position of the bottom of these beadings, results in a much greater tolerance in terms of the joining member height, while maintaining the appropriate stiffness of the joining member. The middle wall of the hollow profile is more flexible in the middle area, which greatly facilitates the operation of inserting the joining member into the profile channel.

[0007] It is preferred that the central beading is deeper than side beadings.

[0008] It is also justified that side beading are longer than the central beading.

[0009] Yet another beneficial embodiment of the invention assumes that friction claws are provided on side walls down longitudinal side beadings.

[0010] Further it is preferred if the cam radius for the working portion of each subsequent friction claw on each specific side wall gradually increase down the both direction from far ends of the joining member towards its central line, whilst tips of working portions on friction claws after having the said friction claws bent out to their working positions are arranged at the same elevation above the bottom wall.

[0011] Preferably, the same stiffness is maintained for all friction claws, which enables uniform adhesion of all friction claws and prevents the joining member from undesired deformation of its side walls.

[0012] It is also beneficial when friction claws protrude outwardly to the same distance from the longitudinal central axis of the joining member, which also contributes to uniform adhesion of all friction claws.

[0013] In addition, it is also desirable when elevation of side wall points in the concaved areas upstream each friction claw gradually increases from the joining member far ends towards its central line. Therefore the joining

member forms a structure of a beam with principally constant bending strength.

[0014] An additional benefit is achieved when the depth of concavities upstream the friction claws, understood as the distance between tips of friction claws after having them bent out and concave bottoms, measured on the projection onto the plane defined by the bottom wall of the joining member, is highest for friction claws located next to the joining member ends and next to its central line. Such a design makes it possible to adjust stiffness of friction claws so that the stiffness of friction claws would be the same both for the ones nearby the joining member ends and the ones located in between.

[0015] The most beneficial embodiment of the invention assumes that the joining members have four friction claws with the same stiffness provided on each side wall between the end of the joining member and its central line.

[0016] Apart from the above-mentioned advantages, owing to differentiated cam radius of each friction claw the joining member according to the present invention makes it possible that each subsequent friction claw inserted into the channel of a hollow profile makes a wider scratch than the preceding claw. It mitigates or even eliminates an effect of the joining member slip during its insertion. As a consequence, fixation of the joining member inside a hollow profile is more reliable and durable. The effect of fastening is more reliable since each subsequent friction claw has a larger cam radius at the same height so that it enters between edges of a scratch made by the previous friction claw. Principally equal stiffness of all friction claws leads to uniform holding action of all friction claws, and no friction claw weakens the fastening effect of an adjacent one. The uniform stiffness of friction claws with various cam radii is achieved by differentiation of side wall height in concaved areas upstream each subsequent friction claw as well as differentiation of concavity depth upstream each friction claw. As a consequence, all friction claws act with the same force with no weakening of the effect from an adjacent friction claws. Moreover, for the best effect all the friction claws should extend to the same distance with respect to the longitudinal central axis of the joining member.

Description of drawing

[0017] The invention is presented in its example embodiments on the accompanying drawing, wherein:

Fig. 1 presents the joining member according to the present invention in the top axonometric view,
 Fig. 2 presents a top view of the joining member,
 Fig. 3 presents a side view of the joining member,
 Fig. 3A presents a detail from Fig. 3,
 Fig. 4 presents the end-side fragment of the joining member in its side view prior to having the friction claws bent out,
 Fig. 5 presents a front view of the joining member,

Fig. 6 presents a side view of another embodiment of the joining member,

Fig. 7 presents a top view of the joining member according to the embodiments from Fig. 6,

Fig. 8 presents the front view of the joining member according to the embodiments from Fig. 6,

Fig. 9 presents a bottom axonometric view for the joining member according to the embodiments from Fig. 6, and

Fig. 10 presents a detailed view to the side wall of the joining member.

Embodiments of the invention

[0018] Plug-in connecting member 1 for connecting ends of window frame profiles is formed as an elongated piece with an U-shaped cross-section. The joining member 1 comprises a bottom wall 2 and side walls 3 adjacent to the bottom wall down its side edges. Side walls 3 of the joining member 1 are provided with friction claws 4, arranged at the both sides of the central line O and turned towards that central line O. The central line is understood, similarly to the state-of-the-art, as a line extended perpendicularly to the central longitudinal axis of the joining member and positioned in the half-length of the joining member. According to the embodiment presented in Fig. 1 to Fig. 5 the joining member 1 has a central stop implemented as central limiters 5 arranged on each side wall 3 within the region of the central line O. Moreover, according to this embodiment, the joining member 1 has four friction claws 4 on every side wall 4 and on the both sides of the central line O, which makes sixteen friction claws 4 altogether. The exact number of friction claws may vary for specific embodiments of the joining member, but the minimum number of friction claws, indispensable for reliable operation of the joining member is two friction claws on every side wall at the both sides of the central line.

[0019] Cam radii R_1, R_2, R_3, R_4 in working portions of each friction claw 4 on a specific side wall 3 before having them bent out gradually increase from each end of the joining member 1 towards the central line O of the joining member 1. For instance, these radii may equal: $R_1 = 0.23\text{mm}$, $R_2 = 0.33\text{mm}$, $R_3 = 0.43\text{mm}$ and $R_4 = 0.53\text{mm}$ for one embodiment of the invention or $R_1 = 0.08\text{mm}$, $R_2 = 0.21\text{mm}$, $R_3 = 0.35\text{mm}$ and $R_4 = 0.49\text{mm}$ for another embodiment.

[0020] The working portion 4A of each friction claw 4 is understood as the portion that remains in contact with an inner surface of a frame profile to be joined and that makes a scratch in that profile.

[0021] For the embodiments disclosed herein the tips 7 of working portions 4A in friction claws 4, after having been bent from the manufacturing positions to the working positions, are aligned at equal elevations above the bottom wall 2. At the same time the tips 7 of working portions 4A in friction claws 4 extend outside the joining member 1 to the same distance with respect to the lon-

gitudinal central axis O_1 of the joining member 1. It is the most beneficial embodiment of the joining member 1, however other configurations of friction claws are also possible within the scope of the invention.

[0022] In general, stiffness of friction claws depend on many factors, not only on their shapes but also on height of the side walls 3 in the concaved areas 6 upstream a specific friction claw 4 as well as on depth of these concavities 6. For the invention embodiment that is presented herein the height values h_1 , h_2 , h_3 and h_4 of the side wall 3 in the concaved areas 6 upstream each friction claw gradually increase from each far end of the joining member 1 towards the central line O of the joining member 1.

[0023] Furthermore, the depths l_1 and l_4 of concavities 6 upstream each friction claw 4, measured on the projection onto the plane defined by the bottom wall of the joining member 1 between the tip 7 of each friction claw 4 after having it bent out and the bottom point 8 of the concavities 6 are the deepest for the friction claws 4 located close to the joining member 1 ends and for the ones that are the most adjacent to the central line O for each side wall 3. The bottom points 8 of each concavity 6 are understood as those points of concavities 6 that are within the closest distances to the respective end of the joining member 1. In particular, the depths l_1 and l_4 of the outermost friction claws 4 exceed the depths l_2 and l_3 for the mid-length friction claws 4. Specifically, $l_2 = l_3$. The depths l_1 and l_4 may be mutually equal or not but beneficially they exceed the depths l_2 and l_3 . As consequence, the uniform stiffness of all friction claws 4 is maintained after having them bent out to the working position.

[0024] The bottom wall 2 comprises one longitudinal central beading 9 as well as two longitudinal side beadings 10. The bottom 11 of the central beading 9 is arranged lower than bottoms 12 of side beadings 10. The example offset b, understood as the difference between vertical positions of bottoms 11 and 12, is 0.1 mm. In particular, the central beading 9 is deeper than the side beadings 10.

[0025] Furthermore, lengths of side beadings 10 exceed the length of the central beading 9, which is shown in details in Fig. 2, whilst all friction claws 4 provided on side walls 3 are deployed down the length of side beadings 10. For other embodiments that are not depicted in drawings, friction claws can be also deployed outside the area defined by side beadings.

[0026] In another embodiment of the invention that is disclosed in Fig. 6 to Fig. 9 a different central stop is applied, in particular a central pin 5' is shaped on side walls 3 instead of central limiters 5.

[0027] Fig. 10 presents a side view of a fragment of the side wall 3 of the joining member 1 after having the friction claws 4 bent out to their working positions. As one can easily see, all tips 7 of working portions 4A in friction claws 4 are arranged down a single straight line O_2 , at the same elevation above the bottom wall 2 of the joining member 1. Since cam radiuses gradually increase, so

that $R_4 > R_3 > R_2 > R_1$, the chord length - widths of working portions 4A of friction claws 4 increase as well: $s_4 > s_3 > s_2 > s_1$. These chords define the contact areas with inner surfaces of frame profiles, which is reflected in the width of scratches made by friction claws on these surfaces: $e_4 > e_3 > e_2 > e_1$. Owing to the foregoing design with the aforementioned geometrical relationships the resistance forces Z_2 , Z_3 and Z_4 against pulling the joining member 1 with the force of F are respectively higher, which enables high reliability and efficiency of connections between frame profiles with the use of joining members 1.

Reference numbers:

[0028]

1 - plug-in joining member,

2 - bottom wall

3 - side walls

4 - friction claws

4A - working portions of friction claws

5 - central stops

5' - central stopping pin

6 - concavity

7 - tip of the working portion of the friction claw

8 - concavity bottom

9 - central bead

10 - side beads

11 - bottom of the central bead

12 - bottom of side beads

O - central line

O_1 - longitudinal central axis

O_2 - straight line drawn thorough tips of working portions on friction claws

$R_1, \dots, R_4$ - cam radiuses for working portions of friction claws

$h_1, \dots, h_4$ - elevations of concavity bottoms on side walls

$l_1, \dots, l_4$ - depths of concavities

$s_1, \dots, s_4$ - chords to define working parts of friction claws

$e_1, \dots, e_4$ - widths of scratches made by each specific friction claw in inner surfaces of frame profiles

F - force, necessary to pull a joining member from a frame profile

$Z_1, \dots, Z_4$ - resistance force against the pulling force F

b - offset between levels of beading bottoms 11 and 12

Claims

1. A plug-in joining member (1) for connecting ends of window profiles, formed as an elongated piece with an U-shaped cross-section, having a bottom wall (2) and side walls (3) adjacent to the said bottom wall (2) down its side edges, where the joining member (1) has a beading in the bottom wall (2), and further the joining member (1) has friction claws (4) provided on side walls (3) on both sides of the central line (O) and turned towards the said central line (O) of the joining member (1), and having at least one central stop, **characterized in that** the beading in the bottom wall (2) is a longitudinal central beading (9) and further the bottom wall (2) has two longitudinal side beadings (10) arranged at the both sides of the central beading (9), where the bottom (11) of the central beading (9) extends lower than bottoms (12) of side beadings (10).
2. The joining member according to Claim 1, **characterized in that** the central beading (9) is deeper than side beadings (10).
3. The joining member according to Claim 1 or 2, **characterized in that** lengths of side beadings (10) exceed the length of the central beading (9).
4. The joining member according to any of the Claims 1 to 3, **characterized in that** friction claws (4) provided on side walls (3) are deployed down the length of side beadings (10).
5. The joining member according to any of the Claims 1 to 4, **characterized in that** cam radiuses (R_1, R_2, R_3 and R_4) of working portions (4A) for each subsequent friction claw (4) on each specific side wall (3) gradually increase down the both directions from far ends of the joining member (1) towards its central line (O), whilst tips (7) of working portions (4A) on friction claws (4) after having the said friction claws (4) bent out to their working positions are arranged at the same elevation above the bottom wall (2).
6. The joining member according to Claim 5, **characterized in that** uniform stiffness of all friction claws (4) is maintained.
7. The joining member according to Claim 5 or 6, **characterized in that** tips (7) of working portions (4A) of friction claws (4) extend outwardly to the identical distance with respect to the longitudinal axis (O_1) of the joining member (1).
8. The joining member according to any of the Claims 5 to 7, **characterized in that** elevation (h_1, h_2, h_3 and h_4) of the side wall (3) in the areas of concavities (6) and upstream each subsequent friction claw (4) provided on every specific side wall (3) gradually increase down the direction from the both far ends of the joining member (1) towards its central line (O) of the joining member (1).
9. The joining member according to any of the Claims 5 to 8, **characterized in that** the depths (l_1, l_4) of concavities (6) upstream each friction claw (4), measured on the projection onto the plane defined by the bottom wall (2) of the joining member (1) between the tip (7) of each friction claw (4) after having it bent out and the bottom point (8) of the concavities (6) are the deepest for the friction claws (4) located close to the joining member (1) far ends and for the ones that are the most adjacent to the central line (O) for each side wall (3).
10. The joining member according to any of the Claims 5 to 9, **characterized in that** four friction claws (4) with uniform stiffness are provided on each side wall (3) within the area from the respective far end of the joining member (1) to its central line (O).

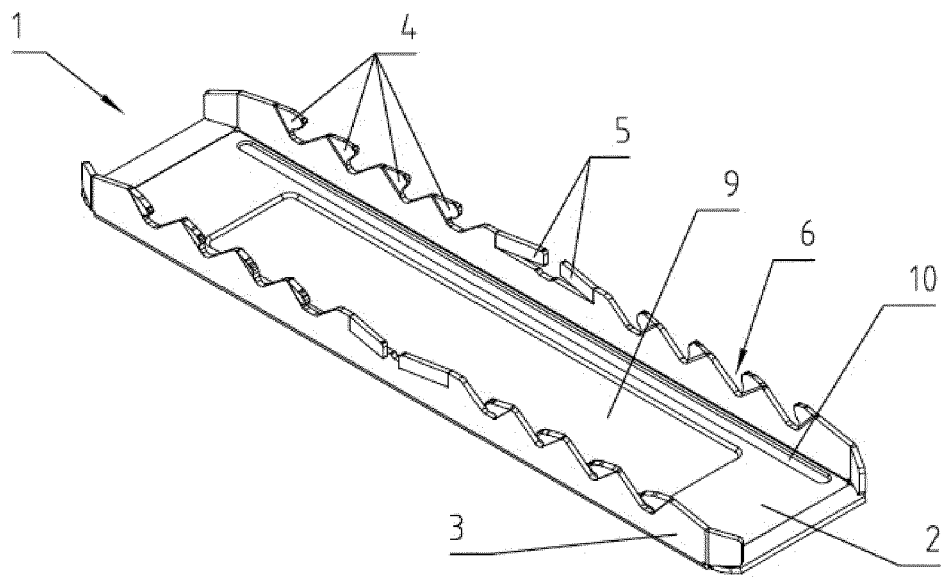


Fig. 1

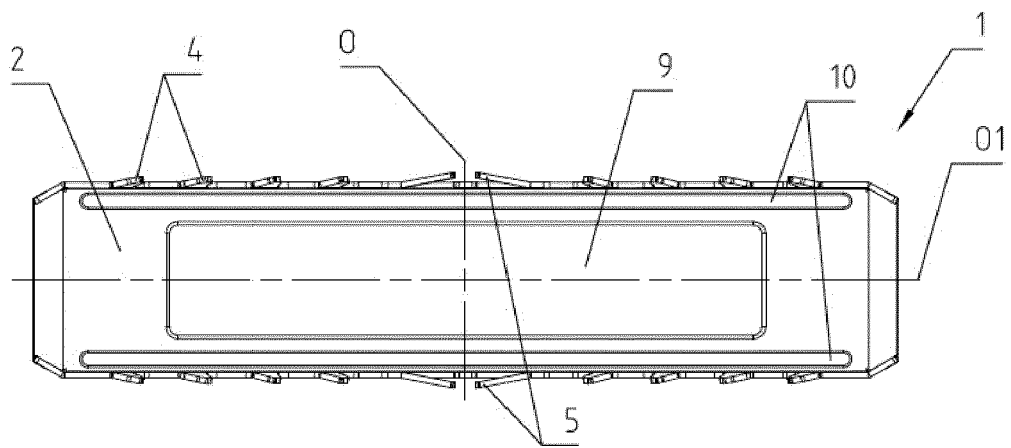


Fig. 2

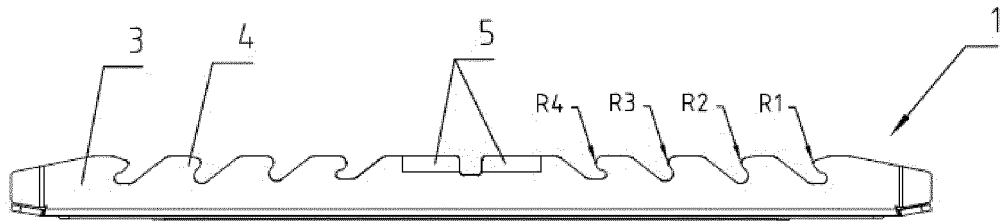


Fig. 3

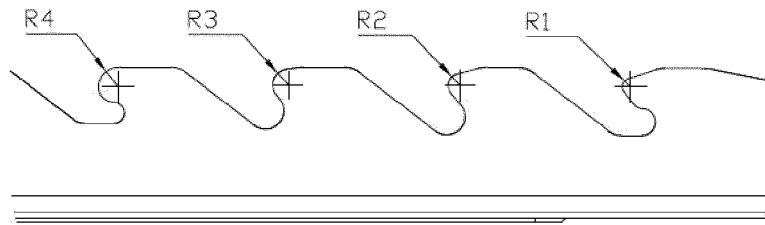


Fig. 3A

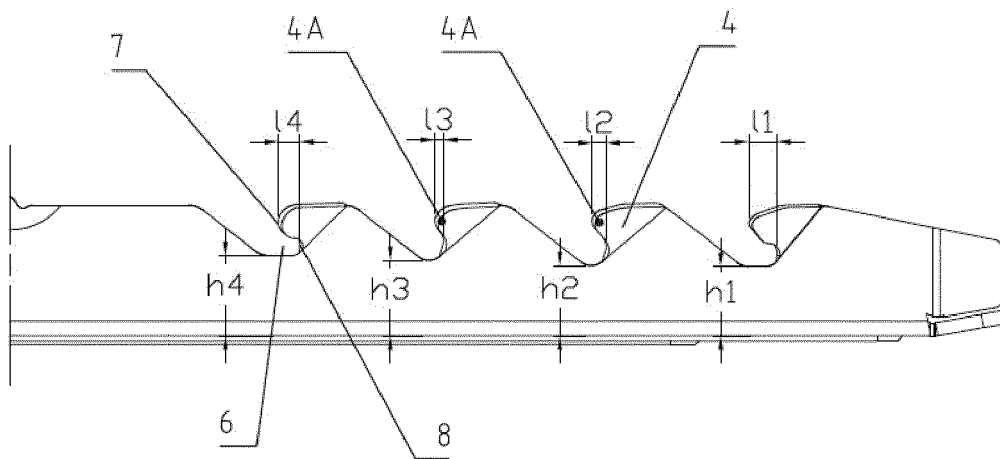


Fig. 4

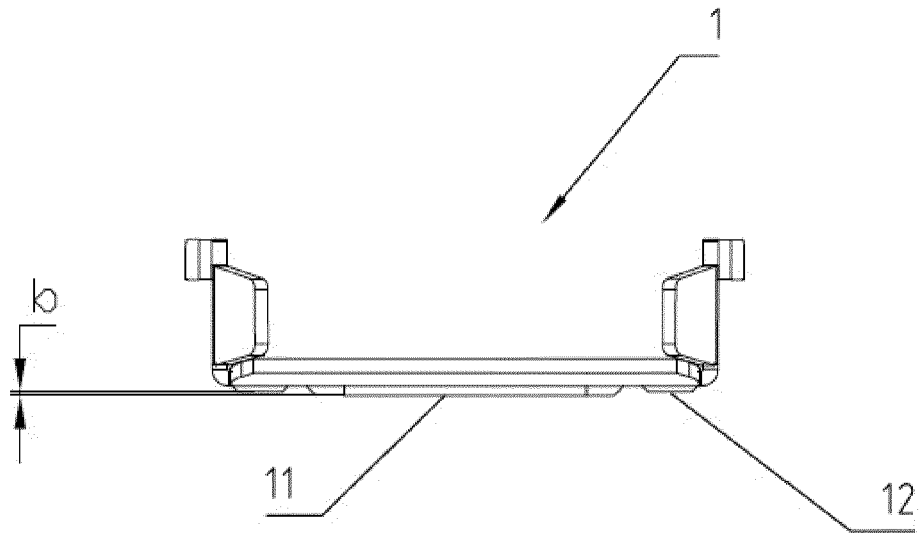


Fig. 5

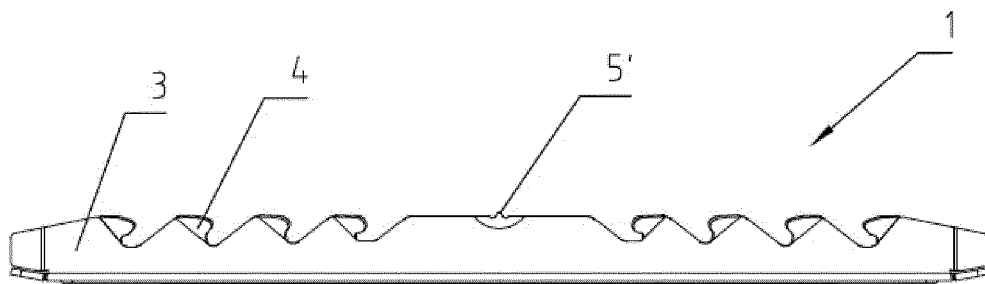


Fig. 6

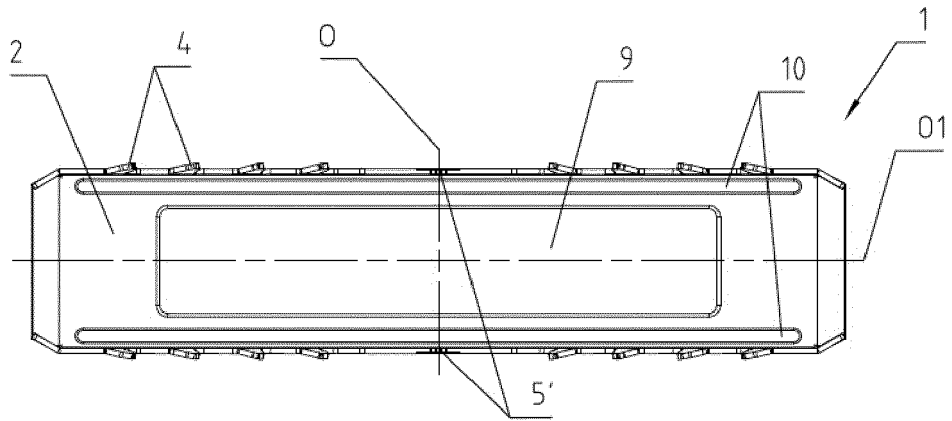


Fig. 7

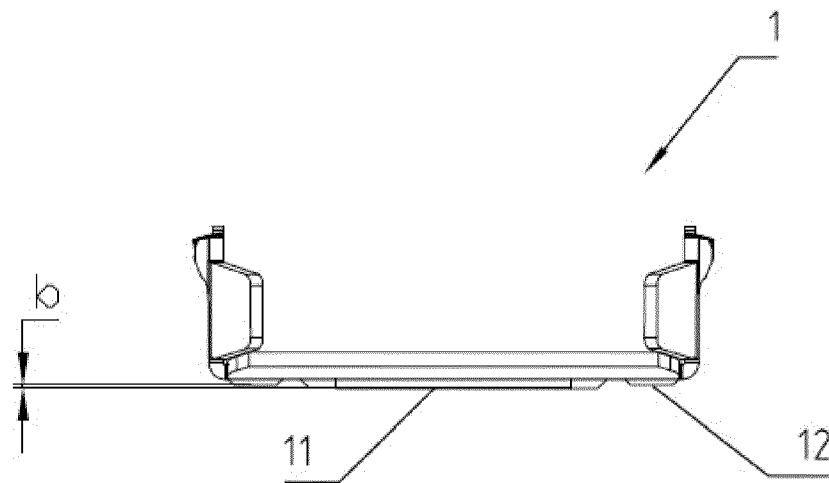


Fig. 8

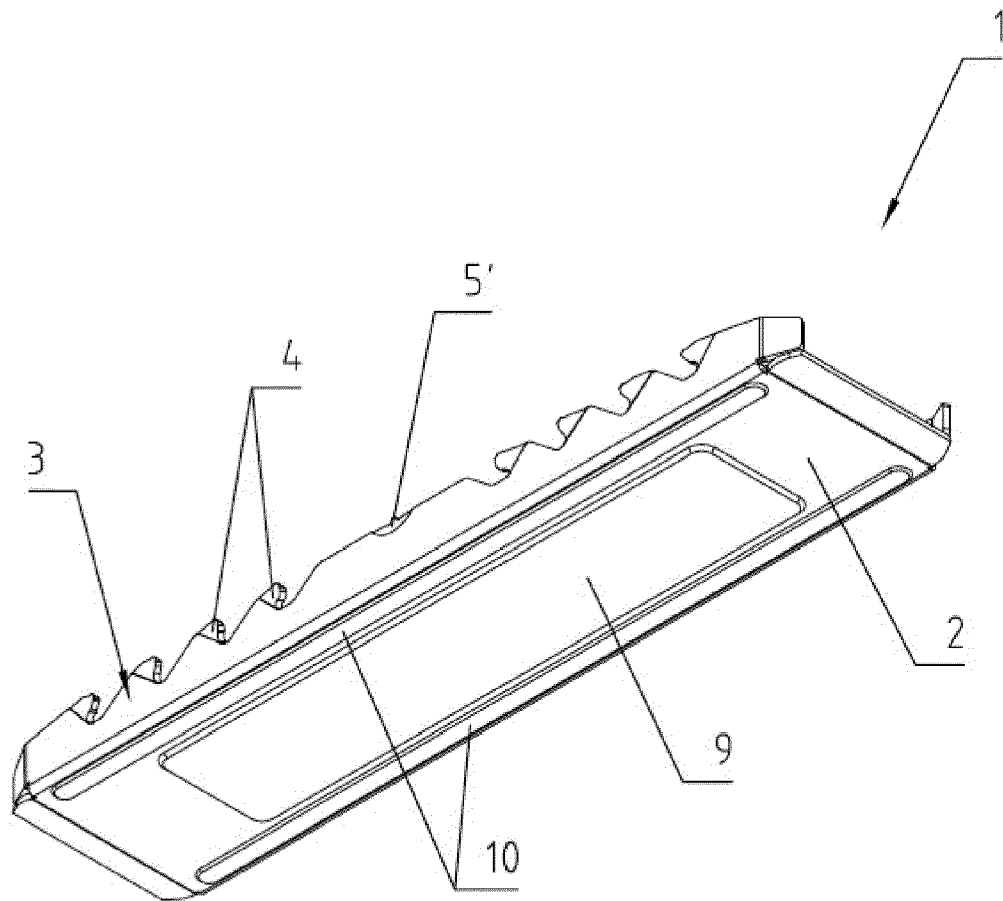


Fig. 9

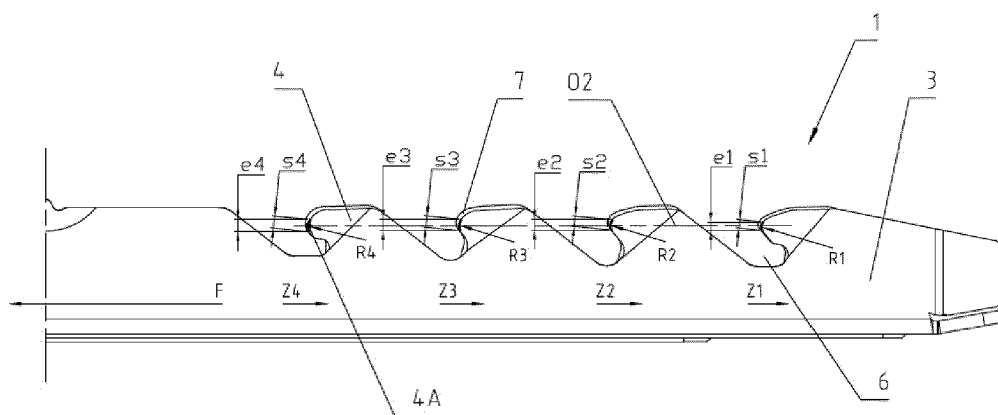


Fig. 10



EUROPEAN SEARCH REPORT

Application Number
EP 20 16 6472

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	DE 299 09 413 U1 (KRONENBERG MAX [DE]) 12 October 2000 (2000-10-12) * figures 7-9 *	1-10	INV. E06B3/667
A	DE 20 2004 004933 U1 (KRONENBERG MAX [DE]; KRONENBERG RALF MAX [DE]) 21 July 2005 (2005-07-21) * figures 1,4 *	1-10	
A	DE 20 2014 104222 U1 (KRONENBERG MAX [DE]) 11 December 2015 (2015-12-11) * figure 1 *	1-10	
			TECHNICAL FIELDS SEARCHED (IPC)
			E06B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 17 September 2020	Examiner Verdonck, Benoit
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 20 16 6472

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-09-2020

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 29909413 U1	12-10-2000	DE 29909413 U1	12-10-2000
		US 6431784 B1	13-08-2002
DE 202004004933 U1	21-07-2005	NONE	
DE 202014104222 U1	11-12-2015	DE 202014104222 U1	11-12-2015
		EP 3191671 A1	19-07-2017
		US 2017260797 A1	14-09-2017
		WO 2016038002 A1	17-03-2016

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- PL 205223 B1 [0002]
- PL 65674 Y1 [0003]