



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
26.03.2003 Bulletin 2003/13

(51) Int Cl.7: **F02P 5/152, F02D 41/14**

(21) Application number: **02028497.2**

(22) Date of filing: **18.12.1997**

(84) Designated Contracting States:
DE FR GB

(30) Priority: **19.12.1996 JP 33978496**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
97122401.9 / 0 849 454

(71) Applicant: **TOYOTA JIDOSHA KABUSHIKI**
KAISHA
Aichi-ken (JP)

(72) Inventor: **Mashiki, Zenichiro,**
Toyota Jidosha Kabushiki K.
Toyota-shi, Aichi-ken (JP)

(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing.
Tiedtke-Bühling-Kinne & Partner GbR,
TBK-Patent,
Bavariaring 4
80336 München (DE)

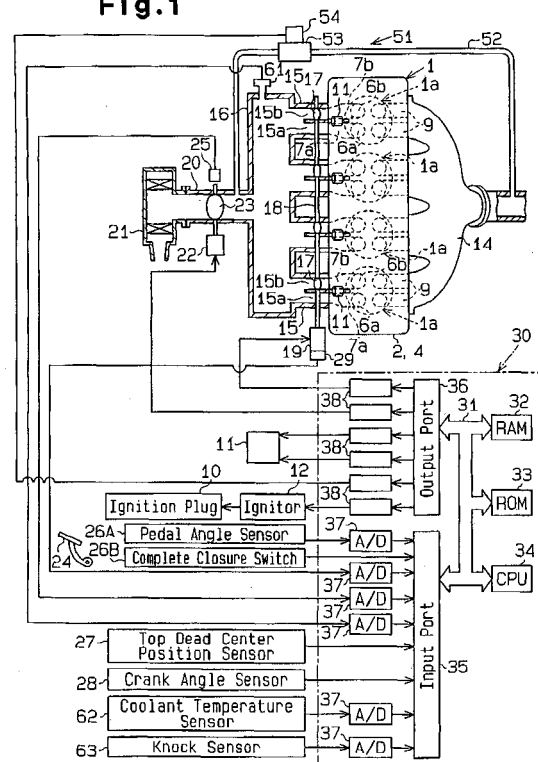
Remarks:

This application was filed on 19-12-2002 as a
divisional application to the application mentioned
under INID code 62.

(54) **Apparatus and method for reducing torque fluctuation for lean burn combustion engine**

(57) An apparatus for reducing a torque fluctuation of a lean burn combustion engine (1). An injector (11) supplies fuel to combustion chambers of the engine (1). An ignitor (10, 12) ignites the fuel supplied into the combustion chambers. A knock sensor detects knocking in the engine (1). An electronic control unit (ECU) (30) computes a delay amount of the ignition timing based on a result of knock detection by the knock sensor and controls the ignitor (12) to delay the ignition timing by the delay amount to suppress knocking. The ECU (30) also detects torque fluctuation of the engine (1). The ECU (30) increases an amount of fuel injection from the injector (11) by an increase amount to reduce the torque fluctuation when the detected torque fluctuation is larger than a target value. The ECU (30) reduces the amount of exhaust gas recirculation in accordance with said computed delay amount.

Fig.1



Description

TECHNICAL FIELD

[0001] The present invention relates to an apparatus and a method for reducing a torque fluctuation of a lean burn engine.

RELATED BACKGROUND ART

[0002] In a typical engine, fuel is injected into an intake port from a fuel injection valve to charge a homogeneous mixture of fuel and air to the associated combustion chamber. An intake passage is opened and closed by a throttle valve, which is operated by manipulating an acceleration pedal. The opening of the throttle valve adjusts the intake air amount (and ultimately the amount of homogeneously mixed air and fuel) that is supplied to the combustion chambers of the engine. This controls engine power.

[0003] However, when performing homogeneous charge combustion, vacuum is produced by the throttling action of the throttle valve. This increases energy loss due to pumping, which results when the mixture is drawn into the combustion chamber from the intake port. To attempt to solve this problem, stratified charge combustion has been proposed. In stratified charge combustion, the throttle valve is opened wide, and fuel is supplied directly into each combustion chamber. This provides a mixture having a relatively low air-fuel ratio in the vicinity of the ignition plug. As a result, the fuel is easier to ignite.

[0004] "Lean burn combustion" includes "stratified charge combustion". "Lean burn combustion" includes not only "stratified charge combustion" but also "homogeneous lean burn combustion," which improves fire propagation with less fuel by forming a swirl or the like in the air-fuel mixture during homogeneous charge combustion. "Stratified charge combustion" and "lean burn combustion" both reduce the amount of fuel supplied to the combustion chambers.

[0005] In an engine that performs the aforementioned "lean burn combustion," abnormal combustion due to the self firing of fuel, knocking, may occur. To suppress knocking, the ignition timing is delayed. Delaying the ignition timing, however, reduces the fuel combustion speed, which deteriorates combustion and increases the torque (power) fluctuation of the engine.

[0006] For example, Japanese Unexamined Patent Publication No. Hei 4-187851 discloses an apparatus designed to overcome this drawback. This apparatus increases the amount of fuel injection in accordance with the amount of delay when the ignition timing is delayed. The increased amount of fuel injection suppresses the deterioration of the combustion and reduces an increase in torque fluctuation.

[0007] When the fuel injection amount is increased, however, the disclosed apparatus increases the likeli-

hood of knocking. To suppress knocking, therefore, the ignition timing should be delayed further. This may result in an over-delay of the ignition timing, which may cause a misfire. Such a misfire would further increase the torque fluctuation.

[0008] Document US 5 577 476 discloses an ignition timing control apparatus for an engine which corrects the ignition timing in accordance with the presence or absence of the exhaust gas to be recirculated into a combustion chamber by an exhaust gas recirculation apparatus. A control unit computes a base ignition timing in accordance with the running condition of the engine and corrects the computed value toward advancement by a predetermined value in accordance with the exhaust gas recirculation amount. Further, the control unit corrects the compensated value of the ignition timing by a predetermined value toward retard to the timing close to the limit beyond which knocking starts.

20 DISCLOSURE OF THE INVENTION

[0009] Accordingly, it is an object of the present invention to provide a torque fluctuation reducing apparatus and a method for a lean burn combustion engine, which can reduce torque fluctuation without raising a shortcoming associated with a delayed ignition timing.

[0010] To achieve above objective, the present invention provides an apparatus for reducing a torque fluctuation of an internal combustion engine which performs lean burn combustion, comprising: an exhaust gas recirculating mechanism for recirculating a gas into an intake passage from an exhaust gas recirculating passage for connecting the exhaust passage of the engine to the intake passage, a valve disposed in the exhaust gas recirculating passage, and an actuator for opening and closing the valve; a condition detector for detecting a running condition of the engine; a recirculating computer for computing an amount of exhaust gas recirculation based on the detected running condition, and controlling the actuator based on the amount of exhaust gas recirculation; an ignitor for igniting the fuel supplied into combustion chambers of the engine; a knock detector for detecting knocking in the engine; an ignition timing controller for computing a delay amount of the ignition timing based on a result of knock detection by the knock detector and for controlling the ignitor to delay the ignition timing by the delay amount to suppress knocking; and a compensation controller for reducing the amount of exhaust gas recirculation in accordance with the computed delay amount.

[0011] The present invention further provides a method of reducing the torque fluctuation of a lean-burn internal combustion engine, the method comprising the steps of: detecting a running condition of the engine; computing a target amount of exhaust gas recirculation based on the detected running condition; controlling the amount of exhaust gas recirculation based on the target amount; detecting whether knocking has occurred in the

engine; computing a delay amount for delaying the ignition timing of the engine based on the outcome of knock detection step; delaying the ignition timing by the delay amount; and reducing the amount of exhaust gas recirculation in accordance with the delay amount.

[0012] Other aspects and advantages of the invention will become apparent from the following description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The invention, together with objects and advantages thereof, may best be understood by reference to the following description of the presently preferred embodiments together with the accompanying drawings.

Fig. 1 is a schematic structural diagram illustrating an engine torque fluctuation reducing apparatus according to a first embodiment;

Fig. 2 is a schematic cross-sectional view showing one cylinder of an engine;

Fig. 3 is a flowchart illustrating a "feedback compensation coefficient computing routine," which is executed by an ECU;

Fig. 4(a) is a graph showing the relationship between a torque fluctuation and a feedback amount;

Fig. 4(b) is a graph showing the relationship between the torque fluctuation and the feedback amount;

Fig. 5 is a flowchart illustrating an "exhaust gas recirculation amount compensation control routine" which is executed by the ECU; and

Fig. 6 is a graph showing the relationship between the amount of delay of the ignition timing and the amount of compensation of the exhaust gas recirculation.

DESCRIPTION OF SPECIAL EMBODIMENT

First Embodiment

[0014] An torque fluctuation reducing apparatus for a lean burn combustion engine according to a first embodiment of the present invention will specifically be described below referring to the accompanying drawings.

[0015] As shown in Fig. 1, an engine 1 is provided with four cylinders 1a. The structure of the combustion chamber of each cylinder 1a is shown in Fig. 2. The engine 1 has a cylinder block 2 that accommodates pistons. The

pistons are reciprocated in the cylinders 1a of the cylinder block 2. A cylinder head 4 is arranged on top of the cylinder block 2.

A combustion chamber 5 is defined between each piston and the cylinder head 4. Four valves are provided for each cylinder 1a. The four valves include a first intake valve 6a, a second intake valve 6b, and two exhaust valves 8. The first intake valve 6a regulates a first intake port 7a while the second intake valve 6b regulates a second intake port 7b. Each exhaust valve 8 is located in an exhaust port 9.

[0016] As shown in Fig. 2, the first intake port 7a is a helical port that extends in a helical manner. The second intake port 7b extends in a generally straight manner. Ignition plugs 10 are arranged at the middle of the cylinder head 4 to face the combustion chambers 5. High voltage is applied to each ignition plug 10 by an ignitor 12 through a distributor (not shown). The ignition timing of the ignition plugs 10 is determined by the output timing of the high voltage sent from the ignitor 12. A fuel injection valve 11 is arranged near the inner wall of the cylinder head 4 in the vicinity of each set of first and second intake valves 6a, 6b in each combustion chamber 5. The fuel injection valve 11 injects fuel directly into the associated combustion chamber 5 of cylinder 1a.

[0017] In this embodiment, each injection valve 11 directly injects fuel into the associated cylinder 1a when either stratified charge combustion or homogeneous charge combustion is performed. When stratified charge combustion is performed, the valve 11 injects fuel into the combustion chamber 5 at the final stage of each compression stroke. The injected fuel is supplied in a concentrated manner about the ignition plug 10 and is burned. During stratified combustion, a throttle valve 23, which will be discussed below, is relatively open. When homogeneous charge combustion is performed, on the other hand, the valve 11 injects fuel into the combustion chamber 5 during the intake stroke of the associated piston. The injected fuel is mixed with air introduced into the combustion chamber 5 from the intake ports 7a, 7b and is burned.

[0018] As shown in Fig. 1, the first and second intake ports 7a, 7b of each cylinder 1a are connected to a surge tank 16 by a first intake passage 15a and a second intake passage 15b, which are defined in an intake manifold 15. A swirl control valve 17 is arranged in each second intake passage 15b. The swirl control valves 17 are connected to, for example, a step motor (or a DC motor) 19 by a common shaft 18. The step motor 19 is controlled by signals sent from an electronic control unit (ECU) 30, which will be discussed later. The step motor 19 may be replaced with an actuating member controlled by the vacuum pressure in the intake ports 7a, 7b.

[0019] The surge tank 16 is connected to an air cleaner 21 through an intake duct 20. A throttle valve 23, which is opened and closed by a step motor (or a DC motor) 22, is arranged in the intake duct 20. The ECU 30 sends signals to drive the step motor 22 for opening

and closing the throttle valve 23. The throttle valve 23 adjusts the amount of intake air that passes through the intake duct 20 and enters the combustion chambers 5. In this embodiment, the intake duct 20, the surge tank 16, the first intake passage 15a and the second intake passage 15b constitute an intake path. A throttle sensor 25 is arranged in the vicinity of the throttle valve 23 to detect the opening angle (throttle angle TA) of the valve 23.

[0020] The exhaust ports 9 of each cylinder 1a are connected to an exhaust manifold 14. After combustion, the exhaust gas is sent to an exhaust pipe (not shown) through the exhaust manifold 14.

[0021] The engine 1 is provided with a conventional exhaust gas recirculation (EGR) mechanism 51 that includes an EGR passage 52 and an EGR valve 53 arranged in the EGR passage 52. The EGR passage 52 communicates a part of the intake duct 20 at the downstream side of the throttle valve 23 with an exhaust duct connected to the exhaust manifold 14. The EGR valve 53 includes a valve seat, a valve body (neither illustrated), and a step motor 54. The opening area of the EGR valve 53 is altered by causing the step motor 54 to intermittently displace the valve body with respect to the valve seat. When the EGR valve 53 opens, some of the exhaust gas sent into the exhaust duct enters the EGR passage 52. The gas is then drawn into the intake duct 20 via the EGR valve 53. In other words, some of the exhaust gas is recirculated by the EGR mechanism 51 and returned to the air-fuel mixture. The EGR valve 53 controls the recirculation amount of the exhaust gas.

[0022] The ECU 30 is a digital computer provided with a random access memory (RAM) 32, a read only memory (ROM) 33, a central processing unit (CPU) 34, which is a microprocessor, an input port 35 and an output port 36. A bidirectional bus 31 connects the RAM 32, the ROM 33, the CPU 34, the input port 35, and the output port 36 to one another.

[0023] An acceleration pedal 24 is connected to a pedal angle sensor 26A. The pedal angle sensor 26A generates voltage proportional to the degree of depression of the acceleration pedal 24. This enables the acceleration pedal depression amount to be detected. The voltage produced by the pedal angle sensor 26A is input in the CPU 34 by way of an analog-to-digital (A/D) converter 37 and the input port 35. The acceleration pedal 24 is also provided with a complete closure switch 26B, which detects whether the acceleration pedal 24 is not pressed at all. The closure switch 26B outputs one as a complete closure signal when the acceleration pedal 24 is not pressed at all and outputs zero when the acceleration pedal 24 is pressed. The output voltage of the closure switch 26B is input to the CPU 34 via the input port 35.

[0024] A top dead center position sensor 27 generates an output pulse when, for example, the piston in the first cylinder 1a reaches the top dead center position. The output pulse is delivered to the CPU 34 via the input

port 35. A crank angle sensor 28 generates an output pulse each time a crankshaft of the engine 1 is rotated, for example, by a crank angle CA of 30 degrees. The output pulse sent from the crank angle sensor 28 is sent to the CPU 34 via the input port 35. The CPU 34 reads the output pulses of the top dead center position sensor 27 and the crank angle sensor 28 to compute the engine speed NE.

[0025] The rotational angle of the shaft 18 is detected by a swirl control valve sensor 29 to measure the opening area of the swirl control valves 17. The signal output of the swirl control valve sensor 29 is sent to the CPU 34 via an A/D converter 37 and the input port 35. The throttle sensor 25 detects the throttle angle TA. The signal output of the throttle sensor 25 is sent to the CPU 34 via an A/D converter 37 and the input port 35.

[0026] An intake pressure sensor 61 is provided to detect the pressure in the surge tank 16 (intake pressure PIM). A coolant temperature sensor 62 is provided to detect the temperature of the engine coolant (coolant temperature THW). The sensors 61, 62 output signals based on detected values to the CPU 34 by way of corresponding A/D converters 37 and the input port 35.

[0027] The cylinder block 2 is provided with a knock sensor 63, which detects the vibration that includes knocking generated by the engine 1 and outputs a knock signal KCS according to the frequency and the level of the vibration.

[0028] The sensors 25-29, 61-63 and the switch 26B serve as devices for detecting the running condition of the engine 1.

[0029] The output port 36 is connected to the fuel injection valves 11, the step motors 19, 22, the ignition plug 10 (ignitor 12), and the EGR valve 53 (the step motor 54) by way of drive circuits 38. The ECU 30 optimally controls the fuel injection valves 11, the step motors 19, 22, 54, and the ignitor 12 with control programs stored in the ROM 33 based on signals sent from the sensors 25-29, 61-63 and the switch 26B.

[0030] A program associated with various controls will now be discussed with reference to Figs. 3, 4(a), and 4(b).

[0031] To control the amount of fuel injection by regulating the fuel injection valve 11 upon the torque fluctuation, the ECU 30 executes the routine illustrated in Fig. 3 by an interrupt for each predetermined crank angle.

[0032] First, the ECU 30 computes a torque fluctuation $d\text{Inism}$ in step 101. The ECU 30 computes a change in the angular velocity of the crankshaft (a change in the engine speed) as the torque fluctuation $d\text{Inism}$ based on the output signal of the crank angle sensor 28 which is sent out every predetermined crank angle (30° CA).

[0033] Next, the ECU 30 computes a target torque fluctuation $Td\text{Inism}$ based on predetermined function data in step 102. This function data has previously been determined using a basic fuel injection amount QALL, the engine speed NE and the target torque fluctuation

Tdlnism as parameters. The basic fuel injection amount QALL is previously been computed in a separate routine based on the acceleration pedal angle ACCP and the engine speed NE. The target torque fluctuation Tdlnism is a torque fluctuation that is allowed under the prevailing the running conditions of the engine 1. With a given engine speed NE and a given engine load, for instance, the target torque fluctuation Tdlnism is determined according to the air-fuel ratio A/F. As the air-fuel ratio A/F increases (as the mixture of fuel and air is leaner), the target torque fluctuation Tdlnism increases.

[0034] In step 103, the ECU 30, computes a feedback amount C(j), which affects the fuel injection amount, based on the torque fluctuations dinism, the target torque fluctuation Tdlnism. More specifically, first, the ECU 30 selects one feedback amount function from several possible feedback amount functions based on the target torque fluctuation Tdlnism. Two graphs of such functions are given as Fig. 4(a) and 4(b). The horizontal axes indicate the difference between the torque fluctuation dinism and the target torque fluctuation TDLNISM (dlnism-Tdlnism), and the vertical axes indicate C(j). The horizontal axes each include eight ranges L4, L3, L2, L1, H1, H2, H3, H4.

[0035] In Fig. 4(a), each of the ranges L4-L1 and H1-H4 has a maximum width, while each of the ranges L4-L1 and H1-H4 of the graph of Fig. 4(b) has a minimum width. A number of other similar functions that are between these two extremes are also employed. In other words, further function graphs that have ranges L4-L1 and H1-H4 that are between those of Figs. 4(a) and 4(b) in width, are employed such that the width of their ranges L4-L1 and H1-H4 increase stepwise between that indicated in Fig. 4(b) and that indicated in Fig. 4(a). When the computed target torque fluctuation Tdlnism is high, or near the maximum expected value, the ECU 30 selects the function represented by the graph of Fig. 4(a), and when the computed target torque fluctuation Tdlnism is low, or near the minimum expected value, the ECU 30 selects the function represented by the graph of Fig. 4(b). For values of the target torque fluctuation Tdlnism that are in between the maximum and minimum values, the ECU 30 proportionally selects one of the unillustrated functions that lie between the illustrated extremes.

[0036] In this embodiment, the feedback amount C(j) increases in reverse order for the ranges L1-L4 and in order for ranges H1-H4. The ECU 30 computes the feedback amount C(j) according to the difference between the torque fluctuation dinism and the target torque fluctuation Tdlnism. When the difference between the torque fluctuation dlnism and the target torque fluctuation Tdlnism lies in any of the ranges L4-L1, the feedback amount C(j) for regulating, the fuel injection amount takes a negative value. Optionally, the feedback amounts C(j) in the ranges L4-L1 may all be zero. When the torque fluctuation dlnism lies in any of the ranges H1-H4, the feedback amount C(j) takes a positive value.

[0037] In the subsequent step 104, the ECU 30 determines whether an ignition timing delay amount aknksm is smaller than a preset reference value (the limit value of the ignition timing delay amount) C_0 . In other words, the ECU 30 determines if the ignition timing is over-delayed. A positive result in step 104 indicates an over-delay.

[0038] The ignition timing delay amount aknksm is computed in a separate routine in accordance with the level, frequency and the like of knocking, which is detected by the knock sensor 63. More specifically, the more knocking occurs, the more negative the ignition timing delay value aknksm is. In other words, a greater absolute value of aknksm represents a greater timing delay. When no knocking occurs, the ignition timing delay amount aknksm is set to zero. The ignition timing delay amount aknksm, set in this manner, is used in computing the ignition timing T.

Specifically, to determine the ignition timing T, the ECU 30 computes a basic ignition timing T0 based on the set basic fuel injection amount QALL and engine speed NE and adds the ignition timing delay amount aknksm to this basic ignition timing T0.

[0039] When the ignition timing delay amount aknksm is smaller than the reference value C_0 , the ECU 30 proceeds to step 105. In this step 105, the ECU 30 sets the feedback amount C(j) for the range H1 to zero as indicated by the arrows in Figs. 4(a) and 4(b). When the ignition timing delay amount aknksm is equal to or larger than the reference value C_0 in step 104, the ECU 30 proceeds to step 106.

[0040] In step 106, which is reached from step 104 or 105, the ECU 30 calculates a feedback compensation coefficient FAF associated with the fuel injection amount based on the computed feedback amount C(j) for the fuel injection amount. That is, the ECU 30 adds the feedback amount C(j) to a previous feedback compensation coefficient FAF_{i-1} to obtain a new feedback compensation coefficient FAF.

[0041] Then, the ECU 30 temporarily terminates the subsequent processing. The currently computed feedback compensation coefficient FAF is used together with the basic fuel injection amount QALL in computing the final fuel injection amount in a fuel injection control program routine.

[0042] The operation of the torque fluctuation reducing apparatus according to this embodiment will be discussed below.

[0043] In the above-described embodiment, the basic fuel injection amount QALL is calculated in a separate routine on the basis of the acceleration pedal angle ACCP and the engine speed NE. In the routine in Fig. 3, the ECU 30 compensates the fuel injection amount to steer the actual torque fluctuation dlnism towards the target torque fluctuation Tdlnism. Specifically, the amount of fuel is increased to reduce the torque fluctuation dlnism.

[0044] When knocking occurs, to reduce the knock-

ing, the ignition timing delay amount $aknksm$, which is calculated in a separate program routine, is decreased to reduce the knocking. That is, the ignition timing is delayed. When the ignition timing delay amount $aknksm$ is smaller than the reference value C_0 , or when the ignition timing delay is increased to a certain degree, the feedback amount $C(j)$ for the range H1 shown in Figs. 4A and 4B is reset to zero from a positive value as indicated by the arrows in Figs. 4(a) and 4(b). when the torque fluctuation $dlnism$ is large enough to lie in the range H1, this setting limits a further increase in the basic fuel injection amount $QALL$. This restriction on the fuel increase prevents the combustion speed from increasing and prevents knocking from occurring due to an excessive increase in the fuel injection amount.

[0045] In this embodiment, the suppression of knocking is given priority over the reduction of the torque fluctuation $dlnism$ by restricting an increase in the fuel injection amount. This prevents the fuel injection amount from increasing in order to reduce the torque fluctuation $dlnism$ and thus prevents an undesirable increase in the ignition timing delay. That is, over-delay is prevented. This prevents misfires due to timing over-delay. This prevents the circular problem resulting from the repeated suppression of knocking and reduction of the torque fluctuation $dlnism$ described in the Background of the Invention.

Second Embodiment

[0046] A second embodiment of this invention will now be described.

[0047] To avoid a redundant description, like or same reference numerals are given to those components that are the same as the corresponding components of the first embodiment.

[0048] According to this embodiment, when the ignition timing delay amount $aknksm$ is increased to suppress knocking, the amount of the exhaust gas recirculation is compensated in accordance with the engine speed NE . The ECU 30 executes a routine represented by the flowchart in Fig. 5 by an interrupt for each predetermined crank angle to perform the compensation.

[0049] First, the ECU 30 computes the engine speed NE from the output signal of the crank angle sensor 28 or the like in step 201. Then, the ECU 30 determines that the engine speed NE is greater than a preset reference value NE_0 . When it is determined, the ECU 30 goes to step 202.

[0050] In step 202, based on the output signal of the knock sensor 63, the ECU 30 determines whether there is knocking. When knocking occurs, the ECU 30 proceeds to step 204.

[0051] In step 204, the ECU 30 reads the ignition timing delay amount $aknksm$, separately computed in a routine similar to the one discussed with regard to the first embodiment. Then, the ECU 30 calculates an EGR compensation amount $dEGR$ based on the ignition tim-

ing delay amount $aknksm$. As shown in Fig. 6, the EGR compensation amount $dEGR$. In other words, higher values of the absolute value of the delay amount (greater timing delays) correspond to greater EGR compensation values.

[0052] When there is no knocking detected in step 202, the ECU 30 proceeds to step 205 to set the EGR compensation amount $dEGR$ to zero. When the engine speed NE is equal to or smaller than the reference value NE_0 in the previous step 201, the ECU 30 goes to step 203 to set the EGR compensation amount $dEGR$ to zero as in the step 205.

[0053] In step 206, which is reached from step 203, 204 or 205, the ECU 30 subtracts the EGR compensation amount $dEGR$ from a basic EGR amount EGR_0 as an EGR amount $EGRF$. The basic EGR amount EGR_0 is computed based on the acceleration pedal angle $AC-CP$ or the like in a separate routine. Then, the ECU 30 temporarily terminates the subsequent processing.

[0054] In this routine, as apparent from the above, the reference EGR amount EGR_0 is reduced by the EGR compensation amount $dEGR$.

[0055] The operation of the fluctuation reducing apparatus according to this embodiment will be discussed below.

[0056] At times, recirculation of exhaust gas to the intake air reduces the combustion speed and suppresses knocking. When the engine speed NE is high and the temperature of the exhaust gas is higher than a certain level, however, the recirculation of the exhaust gas to the intake air raises the intake temperature. The rise of the intake temperature increases the combustion speed. As the combustion speed increases, knocking becomes worse.

[0057] According to this embodiment, when and only when the engine speed NE exceeds a predetermined value NE_0 and there is knocking, the EGR compensation amount $dEGR$ is set to a positive value based on the ignition timing delay amount $aknksm$ that has been computed separately. The EGR amount $EGRF$ is therefore reduced by the EGR compensation amount $dEGR$. The decrease in the EGR amount $EGRF$ suppresses knocking.

[0058] Generally, as the EGR amount: $EGRF$ is reduced, undesired exhaust emissions are increased. According to this embodiment, however, reduction of the EGR amount EGR_0 by the EGR compensation amount $dEGR$ is carried out only when knocking occurs at high engine speeds, and the EGR compensation amount $dEGR$ is set based on the ignition timing delay amount $aknksm$ according to the degree of that knocking. In this manner, a reduction in the EGR amount $EGRF$ is minimized in accordance with the degree of knocking. This prevents the EGR amount $EGRF$ from being reduced more than necessary, so that undesired exhaust emissions will not increase more than necessary.

[0059] Further, since knocking is suppressed by a reduction in the EGR amount $EGRF$ at high engine

speeds, the ignition timing delay amount Δt_{ign} will not be increased more than necessary. This prevents an increase in the torque fluctuation and the delay of the ignition timing.

Furthermore, the circular problem caused by the repeated suppression of knocking and reduction of the torque fluctuation is prevented.

[0060] It should be apparent to those skilled in the art that the present invention may be embodied in many other specific forms without departing from the spirit or scope of the invention. Particularly, it should be understood that the invention may be embodied in the following forms:

(a) Instead of using the angular velocity of the crankshaft, or a change in the engine speed ME , the torque fluctuation ΔT may be computed based on other parameters indicating the torque fluctuation of the engine, such as a fluctuation in combustion pressure.

(b) In step 201 in Fig. 5, parameters other than the engine speed NE , such as the acceleration pedal angle and the fuel injection amount, may be used as long as they can indicate a change in the temperature of the exhaust gas.

(c) Although the electronically controllable throttle valve 23 is used in the above-described embodiments, a mechanical throttle valve, which is linked to the acceleration pedal 24, may be used instead.

(d) The fuel injection amount and the EGR amount may both be compensated.

(e) According to the first and second embodiments, the present invention is employed in a cylinder injection type engine 1. However, the present invention may be employed in any type of engine as long as the engine is able to perform lean burn combustion. For example, the present invention may be employed in an engine in which fuel is injected toward the back faces of the intake valves 6a, 6b for performing stratified charge combustion. Further, in the illustrated embodiment, the fuel injection valve 11 is provided in the vicinity of the intake valves 6a, 6b. However, the valve 11 may be located at any position as long as the valve 11 can directly inject fuel into the combustion chamber 5.

(f) The engine 1 according to the first embodiment includes helical intake ports 7a, 7b, which generate a swirl of intake air. However, a swirl is not required. Therefore, the swirl control valve 17 and the step motor 19 may be omitted.

(g) The first and second embodiments are employed in a gasoline engine 1. However the present

invention may be embodied in a diesel engine.

[0061] Therefore, the present examples and embodiments are to be considered as illustrative and not restrictive and the invention is not to be limited to the details given herein, but may be modified within the scope and equivalence of the appended claims.

[0062] An apparatus for reducing a torque fluctuation of a lean burn combustion engine (1). An injector (11) supplies fuel to combustion chambers of the engine (1). An ignitor (10, 12) ignites the fuel supplied into the combustion chambers. A knock sensor detects knocking in the engine (1). An electronic control unit (ECU) (30) computes a delay amount of the ignition timing based on a result of knock detection by the knock sensor and controls the ignitor (12) to delay the ignition timing by the delay amount to suppress knocking. The ECU (30) also detects torque fluctuation of the engine (1). The ECU (30) increases an amount of fuel injection from the injector (11) by an increase amount to reduce the torque fluctuation when the detected torque fluctuation is larger than a target value. The ECU (30) limits the increase amount when the ignition timing is delayed by more than a predetermined delay amount.

Claims

1. An apparatus for reducing a torque fluctuation of an internal combustion engine (1) which performs lean burn combustion, comprising:

an exhaust gas recirculating mechanism (51) for recirculating a gas into an intake passage (15a, 15b) from an exhaust passage (14) of said engine (1), said mechanism (51) including an exhaust gas recirculating passage (52) for connecting said exhaust passage (14) of said engine (1) to said intake passage (15a, 15b), a valve (53) disposed in said exhaust gas recirculating passage (52), and an actuator (54) for opening and closing said valve (53);
a condition detector (25, 26A, 61) for detecting a running condition of said engine (1);
a recirculation computer (30) for computing an amount of exhaust gas recirculation based on said detected running condition, and controlling said actuator (54) based on said amount of exhaust gas recirculation;
an ignitor (10, 12) for igniting said fuel supplied into combustion chambers of said engine (1);
a knock detector (63) for detecting knocking in said engine (1); and
an ignition timing controller (30) for computing a delay amount of the ignition timing based on a result of knock detection by the knock detector (63) and for controlling the ignitor (10, 12) to delay the ignition timing by said delay amount

to suppress knocking; the apparatus **characterized by**

a compensation controller (30) for reducing said amount of exhaust gas recirculation in accordance with said computed delay amount.

5

2. The apparatus according to claim 1, wherein said condition detector (25, 26A, 61) includes a sensor for detecting the number of rotations of said engine (1), and said compensation controller (30) compensates said amount of exhaust gas recirculation when said number of rotations of said engine (1) exceeds a predetermined reference value. 10
3. The apparatus according to claim 2, wherein said compensation controller (30) reduces said amount of exhaust gas recirculation more as said ignition timing is delayed. 15
4. A method of reducing the torque fluctuation of a lean-burn internal combustion engine (1), the method comprising the steps of: 20
 - detecting a running condition of the engine (1);
 - computing a target amount of exhaust gas recirculation based on the detected running condition; 25
 - controlling the amount of exhaust gas recirculation based on the target amount;
 - detecting whether knocking has occurred in the engine (1); 30
 - computing a delay amount for delaying the ignition timing of the engine (1) based on the outcome of knock detection step; and
 - delaying the ignition timing by the delay amount; the method **characterized by** the step of 35
 - reducing the amount of exhaust gas recirculation in accordance with the delay amount. 40
5. The method according to claim 4, further comprising a step of detecting the number of rotations of the engine (1) per unit time, wherein the step of reducing the amount of exhaust gas recirculation is performed when the number of rotations of the engine (1) per unit time exceeds a predetermined reference value. 45
6. The method according to claim 5, wherein the step of reducing the amount of exhaust gas recirculation includes the step of further reducing the amount of exhaust gas recirculation more as the ignition timing is further. 50

55

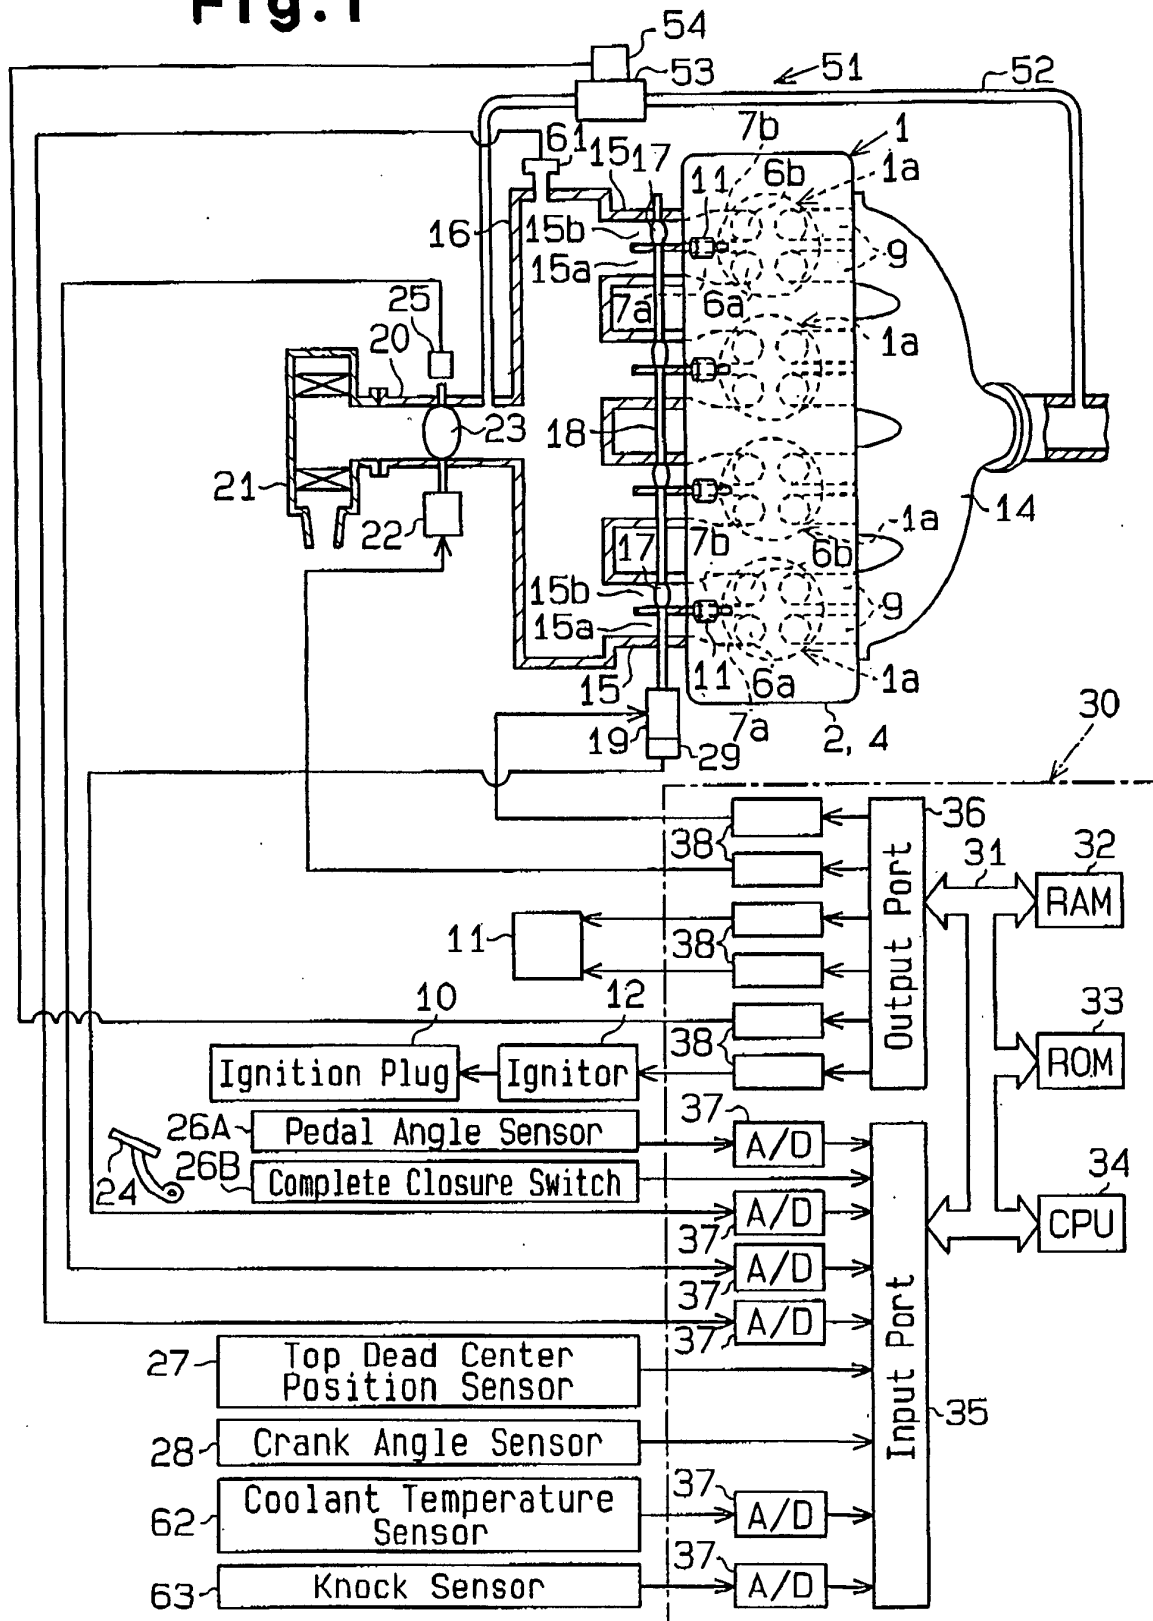
Fig.1

Fig.2

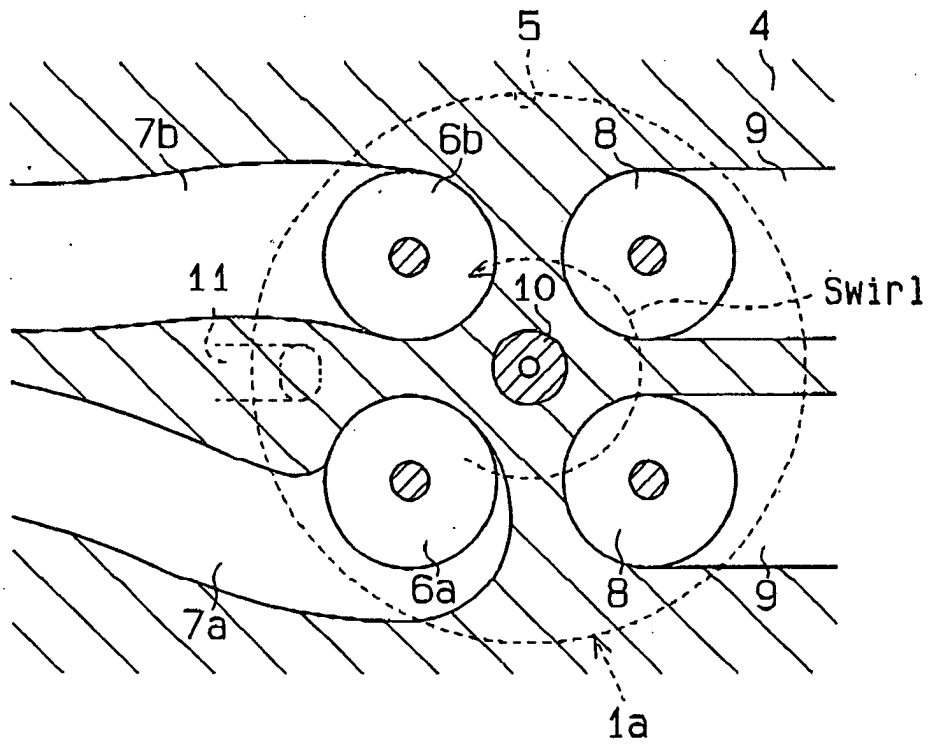


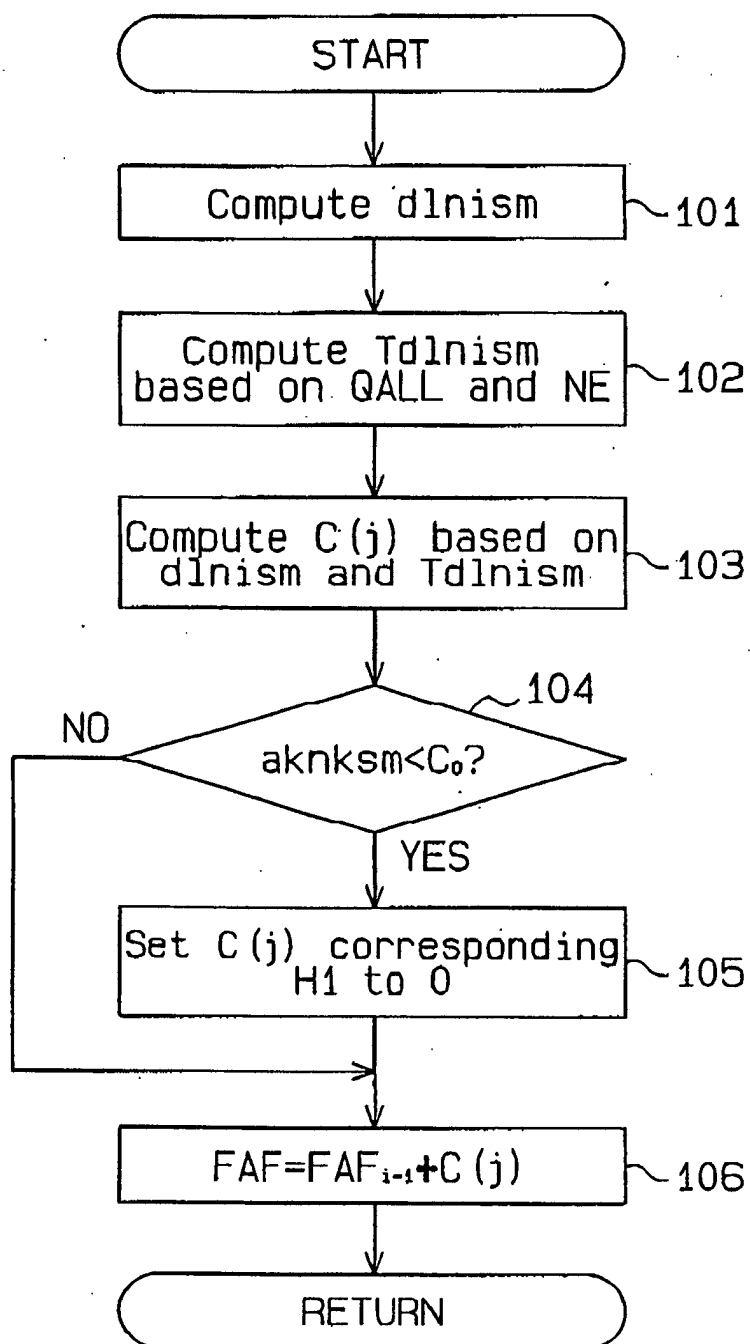
Fig.3

Fig.4(a)

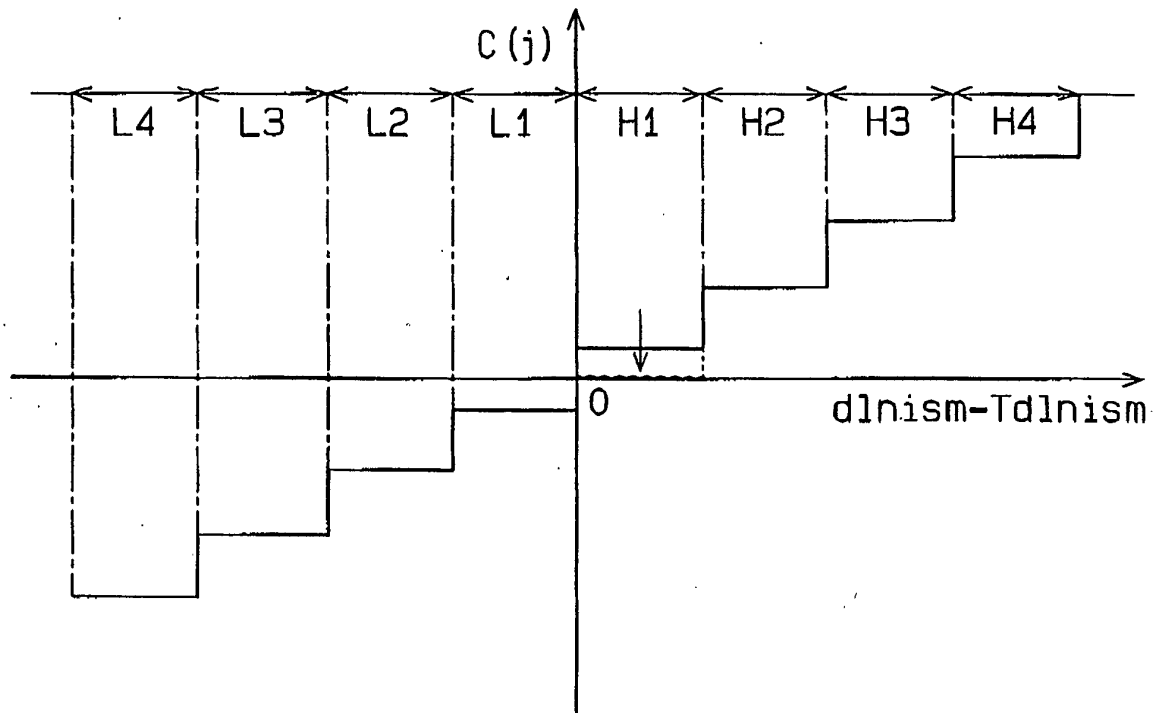


Fig.4(b)

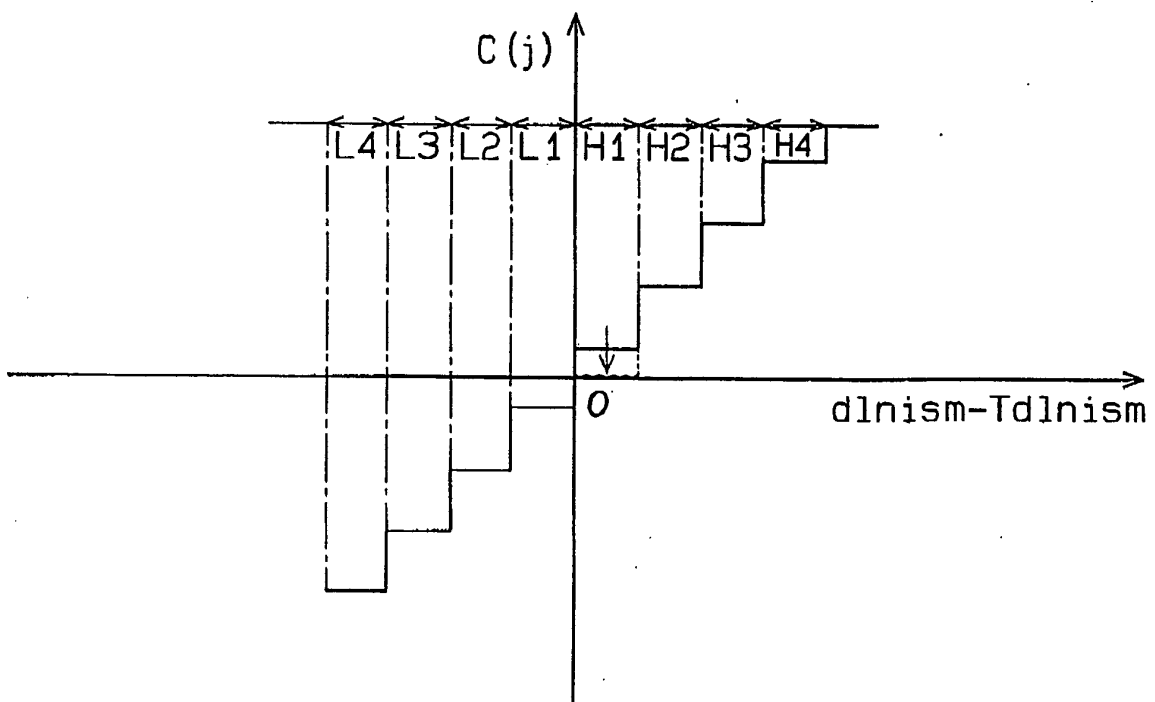


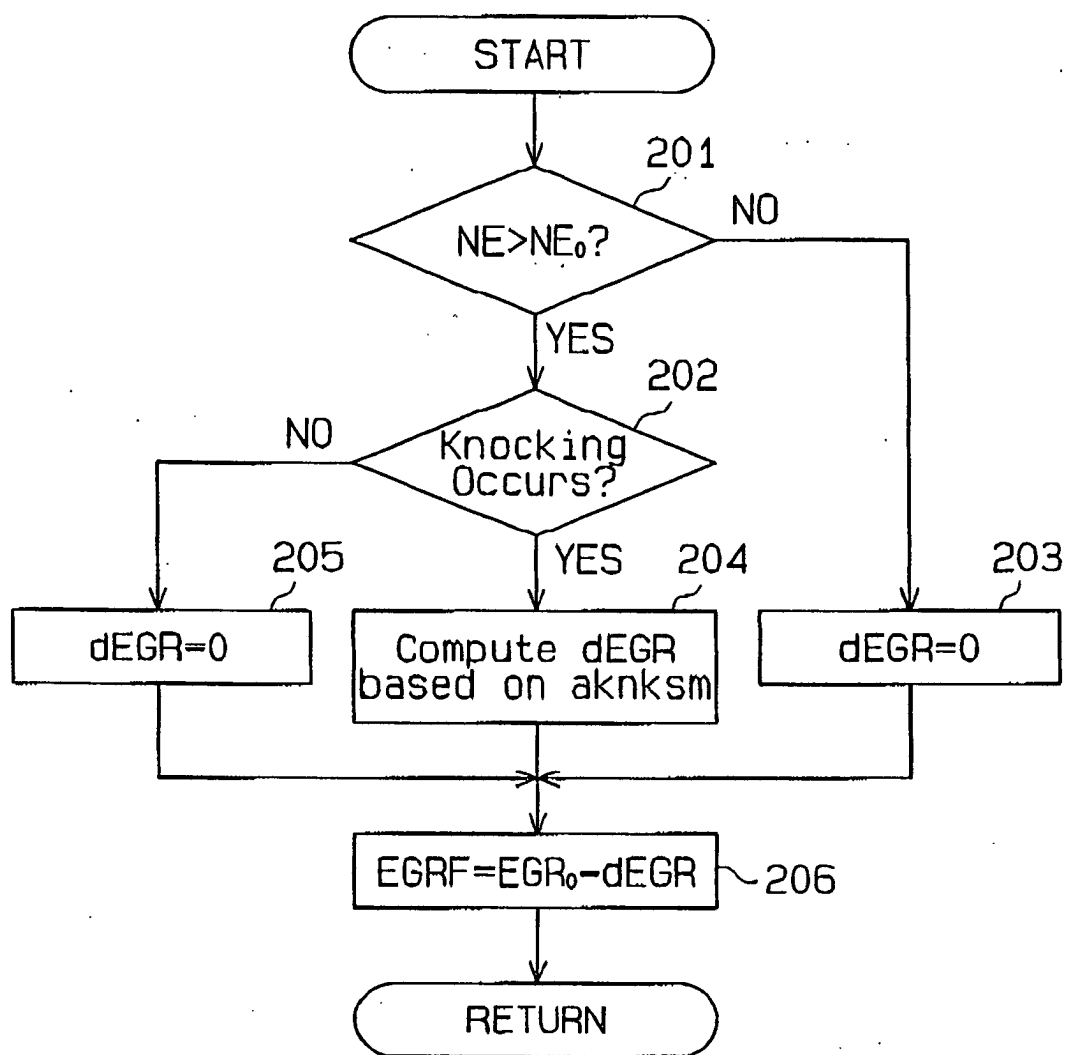
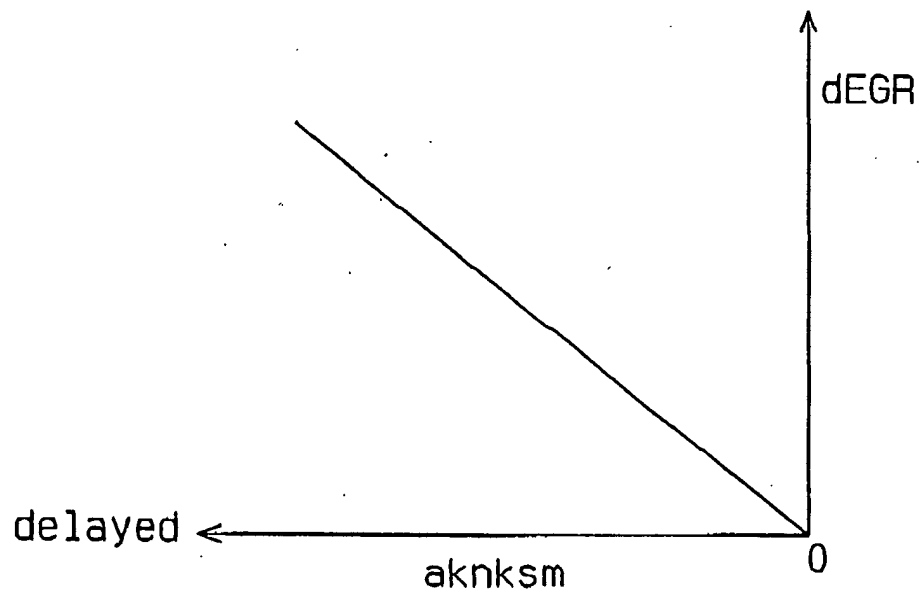
Fig.5

Fig. 6





European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 02 8497

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 5 577 476 A (IYODA HISAO) 26 November 1996 (1996-11-26) * abstract * * claims 1-8 *	1-6	F02P5/152 F02D41/14
Y	PATENT ABSTRACTS OF JAPAN vol. 018, no. 164 (M-1579), 18 March 1994 (1994-03-18) & JP 05 332186 A (TOYOTA MOTOR CORP), 14 December 1993 (1993-12-14) * abstract *	1-6	
A	US 4 344 400 A (ASANO MASA HARU) 17 August 1982 (1982-08-17) * abstract * * figures 1,2,7 * * column 1, line 59 - column 2, line 15 * * claim 1 *	1,4	
A	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 01, 28 February 1995 (1995-02-28) & JP 06 300875 A (MITSUBISHI HEAVY IND LTD), 28 October 1994 (1994-10-28) * abstract *	1,4	TECHNICAL FIELDS SEARCHED (Int.Cl.7) F02D F02P
A	PATENT ABSTRACTS OF JAPAN vol. 011, no. 278 (M-623), 9 September 1987 (1987-09-09) & JP 62 078480 A (NISSAN MOTOR CO LTD), 10 April 1987 (1987-04-10) * abstract *	1,4	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29 January 2003	Examiner Trotureau, D
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 02 8497

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-01-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5577476	A	26-11-1996	JP	3331789 B2	07-10-2002
			JP	8151971 A	11-06-1996
JP 05332186	A	14-12-1993	JP	3018740 B2	13-03-2000
US 4344400	A	17-08-1982	JP	1273876 C	11-07-1985
			JP	56020764 A	26-02-1981
			JP	59051675 B	15-12-1984
			DE	3028940 A1	05-02-1981
			GB	2055426 A , B	04-03-1981
JP 06300875	A	28-10-1994	NONE		
JP 62078480	A	10-04-1987	NONE		

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82