




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B32B 27/12, B65D 90/04	A1	(11) International Publication Number: WO 00/32394 (43) International Publication Date: 8 June 2000 (08.06.00)
(21) International Application Number: PCT/IE99/00121 (22) International Filing Date: 30 November 1999 (30.11.99) (30) Priority Data: 980996 1 December 1998 (01.12.98) IE (71) Applicant (for all designated States except US): NEW LAKE INTERNATIONAL LIMITED [IE/IE]; c/o Woods Sweetman & Co., Bridge Street, Balbriggan, County Dublin (IE). (72) Inventor; and (75) Inventor/Applicant (for US only): FITZGERALD, Fergus, Rupert [IE/IE]; 330 Marina Village, Malahide, County Dublin (IE). (74) Agents: O'BRIEN, John, A. et al.; John A O'Brien & Associates, Duncairn House, Third floor, 14 Carysfort Avenue, Blackrock, County Dublin (IE).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: TANK LINING

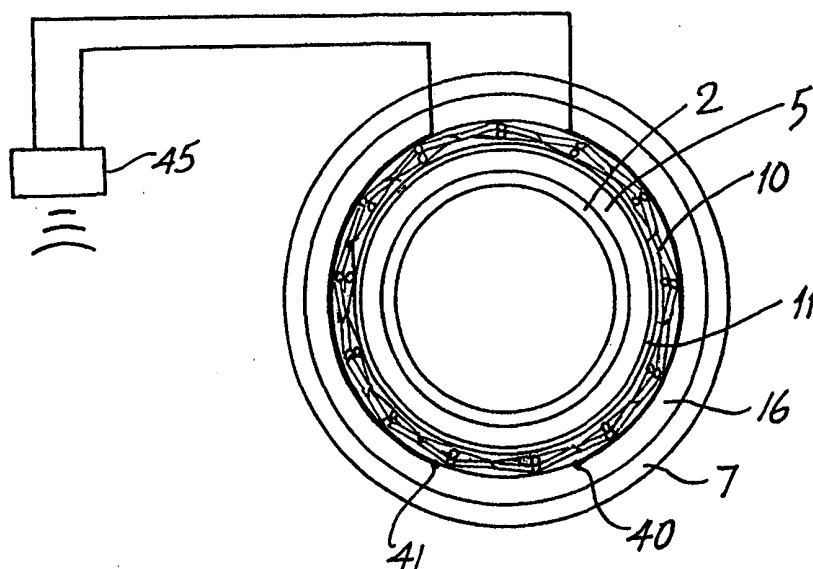

(57) Abstract

An underground storage tank (1) is lined in situ by first clearing the inner surface of the tank using water jetting. The surface is then inspected and grit blasted. A corrosion barrier coating (16) in the form of glassflake epoxy resin is applied to a minimum dry film thickness of 1000 microns. An adhesive is applied to the barrier coating (16) and sheets of an HDPE interstitial grid (10) are bonded to the adhesive forming an air gap of about 5 mm. A pliable glass reinforced plastic layer (15) is laid upon the grid (10). The GRP material is exposed to UV lamps to form an impermeable shell within the tank. A surface coating layer (2) may be applied. A leak detector (40, 41) is installed in the interstitial space defined by the grid (10).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

“TANK LINING”Introduction

5 The invention relates to a method for lining a storage tank, especially underground storage tanks for petroleum products and chemicals generally.

Storage tanks are widely installed underground for a range of different uses. One of the most widely used tanks of this type are underground storage tanks installed at petroleum products facilities such as filling stations. Generally, such tanks are of steel and degrade over time leading to leakages. Valuable product is lost through such leakages however, more importantly serious environmental problems result with leakages into the water table and the like. Damaged tanks therefore cause serious environmental problems. In addition, the replacement of such tanks is extremely expensive as major excavation work is required to remove and replace the tank. In the case of a filling station there are also major costs involved in closure of the station while lengthy works are carried out. In addition, in the event of closure it is often the case that an even more expensive station reconstruction is carried out to attract back customers who have moved to other stations while the work is being carried out. This leads to yet further costs.

There is therefore a need for tank lining system which will at least alleviate some of these serious problems. This invention is directed towards providing such a tank lining system.

Statements of the Invention

According to the invention there is provided a method of lining a storage tank comprising the steps of: -

providing a keying means on the inner surface of the tank;

- 2 -

applying a corrosion barrier coating to the keying means;

applying an interstitial grid to the tank;

5

laying up a pliable glass reinforced plastics material onto the grid; and

exposing the glass reinforced plastics material to ultra violet rays to cure the material and form a hardened inner liner shell for the tank.

10

In a preferred embodiment of the invention the interstitial grid is provided by pre-formed sheets of flexible material.

Preferably the grid is bonded, typically adhesively to the corrosion barrier coating.

15

Ideally the grid has a facing material applied to receive the glass reinforced plastics material. Preferably the facing is a polyester mat bonded to the grid, typically to one side of the grid.

20

In a preferred arrangement the grid is of a plastics material. In one case the grid is of high density polyethylene material.

In another embodiment at least portion of the grid is of a composite material.

25

In a further embodiment at least portion of the grid is of a mesh material. The mesh may be a metal mesh such as an aluminium mesh.

Preferably, for lining, the tank is divided into a number of zones, which are separately lined.

30

- 3 -

In this case preferably the final zone to be lined is adjacent a manway into the tank.

5 In one embodiment of the invention the sheets of pliable glass reinforced plastics material are applied to the grid in sections, the marginal edges of the sections being butt jointed. In this case preferably, the joints between adjacent sheets are covered with a GRP tape.

10 In one embodiment of the invention the method includes the step of: -
applying a coating to the hardened GRP liner.

15 Preferably the keying means is provided by grit blasting the inner surface of the tank.

In one embodiment of the invention the method includes the step of: -
cleaning the inner surface of the tank prior to providing the keying means.

20 In a preferred embodiment the inner surface is cleaned by water jet cleaning.

Preferably the corrosion barrier is a glassflake epoxy resin.

25 Preferably the corrosion barrier layer is applied to a dry film thickness of greater than 1000 microns.

In one embodiment of the invention the method includes the steps, prior to application of a corrosion layer of: -

30 inspecting the internal wall of the tank; and

repairing any imperfections in the tank wall.

Preferably the GRP is exposed to UV by directing UV lamps at the GRP layer.

- 5 In a preferred arrangement the GRP material is covered with an outer protective film which is removed to expose the GRP material to UV. Preferably the coating is a glassflake epoxy resin.

- 10 In one embodiment of the invention the tank is an underground liquid storage tank.

Preferably the method includes the step of controlling the environment in the tank, during lining.

- 15 In a preferred embodiment of the invention the temperature within the tank is maintained at a minimum target temperature of 15°C.

Preferably the relative humidity is maintained at less than 80% during lining. Ideally the relative humidity is maintained at from 50% to 60%.

- 20 The invention also provides a tank whenever lined by a method of the invention.

- 25 In a preferred aspect the invention provides a tank having a tank wall, keying means on the inner surface of the tank wall, a corrosion barrier coating applied to the keying means, an interstitial grid applied to the tank, UV cured glass fibre reinforced material laid onto the grid forming a hardened inner liner shell for the tank.

- 30 Preferably the tank includes a leak monitoring transducer in the interstitial space defined by the grid. Alternatively or additionally the tank includes a vapour

- 5 -

monitoring means in the interstitial space. The vapour monitoring means generally includes a vapour sampling tube.

5 In a preferred embodiment the tank includes an alarm means associated with the monitoring means. The alarm is preferably mounted remote from the tank.

Brief Description of Drawings

10 The invention will be more clearly understood from the following description thereof given by way of example only with reference to the accompanying drawings, in which: -

15 Fig. 1 is a perspective partially cut-away view of a typical tank to be lined using the method of the invention;

Fig. 2 is a perspective partially cross sectional view of a tank lined by the method of the invention;

20 Fig. 3 is a perspective view of an interstitial grid used in the invention;

Fig. 3a is a cross sectional view on the line A-A in Fig. 3;

Fig. 4 is a diagrammatic cross section view of the tank being lined;

25

Fig. 5 is a diagrammatic perspective view illustrating a joint used in the lining procedure;

Fig. 5a is a partial cross sectional view of the joint illustrated in Fig. 5; and

30

Fig. 6 is a diagrammatic transverse cross sectional view of the lined tank in use.

Detailed Description

5

Referring to the drawings there is illustrated in Fig. 1 a typical underground tank 1 for storage of petroleum products and chemicals generally. The tank 1 may, for example, be an underground petroleum products storage tank located at a service or filling station and comprises a main cylindrical body 20 with domed ends 21. The tank 1 typically has a generally centrally disposed manway 23.

10

The storage tank 1 is lined in situ by accessing the tank 1 through the manway 23. The inner surface 7 of the tank wall is first cleaned using water jetting to remove scale, rust and surface contaminants. The tank internal wall is then inspected to ascertain any leak areas or perforations. A full inspection of the tank is carried out using an ultrasonic wall thickness gauge to establish any internal/external corrosion patterns. Any resultant defects are repaired using an epoxy filler. Where necessary the striker plate, which is a steel plate below the manway 23, is removed. Weld spatters, laminations etc may be removed by grinding.

15

20

A keying means is then provided on the inner surface 7 of the tank 1. This is achieved by grit blasting using re-usable chilled iron grit.

25

A corrosion barrier coating 16 is then applied to the keying means. The coating 16 is a glassflake epoxy resin which is applied to a minimum dry film thickness of 1000 microns, typically using airless spray equipment. On completion of the corrosion barrier the integrity of the barrier is tested to identify any pinholes on the lining substrate.

30

An adhesive is applied to the corrosion barrier coating 16. Sheets of high density polyethylene (HDPE) interstitial grid 10 are bonded to an adhesive applied to the

- 7 -

coating 16, forming an air gap which is typically about 5 mm. The grid 10 has a polyester mat 11 bonded to one side and the grid 10 is installed with the mat 11 facing into the tank.

5 The grid 10 may be of any suitable mouldable/flexible material capable of substantially following the contours of the tank to be lined. The grid may be of a metallic mesh such as an aluminium mesh. The grid may also be of a suitable composite material. It may also be coated. Different grids may be applied at
10 different locations. The construction of the grids provides an interstitial space between the inner and outer walls of the lined tank in which any vapour and/or liquid leakage is retained and detected.

A pliable glass reinforced plastics layer, preferably of GRP material is applied to the grid. The GRP is an ultra violet (UV) light curable material in a sheet form.
15 A matrix of isophthalic resin, e-type glass reinforcement, inert fillers and a photo-initiator is sandwiched between two nylon films. The nylon films minimise emissions and facilitate handling and shaping. A further protective film to protect against daylight exposure is provided.

20 The GRP material has a styrene content of approximately 6% which substantially reduces emissions of volatile organics from the product. One such material is available under the brand Fibertech from Pomona International Limited trading as Fibertech of Ireland.

25 The GRP material is first cut to size from a roll. The inner protective film is removed and the GRP is applied to the prepared surface. The GRP material is smoothed and moulded to form an internal tank shell. Adjacent sheets 30, 31 of the GRP material is preferably butt jointed as illustrated in Fig. 5 and the joint 32 is covered by a tape of the same GRP material.

30

- 8 -

The outer UV protective layer is then removed from the GRP layer which is exposed to UV rays to cure the material and to form a hardened inner liner shell for the tank. In the case of an underground tank the GRP material is exposed to high powered UV lamps until it has fully cured resulting in a strong impermeable and hygienic shell within the tank 1. The curing time is generally a maximum of 60 minutes and is usually less than 30 minutes.

To assist uniform adhesion of the GRP material to the grid 10 an internal pressure is generally applied to the tank during curing. The applied pressure is typically 2 bar.

For efficient and safe lining of the tank, the tank is lined in three separate stages. Referring to Fig. 4, for lining, the tank is divided into three zones 25, 26, 27, two 25, 26 at the ends 21 and one 27 between the end zones 25 and 26 and adjacent the manway 23. In the lining procedure the first zone 25 is first lined as described above. The vessel tank is evacuated through the manway 23 for curing this zone 25. This procedure is repeated for the second zone 26. The mid-zone 27 is then lined and cured. This division of the tank into zones for lining optimises the lining procedure while ensuring safety of the lining operators

A suitable coating layer 2 may then be applied to the cured GRP layer 5. Preferably the barrier coating 2 is a glassflake epoxy which is applied to a minimum dry film thickness of 1000 microns using airless spray equipment.

An ultrasonic leak monitoring transducer 40 is installed in the interstitial space defined by the grid 10 at lower section of the tank. A vapour monitor sampling tube 41 is also installed in the interstitial space at the lower section of the tank.

All cables and the sampling tube are fed through a predrilled aperture, adjacent to the tank manway flange, the cables and sampling tube are bedded in Epoxy and shrouded with strips of the GRP material described above.

5 The transducer 40 and vapour monitor sampling tube 41 are connected to a control box 45, located in a designated safe area. An audible and/or visual alarm are connected to the control box 45. Should liquid or vapour be detected within the interstitial space a signal is sent to the control box 45 which will set off both audible and visual alarms. On the initiation of the alarm an auto-time counter will begin to record the detection period.

10 Conditions inside the tank are artificially controlled to maintain a target temperature (minimum) 15°C throughout the application. A relative humidity 50%-60% average (maximum 80%) is also maintained. On completion of various stages, temperature will be elevated to +30°C to accelerate cure.

15 Environmental readings are taken every four hours. These readings will consist of air temperature, surface temperature, percentage relative humidity and dew point. Results are recorded and monitored.

20 On completion of the lining the new tank shell is pressure tested in accordance with BS 4994 : 1987 Specification for design and construction of vessels and tanks in reinforced plastics.

The invention provides a method of tank lining which is extremely effective and efficient both in terms of material costs and installation costs.

25 Many variations on the specific embodiment of the invention will be readily apparent and accordingly the invention is not limited to the embodiments hereinbefore described which may be varied in construction and detail.

Claims

1. A method of lining a storage tank comprising the steps of: -

5 providing a keying means on the inner surface of the tank;

 applying a corrosion barrier coating to the keying means;

 applying an interstitial grid to the tank;
10 laying up a pliable glass reinforced plastics material onto the grid;
 and

 exposing the glass reinforced plastics material to ultra violet rays to
15 cure the material and form a hardened inner liner shell for the tank.

2. A method as claimed in claim 1 wherein the interstitial grid is provided by pre-formed sheets of flexible material.

20 3. A method as claimed in claim 1 or 2 wherein the grid is adhesively bonded to the corrosion barrier coating.

4. A method as claimed in any preceding claim wherein the grid has a facing material applied to receive the glass reinforced plastics material.

25 5. A method as claimed in claim 4 wherein the facing is a polyester mat bonded to one side of the grid.

30 6. A method as claimed in any preceding claim wherein at least portion of the grid is of a plastics material.

- 11 -

7. A method as claimed in any of claims 1 to 6 wherein at least portion of the grid is of a composite material.
- 5 8. A method as claimed in any of claims 1 to 5 wherein at least portion of the grid is of a mesh material.
9. A method as claimed in claim 8 wherein the mesh is a metal mesh.
- 10 10. A method as claimed in claim 9 wherein the mesh is an aluminium mesh.
11. A method as claimed in claim 6 wherein the grid is of high density polyethylene material.
- 15 12. A method as claimed in any preceding claim wherein, for lining, the tank is divided into a number of zones, which are separately lined.
13. A method as claimed in claim 12 wherein the final zone to be lined is adjacent a manway into the tank.
- 20 14. A method as claimed in any of claims 2 to 13 wherein the sheets of pliable glass reinforced plastics material applied to the grid in section, the marginal edges of the sections being butt jointed.
- 25 15. A method as claimed in claim 14 wherein the joints between adjacent sheets are covered with a GRP tape.
16. A method as claimed in any preceding claim including the step of: -
applying a coating to the hardened GRP liner.

- 12 -

17. A method as claimed in any preceding claim wherein the keying means is provided by grit blasting the inner surface of the tank.

18. A method as claimed in any preceding claim including the step of: -

5

cleaning the inner surface of the tank prior to providing the keying means.

19. A method as claimed in claim 18 wherein the inner surface is cleaned by water jet cleaning.

10

20. A method as claimed in any preceding claim wherein the corrosion barrier is a glassflake epoxy resin.

21. A method as claimed in claim 20 wherein the corrosion barrier layer is applied to a dry film thickness of greater than 1000 microns.

15

22. A method as claimed in any preceding claim including the steps, prior to application of a corrosion layer of: -

20

inspecting the internal wall of the tank; and

repairing any imperfections in the tank wall.

23. A method as claimed in any preceding claim wherein the GRP is exposed to UV by directing UV lamps at the GRP layer.

25



24. A method as claimed in any preceding claim wherein the GRP material is covered with an outer protective film which is removed to expose the GRP material to UV.

30

- 13 -

25. A method as claimed in any of claims 16 to 24 wherein the GRP coating is a glassflake epoxy resin.
- 5 26. A method as claimed in any preceding claim wherein the tank is an underground liquid storage tank.
27. A tank lining method substantially as hereinbefore described with reference to the accompanying drawings.
- 10 28. A tank whenever lined by a method as claimed in any preceding claim.
29. A tank as claimed in claim 28 having a tank wall, keying means on the inner surface of the tank wall, a corrosion barrier coating applied to the keying means, an interstitial grid applied to the tank, UV cured glass fibre reinforced material laid onto the grid forming a hardened inner liner shell for the tank.
- 15 30. A tank as claimed in claim 28 or 29 including a leak monitoring transducer in the interstitial space defined by the grid.
- 20 31. A tank as claimed in any of claims 28 to 30 including a vapour monitoring means in the interstitial space defined by the grid.
32. A tank as claimed in claim 31 wherein the vapour monitoring means includes a vapour sampling tube.
- 25 33. A tank as claimed in any of claims 30 to 32 including an alarm means associated with the monitoring means.
- 30 34. A tank as claimed in claim 33 wherein the alarm is mounted remote from the tank.

35. A tank substantially as hereinbefore described with reference to the accompanying drawings.

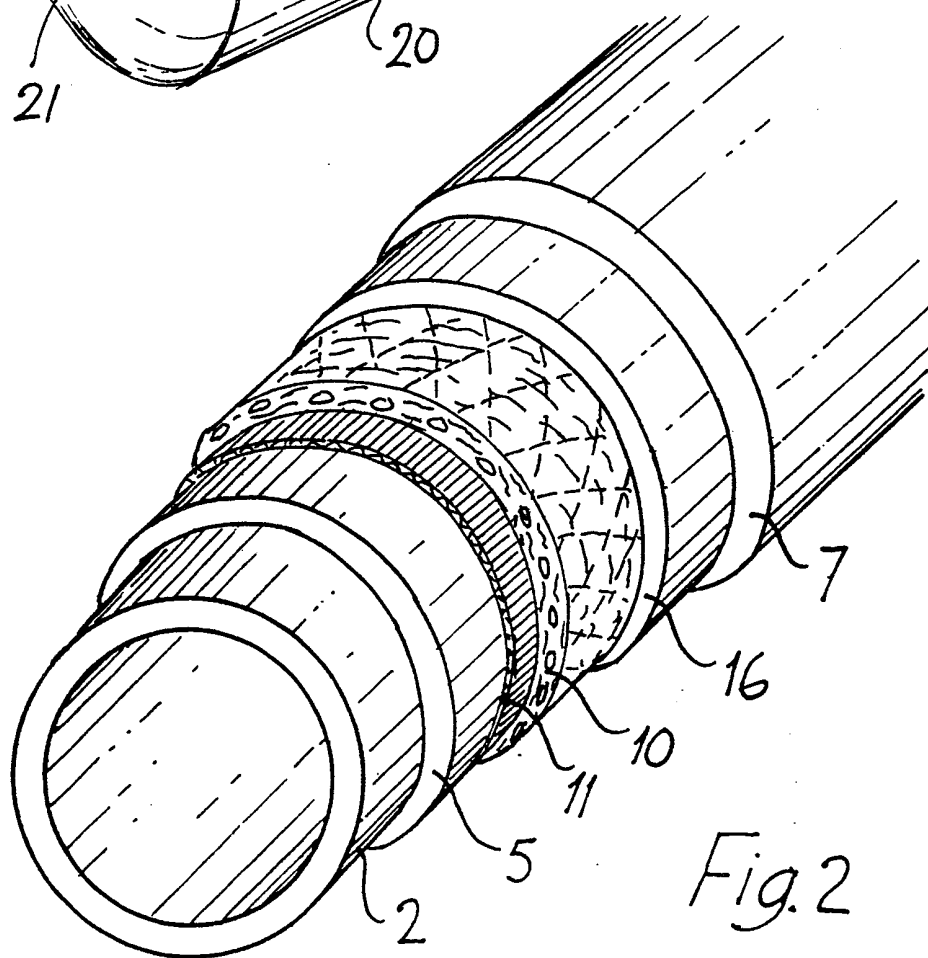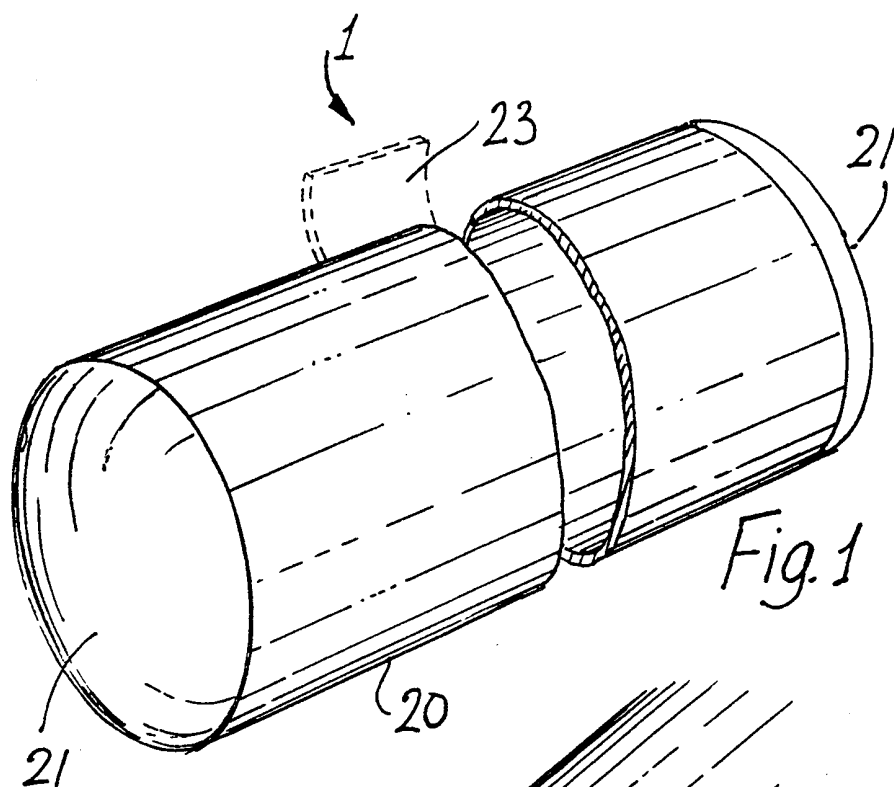

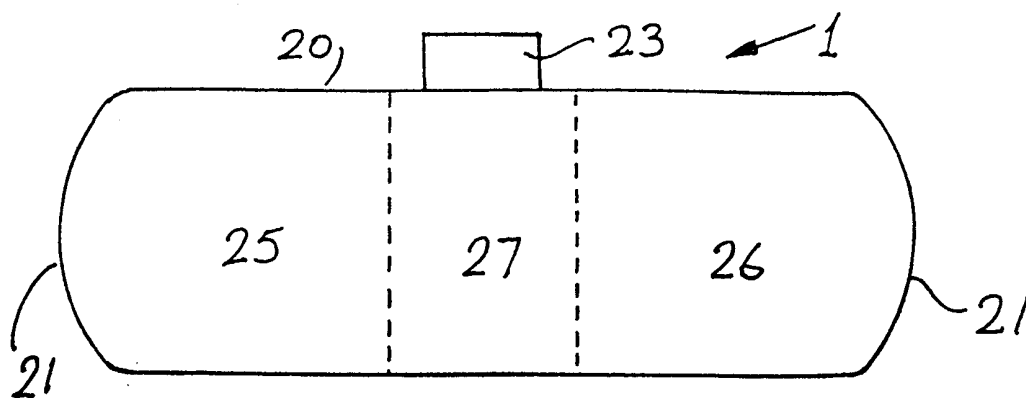


Fig. 4

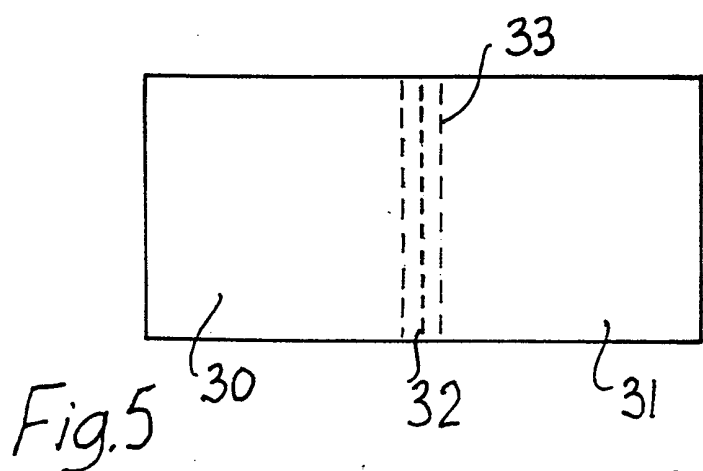


Fig. 5

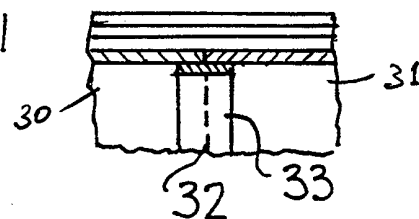


Fig. 5(a)

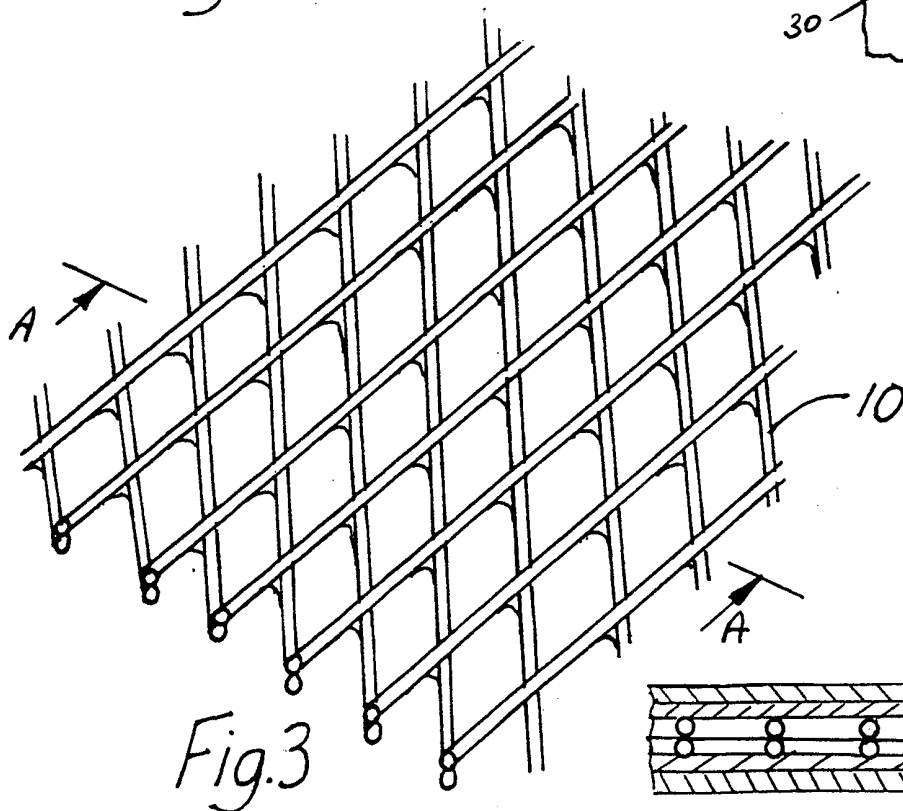


Fig. 3


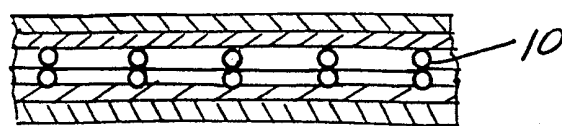


Fig. 3(a)

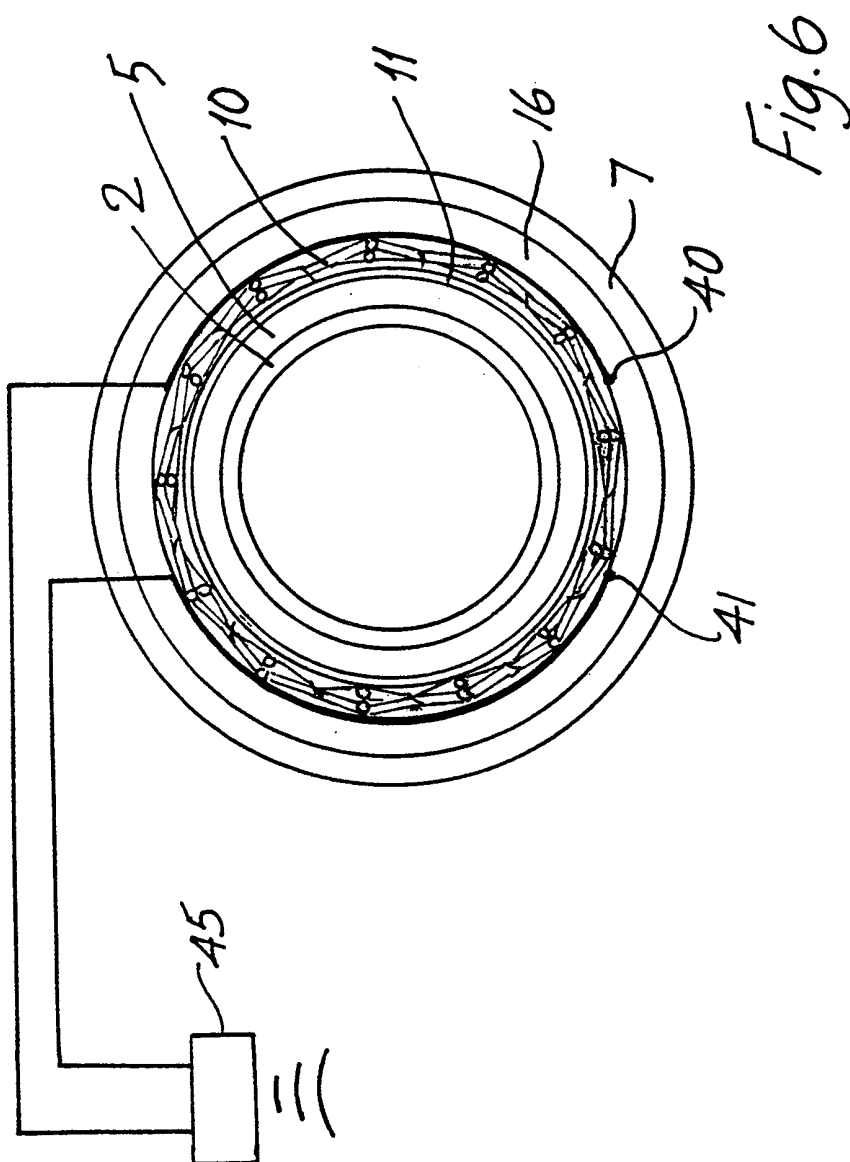

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IE 99/00121

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B32B27/12 B65D90/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 B32B B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 2 733 489 A (GALAN INCHAURBE JOSE MA JAVIER) 31 October 1996 (1996-10-31) claims; figures	1-29
A	EP 0 014 491 A (BORSARI & CO) 20 August 1980 (1980-08-20) page 7, line 16 -page 9, line 22; figures	1-29
A	CH 548 837 A (KUNSTSTOFFWERK AG) 15 May 1974 (1974-05-15) the whole document	1-35
A	CH 686 722 A (SIKA AG) 14 June 1996 (1996-06-14) the whole document	1-29
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 March 2000

Date of mailing of the international search report

13/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3018

Authorized officer

Ibarrola Torres, O

INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/IE 99/00121

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 164 293 A (MOTOPLAT) 19 March 1986 (1986-03-19) the whole document ---	1-29
A	DE 26 23 289 A (COMBUSTION ENG) 2 December 1976 (1976-12-02) the whole document ---	1-29
A	FR 2 391 834 A (MASSIMI PIERRE) 22 December 1978 (1978-12-22) the whole document ---	1-29
A	US 4 662 959 A (MORGAN HOWARD F) 5 May 1987 (1987-05-05) the whole document ---	1,17
A	DATABASE WPI Section Ch, Week 198304 Derwent Publications Ltd., London, GB; Class A21, AN 1983-08739K XP002132052 & JP 57 203544 A (KUBOTA LTD), 13 December 1982 (1982-12-13) abstract ---	1,17
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 025 (M-1542), 14 January 1994 (1994-01-14) & JP 05 261858 A (NIPPON STEEL CORP), 12 October 1993 (1993-10-12) abstract -----	1,17

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/IE 99/00121

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2733489	A	31-10-1996	NONE	
EP 0014491	A	20-08-1980	AT 907 T DE 2904578 A	15-05-1982 31-07-1980
CH 548837	A	15-05-1974	NONE	
CH 686722	A	14-06-1996	NONE	
GB 2164293	A	19-03-1986	NONE	
DE 2623289	A	02-12-1976	CA 1052302 A IN 143043 A JP 52035253 A ZA 7603073 A	10-04-1979 24-09-1977 17-03-1977 27-04-1977
FR 2391834	A	22-12-1978	NONE	
US 4662959	A	05-05-1987	NONE	
JP 57203544	A	13-12-1982	JP 1319182 C JP 60044144 B	29-05-1986 02-10-1985
JP 05261858	A	12-10-1993	NONE	