

(19) **DANMARK**

(10) **DK/EP 2771234 T3**



(12)

Oversættelse af europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **B 65 G 35/00 (2006.01)** **B 63 B 9/00 (2006.01)** **B 63 G 3/00 (2006.01)**
B 63 H 23/34 (2006.01)
- (45) Oversættelsen bekendtgjort den: **2019-03-25**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2019-02-13**
- (86) Europæisk ansøgning nr.: **12783262.4**
- (86) Europæisk indleveringsdag: **2012-10-19**
- (87) Den europæiske ansøgnings publiceringsdag: **2014-09-03**
- (86) International ansøgning nr.: **GB2012052590**
- (87) Internationalt publikationsnr.: **WO2013061034**
- (30) Prioritet: **2011-10-25 GB 201118378**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **BAE Systems PLC, , 6 Carlton Gardens, London SW1Y 5AD, Storbritannien**
- (72) Opfinder: **WATSON, Tobias, Jonathan, Surface Ships PDC 4th Floor, South Street, Scotstoun, Glasgow, Lanarkshire G14 0XN, Storbritannien**
HEATON, Leigh, Francis, Surface Ships 2nd Floor, COC East, Scotstoun, Glasgow, Lanarkshire G14 0XN, Storbritannien
BAIN, Fraser, Angus, Wet Basin Office, 1048 Govan Road, Govan, Glasgow, Lanarkshire G51 4XP, Storbritannien
FRASER, Steven, Martin, Surface Ships PDC 4th Floor, South Street, Scotstoun, Glasgow, Lanarkshire G14 0XN, Storbritannien
BLAIR, Graham, David, Surface Ships, Berth Office, 1048 Govan Road, Glasgow, Lanarkshire GU51 4XP, Storbritannien
HALLEY, Boyd, Surface Ships, 1048 Govan Road, Govan, Glasgow, Lanarkshire G51 4XP, Storbritannien
- (74) Fuldmægtig i Danmark: **Patrade A/S, Ceresbyen 75, 8000 Århus C, Danmark**
- (54) Benævnelse: **Indføring eller tilbagetrækning af et langstrakt element til eller fra et legeme**
- (56) Fremdragne publikationer:
WO-A1-91/04905
DE-A1- 3 704 343
GB-A- 2 151 190
JP-A- H06 312 685
US-A- 2 896 909
US-A- 2 940 769
US-A- 4 544 322
US-A- 4 692 087

Fortsættes ...

DESCRIPTION

[0001] This invention relates to the introduction or withdrawal of an elongate member to or from a free body. In particular, but not exclusively, the invention is concerned with moving a shaft into/out of an enclosed space, where the shaft has to be inserted along its longitudinal axis and traversed across bearings along the route, such as the introduction or withdrawal of a propeller shaft to or from a naval vessel.

[0002] Conventionally, when building large naval vessels such as the Queen Elizabeth, the propeller shaft is manoeuvred into position towards and through one or more bracket barrels by "chaining in", whereby the shaft is manoeuvred inch by inch whilst it is supported by cables slung from eyepads on the nearby surface of the ship's hull. To give an idea of scale, a typical ship's propeller shaft section will be 1 metre in diameter, 20 metres in length, and weigh approximately 40 tonnes. To chain in such a shaft is extremely labour-intensive and relies on chain blocking and manual weight transfer. Unlike most shore applications, where the shafting would be simply be craned into place from above, this approach is not possible with the ship because the installation of the shaft involves a complicated alignment process that is principally dependent on the completeness of the surrounding structure for its "foundation". In fact, the alignment process begins with the locating of the outboard bearings and before the shaft is installed, but it requires the hull form to be substantially complete.

[0003] In addition to requiring large amounts of manpower and taking a long time, there is also a risk of damage to the shaft as it is chained in, due to damage caused by the chain and/or misalignment of the shaft with associated bearing or support surfaces. Further, there are also health and safety risks associated with this conventional approach because the operatives are working close up to the shafting. If the shafting should suddenly lurch or drop then there is a significant risk of an operative getting trapped or injured.

[0004] It will be appreciated that there are other situations where space/location restrictions mean that no overhead lift for installing an elongate shaft, pipe or the like is possible; for example, when working in a cavern in the side of a hill, or specialist applications in the oil/gas, power generation and water industries.

[0005] JP 06312685 discloses a method and apparatus for moving an elongate member along a predetermined axis for the introduction or withdrawal thereof to or from a free body according to the preambles of claims 1 and 6.

[0006] We have therefore designed a method and apparatus which allows controlled sliding movement of the shaft along the installation axis and which can reduce the amount of chain blocking, manual weight transfer and the number of people required to be involved.

[0007] In one aspect, this invention provides a method of moving an elongate member along a predetermined axis for the introduction or withdrawal thereof to or from a free body according

to claim 1.

[0008] In this way the majority of the mass of the elongate member is supported on the support elements which may be slid along the guide surface so as to give continuous linear movement of the elongate member.

[0009] Said elongate guide surface comprises a straight load-supporting surface, and said support elements each comprise one or more load-supporting pads that engage and are slideable along said load-supporting surface.

[0010] Each load-supporting pad is conveniently made of low friction material, such as e.g. polytetrafluoroethylene (PTFE). The support elements are preferably constrained against transverse movement with respect to said load-supporting surface by suitable means, for example by spaced generally parallel side elements upstanding from opposite edges of said load-supporting surface, although other constraints may be used.

[0011] Preferably the effective height of the support elements is adjustable. The support elements are interconnected by tie elements to transmit a drive load there between. The tie elements are conveniently flexible.

[0012] Each support element preferably comprises a cradle portion upwardly open to receive and engage a portion of the elongate member when lowered in use. The support elements are dismantlable into parts whereby, when the elongate member is supported by a series of three or more support elements, one of said support elements of the series may be dismantled and removed to leave the elongate member still supported in alignment with said predetermined axis by the remaining support elements.

[0013] Although the method may be used to introduce or withdraw the elongate member to or from a bore which supports and encloses the adjacent portion of the elongate member, it is particularly useful for situations where a elongate member needs to be passed through and beyond a structural member, such as a propeller shaft bracket boss (or an "A bracket barrel"). Thus, where an end of the elongate member is caused to move towards and beyond an associated structural member in use the method may conveniently comprise:

causing said elongate member and said at least three support elements to move in the direction of said associated structural member until said one end of the elongate member is adjacent said associated structural member,

dismantling said leading support element leaving the elongate member supported at least partially by the remaining elements, and

causing further movement of said elongate member beyond said associated structural member. In some such cases part of the load may be supported by the associated structural member after dismantling of said leading support element.

[0014] Where the elongate member needs to be supported to the other side of the support bracket, the said elongate guide surface provided may extend beyond said associated structural member, and the method may further include the steps of:

reassembling said leading support element at a location beyond said associated structural member,

continuing movement of said elongate member until the next support element in the series approaches said associated structural member,

dismantling said next support element, and

further moving said elongate member, and

optionally repeating said moving, dismantling, moving and reassembling steps until the required support elements have been reassembled beyond said associated structural member.

[0015] The elongate member may comprise a propeller shaft and the free member may comprise a waterborne vessel, or at least the stern portion of a waterborne vessel. The waterborne vessel may in particular be a naval vessel, and the invention extends to a method of constructing a naval vessel comprising applying the above method.

[0016] The invention extends to apparatus for use in the method. Thus, in another aspect, the invention provides apparatus for moving an elongate member along a predetermined axis for the introduction or withdrawal thereof to or from a free body according to claim 6.

[0017] Whilst the invention has been described above, it extends to any inventive combination of features set out above in the following description, claims or drawings.

[0018] By way of example only, one specific embodiment of the invention will now be described by reference to the accompanying drawings, in which:

Figure 1 is a side view of the aft end of a naval vessel into which a propeller shaft is to be installed;

Figure 2 is a view of a system for slideably supporting a propeller shaft for movement along an installation axis;

Figure 3(a) is a detailed view of a cradle when assembled, and

Figure 3(b) is a detailed view on the underside of the foot of a cradle.

[0019] Referring initially to Figure 1, there is shown the stern portion 10 of a naval vessel 11 in which an elongate (i.e. the length of the shaft is greater than the span of the bearings (described below) provided for it) propeller shaft 12 is required to be aligned with an axis A-A, a few degrees below horizontal, and inserted along this axis. The shaft will normally be a single component, but in some cases can be formed of several components fixed together. The shaft passes through two "A" bracket barrels 14 aft of its emergence from the hull. An "A" bracket is a bracket that is attached to the side of the vessel and is so called because it is shaped like the letter "A", with the shaft running through a bearing that is placed inside a bearing boss (commonly known as a "barrel" in ship building because of its similarity in shape) located at the apex of the "A". In order to install the shaft, a platform structure is built comprising a number of support towers 16 which support a straight guide surface 18 parallel to, but spaced by a set distance from, the shaft centre line or installation axis A-A. The guide surface 18 and associated structure will be described in further detail in relation to the following figures. A cable winch 20 is disposed on the ground at the forward end of the platform structure with the cable 22 passing over a pulley 24 to then pass to the structure as to be described below.

[0020] Referring now to Figures 2, 3(a) and 3(b), the installation system comprises the guide surface 18 on which can slide a number of cradles 26, of which four are illustrated. The cradles 26 are interconnected by tie cables 28 with the forwardmost cradle being connected to the winch cable 22. As best seen in Figures 3(a) and (b), each cradle 26 has a lower portion 30 of rectangular form connected to a foot 32, on the underside of which are provided one or more (three in the example) load supporting, low-friction pads 34 (e.g. of PTFE). The guide surface 18 is provided with upstanding lateral constraint edges 19 which ensure that the cradle is constrained to move in the direction parallel to the installation axis. The upper part of the cradle 26 is provided with a dismantlable, rigid height adjustable wedge jack 33 which connects the box section 30 to a semi-circular cradle portion 40 designed to receive the shaft when lowered into it. The cradle portion has slots 42 or other suitable attachment means to allow a strap 44 to be applied in order to strap the shaft into the cradle. The wedge jacks may be eg Titan™ wedge jacks.

[0021] In addition to the cradles, the shaft may be supported by top steadies 46 (see Figure 2), e.g. of webbing. The top steadies function as a safety harness and are intended to receive the load quickly and safely if there is a failure in the mechanism. In this arrangement, the majority of the mass of the shaft is supported by the cradles. In use, the shaft is drawn along the installation direction by operating the winch 20 which moves cradles (four in the example) 26 and the supported shaft 12, via the winch cable 22 and the tie cables 28. The shaft 12 may be passed through the "A" bracket barrels 14 by moving the shaft and the cradle assemblies 26 towards the first "A" bracket barrel 14. As the first cradle assembly 26 approaches the first "A" bracket barrel 14, the associated wedge jacks 33 can be adjusted upwards or downwards to ensure alignment between the shaft and the bracket barrel. The jack and the box section 30 must then be removed to allow the shaft to pass through the bracket barrel. When a cradle assembly approaches, and is close to contact, the Titan™ jack is lowered to take that cradle assembly off load. The jack and the box section can then be unbolted and removed. This will allow the shaft - with semi circular cradle 40 still attached - to pass through the bracket barrel

unhindered when the winch 20 is used. When the shaft emerges from the bracket barrel, the procedure is reversed and the jack and the box section are reassembled to support the shaft and the winch 20 is applied again and the process repeated for each of the successive cradles.

[0022] It will be appreciated that the apparatus and method described above can be adapted to install and/or remove other types of elongate members, such as pipes in height-restricted locations.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP06312685B [0005]

PATENTKRAV

1. Fremgangsmåde til bevægelse af et langstrakt element (12) langs en forudbestemt akse (A-A) med henblik på indføring eller tilbagetrækning til eller fra et frit legeme (11), hvorved fremgangsmåden omfatter:

5

Tilvejebringelse af en platformstruktur, omfattende et antal støttetårne (16), som støtter en langstrakt føringsflade (18), der omfatter en flad, plan, last-understøttende flade, som strækker sig parallelt med den forudbestemte akse (A-A);

10

tilvejebringelse af et antal støtteelementer (26), der hvert omfatter mindst én last-understøttende pude (34), som under anvendelsen griber ind i og kan forskydes langs den flade, plane, last-understøttende overflade (18);

15

understøtning af det langstrakte element (12) på støtteelementerne (26) således, at mindst en større del af massen derved understøttes;

tilvejebringelse af et hejseværk (20) og et hejseværkskabel (22), som er fastgjort dertil;

bevirke, ved hjælp af hejseværkskablet, at det langstrakte element og støtteelementerne bevæges langs den forudbestemte akse;

20

hvorved støtteelementerne (26) kan afmonteres,

kendetegnet ved, at de last-understøttende puder (34) er af lavfriktionsmateriale, således at de på den langstrakte føringsflade (18) kan forskydes i en retning, der er parallel med den forudbestemte akse (A-A);

25

hvilken fremgangsmåde ydermere omfatter:

forbindelse af det forreste støtteelement (26) til hejseværkskablet (22);

forbindelse af støtteelementerne (26) til hinanden ved hjælp af fleksible og indstillelige båndelementer (28); og

30

afmontering af det forreste af støtteelementerne (26), hvorved det langstrakte element (12) forbliver understøttet, i det mindste delvist, af de resterende elementer (26), således at, når det langstrakte element (12) understøttes af en række med tre eller flere støtteelementer (26), et af støtteelementerne (26) i

rækken afmonteres, således at det langstrakte element (12) forbliver understøttet på linje med den forudbestemte akse (A-A) ved hjælp af de resterende støtteelementer (26).

- 5 2. Fremgangsmåde ifølge krav 1, hvorved støtteelementerne (26) forhindres i tværgående bevægelse i forhold til den last-understøttende overflade (18) ved hjælp af afstandsholdte, i hovedsagen parallelle, sideelementer (19), som er opretstående fra modstående kanter af den last-understøttende overflade (18).
- 10 3. Fremgangsmåde ifølge et hvilket som helst af de foregående krav, hvorved en ende af det langstrakte element (12) bringes til at bevæge sig hen imod og forbi et tilhørende strukturelement (10), og hvorved fremgangsmåden ydermere omfatter:
- 15 At bringe det langstrakte element (12) til at bevæge sig i retningen af det tilhørende strukturelement (10), indtil den ene ende grænser op til det tilhørende strukturelement (10);
- at afmontere et forreste støtteelement (26), hvorved det langstrakte element (12) forbliver understøttet af de resterende støtteelementer (26); og
- 20 at bevirke yderligere bevægelse af det langstrakte element (12) forbi det tilhørende strukturelement (10).
4. Fremgangsmåde ifølge krav 3, hvorved den langstrakte føringsflade (18) strækker sig forbi det tilhørende strukturelement (10), og fremgangsmåden ydermere omfatter trinnene:
- 25 Genmontering af det forreste støtteelement (26) på et sted på den anden side af det tilhørende strukturelement (10);
- videreførelse af bevægelse af det langstrakte element (12), indtil et næste støtteelement (26) nærmer sig det tilhørende strukturelement (10);
- 30 afmontering af det næste støtteelement (26);
- yderligere bevægelse af det langstrakte element (12), og

i givet fald, gentagelse af trinnene med bevægelse, afmontering, bevægelse og genmontering, indtil et forud indstillet antal af støtteelementerne (26) er blevet genmonteret på den anden side af det tilhørende strukturelement (10).

- 5 5. Fremgangsmåde ifølge et hvilket som helst af de foregående krav, hvorved det langstrakte element (12) omfatter en skrueaksel til et marinefartøj (11), og hvorved det fri legeme omfatter et marinefartøj (11) eller i det mindste agterstavns-afsnittet af et marinefartøj (11).
- 10 6. Apparat til bevægelse af et langstrakt element (12) langs en forudbestemt akse (A-A) med henblik på indføring eller tilbagetrækning deraf til eller fra et frit legeme (11), hvilket apparat omfatter:

15 En opbygget platformstruktur, omfattende et antal støttetårne (16), som understøtter en langstrakt føringsflade (18), der omfatter en flad, plan, last-understøttende flade, som strækker sig parallelt med den forudbestemte akse (A-A);

et antal støtteelementer (26), der hvert omfatter mindst én last-understøttende pude (34), som under anvendelsen griber ind i og kan forskydes langs den flade, plane, last-understøttende overflade (18),

20 hvilke støtteelementer (26) er indrettet til at modtage og understøtte mindst et største afsnit af det langstrakte elements (12) masse;

et hejseværk (20) med henblik på via et hejseværkskabel (22) at bevirke, at det langstrakte element (12) og støtteelementerne (26) bevæger sig langs den forudbestemte akse (A-A); og

25 hvorved

støtteelementerne (26) kan afmonteres, hvorved, når det langstrakte element (12) er understøttet af en række af tre eller flere støtteelementer (26), et af støtteelementerne (26) i rækken kan afmonteres, således at det langstrakte element (12) forbliver understøttet på linje med den forudbestemte akse (A-A) ved hjælp af de resterende støtteelementer (26);

30 **kendetegnet ved, at** de last-understøttende puder (34) er af materiale med lav friktion, således at de kan glide på føringsfladen (18) i en retning, som er parallel med den forudbestemte akse (A-A), og

støtteelementerne (26) er forbundet med hinanden ved hjælp af fleksible og indstillelige båndelementer (28) med det forreste støtteelement (26) forbundet til hejseværkskabet (22).

5

7. Apparat ifølge krav 6, hvorved hvert støtteelement (26) omfatter et antal last-understøttende puder (34).

10

8. Apparat ifølge krav 6, hvorved støtteelementerne (26) er forhindret i tværgående bevægelse i forhold til den last-understøttende overflade ved hjælp af indbyrdes afstandsholdte, i hovedsagen parallelle, sideelementer (19), der er opretstående fra modstående kanter af den last-understøttende overflade (18).

15

9. Apparat ifølge et hvilket som helst af kravene 6 til 8, hvorved hvert støtteelement (26) omfatter et vugge-afsnit (40), der er åbent opadtil med henblik på modtagelse af og indgreb med et afsnit af det langstrakte element (12), når det langstrakte element (12) under anvendelsen sænkes.

20

10. Apparat ifølge et hvilket som helst af kravene 6 til 9, hvorved støtteelementerne (26, 33) er højdeindstillelige.

25

11. Apparat ifølge et hvilket som helst af kravene 6 til 10, hvorved det langstrakte element (12) omfatter en skrueaksel, og det fri element omfatter et vandbåret fartøj (11).

DRAWINGS

Fig. 1

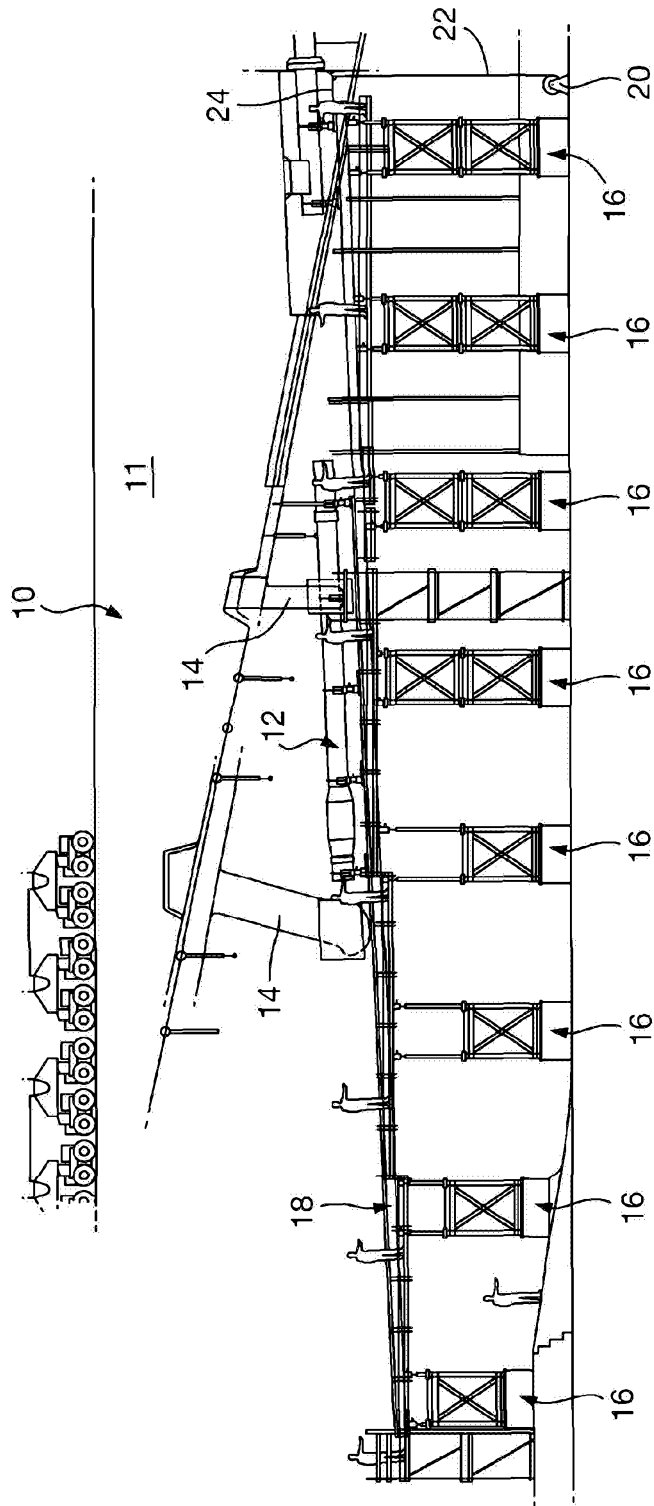


Fig. 2

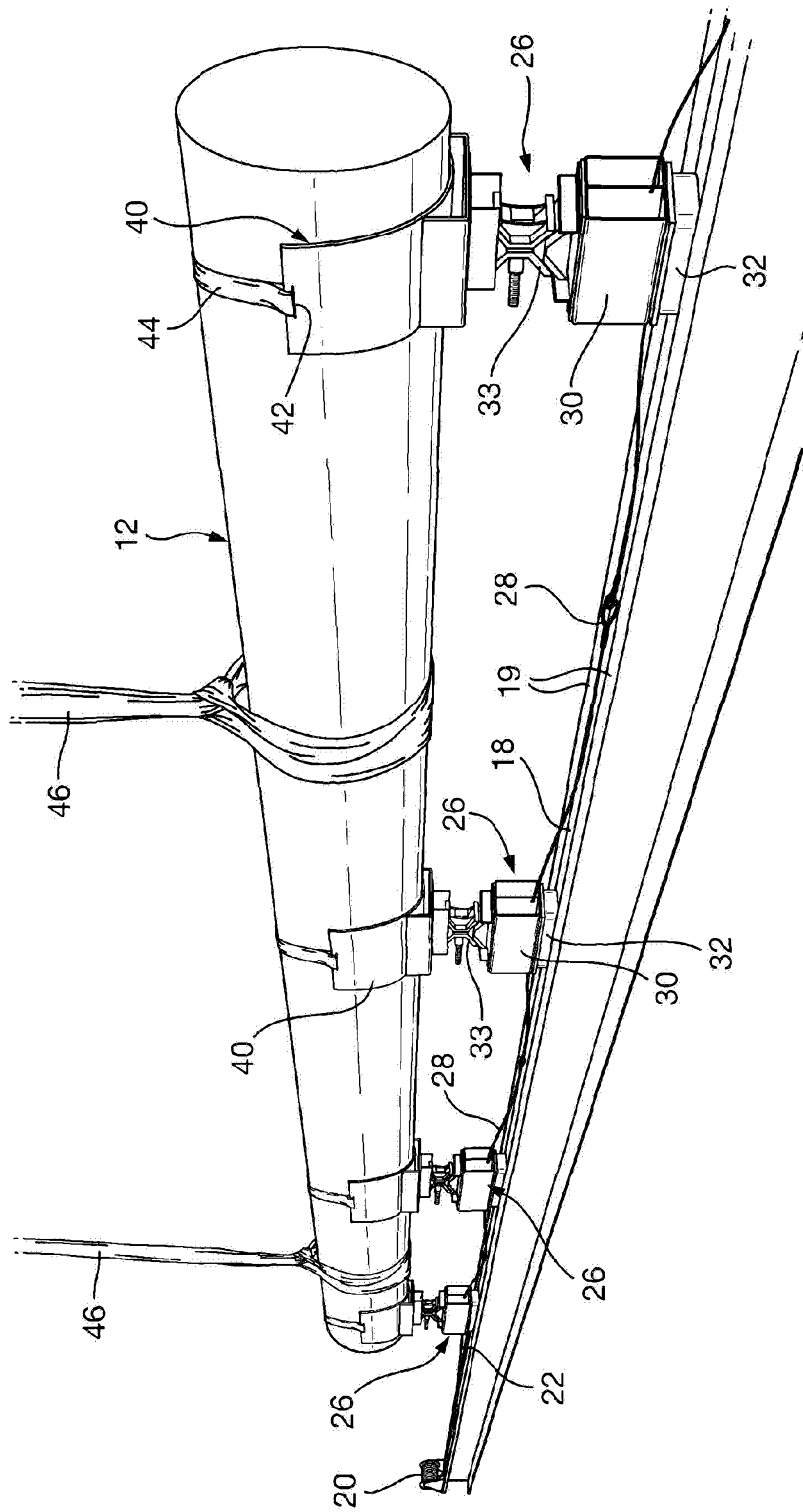


Fig. 3(a)

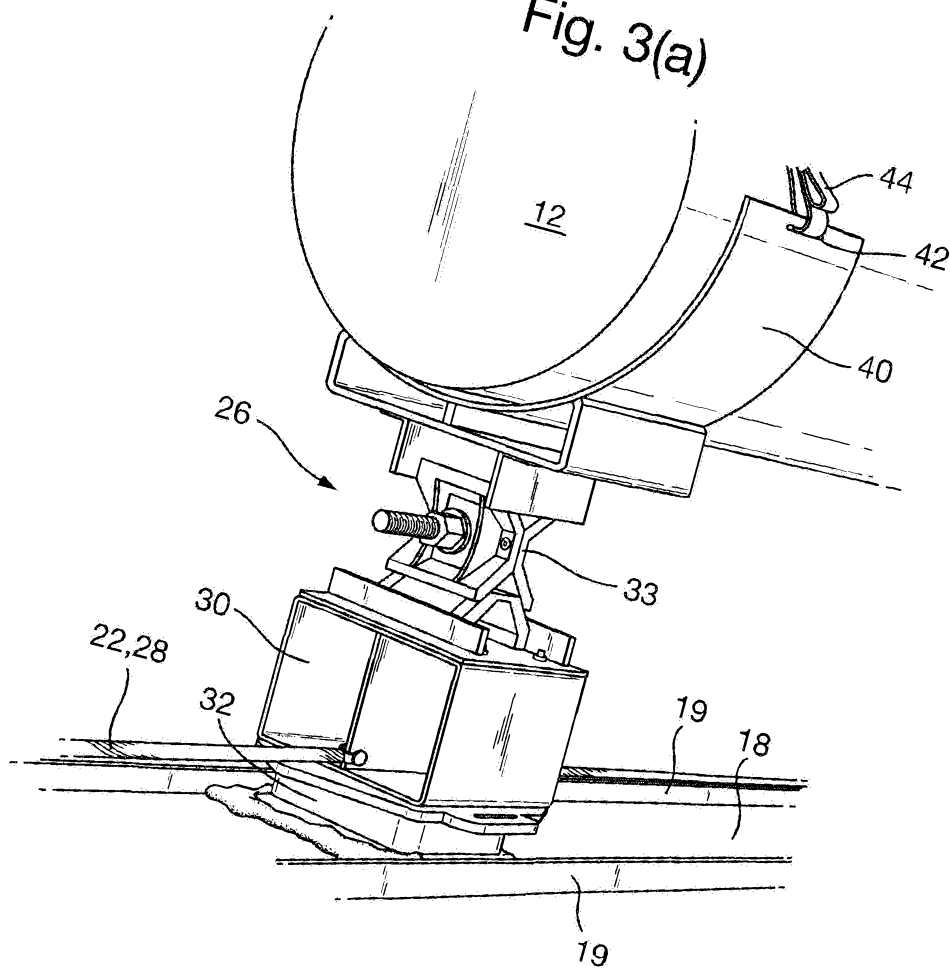


Fig. 3(b)

