


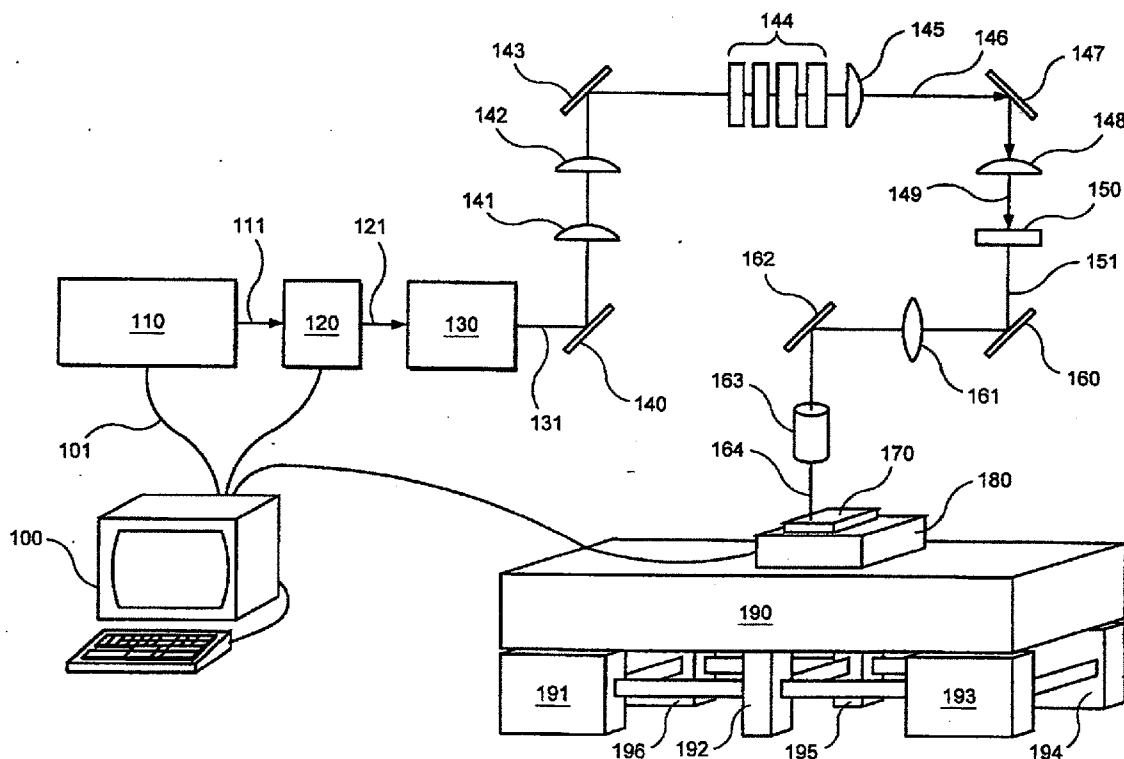


US 20130009074A1

(19) **United States**(12) **Patent Application Publication**
Im et al.(10) **Pub. No.: US 2013/0009074 A1**(43) **Pub. Date: Jan. 10, 2013**(54) **UNIFORM LARGE-GRAINED AND GRAIN
BOUNDARY LOCATION MANIPULATED
POLYCRYSTALLINE THIN FILM
SEMICONDUCTORS FORMED USING
SEQUENTIAL LATERAL SOLIDIFICATION
AND DEVICES FORMED THEREON**filed on May 28, 1996, which is a continuation-in-part
of application No. 09/200,533, filed on Nov. 27, 1998,
now Pat. No. 6,322,625.**Publication Classification**(51) **Int. Cl.**
H01L 21/268 (2006.01)
(52) **U.S. Cl.** **250/453.11**(76) Inventors: **James S. Im**, New York, NY (US);
Robert S. Sposili, New York, NY (US);
Mark A. Crowder, New York, NY (US)(21) Appl. No.: **13/596,693**(22) Filed: **Aug. 28, 2012****Related U.S. Application Data**(60) Division of application No. 12/567,414, filed on Sep.
25, 2009, now Pat. No. 8,278,659, which is a continu-
ation of application No. 12/419,821, filed on Apr. 7,
2009, which is a continuation of application No.
11/744,493, filed on May 4, 2007, now Pat. No. 7,679,
028, which is a division of application No. 11/141,815,
filed on Jun. 1, 2005, now Pat. No. 7,319,056, which is
a continuation of application No. 10/294,001, filed on
Nov. 13, 2002, now Pat. No. 7,029,996, which is a
continuation of application No. 09/390,535, filed on
Sep. 3, 1999, now Pat. No. 6,555,449, which is a con-
tinuation-in-part of application No. PCT/US96/07730,(57) **ABSTRACT**

Methods for processing an amorphous silicon thin film sample into a polycrystalline silicon thin film are disclosed. One method includes generating a sequence of excimer laser pulses, controllably modulating each pulse to a predetermined fluence, homogenizing each modulated pulse in a predetermined plane, masking portions of each homogenized pulse with a pattern of slits to generate a sequence of fluence controlled pulses of line patterned beamlets, each slit in the pattern of slits being sufficiently narrow to prevent inducement of significant nucleation in region of a silicon thin film sample irradiated by a beamlet corresponding to the slit, irradiating an amorphous silicon thin film sample with the sequence of fluence controlled slit patterned beamlets to effect melting of portions corresponding to each fluence controlled patterned beamlet pulse, and controllably sequentially translating a relative position of the sample with respect to each of the fluence controlled pulse of slit patterned beamlets.



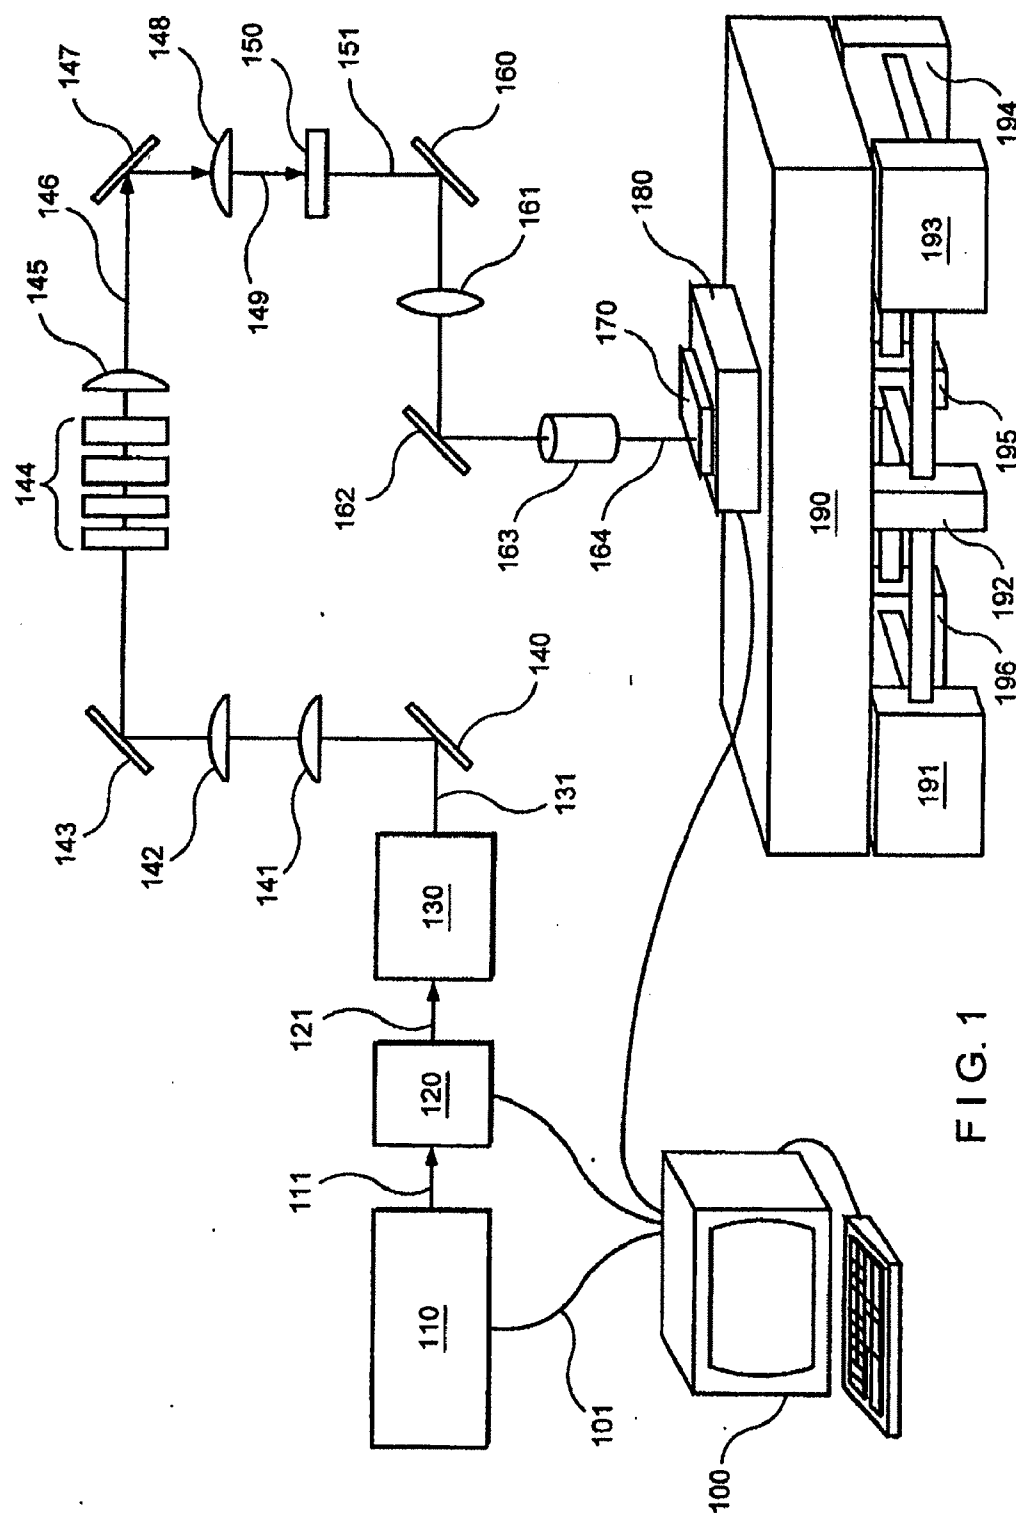

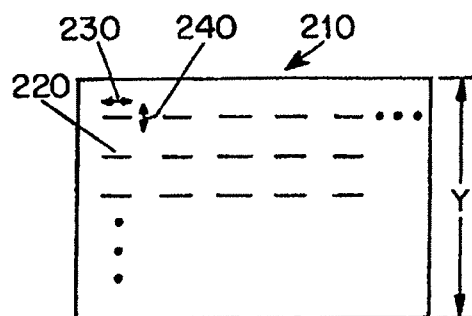


FIG. 2A

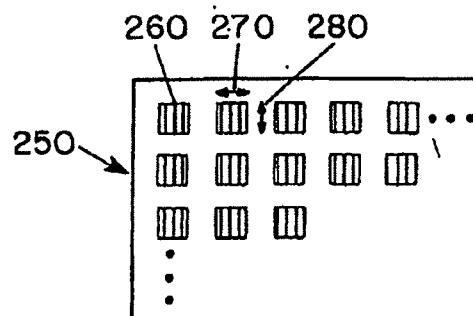


FIG. 2B

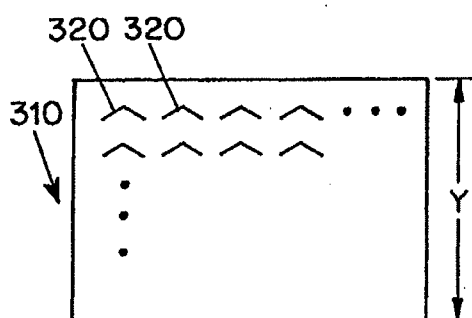


FIG. 3A

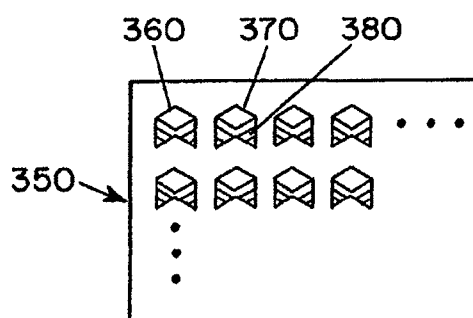


FIG. 3B

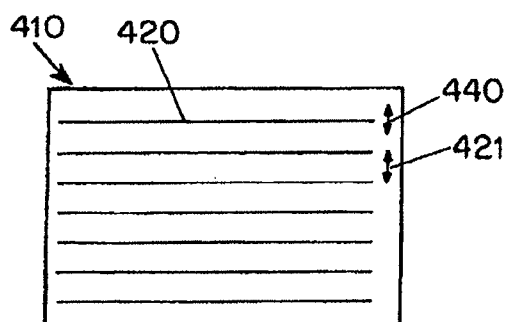


FIG. 4A

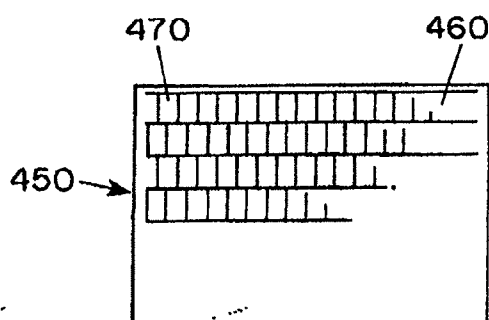


FIG. 4B

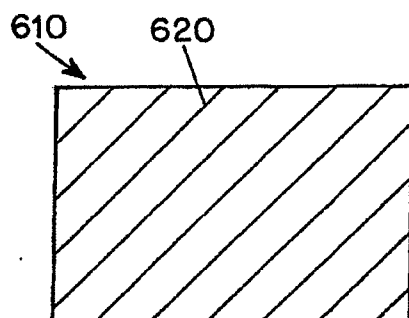


FIG. 6A

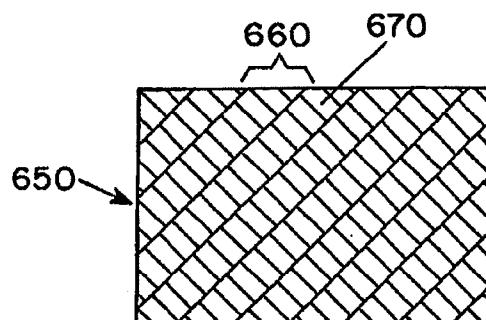


FIG. 6B

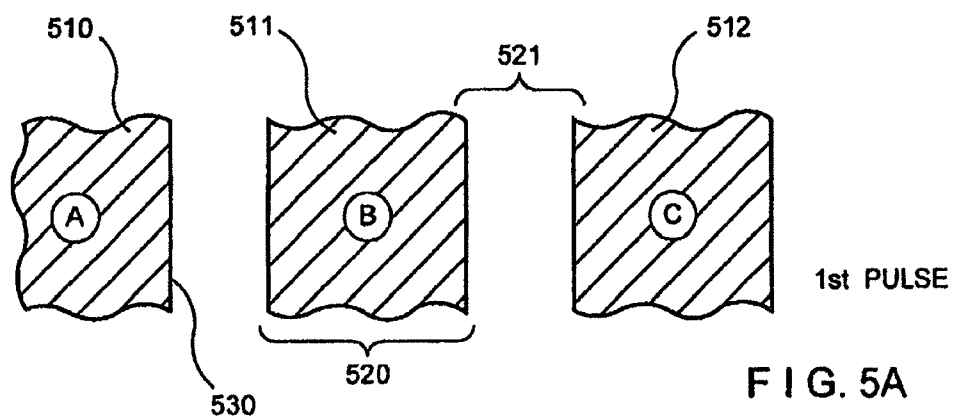


FIG. 5A

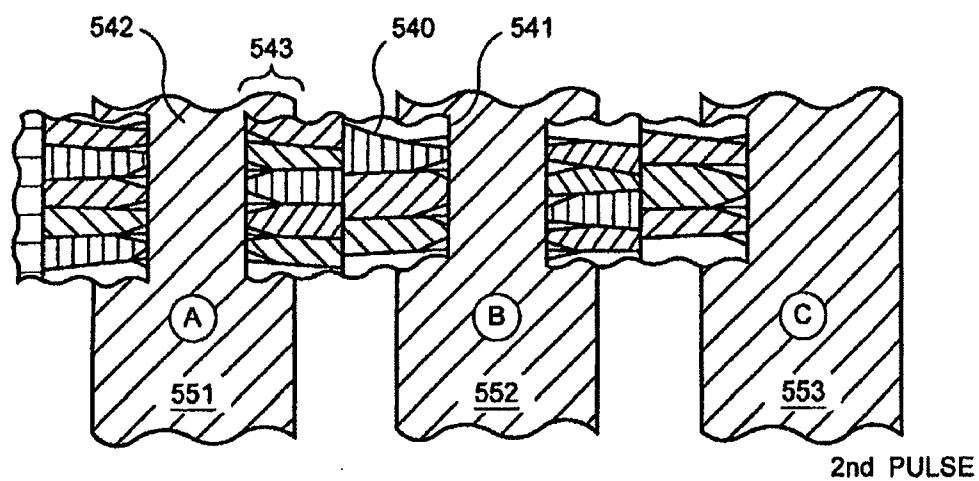


FIG. 5B

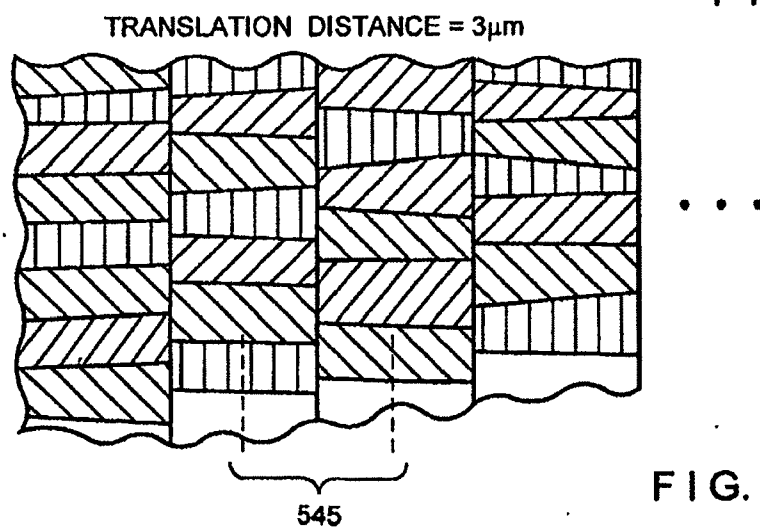


FIG. 5C

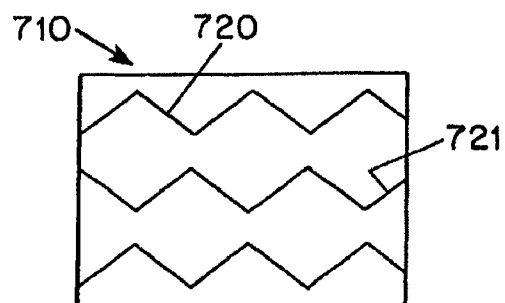


FIG. 7A

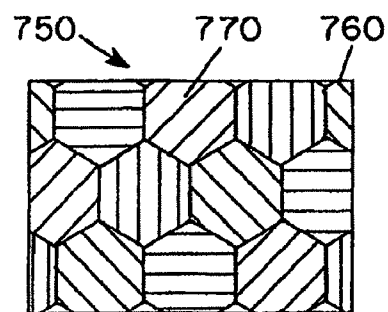


FIG. 7B

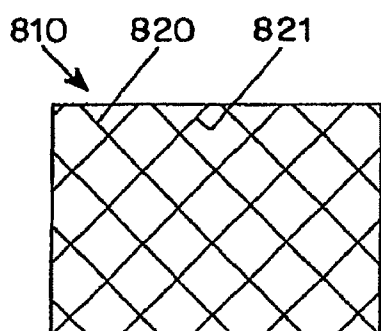


FIG. 8A




FIG. 8B

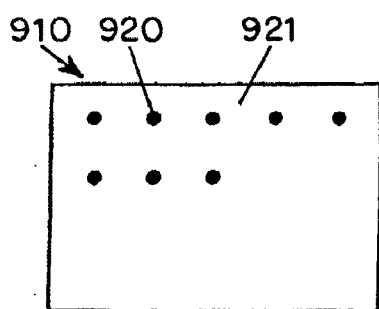


FIG. 9A

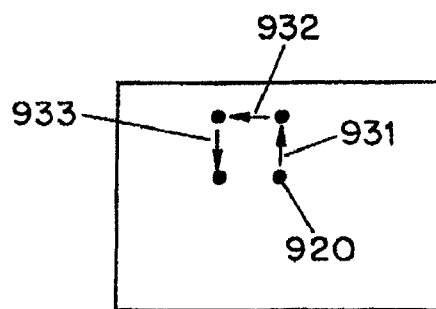


FIG. 9B

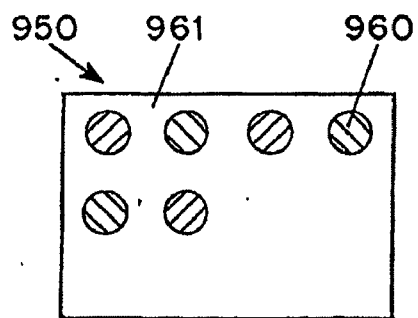


FIG. 9C

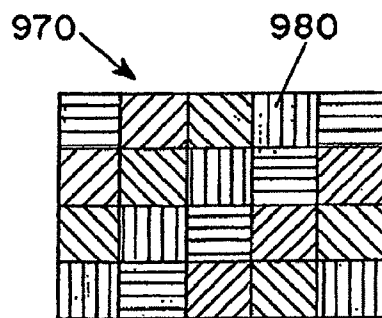


FIG. 9D

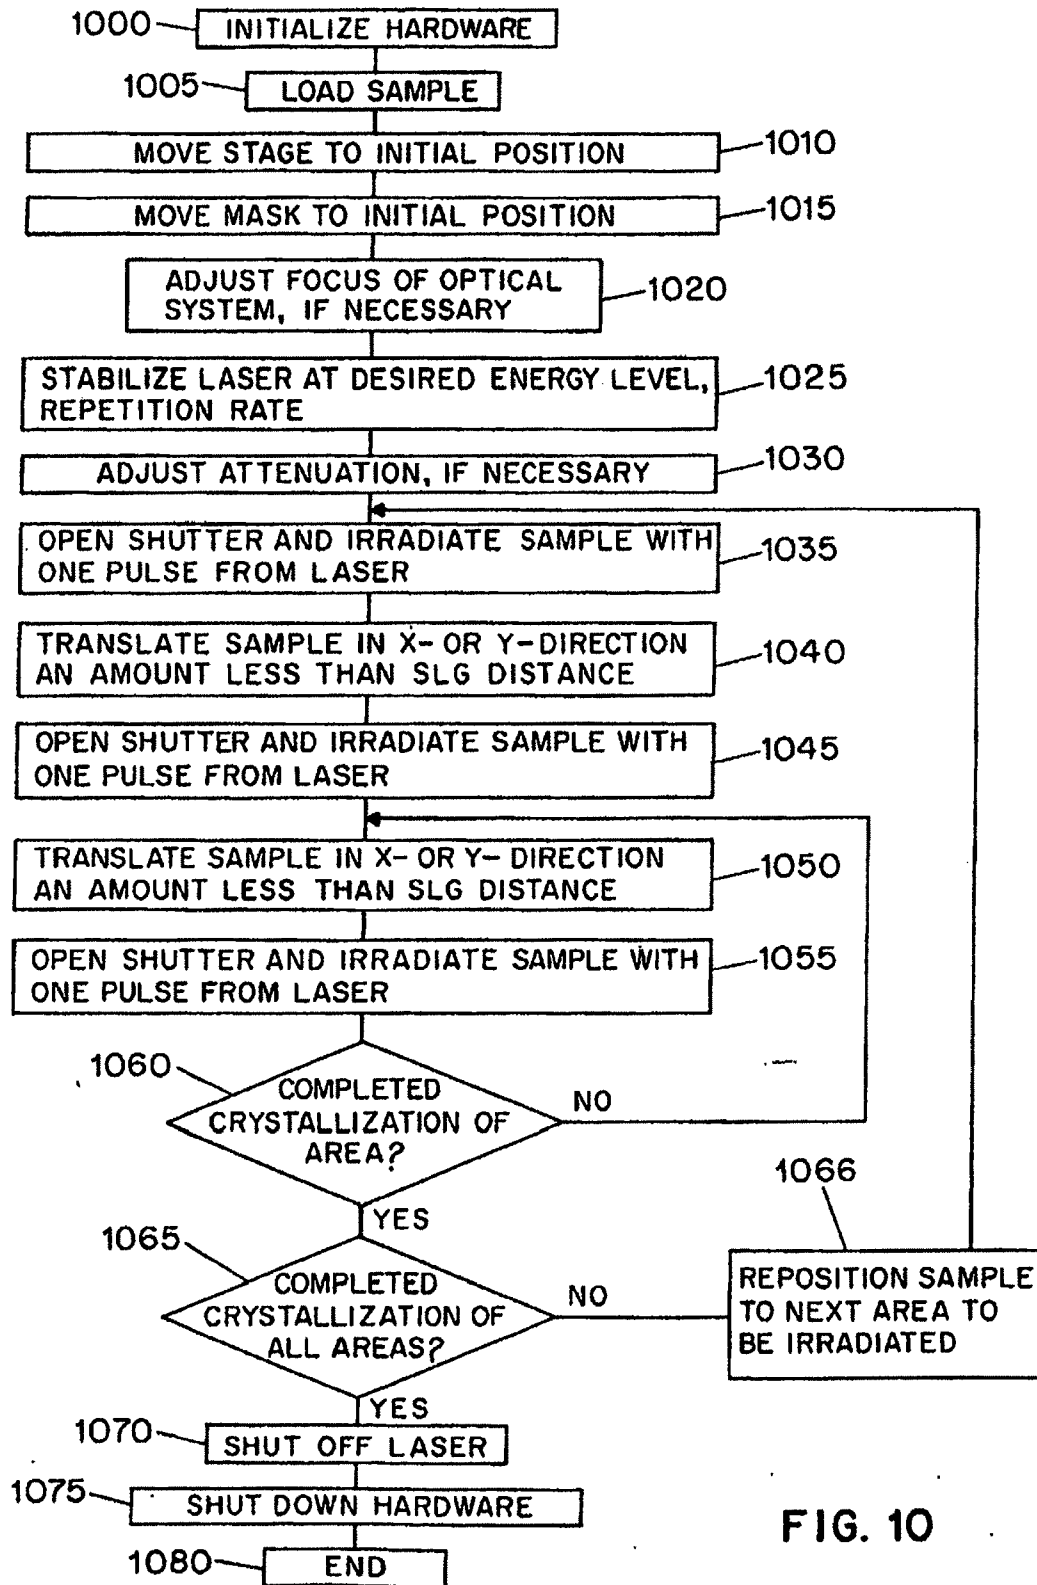


FIG. 10

**UNIFORM LARGE-GRAINED AND GRAIN
BOUNDARY LOCATION MANIPULATED
POLYCRYSTALLINE THIN FILM
SEMICONDUCTORS FORMED USING
SEQUENTIAL LATERAL SOLIDIFICATION
AND DEVICES FORMED THEREON**

**CROSS REFERENCE TO RELATED
APPLICATIONS**

[0001] This application is a divisional of U.S. application Ser. No. 12/567,414, filed Sep. 25, 2009, which is a continuation of U.S. application Ser. No. 12/419,821, filed Apr. 7, 2009, which is a continuation of U.S. application Ser. No. 11/744,493, filed May 4, 2007, which has issued as U.S. Pat. No. 7,679,028, which is a divisional of U.S. application Ser. No. 11/141,815, filed Jun. 1, 2005, which has issued as U.S. Pat. No. 7,319,056, which is a continuation of U.S. application Ser. No. 10/294,001, filed Nov. 13, 2002, which has issued as U.S. Pat. No. 7,029,996, which is a continuation of U.S. application Ser. No. 09/390,535, filed Sep. 3, 1999, which has issued as U.S. Pat. No. 6,555,449, which is a continuation-in-part of International Application PCT/US96/07730, filed May 28, 1996, and which is also a continuation-in-part of U.S. application Ser. No. 09/200,533, filed Nov. 27, 1998, which has issued as U.S. Pat. No. 6,322,625. The entire disclosures of each of the aforementioned priority applications are herein incorporated by reference in their entireties.

NOTICE OF GOVERNMENT RIGHTS

[0002] The U.S. Government has certain rights in this invention pursuant to the terms of the Defense Advanced Research Project Agency award number N66001-98-1-8913.

BACKGROUND OF THE INVENTION

[0003] I. Field of the Invention

[0004] The present invention relates to techniques for semiconductor processing, and more particularly to semiconductor processing which may be performed at low temperatures.

[0005] II. Description of the Related Art

[0006] In the field of semiconductor processing, there have been several attempts to use lasers to convert thin amorphous silicon films into polycrystalline films. For example, in James Im et al., "Crystalline Si Films for Integrated Active-Matrix Liquid-Crystal Displays," 11 MRS Bullitin 39 (1996), an overview of conventional excimer laser annealing technology is presented. In such a system, an excimer laser beam is shaped into a long beam which is typically up to 30 cm long and 500 micrometers or greater in width. The shaped beam is scanned over a sample of amorphous silicon to facilitate melting thereof and the formation of polycrystalline silicon upon resolidification of the sample.

[0007] The use of conventional excimer laser annealing technology to generate polycrystalline silicon is problematic for several reasons. First, the polycrystalline silicon generated in the process is typically small grained, of a random microstructure, and having a nonuniform grain sizes, therefore resulting in poor and nonuniform devices and accordingly, low manufacturing yield. Second, in order to obtain acceptable performance levels, the manufacturing throughput for producing polycrystalline silicon must be kept low. Also, the process generally requires a controlled atmosphere and preheating of the amorphous silicon sample, which leads to a reduction in throughput rates. Accordingly, there exists a need

in the field to generate higher quality polycrystalline silicon at greater throughput rates. There likewise exists a need for manufacturing techniques which generate larger and more uniformly microstructured polycrystalline silicon thin films to be used in the fabrication of higher quality devices, such as flat panel displays.

SUMMARY OF THE INVENTION

[0008] An object of the present invention is to provide techniques for producing uniform large-grained and grain boundary location controlled polycrystalline thin film semiconductors using the sequential lateral solidification process.

[0009] A further object of the present invention is to form large-grained and grain boundary location manipulated polycrystalline silicon over substantially the entire semiconductor sample.

[0010] Yet another object of the present invention is to provide techniques for the fabrication of semiconductors devices useful for fabricating displays and other products where the predominant orientation of the semiconductor grain boundaries may be controllably aligned or misaligned with respect to the current flow direction of the device.

[0011] In order to achieve these objectives as well as others that will become apparent with reference to the following specification, the present invention provides methods for processing an amorphous silicon thin film sample into a polycrystalline silicon thin film are disclosed. In one preferred arrangement, a method includes the steps of generating a sequence of excimer laser pulses, controllably modulating each excimer laser pulse in the sequence to a predetermined fluence, homogenizing each modulated laser pulse in the sequence in a predetermined plane, masking portions of each homogenized fluence controlled laser pulse in the sequence with a two dimensional pattern of slits to generate a sequence of fluence controlled pulses of line patterned beamlets, each slit in the pattern of slits being sufficiently narrow to prevent inducement of significant nucleation in region of a silicon thin film sample irradiated by a beamlet corresponding to the slit, irradiating an amorphous silicon thin film sample with the sequence of fluence controlled slit patterned beamlets to effect melting of portions thereof corresponding to each fluence controlled patterned beamlet pulse in the sequence of pulses of patterned beamlets, and controllably sequentially translating a relative position of the sample with respect to each of the fluence controlled pulse of slit patterned beamlets to thereby process the amorphous silicon thin film sample into a single or polycrystalline silicon thin film.

[0012] In a preferred arrangement, the masking step includes masking portions of each homogenized fluence controlled laser pulse in said sequence with a two dimensional pattern of substantially parallel straight slits spaced a predetermined distance apart and linearly extending parallel to one direction of said plane of homogenization to generate a sequence of fluence controlled pulses of slit patterned beamlets. Advantageously, the translating provides for controllably sequentially translating the relative position of the sample in a direction perpendicular to each of the fluence controlled pulse of slit patterned beamlets over substantially the predetermined slit spacing distance, to the to thereby process the amorphous silicon thin film sample into polycrystalline silicon thin film having long grained, directionally controlled crystals.

[0013] In an especially preferred arrangement, the masking step comprises masking portions of each homogenized flu-

ence controlled laser pulse in the sequence with a two dimensional pattern of substantially parallel straight slits of a predetermined width, spaced a predetermined distance being less than the predetermined width apart, and linearly extending parallel to one direction of the plane of homogenization to generate a sequence of fluence controlled pulses of slit patterned beamlets. In this arrangement, translating step comprises translating by a distance less than the predetermined width the relative position of the sample in a direction perpendicular to each of the fluence controlled pulse of slit patterned beamlets, to the to thereby process the amorphous silicon thin film sample into polycrystalline silicon thin film having long grained, directionally controlled crystals using just two laser pulses. In one exemplary embodiment, the predetermined width is approximately 4 micrometers, the predetermined spacing distance is approximately 2 micrometers, and the translating distance is approximately 3 micrometers.

[0014] In an alternative preferred arrangement, the masking step comprises masking portions of each homogenized fluence controlled laser pulse in the sequence with a two dimensional pattern of substantially parallel straight slits spaced a predetermined distance apart and linearly extending at substantially 45 degree angle with respect to one direction of the plane of homogenization to generate a sequence of fluence controlled pulses of slit patterned beamlets. In this arrangement, the translating step provides for controllably sequentially translating the relative position of the sample in a direction parallel to the one direction of the plane of homogenization over substantially the predetermined slit distance, to thereby process the amorphous silicon thin film sample into polycrystalline silicon thin film having long grained, directionally controlled crystals that are disoriented with respect to the XY axis of the thin silicon film.

[0015] In yet another preferred arrangement, the masking step comprises masking portions of each homogenized fluence controlled laser pulse in the sequence with a two dimensional pattern of intersecting straight slits, a first group of straight slits being spaced a first predetermined apart and linearly extending at substantially 45 degree angle with respect to a first direction of the plane of homogenization, and a second group of straight slits being spaced a second predetermined distance apart and linearly extending at substantially 45 degree angle with respect to a second direction of the plane of homogenization and intersecting the first group at substantially a 90 degree angle, to generate a sequence of fluence controlled pulses of slit patterned beamlets. The corresponding translating step provides for controllably sequentially translating the relative position of the sample in a direction parallel to the first direction of the plane of homogenization over substantially the first predetermined slit spacing distance, to thereby process the amorphous silicon thin film sample into polycrystalline silicon thin film having large diamond shaped crystals.

[0016] In still another alternative arrangement, the masking step comprises masking portions of each homogenized fluence controlled laser pulse in the sequence with a two dimensional pattern of sawtooth shaped slits spaced a predetermined distance apart and extending generally parallel to one direction of the plane of homogenization to generate a sequence of fluence controlled pulses of slit patterned beamlets. In this arrangement, the translating step provides for controllably sequentially translating the relative position of the sample in a direction perpendicular to each of the fluence

controlled pulse of slit patterned beamlets over substantially the predetermined slit spacing distance, to the to thereby process the amorphous silicon thin film sample into polycrystalline silicon thin film having large hexagonal crystals.

[0017] In a modified arrangement, an alternative technique for processing an amorphous silicon thin film sample into a polycrystalline silicon thin film using a polka-dot pattern is provided. The technique includes generating a sequence of excimer laser pulses, homogenizing each laser pulse in the sequence in a predetermined plane, masking portions of each homogenized laser pulse in the sequence with a two dimensional pattern of substantially opaque dots to generate a sequence of pulses of dot patterned beamlets, irradiating an amorphous silicon thin film sample with the sequence of dot patterned beamlets to effect melting of portions thereof corresponding to each dot patterned beamlet pulse in the sequence of pulses of patterned beamlets, and controllably sequentially translating the sample relative to each of the pulses of dot patterned beamlets by alternating a translation direction in two perpendicular axis and in a distance less than the super lateral grown distance for the sample, to thereby process the amorphous silicon thin film sample into a polycrystalline silicon thin film.

[0018] The accompanying drawings, which are incorporated and constitute part of this disclosure, illustrate a preferred embodiment of the invention and serve to explain the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] FIG. 1 is a functional diagram of a system for performing the lateral solidification process preferred to implement a preferred process of the present invention;

[0020] FIG. 2a is an illustrative diagram showing a mask having a dashed pattern;

[0021] FIG. 2b is an illustrative diagram of a crystallized silicon film resulting from the use of the mask shown in FIG. 2a in the system of FIG. 1;

[0022] FIG. 3a is an illustrative diagram showing a mask having a chevron pattern;

[0023] FIG. 3b is an illustrative diagram of a crystallized silicon film resulting from the use of the mask shown in FIG. 3a in the system of FIG. 1;

[0024] FIG. 4a is an illustrative diagram showing a mask having a line pattern;

[0025] FIG. 4b is an illustrative diagram of a crystallized silicon film resulting from the use of the mask shown in FIG. 4a in the system of FIG. 1;

[0026] FIG. 5a is an illustrative diagram showing irradiated areas of a silicon sample using a mask having a line pattern;

[0027] FIG. 5b is an illustrative diagram showing irradiated areas of a silicon sample using a mask having a line pattern after initial irradiation and sample translation has occurred;

[0028] FIG. 5c is an illustrative diagram showing a crystallized silicon film after a second irradiation has occurred;

[0029] FIG. 6a is an illustrative diagram showing a mask having a diagonal line pattern;

[0030] FIG. 6b is an illustrative diagram of a crystallized silicon film resulting from the use of the mask shown in FIG. 6a in the system of FIG. 1;

[0031] FIG. 7a is an illustrative diagram showing a mask having a sawtooth pattern;

[0032] FIG. 7b is an illustrative diagram of a crystallized silicon film resulting from the use of the mask shown in FIG. 7a in the system of FIG. 1;

[0033] FIG. 8a is an illustrative diagram showing a mask having a crossing diagonal line pattern;

[0034] FIG. 8b is an illustrative diagram of a crystallized silicon film resulting from the use of the mask shown in FIG. 8a in the system of FIG. 1;

[0035] FIG. 9a is an illustrative diagram showing a mask having a polka-dot pattern;

[0036] FIG. 9b is an instructive diagram illustrating mask translation using the mask of

[0037] FIG. 9a;

[0038] FIG. 9c is an illustrative diagram of a crystallized silicon film resulting from the use of the mask shown in FIG. 9a in the system of FIG. 1 using the mask translation scheme shown in FIG. 9b;

[0039] FIG. 9d is an illustrative diagram of an alternative crystallized silicon film resulting from the use of the mask shown in FIG. 9a in the system of FIG. 1 using the mask translation scheme shown in FIG. 9b; and

[0040] FIG. 10 is a flow diagram illustrating the steps implemented in the system of FIG. 1.

DESCRIPTION OF PREFERRED EMBODIMENTS

[0041] The present invention provides techniques for producing uniform large-grained and grain boundary location controlled polycrystalline thin film semiconductors using the sequential lateral solidification process. In order to fully understand those techniques, the sequential lateral solidification process must first be appreciated.

[0042] The sequential lateral solidification process is a technique for producing large grained silicon structures through small-scale unidirectional translation of a silicon sample in between sequential pulses emitted by an excimer laser. As each pulse is absorbed by the sample, a small area of the sample is caused to melt completely and resolidify laterally into a crystal region produced by the preceding pulses of a pulse set.

[0043] A particularly advantageous sequential lateral solidification process and an apparatus to carry out that process are disclosed in our co-pending patent application entitled "Systems and Methods using Sequential Lateral Solidification for Producing Single or Polycrystalline Silicon Thin Films at Low Temperatures," filed concurrently with the present application and assigned to the common assignee, the disclosure of which is incorporated by reference herein. While the foregoing disclosure is made with reference to the particular techniques described in our co-pending patent application, it should be understood that other sequential lateral solidification techniques could readily be adapted for use in the present invention.

[0044] With reference to FIG. 1, our co-pending patent application describes as a preferred embodiment a system including excimer laser 110, energy density modulator 120 to rapidly change the energy density of laser beam 111, beam attenuator and shutter 130, optics 140, 141, 142 and 143, beam homogenizer 144, lens system 145, 146, 148, masking system 150, lens system 161, 162, 163, incident laser pulse 164, thin silicon film sample 170, sample translation stage 180, granite block 190, support system 191, 192, 193, 194, 195, 196, and managing computer 100. X and Y direction translation of the silicon sample 170 may be effected by either movement of a mask 210 within masking system 150 or by movement of the sample translation stage 180 under the direction of computer 100.

[0045] As described in further detail in our co-pending application, an amorphous silicon thin film sample is processed into a single or polycrystalline silicon thin film by generating a plurality of excimer laser pulses of a predetermined fluence, controllably modulating the fluence of the excimer laser pulses, homogenizing the modulated laser pulses in a predetermined plane, masking portions of the homogenized modulated laser pulses into patterned beamlets, irradiating an amorphous silicon thin film sample with the patterned beamlets to effect melting of portions thereof corresponding to the beamlets, and controllably translating the sample with respect to the patterned beamlets and with respect to the controlled modulation to thereby process the amorphous silicon thin film sample into a single or polycrystalline silicon thin film by sequential translation of the sample relative to the patterned beamlets and irradiation of the sample by patterned beamlets of varying fluence at corresponding sequential locations thereon. The following embodiments of the present invention will now be described with reference to the foregoing processing technique.

[0046] Referring to FIGS. 2a and b, a first embodiment of the present invention will now be described. FIG. 2a illustrates a mask 210 incorporating a pattern of slits 220. The mask 210 is preferably fabricated from a quartz substrate, and includes either a metallic or dielectric coating which is etched by conventional techniques to form a mask pattern, such as that shown in FIG. 2a. Each slit 220 is of a breadth 230 which is chosen in accordance with the necessary dimensionality of the device that will be fabricated on the sample 170 in the particular location that corresponds to the slit 220. For example, the slits 220 should be approximately 25 micrometers across to fabricate a 25 micrometer semiconductor device, or in the case of a multi-part device, a channel in a device, in sample 170. The width 240 of the slit 220 is preferably between approximately two and five micrometers in order to be small enough to avoid nucleation in sample 170 and large enough to maximize lateral crystal growth for each excimer pulse. It should be understood that although FIG. 2a illustrates a regular pattern of slits 220, any pattern of slits could be utilized in accordance with the microstructures desired to be fabricated on film 170.

[0047] In accordance with the present invention, the sample 170 is translated with respect to the laser pulses 164, either by movement of masking system 150 or sample translation stage 180, in order to grow crystal regions in the sample 170. When the sample 170 is translated in the Y direction and mask 210 is used in masking system 150, a processed sample 250 having crystallized regions 260 is produced, as shown in FIG. 2b. The breadth 270 of each crystallized region will be approximately equal to the breadth 230 in the mask 210. The length 280 of each region will be approximately equal to the distance of Y translation effected by movement of the masking system 150 or translation stage 180, and as with the breadth, should be chosen in accordance with the final device characteristics. Each crystal region 260 will consist of polysilicon with long and directionally controlled grains.

[0048] Referring next to FIGS. 3a and b, a second embodiment of the present invention will now be described. FIG. 3a illustrates a mask 310 incorporating a pattern of chevrons 320. The breadth 320 of each chevron side will determine the size of the ultimate single crystal region to be formed in sample 170. When the sample 170 is translated in the Y direction and mask 310 is used in masking system 150, a processed sample 350 having crystallized regions 360 is pro-

duced, as shown in FIG. 3*b*. Each crystal region 360 will consist of a diamond shaped single crystal region 370 and two long grained, directionally controlled polycrystalline silicon regions 380 in the tails of each chevron.

[0049] While the embodiments described with reference to FIGS. 2 and 3 are advantageous to generate spatially separated devices on silicon sample 170, at least some of the silicon sample 170 is not utilized in the final semiconductor. In order to facilitate a more flexible configuration of devices that can be developed on the semiconductor sample 170, the following preferred embodiments will now be described.

[0050] Referring to FIGS. 4*a* and *b*, a third embodiment of the present invention will now be described. FIG. 4*a* illustrates a mask 410 incorporating a pattern of slits 420. Each slit 410 should extend as far across on the mask as the homogenized laser beam 149 incident on the mask permits, and must have a width 440 that is sufficiently narrow to prevent any nucleation from taking place in the irradiated region of sample 170. The width 440 will depend on a number of factors, including the energy density of the incident laser pulse, the duration of the incident laser pulse, the thickness of the silicon thin film sample, and the temperature and conductivity of the silicon substrate. For example, the slit should not be more than 2 micrometers wide when a 500 Angstrom film is to be irradiated at room temperature with a laser pulse of 30 ns and having an energy density that slightly exceeds the complete melt threshold of the sample.

[0051] When the sample 170 is translated in the Y direction and mask 410 is used in masking system 150, a processed sample 450 having crystallized regions 460 is produced, as shown in FIG. 4*b*. Each crystal region 460 will consist of long grained, directionally controlled crystals 470. Depending on the periodicity 421 of the masking slits 420 in sample 410, the length of the grains 470 will be longer or shorter. In order to prevent amorphous silicon regions from being left on sample 170, the Y translation distance must be smaller than the distance 421 between mask lines, and it is preferred that the translation be at least one micron smaller than this distance 421 to eliminate small crystals that inevitably form at the initial stage of a directionally controlled polycrystalline structure.

[0052] An especially preferred technique using a mask having a pattern of lines will next be described. Using a mask as shown in FIG. 4*a* where closely packed mask lines 420 having a width 440 of 4 micrometers are each spaced 2 micrometers apart, the sample 170 is irradiated with one laser pulse. As shown in FIG. 5*a*, the laser pulse will melt regions 510, 511, 512 on the sample, where each melt region is approximately 4 micrometers wide 520 and is spaced approximately 2 micrometers apart 521. This first laser pulse will induce the formation of crystal growth in the irradiated regions 510, 511, 512, starting from the melt boundaries 530 and proceeding into the melt region, so that polycrystalline silicon 540 forms in the irradiated regions, as shown in FIG. 5*b*.

[0053] In order to eliminate the numerous small initial crystals 541 that form at the melt boundaries 530, the sample 170 is translated three micrometers in the Y direction and again irradiated with a single excimer laser pulse. The second irradiation regions 551, 552, 553 cause the remaining amorphous silicon 542 and initial crystal regions 543 of the polycrystalline silicon 540 to melt, while leaving the central section 545 of the polycrystalline silicon to remain. As shown in FIG. 5*c*, the crystal structure which forms the central section 545 outwardly grows upon solidification of melted regions 542,

542, so that a directionally controlled long grained polycrystalline silicon device is formed on sample 170.

[0054] Referring to FIGS. 6*a* and *b*, a fourth embodiment of the present invention will now be described. FIG. 6*a* illustrates a mask 610 incorporating a pattern of diagonal lines 620. When the sample 170 is translated in the Y direction and mask 610 is used in masking system 150, a processed sample 650 having crystallized regions 660 is produced, as shown in FIG. 6*b*. Each crystal region 660 will consist of long grained, directionally controlled crystals 670.

[0055] As with the embodiment described above with respect to FIGS. 4*a* and *b*, the translation distance will depend on the desired crystal length. Also, the process described with reference to FIGS. 5*a-c* could readily be employed using a mask as shown in FIG. 6*a*, having 4 micrometer wide lines 620 that are each spaced apart by 2 micrometers. This embodiment is especially advantageous in the fabrication of displays or other devices that are oriented with respect to an XY axis, as the polycrystalline structure is not orthogonal to that axis and accordingly, the device performance will be independent of the X or Y coordinates.

[0056] Referring next to FIGS. 7*a* and *b*, a fifth embodiment of the present invention will now be described. FIG. 7*a* illustrates a mask 710 incorporating offset sawtooth wave patterns 720, 721. When the sample 170 is translated in the Y direction and mask 710 is used in masking system 150, a processed sample 750 having crystallized regions 760 is produced, as shown in FIG. 7*b*. Each crystal region 760 will consist of a row of hexagonal-rectangular crystals 770. If the translation distance is slightly greater than the periodicity of the sawtooth pattern, the crystals will be hexagons. This embodiment is beneficial in the generation of larger silicon grains and may increase device performance.

[0057] Referring next to FIGS. 8*a* and *b*, a sixth embodiment of the present invention will now be described. FIG. 8*a* illustrates a mask 810 incorporating a diagonal cross pattern 821, 822. When the sample 170 is translated in the Y direction and mask 810 is used in masking system 150, a processed sample 850 having crystallized regions 860 is produced, as shown in FIG. 8*b*. Each crystal region 860 will consist of a row of diamond shaped crystals 870. If the translation distance is slightly greater than the periodicity of the pattern, the crystals will be squares. This embodiment is also beneficial in the generation of larger silicon grains and may increase device performance.

[0058] Referring next to FIGS. 9*a-d*, a seventh embodiment of the present invention will now be described. FIG. 9*a* illustrates a mask 910 incorporating a polka-dot pattern 920. The polka-dot mask 910 is an inverted mask, where the polka-dots 920 correspond to masked regions and the remainder of the mask 921 is transparent. In order to fabricate large silicon crystals, the polka-dot pattern may be sequentially translated about the points on the sample 170 where such crystals are desired. For example, as shown in FIG. 9*b*, the polka-dot mask may be translated 931 a short distance in the positive Y direction after a first laser pulse, a short distance in the positive X direction 932 after a second laser pulse, and a short distance in the negative Y direction 933 after a third laser pulse to induce the formation of large crystals. If the separation distance between polka-dots is greater than two times the lateral growth distance, a crystalline structure 950 where crystals 960 separated by small grained polycrystalline silicon regions 961 is generated, as shown in FIG. 9*c*. If the separation distance is less or equal to two times the lateral

growth distance so as to avoid nucleation, a crystalline structure **970** where crystals **980** are generated, as shown in FIG. **9d**.

[**0059**] Referring next to FIG. **10**, the steps executed by computer **100** to control the crystal growth process implemented with respect to FIG. **9** will be described. FIG. **10** is a flow diagram illustrating the basic steps implemented in the system of FIG. **1**. The various electronics of the system shown in FIG. **1** are initialized **1000** by the computer to initiate the process. A thin silicon film sample is then loaded onto the sample translation stage **1005**. It should be noted that such loading may be either manual or robotically implemented under the control of computer **100**. Next, the sample translation stage is moved into an initial position **1015**, which may include an alignment with respect to reference features on the sample. The various optical components of the system are focused **1020** if necessary. The laser is then stabilized **1025** to a desired energy level and reputation rate, as needed to fully melt the silicon sample in accordance with the particular processing to be carried out. If necessary, the attenuation of the laser pulses is finely adjusted **1030**.

[**0060**] Next, the shutter is opened **1035** to expose the sample to a single pulse of irradiation and accordingly, to commence the sequential lateral solidification process. The sample is translated in the X or Y directions **1040** in an amount less than the super lateral grown distance. The shutter is again opened **1045** to expose the sample to a single pulse of irradiation, and the sample is again translated in the X or Y directions **1050** in an amount less than the super lateral growth distance. Of course, if the sample was moved in the X direction in step **1040**, the sample should be moved in the Y direction in Step **1050** in order to create a polka-dot. The sample is then irradiated with a third laser pulse **1055**. The process of sample translation and irradiation **1050**, **1055** may be repeated **1060** to grow the polka-dot region with four or more laser pulses.

[**0061**] Next, if other areas on the sample have been designated for crystallization, the sample is repositioned **1065**, **1066** and the crystallization process is repeated on the new area. If no further areas have been designated for crystallization, the laser is shut off **1070**, the hardware is shut down **1075**, and the process is completed **1080**. Of course, if processing of additional samples is desired or if the present invention is utilized for batch processing, steps **1005**, **1010**, and **1035-1065** can be repeated on each sample.

[**0062**] The foregoing merely illustrates the principles of the invention. Various modifications and alterations to the described embodiments will be apparent to those skilled in the art in view of the teachings herein. For example, the thin silicon film sample **170** could be replaced by a sample having pre-patterned islands of silicon film. Also, the line pattern mask could be used to grow polycrystalline silicon using two laser pulses as explained with reference to FIGS. **5a-c**, then rotated by 90 degrees and used again in the same process to generate an array of square shaped single crystal silicon. It will thus be appreciated that those skilled in the art will be able to devise numerous systems and methods which, although not explicitly shown or described herein, embody the principles of the invention and are thus within the spirit and scope of the invention.

We claim:

1. A system for processing a silicon thin film into a polycrystalline thin film, comprising:

- (a) an excimer laser for generating a plurality of excimer laser pulses of a predetermined fluence;
- (b) a mask having one or more slits of a predetermined width, optically coupled to said excimer laser, for masking each of said laser pulses to generate one or more laser beamlets corresponding to each of said laser pulses, such that each beamlet has a shape defined by a length and a width, said width being determined by said predetermined slit width;
- (c) a sample stage, optically coupled to said mask and adapted for translation and for holding said silicon thin film, for receiving said one or more laser beamlets for each of said homogenous laser pulses to effect melting of a portion of said silicon thin film corresponding to said shape of said laser beamlet; and
- (d) a computer, coupled to said excimer laser, for controlling relative positions of said sample stage and said mask, and for coordinating said excimer pulse generation with said relative positions of said sample stage and said mask, to thereby process said silicon thin film into a polycrystalline silicon thin film by sequential translation of said sample stage relative to said mask and irradiation of said thin film by said one or more laser beamlets for each of said homogenized laser pulses at corresponding sequential locations therein.

2. The system according to claim **1**, wherein said mask is adapted for translation.

3. The system according to claim **1**, further comprising a beam homogenizer for homogenizing said laser pulses in a predetermined plane, said homogenized laser pulses each having a substantially predetermined size.

4. The system according to claim **1**, wherein said computer is adapted to controllably modulate said predetermined fluence of said excimer laser pulses.

5. The system according to claim **1**, further comprising a computer readable medium storing instructions executable by said computer for:

- (f) irradiating said silicon thin film with said laser beamlet to effect melting of a first portion of said silicon thin film corresponding to said shape of said predefined slit pattern in said mask; and
- (g) based on dimensions of said mask, translating at least one of said thin film and said excimer laser pulses relative to the other so as to reach a second location.

6. The system of claim **1**, wherein said length corresponds to said predetermined size of said homogenized laser pulses.

7. An apparatus for making a laterally extending crystalline region in a film of semiconductor material on a substrate having at least a surface region comprising a material which is different from said semiconductor material and which is inert with respect to crystal growth in said film, comprising:

- (a) a pulsed radiation beam source for providing a plurality of radiation beam pulses;
- (b) a beam mask adapted to receive said plurality of laser beam pulses and for defining a plurality of masked laser beam pulses, each having an intensity pattern for irradiating said film;
- (c) a sample translation stage optically coupled to said beam mask, and adapted for holding said substrate while at least a portion of said film is irradiated by said masked laser beam pulses and for translating said substrate in a lateral direction with respect to said masked laser beam pulses from a first position to at least a second position;

wherein when said sample translation stage is in said first position, a first portion of said semiconductor film is positioned to be irradiated by a first of said masked laser beam pulses so as to melt said semiconductor material in a first portion throughout its thickness, and when said sample translation stage is in said second position, a second portion of said semiconductor film is positioned to be irradiated by a second of said masked laser beam pulses so as to melt said semiconductor material in a second portion throughout its thickness, and

wherein said second portion overlaps said first portion such that at least one semiconductor crystal formed in said first portion as a result of said irradiating in said first position and subsequent solidification is in both said first portion and said second portion.

8. The apparatus of claim 7, wherein said sample translation stage is further adapted for translating said substrate in a

lateral direction with respect to said masked laser beam pulses from said second position to at least a third position;

wherein when said sample translation stage is in said third position, a third portion of said semiconductor film is positioned to be irradiated by a third of said masked laser beam pulses so as to melt said semiconductor material in a third portion throughout its thickness, and

wherein said third portion overlaps said second portion such that at least one semiconductor crystal formed in said second portion as a result of said irradiating in said second position and subsequent solidification is in both said second portion and said third portion.

9. The apparatus of claim 7, wherein said radiation beam pulses comprise laser beam pulses.

* * * * *