

19



Europäisches Patentamt
European Patent Office
Office européen des brevets



11 Publication number:

0 246 614 B1

12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification: **11.03.92** 51 Int. Cl.⁵: **H05B 37/03**

21 Application number: **87107273.2**

22 Date of filing: **19.05.87**

54 **Apparatus and method for testing incandescent lamps having a glass bulb.**

30 Priority: **22.05.86 IT 8336186**

43 Date of publication of application:
25.11.87 Bulletin 87/48

45 Publication of the grant of the patent:
11.03.92 Bulletin 92/11

84 Designated Contracting States:
DE FR GB IT NL

56 References cited:
GB-A- 2 150 372

73 Proprietor: **ZELTRON - Istituto Zanussi per la Ricerca S.p.A.**
Via Principe di Udine 114
I-33030 Campofornido(Udine)(IT)

72 Inventor: **Monai, Giuliano**
Via Ippollito Nievo 8
I-33042 Buttrio (Udine)(IT)
Inventor: **Boscolo, Antonio**
Via Angelo Emo 33/2
I-34144 Trieste(IT)

74 Representative: **Patentanwälte Grünecker, Kinkeldey, Stockmair & Partner**
Maximilianstrasse 58
W-8000 München 22(DE)

EP 0 246 614 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The present invention relates to apparatus for testing incandescent lamps having a glass bulb.

The invention also relates to a method for testing such lamps.

More particularly, the invention relates to the testing of low-voltage incandescent lamps, and is applicable to the testing of individual lamps, or to testing a plurality of such lamps disposed in a container such as in a blister pack.

In order to simplify the description, reference will be had in the following only to lamps disposed in blister packs.

In the process of manufacturing and automatically filling blister packages for incandescent lamps, a considerable number of reject products is usually encountered due to the blister packs being incompletely filled and/or the glass bulbs of individual lamps being cracked or broken.

This problem, which occurs mainly in the case of lamps of larger dimensions, is actually solved by employing an operator for completing the not properly filled blister packs and for replacing damaged lamps.

This procedure is rather costly and time-consuming. With respect to light bulbs that are merely cracked this method is also rather inefficient, as the operator will not always be capable of recognizing minute cracks.

For resolving these problems, the inventors have studied, designed and tested a visual inspection system which operates without direct contact with the lamps.

This system is capable of automatically detecting the presence of incompletely filled blister packs or of blister packs containing at least one lamp having a damaged glass bulb or filament, to thereby permit such blister packs or individual lamps to be eliminated or replaced by the use of automatically operated equipment of a mechanical or pneumatically operated type.

The system according to the invention comprises means for processing signals generated by a telecamera operating in an infrared range for scanning the blister packs containing the lamps.

The absence of any lamp, or the presence of a lamp having a broken or cracked bulb and/or a broken filament, is detected by comparing the luminosity of the filament contained in an undamaged bulb to that of a filament which is exposed to atmosphere or broken.

This is accomplished by supplying the lamps with the energy necessary for heating their filaments without there being any direct contact with the lamps themselves.

This is accomplished by the use of a radio-frequency electromagnetic field which is suitably

coupled to the lamps for transmitting to the filaments thereof a sufficient amount of energy for the intended purpose.

According to a preferred embodiment of the invention, a testing apparatus of the type defined above comprises:

- a telecamera or other detector means of suitable characteristics operating in the infrared range, or an equivalent device,
- a transmitter device comprising a suitable radiating system capable of transmitting radio-frequency energy to the lamps, and
- a processing, control and optionally display unit for programming and controlling the system and any optional systems for moving the blister packs or for automatically substituting blister packs and/or lamps.

The apparatus according to the invention may be programmed for processing different types of lamps within a range permitted by the energy emitted by the transmitter and by the image processing capacity.

According to the invention, apparatus for testing incandescent lamps having a glass bulb comprises means for moving said lamps relative to a testing station, and a processing and control unit for controlling said moving means. The apparatus is characterized by comprising a radiating system adapted to transmit radio-frequency electromagnetic energy produced by generator means to said lamps when positioned at said testing station, and detector means operating in the infrared range and adapted to detect the luminosity of said lamps at said testing station and to apply a corresponding signal to said processing and control unit, the latter being adapted to compare said signal to a reference signal and to generate a corresponding control signal in a per se known manner.

The invention is also directed to a method for testing incandescent lamps having a glass bulb by the use of the above described apparatus, said method being characterized in that said lamps, when positioned at said testing station, are subjected to the action of a radio-frequency electromagnetic field of an intensity normally capable of inducing luminosity in the infrared range adjacent the limit of the visible range in the filament of each lamp, the luminosity of said lamps being detected by detector means for comparison to a reference value.

An embodiment of the invention shall now be described by way of example with reference to the accompanying drawings, wherein:

- fig. 1 shows a block diagram of a testing apparatus according to a preferred embodiment of the invention, and
- fig. 2 shows a diagram of the operating range of the apparatus according to

the invention.

As shown in fig. 1, lamps 10 are contained in containers 11 such as blister packs supported on conveyor means 12.

The lamps 10 contained in blister packs 11 may all be of the same type or of different types, and may be contained in individual blisters in a selected alignment or at indeterminate orientations.

The invention permits the lamps contained in blister packs 11, and more generally any individual lamp 10, to be tested without any energizing or sensing devices coming into actual contact with the lamps.

Conveyor means 12 is actuated by motor means 13. When a blister pack 11 arrives at a testing station, a proximity detector 17 signals a processing and control unit 19 adapted to control motor means 13.

When a blister pack 11 is positioned at the testing station, processing and control unit 19 activates a radio-frequency generator 15, preferably of the type having a controlled power output, which cooperates with a radiating system 14 for transmitting radio-frequency energy to the location occupied by blister 11. Processing and control unit 19 may be of any per se known type comprising for example at least one input/output unit, signal acquisition and processing means and a microprocessor of the type MVME 133 sold by Motorola Inc., and comprising a central processing unit CPU 68020.

The radiofrequency energy supplied to the location occupied by blister 11 excites the filaments of lamps 10.

As shown in fig. 2 the filaments of lamps 10 show a different response to the supply of energy of a given magnitude when broken (curve 22), when exposed to air (curve 23), i.e. when the glass bulb is cracked or broken, and when lamp 10 is undamaged (curve 24).

The inventors have ascertained that the difference in luminosity between a filament exposed to air (curve 23) and a filament in a vacuum (curve 24) is unequivocally discernible when the energy supplied to the lamp is of a magnitude whereat the temperature of the filament is just short of producing visible luminosity i.e. when the luminosity emitted by the filament is in the infrared range close to the limit of the visible range.

Infrared detector means 16, comprising for instance a telecamera responsive to radiation in the selected infrared range, or an array of photodiodes responsive to infrared radiation, is arranged to scan any location on blister packs 11 whereat a lamp 10 is, or should be, present.

In response to what is being detected, detector means 16 transmits to an interface 18 a series of signals indicative of the intensity of the infrared

radiation emitted from the respective positions provided on the area of blister pack 11.

The presence of one or more signals for any position, indicating that the luminosity at the respective position exceeds a determined reference threshold, signifies that the respective position is occupied by an undamaged lamp 10.

When the intensity of the emitted radiation, and thus the respective signal, remains below the determined threshold, it signifies that the respective position is not occupied by a lamp, or that the lamp occupying the position is deficient due to its bulb and/or filament being damaged.

The informations supplied to interface 18 are transmitted to processing and control unit 19 and processed thereby for determining the state of each lamp 10 on the base of the above criteria.

Processing and control unit 19 may be reset, controlled and programmed in a per se known manner by using a keyboard 20, optionally in combination with display means.

In addition to controlling motor means 13, processing and control unit 19 may also generate control signals for activating a device 21 operable to automatically replace in blister pack 11 any lamps 10 having been found to be damaged.

According to a modification, detector means 16 may be designed to detect a determined value of luminosity varying for different types of lamps, so that, even when only one lamp is not excited, the respective value of luminosity is not attained, causing the detector means to report such inferior value.

The detector means may also be designed to detect the absence of excitation also in two or more lamps.

The described testing apparatus and method may obviously be modified in various manners without thereby leaving the scope of the invention.

Claims

1. Apparatus for testing incandescent lamps having a glass bulb, comprising means for moving said lamps relative to a testing station, and a processing and control unit for controlling said moving means, characterized by comprising a radiating system (14) adapted to transmit radio-frequency electromagnetic energy produced by generator means (15) to said lamps (10) when positioned at said testing station, and detector means (16) operating in the infrared range and adapted to detect the luminosity of said lamps (10) at said testing station and to apply a corresponding signal to said processing and control unit (19), the latter being adapted to compare said signal to a reference signal and to generate a correspond-

ing control signal.

2. Testing apparatus according to claim 1, characterized in that said radio-frequency generator (15) has a variable and controlled power output. 5
3. Testing apparatus according to claim 1, characterized in that said infrared detector means (16) comprise a telecamera. 10
4. Testing apparatus according to claim 1, characterized in that said infrared detector means (16) is composed of photodiodes. 15
5. Testing apparatus according to claim 1, characterized in that said infrared detector means (16) is designed to detect the luminosity at individual locations occupied by said lamps (10). 20
6. Testing apparatus according to claim 1, characterized in that said infrared detector means (16) is designed to detect an average luminosity level. 25
7. Testing apparatus according to claim 1, characterized in that said processing and control unit (19) utilizes said control signal to control a device (21) for replacing any of said lamps (10). 30
8. A method for testing incandescent lamps having a glass bulb by the use of the testing apparatus according to any of claims 1 to 7, characterized in that said lamps (10), when positioned at said testing station, are subjected to the action of a radio-frequency electromagnetic field of an intensity normally capable of inducing luminosity in the infrared range adjacent the limit of the visible range in the filament of each lamp, the luminosity of said lamps being detected by said detector means (16) for comparison to a reference value. 35
40
45

Revendications

1. Appareil pour contrôler des lampes à incandescence ayant une ampoule de verre, comprenant des moyens pour déplacer ces lampes par rapport à un poste de contrôle, et une unité de traitement et de commande pour commander ces moyens de déplacement, caractérisé en ce qu'il comporte un système de rayonnement (14) adapté pour transmettre une énergie électromagnétique radiofréquence produite par un générateur (15) à ces lampes (10) lorsque celles-ci se trouvent au poste de 50
55

contrôle, et un détecteur (16) fonctionnant dans la plage des infrarouges et adapté pour détecter la luminosité de ces lampes (10) au niveau du poste de contrôle et pour envoyer un signal correspondant à l'unité de traitement et de commande (19), cette dernière étant adaptée pour comparer ce signal à un signal de référence et pour émettre un signal de commande correspondant.

2. Appareil de contrôle selon la revendication 1, caractérisé en ce que le générateur radiofréquence (15) a une sortie de puissance variable et commandée.
3. Appareil de contrôle selon la revendication 1, caractérisé en ce que le détecteur infrarouge (16) comporte une caméra de télévision.
4. Appareil de contrôle selon la revendication 1, caractérisé en ce que le détecteur infrarouge (16) est constitué par des photodiodes.
5. Appareil de contrôle selon la revendication 1, caractérisé en ce que le détecteur infrarouge (16) est conçu pour détecter la luminosité à des emplacements individuels occupés par les lampes (10).
6. Appareil de contrôle selon la revendication 1, caractérisé en ce que le détecteur infrarouge (16) est conçu pour détecter un niveau de luminosité moyen.
7. Appareil de contrôle selon la revendication 1, caractérisé en ce que l'unité de traitement et de commande (19) utilise le signal de commande pour commander un dispositif (21) pour remplacer l'une quelconque des lampes (10).
8. Procédé pour contrôler des lampes à incandescence ayant une ampoule de verre en utilisant l'appareil de contrôle selon l'une quelconque des revendications 1 à 7, caractérisé en ce que ces lampes (10), lorsqu'elles sont positionnées au poste de contrôle, sont soumises à l'action d'un champ électromagnétique radiofréquence d'une intensité normalement susceptible d'induire une luminosité dans la plage des infrarouges voisine de la limite de la plage visible dans le filament de chaque lampe, la luminosité de ces lampes étant détectée par le détecteur (16) par comparaison à une valeur de référence.

Patentansprüche

1. Vorrichtung zum Prüfen von Glühlampen, die

- einen Glaskolben haben, enthaltend eine Einrichtung zum Bewegen der Lampen relativ zu einer Prüfstation, und eine Verarbeitungs- und Steuereinheit zum Steuern der Bewegungseinrichtung, dadurch gekennzeichnet, daß sie ein Strahlungssystem (14) enthält, das vorgesehen ist, um elektromagnetische Hochfrequenz-Energie, die durch eine Generatoreinrichtung (15) erzeugt wird, an die Lampen (10) zu übertragen, wenn sie sich an der Prüfstation befinden, und eine Detektoreinrichtung (16), die im Infrarotbereich arbeitet und vorgesehen ist, die Helligkeit der Lampen (10) an der Prüfstation zu ermitteln und ein entsprechendes Signal an die Verarbeitungs- und Steuereinheit (19) zuzuführen, wobei letztere dazu eingerichtet ist, das Signal mit einem Referenzsignal zu vergleichen und ein entsprechendes Steuersignal zu erzeugen.
2. Testvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß der Hochfrequenzgenerator (15) einen variablen und gesteuerten Leistungsausgang hat.
3. Prüfvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Infrarotdetektoreinrichtung (16) eine Telekamera enthält.
4. Prüfvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Infrarotdetektoreinrichtung (16) aus Photodioden besteht.
5. Prüfvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Infrarotdetektoreinrichtung (16) derart konstruiert ist, daß sie die Helligkeit an einzelnen Stellen, die durch die Lampen (10) besetzt sind, ermittelt.
6. Prüfvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Infrarotdetektoreinrichtung (16) derart konstruiert ist, daß sie einen durchschnittlichen Leuchtgrad ermittelt.
7. Prüfvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Verarbeitungs- und Steuereinheit (19) dieses Steuersignal benutzt, um eine Vorrichtung (21) zu steuern, die jede dieser Lampen (10) ersetzt.
8. Verfahren zum Prüfen von Glühlampen, die einen Glühkolben haben, durch Verwendung der Prüfvorrichtung nach einem der Ansprüche 1 bis 7, dadurch gekennzeichnet, daß die Lampen (10), wenn sie sich an der Prüfstation befinden, der Wirkung eines elektromagnetischen Hochfrequenzfelds einer Intensität ausgesetzt sind, die normalerweise in der Lage ist,
- eine Helligkeit in dem Infrarotbereich nahe der Grenze des sichtbaren Bereichs in dem Glühfaden jeder Lampe zu induzieren, wobei die Helligkeit der Lampen durch die Detektoreinrichtung (16) zum Vergleich mit einem Referenzwert ermittelt wird.

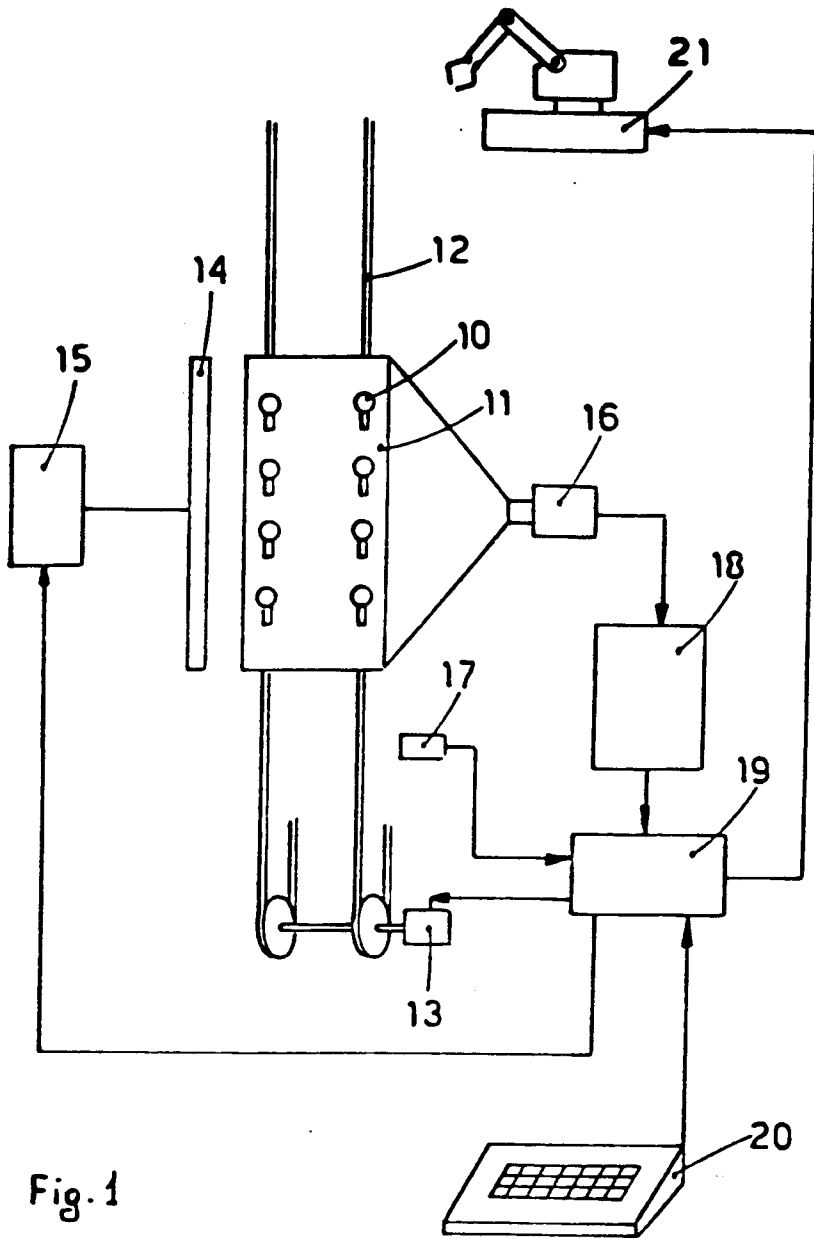


Fig. 1

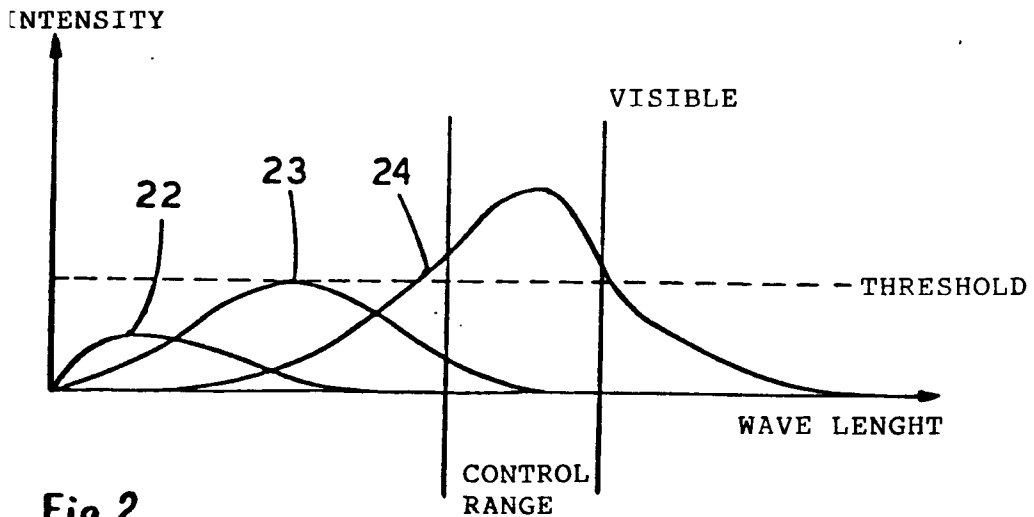


Fig. 2