



(51) International Patent Classification:

B22D 41/01 (2006.01) **B22D 27/06** (2006.01)
B22D 7/10 (2006.01) **B22D 15/00** (2006.01)
B22D 27/04 (2006.01) **C22B 9/22** (2006.01)

(21) International Application Number:

PCT/US2010/049418

(22) International Filing Date:

20 September 2010 (20.09.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/279,180 19 October 2009 (19.10.2009) US

(71) Applicant (for all designated States except US): **MICROPYRETICS HEATERS INTERNATIONAL, INC.** [US/US]; 750 Redna Terrace, Cincinnati, OH 45215 (US).

(72) Inventors; and

(71) Applicants : **BURADA, Venkata** [IN/US]; 8171 Meeting St. #120, West Chester, OH 45069 (US). **FOSTON, Kevin** [US/US]; 12010 Deerhorn Dr., Cincinnati, OH 45240 (US).

(74) Common Representative: **MICROPYRETICS HEATERS INTERNATIONAL, INC.**; 750 Redna Terrace, Cincinnati, OH 45215 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: CLEAN GREEN ENERGY ELECTRIC PROTECTORS FOR MATERIALS

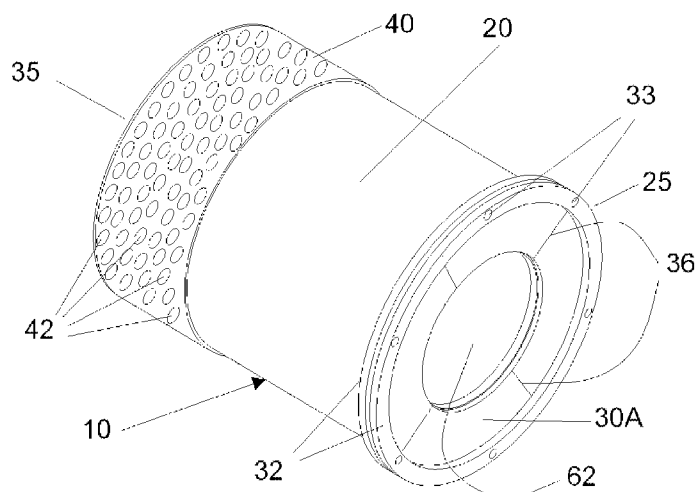


Fig 1

(57) Abstract: A device to generate and direct electric heat 10 for use over risers, drains, pathways and pour cups during solidification in which less than 2% plasma is utilized, comprising an outer shell 20 having one open heat delivery end 25, at least one lip 30 located at the open end 25, one closed end 35, at least one electric heating element 80 affixed within the closed 35 end and refractory material 60 surrounding the electric heating element 80. A method, employing said device 10, to improve the properties of cast alloys which comprises the heating and blanketing of a molten cast surface with an atmosphere of less than 2% plasma during solidification, said atmosphere of less than 2% plasma thereby controlling temperature during the solidification and shielding the molten cast surface from the affects of oxidation.



— *of inventorship (Rule 4.17(iv))*

Published:

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

Patent application of
Venkata Burada and Kevin Foston
for
CLEAN GREEN ENERGY ELECTRIC PROTECTORS FOR MATERIALS

CROSS-REFERNCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. provisional patent application Serial Number 61/279,180 which was filed on October 19, 2009 by the present inventors and is being co-filed with PCT patent application no. _____ entitled "Anti-Smudging, Better Gripping, Better Shelf-Life of Products and Surfaces."

BACKGROUND - FIELD

The present application relates to the improved control of solidification behavior during the melting and casting of metals where a clean melt and the limiting of loss of metal during the process are desired by the use of high power surface treatment.

BACKGROUND – PRIOR ART

Good casting or solidification processes are those in which the melt is clean during melting and casting. Presently, when castings are made the use of chills, insulation and exothermic compounds is common to affect temperature and thereby control solidification behavior. Clean melts and risers are often used for re-melts. Often, risers are heated so that the last solidification of the casting occurs at the riser top. In this application, solidification and solidification processes are used synonymously (see, for example, M.C. Fleming, *Solidification Processing*, McGraw-Hill, 1974).

Current methods for controlling solidification behavior include chills proposed in U.S. patents 7,017,648 by Newcomb et al. (2006), 6,840,062 by Dakan, Sr. et al. (2005), 6,298,898 by Mahadeva, et al. (2001), 5,027,881 by Horst, et al. (1991), 4,905,752 by Rama Prasad (1990) and 4,365,948 by Chaplain (1982). Also, the use of exothermic compounds to control solidification has been proposed in U.S. patents 6,446,698 by Soderstrom, et al (2002), 6,286,585 by Twardowska, et al (2001), 6,133,340 by Menon (2000), 5,263,534 by Ichikawa, et al. (1993), 4,694,884 by Butler, et al. (1987), 4,566,519 by Kawamura, et al. (1986) and 4,508,571 by Nakato, et al. (1985). Lastly, insulation in other forms employed to control solidification has been proposed by U.S. patents 7,134,478 by Ohtake, et al. (2006), 7,121,323 by Weyer, et al. (2006), 6,848,496 by Ban, et al. (2005), 5,884,687 by Schwarzkopf (1999), 5,622,218 by Pedroza-Conteras (1997) and 5,607,007 by Chandley (1997).

These current methods have limitations. Metal loss during oxidation is normally considerable during the manufacture of castings in air. These losses can often be the cause of impurities in re-melted alloys. Such metal loss due to oxidation is not adequately minimized by the employment of chills, insulation and exothermic compounds. Also, chemical treatments of exothermic compounds applied to surfaces may be toxic or otherwise environmentally harmful.

The use of chills and insulation may require specially designed molds and associated setting up that adds expense and time to the casting process. Often, the chills and insulation would need to be designed specifically for a specific application leading to a loss of flexibility and resulting increase in costs. Such devices may not be re-usable in many cases as well, adding again to the over-all cost of the process.

It is suggested by V. Rajamani, et al., in *Enhancement of Heat Transfer Due to Plasma Flow in Material Processing Applications*, American Society of Mechanical Engineers, Heat Transfer Division, (Publication) HTD Volume 376 HTD, Issue 2, 2005, Pages 889-893 and in *Heat-transfer enhancement using weakly ionized, atmospheric pressure plasma in metallurgical applications*, Metallurgical and Materials Transactions B: Process Metallurgy and Materials Processing Science Volume 37, Issue 4, August 2006, Pages 565-570 that heat treatment employing low amounts of ions can result in cleaner aluminum and enhanced heat transfer. The present application shows that the exposure of a low-ion atmosphere to any surface, using the claimed device and method, results in cleaner surfaces and materials in general, not only aluminum, which at the time of the above articles was unanticipated.

SUMMARY

In accordance with the favored embodiment, an electric Hot Top™ for use over risers and pour cups in solidification processes including, for example, superalloy, steel, chromium, aluminum and lead castings in which less than 2% plasma is utilized, comprises an outer shell having one open heat delivery end, at least one lip located at the open end, one closed end, such outer casing containing at least one electric heating element affixed to the closed end wherein said electric Hot Top™ will prevent metal loss through oxidation thereby improving general material properties including, but not limited to, fatigue, creep, wear and erosion.

DRAWINGS - Figures

FIG. 1 is a perspective view of the electric Hot Top™ to be positioned over risers and pour cups in castings according one embodiment.

FIG. 2 is a sectional view at the diameter of the electric Hot Top™ showing the position of the heating elements, refractory material and chamber formed by the refractory material.

FIG. 3 is a view of the open end of the electric Hot Top™.

FIG. 4 is a view of the lip in a sprocket configuration divided into four sections.

FIG. 5 is a side view of the electric Hot Top™ illustrating the position of slots near the open end.

FIG. 6 is a perspective view of an alternate embodiment of the electric Hot Top™.

FIG. 7 is a view of the lip in a circular one piece configuration.

DRAWINGS – Reference Numbers

10	electric Hot Top™	20	outer shell
21	interior	22	slot
23	mounting bracket	24	mounting bracket hole

25	open end	26	thermocouple
30A	multiple piece lip embodiment	30B	one piece lip embodiment
31	tooth	32	ring
33	screw	34	lip section
35	closed end	36	gap
40	perforated cap	41	bolt
42	perforation	60	refractory material
62	heated inner chamber	64	exit diameter
66	inner wall	68	ceiling
70	hole	80	heating element
82	terminal end	84	lug
86	connection hole		

DESCRIPTION – FIGS. 1, 2, 3, 4 and 5 – BEST MODE

The embodiment of the best mode of the electric Hot Top™ is illustrated in Fig. 1 (perspective view), Fig. 2 (sectional view), Fig. 3 (bottom view), Fig. 4 (top view of lip) and Fig. 5 (view showing slots). The electric Hot Top™ **10** comprises a cylindrical outer shell **20**, refractory material **60** and a plurality of electrically powered and controlled heating elements **80**. The outer shell **20** is typically constructed of metal having a thickness of between 1 mm and 4 mm. The outer shell **20** defines an interior **21** and is comprised of an open end **25** and a closed end **35**. A perforated cap **40** is attached to the closed end **35**. A lip **30A** is affixed by rings **32** and a plurality of screws **33** inside the outer shell **20** near the open end **25**. A mounting bracket **23** is affixed to the outer shell **20** in such a manner as to allow the electric Hot Top™ **10** to be positioned in a great variety of configurations in proximity to a work piece as required. In this embodiment the mounting bracket **23** is configured of sheet metal in

a square u-shape, the arms of the u-shape being attached to the electric Hot Top™ **10** in the direction of the axis of the outer shell **20** and perpendicular to the diameter of the outer shell **20**. The mounting bracket **23** is configured with multiple mounting bracket holes **24** allowing for the mounting of the electric Hot Top™ **10** on a variety of fixtures.

In this embodiment the lip **30A** is configured in a sprocket shape and composed of four equally sized lip sections **34** separated by gaps **36**. The gaps **36** allow for expansion of the lip sections **34** when heated. The outer shell **20** is configured with a plurality of slots **22** through the metal thickness of the open end **25** spaced to accept the teeth **31** of the lip **30A** which protrude through the outer shell **20**. The slots **22** are larger than the teeth **31** allowing for expansion of the teeth **31**. The rings **32** are clamped above and below the teeth **31** outside of the outer shell **20** by the plurality of screws **33** thereby holding lip **30A** in place. In this embodiment, and others, the lip **30A** is fabricated out of high temperature alloys including superalloys but not exclusively RA352 or Inconel type alloys.

The perforated cap **40** is fitted over the closed end **35** and extends beyond and encloses the closed end **35** of the outer shell **20**. The perforated cap **40** is secured to the outer shell **20** by a plurality of bolts **41**. The perforated cap **40** is pierced by a plurality of perforations **42** to provide cooling of and shielding from the heating elements **80**. It is anticipated that in other embodiments the perforated cap **40** may have, but is not limited to, round perforations, hexagonal perforations or slots.

The refractory material **60** is positioned within the interior **21** of the outer shell **20** to form a cylindrical heated inner chamber **62** and is contained in place by the lip **30A** as well as the outer shell **20**. The ratio between the outer shell **20** and the heated inner chamber **62** is 5:3. The heated inner chamber **62** is comprised of a hot exit diameter **64** an inner wall **66** and a ceiling **68**. In this embodiment the ratio of the diameter of the heated inner chamber **62** and the hot exit diameter **64** is 1:1. In other embodiments the heated inner chamber **62** may be

conical in shape with the ratio between the heated inner chamber **62** and the hot exit diameter **64** ranging from 1:1 to 1:10. The refractory material **60** is composed of alternating layers of dense nano and fibrous material with high alumina content. In other embodiments the refractory material **60** may be castable.

Heating elements **80** project and are secured through holes **70** in the ceiling **68** of the refractory material **60** from the closed end **35** of the outer shell **20** into the heated inner chamber **62**. The heating elements **80** may have compositions of, but are not limited to, silicon compounds or molybdenum disilicide. The heating elements **80** may U-shaped or square-shaped. When there are multiple heating elements **80** there may be a combination of square and U-shaped heating elements **80**. In the present embodiment the heating elements **80** are five in number, U-shaped and connected electrically in series. The heating elements **80** have terminal ends **82** the opposite the U-shape or square-shape bends. The heating elements **80** and terminal ends **82** have diameters which can vary from 0.5mm to 100mm in diameter. Lugs **84** are affixed mechanically or by welding, brazing or gluing to the terminal ends **82** and have connection holes **86** ranging from 1.5mm to 254mm in diameter. The heating elements **80** are arranged with a first heating element **80** positioned through a hole **70** located in the center of the ceiling **68** and projected into the center of the heated inner chamber **62**. Four other heating elements **80** are positioned symmetrically through holes **70** at 90° apart, around the first heating element **80**. The holes **70** are oval in shape and are placed at approximately one inch from the inner wall **66** of the heated inner chamber **62**. It is anticipated that differing numbers of heating elements **80** may be used. The construction allows for the arrangement of one to several heating elements in an energy efficient and space saving manner.

At least one thermocouple **26** is positioned through the refractory material **60** into the heated inner chamber **66** near the heating elements **80**. The thermocouple **26** will read and/or

control the temperature in the heated inner chamber **66**. In this embodiment the thermocouple **26** is a type B, but in other embodiments the type is anticipated to be from, but not limited to, the list of J, K, T, L, N, R, P, C, Z AND MHI-E2 types. The length of the thermocouple **26** and associated wiring can vary from 25 mm to 2540 mm with the ratio of the height of the heated inner chamber **66** and the length of the thermocouple **26** being 1:1 to 1:10. The thermocouple **26** and heating elements **80** are connected permanently or non-permanently to an electric power source and controller giving versatility and flexibility to the device. A typical power supply and controller may be a three phase SCR with soft start. The thermocouple **26** may also terminals protection shield and the thermocouple compensating cable may be protected with a special high temperature sleeve and strain relief mounting.

Operation – Figs. 1, 2, 3, 4 and 5

The electric Hot Top™ **10** is positioned in any needed orientation (horizontally, vertically, etc.) by use of the mounting bracket **23** to direct the open end **25** towards the casting or work piece in need of clean surface heating. The lip **30A** may rest directly on the work piece or the electric heat generation device may be suspended above, beside or below the work piece with the mounting bracket **23**. An electric current is sent through the heating elements **80** thereby generating heat that is directed from a port defined by the heated inner chamber **62** towards a heat riser, for example. Typically, for superalloy and similar metal temperature melts, a temperature beyond 1700° C must be reached. The heating elements **80**, whether in a U-shaped or a square shaped configuration, composed of silicon compounds or molybdenum disilicide are able to exceed 1850° C in an air environment. It is expected that different sized embodiments of the electric Hot Top™ **10** will generate temperatures of >500°C, >750°C, >1000°C, >1250°C, >1500°C, >1750°C and >2000°C. A temperature of about 1500°C is considered particularly attractive for anticipated applications. It is fully

anticipated that the low-ion atmosphere may also include other gases or solid/powders that may react to enhance the low-ion usage.

The use of the heating elements **80** fabricated of silicon compounds or molybdenum disilicide with the refractory material **60** composed of a combination of (dense) nano and fibrous refractory material creates the conditions needed for a very clean melt. The distance that the thermocouple **26** is placed from the casting or the melt is very critical and can range from 12.5 mm to 2540 mm. A small blanket of ionization is produced by these heating elements **80** and their positioning in this type of refractory material **60**. The ionization is typically less than 2% of the total atmosphere with the inner heated chamber **62**. The blanketing of a casting with ionization results in a clean melt with less material wastage than current methods utilizing exothermic compounds, chills and insulation.

Alternate Embodiment – Figs. 6 and 7

Illustrated in Figs. 6 and 7 is an alternate embodiment of the electric Hot Top™ **10** having a lip **30B** which is of one piece construction and having a circular shape. The lip **30A** is secured to interior of the outer shell **20** of the electric Hot Top™ **10**. This embodiment gives the outer shell **20** of the electric Hot Top™ **10** a more streamlined surface by eliminating the slots **22**, rings **32** and screws **33** depicted in Figs. 1, 2, 3, 4 and 5.

Advantages

While fully realizing there are many other advantages provided by the electric Hot Top™ **10**, from the description above, a number of advantages of the embodiments of the electric hot top become evident including:

(a) The use of the electric Hot Top™ **10** allows for a cleaner melt resulting in less wastage of material and better material properties, such as creep, fatigue and overall

reliability of cast parts. The low-ion atmospheres utilized here are superior to a high-ion atmosphere since low amounts of ions are controllable, and, in effect, beneficially catalyze reactions on a surface or in a gas-ion mixture while high amounts of ions are not controllable and can detrimentally melt and damage surfaces.

(b) Electric heat employed in such as manner is environmentally safer than the current practice of using exothermic compounds, which may be toxic, to control cooling in castings. Electric heat is more efficient and also does not produce the hydrocarbons and pollution associated with gas and open flame heat sources. The electric Hot Top™ **10**, as a result, is greener than current products.

(c) The embodiments presented here show the versatility of the electric Hot Top™ **10**. The electric Hot Top™ **10** may be configured for the specific needs of the user. Different configurations, numbers and materials can be used in regards to the heating elements **80** allowing for varying temperature and power usage. Size and configuration of the perforated cap **40** is variable to allow for more cooling or spatial constraints. The design of the refractory material **60** can be tailored for density and heat loss requirements. The dimensions of the heated inner chamber **62** can be altered to give a different ration between the heated inner chamber itself and the exit diameter **64** allowing the electric heat to be more effectively directed.

(d) Lip **30A** and **30B** permit the electric Hot Top™ **10** to be place directly upon a work piece such as a pour cup thereby efficiently directing the heat where needed. Lip **30A** has the further advantage, in conjunction with slots **22**, rings **32** and screws **33** of being easily replaceable in case of oxidation, damage or changing needs. The gaps **36** approximately measure between 2 and 10 millimeters, depending on the radius and the thickness of the lip **30A**, and permit expansion of the lip sections **34** upon heating. Due to extreme temperature variations between surfaces and assemblies of greater than 1000°C, gaps **36** between the lip

sections **34** are necessary to permit expansion which allows the device to survive the stresses created by these temperature differentials.

Conclusions, Ramifications and Scope

The present application, the CLEAN and GREEN ENERGY electric Hot Top™ (trademark of MHI, Inc.), is a new electric heater which can be employed to direct energy to the surface of a casting in a manner so as to be considered an electric heat generator usable instead of exothermic compounds. The Hot Top™ directly supplies heat produced by the recombination of ions in a blanketing of a work-piece in low-ion plasma atmosphere as well as through radiative processes. The major heat transfer of this device occurs via radiation and ion recombination. Minor heat transfer is accomplished by natural convection as opposed to the co-filed PCT patent application no. _____ entitled “Anti-Smudging, Better Gripping, Better Shelf-Life of Products and Surfaces” which mostly utilizes forced convection for heat transfer with radiation as a minor contributor. It is designed to be employed for long-term exposures of materials. Experience has indicated that different emissivities of the surfaces inside of the device may have a stabilizing effect on the low-ion atmosphere leading to improved performance. The use of the electric Hot Top™ alleviates the stated prior art problems of impurities and metal loss due to oxidation associated with the current state of the art in casting and the control of solidification behavior as well as having additional advantages. It may be employed for melt cleaning, metal cleaning and metal grain and the enhancing of microstructures.

An initial, significant advantage of the electric Hot Top™ is that it can provide heat to any desired area of the casting and casting process itself including the pouring sprue/cup, risers, holders, as well as the liquid material itself, during the solidification process giving greater flexibility over current methods. The device can be placed directly on the pour cup,

casting or other work-piece and it can be positioned and mounted vertically, horizontally or diagonally. It can be oriented upside-down, right side-up or sideways according to need. Placement may also be in close proximity rather than in contact with a work-piece. This versatility offers much better control and thermal management than do current methods.

The electric Hot Top™, relying on electric heat, produces a clean heat that is more energy efficient than current non-electric processes, without the toxic, noxious and environmentally hazardous results associated with chemicals and exothermic compounds. Electrically powered heating elements, as employed here, are superior to other heating methods that include steam, flame, gas, combustible mixtures, vacuum and semi-vacuum processes by being cleaner, safer, more versatile, more flexible, more environmentally compatible, more controllable and more efficient. The clean material produced leads to improved fatigue and creep properties in metals as well as increased overall reliability of products produced utilizing clean heat as produced by the electric Hot Top™. Although major advantages of the electric Hot Top™ over the prior art include non-toxicity and ease of operation it may be employed in conjunction with exothermic compounds and chills. It is also anticipated that it may be used in environments other than air including, but not limited to, vacuum and vapor (metal, polymer etc.) and during changing atmospheric conditions.

The advances in the field of art provided by the electric Hot Top™ rely on the key discovery that a clean melt is produced by the blanketing of the surface of the casting by small amount of ionization that is specially created by molysilicde heating elements and a combination of (dense) nano and fibrous refractories (see U.S. Patent 6,113,802 by Penumella (2000)). Typically, less than 2% of the total atmosphere within the space formed by the top surface of the casting and the interior chamber of the electric hot top is composed of plasma, which is a partially ionized gas, having a percentage of charged particles. Here, when employing the word plasma it is interchangeably used with ions and ion and non-

ionized gasses. The overall ion content may be less than 10%, 1% or even 0.1%. It is estimated that the blanketing of the surface of the casting by the plasma will result in a cast metal wastage savings of 0.1-1%, 1-10% or 20-50% as well as a reduced contamination of the melt (see U.S. Patent Application Publication 2008/136069 by Reddy (2008)).

Several designs of the electric Hot Top™ have been developed and fabricated which have been employed during superalloy casting producing superior casting results with low metal loss. The term superalloy is considered to encompass all high temperature metallic alloys containing predominantly iron, aluminum, chromium or nickel. Although clean castings with low metal loss have been obtained in the casting of superalloys while utilizing the electric Hot Top™ it is anticipated that similar excellent results will be achieved for castings of all nickel, iron, aluminum, chromium, tungsten and other metals and in other solidification methods such as equiaxed casts, directional solidification, investment casting, lost wax processes, polyurethane and similar polymer casting, and other currently employed discrete and continuous types of casting processes. The cleanliness of melt offered by the electric Hot Top™ improves a broad class of mechanical properties including fatigue, wear, creep and creep-fatigue for specific alloys at high temperatures. Although the device is predominately electrically radiant, it should be made clear that ion transfer by natural and forced convective conduction are also anticipated.

Accordingly, it is demonstrated that the electric heat generating process for use with metal casting provided by the electric Hot Top™ **10** provides many important advantages over current practice. It is versatile since it can be designed in many configurations and employed in many applications specific to a user. Due to the combination of refractory material **60** with high alumina content and heating elements **80** made of molybdenum

disilicide or silicon compounds, the electric Hot Top™ **10** generates an electric heat that is composed of less than 2% plasma producing a superior clean melt.

The above descriptions provide examples of specifics of possible embodiments of the electric Hot Top™ and should not be used to limit the scope of all possible embodiments. Thus the scope of the embodiments should not be limited by the examples and descriptions given, but should be determined from the claims and their legal equivalents.

CLAIMS

We claim,

- 1) A device to generate and direct electric heat for use over risers, drains, pathways and pour cups during solidification in which less than 2% plasma is utilized, comprising an outer shell having one open heat delivery end, at least one lip located at said open end, one closed end, at least one electric heating element affixed within said closed end and refractory material surrounding said electric heating element.
- 2) The device of claim 1 wherein said lip is configured to contain said refractory material within said outer shell.
- 3) The device of claim 1 further comprising, multiple heating elements wherein said multiple heating elements may be positioned in an energy efficient and space-saving configuration.
- 4) The device of claim 1, further comprising a perforated cap located at said closed end.
- 5) The device of claim 1 wherein said electric heating element is composed of molybdenum disilicide.
- 6) The device of claim 1 wherein said electric heating element is composed of a silicon compound.
- 7) The device of claim 1 wherein said electric heating element is configured in a u-shape or a square shape.
- 8) The device of claim 1 further including at least a second heating element connected in series with the first heating element.
- 9) The device of claim 8 wherein the electric heating elements are composed of a combination of u-shaped and square shaped configurations.
- 10) The device of claim 1 having a mounting bracket affixed to said outer casing of said device, said mounting bracket allowing for the positioning of said device in any

vertical, horizontal or diagonal direction, such positioning being in direct contact with, or at a distance from a work piece.

- 11) The device of claim 1 wherein said electric heating element located within said outer casing is surrounded by a combination of dense and fibrous refractory material with high alumina content.
- 12) The device of claim 1 wherein the ratio by volume and by thickness of the dense refractory and the fibrous refractory is between 1:1 and 1:4.
- 13) The device of claim 1 wherein said outer casing forms an outer diameter and wherein the refractory material surrounding the heating element form an inner chamber having an inner diameter such that the ratio of said outer diameter and said inner diameter is 5:3.
- 14) The device of claim 1 wherein said outer casing and said lip are constructed of a metal of a thickness between 1 and 4 millimeters.
- 15) The device of claim 1 wherein said outer casing and said lip are constructed of a metal composed of a high temperature alloy, said high temperature alloys including, but not limited to, superalloys, Ni-based alloys, Cr-based alloys or Fe-based alloys.
- 16) The device of claim 1 wherein said lip is completely circular or in the shape of a sprocket.
- 17) The device of claim 1 wherein said lip is divided into at least four equal or unequal lip sections, said lip sections being separated by a plurality of gaps which allow for expansion of said lip sections.
- 18) The device of claim 17 wherein the gaps are about 2 to 10 millimeters in width.
- 19) A device to generate and direct electric heat for use over risers, drains, pathways and pour cups during solidification such that surfaces are blanketed with ions in which less than 2% plasma is utilized, comprising an outer shell having one open heat

delivery end, at least one lip located at said open end, one closed end, at least one electric heating element affixed within said closed end and refractory material surrounding said electric heating element such that the electric heat is composed of heat from ion re-combination and heat radiation emitted over 1000°C with a varying emissivity greater than 0.3%.

- 20) A method to improve the properties of cast alloys which comprises the heating and blanketing of a molten cast surface with an atmosphere of less than 2% plasma during solidification, said atmosphere of less than 2% plasma thereby controlling temperature during the solidification and shielding the molten cast surface from the affects of oxidation.
- 21) The method of claim 20 wherein said atmosphere of less than 2% plasma is generated and directed by a device comprising an outer shell having one open heat delivery end, at least one lip located at said open end, one closed end, at least one electric heating element affixed to said closed end and refractory material surrounding said electric heating element.
- 22) The method of claim 21 wherein the said device contains less than 2% plasma within said refractory material.
- 23) The method of claim 20 wherein said heating comprises the re-combination of ions in the blanketing of a molten cast surface and radiative heat emitted over 1000°C with varying emissivity of over 0.3%.
- 24) The device of claim 1 further comprising at least one thermocouple.
- 25) The device of claim 1 wherein the electric heating element has at least one terminal end.
- 26) The device of claim 25 wherein the terminal end has a lug attached.

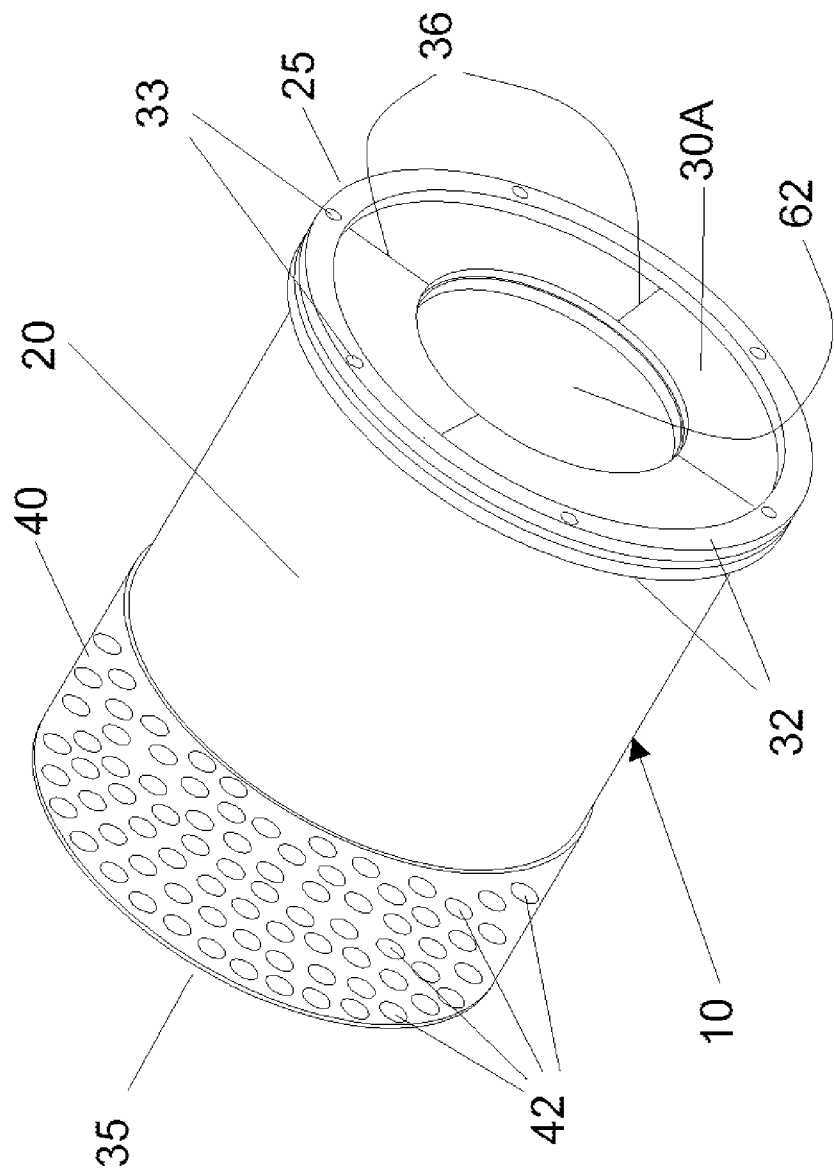


Fig 1

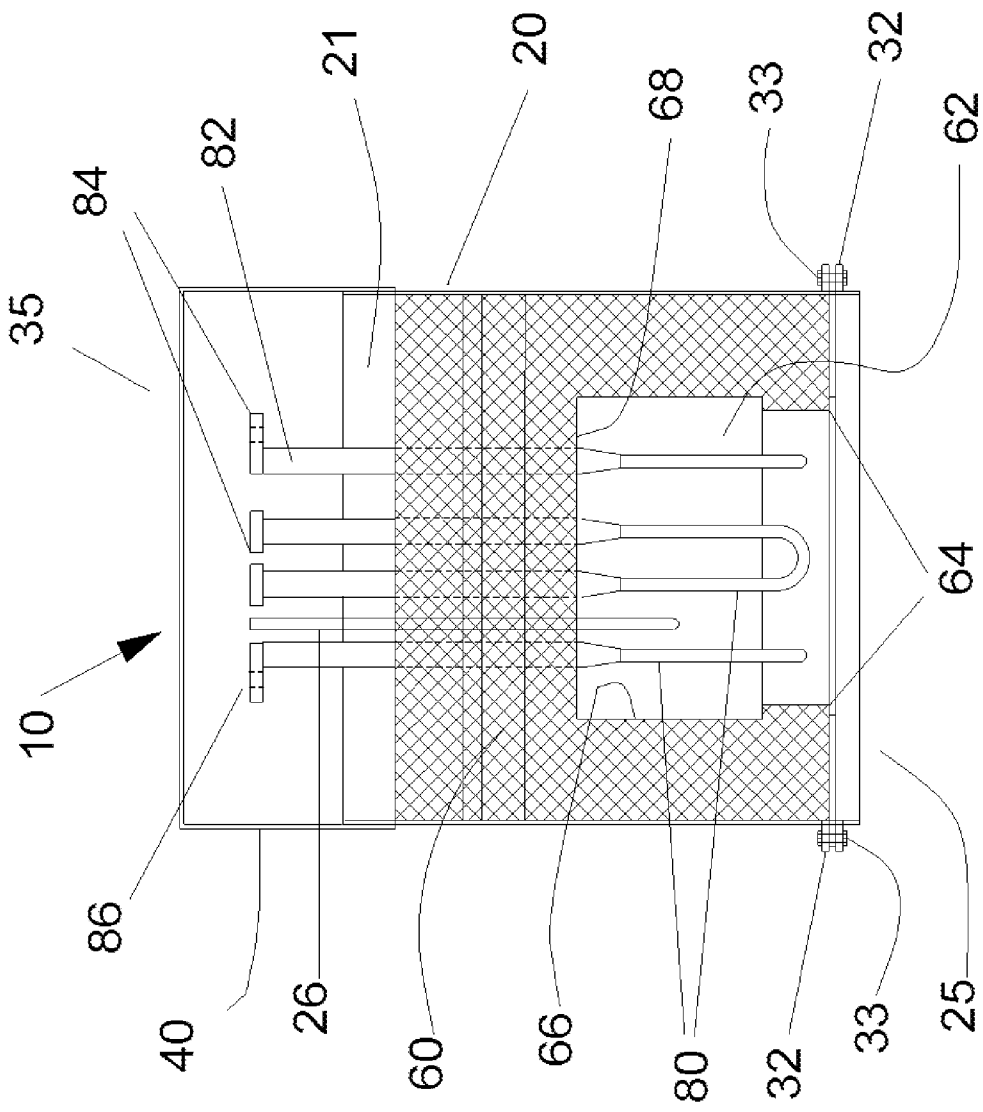


Fig. 2

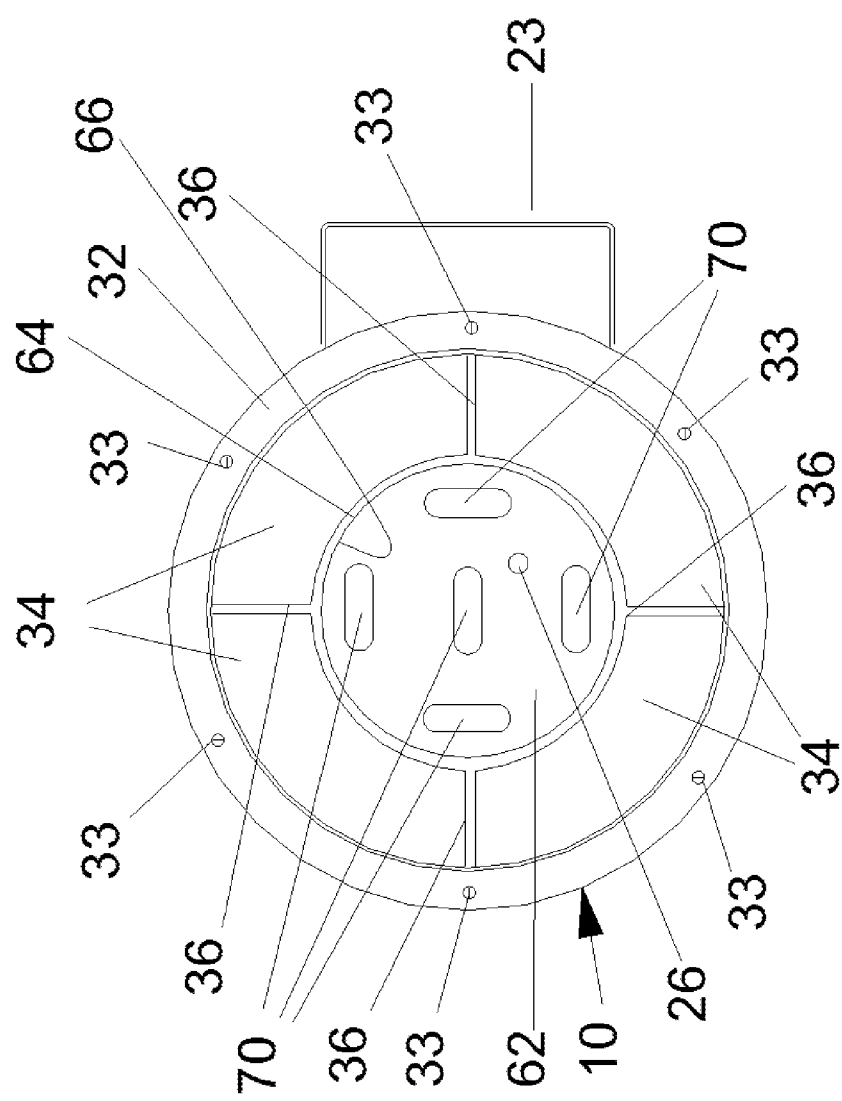
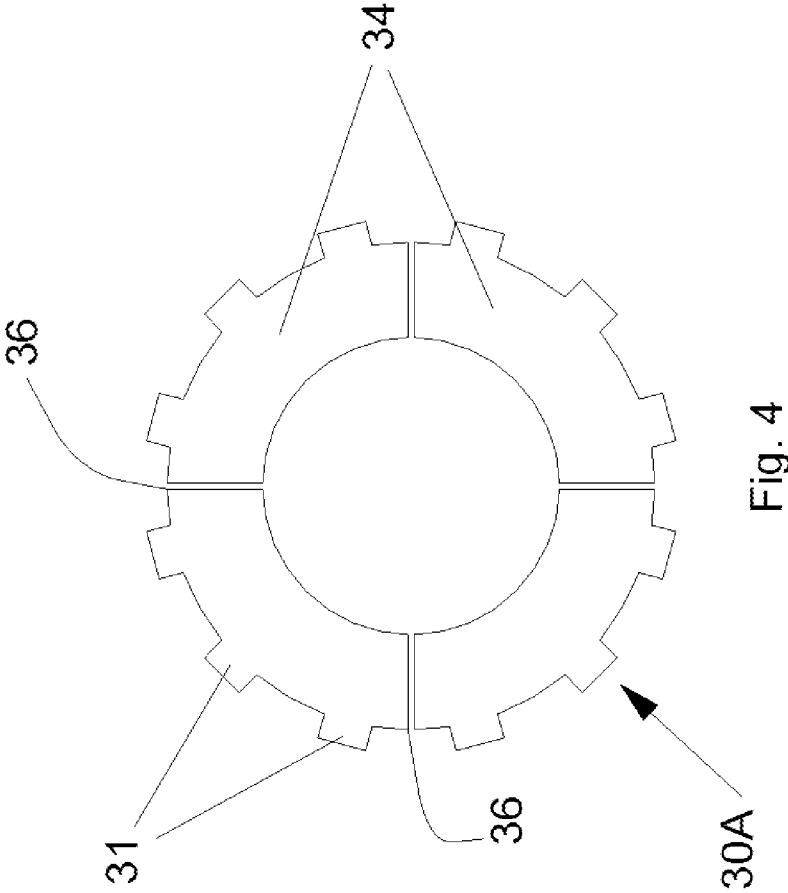


Fig. 3



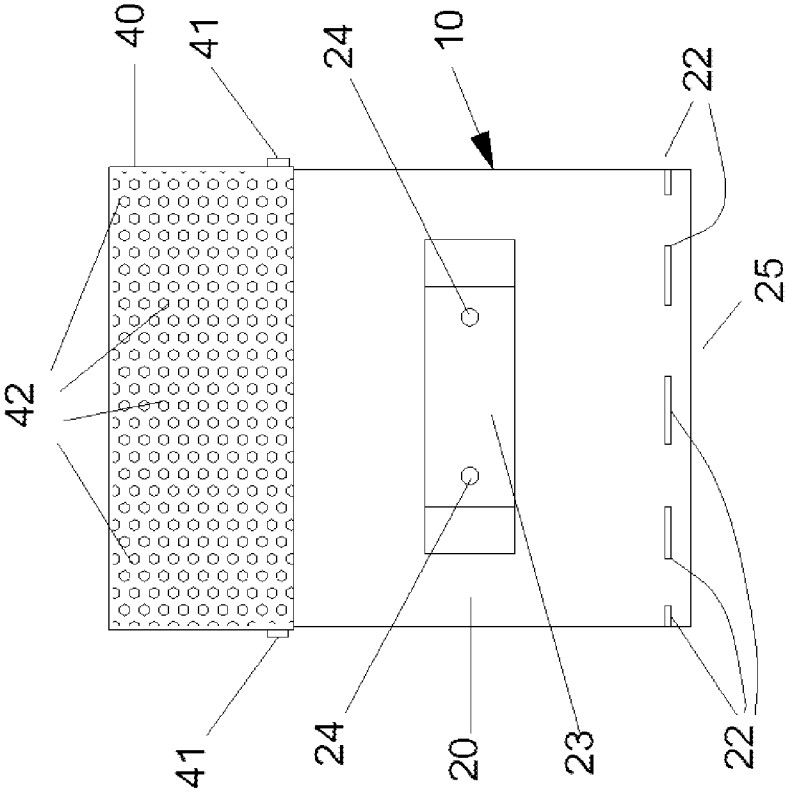


Fig. 5

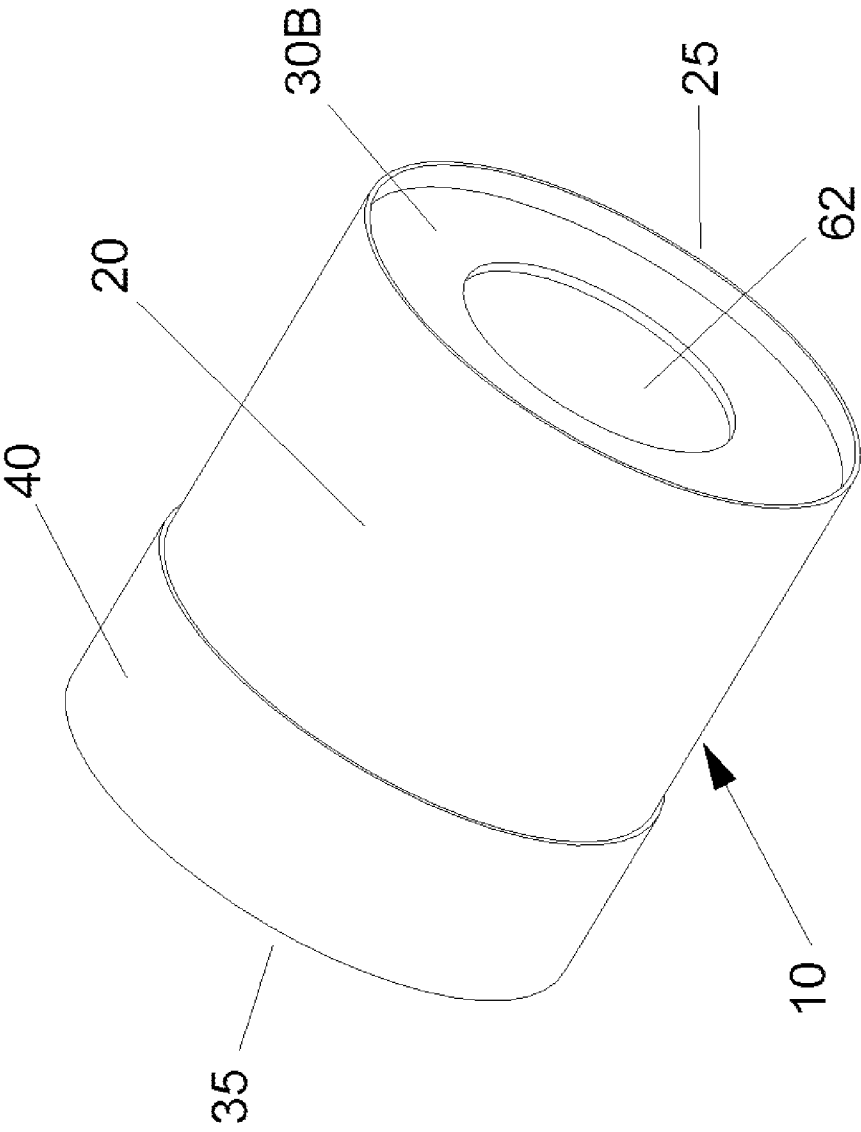


Fig. 6

