



- (51) **International Patent Classification:**
G02B 6/38 (2006.01)
- (21) **International Application Number:**
PCT/US2012/039126
- (22) **International Filing Date:**
23 May 2012 (23.05.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/113,635 23 May 2011 (23.05.2011) US
- (71) **Applicant (for all designated States except US):** **SENKO ADVANCED COMPONENTS, INC.** [US/US]; 450 Donald Lynch Boulevard, Marlboro, Massachusetts 01752 (US).
- (72) **Inventor; and**
- (71) **Applicant :** **GNIADEK, Jeffrey** [US/US]; 419 Kelly Road, Northbridge, Massachusetts 01534 (US).
- (74) **Agents:** **BRANCOLINI, John R.** et al.; Pepper Hamilton LLP, Suite 2000, 500 Grant Street, Pittsburgh, Pennsylvania 15219 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))

(54) **Title:** TRUE ONE PIECE HOUSING FIBER OPTIC ADAPTER

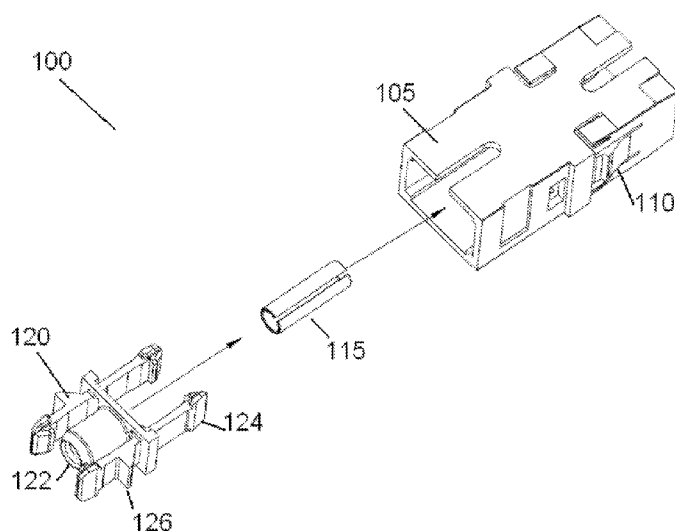


FIGURE 2

(57) **Abstract:** A fiber optic adapter includes a one piece housing, a dual connector latch, and an alignment sleeve. The one piece housing includes a first alignment cylinder configured to receive a first optical fiber and at least one snap receiving recess. The dual connector latch includes a second alignment cylinder configured to receive a second optical fiber and at least one snap feature configured to engage within the snap receiving recess such that the connector latch locks within the housing. The alignment sleeve is configured to be placed within the first alignment cylinder and the second alignment cylinder such that the alignment sleeve

A. TITLE:

TRUE ONE PIECE HOUSING FIBER OPTIC ADAPTER

B. - E. NOT APPLICABLE

F. BACKGROUND

[0001] The present disclosure relates to an adapter or a coupling for holding two fiber optic connectors in alignment. More specifically, the present disclosure relates to an adapter or coupling having a one piece, unibody housing.

[0002] Recently, the use of fiber optics for communications purposes has grown immensely. Data, voice, and other communication networks are increasingly using fiber optics to carry information. An optical fiber is generally a glass fiber configured to carry light. Individual fibers may be grouped into a line capable of carrying large amounts of data simultaneously.

[0003] When constructing a fiber optic network, each individual fiber is generally connected to both a source and a destination device. Additionally, along the fiber optic run between the source and the destination, various connections or couplings may be made on the optical fiber to adjust the length of the fiber. Each connection or coupling requires a connector and adapter to align the fibers such that the light can transmit without interruption. A typical connector includes two symmetrical housings, each housing having a connector latch. An alignment sleeve is placed within the connector latches to ensure the fibers are properly aligned. Then, the two housings are welded (i.e., via ultrasonic welding), riveted, or otherwise attached to each other, thereby forming a coupling. Individual optic fibers are then placed within each connector latch, the alignment sleeve aligning the fibers.

[0004] This exemplary coupling is expensive to produce as numerous parts are required (each of which may require separate manufacturing), and a welding, riveting or other attachment process must be done to connect the two symmetrical housings. Additionally, alignment issues may result from the attachment process as the two symmetrical housing components may shift during welding.

[0005] One approach to reduce the amount of components required is shown in U.S. Patent No. 5,317,663 (the '663 patent), issued May 31, 1994 to Beard et al, the contents of which are incorporated herein by reference. In the '663 patent, an adapter is taught which includes a single piece housing in which both connector latches are placed, along with an alignment sleeve, to provide an adapter. However, to place the components within the housing, a window is provided in the housing. A housing cover is provided which is welded to the housing to cover the window. While the design of the '663 patent may eliminate any issues with alignment resulting from the attachment of the two housing components, it still requires numerous components and multiple assembly steps including welding the housing cover over the window.

G. SUMMARY

[0006] This disclosure is not limited to the particular systems, devices and methods described, as these may vary. The terminology used in the description is for the purpose of describing the particular versions or embodiments only, and is not intended to limit the scope.

[0007] As used in this document, the singular forms "a," "an," and "the" include plural references unless the context clearly dictates otherwise. Unless defined otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art. Nothing in this document is to be construed as an admission that the embodiments described in this document are not entitled to antedate such

disclosure by virtue of prior invention. As used in this document, the term “comprising” means “including, but not limited to.”

[0008] In one general respect, the embodiments disclose a fiber optic adapter. The fiber optic adapter includes a one piece housing, a dual connector latch, and an alignment sleeve. The one piece housing includes a first alignment cylinder configured to receive a first optic fiber and at least one snap receiving recess. The dual connector latch includes a second alignment cylinder configured to receive a second optic fiber and at least one snap feature configured to engage within the snap receiving recess such that the connector latch locks within the housing. The alignment sleeve is configured to be placed within the first alignment cylinder and the second alignment cylinder such that the alignment sleeve is positioned prior to the dual connector latch being locked into the housing.

[0009] In another general respect, the embodiments disclose an alternative fiber optic adapter. The fiber optic adapter includes a one piece housing comprising a first alignment cylinder configured to receive a first optic fiber, a dual connector latch comprising a second alignment cylinder configured to receive a second optic fiber, and an alignment sleeve configured to be placed within the first alignment cylinder and the second alignment cylinder, wherein the alignment sleeve is positioned prior to the dual connector latch being locked into the housing.

H. BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 illustrates an exemplary fiber optic adapter including a one piece housing according to an embodiment.

[0011] FIG. 2 illustrates an exploded view of the fiber optic adapter of FIG. 1.

[0012] FIG. 3a illustrates a cross-sectional view of the one piece housing of FIG. 1.

[0013] FIG. 3b illustrates a cross-sectional view of the fiber optic adapter of FIG. 1.

I. DETAILED DESCRIPTION

[0014] FIG. 1 illustrates an exemplary fiber optic connector or adapter **100** including a one piece housing **105**. The housing **105** may be made from a plastic or polymer via various manufacturing methods. For example, the housing **105** may be made from an injection molded polymer. The housing **105** may include various external features such as one or more integral bulkhead latches **110** for latching the housing (and thus the adapter **100**) to another device such as the input port on a network router.

[0015] FIG. 2 illustrates an exploded view of adapter **100**. In this exemplary embodiment, the adapter **100** includes three major components: (1) the single piece housing **105**, (2) an alignment sleeve **115**, and (3) a dual connector latch **120**. The dual connector latch may include several components such as an alignment cylinder **122** for receiving a first optic fiber, retaining clips **124** configured to frictionally hold or engage a fiber optic tip enclosure, and one or more snap features **126**. As shown in FIG. 2, two sets of retaining clips **124** are integrated into the dual connector latch **120**, a first set for engaging a first optic fiber and a second set for engaging a second optic fiber. An optic fiber is typically terminated in a grip housing including notches for engaging with the retaining clips **124**. Within each grip housing is an end of the optic fiber including a ferrule and a ferrule holder. However, manufacture of optic fibers, including terminations and associated housings is well known in the art and will not be discussed in additional detail. As also shown in FIG. 2, the snap features **126** are small, integral protrusions positioned and shaped to frictional hold or engage one or more snap receiving recesses within the housing **105**. Similar to the housing **105**, the dual connector latch **120** may be manufactured as a single injection molded component.

[0016] FIG. 3a illustrates a cross-sectional view of the housing **105**. The housing **105** may include several features such as an integral alignment cylinder **130** (similar to

alignment cylinder **122** of the dual connector latch **120**) configured to frictionally hold an optic fiber. The integral alignment cylinder **130** may be formed along with the housing **105** during a single injection molding process. The housing **105** may also include one or more snap receiving recesses **132**. The snap receiving recesses **132** may be positioned and sized to accept the snap features **126** of the dual connector latch **120**. In this example, the snap receiving recesses **132** are indentations in the sidewall of the housing **105** such that, when pushed into the housing, the snap features **126** of the dual connector latch **120** grab against the receiving recesses, thereby locking the dual connector latch into the housing.

[0017] FIG. 3b illustrates a cross sectional view of adapter **100** after the alignment sleeve **115** and the dual connector latch **120** have been assembled within the housing **105**. As shown in FIG. 3b, the snap features **126** of the dual connector latch **120** are positioned within the snap receiving recess **132**, thereby locking the dual connector latch within the housing. Similarly, a set of retaining clips **124** of the dual connecting latch **120** are positioned about the integral alignment cylinder **130** such that any optic fiber placed into the integral alignment cylinder will be held in place by the retaining clips.

[0018] Referring again to FIG. 2, to assemble the adapter **100**, the alignment sleeve **115** is positioned such that it is aligned with both the alignment cylinder **122** of the dual connector latch **120**, as well as the alignment cylinder **130** of the housing **105**. After aligning, the dual connector latch **120** is placed within the housing **105** and a force is applied on the dual connector latch until the snap feature **126** locks into the snap receiving recess **132** of the housing. Once the snap feature **126** is locked, assembly of the adapter **100** is complete. In this configuration, only 3 components are required and no assembly techniques beyond the application of a pushing force is required.

[0019] The one piece adapter housing as taught herein eliminates the need to ultrasonically weld the components together as is required by the prior art. This reduces the

cost of manufacturing and assembling additional components. Additionally, depending on the design of the snap features and associated snap receiving recesses, the adapter may be disassembled to replace a worn part (e.g., if a retaining clip on the dual latch connector breaks) or otherwise repair the adapter. This feature would not be possible in the prior art as the adapters are permanently welded into a solid piece.

[0020] The various components described above may be constructed by manufacturing methods well known in the art. Materials for use in construction of the various components listed above may include various polymers, plastics, metals, glass, and other similar suitable materials. For example, the housing **105** may be manufactured via an plastic injection molding process. Alternatively, the housing **105** may be manufactured from a suitable metal via a milling process. Additional materials and manufacturing methods will be well known to those skilled in the art.

[0021] The above examples are not intended to limit the invention, but merely to serve as an illustration of how the invention might be constructed and operated.

[0022] Various of the above-disclosed and other features and functions, or alternatives thereof, may be combined into many other different systems or applications. Various presently unforeseen or unanticipated alternatives, modifications, variations or improvements therein may be subsequently made by those skilled in the art, each of which is also intended to be encompassed by the disclosed embodiments.

J. CLAIMS

What is claimed is:

1. A fiber optic adapter comprising:
 - a one piece housing comprising
 - a first alignment cylinder configured to receive a first optic fiber, and
 - at least one snap receiving recess;
 - a dual connector latch comprising:
 - a second alignment cylinder configured to receive a second optic fiber, and
 - at least one snap feature configured to engage within the snap receiving recesssuch that the connector latch locks within the housing; and
 - an alignment sleeve configured to be placed within the first alignment cylinder and the second alignment cylinder, wherein the alignment sleeve is positioned prior to the dual connector latch being locked into the housing.
2. The fiber optic adapter of claim 1, wherein the first alignment cylinder is integral to the housing.
 3. The fiber optic adapter of claim 1, wherein the at least one snap receiving recess is an indentation in a sidewall of the housing.
 4. The fiber optic adapter of claim 3, wherein the at least one snap feature is a protrusion from the dual connector latch corresponding to the indentation in the sidewall of the housing.
 5. The fiber optic adapter of claim 1, wherein the housing is a single injection-molded component.

6. The fiber optic adapter of claim 1 wherein the dual connector latch is a single injection molded component.
7. The fiber optic adapter of claim 1, wherein the dual connector latch further comprises:
 - a first set of retaining clips for engaging a first optic fiber; and
 - a second set of retaining clips for engaging a second optic fiber.
8. A fiber optic adapter comprising:
 - a one piece housing comprising a first alignment cylinder configured to receive a first optic fiber;
 - a dual connector latch comprising a second alignment cylinder configured to receive a second optic fiber; and
 - an alignment sleeve configured to be placed within the first alignment cylinder and the second alignment cylinder, wherein the alignment sleeve is positioned prior to the dual connector latch being locked into the housing.
9. The fiber optic adapter of claim 8, wherein the housing further comprises at least one snap receiving recess.
10. The fiber optic adapter of claim 9, wherein the dual connector latch further comprises at least one snap feature configured to engage within the snap receiving recess such that the connector latch locks within the housing.

11. The fiber optic adapter of claim 8, wherein the first alignment cylinder is integral to the housing.
12. The fiber optic adapter of claim 8, wherein the at least one snap receiving recess is an indentation in a sidewall of the housing.
13. The fiber optic adapter of claim 12, wherein the at least one snap feature is a protrusion from the dual connector latch corresponding to the indentation in the sidewall of the housing.
14. The fiber optic adapter of claim 8, wherein the housing is a single injection-molded component.
15. The fiber optic adapter of claim 8 wherein the dual connector latch is a single injection molded component.
16. The fiber optic adapter of claim 8, wherein the dual connector latch further comprises:
a first set of retaining clips for engaging a first optic fiber; and
a second set of retaining clips for engaging a second optic fiber.

1/3

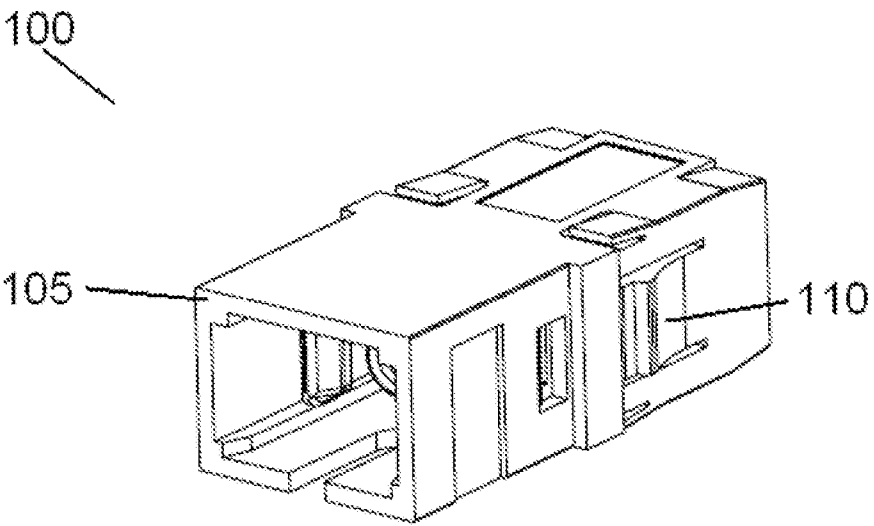


FIGURE 1

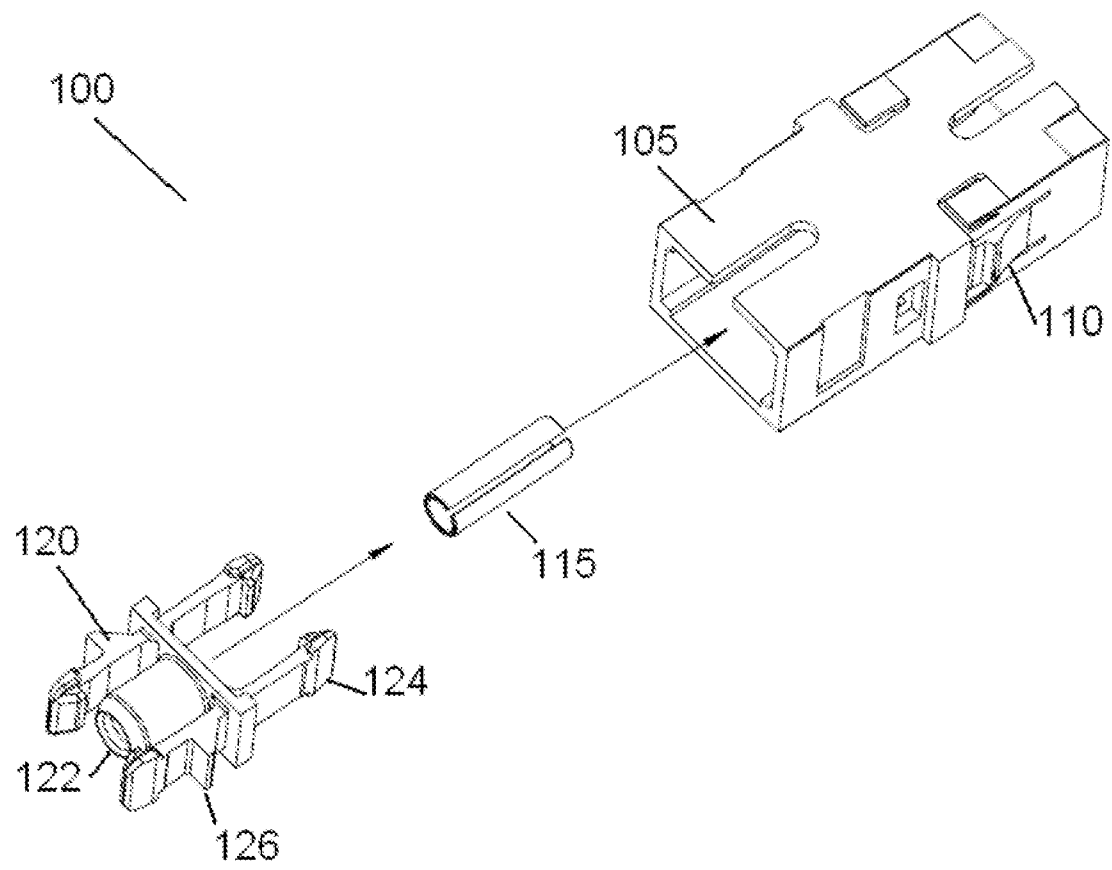


FIGURE 2

3/3

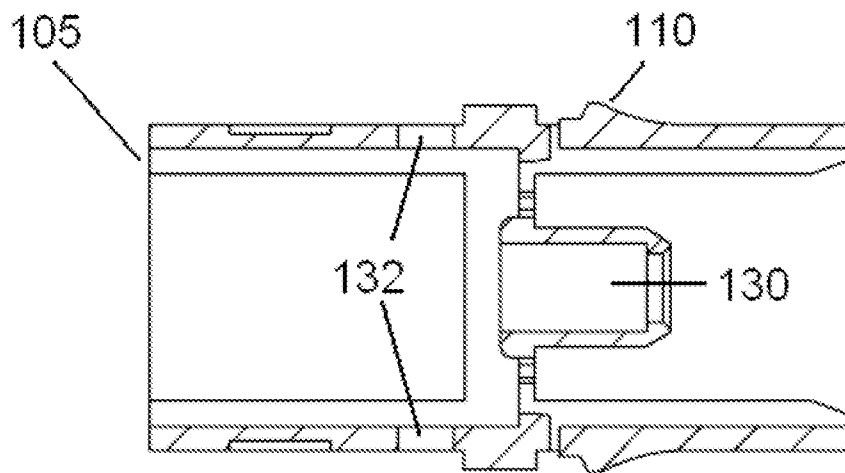


FIGURE 3a

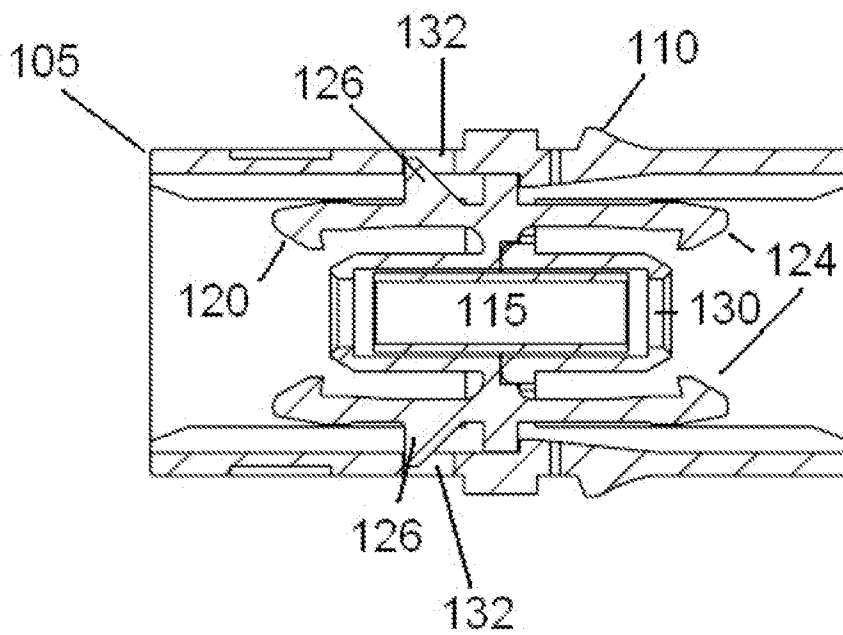


FIGURE 3b

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2012/039126

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G02B 6/38 (2012.01)

USPC - 385/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - G02B 6/36, 6/38, 6/40 (2012.01)

USPC - 385/55, 56, 60, 62

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Google Patents, Google

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2009/0028507 A1 (JONES et al) 29 January 2009 (29.01.2009) entire document	1-16
Y	US 5,971,626 A (KNOELL et al) 26 October 1999 (26.10.1999) entire document	1-16
A	US 6,206,581 B1 (DRISCOLL et al) 27 March 2001 (27.03.2001) entire document	1-16
A	US 7,695,199 B2 (TEO et al) 13 April 2010 (13.04.2010) entire document	1-16

☐ Further documents are listed in the continuation of Box C.


* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 August 2012

Date of mailing of the international search report

27 AUG 2012

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774