




(86) Date de dépôt PCT/PCT Filing Date: 2006/11/06
(87) Date publication PCT/PCT Publication Date: 2008/05/02
(45) Date de délivrance/Issue Date: 2016/02/16
(85) Entrée phase nationale/National Entry: 2009/11/18
(86) N° demande PCT/PCT Application No.: AU 2006/001653
(87) N° publication PCT/PCT Publication No.: 2008/049147
(30) Priorité/Priority: 2006/10/24 (AU2006905892)

(51) Cl.Int./Int.Cl. *F02M 23/14* (2006.01),
F02M 29/00 (2006.01), *F02M 31/06* (2006.01),
F02M 53/04 (2006.01)
(72) Inventeur/Inventor:
JOHNSON, DAVID LITTLEWOOD, AU
(73) Propriétaire/Owner:
DAVIES, DAVID, GB
(74) Agent: MACPHERSON LESLIE & TYERMAN LLP

(54) Titre : SYSTEME DE DISTRIBUTION DE CARBURANT ET D'ADMISSION POUR MOTEUR A PISTON
(54) Title: INDUCTION AND FUEL DELIVERY SYSTEM FOR PISTON ENGINE

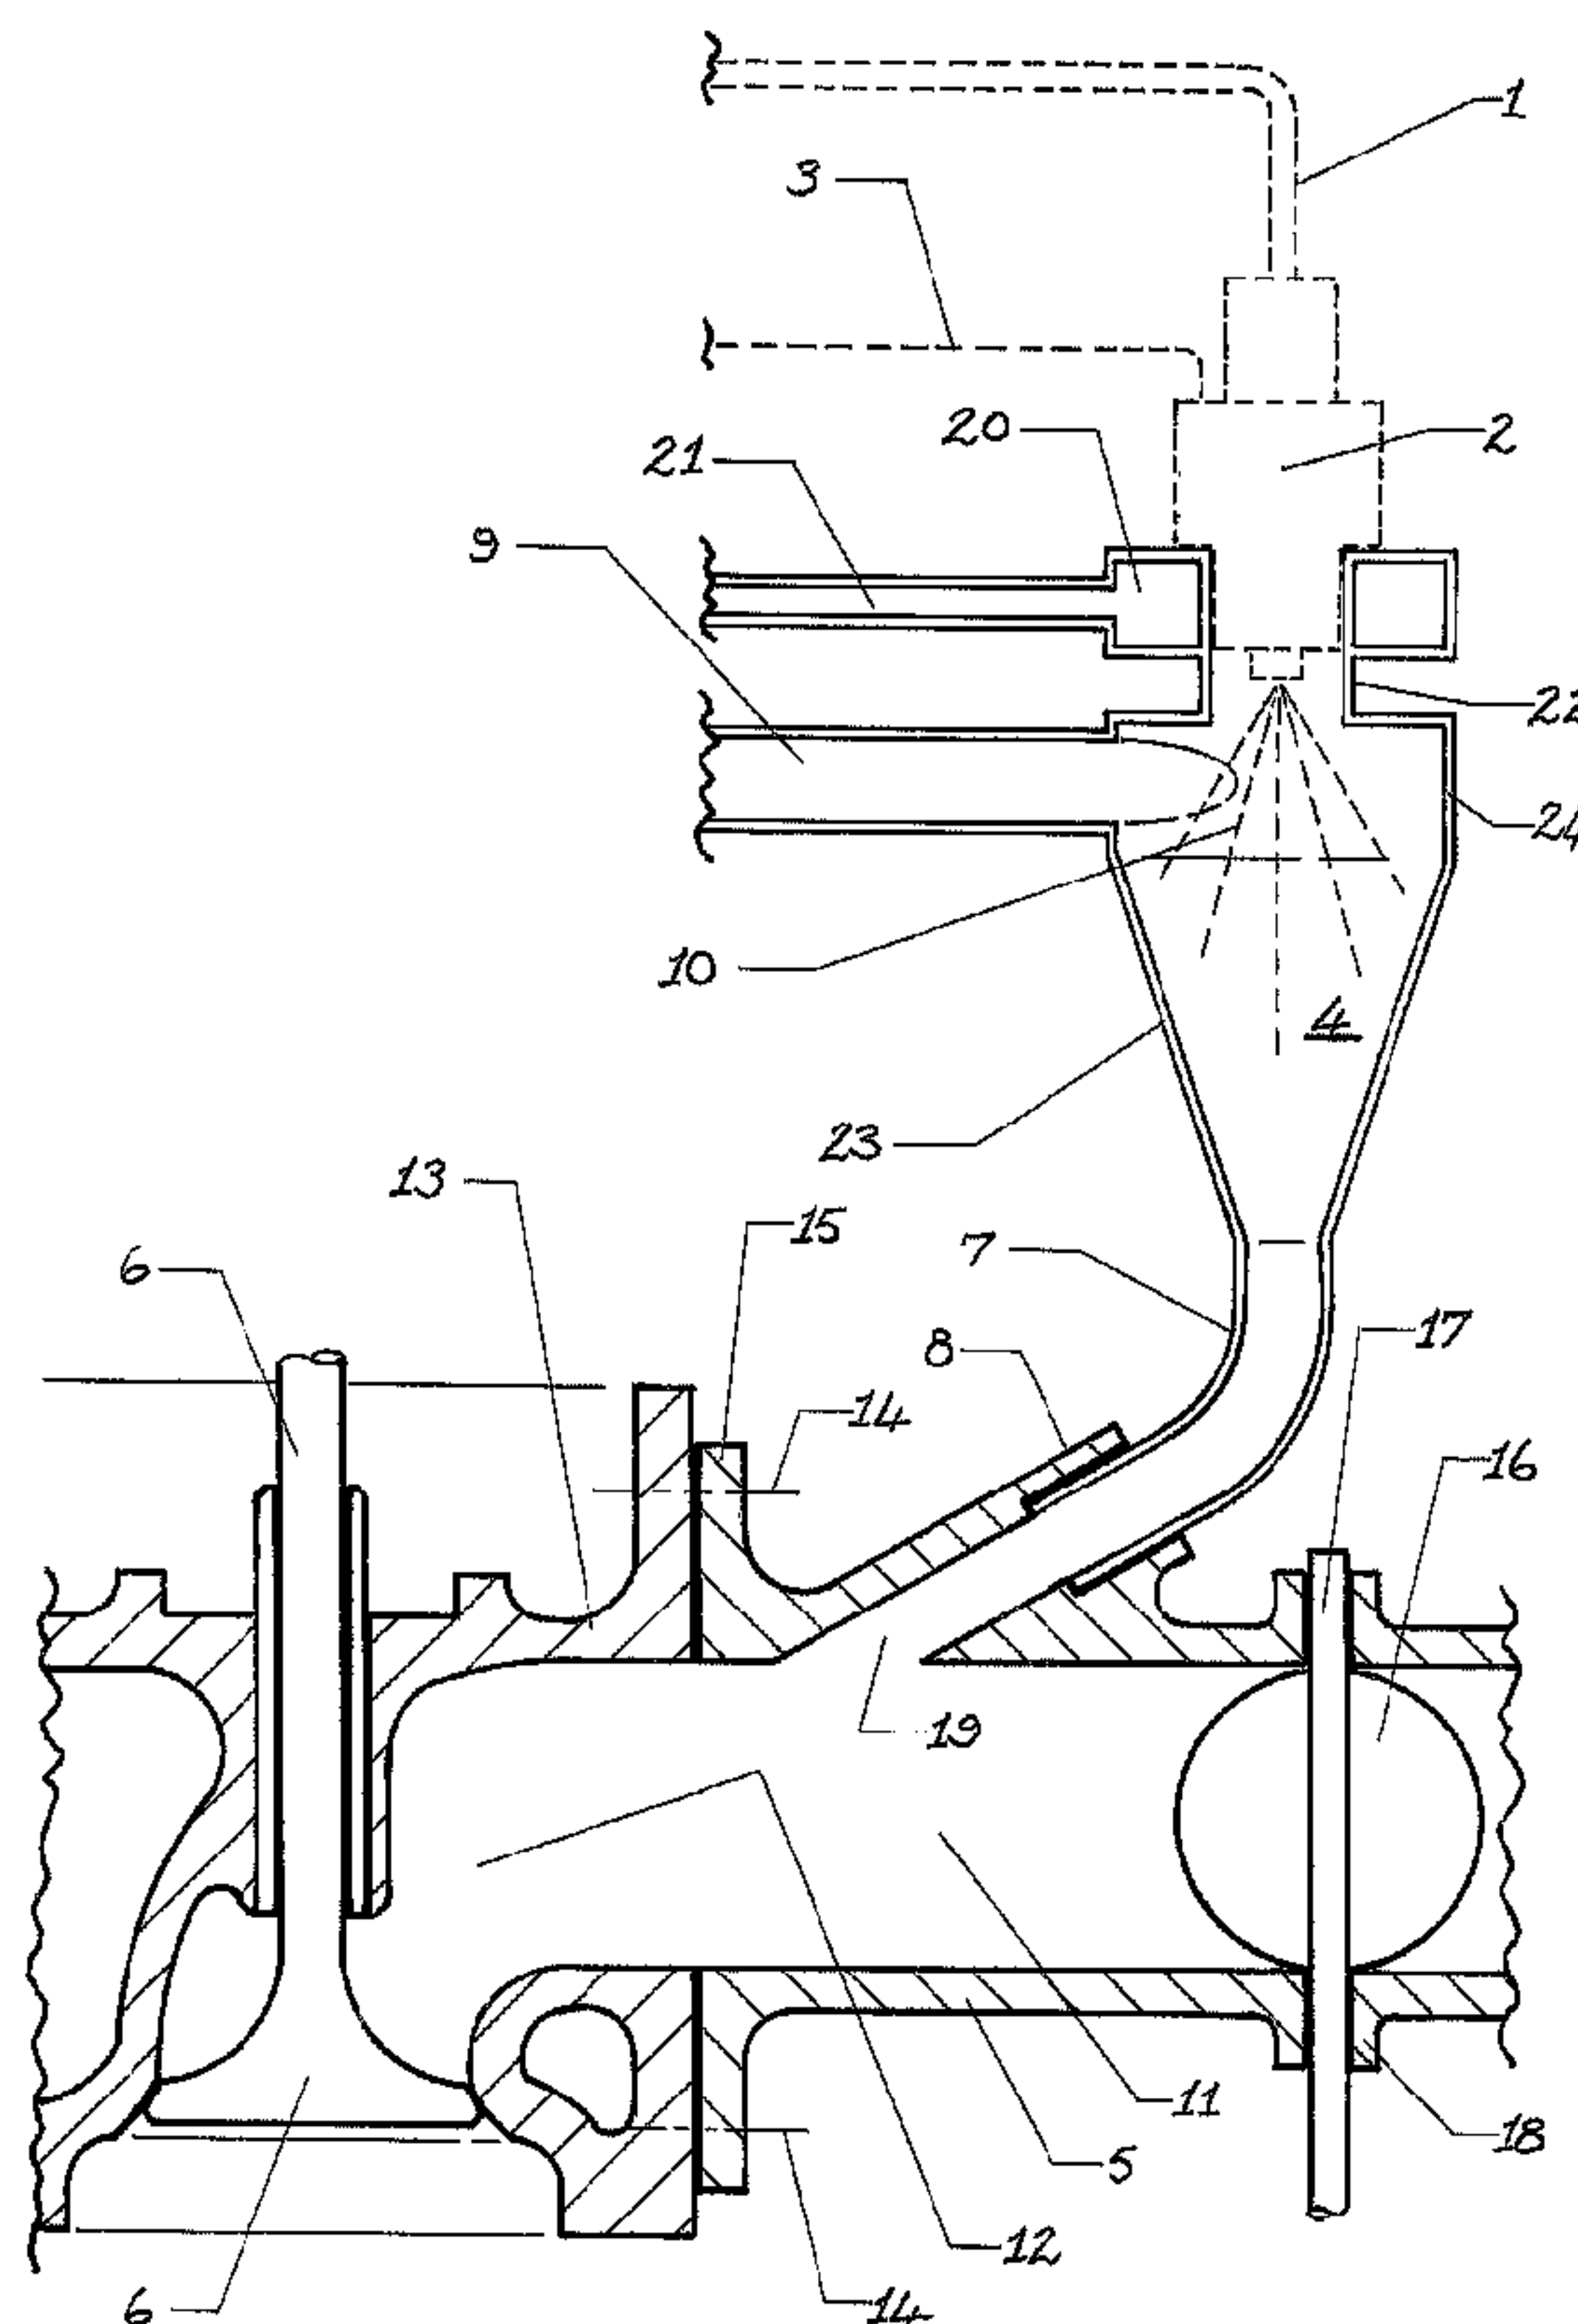

(57) Abrégé/Abstract:

Apparatus constituting part of an induction and fuel delivery system for a cylinder of a piston internal combustion engine comprising a small cyclone into which is tangentially discharged a flow of heated air to generate a sustained vortex of high rotational speed; a modulatable fuel injector delivering a flow of atomised fuel into said small cyclone wherein it undergoes flash evaporation and energetic mixing; a delivery duct connecting said small cyclone to the inlet tract of said cylinder wherein said vortex fuel-air mixture is mixed with heated induction air; and means to prevent overheating of said modulatable fuel injector.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 May 2008 (02.05.2008)

PCT

(10) International Publication Number
WO 2008/049147 A1

(51) International Patent Classification:

F02M 23/14 (2006.01) *F02M 29/00* (2006.01)
F02M 31/06 (2006.01) *F02M 53/04* (2006.01)

(21) International Application Number:

PCT/AU2006/001653

(22) International Filing Date:

6 November 2006 (06.11.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2006905892 24 October 2006 (24.10.2006) AU

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant and

(72) Inventor: JOHNSON, David, Littlewood [AU/AU]; 13
Messmate Road, Ferntree Gully, VIC 3156 (AU).

Published:

— with international search report

(54) Title: INDUCTION AND FUEL DELIVERY SYSTEM FOR PISTON ENGINE

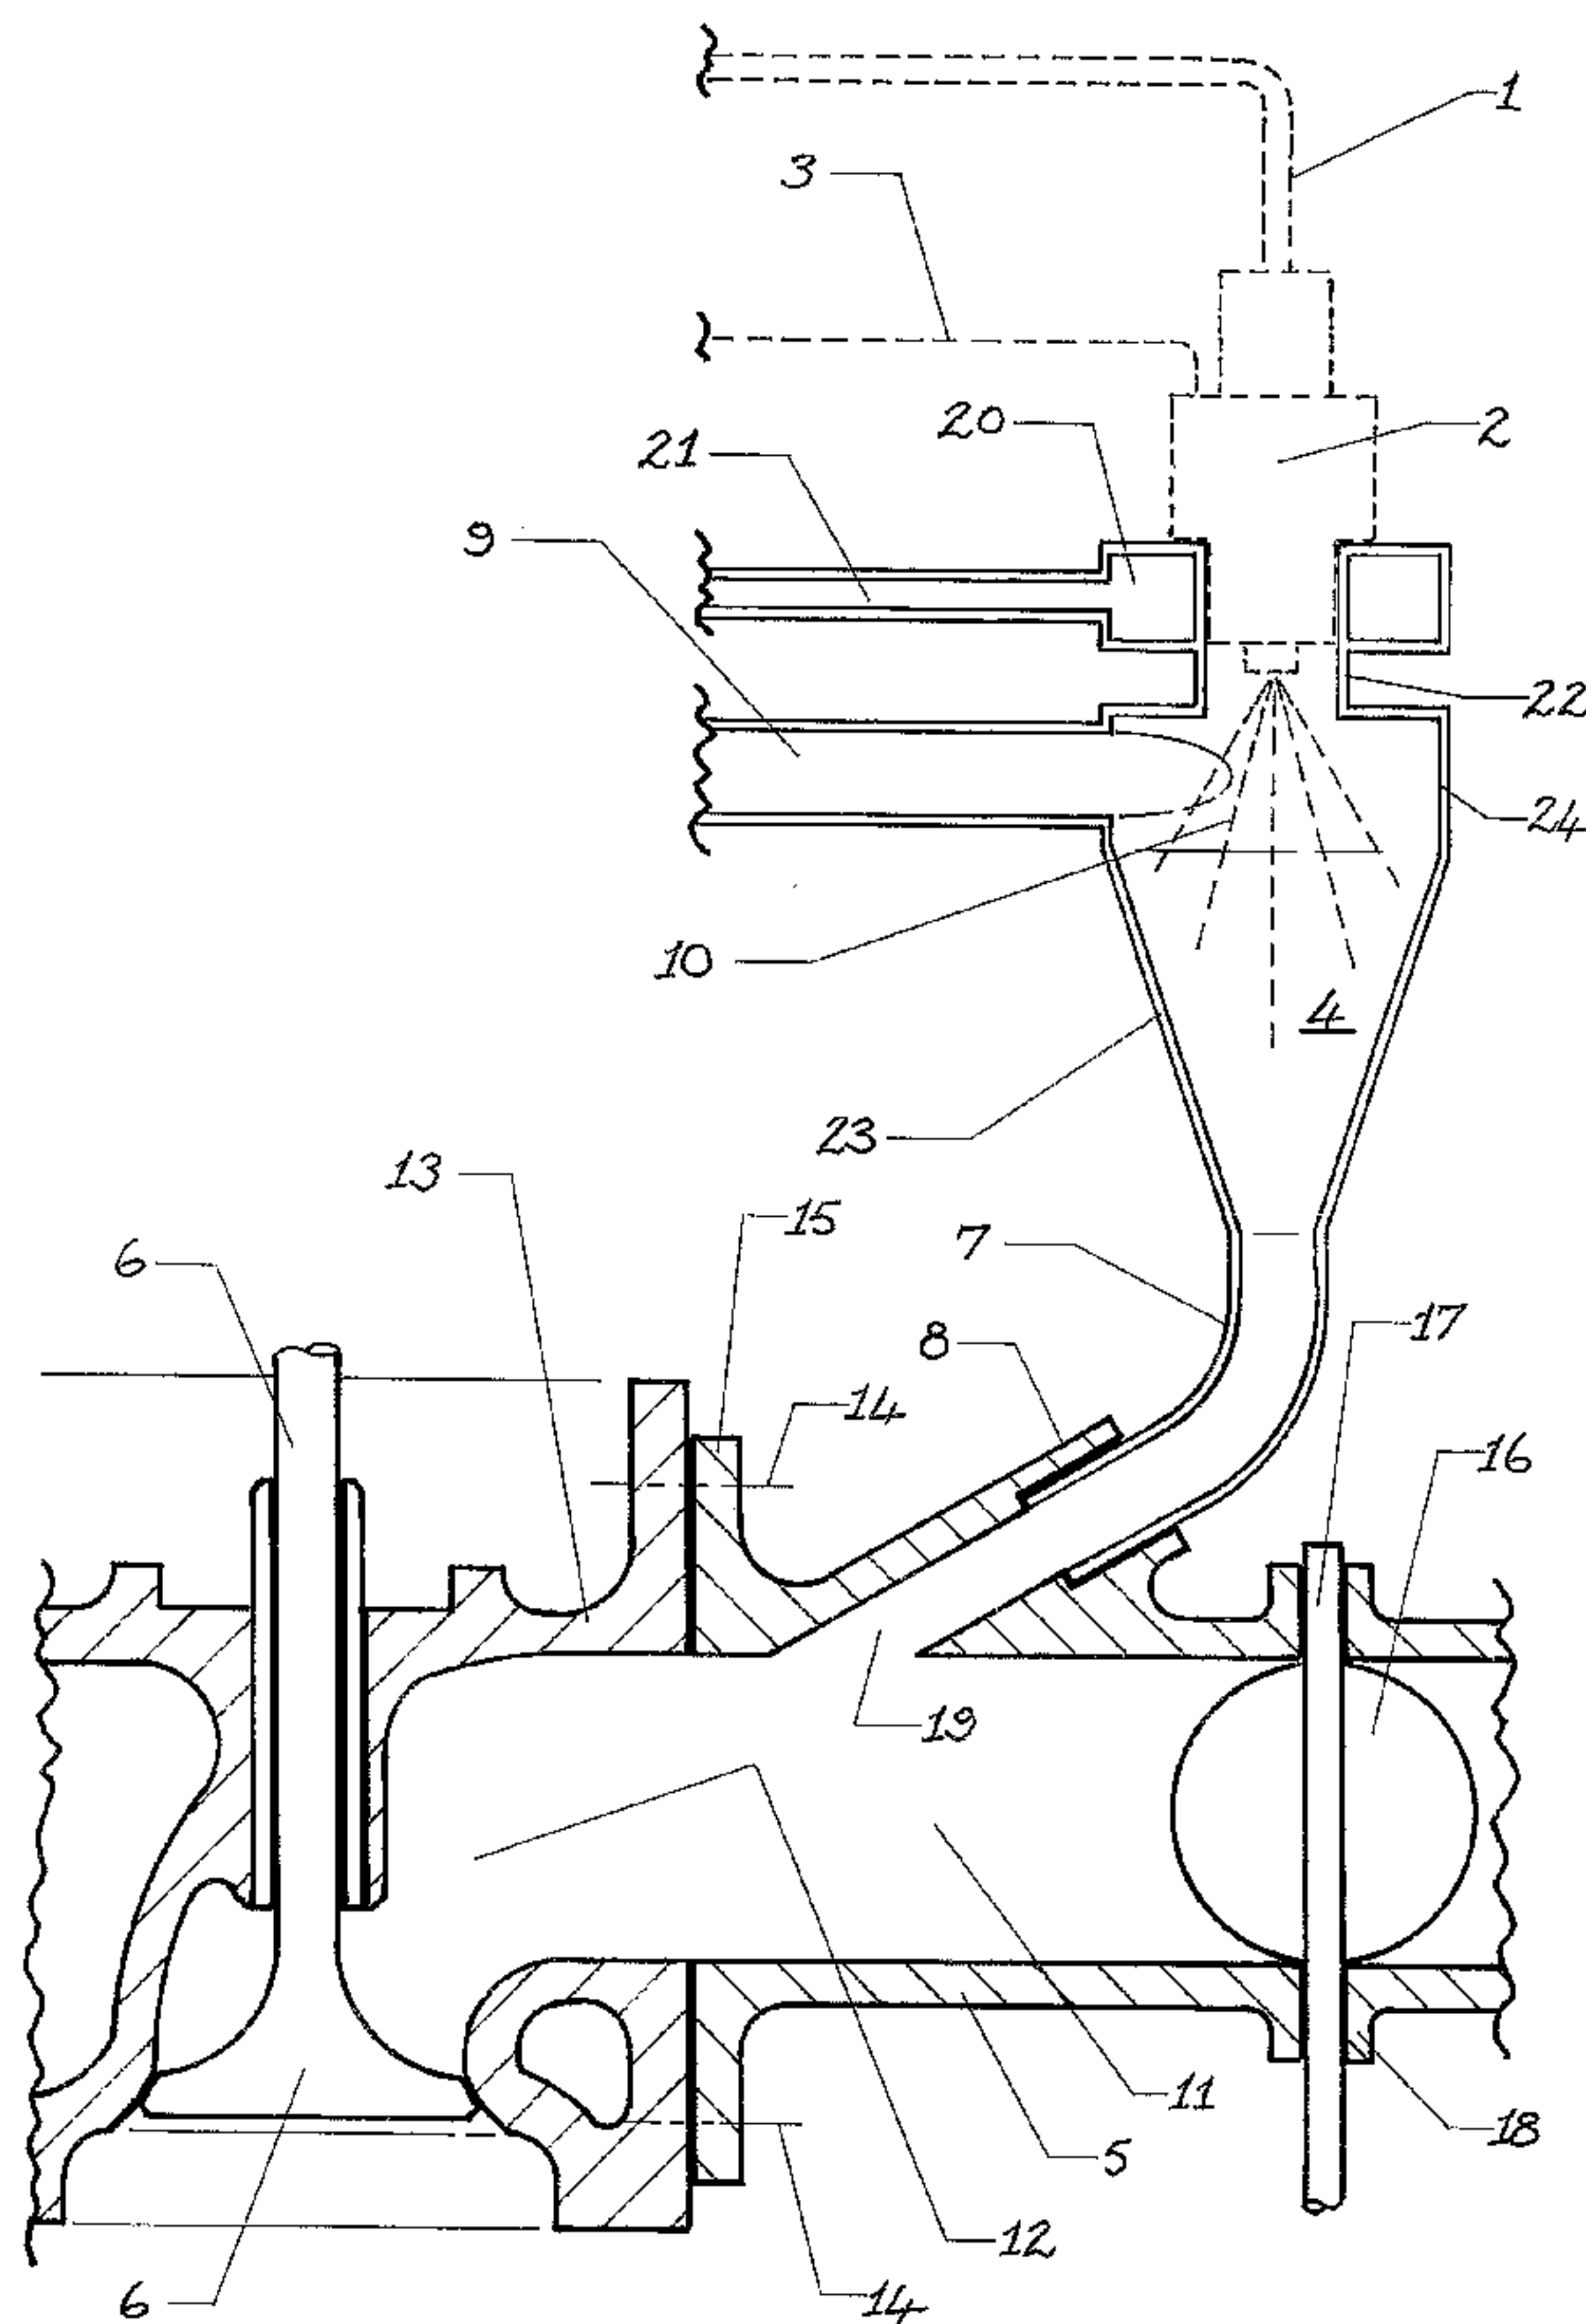

(57) Abstract: Apparatus constituting part of an induction and fuel delivery system for a cylinder of a piston internal combustion engine comprising a small cyclone into which is tangentially discharged a flow of heated air to generate a sustained vortex of high rotational speed; a modifiable fuel injector delivering a flow of atomised fuel into said small cyclone wherein it undergoes flash evaporation and energetic mixing; a delivery duct connecting said small cyclone to the inlet tract of said cylinder wherein said vortex fuel-air mixture is mixed with heated induction air; and means to prevent overheating of said modifiable fuel injector.

WO 2008/049147 A1

INDUCTION AND FUEL DELIVERY SYSTEM FOR PISTON ENGINE

This invention relates to methods and apparatus for use in piston internal combustion engines for conditioning the inlet airstream and for conditioning fuel discharged into the inlet airstream.

5 In the operation of gasoline-fuelled piston internal combustion engines, it is normal practice for fuel to be discharged into the inlet airstream in the form of finely divided liquid droplets. Droplet delivery has the advantage that fuel in this form displaces a minimum of air, thereby making available a maximum of oxygen for combustion of the fuel in the engine cylinder. While some evaporation of the droplet
10 fuel does occur during passage of the mixture through the inlet tract and further evaporation occurs as a result of the temperature rise associated with compression of the charge in the cylinder, part of the fuel may remain in liquid droplet form at the onset of ignition. As ignition is initiated in the vapour content of the charge, it is therefore necessary to provide a greater quantity of fuel in the charge in order to ensure a
15 sufficiently rich vapour mixture for ignition to reliably occur under all operating conditions. In conventionally carburetted engines, lean mixtures are provided for low power operation and additional fuel is released through power enrichment provisions during high BMEPs.

It has been demonstrated that, once a self-propagating flame front has been
20 established in the cylinder, it will reliably propagate throughout the generality of a charge having a much leaner mixture strength than that required for reliable ignition to occur. Many systems have been proposed for exploiting this effect by providing a locally enriched mixture in the ignition region. Such charge stratification methods are well known in the art, but have not found favour because of the extra cost and complexity
25 they entail. In some engines, reliability of ignition in lean mixtures has been improved by providing larger, more energetic or multiple ignition sources in each cylinder.

It is also well known in the art that, in engines in which the cylinders are supplied with mixture through a multi-branched inlet manifold, it is difficult to ensure an even
30 distribution. As a result, some cylinders tend to receive a leaner mixture than others, making a compensatory increase in overall mixture strength necessary. Excepting where

individual carburettors feed individual cylinders through straight inlet tracts, this effect is common in conventionally carburetted engines. The problem of unequal mixture distribution is not mitigated by throttle box fuel injection arrangements, which retain conventional inlet manifold provisions.

5 Inequalities in mixture distribution as a result of inlet tract inadequacies have been commonly overcome by injecting fuel in droplet form directly into the opening of the inlet port, from whence it is entrained in the inlet airflow and carried into the cylinder. While port injection of a quantity of fuel accurately appropriate to the instantaneous operating parameters of an engine does mitigate the unequal mixture distribution
10 problem, there is less opportunity for evaporation of the droplet fuel in the short travel distance involved and some will still remain in droplet form at the onset of ignition. Thus, absent charge stratification or more elaborate ignition provisions, a richer than necessary mixture strength is still required in order to ensure the presence of sufficient fuel in vapour form for the achievement of reliable ignition.

15 It is well known that diesel engines commonly operate at lambda figures exceeding 1.5. This means that in excess of 150% of the air required for a stoichiometric mixture is supplied to a cylinder. Such high lambda figures are a consequence of the timed injection of droplet fuel employed in the diesel engine and are largely responsible for its excellent fuel economy. In contrast, gasoline-fuelled engines of conventional
20 arrangement seldom exceed lambda figures of 1.1, with lower figures occurring at higher powers. However, it has been shown that, in the same engines, a charge comprising dry gaseous fuels, for example, propane, thoroughly mixed with air to provide an homogenous mixture will provide reliable ignition at lambda figures of 1.3 at relatively high BMEPs and there is evidence that operation up to lambda figures of around 1.5 can
25 readily be achieved.

 While separate complete evaporation of gasoline fuel in the manner employed with liquefied petroleum gas fuel is not practical due to difficulties in vaporising certain essential additives contained in fuels such as gasoline, there is evidence that, if gasoline can be fully evaporated in the inlet airstream and thoroughly mixed with the charge air,
30 operation at relatively high BMEPs is achievable at lambda figures similar to the best achievable with dry gaseous fuels. To achieve a high degree of evaporation of droplet

fuel prior to entry of the mixture to the cylinder, heating of all or part of the charge air and, in some cases, the fuel, is necessary.

It is conventional belief that, in air breathing engines, charge temperature should be maintained as low as possible to provide the greatest possible charge density, thereby
5 improving volumetric efficiency. It is also believed that the onset of detonation is delayed by maintaining a low charge temperature. It can be demonstrated that high charge temperatures may, in fact, be provided or tolerated with beneficial effect, with volumetric efficiency being restored in various ways and with premature detonation not proving to be a problem.

10 The advantages of heating fuel and inlet air to achieve substantial evaporation of fuel in the inlet tract of a gasoline-powered piston internal combustion engine have long been recognised and a variety of methods have been proposed for this purpose. Typical of these is that taught by Sviridov et al in US 4,438,750 in which a vaporizing element extends from an exhaust port to an adjacent inlet port. A heat take-up part of the
15 vaporizing element is heated by exhaust gases and heat captured thereby is conducted via a connecting member of the vaporizing element to its curved operating surface situated in the inlet port. Fuel is injected into the inlet port via an electromagnetically-controlled injection nozzle at a tangent to the operating surface to provide better conditions for fuel film forming. A stated object is the vaporisation of injected fuel to accomplish complete
20 homogenisation of an air-fuel mixture before it enters the engine cylinder. Similarly, in methods taught by Scherenberg et al in US 5,140,967 and Jordan in US 3,930,477, a heating bar or element is provided in each inlet port and fuel discharged by a fuel injector into the heated region is subject to accelerated vaporisation. In another example taught by Yokoi et al in US 4,483,304, rapid evaporation of fuel films is achieved by providing
25 electrical resistance-heated fuel vaporizers at various positions within the inlet tracts of an engine. In another example taught by Swanson in US 4,375,799, fuel vaporization means are provided in the form of a vaporization chamber embedded in one wall of a carburettor, the chamber being heated by surrounding electrical heating elements. Fuel is discharged into the vaporization chamber and evaporated before being discharged into
30 the venturi of the carburettor. In another example taught by Oblander in US 3,461,850, the main exhaust manifold runner is made unitary with the inlet manifold runners of an

engine, resulting in a heated zone in each runner. Fuel is discharged from a conventional fuel injector onto the heated zone, the stated object being an improvement in fuel preparation. In another example taught by Gardner et al in US 4,583,512, the carburettor or fuel injection system are deleted from an engine and the inlet air and fuel
5 are heated by a series of electrical resistive elements in separate heat exchange units. The heated fuel and air are combined and further heated in a common heat exchange unit and admitted to the combustion chambers of the engine through a series of electrically-operated valves. A stated object, amongst others, is the provision of better fuel vaporisation and fuel to air ratio. In another example taught by Hoppie et al in US
10 4,664,925, a quantity of fuel is pre-heated by passing it through a coiled tube positioned in each exhaust port. The fuel is vaporised and rapidly heated to a high temperature by being adiabatically compressed immediately prior to injection into the combustion chamber. Stated objects are to achieve negligible ignition delay and substantially instantaneous completion of the combustion process. In another example taught by
15 Lakin in US 6,712,051, part of the inlet air is heated by engine coolant or exhaust system waste heat. The heated air is mixed with ambient air in a computer-controlled temperature regulation system based on the power output required from the engine. A fuel injection system is employed to maintain correct fuel-air ratios over the extended range of combustion air temperatures.

20 Of the cited examples, the method taught by Sviridov et al requires adjacent inlet and exhaust runners, which is impractical in many engines. Additionally, the temperature of the vaporising element is uncontrolled, resulting in the possible overheating of the vaporizing element in some operating conditions. Similar objections are made to the method taught by Oblander. In the methods taught by Scherenberg et al
25 and Jordan, the flow of inlet air over the heating bar or element would result in rapid cooling, requiring a high electrical current flow to be of any significant effect. The necessary generation of electrical current would result in an adverse effect upon the efficiency and fuel economy an engine. Similar objections are made to the method taught by Yokoi et al. The method taught by Swanson requires use of a carburettor and is
30 therefore considered impractical in light of modern automotive practice. The method taught by Gardner et al requires a high electrical current flow to be of any significant

effect and the necessary generation of electrical current would result in an adverse effect upon the efficiency and fuel economy an engine. In the method taught by Hoppe et al, it is difficult to see how cold starting would be achieved. Additionally, basic fuel-air mixture control and the production of an homogeneous charge strength would present difficulties. The method taught by Lakin would provide minimal benefits in normal operation.

A first object of the present invention is to improve the fuel economy of piston internal combustion engines by providing means to control the temperature of the inlet airstream and to control the temperature of fuel discharged into the inlet airstream. A second object of the present invention is to provide thorough mixing of the fuel with the inlet airstream, thereby delivering, as nearly as possible, an homogenous fuel-air mixture to each cylinder in an engine and allowing a more efficient burning of the fuel. A third object of the present invention is to provide means of readily modifying existing engine types to achieve the first and second objects stated above.

According to the present invention, in a piston internal combustion engine, liquid gasoline fuel is heated by engine waste heat in suitable heat-exchange means to a temperature approaching its normal boiling point and is maintained in a pressurised state to prevent boiling off. A supply of air is heated by exhaust gases in suitable heat-exchange means to a temperature well above the boiling point of gasoline and the major part of said heated air is mixed with ambient air to provide a flow of heated induction air. The minor part of said heat air is supplied tangentially to a plurality of small cyclones, each of which is associated with one engine inlet manifold runner. Each said small cyclone generates a sustained vortex of high velocity which is discharged into the appropriate inlet manifold runner upstream of the associated inlet valve. The heated fuel is supplied to electronically-controlled fuel injectors provided in each said small cyclone and discharged in atomised form into said vortices of heated air where it undergoes flash evaporation. The heated induction airstream and vortex fuel-air flow combine in the inlet manifold runners before passing to the cylinders of the engine, effectively as an homogenous dry gas.

The various aspects of the present invention will be more readily understood by reference to the following description of preferred embodiments given in relation to the

accompanying drawings in which:

Figure 1 is a longitudinal cross-sectional view through one inlet manifold runner, inlet port and small cyclone of an engine incorporating the present invention;

5 Figure 2 is a transverse cross-sectional view of a small cyclone of the present invention through a plane passing through the axis of the delivery duct;

Figure 3 is a longitudinal cross-sectional view through an alternative embodiment of small cyclone;

10 Figure 4 is a longitudinal cross-sectional view through a small cyclone showing typical construction and assembly;

Figure 5 is a longitudinal cross-sectional view of alternative means to discharge a vortex fuel-air flow into an inlet manifold;

Figure 6 is a longitudinal cross-sectional view of other alternative means to discharge a vortex fuel-air flow into an inlet manifold;

15 Wherever the word 'gasoline' or words 'gasoline-fuelled' appear throughout this specification, the word 'gasoline' should be taken to mean any liquid fuel capable of being treated in the manner described herein. The meaning of the word 'gasoline' should also be taken to include fuels which may only liquefy in the temperature range 20° to 300° C. Wherever the word 'air' is used throughout this specification, it should be taken
20 to include any admixture in suitable ratio of another gas or gases with oxygen.

With reference to Figures 1 and 2, in a piston internal combustion engine, a supply of liquid gasoline fuel is pressurised to injection pressure in a suitable pump (not shown) and heated to an approximate temperature of 85 to 90°C in suitable heat-exchange means (not shown) using waste heat from the cooling system of said engine,
25 the pressurised state of said fuel preventing its boiling off. In the preferred embodiment, suitable thermostatic control means (not shown) are employed to maintain said heated fuel in the said desired temperature range during normal operation. Said heated fuel is supplied through a suitable fuel supply manifold (not shown) and thence via separate fuel supply lines 1 (position indicated in broken line) to a plurality of electronically-controlled,
30 modulatable fuel injectors 2 (position indicated in broken line), each mounted to and positioned with its fuel spray discharge axis collinear with the longitudinal axis of a

small cyclone 4 associated with each engine inlet manifold runner 11. Said small cyclones comprise principally cylindrical part 24 and conical part 23. Suitable fuel return lines (not shown) are provided where required, any return flow being directed to a ready-use reservoir (not shown) from which said fuel pressurising pump obtains a supply
5 of heated fuel. Should said ready-use reservoir become full, overflow is directed to the main fuel storage tank (not shown). Control signals are transmitted to said fuel injectors via electrical conductors 3 (position indicated in broken line). A supply of air is heated by exhaust gases in suitable heat-exchange means (not shown) to a temperature of up to 1,000°C above ambient and the major part of said heated air is mixed with ambient air to
10 provide a flow of heated induction air at a temperature normally in the range +20° to +100°C within the inlet manifold runner downstream of throttle butterfly valve 16. Where another fuel is used, said air temperature in said inlet manifold runner is increased as required to be above the dewpoint of said fuel. Said mixing of said heated air and said ambient air is performed in a modulatable, electronically-controlled mixing valve (not
15 shown) which is controlled by a suitable microprocessor-based control unit (not shown) receiving signals from sensors (not shown) sensing the temperature of ambient air, the temperature of said heated air and the temperature of said induction air. Said control unit also receives a signal indicating the position of valving elements of said mixing valve and modulates the position of said valving elements as required to maintain said
20 induction air temperature in the optimum range. Obviously, said modulatable fuel injector may be positioned with its said discharge axis parallel to but laterally displaced from the longitudinal axis of said small cyclone, or displaced laterally and angularly from the longitudinal axis of said small cyclone, including being mounted on and discharging its said fuel spray into said delivery duct immediately adjacent the entry of said delivery
25 duct to said cylindrical part of said small cyclone.

The minor part of said heated air is supplied tangentially via delivery ducts 9 to cylindrical parts 24 of said small cyclones where its heat acts to evaporate fuel discharged by said fuel injectors. The flow of heated air through each said small cyclone generates a sustained vortex of high velocity which causes thorough mixing of said air
30 and fuel vapour within said small cyclones. The resultant vortex fuel-air mixture is discharged into the appropriate said inlet manifold runner (via delivery means or

augmentor means, as appropriate) upstream of the associated inlet port 12 and inlet valve 6. Mounting flange 15 of said inlet manifold runner is fixed to cylinder head 13 by suitable fastenings 14 (positions indicated in broken line) and the induction airflow is regulated by butterfly throttle valve 16 turning on shaft 17 rotationally supported in suitable bearings 18 provided in inlet manifold casting 5. In alternative embodiments (not shown), other forms of throttle valve are employed, such valve forms being well known in the art. Said heated fuel spray discharge 10 occurring in atomised form (general pattern indicated in broken line) enters said vortices of heated air in said small cyclones where the greater part undergoes flash evaporation. The process affecting the atomised fuel in said small cyclones is a very complex one involving high velocities, aggressive pressure changes, shearing, turbulence and mixing combined with heat transfer from the air and metal surfaces and no attempt will be made to describe it in detail. However, said process is very effective in producing flash evaporation and any part of said fuel spray discharge not immediately evaporated is centrifuged onto the hot walls of said small cyclones by the high centrifugal forces imposed upon it, forming a thin film which describes a shallow spiral path, taking up heat from the cyclone wall and rapidly evaporating. The actual amount of heat required to effect rapid and complete evaporation varies with the type of fuel and the ratio of mass flow of air and mass flow of fuel through said small cyclones. In an alternative embodiment (not shown) the inner surface of the conical part of said small cyclones is made with a sawtooth longitudinal cross-sectional shape and, in passing over the edges of said sawtooth shape, said fuel thin film is more effectively entrained in said vortex airflow. In the preferred embodiment, said small cyclones are provided with suitable insulation on their external surfaces to minimise loss of heat. The term, 'small cyclones', is intended to indicate simply that the diameter of the cylindrical part of said cyclones is small in relation to the diameter of the bore of the cylinder with which a said small cyclone is related. Typically, the ratio of the two said diameters is in the range 1:10 to 1:2, but variations of $\pm 20\%$ from the stated ratio range may occur. Also typically, the ratio of the length of conical section 23 to the diameter of cylindrical section 24 ranges from less than 0.5:1 to greater than 6:1.

Said vortex fuel-air flow passes to said inlet manifold runner via delivery duct 7 connected to the small end of the conical part of said small cyclones and debouches

through outlet 19 to combine and mix with said heated induction airstream before flowing to the cylinders of said engine, effectively as a dry homogenous, gas. The high energy of said vortex fuel-air flow discharged through said outlet acts to promote rapid mixing with said induction airflow in said inlet manifold runner. Delivery duct 7 is made of suitable length and is fixed to boss 8 of inlet manifold casting 5. Said small cyclones are optionally positioned in any suitable attitude with said delivery ducts shaped accordingly. Fuel injectors 2 are accommodated in the normal way in mounting collars 22 provided at the cylindrical ends of said small cyclones, said mounting collars being positioned collinear with the longitudinal axes of said small cyclones. To prevent overheating of said fuel injectors, in the preferred embodiment, coolant jackets 20 are provided around said mounting collars, coolant from the cooling system of said engine being supplied through supply ducts 21 and returned through return ducts (obscured). In an alternative embodiment (not shown), said coolant jackets are deleted, said mounting collars are made suitably larger in diameter and a layer of suitable thermal insulation material is provided between said mounting collars and said fuel injectors. In the preferred form of said alternative embodiment, said thermal insulation material is PSZ ceramic. Obviously, the rate of heat dissipation from said coolant jackets may be increased simply by enlarging their surface area through the provision of finning or the like.

20 In an alternative embodiment (not shown), simple discharge means in the form of a short extension of outlet 19 projecting for a suitable distance into inlet manifold runner 11 are employed to better distribute said vortex fuel-air flow into said induction airflow. With reference to Figure 5, in another alternative embodiment, said vortex fuel-air flow is discharged into inlet manifold runner 11 via more complex discharge means. In this embodiment, extension 31 of outlet 19 turns through a suitable angle to bring it parallel to the axis of inlet manifold runner 11 and streamlined fairing 32 is provided around said parallel part to improve flow efficiency. Said vortex fuel-air flow debouches through outlet 33 at the downstream end of said fairing. In the preferred embodiment, extension 31 is made with a streamlined cross-sectional shape to further improve flow efficiency. 25 With reference to Figure 6, in a further alternative embodiment, said vortex fuel-air flow is discharged into inlet manifold runner 11 via augments means. In this embodiment,

enlarged bore 34 of boss 8 of inlet manifold casting 5 sealingly accommodates the downstream end of delivery duct 7. Said delivery duct discharges into outlet 19 which debouches into annular space 35 formed within a circumferential zone of diametral enlargement 36 of inlet manifold casting 5. Cylindrical collar 38 is accommodated in an interference fit within annular recess 37 formed in the inner surface of said inlet manifold casting, the downstream end 39 of said collar being deflected inwardly to create annular discharge port 40 between said collar downstream end and the angled downstream, inner surface 41 of circumferential zone of enlargement 36. In an alternative embodiment, angled shoulder 45 is provided immediately downstream of annular discharge port 40 and cylindrical collar 46 is accommodated against said angled shoulder in an interference fit in the bore of inlet manifold casting 5. The upstream end of said collar 44 is deflected through an obtuse angle to bring it more or less into parallel with downstream end 39 of collar 38. In the preferred embodiment, outlet 19 debouches tangentially into annular space 35. In an alternative embodiment, outlet 19 debouches radially into said annular space. Obviously, the width of annular discharge port 40 may be adjusted by changing the length of cylindrical collar 38, by displacing it axially or by changing the angles of any of cylindrical collar end 39, cylindrical collar upstream end 44 and surface 41. In the preferred embodiment, the internal diameter of said inlet manifold runner 11 downstream of annular discharge port 40 is made larger than the internal diameter of the upstream part. In other embodiments, said diameters are more or less equal. In a preferred embodiment, to promote mixing of said vortex fuel-air flow with said induction airflow, a series of closely-spaced, circumferential holes 42, 43 is provided in downstream end 39 of cylindrical collar 38 and upstream end 44 of cylindrical collar 46. In other alternative embodiments for the same purpose, the free edges of downstream end 39 of cylindrical collar 38 and upstream end 44 of cylindrical collar 46 are made castellated, indigitated, sinusoidal or sawtoothed. In a further alternative embodiment for the same purpose, downstream end 39 of cylindrical collar 38 and upstream end 44 of cylindrical collar 46 are made with spirally-arranged fluting or finning to promote rotation of the airflow downstream of said augmentor means.

In the preferred embodiment, said heat exchange means in which said air is heated take the form of a suitable muff (not shown) formed around part of the exhaust

manifold or exhaust pipe of said engine. Said muff sealingly encloses said part of the exhaust manifold or exhaust pipe and is supplied with a flow of ambient air via air cleaning means of normal arrangement. In an alternative embodiment (not shown), said heat exchange means take the form of a separate heat exchanger which receives a flow of exhaust gas diverted from the exhaust system and a flow of ambient air via air cleaning means of normal arrangement. In an alternative embodiment (not shown), said small cyclones are provided with a flow of exhaust gas diverted from the exhaust system. In another alternative arrangement (not shown), said small cyclones receive a flow of hot air diverted from the turbo-charger of said engine. In all cases, said heated airflow first passes to a thermally-insulated distribution manifold and thence via separate delivery ducts 9 to said small cyclones. Suitable valve means (not shown) provided in said distribution manifold are operated in synchronisation with throttle movement to increase the flow of heated air to said small cyclones as power is increased and reduce said flow of heated air as power is reduced.

15 In an alternative embodiment (not shown), said individual small cyclones are deleted and one or more larger cyclones are employed to provide said vortex fuel-air flow to individual inlet manifold runners.

With reference to Figure 3, in another alternative embodiment, to prevent the migration of the least dense flow component (air unmixed with fuel and entrained fuel droplets) into the core of a said vortex in a said small cyclone, a bullet 25 of streamlined shape is supported coaxially within the tapered part 23 of said cyclone by two or more strong, narrow struts 26 fixed to the inner surface of the upper wall 27 of said cyclone. Said struts exert a minimal effect upon development of said vortex flow.

25 During starting from cold, the flow of liquid fuel impinging upon the inner surfaces of said small cyclones acts to remove any accumulated material from said surfaces.

With additional reference to Figure 4, in the manufacturing of said small cyclones, in the preferred embodiment, cylindrical part 24, stub for attachment of delivery duct 9, conical part 23 and stub for attachment of delivery duct 7 are made in one piece (assembly depicted as 28); fuel injector mounting collar 22, upper wall of said cyclone 27, lower wall of said coolant jacket, cylindrical part of said coolant jacket and stubs for

attachment of coolant supply duct 21 and said coolant return duct are made in one piece (assembly depicted as 29); and the upper wall of said coolant jacket is made in one piece (depicted as 30). In the preferred embodiment, said components are sealingly joined by furnace brazing, silver soldering or other suitable welding process.

5 In an alternative embodiment (not shown), said small cyclones are employed in the manner described to mix a gaseous fuel with an induction airstream and to condition the resultant mixture. Said gaseous fuel may be propane, butane, methane, hydrogen or the like and may be discharged into said small cyclones in gaseous or liquid form.

10 In another alternative embodiment (not shown), a plurality of said small cyclones discharge their said vortex fuel-air flow tangentially into one or more larger cyclones wherein said fuel-air flow is conditioned before flowing to the cylinders of an engine.

In another embodiment (not shown), the axis of a said fuel injector is displaced from collinearity with the axis of its associated said small cyclone, both said axes remaining in parallel arrangement.

15 In another alternative embodiment (not shown), the axis of a said fuel injector is displaced radially and in an angular sense from the axis of its associated said small cyclone.

20 With further reference to Figure 1, in another alternative embodiment (not shown), in the zone of delivery duct 9 approaching and entering cylindrical part 24 of small cyclone 4, the regular cross-sectional shape of said duct is smoothly transformed into an elongate cross-sectional shape, the major axis of which is disposed axially, circumferentially or in any intermediate disposition in relation to said cylindrical part.

25 With reference again to Figure 1, obviously delivery duct 7 may be fixed to a suitable boss formed on cylinder head 13 and discharge directly into inlet port 12. Also obviously, delivery duct 7 may be deleted and the outlet from said small cyclone connected directly to boss 8.

30 In operation, a microprocessor-based fuel control unit (not shown) integrates data from sensors of engine operating parameters, including RPM, RPM trend, throttle position, manifold air pressure and cylinder head temperature, together with ignition advance mapping data, the position of said valve means regulating the flow of heated air to said small cyclones, the temperature of induction air and the temperature of the

heated fuel and regulates the volume of fuel discharged from said fuel injectors accordingly.

To minimise heat loss, any exposed metal surface of the present invention is optionally coated on external or internal surfaces, as appropriate, with a suitable thermal insulation material. Such surfaces include, but are not limited to said conduits
5 carrying heated fuel or air, said small cyclones, said inlet manifold casting and the interior of said annular space (depicted as 35 in Figure 6).

Temperature values, dimensions, ratios and the like provided herein are indicative and should not be taken to limit the scope of the present invention.

10 The benefits of the present invention, where fully realised, are the achievement of reliable ignition during all phases of engine operation using leaner than normal mixtures, no reduction in power output, improved fuel economy and reduction of pollutants in the exhaust gas stream.

CLAIMS

1. Apparatus constituting part of an induction and fuel delivery system for a cylinder of a piston internal combustion engine comprising a small cyclone into which is tangentially discharged a flow of heated air to generate a sustained vortex of high rotational speeds; a modulatable fuel injector delivering a flow of atomised fuel into said small cyclone wherein it underdoes flash evaporation and energetic mixing; a delivery duct connecting said small cyclone to the inlet tract of said cylinder wherein said vortex fuel-air mixture is mixed with induction air; and means to prevent overheating of said modulatable fuel injector.
2. Apparatus according to Claim 1 in which said small cyclone comprises a cylindrical part; a conical part joined to said cylindrical part; an upper wall closing said cylindrical part, said upper wall supporting means for mounting said modulatable fuel injector and having an aperture through which said flow of atomised fuel is discharged; a tangentially-arranged inlet to said cylindrical part through which said flow of heated air is delivered; and an outlet at the apex of said conical part joined to said delivery duct.
3. Apparatus according to Claim 2 in which the downstream end of said delivery duct is fixed to a boss formed on the inlet manifold runner casting associated with said cylinder and said vortex fuel-air mixtures debouches into said inlet tract via an outlet passing through said boss.
4. Apparatus according to Claim 2 in which said small cyclone is supported in any attitude and said delivery duct is shaped accordingly.
5. Apparatus according to Claim 2 in which said small cyclone is mounted directly to said boss of said inlet manifold runner casting.
6. Apparatus according to Claim 3 in which said boss is formed on said cylinder

head and said outlet discharges into the inlet port of said cylinder head.

- 5 7. Apparatus according to Claim 2 in which the ratio of the diameter of said cylindrical part of said small cyclone to the diameter of the bore of its associated engine cylinder is typically in the range 1:10 to 1:2 with variations of $\pm 20\%$ occurring.
- 10 8. Apparatus according to Claim 2 in which the ratio of the length of said conical section of said small cyclone to the diameter of its said cylindrical section is typically in the range of less than 0.5:1 through to greater than 6:1.
- 15 9. Apparatus according to Claim 2 in which the inner surface of said conical part of said small cyclone is made with a sawtooth longitudinal cross-sectional shape to promote entrainment in said vortex fuel-air flow of fuel film passing over said inner surface.
- 20 10. Apparatus according to Claim 2 in which the cylinders of an engine are supplied with said vortex fuel-air flow from one or more larger cyclones.
- 25 11. Apparatus according to Claim 2 in which a bullet of streamlined shape is supported within said small cyclone and coaxially with it to prevent migration of less dense components of said fuel-air mixture to the core of said vortex formed within said small cyclone.
- 30 12. Apparatus according to Claim 2 in which said small cyclone comprises:
- said cylindrical part, stub for attachment of tangential inlet, said conical part and stub for attachment of said delivery duct, all made as an assembly of one or more pieces;
 - fuel injector mounting means, said upper wall of said cyclone, lower wall of said coolant jacket, cylindrical part of said coolant jacket and stubs for attachment of coolant supply and return ducts, all made as an assembly of

16

one or more pieces;

- upper wall of said coolant jacket;

said components being sealingly joined by furnace brazing, silver soldering or other suitable welding process.

5

13. Apparatus according to Claim 1 in which said means to prevent overheating of said modulatable fuel injector take the form of a coolant jacket formed around means for mounting said modulatable fuel injector, said coolant jacket receiving a continuous supply of coolant from the cooling system of the engine.

10

14. Apparatus according to Claim 1 in which said means to prevent overheating of said modulatable fuel injector take the form of a layer of suitable thermal insulation material between said modulatable fuel injector and its said mounting means.

15

15. Apparatus according to Claim 14 in which said thermal insulation material is PSZ ceramic.

20

16. Apparatus according to Claim 1 in which the rate of heat dissipation from said coolant jackets is increased by enlarging their surface area through the provision of finning or the like.

25

17. Apparatus according to Claim 1 in which said fuel includes any liquid fuel capable of being treated in the manner claimed, including fuels which are liquid only in the temperature range 20° C to 300° C.

30

18. Apparatus according to Claim 1 in which said air includes any gas or gases in admixture with oxygen.

19. Apparatus according to Claim 1 in which said fuel is heated to an approximate temperature of 85° C to 90° C.

20. Apparatus according to Claim 19 in which said fuel is heated in thermostatically-controlled heat-exchange means using engine waste heat.
- 5 21. Apparatus according to Claim 1 in which said modulatable fuel injector is positioned with its discharge axis collinear with the longitudinal axis of said small cyclone.
- 10 22. Apparatus according to Claim 1 in which said modulatable fuel injector is positioned with its discharge axis parallel to but laterally displaced from the longitudinal axis of said small cyclone, including being mounted on and discharging its said fuel spray into said delivery duct immediately adjacent the entry of said delivery duct to said cylindrical part of said small cyclone.
- 15 23. Apparatus according to Claim 1 in which said modulatable fuel injector is positioned with its discharge nozzle positioned on or close to the longitudinal axis of said small cyclone, but angularly displaced from it.
- 20 24. Apparatus according to Claim 1 in which said modulatable fuel injector is positioned with its discharge nozzle displaced laterally from and its discharge axis displaced in an angular sense from the longitudinal axis of said small cyclone.
- 25 25. Apparatus according to Claim 1 in which said induction air is heated.
- 30 26. Apparatus according to Claim 25 in which a flow of air is heated in heat-exchange means by engine waste heat to a temperature of up to 1,000° C and the greater part of said flow is mixed with ambient air to provide a supply of heated induction air.
27. Apparatus according to Claim 26 in which said heat-exchange means take the

form of a muff sealingly enclosing part of the exhaust manifold or exhaust pipe of the engine, said muff receiving a flow of ambient air via air cleaning means of normal arrangement.

- 5 28. Apparatus according to Claim 26 in which said heat-exchange means take the form of a separate heat exchanger receiving a flow of exhaust gas diverted from the engine exhaust system and a flow of ambient air via air cleaning means of normal arrangement.
- 10 29. Apparatus according to Claim 26 in which said air from said heat-exchange means is mixed with ambient air in a modulatable, electronically-controlled mixing valve to maintain the induction air temperature in the range 20° C to 100° C.
- 15 30. Apparatus according to Claim 26 in which said air from said heat-exchange means is mixed with ambient air in a modulatable, electronically-controlled mixing valve to maintain the induction air temperature above the dewpoint of a fuel being used.
- 20 31. Apparatus according to Claim 26 in which the external surfaces of said heat exchange means, ducting conveying said heated air, said mixing valve and said inlet manifold are clad with suitable thermal insulation material.
- 25 32. Apparatus according to any one of Claims 29 or 30 in which signals from sensors sensing the temperature of said air from said heat exchange means, the temperature of ambient air and the temperature of the mixed airstream and the position of valving elements of said mixing valve are processed in a microprocessor-based control unit which modulates the position of said valving elements.
- 30 33. Apparatus according to Claim 1 in which a flow of air is heated in heat-exchange means by engine waste heat to a temperature of up to 1,000° C and the minor part

of said flow is directed to said small cyclone.

34. Apparatus according to Claim 1 in which said flow of air to said small cyclone is supplied from a turbo-charger.

5

35. Apparatus according to Claim 1 in which said small cyclone is provided with a flow of diverted, hot exhaust gas.

36. Apparatus according to Claim 1 in which said flow of hot air is supplied to said small cyclone via a distribution manifold, said distribution manifold, said small cyclone and said delivery duct being insulated externally to minimise heat loss.

10

37. Apparatus according to Claim 36 in which valve means provided in said distribution manifold are operated in synchronisation with throttle movement to modulate the flow of heated air to said small cyclones in accordance with throttle position.

15

38. Apparatus according to Claim 1 in which said vortex fuel-air mixture is discharged into said inlet tract via delivery means or augmentor means.

20

39. Apparatus according to Claim 38 in which said delivery means take the form of a short extension of said outlet projecting at an angle into said inlet tract.

40. Apparatus according to Claim 38 in which said delivery means take the form of a longer extension of said outlet into said inlet tract, the downstream part of said extension being positioned more or less coaxial with said inlet tract and enclosed in a streamlined fairing.

25

41. Apparatus according to Claim 40 in which the unfaired part of said outlet exposed to induction airflow within said inlet tract has a streamlined cross-sectional shape.

30

42. Apparatus according to Claim 38 in which said augmentor means take the form of
an annular space in said inlet tract into which said vortex fuel-air mixture is
discharged, said annular space being defined by an outward bulging of an inlet
manifold runner casting and a first cylindrical collar installed in the bore of said
inlet tract, discharge of said vortex fuel-air mixture from said annular space
occurring through an annular discharge port defined by complementary parts of
said first cylindrical collar and a second cylindrical collar installed in the bore of
said inlet tract downstream of said first cylindrical collar, said complementary
parts being angled in the direction of induction airflow.
43. Apparatus according to Claim 42 in which said vortex fuel-air flow enters said
annular space tangentially.
44. Apparatus according to Claim 42 in which said vortex fuel-air flow enters said
annular space radially.
45. Apparatus according to Claim 42 in which said angled complementary parts of
said cylindrical collars are provided with a plurality of closely-spaced,
circumferentially-arranged holes to promote mixing of said vortex fuel-air flow
with said induction air.
46. Apparatus according to Claim 42 in which the free, downstream edges of said
angled complementary parts are made castellated, indigitated, sinusoidal or
sawtoothed to promote mixing of said vortex fuel-air flow with said induction air.
47. Apparatus according to Claim 42 in which said angled complementary parts are
made with spirally-arranged fluting or finning to promote rotation of the airflow
downstream of said augmentor means.
48. Apparatus according to Claim 42 in which the effective diameter of said inlet

tract is increased downstream of said augmentor means.


- 5 49. Apparatus according to Claim 42 in which the effective width of said annular discharge port is adjusted by repositioning said first cylindrical collar and/or said second cylindrical collar, one to another, or by changing the angles of their said angled complementary parts.
- 10 50. Apparatus according to Claim 42 in which the interior surfaces of said annular space are coated with a suitable thermal insulation material.
51. Apparatus according to Claim 2 in which said small cyclone is used to mix a gaseous fuel with heated air.
- 15 52. Apparatus according to Claim 51 in which said fuel is butane, propane, methane, hydrogen or like fuel.
- 20 53. Apparatus according to Claim 2 in which a plurality of said small cyclones discharge said vortex fuel-air flow tangentially into one or more larger cyclones in which said fuel-air flow is conditioned before flowing to the cylinders of an engine.
- 25 54. Apparatus according to Claim 2 in which a microprocessor-based fuel control unit integrates data from sensors of engine operating parameters, including RPM, RPM trend, throttle position, manifold air pressure and cylinder head temperature, the position of a valve means regulating the flow of heated air to said small cyclone, the temperature of induction air and the temperature of the heated fuel, together with ignition advance mapping data, and regulates the volume of fuel discharged from said modulatable fuel injector accordingly.
- 30 55. Apparatus according to Claim 1 in which said vortex fuel-air mixture is delivered to said inlet tract effectively as a dry, homogenous gas.



56. Apparatus according to Claim 1 in which said modulatable fuel injector delivers a flow of atomised fuel into said small cyclone wherein it undergoes flash evaporation and energetic mixing, any unevaporated fuel component being centrifuged onto the hot internal wall surfaces of said small cyclone and thereby evaporating by the taking up of heat.
57. A method of providing fuel-air mixture to a cylinder of a piston internal combustion engine comprising tangentially discharging a flow of heated air into a small cyclone to generate therein a sustained vortex of high rotational speed; delivering from a modulatable fuel injector a flow of heated, atomised fuel into said small cyclone wherein it undergoes flash evaporation and energetic mixing; discharging said vortex fuel-air flow via a delivery duct into the inlet tract of said cylinder wherein said vortex fuel-air mixture is mixed with heated induction air.
58. A method according to Claim 57 in which a flow of air is heated in heat-exchange means by engine waste heat to a temperature of up to 1,000° C, the greater part of said flow being mixed with ambient air to provide a supply of heated induction air.
59. A method according to Claim 57 in which the cylinders of an engine are supplied with said vortex fuel-air flow from one or more larger cyclones.
60. A method according to Claim 57 in which said fuel includes any liquid fuel capable of being treated, including fuels which are liquid only in the temperature range 20° C to 300° C.
61. A method according to Claim 57 in which said air includes any gas or gases in admixture with oxygen.
62. A method according to Claim 57 in which said fuel is heated in thermostatically-

controlled heat-exchange means using engine waste heat to an approximate temperature of 85° C to 90° C.

- 5 63. A method according to Claim 58 in which said air from said heat-exchange means is mixed with ambient air in a modulatable, electronically-controlled mixing valve to maintain the induction air temperature in the range 20° C to 100° C.
- 10 64. A method according to Claim 57 in which a flow of air is heated in heat-exchange means by engine waste heat to a temperature of up to 1,000° C, a minor part of said flow being directed to said small cyclone.
65. A method according to Claim 57 in which said flow of heated air to said small cyclone is supplied from a turbo-charger.
- 15 66. A method according to Claim 57 in which said small cyclone is provided with a flow of diverted, hot exhaust gas.
- 20 67. A method according to Claim 57 in which a valve means in a distribution manifold connected to said small cyclone are operated in synchronisation with throttle movement to modulate the flow of heated air to said small cyclone in accordance with throttle position.
- 25 68. A method according to Claim 57 in which said small cyclone is used to mix a gaseous fuel with heated air, said gaseous fuel including butane, propane, methane, hydrogen or like fuel.
- 30 69. A method according to Claim 57 in which a plurality of said small cyclones discharge said vortex fuel-air flow tangentially into one or more larger cyclones in which said fuel-air flow is conditioned before flowing to the cylinders of an engine.

70. A method according to Claim 57 in which a microprocessor-based fuel control unit integrates data from sensors of engine operating parameters, including RPM, RPM trend, throttle position, manifold air pressure and cylinder head temperature, the position of a valve means regulating the flow of heated air to said small cyclones, the temperature of induction air and the temperature of the heated fuel, together with ignition advance mapping data, and regulates the volume of fuel discharged from said modulatable fuel injector accordingly.
71. A method according to Claim 57 in which said vortex fuel-air mixture is delivered to said inlet tract effectively as a dry, homogenous gas.
72. A method according to Claim 57 in which said small cyclone comprises a cylindrical part joined to a conical part.
73. A method according to Claim 72 in which the ratio of the diameter of said cylindrical part of said small cyclone to the diameter of the bore of its associated engine cylinder is typically in the range 1:10 to 1:2 with variations of $\sim 20\%$ occurring.
74. A method according to Claim 72 in which the ratio of the length of said conical part of said small cyclone to the diameter of its said cylindrical part is typically in the range of less than 0.5:1 through to greater than 6:1.
75. A method according to Claim 57 in which said modulatable fuel injector delivers a flow of atomised fuel into said small cyclone wherein it undergoes flash evaporation and energetic mixing, any unevaporated fuel component being centrifuged onto the hot internal wall surfaces of said small cyclone and thereby evaporating by the taking up of heat.

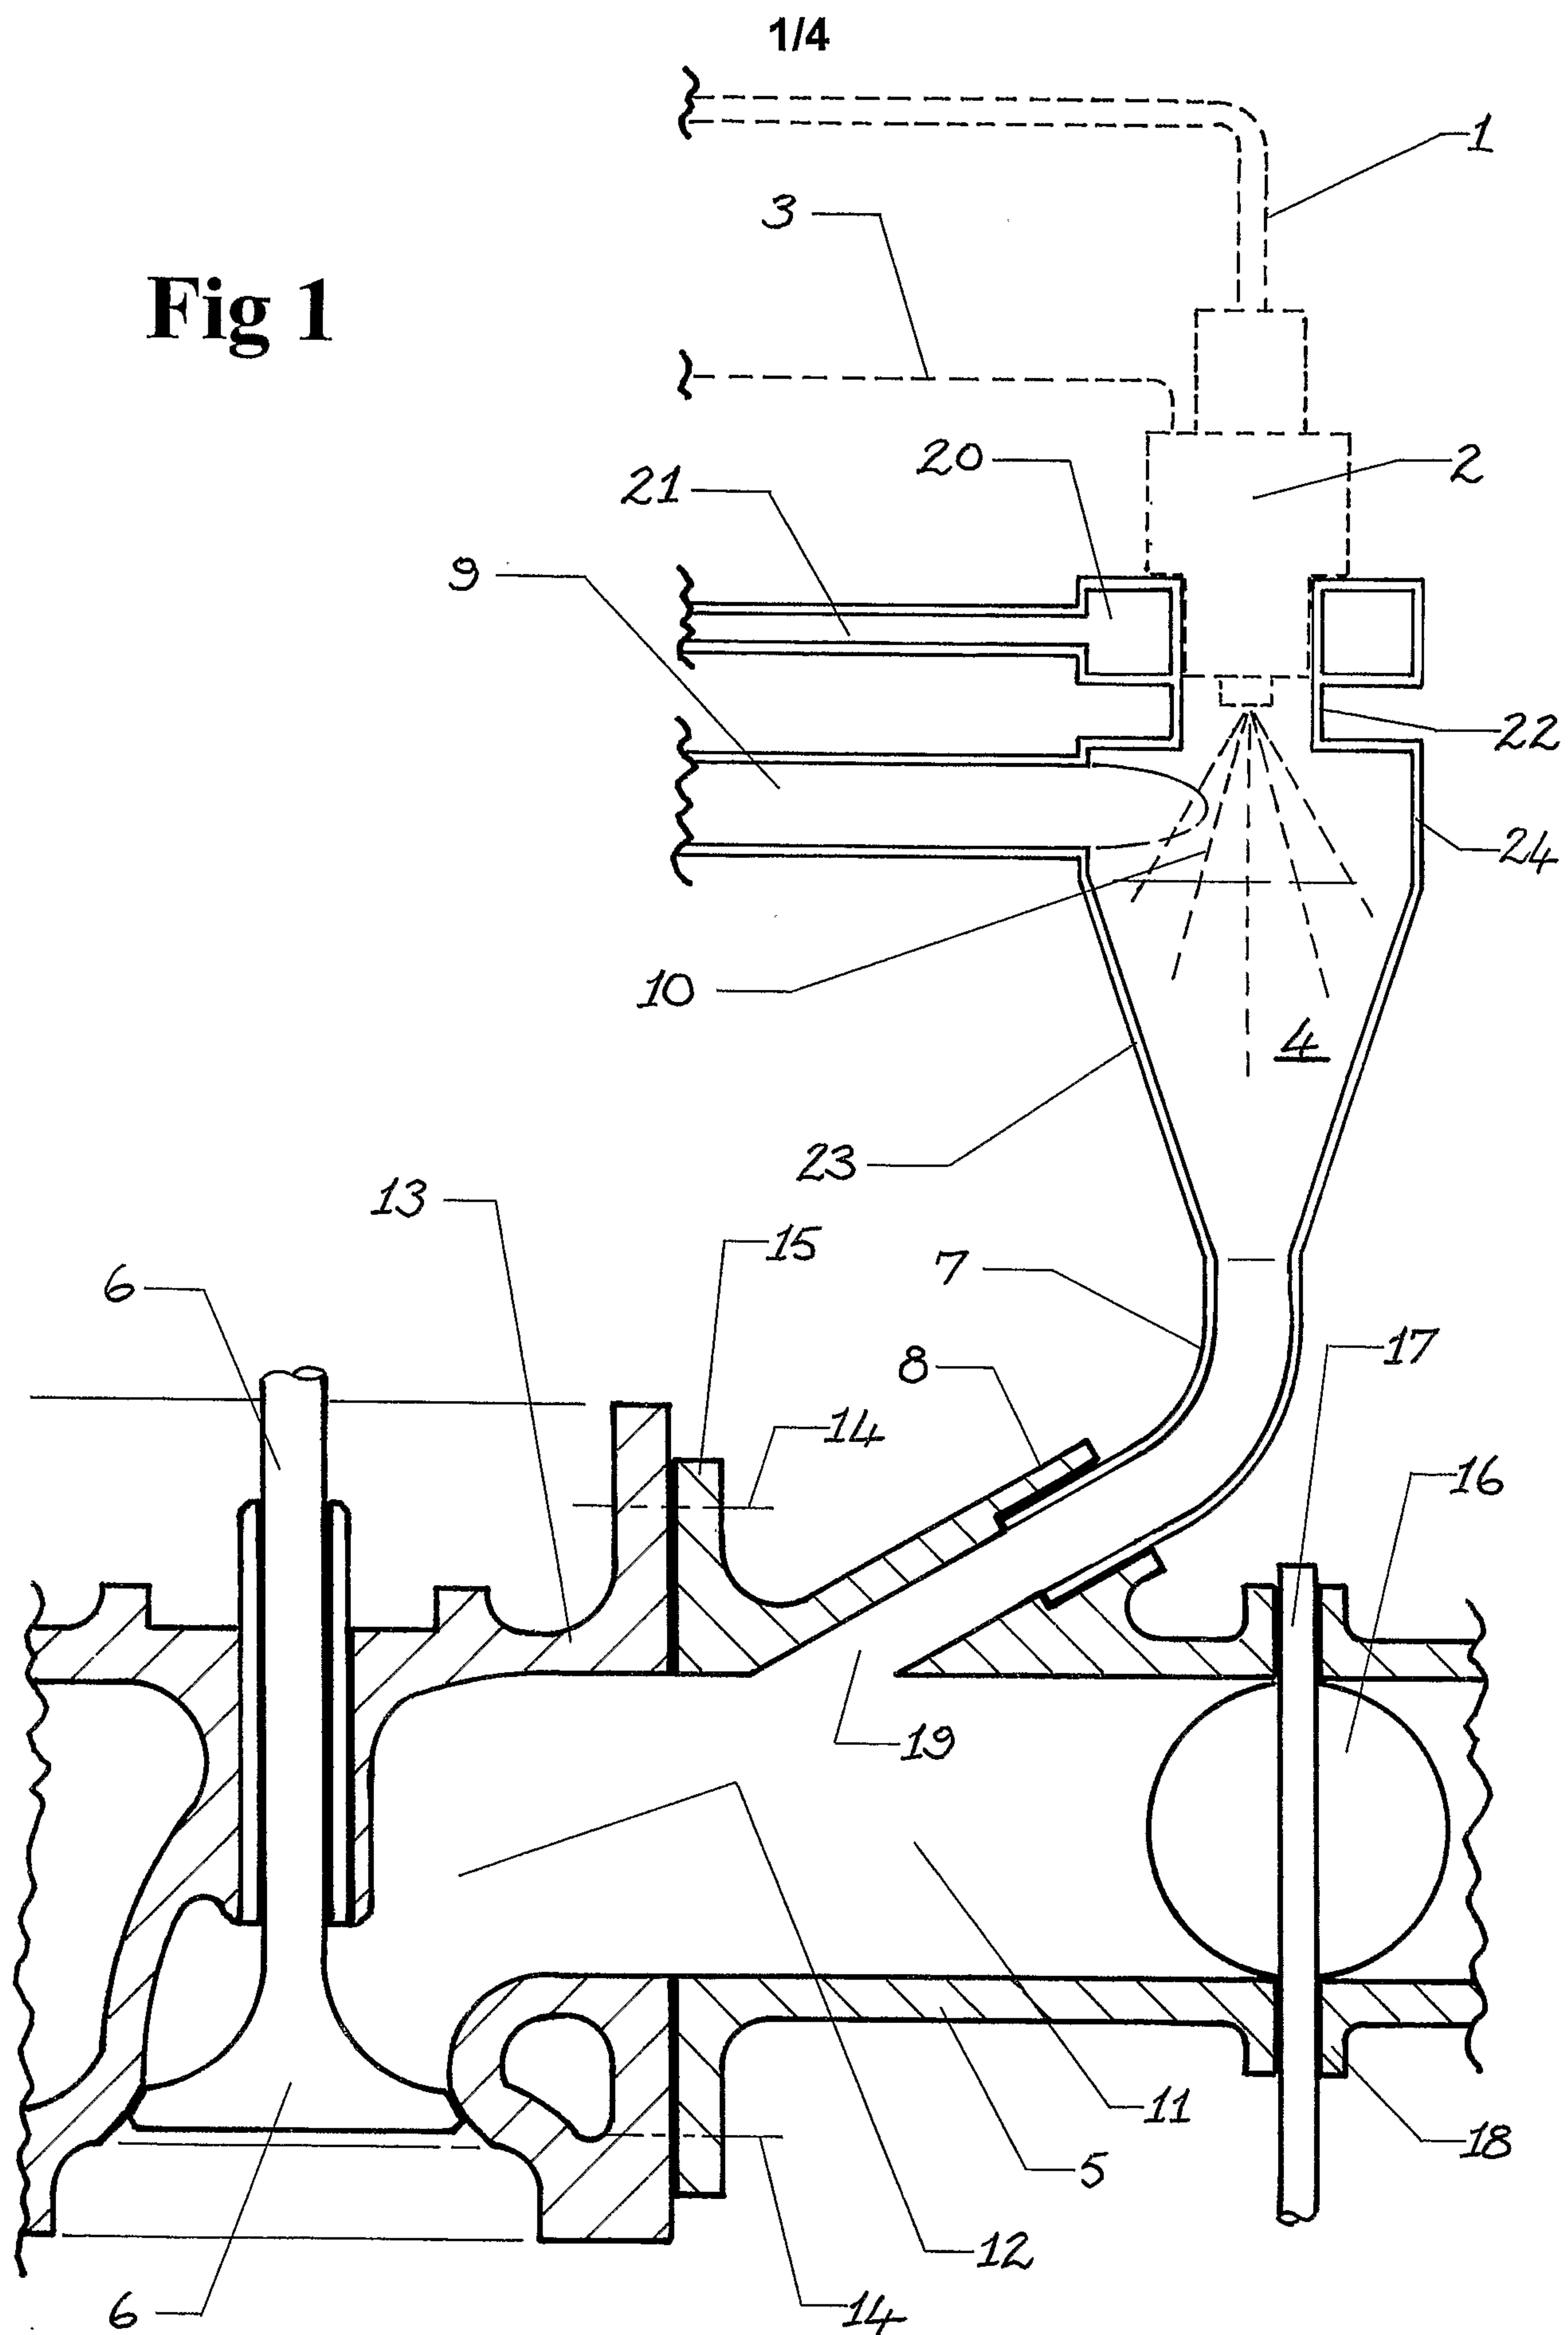Fig 1

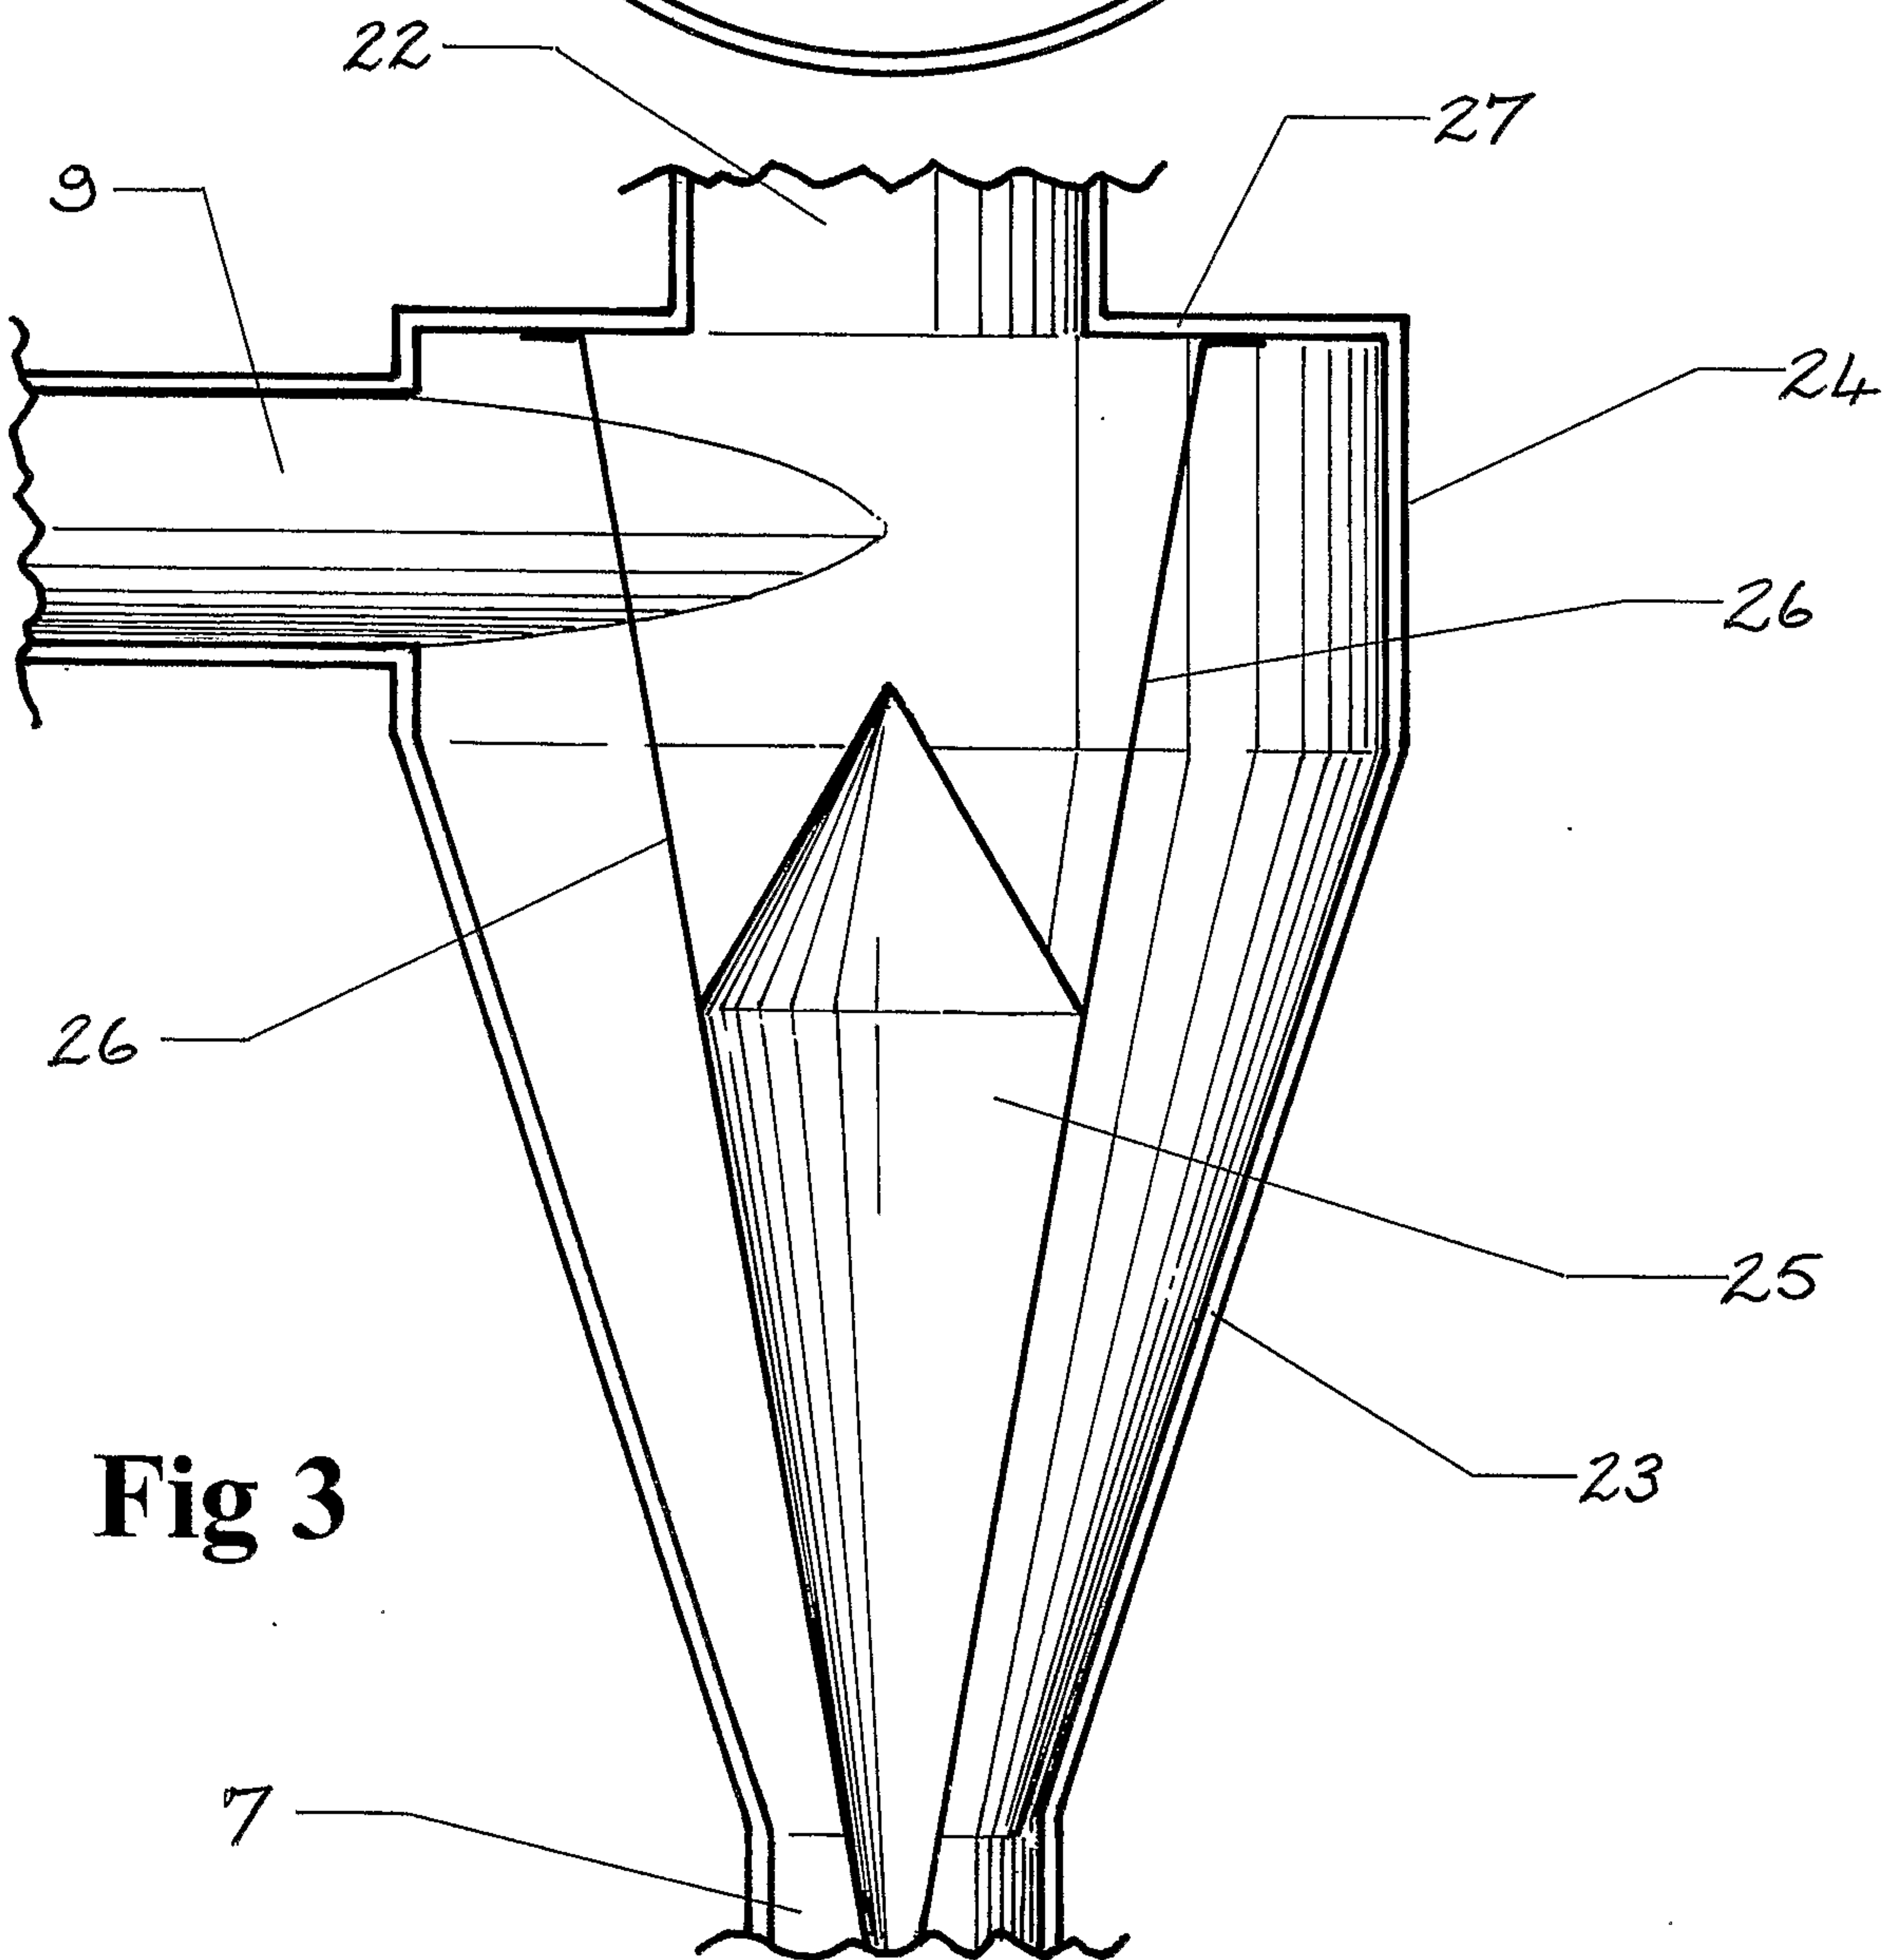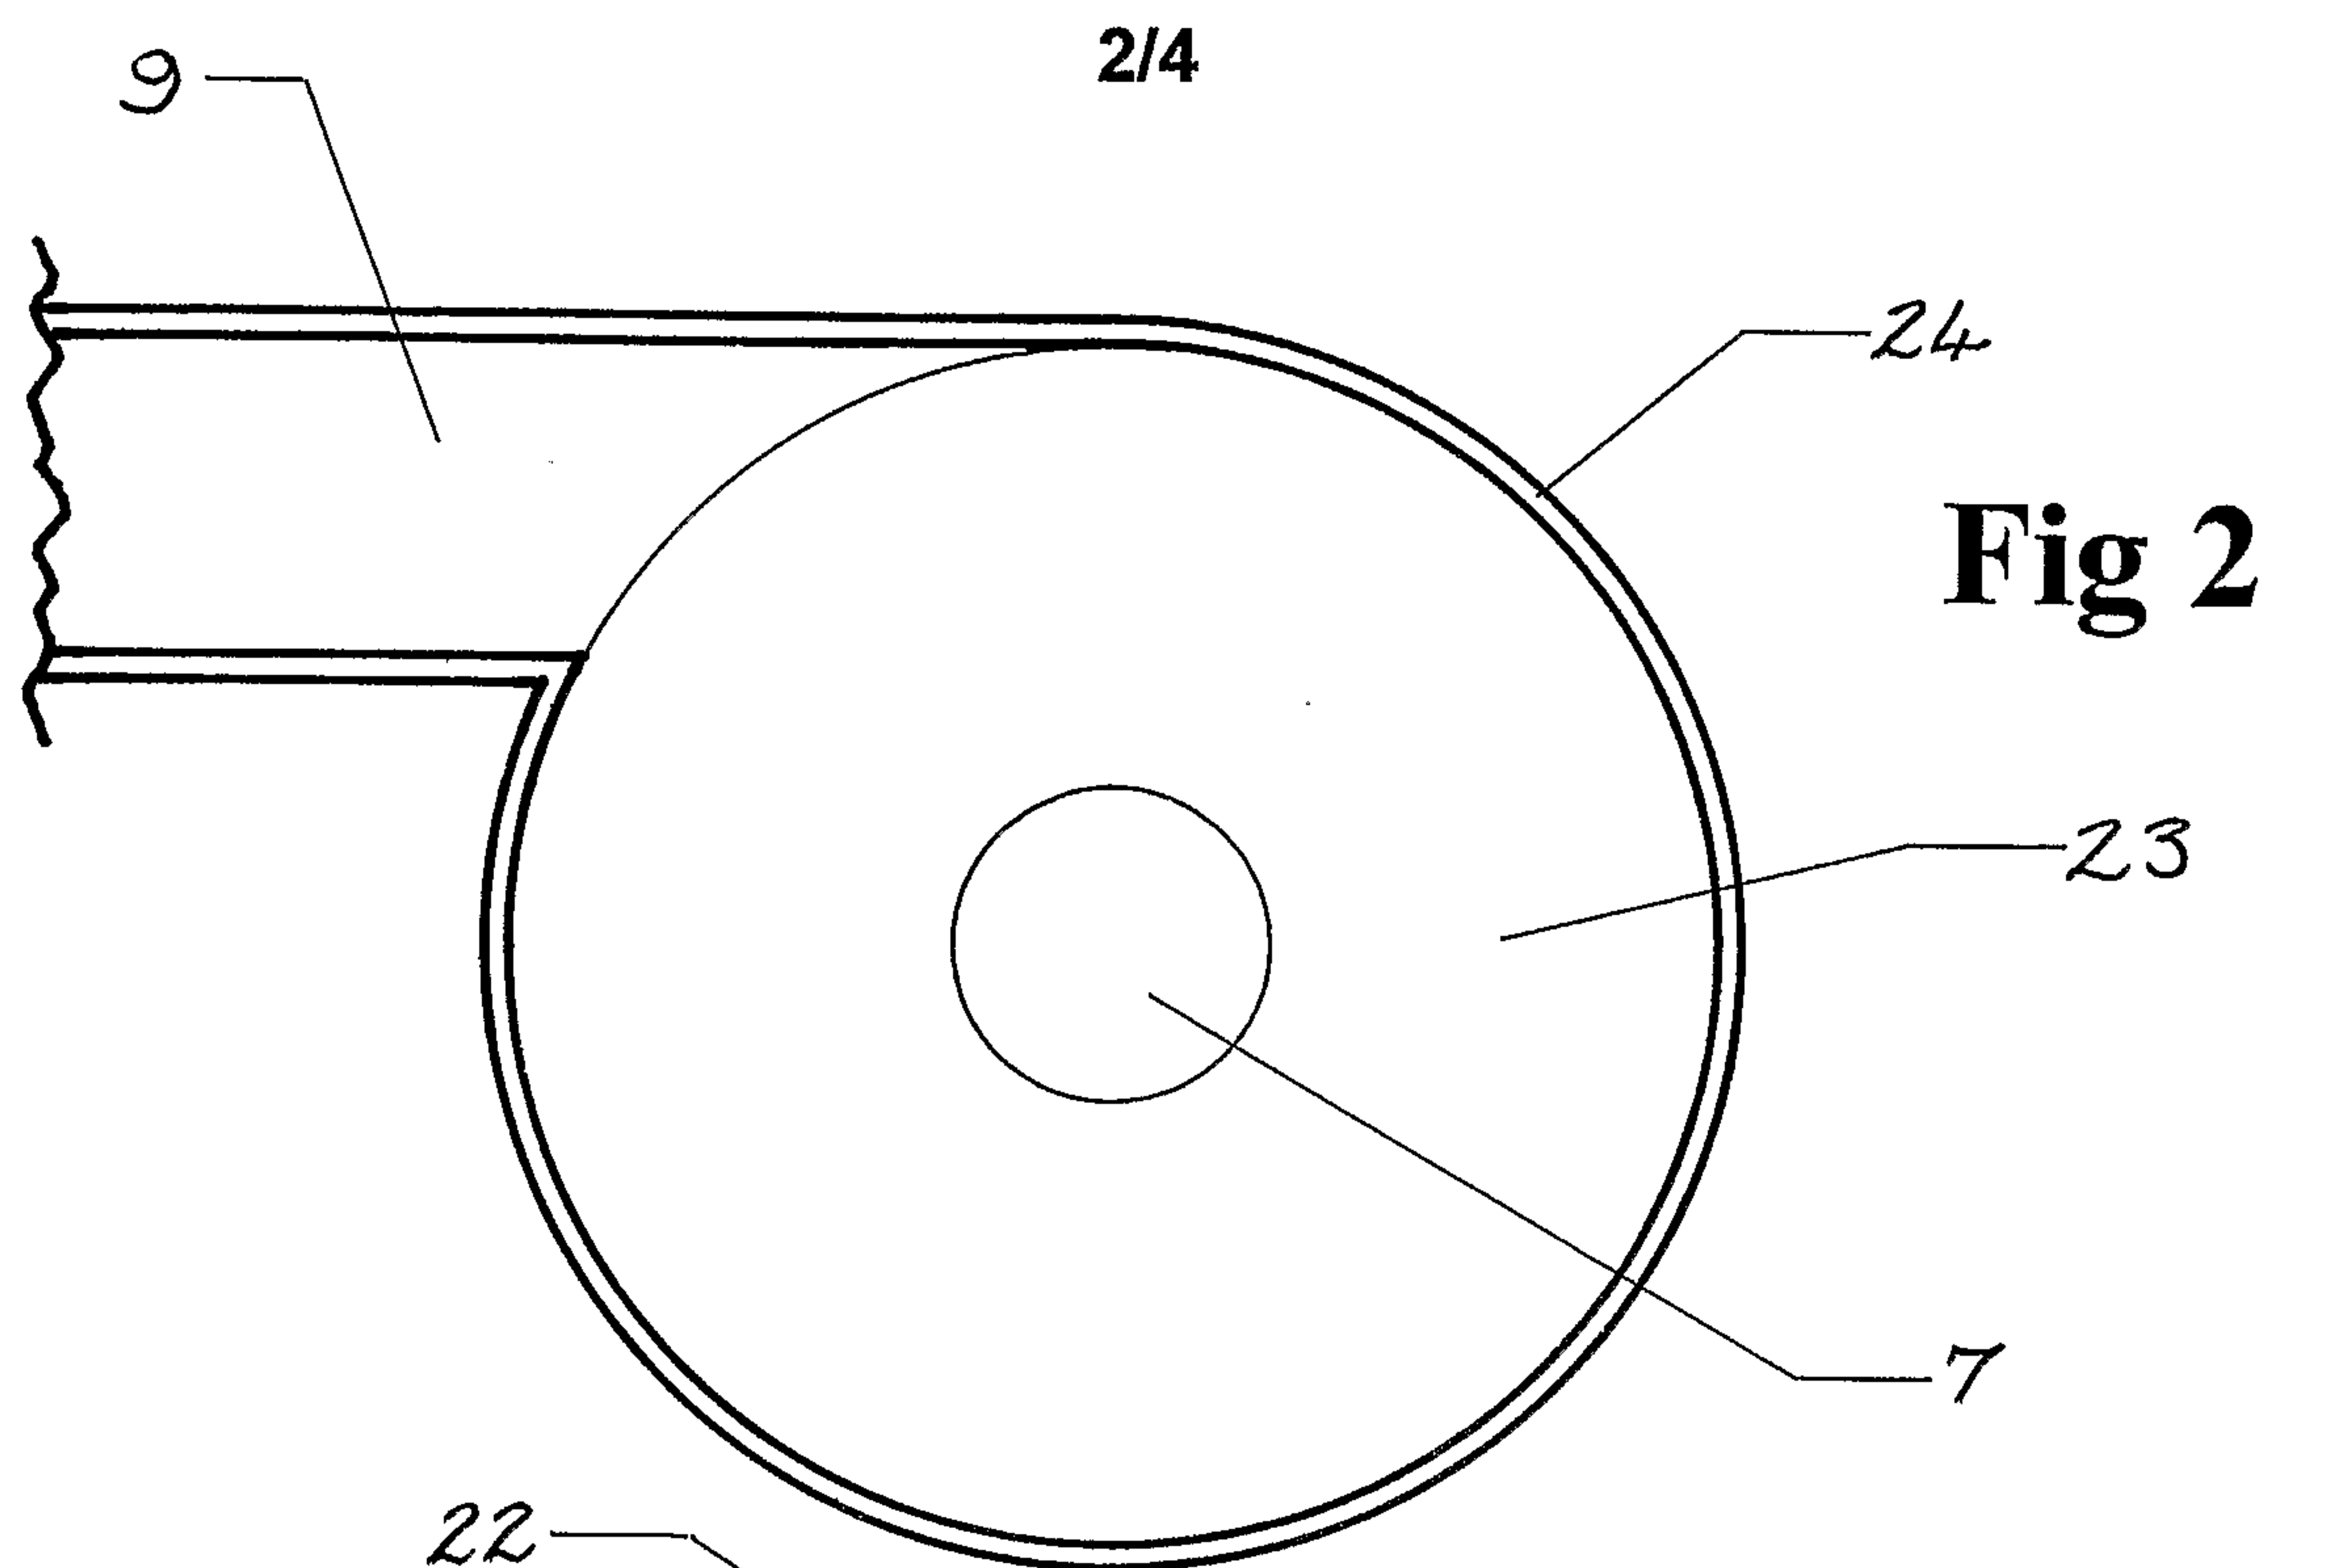

3/4

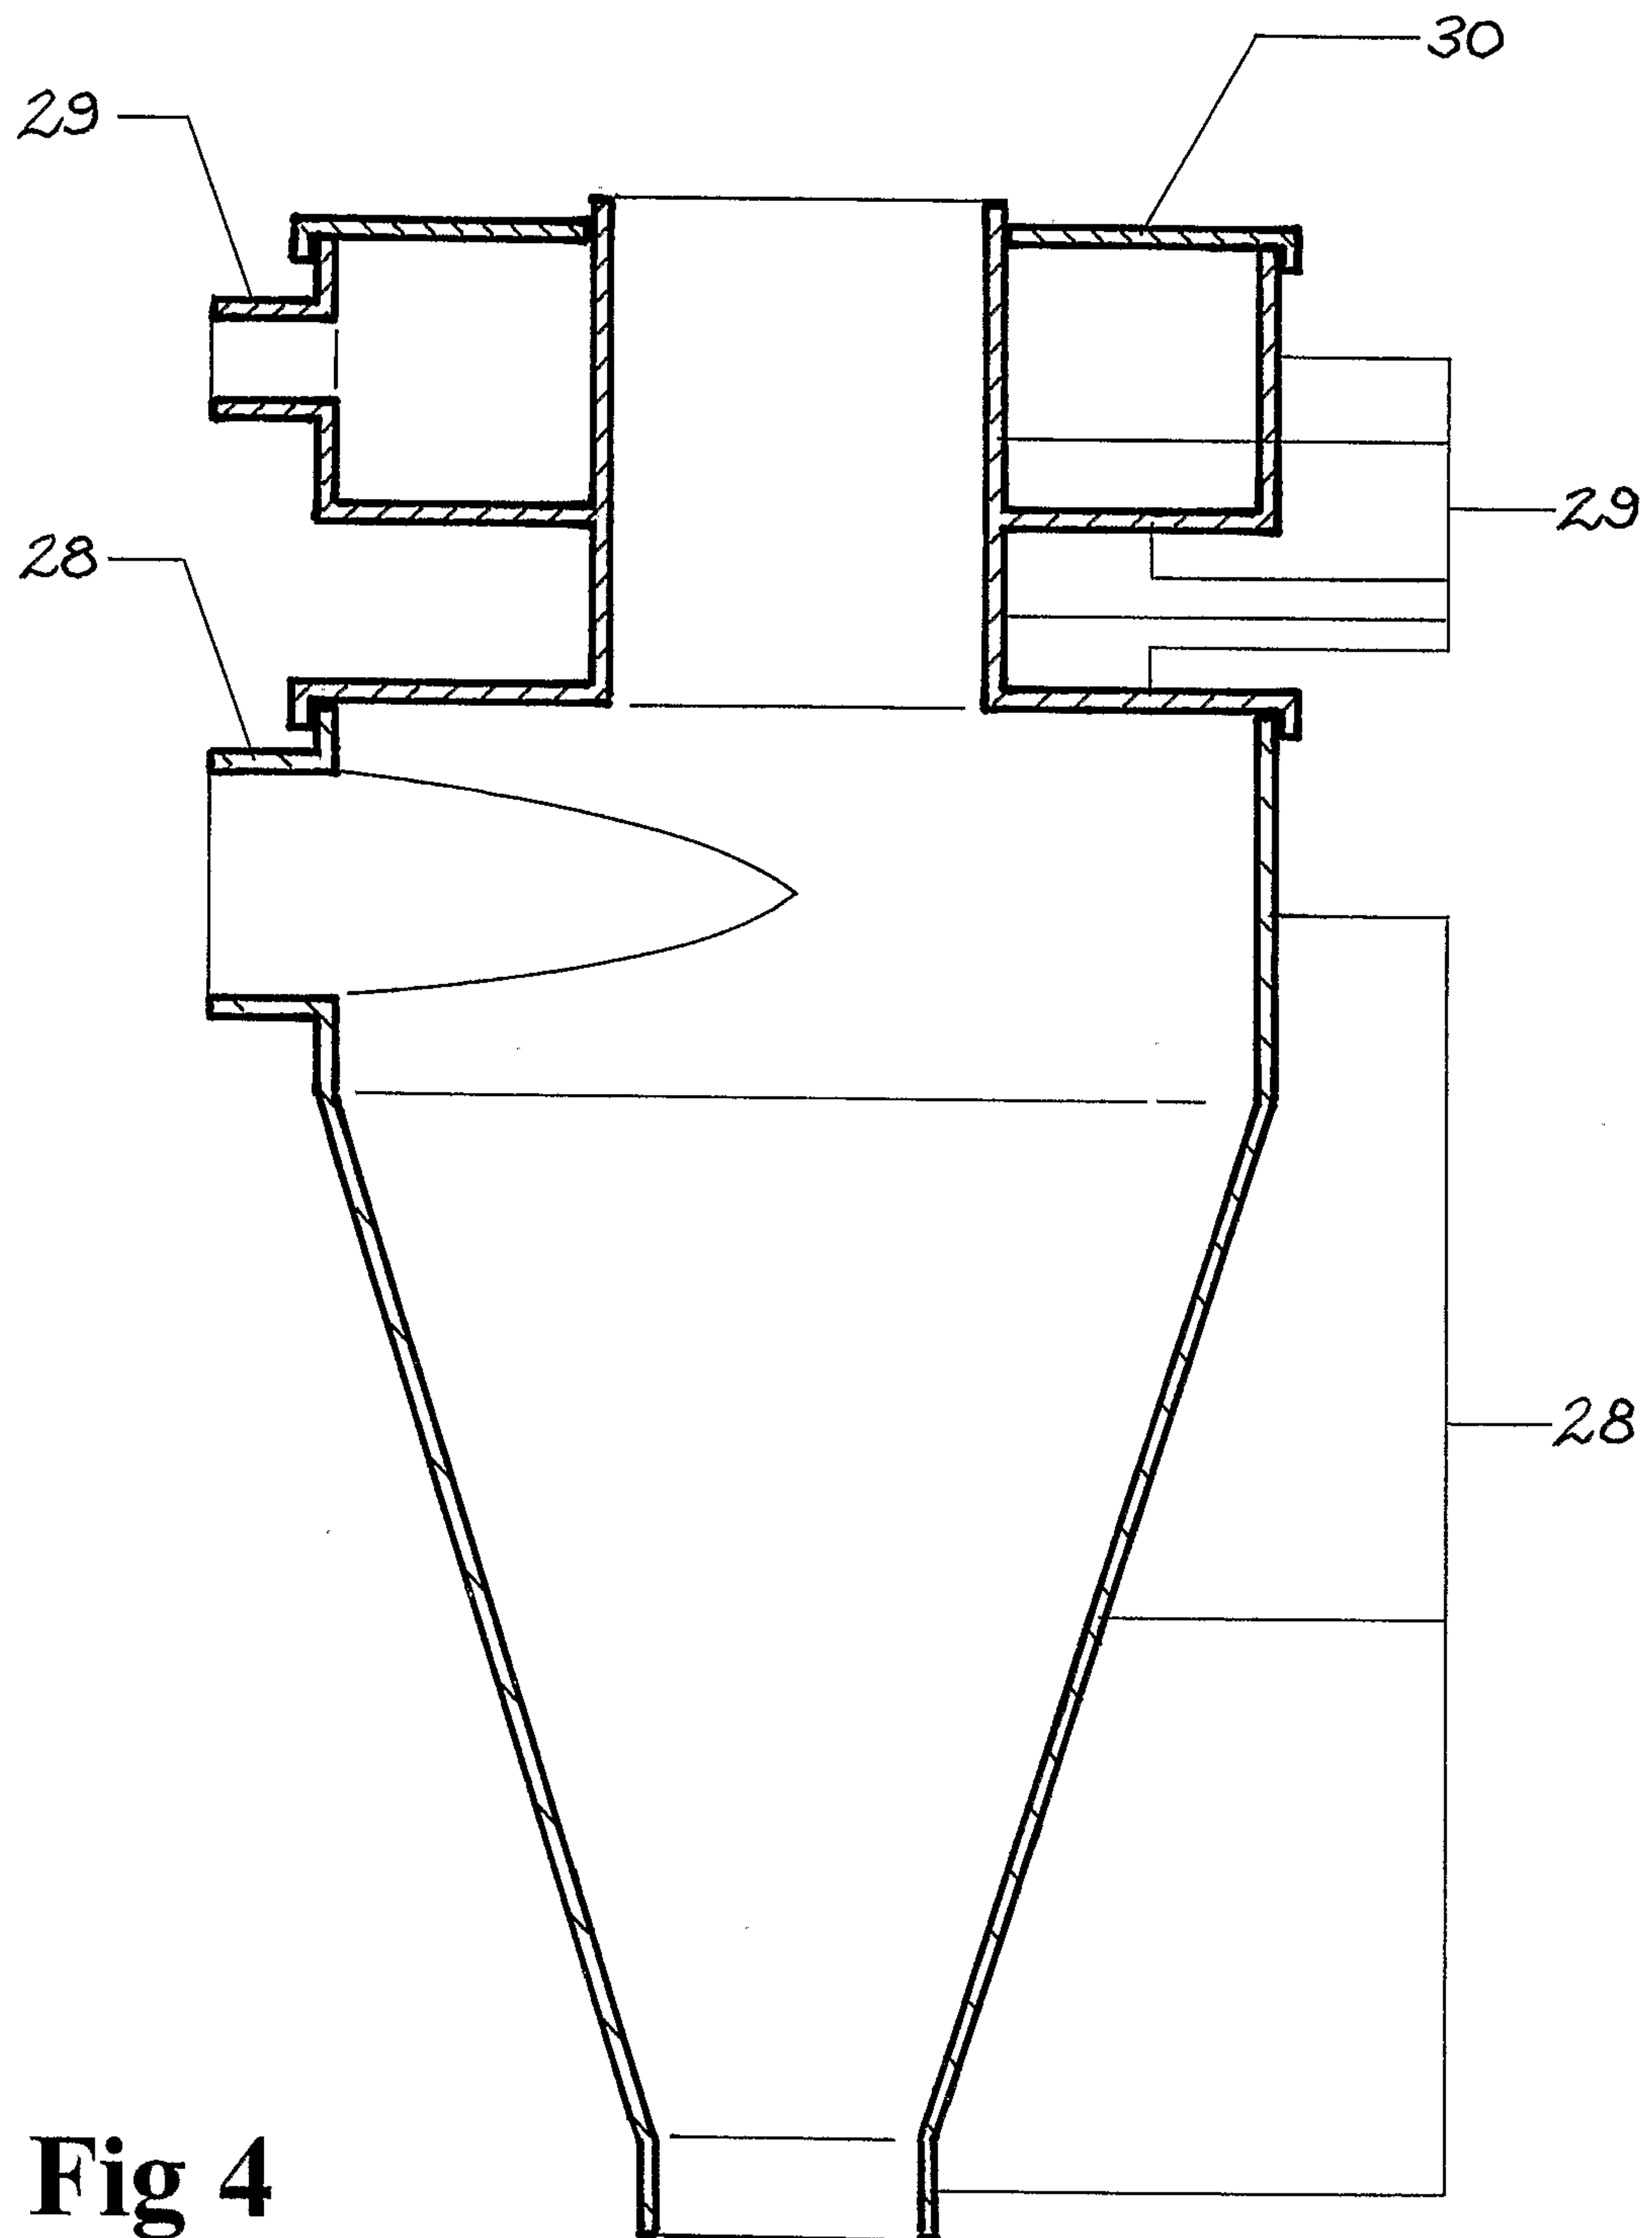


Fig 4

Fig 5