

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(10) International Publication Number

WO 2014/091340 A1

(43) International Publication Date
19 June 2014 (19.06.2014)

WO 2014/091340 A1

(51) International Patent Classification:
G01J 1/02 (2006.01) *G01J 1/42* (2006.01)
G01J 1/04 (2006.01)

(72) Inventors: **MAASS, Henning**; c/o High Tech Campus, Building 5, NL-5656 AE Eindhoven (NL). **MüSCH, Guido Josef**; c/o High Tech Campus, Building 5, NL-5656 AE Eindhoven (NL).

(21) International Application Number: PCT/IB2013/060322

(74) Agents: **STEFFEN, Thomas** et al.; High Tech Campus Building 5, NL-5656 AE Eindhoven (NL).

(22) International Filing Date: 22 November 2013 (22.11.2013)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
61/737,165 14 December 2012 (14.12.2012) US

(71) Applicant: **KONINKLIJKE PHILIPS N.V.** [NL/NL];
High Tech Campus 5, NL-5656 AE Eindhoven (NL).

[Continued on next page]

(54) Title: WRIST-WORN DEVICE FOR SENSING AMBIENT LIGHT INTENSITY

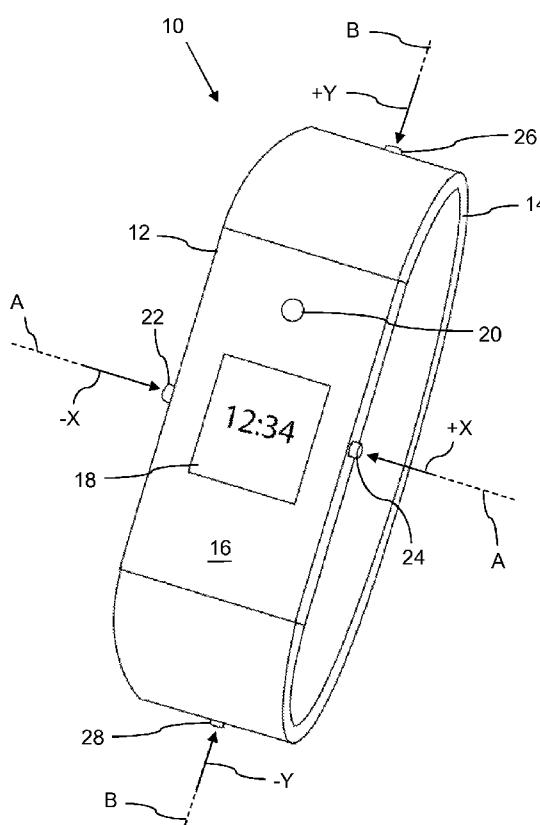

(57) Abstract: The invention relates to a wrist-worn device (10) for sensing ambient light intensity, comprising a plurality of light receivers arranged at different positions of the wrist-worn device (10) in different orientations to receive light from different directions (+X, -X; +Y, -Y; +Z, -Z).

Fig. 1



SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

Wrist-worn device for sensing ambient light intensity

5

FIELD OF THE INVENTION

The invention relates to the field of wrist-worn devices for sensing ambient light intensity, as well as to a corresponding method for sensing ambient light intensity using 10 such a wrist-worn device.

BACKGROUND OF THE INVENTION

Exposure to light is the key mechanism that enables a proper synchronization 15 of the body clock with the solar day cycle. Timing, duration, intensity and spectral composition of light exposure all have impact on the so-called entrainment of a person to a 24-hour circadian rhythm. It has been shown that restorative sleep can only occur in synchronicity with the body clock. For certain people who have a phase shift of their internal 20 body clock relative to the social schedules around them, exposure to bright light at well-defined times can be used to shift their body clock forward or backwards to better align it with their social needs. Also for the treatment of seasonal affective disorder, timed and regular exposure to bright light is an effective means.

The assessment of light levels to which a person is exposed over the course of 25 multiple days or even weeks is an important instrument for the diagnosis of mood and sleep disorders. Existing actigraphy products measure the activity and light exposure with a device that is used and worn similar to a wrist watch.

Such a wrist-worn device is shown, for example, in US 2008/0319354 A1, 30 showing a system and method for monitoring information related to sleep. The wrist-worn device shown in this document comprises an illumination sensor to provide information related to the intensity of ambient illumination of the user. The signal of the sensor can be further processed by suitable electronic computing means.

The common sensor modules are usually mounted such that the axis of main sensitivity is orthogonal to the display surface of the operation module, i.e., orthogonal to the outer hand surface of the user. At the same time, the axis of main sensitivity of the sensor is completely independent from the direction of gaze of the user, with the consequence that

5 there is no good correlation between the light levels being measured and those light levels present at the user's eyes which would be optimal for the estimation of the visual and non-visual effects caused by light exposure such as e.g., shifting human circadian phase. Furthermore, generally the main axis of sensitivity is different from the direction from which the main portion of ambient light is received. In most environments light is not being

10 uniformly received from all directions, but the main exposure is caused by a small number of light sources (the sun, lighting on the ceiling, etc.). It follows from the above that using wrist-worn devices as described above not always leads to satisfactory results in sensing the ambient lighting and estimating its influence on the visual and non-visual effects as e.g., shifting human circadian phase.

15

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a wrist-worn device

20 for sensing ambient light intensity that is improved with respect to the measurement of ambient lighting and its influence on a human being and that decreases or even eliminates the influence of a directional sensitivity of the sensor arrangement within the device.

This object is achieved by a wrist-worn device comprising the features of

25 claim 1.

The wrist-worn device for sensing ambient light intensity according to the present invention comprises not only one but a plurality of light receivers arranged at different positions of the wrist-worn device in different orientations to receive light from

30 different directions. In this arrangement the effect of a directional receptivity of one of the receivers is counterbalanced by different receivers pointing in different directions, so that a multi-directional measurement is possible. This leads to better results in estimating the ambient light intensity. With increasing number of light receivers used in this arrangement, a

quasi omni-directional light measurement is possible, being almost independent from the present orientation of the wrist-worn device on the body of the user.

5 The light receiver might be a conventional light sensor that collects light and converts the received light intensity into a corresponding electric signal that can be further processed. In this case the receptivity of the light receiver corresponds to the sensitivity of a sensor. However, the light receiver can also be any optical device that collects light and further guides it to a sensor device for further processing.

10 According to one preferred embodiment of the present invention, each of the different directions corresponds to a main axis of maximum receptivity of one of the light receivers. This means that the receivers are oriented such that their axes of maximum receptivity lie in different spatial directions. In case of the use of sensors as light receivers, the maximum receptivity corresponds to the maximum sensitivity of the sensor on its main 15 axis.

20 According to another preferred embodiment of the present invention, at least some of the different directions are orthogonal to each other. Just to give one example, one of the light receivers may be placed on top of the wrist-worn device, with its main axis of maximum receptivity standing orthogonal to the back of the hand of the user, while another light receiver is arranged laterally at the wrist-worn device, pointing in a direction orthogonal to the first light receiver.

25 According to another preferred embodiment, at least some of the different directions are opposite to each other. For example, two different light receivers can be arranged on opposite sides of the wrist-worn device.

30 According to still another embodiment of the present invention, the light receivers are arranged in pairs, wherein the two light receivers of each pair are arranged in opposite orientations on one spatial axis of a Cartesian coordinate system. For example, six light receivers can be used in total, with three pairs of light receivers on the spatial axes of a three dimensional coordinate system.

Preferably the wrist-worn device comprises an operation module and a wrist band connected with its ends to opposite sides of the operation module, and the light receivers are arranged in different positions on the operation module and/or the wrist band.

5 The operation module can be, for example, a housing receiving an integrated circuit for processing and storing the signals provided by sensors used as light receivers, comparable to the housing of a common wrist watch.

10 More preferably, the light receivers are sensors for generating a signal corresponding to the received light intensity.

15 According to still another embodiment of the present invention, the light receivers are connected via light conductors with one common sensor that collects the light received by the light receivers. In this case the light receivers themselves are not provided as sensors but only as optical light collecting devices, such as optical lenses, coupled to light conduction fibers that supply the collected light towards the sensor for further processing.

20 More preferably, the light receivers are provided to receive light of one or a plurality of spectral ranges, for example, within the visible light spectrum or also including the infrared or ultraviolet spectral range.

25 According to another preferred embodiment, the wrist-worn device according to the present invention further comprises a central processing unit for processing signals representing the intensities received by the light receivers and for identifying and further processing a signal representing a maximum intensity among these intensities. In this embodiment only the signal of the light receiver having received the maximum intensity among all receivers is further processed.

30 According to another preferred embodiment, the central processing unit is provided for identifying and further processing a signal representing the maximum intensity in one predetermined spectral range.

According to another embodiment of the present invention, the wrist-worn device comprises a central processing unit for processing signals representing the intensities

received by the light receivers and for combining these signals to one general intensity signal. This combination can be achieved, for example, by adding all signals of the light receivers, or by any other linear or non-linear combination of them.

5 According to still another preferred embodiment, the wrist-worn device further comprises an accelerometer for sensing the spatial orientation of the of the wrist-worn device. The signal of the accelerometer can be used to identify, for example, the light receiver that points to the ground, or another light receiver that points to the ceiling or to the sky. This information can be used to enhance the overall sensing sensitivity from the spatial
10 arrangement of the light receivers.

The invention also refers to a method for sensing ambient light intensity using a wrist-worn device of the above kind, comprising the steps of supplying signals representing the intensities received by the light receivers to the central processing unit, comparing the
15 supplied signals, and identifying a signal representing the maximum intensity among the received intensities.

Another method for sensing ambient light intensity according to the present invention, using a wrist-worn device as mentioned above, comprises the steps of supplying
20 signals representing the intensities received by the light receivers to central processing unit, and combining the supplying signals to one general intensity signal.

BRIEF DESCRIPTION OF THE DRAWINGS

25

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

In the drawings:

30

Fig. 1 is a perspective front view on one embodiment of a wrist-worn device according to the present invention;

Fig. 2 is a perspective back view of the wrist-worn device shown in Fig. 1; and

Fig. 3 and 4 are a perspective top view and a perspective bottom view of the wrist-worn device of Figs. 1 and 2.

5

DETAILED DESCRIPTION OF EMBODIMENTS

10 Fig. 1 shows a wrist-worn device 10 for sensing the ambient light intensity in the environment of a user (not shown) wearing this device 10. Generally the wrist-worn device 10 comprises an operation module 12 in the shape of a flat rectangular box, and a flexible wrist band 14 that is attached with its ends to opposite sides of the operation module 12 such that the operation module 12 and the wrist band 14 form a ring. The inner diameter 15 of the wrist band 14 is dimensioned such that the wrist-worn device 10 can comfortably be worn on the wrist of a user. For putting on the device 10, the wrist band 14 may have a certain elasticity to be widened, or a opening and closing mechanism (not shown in the Figures) may be provided for connecting one end of the wrist band 14 to the operation module 12. Generally the operation module 12 and the wrist band 14 are formed similar to a 20 common wrist watch.

25 The operation module 12 is formed as a housing that receives an integrated electronic circuit for processing and storing electric signals, as will be described further below. On the top surface 16 of the operation module 12, there is a display 18 for displaying a status information of the device 10 or any other information, like, for example, the daytime.

30 Further provided on the top surface 16 of the operation module 12 there is a light sensor 20 for measuring the ambient light intensity. Other sensors 22 and 24 are arranged laterally at the operation module 12, while another sensor 26 is arranged on top of the wrist band 14 (with respect to the orientation in Fig. 1), a fifth light sensor 28 is positioned opposite to the top sensor 26 on the bottom of the wrist band 14, and finally a sixth sensor (not shown in Fig. 1 but present in Fig. 2) is located on the back of the wrist band, opposite to the front sensor 20 on top of the operation module 12.

All sensors 20, 22, 24, 26, 28, 30 are arranged at different positions of the wrist-worn device 10 to receive light from different directions. Each of these directions corresponds to a main axis of maximum sensitivity of one of the sensors 20, 22, 24, 26, 28, 30. For example, the right sensor 24 on the right side of the operation module 12 is oriented 5 such that it receives light from the right side in Fig. 1, and this sensor 24 has a main axis of maximum sensitivity marked by a dashed line A that stands perpendicular to the side wall of the operation module 12 and to the ring plane of the wrist band 14. In this axis A, the sensitivity of the sensor 24 is at its maximum. The sensor 24 is positioned to receive light from a direction +X (marked by an arrow in Fig. 1) along its main axis A.

10

The sensor 22 is arranged on the opposite lateral side of the operation module 12, with its main axis of maximum sensitivity falling together with the axis A of the sensor 24 described before. However, this left sensor 22 is arranged to receive light from the 15 opposite direction -X (also marked by an arrow opposite to the arrow +X in Fig. 1) along this axis A. As a result, both opposite sensors 22 and 24 are opposite to each other, arranged to receive light from opposite directions +X, -X on a common axis A of maximum sensitivity.

The top sensor 26 and the bottom sensor 28 are also arranged opposite to each 20 other to receive light from opposite directions. Namely, the top sensor 26 is arranged to receive light from a top direction +Y perpendicular to the surface of the wrist band 14, while the bottom sensor 28 is arranged to receive light from the opposite direction -Y, while the marked directions +Y, -Y both lie on the same main axis B representing the maximum sensitivity of the sensors 26 and 28. This second main axis B of sensitivity is marked by the 25 dashed line in Fig. 1. It is noted that this second main axis B of maximum sensitivity stands perpendicular to the first main axis A of maximum sensitivity of the left and right sensors 22 and 24.

Finally the front sensor 20 on top of the operation module 12 and the back 30 sensor 30 (Fig. 2) are opposite to each other to receive light from the opposite directions marked by arrows +Z, -Z. Each of these directions +Z, -Z lies on a main axis C of maximum sensitivity of the front and back sensors 20 and 30.

In the arrangement described above, each two light sensors of the six light sensors 20, 22, 24, 26, 28, 30 are arranged in pairs, wherein two light sensors of one pair are

arranged in opposite orientations +X, -X, +Y, -Y, and +Z, -Z, respectively, on one spatial axis of a Cartesian coordinate system spanned by the orthogonal axes of these pairs. These orthogonal axes are represented by the described axes A, B, and C of maximum sensitivity of the sensors 20, 22, 24, 26, 28, 30. This further means that each two sensors are arranged
5 orthogonal to each other, for example the left sensor 22 and the top sensor 26, the right sensor 24 and the bottom sensor 28, or the top sensor 26 and the back sensor 30, and so forth.

By this arrangement, it is possible to sense the ambient light intensity in a quasi omni-directional way, receiving light from all directions in the three dimensional space.

10 By use of the signals of all sensors 20, 22, 24, 26, 28, 30, it is possible to strongly decrease or even eliminate the influence of a directional sensitivity of each of the sensors, i.e. light falling along the main axis A, B or C of maximum sensitivity of the respective sensor 20, 22, 24, 26, 28, 30 generates a stronger signal than light arriving with an incident angle with respect to the main axis of maximum sensitivity of the respective sensor. This effect can be minimized
15 by the above described arrangement.

In the present example, sensors are used as light receivers to transform light into an electric signal that can be further processed and/or stored by a central processing unit in the operation module 12. In the present embodiment, the sensors 20, 22, 24, 26, 28, 30 are
20 represented by opto-sensitive electronic components. However, it is possible to arrange other kinds of light receivers in place of the sensors 20, 22, 24, 26, 28, 30 at the same positions and with the same orientations, that also have a main axis of maximum receptivity for light, in form of optical elements that collect light and further supply the collected light via light conductors towards a common sensor that is housed within the operation module 12, so that
25 the electric signal is generated by this common sensor. It is also possible that the light receivers (i.e., sensors or any other kinds of light collecting optical elements) are provided to receive light of one or a plurality of spectral ranges, for example, within the visible light spectrum or in the infrared or ultraviolet spectral area. The central processing unit may then process signals representing the intensities received by the light receivers and identify the
30 signal that represents the maximum measured intensity, for further storing and/or processing. This means that the central processing unit decides which of the light receivers or sensors measures the maximum intensity, and further processes only the signals of this identified sensor. It is further possible to carry out this identification and further processing on one selected spectral range of the sensors.

Another possibility is to combine the signals of all light receivers or light sensors to one general intensity signal within the central processing unit, by any linear or non-linear combination. This processing can also be weighted by an accelerometer (not shown) that is provided within the operation module 12 for sensing the spatial orientation of the wrist-worn device 10. In this case it is possible to identify, for example, one sensor that points in an upward direction towards the sky or the room ceiling, and to use this identification or information for further processing of the signals representing the intensities of the sensors 20, 22, 24, 26, 28, 30.

10

While the invention has been illustrated and described in detail in the drawings and foregoing description, such illustration and description are to be considered illustrative or exemplary and not restrictive; the invention is not limited to the disclosed embodiments. Other variations to the disclosed embodiments can be understood and effected by those skilled in the art in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims. In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage. Any reference signs in the claims should not be construed as limiting the scope.

15

20

CLAIMS:

1. Wrist-worn device (10) for sensing ambient light intensity, comprising a plurality of light receivers arranged at different positions of the 5 wrist-worn device (10) in different orientations to receive light from different directions (+X, -X; +Y, -Y; +Z, -Z).
2. Wrist-worn device according to claim 1, wherein each of the different directions (+X, -X; +Y, -Y; +Z, -Z) corresponds 10 to a main axis (A,B,C) of maximum receptivity of one of the light receivers.
3. Wrist-worn device according to claim 1 or 2, wherein at least some of the different directions (+X, -X; +Y, -Y; +Z, -Z) are orthogonal to each other.
4. Wrist-worn device according to one of the preceding claims, wherein at least some of the different directions are opposite to each other.
5. Wrist-worn device according to one of the preceding claims, 20 wherein the light receivers are arranged in pairs, wherein the two light receivers of each pair are arranged in opposite orientations on one spatial axis of a Cartesian coordinate system.
6. Wrist-worn device according to one of the preceding claims, 25 comprising an operation module (12) and a wristband (14) connected with its ends to opposite sides of the operation module (12), wherein the light receivers are arranged in different positions on the operation module and/or the wristband.
7. Wrist-worn device according to one of the preceding claims, 30 wherein the light receivers are sensors (20,22,24,26,28,30) for generating a signal corresponding to the received light intensity.

8. Wrist-worn device according to one of the preceding claims, wherein the light receivers are connected via light conductors with one common sensor that collects the light received by the light receivers.

5

9. Wrist-worn device according to one of the preceding claims, wherein the light receivers are provided to receive light of one or a plurality of spectral ranges.

10

10. Wrist-worn device according to one of the preceding claims, further comprising a central processing unit for processing signals representing the intensities received by the light receivers and for identifying and further processing a signal representing the maximum intensity among these intensities.

15

11. Wrist-worn device according to one of the preceding claims, wherein the central processing unit is provided for identifying and further processing a signal representing the maximum intensity in one predetermined spectral range.

20

12. Wrist-worn device according to one of the preceding claims, further comprising a central processing unit for processing signals representing the intensities received by the light receivers and for combining these signals to one general intensity signal.

25

13. Wrist-worn device according to one of the preceding claims, further comprising an accelerometer for sensing the spatial orientation of the wrist-worn device (10).

30

14. Method for sensing ambient light intensity using a wrist-worn device according to claim 10 or 11, comprising the following steps:
- supplying signals representing the intensities received by the light receivers to the central processing unit,
- comparing the supplied signals, and

- identifying a signal representing the maximum intensity among the received intensities.

15. Method for sensing ambient light intensity using a wrist-worn device

5 according to claim 12,

comprising the following steps:

- supplying signals representing the intensities received by the light receivers to the central processing unit,
- combining the supplied signals to one general intensity signal.

10

15

20

25

30

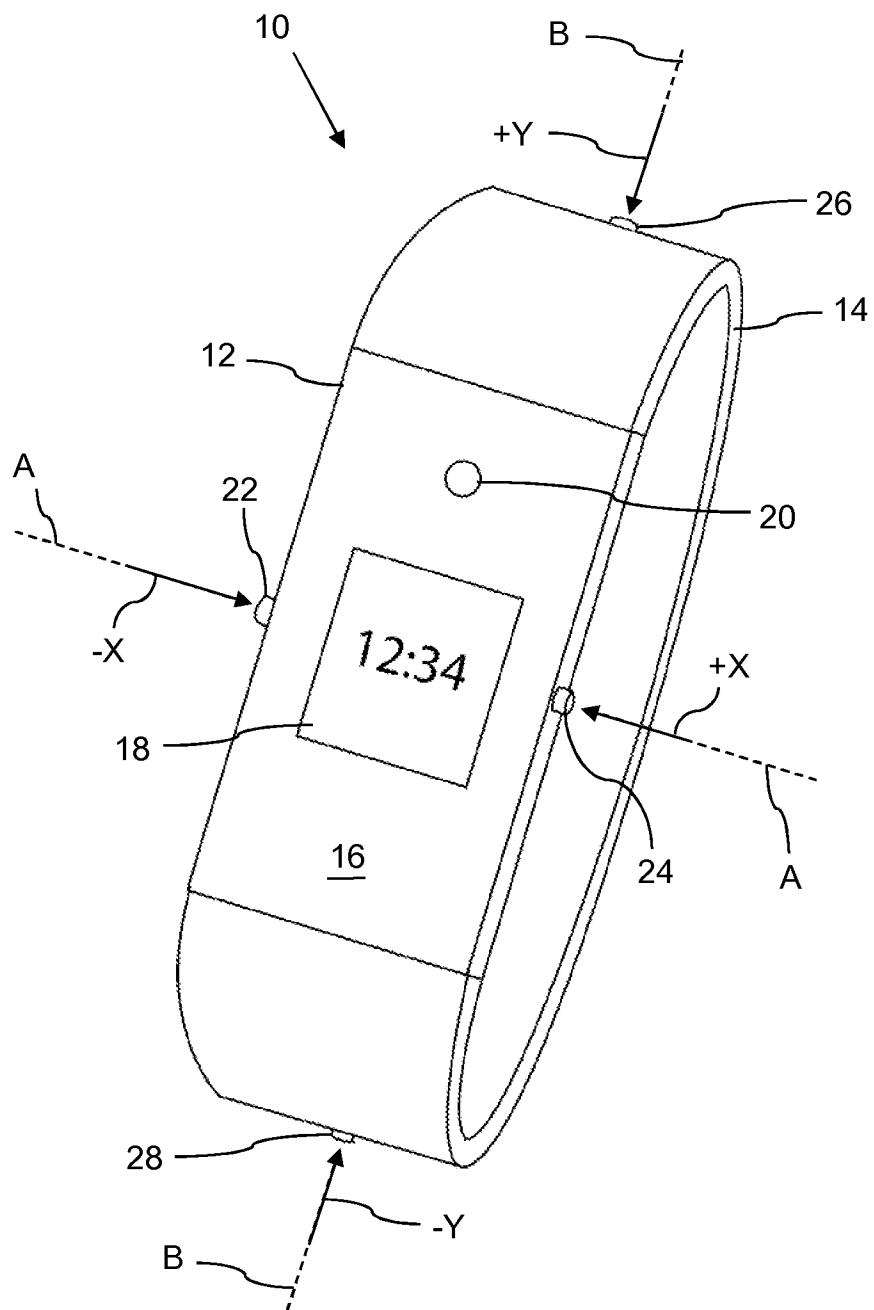


Fig. 1

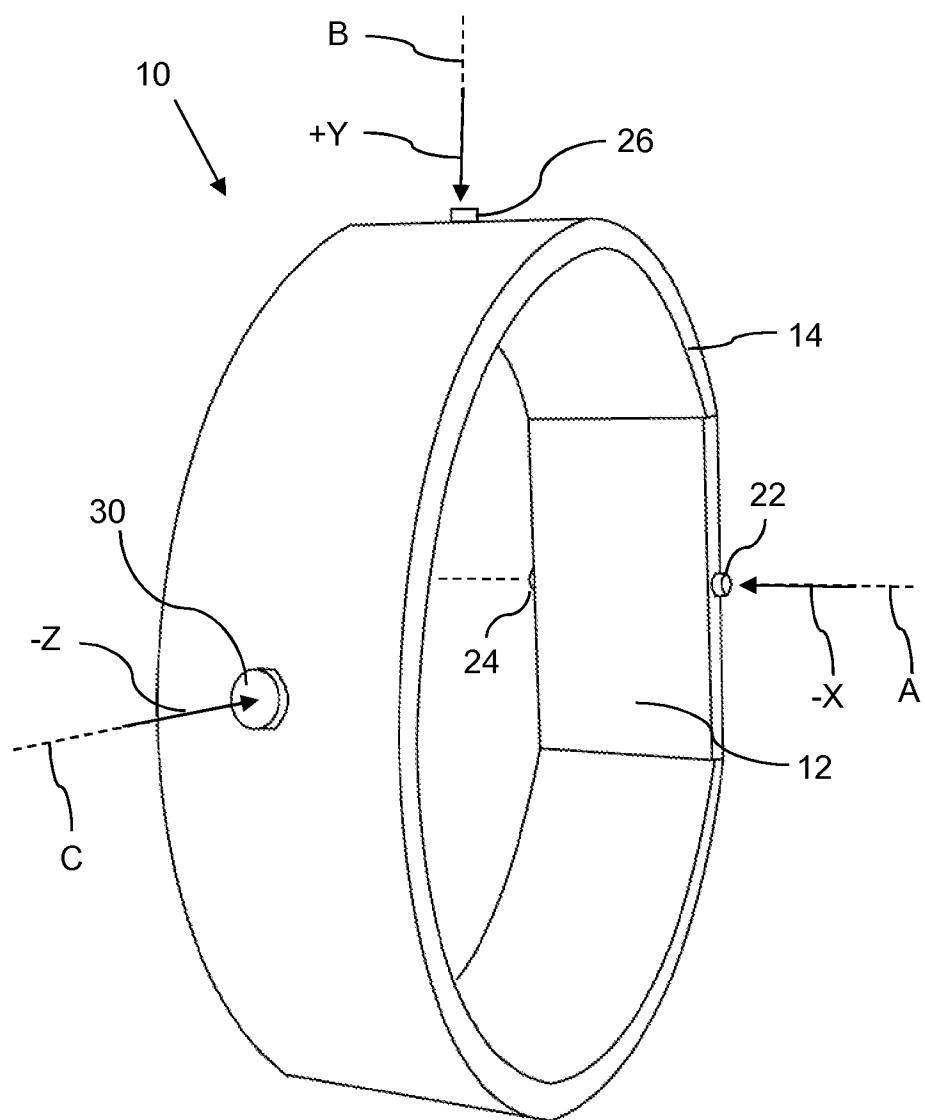


Fig. 2

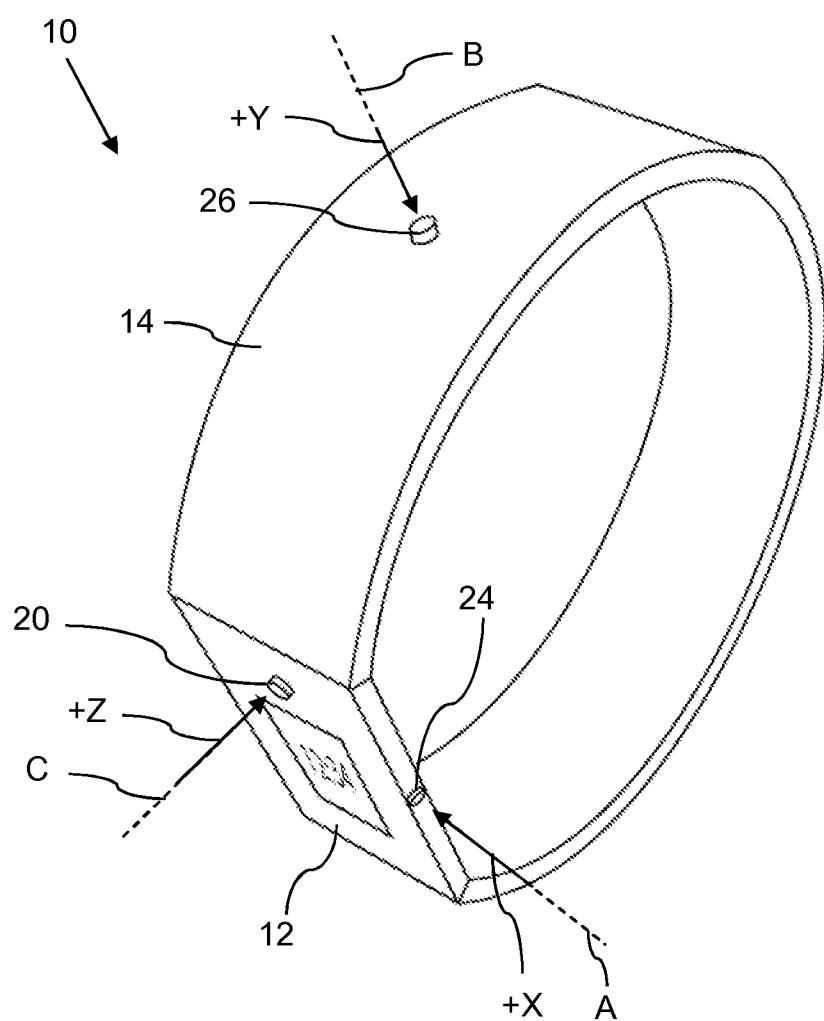


Fig. 3

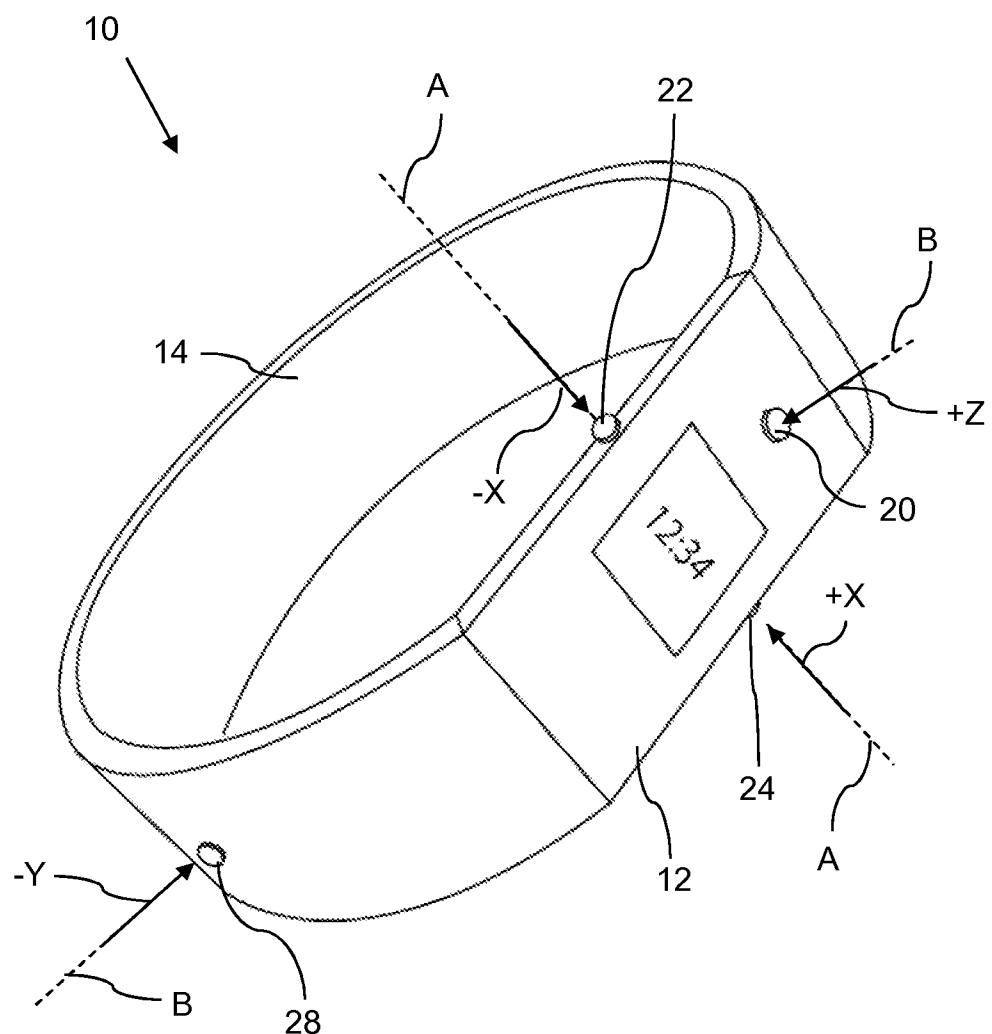


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2013/060322

A. CLASSIFICATION OF SUBJECT MATTER
INV. G01J1/02 G01J1/04 G01J1/42
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G01J A61B A44C G04B G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/154261 A1 (RIC INVESTMENTS LLC [US]) 18 December 2008 (2008-12-18) paragraphs [0030], [0031], [0033] - [0035], [0060], [0061]; figure 2	1-9,13
Y	US 2010/186817 A1 (CHEN SHIH-HUI [TW] ET AL) 29 July 2010 (2010-07-29) paragraphs [0002], [0019], [0020], [0027]; figures 1,2	10-12, 14,15
A	EP 0 930 512 A1 (INFRARROJO Y MICROELECTRONICA [ES]) 21 July 1999 (1999-07-21) paragraph [0058]; figure 1	1,14,15
		-/-

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

18 March 2014

25/03/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Jacquin, Jérôme

INTERNATIONAL SEARCH REPORT

International application No PCT/IB2013/060322

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00/28290 A1 (CONTROL DEVICES INC [US]; HILL JONATHAN W [US]; HARMON THOMAS E [US]) 18 May 2000 (2000-05-18) page 5 - page 6; figures 2,4 -----	1,14,15
A	US 4 975 584 A (BENJAMIN THOMAS L [US] ET AL) 4 December 1990 (1990-12-04) column 7, line 52 - column 8, line 9; figure 2 -----	1,14,15
Y	US 4 491 727 A (APPELBAUM JOSEPH [IL] ET AL) 1 January 1985 (1985-01-01) column 3, line 59 - column 6, line 6; figures 2,5,8 -----	10-12, 14,15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2013/060322

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
WO 2008154261	A1	18-12-2008	AU	2008262058 A1	18-12-2008
			CN	101681330 A	24-03-2010
			EP	2158545 A1	03-03-2010
			JP	2010537674 A	09-12-2010
			US	2008319354 A1	25-12-2008
			WO	2008154261 A1	18-12-2008
<hr style="border-top: 1px dashed black; border-bottom: none; border-left: none; border-right: none;"/>					
US 2010186817	A1	29-07-2010	TW	M341193 U	21-09-2008
			US	2010186817 A1	29-07-2010
<hr style="border-top: 1px dashed black; border-bottom: none; border-left: none; border-right: none;"/>					
EP 0930512	A1	21-07-1999	DE	69713610 D1	01-08-2002
			DE	69713610 T2	19-12-2002
			EP	0930512 A1	21-07-1999
			ES	2119697 A1	01-10-1998
			US	6355925 B1	12-03-2002
			WO	9811450 A1	19-03-1998
<hr style="border-top: 1px dashed black; border-bottom: none; border-left: none; border-right: none;"/>					
WO 0028290	A1	18-05-2000	AT	288073 T	15-02-2005
			AU	2145900 A	29-05-2000
			DE	69923472 D1	03-03-2005
			DE	69923472 T2	29-12-2005
			EP	1133679 A1	19-09-2001
			US	6084228 A	04-07-2000
			WO	0028290 A1	18-05-2000
<hr style="border-top: 1px dashed black; border-bottom: none; border-left: none; border-right: none;"/>					
US 4975584	A	04-12-1990	NONE		
<hr style="border-top: 1px dashed black; border-bottom: none; border-left: none; border-right: none;"/>					
US 4491727	A	01-01-1985	NONE		
<hr style="border-top: 1px dashed black; border-bottom: none; border-left: none; border-right: none;"/>					