



US 20030186038A1

(19) **United States**

(12) **Patent Application Publication**

Ashton et al.

(10) **Pub. No.: US 2003/0186038 A1**

(43) **Pub. Date: Oct. 2, 2003**

(54) **MULTI ORIENTATION COMPOSITE MATERIAL IMPREGNATED WITH NON-LIQUID RESIN**

Related U.S. Application Data

(63) Continuation-in-part of application No. 09/443,227, filed on Nov. 18, 1999, now Pat. No. 6,482,497.

(76) Inventors: **Larry J. Ashton**, Mapleton, UT (US);
Craig B. Simpson, Mapleton, UT (US);
Rex W. Kay, Goshen, UT (US); **Troy L. White**, Goshen, UT (US); **Mike Glen Allman**, Spanish Fork, UT (US)

Publication Classification

(51) **Int. Cl.⁷** **D04H 3/00**
(52) **U.S. Cl.** **428/297.4**

(57) **ABSTRACT**
A composite material made of multiple filament bands is disclosed. The filament bands are wound to create a composite material. The filament bands may be impregnated with a solid or semi-solid resin. The filament bands are wound in multiple orientations to form a sheet of composite material. Additionally, the composite material may be made to have a varying number of layer and fiber orientations throughout the sheet of composite material. In another embodiment, a composite component requiring multiple layers and fiber orientations may be substantially manufactured during a filament winding process.

Correspondence Address:
MADSON & METCALF
GATEWAY TOWER WEST
SUITE 900
15 WEST SOUTH TEMPLE
SALT LAKE CITY, UT 84101

(21) Appl. No.: **10/175,964**

(22) Filed: **Jun. 20, 2002**

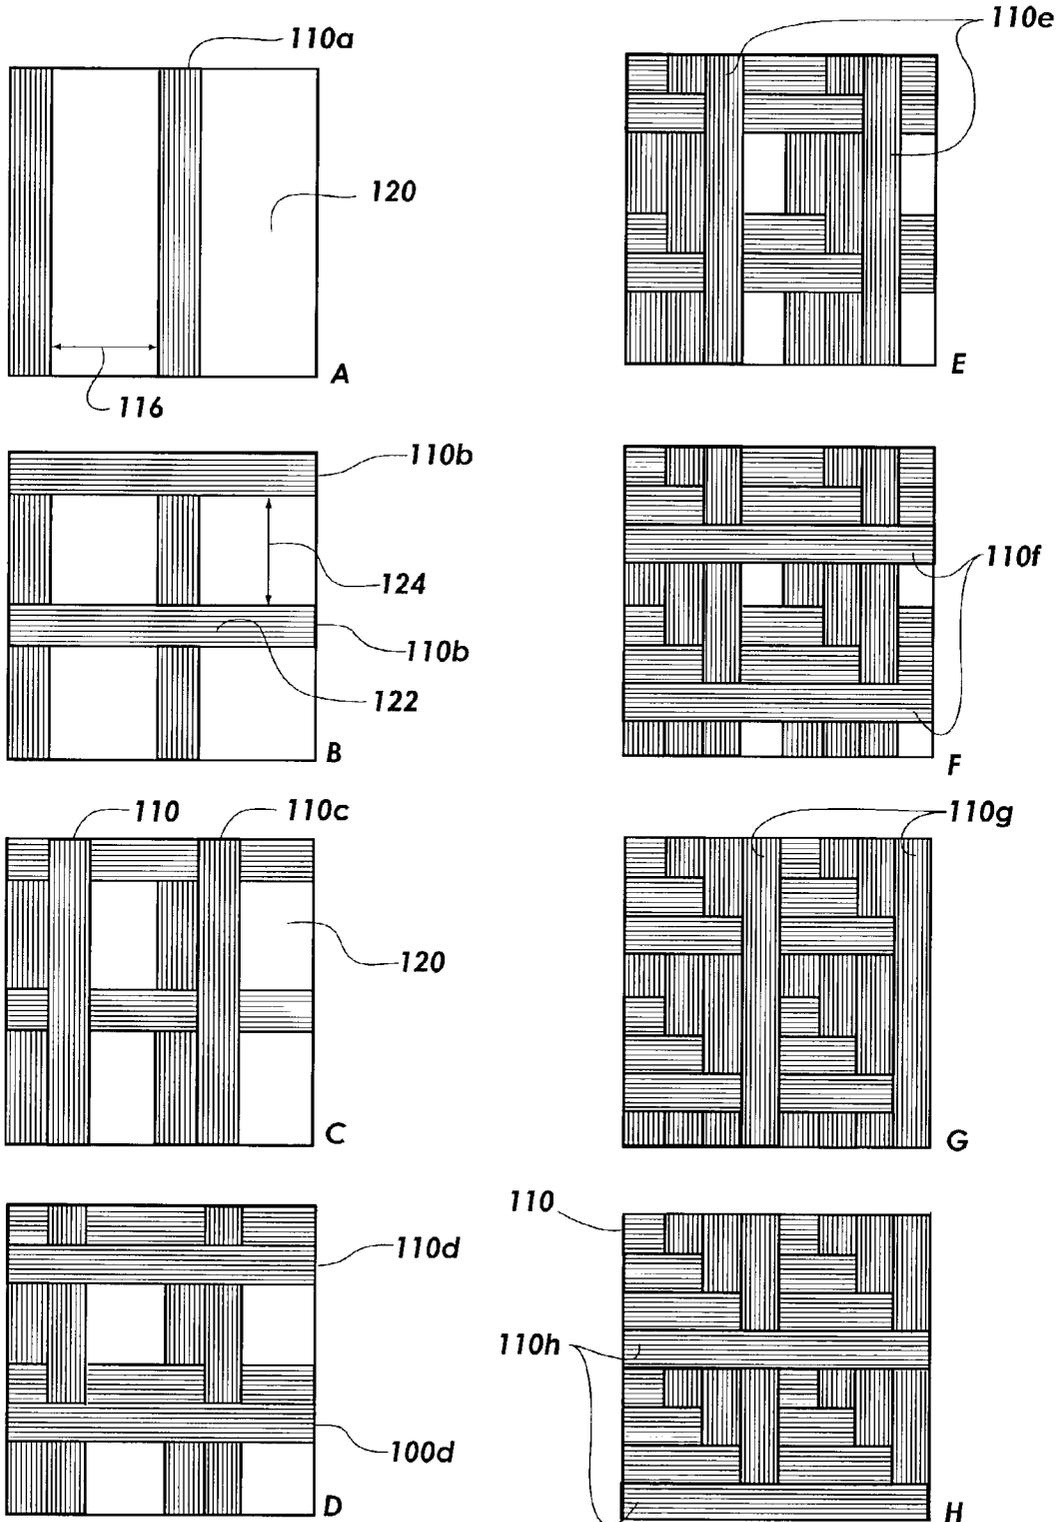


FIG. 1

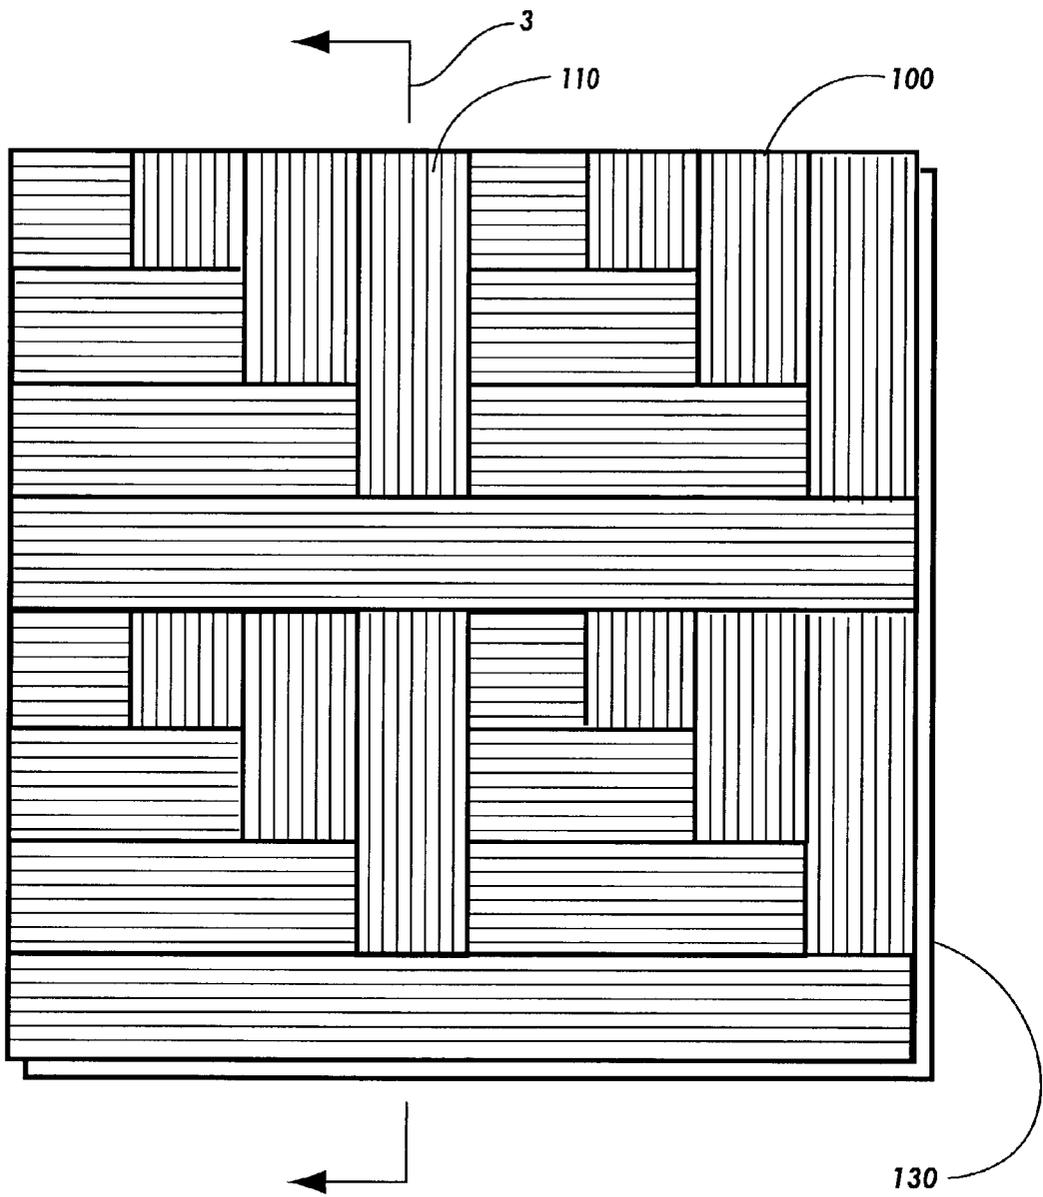


FIG. 2

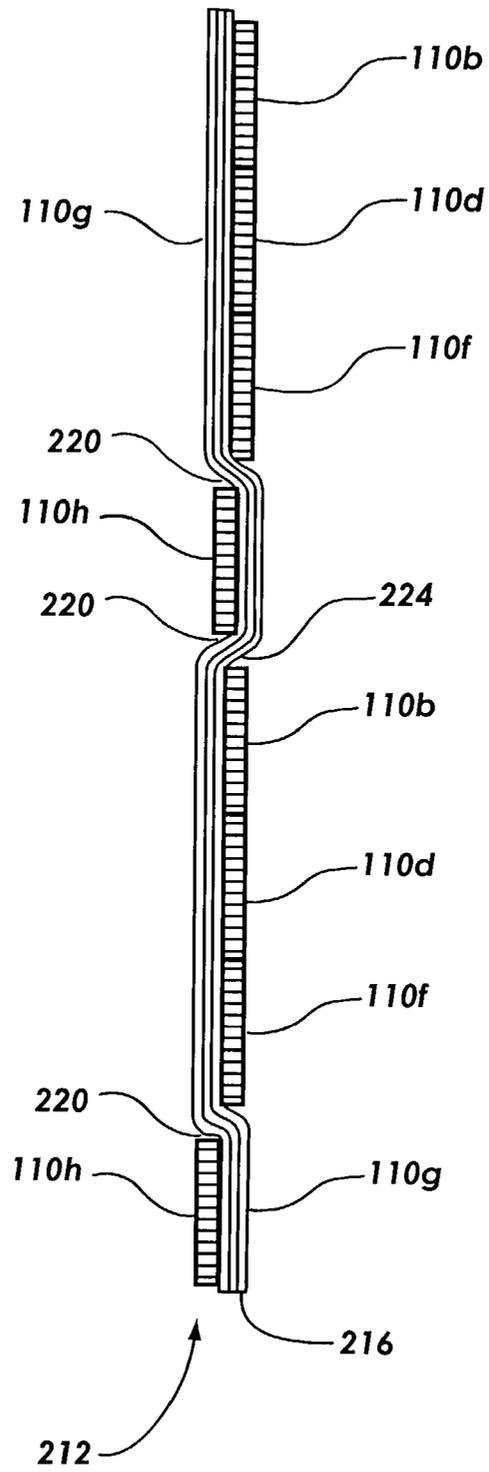


FIG. 3

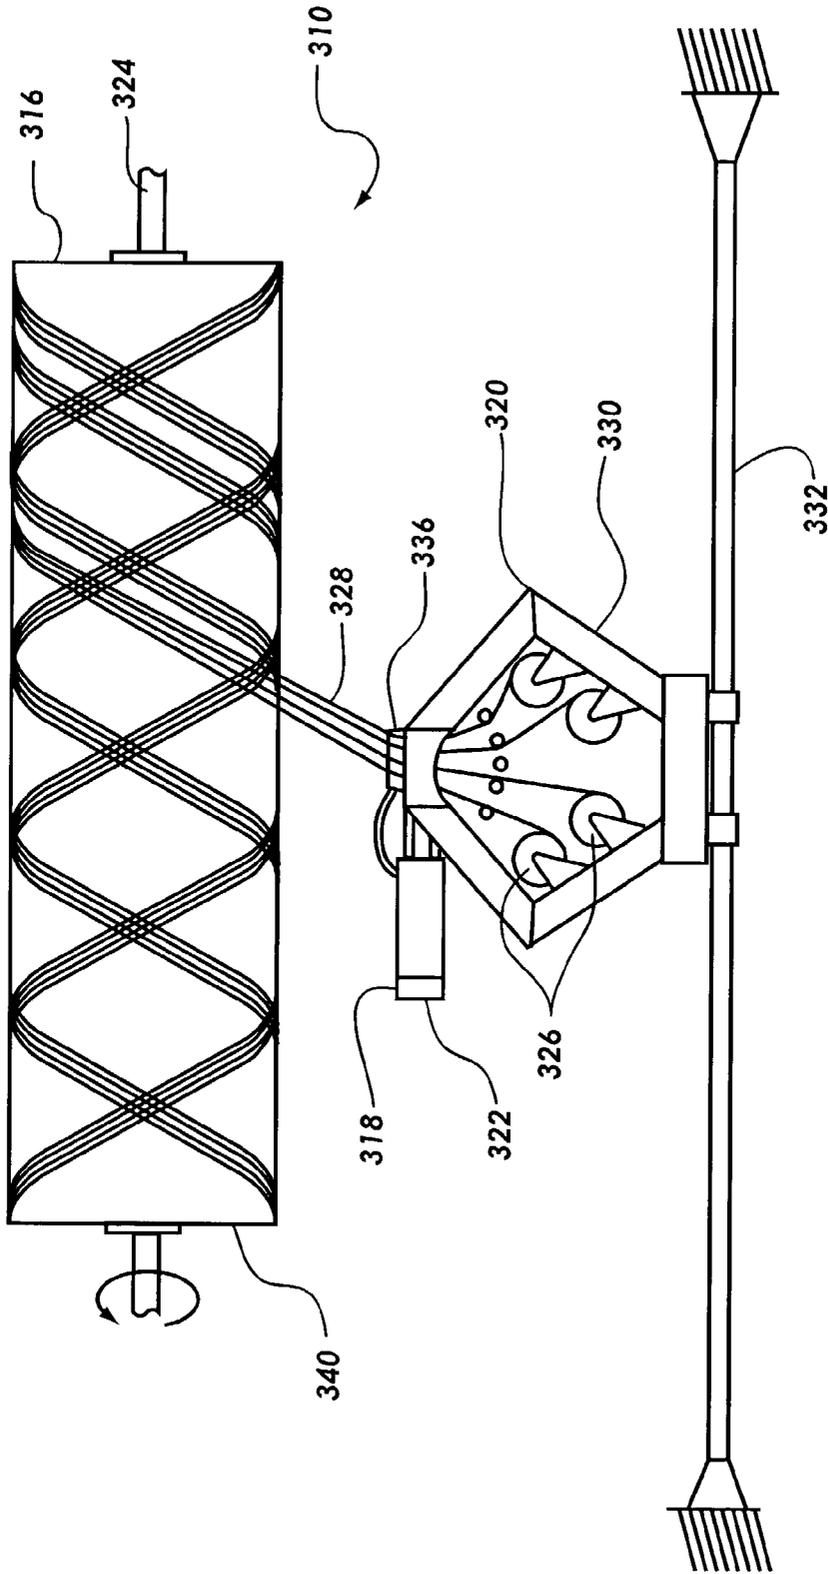


FIG. 4

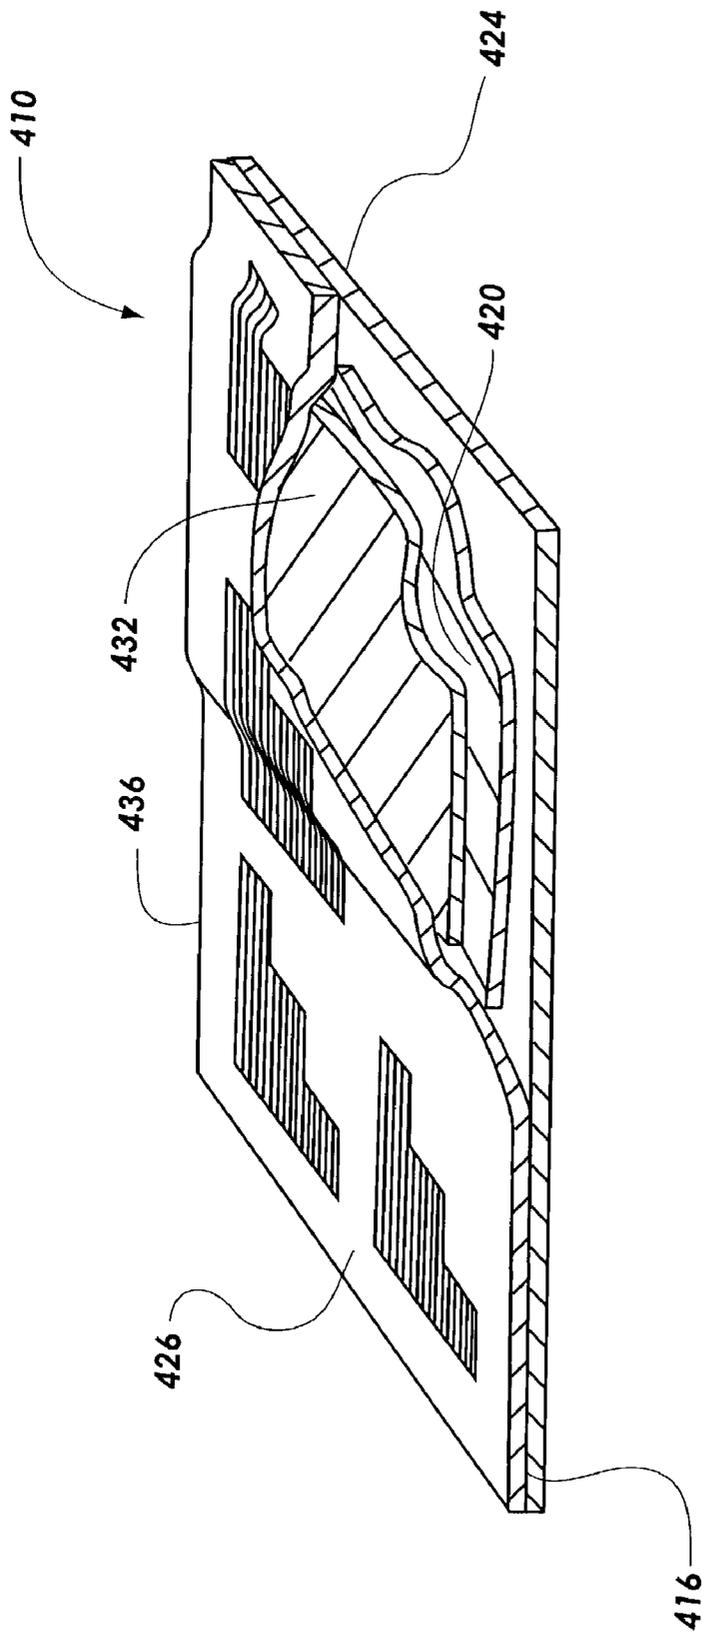


FIG. 5

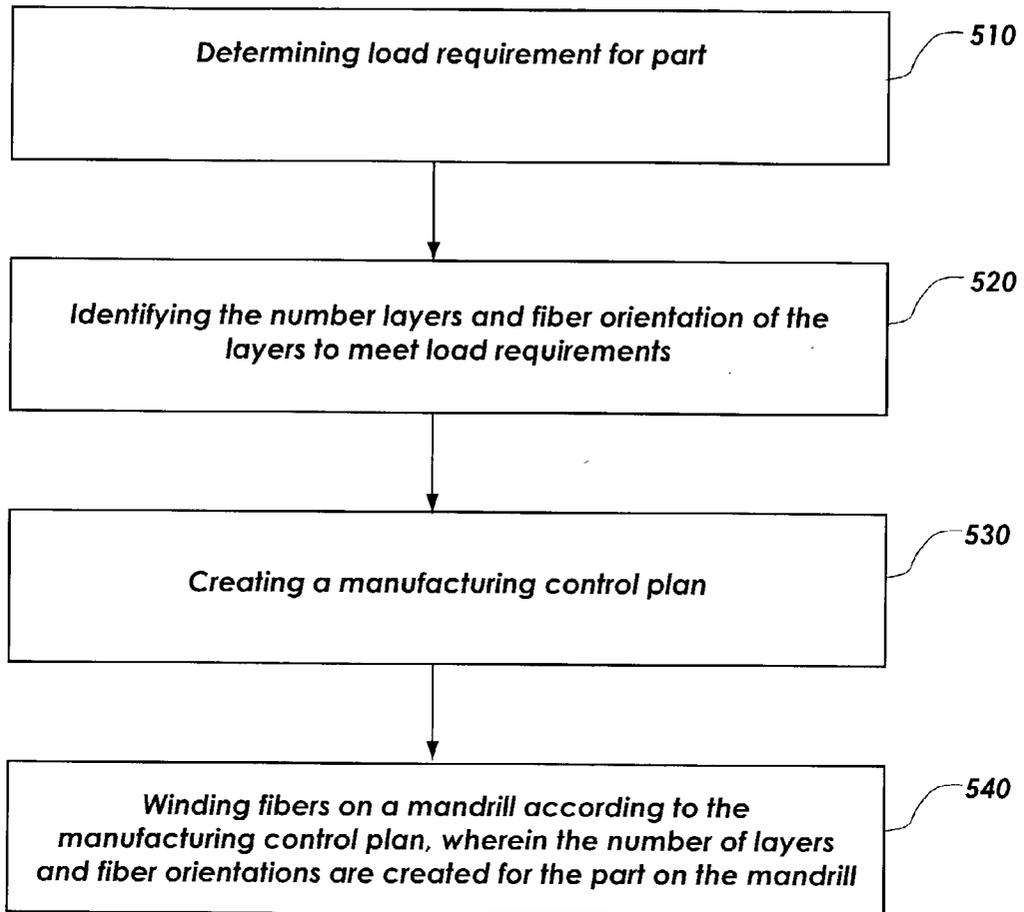


FIG. 6

MULTI ORIENTATION COMPOSITE MATERIAL IMPREGNATED WITH NON-LIQUID RESIN

RELATED APPLICATION

[0001] This application is a continuation-in-part of co-pending patent application Ser. No. 09/443,227 filed Nov. 18, 1999 and entitled PRESSURE-CYCLED, PACKET-TRANSFERRED INFUSION OF RESIN-STITCHED PREFORMS and is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to composite materials. More particularly, the present invention relates to a composite material having multiple resin impregnated filament bands.

[0004] 2. Technical Background

[0005] Filament winding and composite materials have been a desirable substitute for metals and other materials in manufacturing applications. Composite materials have the advantages of being high strength, lightweight, and easily formable. Composite materials are comprised of a fiber, typically carbon, that is impregnated with a curable resin. Composite materials are often drapable like a fabric, allowing the uncured composite material to be formed into various shapes. Once the composite material is in the desired shape, the resin is cured and hardened to create a rigid structure.

[0006] Despite the many positive characteristics of composite materials, the overall cost of composite materials often makes their use impractical. Various factors affect the cost of composite materials. One factor is the number of manufacturing steps required in order to form a composite structure. Often manufacturing a composite material and forming the composite material into the desired shape requires multiple machines and extensive hand labor. For example, one method of creating a composite material is to weave fibers into a sheet of composite material. Weaving large sheets of carbon fibers can require expensive machines and can be a time intensive process.

[0007] Furthermore, impregnating a composite material with a resin adds additional steps to the process. These additional steps can involve impregnating entire sheets of composite materials with resins, creating difficulties in uniformly applying a resin to a large sheet of composite material. Additionally, these impregnating processes are often performed by different manufacturers at different locations, adding manufacturing and shipping costs at each step. As a result, the overall price of the composite materials for the end user can be high.

[0008] Another shortcoming of composite materials is the amount of hand labor required when assembling a composite structure. Often, multiple layers of composite materials are required in order to make a structure, and different orientations of composite materials are needed. In many current processes, each individual layer of composite material is laid up and oriented by hand onto a form or other shaping structure. The process of laying up and orienting individual sheets of composite material can add further expense and time to the already expensive and time-consuming manufacturing process.

[0009] Yet another problem with current composite materials is the handling of the resin impregnated composite material. In many applications the resin is made to have a low viscosity in order to allow resin to flow between the individual fibers of the material. The resin may be provided in a liquid form at ambient temperatures. While low viscosity resin allows for better permeation of the composite material, a low viscosity of liquid resin creates undesirable handling characteristics. Furthermore, the low viscosity resin does not effectively maintain the lay up of the composite sheet. Thus, the fibers may separate and fall apart when being handled or transported. Also, a low viscosity resin may flow away from certain sections of the composite material while being cured, leaving some areas with insufficient resin.

[0010] Therefore, what is needed in the art is an inexpensive composite material that eliminates the costs inherent in the composite manufacturing process. It would be an advancement in the art to provide a composite material impregnated with a resin that is solid or semi-solid at ambient temperatures. It would also be an advancement in the art to provide a composite material that is manufacturable in multiple layers and with multiple fiber orientations.

[0011] It would be another advancement in the art to provide a process that eliminates manual assembly steps in forming composite structures by creating a significant portion of a composite structure while manufacturing the composite material. Furthermore, it would be an advancement to provide a composite material that prevents the resin from uncontrollably transferring to objects that come in contact with the material or from flowing out of the uncured composite material. It would be another advancement in the art to provide a composite material with desirable tack and drape characteristics for forming the composite material into a desired shape. Such apparatuses and methods are disclosed and claimed herein.

BRIEF SUMMARY OF THE INVENTION

[0012] The apparatus and method of the present invention have been developed in response to the present state-of-the-art, and, in particular, in response to problems and needs in the art that have not yet been fully resolved by currently available airbag systems. Thus, it is an overall objective of the present invention to provide an inexpensive composite material that is formable and capable of being rapidly manufactured.

[0013] The composite material may be comprised of a plurality of layers of filament bands wound to define a composite sheet. The composite bands may be made of any number of fibers, such as a carbon fiber. The filament bands are impregnated with a resin that is a solid or semi-solid at ambient temperatures. Ambient temperatures may encompass temperatures that are found in a manufacturing facility. The solid or semisolid resin may be heated to a viscous state in order to impregnate the filament bands.

[0014] The layers of filament bands may have multiple filament bands that are substantially parallel to one another. The layers of filament bands may be positioned on one another where alternating layers of filament bands have intersecting orientations. The intersecting orientations of adjacent filament bands may be substantially perpendicular

to one another. Additional layers of filament bands may be added to define further layers of filament bands on a sheet of composite material.

[0015] The composite material may be wound onto a mandrel having various shapes. The mandrel may be drum shaped or be a more complex curved shape. In one winding application the composite material has been helically wound on a mandrel. The winding may be accomplished with a filament winding machine having a filament application section with a resin dispensing apparatus.

[0016] The filament bands may be at least about 0.5 inches wide. Other embodiments may include filament bands that are at least about 1 inch wide, while other filament bands may be no more than about 0.5 inches wide. The width and orientation of the individual bands may also vary throughout a sheet of material.

[0017] Generally, the process for manufacturing a composite material may be comprised of feeding a filament band from a filament distribution apparatus onto a mandrel. As the filament bands are being fed from the filament distribution apparatus, the filament bands are impregnated with a resin that is solid or semi-solid at ambient temperatures. Then the filament bands are laid on the mandrel in selective orientations and in a selective number of layers. The composite bands may be wrapped around a removable backing to prevent the semi-solid or solid resin from transferring to objects that come in contact with the material. The backing may be removed when the composite material is being applied to a form.

[0018] Multiple layers and orientations of the filament bands may exist in a composite material according to load requirements for a selected part or component, where the composite material is a pre-form. A pre-form is a part made of composite material where the features of the part are created during the winding process, thus eliminating laying up multiple layers of composite sheets. Different features in different locations of the parts may be created by varying the orientation and number of layers of the filament bands.

[0019] A pre-form may be manufactured by determining the load requirements for a composite component. The load requirements are based upon the design and the intended use of the component. Next, the number of layers and orientation of the filament bands needed in order to meet load requirements are identified. Then, a manufacturing control plan is created. Finally, the filament bands are wound according to the manufacturing control plan, laying the filament bands in the orientations and the layers for the load requirements of the component.

[0020] These and other features, and advantages of the present invention will become more fully apparent from the following description and appended claims, or may be learned by the practice of the invention as set forth herein after.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] In order that the manner in which the advantages and features of the invention are obtained, a more detailed description of the invention summarized above will be rendered by reference to the appended drawings. Understanding that these drawings only provide selected embodiments of the invention and are not therefore to be considered

limiting in scope, the invention will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

[0022] FIGS. 1A-H are top views of the process of manufacturing a composite material.

[0023] FIG. 2 is a top view of a composite sheet manufactured within the scope of the present invention.

[0024] FIG. 3 is a cross-sectional view of the sheet of composite material of FIG. 2.

[0025] FIG. 4 is a top view of a filament winding machine winding a sheet of composite material within the scope of the present invention.

[0026] FIG. 5 is a cross-sectional perspective view of a multilayer composite material.

[0027] FIG. 6 is a pre-form manufacturing process flow diagram.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0028] The preferred embodiments of the invention are now described with reference to FIGS. 1-6, wherein like reference numbers indicate identical or functionally similar elements. The present invention, as generally described and illustrated in the Figures, may have a wide variety of configurations. Thus, the following more detailed description of the embodiments of the system and method of the present invention, as represented in the Figures, is not intended to limit the scope of the invention as claimed, but is merely representative of presently preferred embodiments of the invention.

[0029] The present invention includes a composite material providing several advantages in the art of composite materials. The composite material is relatively inexpensive and has a highly controllable manufacturing process. The composite material also has desirable drape and tack characteristics to allow for ease in forming the non-cured composite material into a desired shape or form. The composite material also provides for varying of the material characteristics of the composite material during a single line manufacturing process.

[0030] Referring now to FIGS. 1A-H, a process for manufacturing a sheet of composite material is illustrated. A sheet of composite material **100**, shown completed in FIG. 1H, is manufactured with multiple layers of filament bands **110** laid out in alternating orientations. In one embodiment, a filament band **110** is comprised of multiple strands of various fibrous materials. The materials may include carbon fiber, fiberglass, Kevlar, silicon carbide, or other fibrous materials. The filament bands **110** may include other smaller bands of fibrous materials merged together to create a large or wide filament band **110**. Alternatively, multiple smaller bands of varying composite materials may be used to create a large filament band **110** made of multiple fibrous materials. Such a combination of fibrous materials would create a filament band **110** that is optimized to manifest material characteristics of the combined fibrous materials.

[0031] Generally, an increased number of fibers in a band **110** will correspond to an increased width or thickness of the filament band **110**. The width and thickness of the filament

band **110** of a fixed number of fibrous strands may be controlled by processing the band **110** through a series of idler rods or tension controlling devices. The idler rods or tension controlling devices may spread the filament band **110** to create a wider thinner filament band **110**.

[0032] The filament bands **110** may be wound into a composite material **110** through various filament band **110** laying procedures. FIGS. 1A-H illustrate one process of creating a composite material **100** through a filament winding or layering process.

[0033] The composite material **100** of FIG. 1 may be comprised of multiple layers of filament bands **110** laid out on one another. An individual layer may comprise multiple filament bands **110** that are substantially parallel, where individual bands **110** are positioned relative to one another at spaced distances. In FIGS. 1A-H, the individual figures represent the placement of a layer of filament bands **110**.

[0034] FIG. 1A depicts a layer comprising two filament bands **110a** being placed on a surface **120** in a first orientation, where the surface **120** may be a mandrel, drum, table, or other surface. In FIG. 1A, the first orientation is shown as being vertical. However, this orientation is only shown for illustrative purposes. The two parallel filament bands **110a** of the first layer are positioned at a horizontal spaced distance **116**. In the composite material **100**, illustrated in FIG. 1A, the vertical filament bands **110a** have a horizontal spaced distance **116** that is equal to the width of three filament bands **110**. In such an embodiment, three layers of filament bands **110** placed side to side will be required to form a complete sheet of composite material **100**.

[0035] Once the first layer of filament bands **110a** is placed on the surface **120**, a second layer of filament bands **110b** is placed upon the first layer of filament bands **110a**. The filament bands **110b** of the second layer are also substantially parallel to one another and are positioned at a vertical spaced distance **124**. The vertical spaced distance **124** of the second layer of filament bands **110b** may be equal to the horizontal spaced distance **116** of the first layer of filament bands **110a**. Alternatively, the vertical spaced distance **124** may be different than the horizontal spaced distance **116**. However, when the vertical spaced distance **124** and the horizontal spaced distance **116** are the same, an equal number of layers in each orientation can be used to create a uniform sheet of composite material **100**.

[0036] Furthermore, the spaced distance of any layer of the filament bands **110** may vary within a single layer. For example, a layer may comprise four filament bands (not shown) where three spaced distances separate the four filament bands. The three spaced distances might each be different within a single layer of filament bands. Such an embodiment may be desirable where additional filament bands are required to strengthen portions of the composite material or in a pre-form application, which will be discussed later.

[0037] Independent of the spaced distances **116**, **124** of the filament bands **110a**, **110b**, the second layer of filament bands **110b** is placed on the first layer of filament bands **110a**. The second layer of filament bands **110b** is positioned on the first layer of filament bands **110a** such that the second layer of filament bands **110b** has an intersecting orientation with the first layer of filament bands **110a**. The intersecting

orientation of the first layer of filament bands **110a** and the second layer of filament bands **110b** may have a wide range of relative angles.

[0038] In FIG. 1B, the relative angles of the filament bands **110a** of the first layer to the filament bands **110b** of the second layer are at a 90° offset. However, different relative angles between alternating layers of filament bands **110** may be possible. In one embodiment, the relative angle of the layers of filament bands **110** is such that a single filament band **110b** from the second layer intersects and overlaps a majority of the filament bands **110a** from the first layer on a sheet of composite material **100**.

[0039] For example, FIG. 1B illustrates an intersecting angle where a single filament band **110b** intersects all of the filament bands **110a** of the first layer. However, if the relative intersecting angle between the two layers of the filament bands **110a**, **110b** was approximately 10° or less, then a single filament band **110b** of the second layer may only intersect a single filament band **110a** from the first layer.

[0040] Referring now to FIG. 1C, a third layer of filament bands **110c** is placed on top of the second layer of filament bands **110b**. The third layer of filament bands **110c** is placed on top of the second layer of filament bands **110b** in an intersecting orientation. The orientation of the third layer of filament bands **110c** may be substantially equal to the orientation of the first layer of filament bands **110a**. However, the filament bands **110c** of the third layer may be placed at a location on the surface **120** adjacent to the filament bands **110a** of the first layer, such as illustrated in FIG. 1C.

[0041] Similarly, a fourth layer of filament bands **110d** may be laid on the third layer of filament bands **110c** in the same orientation as a second layer of filament bands **110b**. Subsequent layers of filament bands **110e**, **110f**, **110g**, **110h** may be placed on one another in alternating orientations to form a sheet of composite material **100**, as illustrated and FIG. 1H.

[0042] FIGS. 1A, C, E, G and Figures B, D, F, H show subsequent layers of filament bands **110** having similar intersecting angles as being placed adjacent to previously laid filament bands **110**. However, subsequent layers of filament bands **110** need not necessarily be adjacent to previously laid layers of filament bands **110**. Subsequent filament bands **110** may overlap previously laid filament bands **110**. Alternatively, subsequent filament bands **110** may have a gap between previously laid filament bands **110**.

[0043] While the spacing between subsequent filament bands **110** may vary, it may be preferred for subsequent filament bands **110** to substantially align to previously laid filament bands **110** in a sequential manner, such as illustrated in FIG. 1C. This embodiment prevents openings or windows from forming in the sheet of composite material **100**.

[0044] Additionally, the alignment as illustrated in FIGS. 1A-H provides for a uniform distribution of filament bands **110**. By providing filament bands **110** with uniformly spaced distances within a single layer and between layers, a composite material **100** with a substantially constant thickness may be provided. In the embodiment illustrated in FIGS. 1A-H, the thickness of the composite material **100** is equal to the thickness of two of the filament bands **110**. This occurs

because any given section of the surface **120** is covered by only two filament bands **110** with different orientations.

[0045] This may be best understood by viewing an overlapping location **122** indicated in FIG. 1B. The overlapping location **122** is created by a filament band **110b** of the second layer overlapping a filament band **110a** of the first layer. This overlapping location **122** has a thickness equal to the thickness of the two filament bands **110a**, **110b** which comprise the overlapping location **122**. By viewing the subsequent FIGS. 1C-H, it can be seen that no further filament bands **110c-h** are placed upon the overlapping location **122**. For this embodiment, the same will be true for any other given sections of the composite material **100**, where each section of the composite material **100** is comprised of two filament bands **110** with different fiber orientations.

[0046] Multiple variations of the structure of the composite material **100**, other than that illustrated in FIG. 1, may be achieved. For example, the orientations of the filament bands **110** in a single layer may also vary along the length of the composite material **100**. In FIG. 1A, the two filament bands **110a** of the first layer are illustrated as parallel to one another. However, the two filament bands **110a** of the first layer may have any number of angled orientations relative to one another, such as if one filament band **110** was vertical and a second band was at a 30° offset. Similarly, the filament bands **110** in other layers may vary in the same manner as has been described above.

[0047] Furthermore, the illustration of vertical filament bands **110a** and horizontal filament bands **110b** in FIGS. 1A-H are only one embodiment of the orientation of filament bands **110** possible with the composite material **100**. The filament bands **110** may have multiple other orientations, thicknesses, and layers depending upon the desired structure of the composite material.

[0048] Another feature of the present composite material **100** is the use of filament bands **110** impregnated with a resin before the sheet of composite material **100** is manufactured. The individual filament bands **110** may be pre-impregnated with a resin that is in a solid or semi-solid state at ambient temperatures. In one embodiment, the resin may remain solid at temperatures up to about 120° F. The resin may include different epoxies and hardeners, such as a phenolics and bisphenols that become liquid at a temperature of about 160° F.

[0049] However, various other epoxies are presently available that are solid or semi-solid at ambient temperatures and are suitable for composite material **100** applications. Generally, the resin should be selected such that the resin remains solid or semi-solid at ambient conditions in which the composite material **100** will be handled and assembled. The temperature range may include temperatures that may be common in a manufacturing facility, where ambient temperatures are between about 50° F. to 110° F., and may preferably be about 70° F.

[0050] Additionally, the resin should be selected such that the resin remains in a solid or semi-solid state when the composite material **100** comes in contact with items in a manufacturing facility that are warmer than ambient air temperatures. For example, tools, forms, and assembly surfaces may have increased temperatures due to friction, radiant heat, or other factors.

[0051] The resin should also remain in a solid or semi-solid state during transportation and shipping. Often, the shipping of materials occurs in trucks or shipping containers without temperature regulation systems. The temperatures within the trucks and shipping containers can exceed 100° F. If the resin becomes a viscous liquid during transportation and shipping, resin may flow out of the material, leaving some sections with an inadequate quantity of resin. Therefore, the resin should be selected such that the resin remains solid or semi-solid at these relatively high temperatures.

[0052] By providing a resin that remains solid or semi-solid through a large range of ambient temperatures, the impregnation of resin within the fibers will remain substantially uniform. A uniform impregnation of resin will prevent the creation of weakened sections within the composite material **100** caused by an insufficient quantity of resin.

[0053] In order to impregnate the filament bands **110** with a solid or semi-solid resin, the resin must be placed in a state where it can be easily impregnated into a filament band **110**. In one application, the resin that is provided in a solid or semi-solid state at ambient temperatures is heated into a liquid or viscous liquid state. The heated viscous resin may then be impregnated into the individual filament bands **110**. After the liquid resin is impregnated into the filament bands **110** the resin cools into a solid or semi-solid state.

[0054] The filament bands **110** may be comprised of multiple smaller filament bands that are merged together to create a generally large filament band **110**. Either the large filament band **110** or the smaller filament bands which make up the large filament band **110** may be impregnated. It may be advantageous to minimize the number of fibers that are impregnated at a single time. By minimize the number of fibers, each fiber may be more easily and uniformly impregnated with the heated resin.

[0055] Impregnating the individual filament bands **110** with resin before the filament bands **110** are formed into a sheet of composite material **100** provides several manufacturing and design advantages. One advantage is the ability to eliminate the step of impregnating a completed sheet of composite material **100** or otherwise coating the wound composite material **100** with the resin. Often, impregnating an entire sheet of composite material requires a large bath of liquid resin. A bath of liquid resin requires the use of a large quantity of resin that is not used and that has a potential of receiving contaminants. Also, immersing a sheet of composite material into a liquid resin bath does not allow the quantity of resin that is impregnated into the composite material **100** to be controlled.

[0056] Impregnating the filament bands **110** with resin before they are wound into a sheet of composite material **100** allows for the application of a sufficient quantity of resin between the different layers of the filament bands **110**. During the assembly process of the filament bands **110**, layers of individual filament bands **110** are generally laid upon one another, as illustrated in FIGS. 1A-H.

[0057] For example, in FIGS. 1A and 1B the second layer of filament bands **110b** is laid upon the first layer of filament bands **110a**. By laying the two layers of filament bands **110a**, **110b** on one another, an overlapping location **122** is created. If the filament bands **110a**, **110b** are not pre-impregnated with the resin, an insufficient and ineffective quantity of

resin may be present between the filament bands **110a**, **110b** of the two layers. However, filament bands **110** that are pre-impregnated with a resin will have an effective and sufficient quantity of resin in the overlapping locations **122**. An effective quantity of resin is a quantity that is capable of providing a uniform distribution of resin throughout the composite material **100**. By having an effective and sufficient quantity of resin between the various layers, a stronger and more uniform composite material **100** will be formed.

[0058] Another advantage of pre-impregnating the filament bands **110** with a resin, that is solid or semi-solid at ambient temperatures, is the tacky characteristics of a solid or semisolid resin. The tack of the resin will allow the individual filament bands **110** to stick to one another. As was illustrated in FIGS. 1A-H, a sheet of composite material **100** is comprised of multiple individual filament bands **110** that are selectively positioned. The tack of the resin impregnated filament bands **110** allows the filament bands **110** to adhere together, to form a sheet of composite material **100** that may be easily handled.

[0059] Furthermore, the individual filament bands **110** are comprised of smaller quantities of fibers. The use of the tacky resin prevents the individual filament bands **110** from separating into numerous fibers. Thus, a generally large sheet of composite material **100** may be formed without the need for weaving, sewing, or otherwise holding the sheet of composite material **100** together.

[0060] The tack of the solid or semi-solid resin also provides advantages when placing the composite material **110** onto a form to be cured. Typically, a composite material **100** is formed by placing a sheet of uncured composite material **100** on to a form to define a shape. As the composite material **100** is cured, the composite material **100** will maintain the shape of the form to which it is attached. The tack allows the composite material **100** to adhere to the form without the need for any attachment mechanisms to hold the composite material **100** to the form.

[0061] Furthermore, the tack of the composite material **100** created by the solid or semisolid resin allows the composite material **100** to easily attach to other pieces of composite material **100**. Often, a composite structure is created by joining multiple pieces of composite material **100** together. The tack of the resin allows separate pieces of composite material **100** to be adhered together, such that proper contact is maintained during curing.

[0062] The amount of tack of the composite material **100** will depend upon the type of solid or semi-solid resin used. The tack may also be a function of the temperature of the resin in the composite material **100**. It may be preferable for the tack of a sheet of composite material **100** be sufficient to maintain its own weight on a vertical or inverted surface.

[0063] In order to provide convenience in shipping and handling of the tacky composite material, a removable backing **130**, as illustrated in FIG. 2, may be added to the composite material **100**. A removable backing **130** may be a plastic or other similar type of material that creates a buffer between the tacky resin and other objects. The removable backing **130** may be placed on both sides of the composite material **100** in order to prevent the tacky resin from adhering to objects that the composite material **100** comes in contact with. Also, the removable backing **130** prevents resin from transferring to surrounding objects.

[0064] The removable backing **130** and the tack may provide a useful combination of features when applying the composite material **100** to a form. When applying the composite material **100** to a form, one side of the removable backing **130** may be removed to expose the tacky composite material **100**. The composite material **100** may then be handled by the side of the composite material having the remaining removable backing **130**. The exposed tacky composite material **100** may be adhered to a form by pressing on the removable backing **130** of the opposing side. Once the composite material **100** is in place, the second side of removable backing **130** may be peeled off from the composite material **100**.

[0065] Referring now to FIG. 3, a cross-sectional view of the sheet of composite material **100** of FIG. 2 is illustrated. The cross-sectional view shows multiple layers of filament bands **110a-h** forming a sheet of composite material **100**. The composite material **100** has a uniform thickness equal to the thickness of two filament bands **110**. The uniform thickness creates a composite material **100** having a top layer **212** and a bottom layer **216**. Both the top layer **212** and bottom layer **216** are made of filament bands **110** from multiple layers.

[0066] The relative positioning and lengths of the multiple layers of filament bands **110** provide significant strength advantages. Composite materials **100** receive their strength by combining fibers having a high tensile strength with a resin having a high compression and bending resistance. While the resin can withstand a substantial tensile force, it is preferable for the fibers to be loaded with a tensile force instead of the resin. An optimally designed composite material **100** will be configured such that the fibers are substantially loaded with tensile forces and the resin is substantially loaded with compressive and shear forces. Thus, features of the composite material **100** which do not optimally load either the fibers or resin should be avoided.

[0067] One feature of the composite material **100** that maybe desirable to avoid is the locations where the filament bands **110g** transition between the top layer **212** and the bottom layer **216**. The transitioning of the filament band **110g** from the upper layer **212** to a lower layer **216** is referred to as a crimping section **220**.

[0068] For example, the filament band **110g** of the seventh layer is illustrated in FIG. 3. Viewing FIG. 3 from the right to left, the filament band **110g** of the seventh layer is located on the top layer **212** of the composite material **100**. The filament band **110g** of the seventh layer is positioned on top of three filament bands **110b**, **110d**, **110f**, of other layers. The filament band **110g** of the seventh layer then crimps under a filament band **110h** of the eighth layer. After crimping under the filament band **110h** of the eighth layer, the filament band **110g** of the seventh layer transitions from the bottom layer **216** to the top layer **212**. The locations where the filament band **110g** transitions from the top layer **212** to the bottom layer **216** and then back again to the top layer **212** creates two crimping sections **220** at each transition location.

[0069] The crimping sections **220** introduce vacancies **224** into the composite material **100** where the filament band **110** transitions between the top layer **212** and the bottom layer **216**. The resin that is impregnated in the filament bands **110** may fill the vacancies **224** with resin. Thus, when the filament bands **110** are loaded with a tensile force, a portion

of the tensile force will be transferred to the resin filled vacancies 224. Because the fibers of the filament bands 110 are typically stronger than the resin, the resin filled vacancies 224 may reduce the strength of the material 100.

[0070] While the crimping sections 220 may introduce vacancies 224 into the composite material 100, a selective amount of crimping sections 220 provide some of advantages to the composite material 100. The crimping sections 220 allow the filament bands 110 of the top layer 212 and the bottom layer 216 to intertwine. If the composite material 100 is comprised of only two layers of filament bands 110 with no crimping sections 220, then the strength of the composite material 100 would only be equal to the strength of the resin holding the two layers together. However, the selective use of crimping sections 220 allows the top layer 212 and the bottom layer 216 to be connected together by the filament bands 110.

[0071] The composite material 100 disclosed herein provides a minimal number of crimping sections 220. As can be seen in FIG. 3, the filament band 110g of the seventh layer is positioned substantially on the top layer 212 with two small crimping sections 220. By providing the generally long sections of the filament bands 110 that are on a single layer of the composite material 100, a tensile load on the filament bands 110 will be placed upon the straight fibers of the filament band 110.

[0072] Referring back to FIG. 2, an inspection of the composite material 100 illustrates that a majority of the filament bands 110 have straight sections of fiber without crimping sections that are at least three times the width of the filament bands 110. Additionally, selective filament bands 110 have no crimping sections 220. While the ratio of length of the filament bands 110 to the width is noted for illustrative purposes only, it does demonstrate the advantages of the composite material 100 in maximizing the straight sections of filament bands 110, while still employing a minimal number of crimping sections 220.

[0073] Methods for manufacturing the composite material 100 may include filament winding as well as laying out the individual filament bands 110. Referring now to FIG. 4, a filament winding machine 310 is illustrated. The filament winding machine 310 is provided to apply the filament bands 110 to a mandrel 316 or other similar structure. The filament winding machine 310 is comprised of a mandrel 316, a filament application section 320, and a transport system 330.

[0074] The filament winding machine 310 is configured to wind spools of fiber 326 on to a mandrel 316 to form a sheet of composite material 100. The filament winding machine 310 may also include a resin source 318 that provides a supply of resin to impregnate the filament band 328 with a resin before the filament band 328 is wound onto the mandrel 316. As mentioned previously, the resin source 318 may be attached to a heating unit 322 in order for the resin to be heated to a liquid state so that the resin may be impregnated into the filament band 328.

[0075] The filament band 328 is wound onto a mandrel 316. The mandrel 316 may be a large rotating drum or other similar device that will allow the application of filament bands 328 that are pre-impregnated with a resin. In one embodiment, the mandrel 316 is configured to rotate about

an axle 324, such that the mandrel 316 draws the filament band 328 from the filament application section 320.

[0076] The filament application section 320 may be comprised of one or more filament sources, such as filament spools 326, to provide a source of fibers in order to create the filament band 328. The spools 326 may provide a source of filament fibers in order to create a filament band 328, or alternatively the spools 326 may provide multiple smaller filament bands that are merged into a single large filament band 328.

[0077] The filament application section 320 may be configured to translate relative to the mandrel 316. The translation may be achieved by attaching the filament application section 320 to a transport system 330. In one embodiment, the transport system 330 may be a track 332 on which the filament application section 320 may ride. One having ordinary skill in the art, will recognize that multiple other systems may be provided to allow the filament application section 320 to translate relative to the mandrel 316.

[0078] The spools 326 may be attached to the filament application section 320, such that the spools 326 translate with the filament application section 320. However, the spools 326 may be situated on a stationary device, where the spools 326 feed the translating filament application section 320 from the stationary location. While attaching the spools 326 to the filament application section 320 may provide for a more simple feeding mechanism, the amount of fiber that may be maintained on the spools 326 may be limited to a small amount. Thus, in filament winding applications of large sheets of composite material 100, it may be advantageous to provide large quantities of fibers on spools 326 not attached to the filament application section 320.

[0079] The motion of the filament application section 320 relative to the mandrel 316 may be an automated or manual motion controlling system. The motion controlling system may control the transitional motion of the filament application section 320 as well as the angle on which the filament band 328 is applied to the mandrel 316. While both a manual and an automated system are possible, an automated system may be the most practical for winding large sheets of composite material 100.

[0080] The filament application section 320 may also include a plurality of idler rods (not shown) which control the characteristics of the filament band 328. For example, the idler rods may place the filament band 328 in tension to change the width of the filament band 328. A single filament band 328 may feed through multiple idler rods before being applied to the mandrel 316.

[0081] Controlling the width of the filament band 328 provides several advantages in the winding of a sheet of composite material 100. By widening a filament band 328, the thickness of the filament band 328 may be reduced, and by providing a narrow filament band 328 the thickness may be increased. Thus, the thickness of the filament band 328 may be controlled by a widening of the filament band 328 through idler rods or other similar devices.

[0082] Another advantage in providing a generally wide filament band 328 is the decreased manufacturing time needed to create a sheet of composite material 100. A sheet of composite material 100 is formed by wrapping the filament band 328 around the mandrel 316 until the mandrel

316 is substantially covered. By using a wide filament band **328**, the number of rotations required to cover the mandrel **316** may be reduced. In one embodiment, the filament band **328** may be 0.5 to 1.0 inch in width. However, other embodiments may employ a filament band **328** that is less than 0.5 inches wide or that is larger than 1 inch wide.

[**0083**] The application of the filament band **328** may also be controlled by the filament winding head **336**. The filament winding head **336** may be configured to control the angle at which the filament band **328** is applied to the mandrel **316**. The filament winding head **336** may be capable of varying the angle of the filament bands **328**, while winding a single layer of filament bands **328**. The filament winding head **336** may include the idler rods as well as a resin application system for impregnating the filament bands **328** with a resin.

[**0084**] The varying control systems of the filament winding machine **310** allows for a large degree of control over the features and characteristics of a sheet of composite material **100**. Thus, a single machine may be employed to create multiple embodiments of the composite material **100**.

[**0085**] The winding process may be accomplished by attaching an end of the filament band **328** to a location on the mandrel **316**, such as the end **340**. The filament band **328** may be attached to the mandrel **316** by an adhesive tape or by the tack of the pre-impregnated filament band **328**. Attaching the end of the filament band **328** to the end **340** of the mandrel **316** may be useful in determining the starting and stopping point for the winding process. However, the end of the filament band **328** may be attached to any location on the mandrel **316**.

[**0086**] In a composite material **100** employing a removable backing **130**, the removable backing **130** will first be mounted on the mandrel **316** before attaching the filament band **328** to the mandrel **316**. In this embodiment, the end of the filament band **328** would be attached to the removable backing **130**. By winding the filament bands **328** on to the removable backing **130**, the sheet of composite material **100** may be removed from the mandrel **316** with at least one side of the composite material **100** covered with a removable backing **130**.

[**0087**] Once the filament band **328** is attached to the mandrel **316**, the mandrel **316** may be rotated to draw the filament band **328** from the filament application section **320**. As the filament band **328** is drawn from the filament application section **320**, the transport system **330** translates relative to the mandrel **316**. By varying the rotational speed of the mandrel **316** and the translation speed of the transport system **330**, the manner in which the filament band **328** is applied to the mandrel **316** may be controlled.

[**0088**] The control of the rotation of the mandrel **316** and the translation of the transport system **330** can determine the spaced distance, the angle of the filament band **328**, the intersecting angle of the different layers of filament bands, and the relative position of the various layers. These features of the composite material **100** may remain constant throughout a single sheet of composite material **100** or may change throughout a single sheet of composite material **100**.

[**0089**] For example, the filament band **328** may be laid out at a first angle or orientation during the initial winding passes around the mandrel **316**. The angle of the filament

band **328** may then be changed to a second angle during the central winding passes around the mandrel **316**. The angle of the filament band **328** may then returned back to the angle during the initial rotations of the filament band **328** around the mandrel **316**.

[**0090**] The ability of the filament band **328** to change its angle during a single pass across the mandrel **316** is possible due in part to the tack of the composite material **100**. The tack of the resin will allow the filament band **328** to adhere to the mandrel **316** and maintain the angle in which it was placed on the mandrel **316**. Furthermore, when the angle is abruptly changed, the tack of the filament band **328** will prevent the previously laid section of filament band **328** from conforming to the new angle of the filament band **328**.

[**0091**] Similarly, the spaced distance between the filament bands **328** may also be varied during manufacturing of the composite material **100** in the same manner as the angle of the filament band **328**. Additionally, the angle of the filament band **328** as well as the spaced distance of the filament band **328** may be change from layer to layer.

[**0092**] Referring now to **FIG. 5**, a section of multilayer composite material **410** is illustrated. The multilayer composite material **410** has a varying number of layers across its length. The multilayer composite material **410**, may be similar to a composite material that has been laid out by hand in different layers. However, the composite material **100** illustrated in **FIG. 2**, is wound in multilayer sections during a single winding process, and has a varying number of layers across its length.

[**0093**] The varying number of layers may be achieved by applying multiple layers of filament bands in differing orientations and at different locations. The orientations and layers may be controlled during the filament winding process on the mandrel **316**, as discussed above. For example, the filament winding machine **310** may wind a first layer **416** comprising two groups of filament bands laid out in different orientations, such as illustrated in **FIG. 2**. After the first layer **416** is formed, portions of a second layer **420** may be laid out on top of selected portions of the first layer **416**, such as is illustrated in **FIG. 5**.

[**0094**] In one embodiment, the orientation of the fibers of the filament bands of the second layer **420** are in a different orientation than the orientation of the filament bands in the first layer **416**. The difference in orientations may be desirable for the second layer **420** to receive a load in a different direction than would be desirable for the fibers in the first layer **416**. Next, a third layer **432** may be placed upon the second layer **420** to receive a load in yet another direction.

[**0095**] Additionally, a top layer **436** may be placed upon the entire piece of composite material **410**. The top layer **436** may function to provide even transitions between the single layer sections and the multilayer sections of the composite material **410**. Furthermore, the angle and orientations of the fibers and the filament bands in the three layers **416**, **420**, **432** may be in a substantially similar direction. The number of layers in a composite material **410** will depend upon the desired application. The use of multiple layers having filament bands with different orientations allows a composite material **410** to be designed for certain components without the necessity of manually laying out multiple layers of composite material.

[0096] One application for a multilayer composite material **410** having differently oriented fibers throughout the composite material **410** is the manufacture of a pre-form. A pre-form is a composite component or part where at least a portion of the structure is manufactured during the manufacture of the sheets of composite material **100**. By creating piece of composite material that has the layers and orientations of a ready-to-be cured component, the process of hand laying multiple sheets of composite materials can be avoided.

[0097] Currently, most composite materials are manufactured without a view of the end product to be made of the composite material. Typically, generic composite materials of different thicknesses, strength characteristics, and fiber orientations are manufactured. From the generic supply of composite materials, end products are manufactured by laying up multiple layers of the manufactured composite materials in the desired shape and layers. The process of manually laying out composite materials adds to the cost of the overall part.

[0098] In order to avoid manually laying up the composite materials to form a component, the multiple layers of composite material may be created on one another when the composite material is manufactured. To accomplish this, the design of the component or part must be known before the composite material is manufactured. Referring now to **FIG. 6**, a flow diagram illustrating the steps in creating a pre-form is shown.

[0099] First, the load requirements for the end part or component are determined **510**. The load required will depend upon the application and the loads that are intended to be placed upon the part. The part may require sections of increased thickness to receive a large load or may require locations for attachment of other components that cannot be created when the composite material is being manufactured.

[0100] Once these load requirements are known, the number of layers and orientations of the filament bands will be determined in order to meet the specifications of the part **520**. These design considerations may be illustrated by referring back to **FIG. 5**. The multilayer composite material **410** may be a pre-form where the load requirements for the right side **424** are larger than the load requirements for the left side **426**.

[0101] Referring again to **FIG. 6**, once the number of layers and fiber orientations are determined, a manufacturing control plan can be created **530** to manufacture the pre-form. The manufacturing control plan describes how the filament winding machine **310** will be operated in order to create the desired number of layers and fiber orientations. The manufacturing control plan may include rotational speed of the mandrel **316** with corresponding positions and speeds of the filament application section **320**. This control plan may be a text plan for a machine operator or may be a computer program that interfaces with an automated filament winding machine **310**.

[0102] Once the manufacturing control plan is established, the filament bands are wound on the mandrel **316** where the multiple layers and fiber orientations create the pre-form **540**. The multilayer composite sheet **410** may then be cut into the shape of the part where it is ready to be applied to a form and cured.

[0103] It is envisioned in the present application, that an automated process for designing pre-forms may be established. The automated process may receive the design parameters for a component or part in a digital medium with associated load requirements, such as a finite element analysis program. A computer program may then determine the type of composite material, width of the filament band, and type of resin. Next, the number of layers of the composite material and the orientations of the layers may be established for the part.

[0104] The computer program may then determine a manufacturing control plan for interfacing with a filament winding machine to manufacture a pre-form. An automated process may then control the operational parameters of the filament winding machine. While any one of the steps could be replaced with a manual process, an automated process will generally be more efficient and cost effective.

[0105] The composite material described in this application may have multiple embodiments for manufacturing various composite parts. Generally, the composite material may be described as a plurality of layers of filament bands that are pre-impregnated with a solid or semi-solid resin at ambient temperatures. The different layers of filament bands have intersecting orientations relative to one another. The resin may provide an amount of tack allowing the composite material to easily be adhered to a form and to hold the multiple filament bands together.

[0106] The present invention may be embodied in other specific forms without departing from its structures, methods, or other essential characteristics as broadly described herein and claimed hereinafter. The described embodiments are to be considered in all respects only as illustrative, and not restrictive. The scope of the invention is, therefore, indicated by the appended claims, rather than by the foregoing description. All changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed and desired to be secured by United States Letters Patent is:

1. A composite material comprising:

a plurality of filament bands, wherein the individual bands are impregnated with a resin that is solid or semi-solid at ambient temperatures, the composite material having a plurality of layers of substantially parallel filament bands, wherein alternating layer have intersecting orientations with adjacent layers, such that the filament bands form a sheet of composite material.

2. The material, as recited in claim 1, wherein the filament bands are carbon fiber.

3. The material, as recited in claim 1, further comprising additional layers of filament bands located on the sheet of composite material.

4. The material, as recited in claim 3, wherein the filament bands of the additional layers of filament bands are substantially unidirectional.

5. The material, as recited in claim 1, wherein intersecting orientations of the layers of filament bands create a plurality of overlapping locations.

6. The material, as recited in claim 5, wherein an effective amount of resin is present in the overlapping locations.

7. The material, as recited in claim 1, wherein the individual filament bands are impregnated with substantially similar quantities of resin.

8. The material, as recited in claim 1, wherein the material is produced by winding the filament bands on a mandrel.

9. The material, as recited in claim 8, wherein the mandrel is a drum.

10. The material, as recited in claim 1, wherein the intersecting orientation of the filament bands have different angles from layer to layer.

11. The material, as recited in claim 1, wherein the bands are at least about 1 inch wide.

12. The material, as recited in claim 1, wherein the bands are no more than about 0.5 inches wide.

13. The material, as recited in claim 1, wherein the material is tacky.

14. The material, as recited in claim 1, wherein the layers of filament band are substantially perpendicular to adjacent layers of filament bands.

15. The material, as recited in claim 1, wherein the sheet of composite material is substantially solid when cured.

16. The material, as recited in claim 1, further comprising a removable backing attached to at least one side of the composite material by the non-liquid resin.

17. A sheet of composite material comprising:

a plurality of filament bands, wherein the individual filament bands are pre-impregnated with a resin that is solid or semi-solid at ambient temperatures, the plurality of filament bands being wound into a sheet of composite material, such that alternating layer of filament bands have an intersecting orientation with adjacent layers of filament bands, such that the filament bands form a sheet of composite material.

18. The material, as recited in claim 17, wherein the filament bands are wound on a mandrel.

19. The material, as recited in claim 18, wherein the mandrel is a drum.

20. The material, as recited in claim 17, wherein the filament bands are helically wound.

21. The material, as recited in claim 17, wherein the angle of intersecting orientations are selected according to load requirements of a selective component.

22. The material, as recited in claim 17, further comprising a plurality of filament bands wound in a unidirectional orientation wound onto the sheet of composite material.

23. The material, as recited in claim 17, wherein the material is wound according to a design of a determined component.

24. The material, as recited in claim 17, wherein the material is a pre-form.

25. The material, as recited in claim 17, wherein the filament bands are a carbon fiber.

26. The material, as recited in claim 17, wherein the intersecting orientation of the filament bands have at least three orientations.

27. The material, as recited in claim 17, wherein the filament band widths vary through the sheet.

28. The material, as recited in claim 17, wherein the filament bands are impregnated with the resin while the filament bands are being wound.

29. The material, as recited in claim 17, wherein the resin is heated to impregnate the resin in the filament bands.

30. A process for manufacturing a composite material comprising:

pre-impregnating a first filament band with a resin that is solid or semi-solid at ambient temperatures;

winding the first filament band at a first angle;

pre-impregnating a second filament band with a resin that is solid or semi-solid at ambient temperatures;

winding the second filament band in a second direction, wherein the second angle has an intersecting orientation with the first angle, such that the first filament band and the second filament band form a composite material.

31. The process, as recited in claim 30, wherein the intersecting orientation of the first angle and the second angle is substantially perpendicular.

32. The process, as recited in claim 30, wherein the composite material is wound on a rotating mandrel.

33. The process, as recited in claim 30, wherein the orientation of the filament bands is controlled by a filament application section of a filament winding machine.

34. The process, as recited in claim 33, wherein the application section impregnates the filament bands with the resin.

35. The process, as recited in claim 30, wherein the first filament band and the second filament band have a plurality of overlapping locations.

36. The process, as recited in claim 35, wherein an effective amount of resin is present in the overlapping locations.

37. The process, as recited in claim 30, wherein the first filament band and the second filament band are impregnated with a substantially similar quantity of resin.

38. A process for manufacturing a composite component comprising:

determining load requirement for the component;

identifying the number of layers and orientation of filament bands to meet load requirements for the component;

creating a manufacturing control plan; and

winding a plurality of filament bands on a mandrel, wherein the plurality of filament bands are pre-impregnated with a resin that is solid or semi-solid at ambient temperatures, the plurality of filament bands being wound according to the manufacturing control plan, such that the number of layers and orientations of filament bands create a pre-form for the component.

39. The process, as recited in claim 38, wherein the filament bands are wound into a plurality of layers having at least three different filament band orientations.

40. The process, as recited in claim 38, further comprising cutting the pre-form from the composite material.

41. The process, as recited in claim 40, further comprising curing the pre-form on a shape defining form.

42. The process, as recited in claim 38, wherein a plurality of performs are simultaneously wound.

43. The process, as recited in claim 38, wherein the pre-form is wound in a sheet of composite material.

* * * * *