



(51) International Patent Classification:

H04N 21/222 (2011.01) H04N 21/436 (2011.01)
H04N 21/231 (2011.01) G06F 11/14 (2006.01)
H04N 21/2747 (2011.01) H04L 29/06 (2006.01)

(21) International Application Number:

PCT/EP2014/060616

(22) International Filing Date:

23 May 2014 (23.05.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13305686.1 27 May 2013 (27.05.2013) EP

(71) Applicant: THOMSON LICENSING [FR/FR]; 1-5 rue Jeanne d'Arc, F-92130 Issy-les-Moulineaux (FR).

(72) Inventor: DE SMEDT, Alex; Kijnigestraat 64, B-2250 Olen (BE).

(74) Agent: ARNOLD, Klaus-Peter; Deutsche Thomson OHG, European Patent Operations, Karl-Wiechert-Allee 74, 30625 Hannover (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: UNIVERSAL PLUG AND PLAY BACKUP SYSTEM COMPRISING A CPE DEVICE AND A MEDIA SERVER, METHOD FOR A BACKUP OF A MEDIA FILE AND CPE DEVICE USING THE METHOD

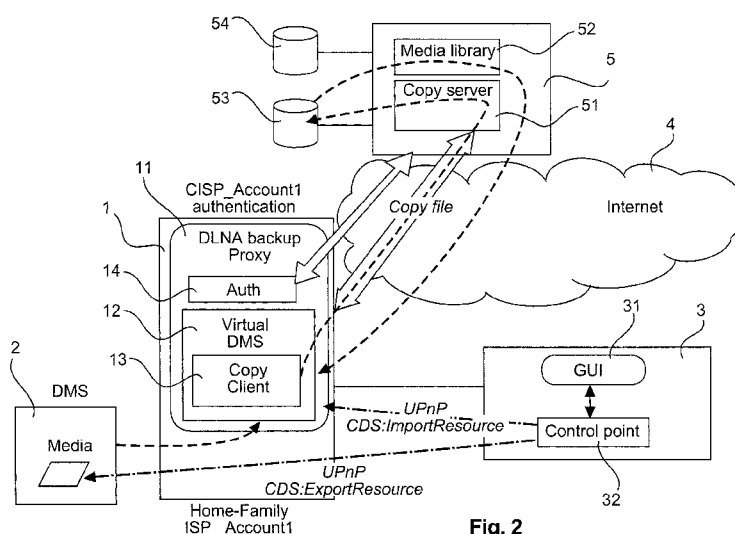


Fig. 2

(57) Abstract: A Universal Plug and Play system for a backup of media files comprises a CPE device (1) including a backup function (11) comprising a copy client (13), a media server (2) including a media storage device, the media server (2) being coupled with the CPE device (1), an Internet media portal (5) coupled via a network service provider network with the CPE device (1), the Internet media portal (5) including a copy server (51) for receiving media files from the copy client (13), and a control device (3) for controlling the media server (2) and for copying a media file from the media server (2) to a representation (12) of the copy server (51) included in the CPE device (1) for a backup of the media file on the Internet media portal (5).

**UNIVERSAL PLUG AND PLAY BACKUP SYSTEM COMPRISING A CPE
DEVICE AND A MEDIA SERVER, METHOD FOR A BACKUP OF A MEDIA
FILE AND CPE DEVICE USING THE METHOD**

5

TECHNICAL FIELD

The invention relates to the field of end-user devices, in particular to consumer premises equipment coupled via a broadband connection with a service provider network for providing Internet services for a home network.

BACKGROUND OF THE INVENTION

Residential gateways are widely used to connect devices in a home of a customer to the Internet or any other wide area network (WAN). Residential gateways use in particular digital subscriber line (DSL) technology that enables a high data rate transmission over copper lines or optical fiber transmission systems.

20

Home networks have become part of everyday life for many users. A home network consists of a range of heterogeneous components which means that the home network is made up of different kinds of devices. All these devices communicate with each other. Examples of networked devices in the home are residential gateways, set-top boxes, television sets, personal computers, tablet PCs, smartphones, network-attached storage (NAS) devices, printers and game consoles. These devices use heterogeneous methods of connectivity to interconnect, which demands for zero-configuration networking and automatic discovery of computers, devices and services. Multiple technologies exist to make device and service discovery seamless. Examples of these technologies are Universal Plug and Play (UPnP), Apple's Bonjour and Microsoft's CIFS.

35

USB (Universal Serial Bus), also Firewire, IEEE 1394, are standard digital interfaces for connecting devices to a personal computer. These interfaces are hot-pluggable, which means that devices can be plugged in and unplugged
5 from the interface without rebooting the respective personal computer, and connected devices are automatically recognized by the personal computer, which is described as "Plug and Play".

10 An extension of "Plug and Play" is UPnP, "Universal Plug and Play", which is defined by an International Standard, ISO/IEC 29341. UPnP Device Architecture defines methods for discovering devices and services in the home network. An audio and video extension of UPnP is UPnP AV (UPnP for
15 Audio/Video), which allows a higher level of interoperability between UPnP devices. UPnP AV defines a control point which is a function using UPnP protocols to control UPnP devices and defines actions for rendering pictures, music and videos. Although a control point can
20 manage multiple UPnP devices, all interactions occur in isolation between the control point and each UPnP device. The individual UPnP devices do not interact directly with each another. Also residential gateways advantageously include a UPnP architecture to allow device-to-device
25 networking with personal computers, networked home appliances, removable storage devices or other consumer electronics devices. UPnP AV allows to deliver streaming media, for example real-time audio/video streams, for which it is critical to be delivered within a specific time, or
30 the stream is interrupted. The current UPnP AV version 2 specification is defined by the UPnP Forum, which is a group of companies and individuals for defining specifications for UPnP devices and services.

35 UPnP AV defines three services: a media server for serving media content, a media renderer capable of playing one or

more media formats, and a control point for controlling the media server and the media renderer. An environment with a UPnP AV media server MS, a control point CP and a media renderer MR is shown in Fig. 1, wherein the media server, the media renderer and the control point are separate devices according to a 3-Box model. The media server MS may have for example a USB or Firewire interface, via which a removable storage device containing audio/video media can be connected to the media server MS. The control point CP coordinates the operation of the media server MS and the media renderer MR to achieve an overall, synchronized end-user effect. The media server MS and the media renderer MR do not interact directly with each another, all of the coordination between the two devices is performed by the control point CP.

The Digital Living Network Alliance (DLNA) has defined a specification for defining interoperability guidelines to enable sharing of digital media as media files between multimedia devices. These guidelines are built upon existing public standards and specify a set of restricted ways of using the standards to achieve interoperability. DLNA uses UPnP for media management, discovery and control. UPnP defines the type of device that DLNA supports ("server", "renderer", "controller") and the mechanisms for accessing media over a network. The DLNA guidelines then apply a layer of restrictions over the types of media file format, encodings and resolutions that a device must support.

Media backup in a service provider network, e.g. the Internet, requires a backup server from the service provider where a user, subscribed to the backup service, gets some memory space for storing of his media files. After the user authenticates to the backup service, he is able to transfer media files to the backup server of the

service provider, which will be accessible again after authentication. The content backup can happen directly from a user terminal to the backup server. This is a simple upload of a file to the backup server, which file can be a
5 media file or not, e.g. via a HTTP (Hypertext Transfer Protocol) or a FTP (File Transfer Protocol) upload. The file needs to be accessible via a local file explorer of the user terminal, which is able to select the files in the home network for upload. Via a browser or a FTP program,
10 the same file can be downloaded from the backup server.

The disadvantage of this method is that it is rather file handling than media control, not integrated in the UPnP AV environment. Also, all users of the home network who want
15 to make use of the service need to know the credentials for the authentication. It would be advantageous to perform a content backup to a backup media server in the service provider network when acting within the UPnP AV environment, where the media files can be seen and can be
20 shared between different devices of the users of the home network.

WO 2011/154375 describes an unattended backup system for performing automatic backups of user data contained in the
25 local drives of at least one computer of a local area network by means of a residential gateway, which is connected to a backup server of a network provider. A backup method is provided which enables a backup in an automatic way without the need of providing UPnP support.
30 The residential gateway includes a PXE server proxy which acts as a proxy in order to allow computers to be remotely booted by sending an image of the operating system to the computer, and the computer includes a PXE client acting as a pre-booting execution environment client which allows the
35 computer to be booted independently of an operating system previously installed on the computer.

US 2009/0144341 describes a data storage system for backup, which detects devices in a home network, determines data to be archived on the devices and initiates an automatic
5 backup of the data on a media space of a network service provider.

SUMMARY OF THE INVENTION

10 The Universal Plug and Play system for a backup of media files comprises a CPE device including a backup function with a copy client, a media server including a media storage device, wherein the media server is coupled with the CPE device, an Internet media portal being coupled via
15 a network service provider network with the CPE device, the Internet media portal including a copy server for receiving media files from the copy client, and a control device for controlling the media server and for copying a media file from the media server to a representation of
20 the copy server, the representation being included in the backup function of the CPE device, for a backup of the media file on the Internet media portal. The representation of the copy server reflects the media file stored on the Internet media portal, via which
25 representation the media file is accessible within the Universal Plug and Play system.

The representation particularly has the function of a virtual media server, via which the media file as copied to
30 the Internet media portal is accessible for a user of the control device. The media file copied to the Internet media portal for backup is displayed for example in a file folder of the representation within a list of other backed-up media files, wherein the representation has the function of
35 a second media server for a user of the control device.

The list is advantageously synchronized with the media files copied to the Internet media portal.

In a further aspect of the invention, the backup function
5 includes an authentication function to authenticate with the Internet media portal, in order to get authorized to copy the media file to the Internet media portal and to get access to other media files already copied to the Internet media portal, the authentication function containing the
10 respective user credentials for accessing the Internet media portal, which authentication function starts automatically with the operation of the CPE device.

In a preferred embodiment, the backup function including
15 the virtual media server and the authentication function is a part of a DLNA backup proxy included in the CPE device, wherein the DLNA backup proxy operates as a DLNA media server in accordance with a DLNA standard.

20 A CPE device according to the invention comprises a backup function with a virtual media server and a copy client for copying a media file from a home network to an Internet media portal coupled via a network service provider network with the CPE device for a backup of the media file on the
25 Internet media portal. The CPE device includes in particular a media server in accordance with a Universal Plug and Play Audio/Video standard, wherein the media file is copied from a media server of the home network to the virtual media server via Universal Plug and Play
30 Audio/Video commands according to the Universal Plug and Play Audio/Video standard.

The method for a backup of a media file comprises the steps of
35 copying the media file from a media server including a media storage device to a copy client of a CPE device by

using a control device, the media server being coupled with the CPE device,

the copy client copying the media file to an Internet media portal coupled via a network service provider network
5 with the CPE device, the Internet media portal including a copy server for receiving media files from the copy client, and

the representation of the copy server showing the media file stored on the Internet media portal to a user of
10 the control device, and via which representation the media file is accessible for the user.

In a preferred embodiment, the representation of the copy server includes a file folder in which the media file is
15 listed for showing the media file to the user. A restore of the media file can be done by a user by selecting the media file in the file folder and copying the media file to the media server by using a copy command. The copy command is for example a copy command in accordance with a Universal
20 Plug and Play Audio/Video standard.

Advantageously, the media file copied to the Internet media portal is represented in a backup file folder of the representation of the copy server within the CPE device,
25 via which the media file is accessible by a user of a control device for a restore, and the backup function includes an authentication function to authenticate with the Internet media portal, in order to get authorized to copy the media file to the Internet media portal and to get
30 access to other media files already copied to the Internet media portal, which authentication function starts automatically with the operation of the CPE device. No further authentication is therefore required for the backup function after the residential gateway is switched on, so
35 that the backup function can be used by any user of the home network without the need for authentication.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention are explained in
5 more detail below by way of example with reference to
schematic drawings, which show:

- Fig. 1 a generic UPnP AV system including a media
server, a control point and a media renderer,
10 Fig. 2 a UPnP AV backup system comprising a media server
and a CPE device with a virtual media server, and
Fig. 3 a message flow for a backup of a media file
within the UPnP AV backup system according to
figure 2.

15

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following description, a Universal Plug and Play
backup system for a backup of media files, which comprises
20 a media server, a CPE device, an Internet media portal
coupled via a network service provider network with the CPE
device, , and a control device for controlling the media
server is described. For purposes of explanation, numerous
specific details are set forth in order to provide a
25 thorough understanding of preferred embodiments. It will be
evident, however, to one skilled in the art that the
present invention may be practiced without these specific
details.

30 The CPE device is for example a residential gateway, a set-
top box, a router or a switch, and includes a central
processing unit, a non-volatile memory, in which an
operating system and applications are stored, and a
volatile memory for the operation of the CPE device. The
35 CPE device includes in particular hardware and software
components providing a modem function for enabling Internet

access, , and may include gateway and switching functions, and a Wi-Fi operation.

In figure 2, a residential gateway 1 is shown, which is
5 coupled via a network service provider (NSP) network with the Internet 4 for providing Internet services for a user of the residential gateway 1. To the residential gateway 1, a multitude of devices of the user may be coupled, via wireless or wired connections, constituting a home network
10 of the user. To the residential gateway 1 further a media server 2 is connected, on which user files and media files, e.g. audio and video files of the user, or also of other persons using the home network, are stored.

15 The media server 2 is in particular a Universal Plug and Play Audio/Video (UPnP AV) media server according to a UPnP AV standard and can be controlled via a corresponding UPnP AV control point 32 via UPnP AV commands. The control point 32 is included in a control device 3, e.g. a smartphone, a
20 laptop, a tablet PC or any other device including a graphical user interface 31 and a control point in accordance with the UPnP AV standard. The control point 32 allows to auto detect UPnP AV media servers of the home network via a discovery mechanism, to browse media files on
25 the media server 2 and to stream media files of the media server 2 to a UPnP AV media renderer of the home network, for example to a smart TV, a tablet PC or a notebook, not shown. The media server 2 includes in particular a media storage device, e.g. a hard disc drive or a flash memory
30 device. A home network of this kind is known from prior art.

For a backup of the media files stored on the media server 2, which is always advisable to avoid any data loss, a
35 further media storage device is required in the home network. Alternatively, content backup in the Internet

cloud, for example on a server of the network service provider or any Internet service provider, on which the user can allocate some storage place, is also possible. For using content backup in the Internet cloud, the user has to
5 subscribe to a respective backup service, and for uploading of media files, user authentication is required by the user in order to transfer media files to the Internet backup server. For a backup of further media files, also for any download, e.g. a restore operation, again authentication
10 with the Internet backup server is required. Content backup of media files stored on the media server 2 on an Internet backup server can be performed by using a PC or a Notebook and selecting the respective media files on the media server 2 by using a file browser or file explorer of a PC
15 or a Notebook of the home network, and copying them via the residential gateway 1 to the Internet backup server. This is a simple upload of files via for example a HTTP (Hypertext Transfer Protocol) upload command, whether media file or not.

20

The files need to be accessible therefore via a local file explorer which is able to select the files in the home network for upload. Via a browser, the same files can be downloaded at any time later from the Internet backup
25 server. The disadvantage of this method is that it is rather file handling than media control, and is not integrated in the UPnP AV system of the home network. Also, any other user of the home network who wants to use the Internet backup service needs to know the credentials for
30 authentication with the Internet cloud.

According to the invention, the residential gateway 1 includes a backup function 11 acting as a proxy server for the media server 2 for a backup of media files stored on
35 the media server 2 to an Internet media portal 5. The backup function 11 can be accessed from any user of the

home network for backup and restore operations of his media files as stored on the media server 2. The Internet media portal 5 acts as a user space to which media files can be easily added or deleted via the proxy server by any user of
5 the home network. The Internet media portal 5 is managed for example by the network service provider or by any Internet service provider.

The backup function 11 is in particular a DLNA backup
10 function: a DLNA backup proxy operating as a DLNA media server in accordance with a DLNA standard. The backup function 11 acts therefore as a virtual media server 12, a virtual DMS (digital media server) 12, because the media files stored on the Internet media portal 5 are reflected
15 on a representation 12 within the backup function 11, the representation 12 having the function of a virtual DMS 12. Copying of media files is started via the control device 3 and UPnP AV commands, e.g. export and import functions, via which a media file is copied from the media server 2 to a
20 copy client 13 of the virtual DMS 12. The Internet media portal 5 includes a copy server 51 for providing a communication with the copy client 13 of the virtual DMS 12. The Internet media portal 5 includes further a media library 52 and a user media space 53, on which the media
25 files are stored. The Internet media portal 5 includes also an account data base 54 on which user accounts and sharing information are stored, to provide authorization for a multitude of clients of the Internet media portal 5.

30 The backup function 11 includes further an authentication function 14, to provide authentication with the Internet media portal 5, in order to get authorized to copy media files to the Internet media portal 5 and back to the home network. The authentication function 14 includes the
35 necessary credentials for accessing the Internet media portal 5, and the authentication starts automatically, if

not already done, if any user in the home network likes to access the Internet media portal 5. The authentication is provided advantageously automatically by the authentication function 14 when the residential gateway 1 is switched on, so that the backup function 11 can be used by any user of the home network without the need of any further authentication. The backup function 11 with the virtual media server 12 and the authentication function 14 are realized in the residential gateway 1 as a software application for example.

The copy client 13 of the backup function 11 includes in particular a backup copy function, which is able to copy a media file, which is copied to the virtual DMS 12 via a UPnP AV copy action, automatically to the user media space 53 on the Internet media portal 5. After copying, the virtual DMS 12 just keeps the reference of the copied media file, so that the virtual DMS 12 appears as a media server for a user of the home network, but the media files are not stored in the residential gateway 1, but on the Internet media portal 5, and the virtual DMS 12 includes only the references of the media files as stored in the Internet media portal 5, so that for a user it appears that the media files are stored in the home network, but not on the Internet media portal 5.

The message flow for a media file backup sequence is shown in figure 3. A user wants for example to back up some media files that are stored on his local media server 2 via his smartphone, the control device 3, on the Internet media portal 5. The control device 3 has implemented for example the UPnP AV function "CDS:Browse" to discover media files on his media server 2, step 61, or to discover his media files on the virtual DMS 12, step 62. Via the control device 3 and the "CDS:Browse" function, the user can see in particular also the media files from different outside

sources on the virtual DMS 12, e.g. public Internet TV sources, and/or media sources from his friends, and also his backup sources. The backup function 11 included in its residential gateway 1 is mirroring his user media space 53
5 of the Internet media portal 5.

It is assumed that backup function 11 is already authenticated with the media portal 5. If not, for example if the residential gateway 1 was just switched on, the
10 backup function 11 activates the authentication function 14, step 63, and in a further step 64, the authentication function 14 authenticates with the Internet media portal 5 by using the security credentials of the user of the home network. After authentication, the virtual DMS 12 remains
15 connected with the Internet media portal 5, and the user can see the media files as stored on the Internet media portal 5, step 65.

The user uses now the control device 3 to drag a media file
20 from his local media server 2 to the backup function 11, which is for example represented by a backup file folder of the virtual DMS 12 and which folder the user sees on the graphical user interface 31 of the control device 3, for a backup of the media file. Also any other copy triggering
25 action may be used for copying the media file from the media server 2 to the virtual DMS 12. The media file is copied within the home network of the user in accordance with known UPnP AV functions, e.g. a CDS:ExportResource function, which triggers the media server 2 to upload the
30 media file to the virtual DMS 12.

When the media file is copied from the media server 2 to the virtual DMS 12, the backup function 11 starts to operate: the media file is temporarily stored within the
35 residential gateway 1, steps 66, 67. The backup function 11 authenticates with the Internet media portal 5, steps 68-

70, if not already done. Then in step 71, the media file is copied by the copy client 13 to the user media space 53 of the Internet media portal 5 via the copy server 51. When the media file is copied to the Internet media portal 5, then the copy of the media file in the DLNA backup proxy is deleted, step 72. The media file is stored now only on the Internet media portal 5 but not in the virtual DMS 12, and the media file is referenced in the virtual DMS 12, step 73.

10

For restoring the media file stored in the Internet media portal 5, the media file is selected in the backup file folder by using the control point 32 of the control device 3, and the media file is copied to the media server 2 for example by dragging the media file to a file folder of the media server 2. The media file is then copied from the Internet media portal 5 to the residential gateway 1 by the DLNA backup proxy 11, and copied to the media server 2 via a CDS:ExportResource command of the Copy Client 13 or a CDS:ImportResource command of the media server 2.

How the media files are copied and restored between the DLNA backup proxy and the Internet media portal 5 is known from prior art, it can be any mechanism: e.g. FTP file transfer, file upload or download by using HTTP commands, or any other file transfer function within the public network. The media files are copied within the home network in accordance with known UPnP AV functions, in particular CDS:ExportResource or CDS:ImportResource functions, which triggers the media server 2 to upload a media file to the virtual DMS 12, respectively triggers the virtual DMS 12 to download a media file to the media server 2. How the media files on the Internet media portal 5 are read by the virtual DMS 12 is also open, it can be any mechanism. However, in the virtual DMS 12, the media files are represented in the UPnP AV format. A specific file folder

of the virtual DMS 12 may refer to the Internet media portal 5, e.g. "My Media Portal", in which the media files as stored on the Internet media portal 5 are shown and can be accessed via UPnP AV browse or search actions.

5

The present invention therefore has the advantage that the backup function 11 of the residential gateway 1 authenticates automatically with the Internet portal 5, and the users of the home network do not need to remember the
10 credentials for backing up of the media files on the Internet media portal 5. The backup of a media file happens within the UPnP AV environment directly via the control device 3, e.g. a smartphone or any other control device comprising a graphical user interface 31 and a control
15 point 32, or a multitude of respective control devices 3 of the home network. The backup of media files on the Internet media portal 5 can be handled and viewed therefore as if they were done in the home environment.

20 Also other embodiments of the invention may be utilized by one skilled in the art without departing from the scope of the present invention. The invention is in particular not limited to residential gateways and may be used advantageously also for all kinds of other CPE devices,
25 e.g. routers, switches, telephones and set-top boxes. The invention resides therefore in the claims herein after appended.

Claims

1. A Universal Plug and Play system for a backup of a media file, comprising
- 5 a CPE device (1) including a backup function (11) comprising a copy client (13),
- a media server (2) including a media storage device, the media server (2) being coupled with the CPE device (1),
- 10 an Internet media portal (5) coupled via a network service provider network with the CPE device (1), the Internet media portal (5) including a copy server (51) for receiving media files from the copy client (13), and
- a control device (3) for controlling the media server (2)
- 15 and for copying the media file from the media server (2) to a representation (12) of the copy server (51) included in the CPE device (1) for a backup of the media file on the Internet media portal (5), wherein the representation (12) of the copy server (51)
- 20 reflects the media file stored on the Internet media portal (5), via which representation (12) the media file is accessible within the Universal Plug and Play system.
- 25 2. The backup system of claim 1, wherein the representation (12) has the function of a virtual media server, via which the media file as copied to the Internet media portal (5) is accessible for a user of the control device (3).
- 30 3. The backup system of claim 1 or 2, wherein the media file copied to the Internet media portal (5) for backup is displayed in a file folder of the representation (12) within a list of other backed-up media files, and wherein
- 35 the representation (12) has the function of a second media server for a user of the control device (3).

4. The backup system of claim 3, wherein the list is automatically synchronized with the media files copied to the Internet media portal (5).

5

5. The backup system of one of the preceding claims, wherein the system is a Universal Plug and Play Audio/Video system according to a Universal Plug and Play Audio/Video standard, the media server (2) a media server according to the Universal Plug and Play Audio/Video standard, the control device (3) includes a control device (3) according to the Universal Plug and Play Audio/Video standard, and wherein the media file is copied from the media server (2) to the virtual media server (12) via Universal Plug and Play Audio/Video commands according to the Universal Plug and Play Audio/Video standard, and wherein the system is a part of a home network.

6. The backup system of claim 5, wherein the backup system is a Universal Plug and Play AV system according to the Universal Plug and Play Audio/Video version 2 specification.

7. The backup system of one of the preceding claims, wherein the backup function (11) includes an authentication function (14) to authenticate with the Internet media portal (5), in order to get authorized to copy the media file to the Internet media portal (5) and to get access to other media files copied to the Internet media portal (5), the authentication function (14) containing user credentials for accessing the Internet media portal (5), which authentication function (14) starts automatically with the operation of the CPE device (1).

8. The backup system of claim 7, wherein the backup function (11) including the representation (12) and the

authentication function (14) is a part of a DLNA backup proxy (11) included in the CPE device (1), the DLNA backup proxy (11) operating as a Digital Living Network Alliance (DLNA) media server in accordance with a DLNA standard.

5

9. The backup system of one of the proceeding claims, wherein the Internet media portal (5) is managed by an Internet service provider.

10 10. The backup system of one of the proceeding claims, wherein the CPE device (1) is a residential gateway or a set-top box. And the control device 3, e.g. a smartphone, a tablet PC.

15 11. A method for a backup of a media file, comprising the steps of
copying the media file from a media server (2)
including a media storage device to a copy client (13)
of a CPE device (1) by using a control device (3), the
20 media server (2) being coupled with the CPE device (1),
the copy client (13) copying the media file to an
Internet media portal (5) coupled via a network service
provider network with the CPE device (1), the Internet
media portal (5) including a copy server (51) for
25 receiving media files from the copy client (13), and
the representation (12) of the copy server (51)
showing the media file stored on the Internet media
portal (5) to a user of the control device (3), and via
which representation (12) the media file is accessible
30 for the user.

12. The method of claim 11, wherein the representation (12)
of the copy server (51) includes a file folder in which the
media file is listed for showing the media file to the
35 user.


13. The method of claim 12, comprising the step of restoring the media file by selecting the media file in the file folder and copying the media file to the media server (2) by using a copy command.

5

14. The method of claim 13, wherein the copy command is a copy command in accordance with a Universal Plug and Play Audio/Video standard.

10 15. A CPE device (1) comprising a backup function (11) with a representation (12) and a copy client (13) for copying a media file from a home network to an Internet media portal (5) coupled via a network service provider network with the CPE device (1), performing a method
15 according to claim 11.

1/3

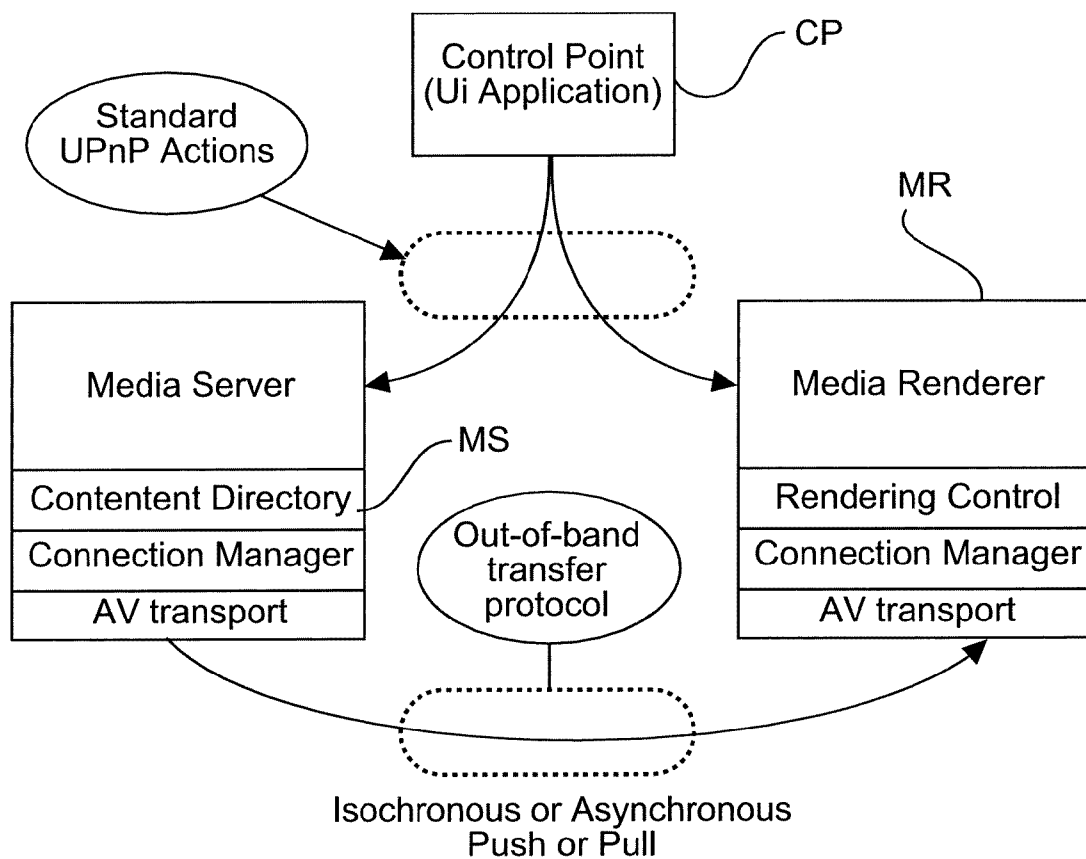**Fig. 1**

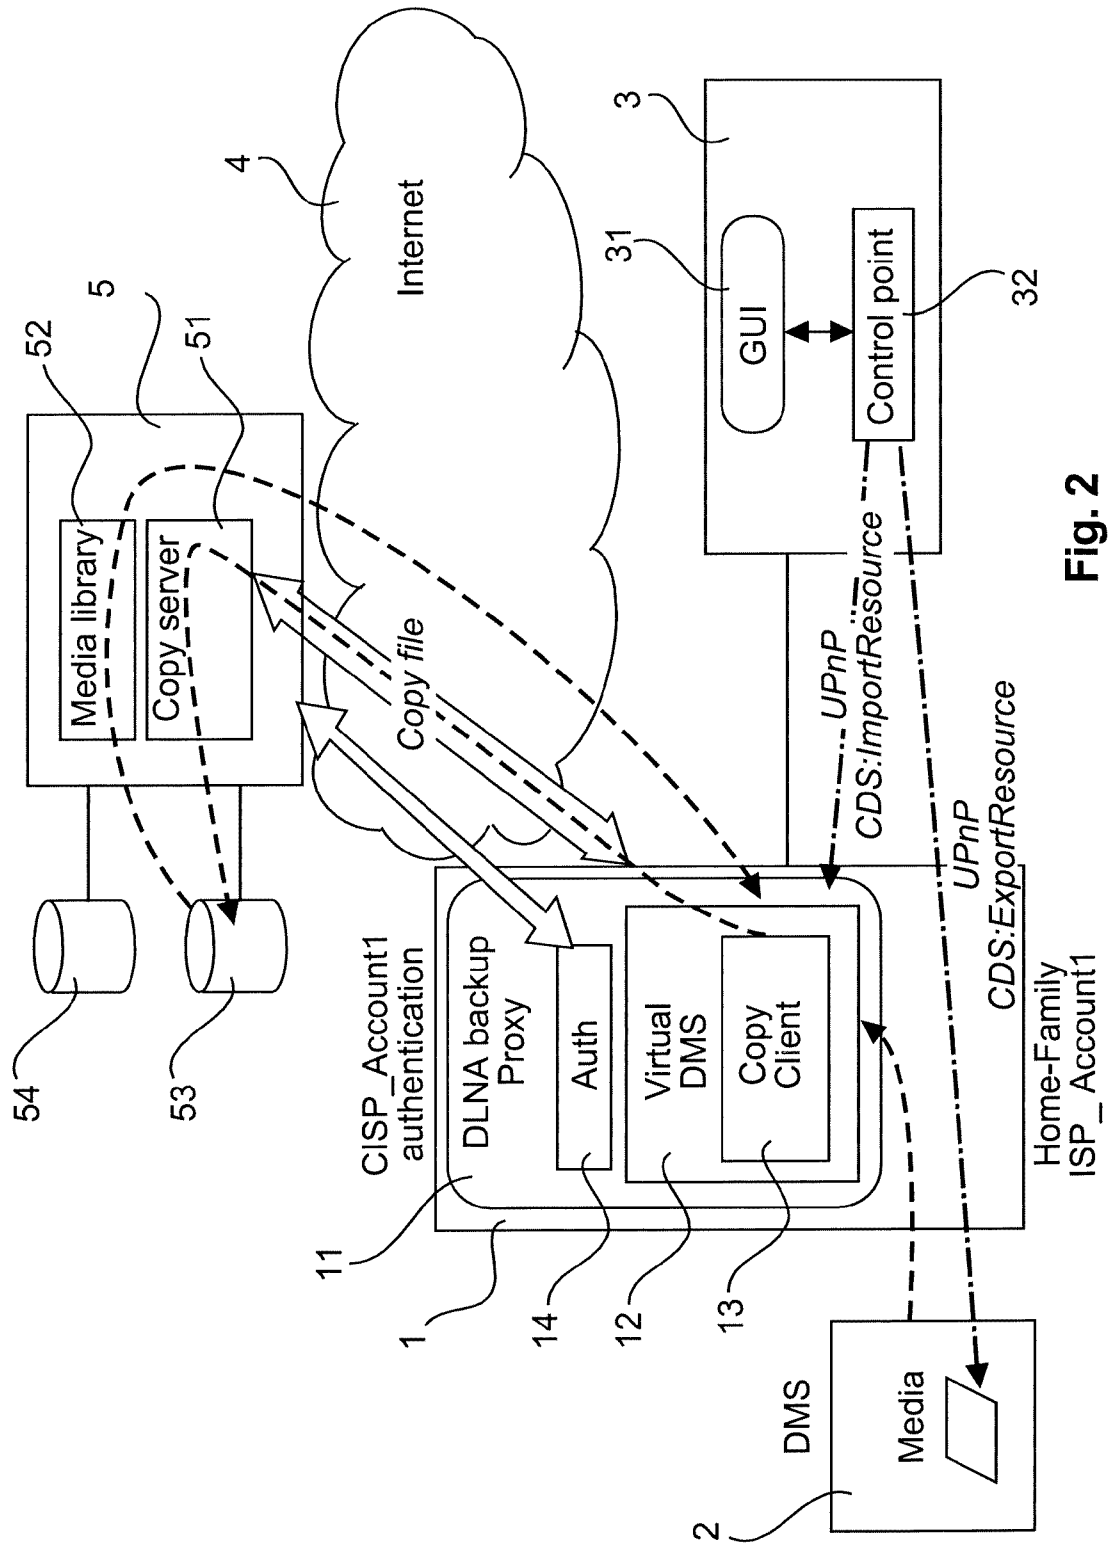


Fig. 2

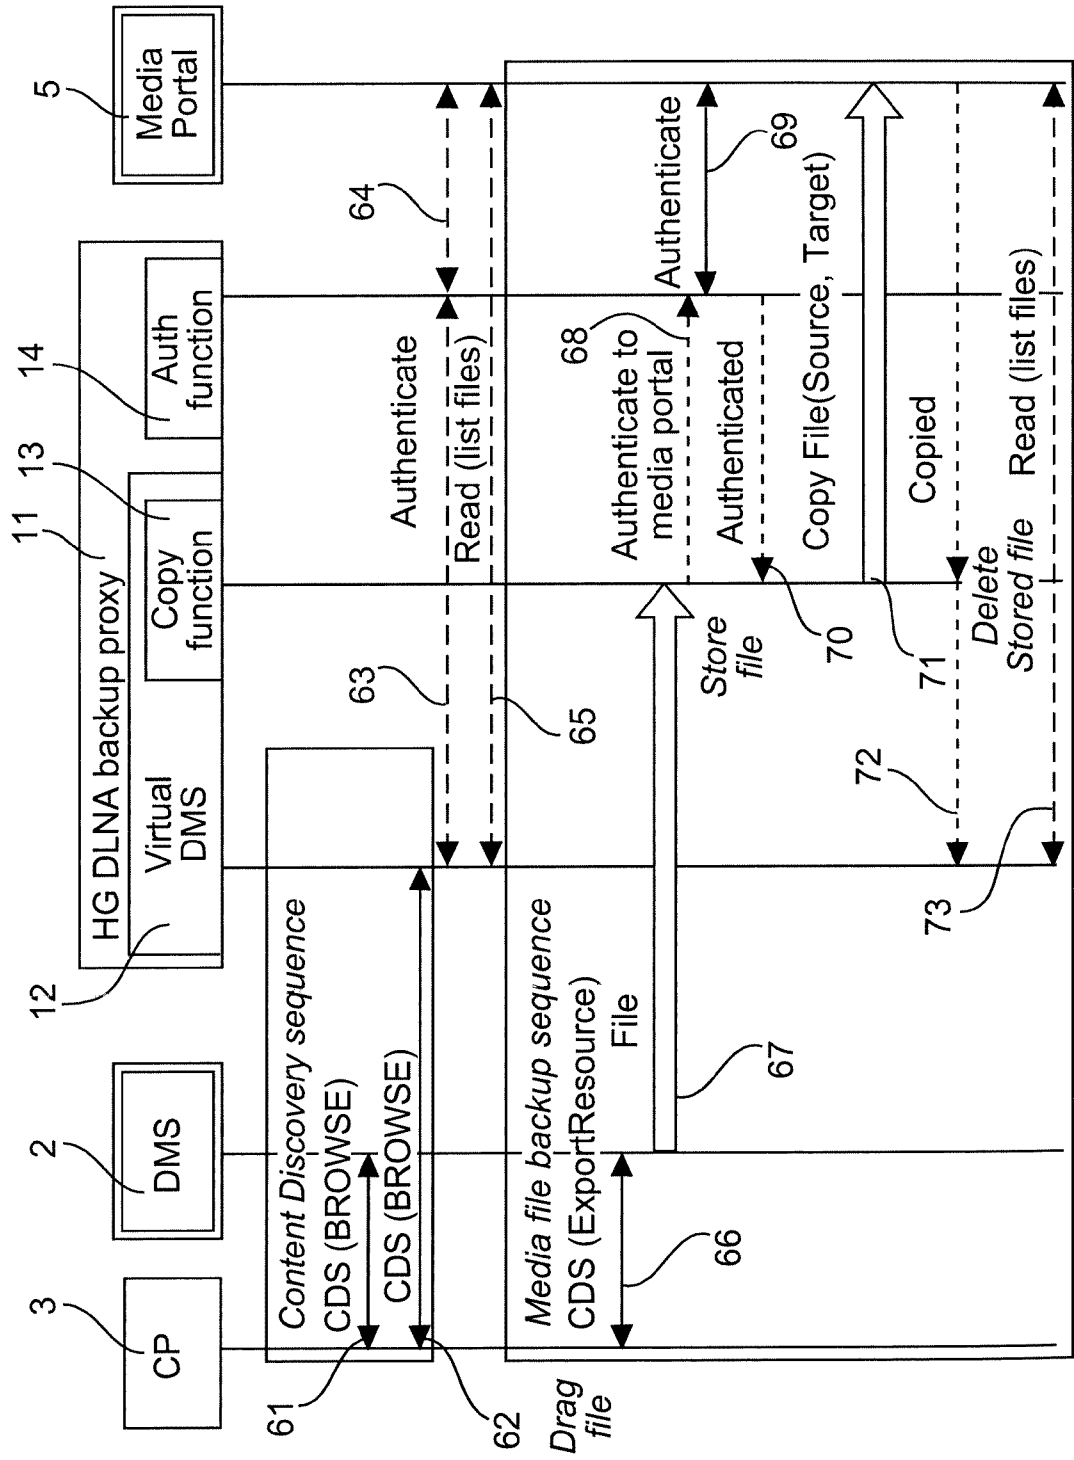


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2014/060616

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04N21/222 H04N21/231 H04N21/2747 H04N21/436 G06F11/14
H04L29/06

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04N G06F H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 323 313 A1 (THOMSON TELECOM BELGIUM [BE]) 18 May 2011 (2011-05-18) abstract; figures 1-4 paragraph [0053] - paragraph [0058] paragraph [0062] - paragraph [0066] -----	1-15
X	WO 2008/027730 A1 (INTEL CORP [US]; JARED MATTHEW A [US]) 6 March 2008 (2008-03-06) abstract; figure 1 paragraph [0014] - paragraph [0019] paragraph [0032] -----	1-15
X	US 2010/169279 A1 (LOI DARIA [US] ET AL) 1 July 2010 (2010-07-01) the whole document ----- -/-	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 July 2014

Date of mailing of the international search report

05/08/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Biro, Zoltan

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2014/060616

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009/144341 A1 (HAUCK JERRY [US] ET AL) 4 June 2009 (2009-06-04) cited in the application the whole document -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2014/060616

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2323313	A1	18-05-2011	NONE
WO 2008027730	A1	06-03-2008	US 2008077650 A1 27-03-2008 WO 2008027730 A1 06-03-2008
US 2010169279	A1	01-07-2010	NONE
US 2009144341	A1	04-06-2009	NONE