



- (51) **International Patent Classification:**
B27K 3/34 (2006.01) *B27K 7/00* (2006.01)
- (21) **International Application Number:**
PCT/CN2015/075713
- (22) **International Filing Date:**
1 April 2015 (01.04.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
PCT/CN2014/075206 11 April 2014 (11.04.2014) CN
- (72) **Inventor; and**
- (71) **Applicant : HERMESCEC, Branko** [CN/CN]; Lang-farbe Co Ltd, No 30 Taishan Road, Jingjikaifa District, Huantai County, Zibo, Shandong 256410 (CN).
- (74) **Agent: AFD CHINA INTELLECTUAL PROPERTY LAW OFFICE;** Suite B 1601A, 8 Xue Qing Rd.Haidian, Beijing 100192 (CN).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(54) **Title:** CHEMICALLY MODIFIED WOOD AND NON-WOOD PRODUCTS AND METHODS FOR THE PRODUCTION THEREOF

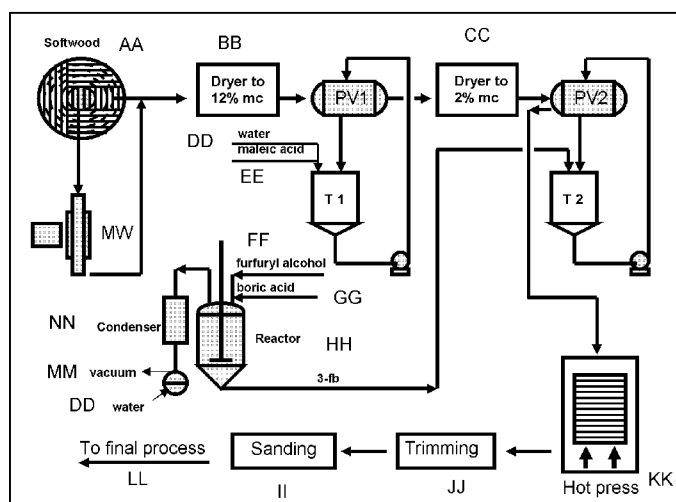**Figure 1**

(57) **Abstract:** Provided is a process for chemically modifying wood or non-wood comprising: (a) impregnating said wood or non-wood with an aqueous composition comprising an acid polymerisation catalyst; (b) impregnating the wood or non-wood product from step (a) with 3-furfuryl borate ('3-FB'); and (c) subjecting the wood product from (b) for a time and under conditions to affect polymerisation of the 3-FB. Modified wood and non-wood products are also provided.

- 1 -

CHEMICALLY MODIFIED WOOD AND NON-WOOD PRODUCTS AND METHODS FOR THE PRODUCTION THEREOF

Field of the Invention

5

The present invention relates to modified wood and non-wood products and processes for their production. In particular the invention relates to methods of chemically modifying wood or non-wood products such as hardwood (softwood) as well as non-wood products such as bamboo, modified wood/non-wood products derived from such methods, and novel
10 reagents which are to be used as wood and non-wood modifiers.

Background to the Invention

Many of the most valuable rainforest hardwood resources are in danger of extinction due
15 to extensive logging. It is not viable to attempt to replace slow-growing hardwood tree species and maintain a vibrant logging industry. Consequently many countries have placed bans on the logging and export of such species, and have resorted to fast growing plantation softwood species and some non-wood species like bamboo in order to maintain their timber industry. Notwithstanding such bans unscrupulous loggers and exporters
20 continue to harvest species such as Ebony (very dense blackwood from species of genus *Diospyros*, family of *Ebenaceae*) and Rosewood (family *Leguminosae*). Ebony species under threat include *Diospyros ebenum* (India and Sri Lanka), *Diospyros crassiflora* (Africa), *Diospyros celebica* (Indonesia) and *Diospyros gracilipes* (Madagascar). One reason for this continued trade is that the plantation softwood timber is not comparable to
25 the hardwood species in terms of performance, such as structural and engineering characteristics, for instance, water resistance, impact resistance, density, dimensionally stability, and so on.

In an aspect the present invention is directed to the chemical treatment of plantation grown
30 wood and non-wood (such as plantation grown softwood and sapwood, and even bamboo), with the aim of producing a modified wood non-wood product which shares many of the

- 2 -

qualities of natural hardwood timber, thus reducing the desire for the natural hardwood.

Summary of Invention

- 5 In one aspect the invention provides a process for chemically modifying wood or non-wood comprising:
- (a) impregnating said wood or non-wood with an aqueous composition comprising an acid polymerisation catalyst;
 - (b) impregnating the wood or non-wood product from step (a) with 3-furfuryl borate
10 ('3-FB'); and
 - (c) subjecting the wood or non-wood product from (b) for a time and under conditions to affect polymerisation of the 3-FB.

In an embodiment the modification process is applied to wood and preferably softwood.

15

In an embodiment the modification process is applied to non-wood and preferably Kraft paper.

In a further aspect the invention provides a chemically modified wood product derived
20 from softwood which has been produced by the polymerisation of 3-furfuryl borate within said softwood.

In a further aspect the invention provides a chemically modified non-wood product derived from Kraft paper which has been produced by the polymerisation of 3-furfuryl borate
25 within said Kraft paper.

In a further aspect the invention provides a chemically modified wood product which has been impregnated with 3-furfuryl borate.

30 In a further aspect the invention provides 3-furfuryl borate for use as a wood modifier.

- 3 -

In a further aspect the invention provides a method of preparing 3-furfuryl borate ('3-FB') comprising the steps of:

- (i) reacting furfuryl alcohol ('2-FM') or 3-furfuryl methanol ('3-FM') with boric acid;
- 5 and
- (ii) removing water produced during the reaction of (i).

Brief Description of Figures

10 **Figure 1** – Process flow diagram of a process according to the present method.

Figure 2 – Diagram depicting a short logs recovery layout of a process according to the present method for the production of, for instance, bench tops, table tops, stair treads, etc. (in 30 and 45 mm).

15

Figure 3 – Photographic representation of a chemically modified non-wood product produced from Kraft paper according to the present invention.

20 **Figure 4** – Photographic representation of a chemically modified non-wood product produced from Kraft paper according to the present invention.

Figure 5 – Photographic representation of a chemically modified non-wood product produced from Kraft paper according to the present invention.

Detailed Description of Preferred Embodiments of the Invention

25 In the first step of the process the wood or non-wood is impregnated with an aqueous composition comprising an acid polymerisation catalyst. Prior to this step however it will be appreciated that softwood, for instance, may be subjected to one or more pretreatment steps. For instance in a preferred pretreatment step softwood is dried to reduce the moisture content (MC). Preferably the MC of the softwood prior to being subjected to the

- 4 -

first step is less than 20%, and more preferably less than 15%. Most preferably the MC of the softwood is about 12% or less.

In an embodiment which involves the use of Kraft paper, preferably the MC is less than 5%, for example about 4%, about 3%, about 2%, or about 1%.

In a further embodiment which involves the use of Kraft paper, the MC is substantially 0%. Accordingly in an embodiment the pretreatment step involves the removal or substantial removal of water prior to the impregnating step.

10

This pretreatment drying step may be conducted using drying apparatus known in the art, including the use of commercial drying kilns and bay air drying over a period of time in an environment which is relatively humidity free.

15 Accordingly in another aspect the invention provides a process for chemically modifying softwood comprising:

- (i) drying the softwood to reduce its moisture content;
- (ii) impregnating said softwood with an aqueous composition comprising an acid polymerisation catalyst;
- 20 (iii) impregnating the wood product from step (ii) with 3-FB; and
- (iv) subjecting the wood product from (iii) for a time and under conditions to affect polymerisation of the 3-FB.

"Wood" as used herein refers to both "softwood" and "hardwood".

25

"Softwood" as used herein refers to permeable or semi-permeable wood, timber or lumber, (often derived from conifers) which have a hardness typically not exceeding 3500 N and densities generally below 500 kg/m³. Conifer species which are a common source of softwood include pine (for instance radiata pine), fir, spruce, cedar and hemlock (tsuga).

30 The term also includes sapwood which is the outermost younger xylem layer in a growing tree. This is to be contrasted with heartwood. It will be appreciated that the methods

- 5 -

described herein may also be applied to relatively impermeable woods to which has been applied a pretreatment step or steps to increase the permeability of the wood. For instance, a permeability enhancing pretreatment step may include microwave or steam treatments.

- 5 "Non-wood" refers to perennial evergreens of the true grass family (Poaceae), tribe bambuseae, in which the dicotyledonous woody xylem is absent. The absence of growth wood causes stems to be columnar rather than tapering, examples of non-wood includes bamboo. In the context of the present invention the term "non-wood" also refers to Kraft paper which is paper or paperboard (cardboard) produced from chemical pulp which has
10 been treated by the Kraft process. Kraft paper as used herein also encompasses Sack Kraft paper or just sack paper which is a porous Kraft paper with high elasticity and high tear resistance, designed for packaging products with high demands for strength and durability.

- As used herein the term "impregnated" or "impregnation" refers to the act of incorporating
15 a chemical into the wood or non-wood structure wherein the resultant wood or non-wood product is said to be chemically loaded. For instance, and without wishing to be bound by theory, it is believed that in the impregnating steps disclosed herein the acid polymerisation catalyst composition and 3-FB will diffuse into the cell walls of the permeable or semi-permeable softwood. Any impregnation step disclosed herein may be
20 either (i) uniformly achieved so that the chemical exists completely and wholly throughout the cellulosic structure of the wood or (ii) may diffuse substantially throughout the structure of the wood.

- The first step in the process may be carried out with the use of any acid polymerisation
25 catalyst. The acid polymerisation catalyst may be selected from those which are soluble or partly soluble in water to enhance the impregnation step. Water soluble or part soluble acid polymerisation catalysts may be organic or inorganic in nature and may include solubilising agents such as emulsifiers to assist solubility and hence impregnation. Examples of suitable acid polymerisation catalysts include multifunctional carboxylic
30 acids such as maleic acid, itaconic acid (methylenesuccinic acid), and 1,2,3,4-butanetetracarboxylic acid (BTCA).

- 6 -

Preferably the acid polymerisation catalyst is maleic acid.

Preferably the composition comprising the acid polymerisation catalyst is an aqueous
5 composition comprising between 1-10% w/w of the acid polymerisation catalyst. More preferably the concentration is between 2-5% w/w.

Preferably the acid polymerisation catalyst does not cause the pH of the resultant wood or non-wood product to decrease such that this engenders undesirable brittleness to the
10 finished/modified wood or non-wood product. On the other hand, if the pH is too high, it may inhibit the polymerisation reaction.

Preferably the impregnation step is capable of loading, for instance, the wood, with the acid polymerisation catalyst from about 15% to 30% (based on the dry weight of the wood
15 or non-wood).

The impregnation of the acid polymerisation catalyst may be carried out by any known process including absorption methods utilising capillary action (e.g., dipping and soaking) or using vacuum and/or pressure techniques.

20

In a preferred method the impregnation step involves the systematic treatment of the wood or non-wood under various pressures, for example, a vacuum-pressure-vacuum system. In this embodiment, the impregnating step comprises applying an initial vacuum to the wood or non-wood followed by the application of pressure in the presence of the aqueous acid
25 polymerisation catalyst solution. Preferably, the vacuum is applied at a pressure of from -90 to -95 kPa. Preferably the pressure applied to the wood or non-wood to facilitate impregnation of the acid polymerisation catalyst composition is from about 200 to about 1,000 kPa, more preferably at least 300 kPa.

30 In the next step the wood or non-wood product which has been initially impregnated with the acid polymerisation catalyst is subsequently impregnated with 3-FB.

- 7 -

Prior to this subsequent impregnation step the wood or non-wood product may be preferably dried again to reduce the moisture content (MC) even further. Preferably the MC of the wood or non-wood product at this point is less than 10%, and more preferably
5 less than 5%. Most preferably the MC of the wood or non-wood product prior to treatment with 3-FB is about 2% or less.

Accordingly, in a further aspect the invention provides a process for chemically modifying softwood comprising:

- 10 (i) drying the softwood to reduce its moisture content;
- (ii) impregnating said softwood with an aqueous composition comprising an acid polymerisation catalyst;
- (iii) drying the wood product from step (ii) to reduce its moisture content;
- (iv) impregnating the wood product from step (iii) with 3-FB; and
- 15 (v) subjecting the wood product from (iv) for a time and under conditions to affect polymerisation of the 3-FB.

The "3-FB" may be prepared by reacting furfuryl alcohol ('2-FM') or 3-furfuryl methanol ('3-FM') (both $C_5H_6O_2$) with boric acid (H_3BO_3) or $B(OH)_3$. Synonyms for furfuryl
20 alcohol include 2-furyl methanol or 2-furancarbinol. Synonyms for 3-furfuryl methanol include: 3-(hydroxymethyl)furan; 3-furancarbinol; 3-furfuryl alcohol; 3-furylecarbinol; 3-furylemethanol; 3-furylemethyl alcohol and furan-3-yl methanol. Synonyms for boric acid include: hydrogen borate, boracic acid, orthoboric acid or acidum boricum.


25 Preferably the reagents (2-FM or 3-FM and boric acid) are added together at room temperature. Preferably about 3 mol of 2-FM or 3-FM is reacted with 1 mol of boric acid. Preferably the reaction is constantly stirred and maintained so that it does not exceed 85°C. Water may be intermittently or continuously collected to drive the reaction to completion or near completion. This can be achieved by the use of, for instance, a fitted condenser
30 unit and water collection flask. The reaction may be monitored by intermittently extracting samples and determining the extent of 2-FM or 3-FM consumption (e.g. by MS

- 8 -

or GC).

The resultant 3-FB may be further purified or used straight from the reactant mixture. Preferably though the 3-FB is processed to remove excessive amounts of water which may
5 otherwise inhibit the polymerisation step.

The various reactions contemplated above are represented as follows:

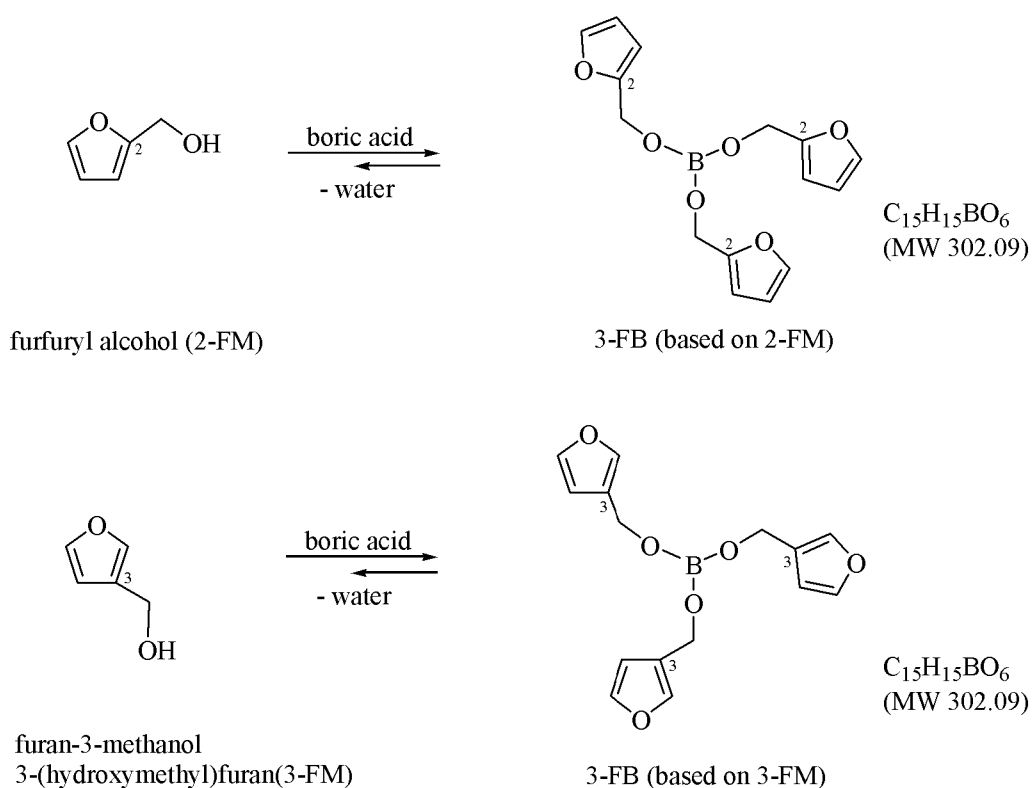

10

Water is removed to drive the reaction to completion (or to the right).

In a preferred embodiment the reaction involves 2-FM, and thus forms the 3-FB based on 2-FM.

15

It will be appreciated from the above that reference to "3-FB" includes the borate esters of both 2-FM and 3-FM.

- 9 -

The 3-FB impregnation step may be conducted so as to facilitate chemical loading of the wood or non-wood, preferably at a loading of from about 15% to 30% (based on the dry weight of the wood or non-wood). In a preferred embodiment, the impregnating step comprises applying an initial vacuum to the wood or non-wood followed by the application
5 of pressure in the presence of the furfuryl alcohol solution. Preferably, the vacuum is applied at a pressure of from -90 to -95 kPa. Preferably, the pressure applied to the wood to facilitate impregnation of 3-FB is from about 200 to about 1,000 kPa, more preferably at least 300 kPa.

10 In another embodiment the method optionally includes a 3-FB diffusion step which is preferably conducted over a period of from about 3 to 5 days at ambient pressure and temperature. The diffusion step is preferably such that the wood, for instance, swells up to about 4-8% per volume relative to the volume of the original wood sample. It will be understood by those in the art that the amount of swelling of the wood will be somewhat
15 dependent on the density of the wood and that denser wood may be expected to swell more than less dense wood.

The methods described above may also include one or more additional impregnation or diffusion steps to include pesticides (such as fungicides, insecticides, etc), wood preserving
20 agents, colouring pigments or fire retardant agents. One of the advantages of the present invention is that with the use of 3-FB the boron acts to protect against insects, fungi, marine borers, etc. Furthermore, the final treated wood product which is quite dry prevents (or at least minimises) any microorganism from entering and destroying the treated wood.

25 The polymerisation step may be conducted based on methodology known in the art including subjecting the loaded wood product to temperatures and/or pressures to facilitate polymerisation. In one embodiment the polymerisation step involves hot pressing the resultant wood product derived from the two preceding impregnating steps.

30 In a preferred embodiment the pH of the wood or non-wood product subjected to the polymerisation step is from about 2-5, and more preferably about 2.

- 10 -

Hot pressing may be conducted under conditions which will effect polymerisation of the 3-FB, advantageously resulting in a three-dimensional chemical adhesive bond between the wood fibers. Preferably, the hot pressing step is conducted at a pressure of from about 5-30 MPa and a temperature of from about 170-200°C. Preferably, the hot pressing step is conducted for a period of from about 5-15 minutes. Such conditions result in the compression of the microstructure of the wood and trigger the polymerisation reaction of furfuryl alcohol from 3-FB.

In a particular embodiment, the final chemically modified wood or non-wood product may have a crushing strength of around 120 MPa, a modulus of elasticity of about 20 GPa and a hardness of around 15,000 N. It will be appreciated however that the engineering properties of the 3-FB treated wood or non-wood will depend on the species, chemical loading and final density. Such parameters can, to some extent, be pre-determined to suit a particular design parameter. The above figures are typical upper limits.

The wood or non-wood product described above, or wood or non-wood when treated by the method of the inventive aspect of the invention advantageously can be sanded or cut into desirable dimensions or shapes. Furthermore, advantageously the wood or non-wood product does not absorb significant amounts of moisture, generally below 6% (based on the weight of the wood product). In this regard, the absorbance of moisture is generally not into the wood cell and, as such, the wood product does not exhibit any substantial amount of swelling or shrinkage during a soaking and drying cycle.

The high modulus of elasticity represents a substantial increase compared with that of the untreated softwood. In particular, typically the parent softwood would have a modulus of elasticity of between 5-6 GPa, compared with that of the treated wood up to about 20 GPa. For instance, about 15 GPa, about 16 GPa, about 17 GPa, about 18 GPa, or about 19 GPa. Similarly, the hardness of the wood product of the invention is significantly higher than that of the parent wood, and is typically much higher than that of any hardwood which is currently available. For example, jarrah has a hardness of around 7000 N, which is much

- 11 -

less than that which may be provided according to certain embodiments of the invention.

Still further, the wood or non-wood product of the invention demonstrates high fire resistance, typically in the range of 85-90% of the values which may be expected for fully loaded boron wood. It is also noted that, in general terms, boron can not be successfully fixed to wood, and is thus typically lost from surface treated wood. In contrast, natural heavy hardwoods are generally untreatable and as such as generally not deemed to be fire-resistant. In engineering terms, the wood or non-wood product is structurally sound. In terms of dimensional stability swelling, shrinking and water uptake, the 3-FB treated wood or non-wood products of the present invention are superior compared to natural ebony. Similarly, in economic terms, the production of the wood product, for example, using the process for treating wood described above, is cost effective in that soft wood material may be treated to provide a replacement for the more expensive hardwood materials.

One of the main advantages of the present two step impregnating method involves the initial production of 3-FB and its subsequent impregnation into the softwood. The inventors initially postulated that a similar result could be achieved by impregnating a mixture of 3-furfuryl alcohol and boric acid and forming the 3-FB reagent *in situ* (i.e., within the wood). However, reaction of 3-furfuryl alcohol and boric acid produces water, which is found to be an inhibitor of the subsequent polymerisation reaction. The present process of separately forming 3-FB and impregnating this reagent overcomes these issues and is also amenable to large scale production of chemically modified wood or non-wood. Accordingly, the 3-FB in this process is not produced in situ within the wood or non-wood. This process also avoids the issues of using furfuryl alcohol which include – incomplete polymerisation, instability, long curing times and short pot life. The resultant wood or non-wood is characterised with superior dimensional stability, low water uptake, is biologically resistant, and has an increased hardness MOE and MOR attractive appearance compared to naturally occurring hardwoods such as ebony and rosewood.

Uses for the chemically modified wood or non-wood products are the same as presently used for natural blackwood (ebony), e.g. musical instruments, artefacts, flooring and

- 12 -

panelling, furniture materials, decking and structural materials.

In an embodiment which involves the treatment of Kraft paper, the present invention also provides a process for chemically modifying Kraft paper comprising:

- 5 (i) drying the Kraft paper to reduce its moisture content;
- (ii) impregnating said Kraft paper with an aqueous composition comprising an acid polymerisation catalyst;
- (iii) impregnating the Kraft paper product from step (ii) with 3-FB; and
- (iv) 10 subjecting the Kraft paper product from (iii) for a time and under conditions to affect polymerisation of the 3-FB.

Accordingly, the present invention also contemplates a chemically modified non-wood product derived from Kraft paper which has been produced by the polymerisation of 3-furfuryl borate within said Kraft paper.

15

In an embodiment the process above includes the additional step of:

- (v) laminating the Kraft paper product from step (iv) with an epoxy resin.

In another embodiment the present invention contemplates modified Kraft paper products
20 which are derived from the processes mentioned above. In particular the invention contemplates composite Kraft paper products in which two (or more) layers of the modified Kraft paper (in the form of sheets) are sandwiched between concrete or aerated concrete. In an embodiment the modified Kraft paper is in the form of a sheet in a thickness of about 1.0 mm to about 20 mm, for instance about 2 mm, 3 mm, 4 mm, 5 mm,
25 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, or 19 mm.


The present invention will now be described by way of the following non-limiting Examples.

30

Examples

Example 1

5 Synthesis of 3-FB (3-furfuryl borate) (T2 chemical)



Preparation of 3-FB was conducted in three different scales, 5,000 ml, 20,000 ml and 300 kg.

10

Procedure as follows:

- Charge reaction vessel with required amount of furfuryl alcohol ('2-FM') (Hongye Biochemical Co., Henan, China) at room temperature.
- Add required amount of crystalline boric acid, stirring constantly.
- 15 • Connect to vacuum, minimum -0.098 Mpa. Partial vacuum may cause overheating leading to explosion.
- Connect condenser and a receptacle for collection of distillate water.
- Start heating. Water will start collecting at 60°C. Temperature should not exceed 85°C.
- 20 • The reaction vessel is equipped with cooling coil or jacket.
- Once the reaction is complete (stoichiometric quantity) commence cooling down to under 30°C.

Catalyst formulation (T1 solution)

25 Preparation of maleic acid aqueous solution.

Procedure as follows:

- Fill required quantity of either fresh water or water that was circulated through scrubber in stainless steel tank.
- 30 • Warm up to 40°C.
- Add required amount of maleic acid (Zhengzhou Xingren Chemical Products Co Ltd,

Henan, China).

- Stir by perculating air or a stirrer for 60 min.

Chemical modification process (see Figures 1 and 2)

5

Sawing

Well formed, clear logs are selected and back sawn, bark to bark, sapwood only. The thickness must be pre-calculated on the basis of desired density and product thickness. The heartwood can be either used for different purpose, MW treated and then processed similar to sapwood, or sawn into 4-5 mm thick boards, which can be reconstituted similar to plywood, with T-2 treatment, which acts like plywood resin.

Drying

Sawn sapwood is either stacked and stickered for air drying first, then placed in drying kiln, or put directly through drying process, until moisture content (MC) of 10-12 % is reached.

Sizing

Wood was originally sawn bark to bark, and after drying it need to be sized to correct width, according to the specifications of the product.

20

T-1 Treatment

Sized wood is loaded into the PV-1 pressure vessel, which is then flooded with T-1 solution of 2.5% maleic acid. Vacuum-Pressure-Vacuum cycle is applied to impregnate wood. Duration and values of pressure/vacuum will vary according to wood species, dimensions and desired loading of chemicals. For instance, the vacuum of -0.09 MPa may be applied for 10 minutes to evacuate air contained in the wood. Then the system may be pressurised to 0.2 to 0.4 MPa, depending on desired loading, species and wood size. Final vacuum dries the wood to drip-dry.

30 *Drying*

T-1 treated wood is then dried low MC 2-3 %. Dryer unit, with dehumidifying capability

- 15 -

was used with a capability to reach a low MC.

T-2 Treatment

Dry wood is charged in PV-2 and the vessel is flooded with T-2 treatment chemical. And
5 the cycle of Vacuum-Pressure-Vacuum applied. Duration and pressure vary with the species, desired loading and density, for instance, vacuum of -0.95 MPa for 10 mins, followed by pressure cycle of 5-15 mins at 0.2 to 0.4 MPa.

Hot Pressing

10 Treated wood is loaded into high-load hot press and gradually pressed to final thickness controlled by sets of spacers and kept at steady temperature until cured. The product coming out of the press is blank blackwood ready for processing to final product after steaming process in pressure vessel, by standard processing methods, sanding edging, sizing and machining.

15

Steaming

Pressed blackwood is practically at zero moisture, and its EMC (equilibrium moisture content) is about 5%, so it is a good practice to introduce some moisture back into the blackwood, increasing stability in service, reducing internal stresses and washing out small
20 quantities of unreacted chemicals. The condensate is recycled back into T-1 solution, therefore ends up back in the wood.

Testing

Extensive tests were carried in sufficient framework to arrive at reliable and reproducible
25 pattern of behaviour of wood in service:

1. Boron leaching test
2. FA leaching test
3. Water uptake 72 hrs at 20 C
- 30 4. Water uptake at 48 hrs at 80 C
5. Swelling at 72 hrs at 20 C

- 16 -

6. Swelling 48 hrs at 80 C
7. Hardness test
8. MOE and MOR.

5 Boron leaching test

Treatment of wood by boron compounds, boric acid, borax etc, remains one of best treatments for wood, being a wide spectrum preservative, effective against insects and fungi. Inherent problems with boron treatment is leacheability of boron compounds in wet conditions. This process offers high boron retention in treated wood.

10

Procedure:

- T-1 and T-2 treated wood with known loading of boron compound was tested for leached boric acid. Sample treated as follows:
- T-1 treatment 80% w/w with 2.5 % water solution of maleic acid w/w.
- 15 • T-2 treatment 30% with 3-FB, containing 10% boric acid as ester w/w.
- Loading of BAE in wood 2.3% w/w.
- Standard analytical method AWPA E11-06 for testing leached boric acid was used to determine the amount of leached boric acid, and AWPA A21-93 for determining amount of boric acid retained in wood.

20

Results:

Boric acid leached <10% of the loading.

Boron retention in fully treated wood >90%

Leaching curve from fully treated wood: flat after 1 day

25

Furfuryl alcohol leaching test

To ensure stability of blackwood in service, FA leaching test should be a part of routine QC procedure. Essentially, a well cured blackwood shows only traces of unreacted furfuryl alcohol in wood, after 30 days of submersion in water at room temperature by GC analysis. GC is preferred method over HPLC or spectral analysis.

30

MOE Test

The stiffness of blackwood increases significantly with increase of density, and the desired MOE can be manipulated by level of densification and loading. The range of MOE values range, according to density and loading 10-18 GPa. Higher catalyst loadings will cause
5 brittleness, and lower catalyst loading may result in unreacted furfuryl alcohol.

MOR Test

Similarly, to MOE values for blackwood, MOR also increases from about 40 MPa to a range of 80-120 MPa.

10

Hardness Test

Hardness of wood is of paramount importance for the products subjected to hard wear and tear, like flooring and decking. Hardness is also a mark of smoothness and appreciated in musical instruments, like finger and fret boards. Testing was done by using standard Janka
15 tool and 20 kN Universal testing machine. The hardness values ranged from 6000 to 15000N.

Tables below give values for the following entities.

Water Uptake 72 hrs at 20 C

20 Water uptake 48 hrs at 80 C

Tangential Swelling 72 hrs at 20 C

Tangential Swelling 48 hrs at 80 C

72 hrs water immersion at 20°C

Sample	Initial MC %	Tangential swelling %	Water uptake %	Hardness N
Blackwood (present method)	6.0	0.44	21.8	9530
Teak	14.3	0.63	42.0	4230
Merbau	9.9	1.32	39.7	5560
Oak	11.9	2.02	46.5	4800

25 • Blackwood density 880 kg/m³

- 18 -

48 hrs water immersion at 80°C

Sample	Initial MC %	Tangential swelling %	Water uptake %	Hardness N
Blackwood (present method)	6.0	0.62	24.2	9530
Teak	14.3	0.94	61.7	4230
Merbau	9.9	2.16	41.4	5560
Oak	11.9	3.88	58.9	4800

- Blackwood density 880 kg/m³

Properties of untreated wood – Sapwood of Pinus Radiata

5

Density	450 kg/m ³
Durability	Non-durable Class 5
Dimensional stability	Low
MOE	3-4 GPa
10 MOR	40 MPa
Hardness	3000 N
Water uptake	>100%
Shrinkage (R + T)	8%

15 Properties of Chemically Modified Wood (Blackwood) of the Present Method

Density	600 – 1200 kg/m ³
Durability	High H4-H5
Dimensional stability	High
20 MOE	10-18 GPa
MOR	80-120 MPa
Hardness	6000-15000 N
Water uptake	3-20%
Shrinkage	None
25 Swelling	0.3 – 1.0 %

Termite test for Blackwood

Specimens of Blackwood prepared by the method disclosed herein were tested for the resistance to termites at James Cook University, Townsville, Australia against two

30 common termite species; Coptotermes and Mastotermes. The exposure of Blackwood

- 19 -

samples to the colonies of termites resulted in 100% mortality of the insects and no specimen mass loss.

It is safe to assume that Blackwood is insect resistant, due to:

- 5 a. Low moisture content
- b. High density
- c. Furan polymer inclusion
- d. High content of Boron (unleacheable)

10 **Fungal cellar test**

Samples of Blackwood were tested By CSIRO. Division of Forest Products, Clayton, Australia for its resistance to fungal attack. Specimens were exposed to Brown rot and White rot fungi, resulting in zero mass loss during the trial. It is safe to assume that Blackwood is fungi resistant material, due to same parameters as the insect resistance.

15

Fire retardancy test

- There was a simple in-house test for Blackwood behaviour, when exposed to high heat. A simple comparative test indicates that exposure to naked flame Blackwood does not support rapid combustion. It chars slowly without visible flame. The controls of untreated wood combusted rapidly with bright yellow flame. More testing is needed to characterize the level of fire retardancy.
- 20

SPECIES	MC %	Kg/m3	72hrs	swell%	T-1 loading %	Hardness N	Drying efficiency %	MOE Mpa	MOR Mpa
Shorea Specie	14	568	11.7	2.2	89.0	3233	80%	7805	89
Chinese Ash	13	642	13.0	1.95	72.6	5344	90%	5941	88

SPECIES	BW MOE Mpa	BW MOR Mpa	BW Hardness N	72h uptake %	72hr Swell %	BW Density Kg/m3
---------	------------	------------	---------------	--------------	--------------	------------------

- 20 -

Shorea Specie	21001	155	11124	11.6	0.28	1011
Chinese Ash	18909	154	12182	9.8	0.34	985

The process according to the present invention can be applied to a wide range of woods, softwoods and hardwoods and non-woods such as bamboo.

5

Example 2

A process for making a tough, resilient, waterproof and fire resistant material in the form of a thin membrane 1-3.0 mm in thickness.

- 10 The process is furan resin treatment of Kraft paper to impart the properties that make this product so outstanding. Very low water uptake, below 10%, from Zero moisture, high tensile strength, hardness, flexural strength, fine grain composition, high density (1400 kg/m³) and unlike wood, it possesses the same strength in all directions
- 15 The inventor used good quality Kraft packaging paper, treated it with furan resin, then coating it with epoxy resin for tough, hard surface. The material possesses very high tensile strength, exceeding the tensile strength of steel of the same mass and very high degree of elasticity, a perfect material for making composite product sheets. Since all the strength needed for such product is in the strength of a membrane, any material can be
- 20 sandwiched in with specifications as needed for a set purpose.

- Further development includes making lightweight blocks of aggregate of either aerated cement, or a mix of aerated cement and vermiculite and have it sandwiched between two membranes. The product is a perfect material that can be used for thermal insulation of
- 25 buildings. Panels measuring 2400 mm x 1200 mm and 75 mm thick will weigh only 80 kg, that can be easily handled on a building site. Panels are stable, self-supporting and can be used on ceilings, walls and in slightly denser form as flooring substrata. Most buildings in China are very poorly constructed for energy conservation and use of this product can save up to 50% of energy bills, for heating or cooling.

- 21 -

The inventor has tested a range of different building materials for thermal conductivity, and the product proves to be the best of all, resulting in up to 12 deg C surface temperature difference, compared to standard building material, such as concrete. Time 5 hrs. The specimens were placed on the steel surface, heated to 80°C and temperature reading were taken in 30 min interval at three levels; 25.0, 50.0, and 70 mm distance from the heated surface.

Noteworthy, lightweight aerated concrete-vermiculite aggregate is crumbling material that cannot be used in self-supporting applications, but sandwiched between 2 sheets of the treated Kraft paper according to the invention it assumes structural properties and self-supporting free standing panels may be used as partition walls, ceiling panels and even flooring substrata, providing a high degree of thermal and sound insulation.

	25 mm	50 mm	70 mm
Concrete	68.5	59.0	53.3
Aerated Concrete	63.8	54.1	47.8
Wood (pine)	62.9	50.5	43.9
Vermiculite aggregate	60.7	47.2	41.3

Another variation is a panel made by layering Kraft paper sheets, 20 sheets make 10 mm thick board, and 20 mm will take 40 sheets. There is no limit to the thickness of the panel. Such material can be extensively used in boatbuilding and marine application, ship decks, stairs, and for yacht building, (entire hull and deck). The product may also be amenable for military applications, for example for use in anti-shrapnel products.

Production steps

Kraft paper drying

Kraft paper normally contains 8-12% water, absorbed from air. That water is removed out

- 22 -

of the paper prior to 3-FB treatment. It is proposed that the drying be done by MW dryer to minimize distortion and be a continuous process. Assuming 3000 kg/day production, there is 300 kg of water to be removed, or 30 kg/hr.

- 5 If paper flows through the system at 10 m/min, 0.5 kg of water needs to be removed per minute. Not a difficult task for MW dryer.

3-FB impregnation

Dry paper is then put through a double sided glue spreader to coat the paper from both
10 sides

Hot pressing

Impregnated Kraft paper is then staked 20 sheets high on each of the 15 plates, separated by non-stick plastic resistant to high temperature. Papers are pressed and heated
15

Epoxy resin laminating

3-FB treated and pressed papers are passed through another glue spreader, this time coating papers with epoxy resin into sheets of desired thickness, from 1.0 mm to 20 mm. Stack of such sheets is loaded into cold press and pressed for a period of about 4-5 hours
20 until resin is cured.

Performance

Two types of tests were conducted in order to evaluate the new material and to compare to other products.
25

Water tests

Water tests indicate the product's performance in constantly wet condition, as excessive water uptake renders most materials either totally unsuitable or of diminished usefulness.

- 30 Water influences biomaterials in several ways; it's a conduit of biohazards, open to fungal and insect attacks, presence of water reduces strength of fibres, thus reducing flexural

- 23 -

strength and durability of materials in service is directly related to presence and the content of water.

Long immersion, 30 days, was used to determine the absorption rate of specimen. It is noteworthy, all specimen were dried to Zero MC before treatment, therefore, the water absorption is absolute, not in addition to MC at EMC of about 10-12%.

KP	P+EPX	P+3FB 40%	P+3FB 50%	P+3FB+EPX1	P+3FB+EPX2
150.0	27.0	9.0	4.95	8.0	5.0

It is obvious that the 3-FB treatment alone is responsible for low water absorption, whereas epoxy coating reduces and slows down the absorption. Additionally, visual inspection finds that epoxy only coated paper loses its flexural strength and become soggy, while 3-FB treated specimens retain their initial elasticity and appearance.

Physical properties

MOE	18 GPa
MOR	107 MPa
Tensile Strength	28 MPa
hardness	> 10 000 N

Unlike wood with its fibres oriented in one direction, the product has wood fibers that are randomly oriented, inherently derived from the Kraft paper making, with strengths that are equally distributed in all directions. This feature makes the product very structurally versatile.

THE CLAIMS:

1. A process for chemically modifying wood or non-wood comprising:
 - (a) impregnating said wood or non-wood with an aqueous composition comprising an acid polymerisation catalyst;
 - (b) impregnating the wood or non-wood product from step (a) with 3-furfuryl borate ('3-FB'); and
 - (c) subjecting the wood product from (b) for a time and under conditions to affect polymerisation of the 3-FB.
2. A process according to claim 1 wherein the acid polymerisation catalyst is maleic acid.
3. A process according to claim 1 or 2 wherein the acid polymerisation catalyst is an aqueous composition comprising 1-10% w/w of the acid polymerisation catalyst.
4. A process according to any one of claims 1 to 3 wherein the impregnating step (a) is capable of loading the wood or non-wood with the acid polymerisation catalyst from about 15% to 30% (based on the dry weight of the wood or non-wood).
5. A process according to any one of claims 1 to 4 wherein the impregnating step (a) is carried out by a vacuum-pressure-vacuum system.
6. A process according to any claim 5 wherein the vacuum-pressure-vacuum system is -90 to -95KPa - about 200 to about 1,000 KPa - -90 to -95 KPa.
7. A process according to any one of claims 1 to 6 wherein the impregnating step (b) is preceded by a drying step and preferably a drying step to reduce the MC of the wood or non-wood to less than 10%.
8. A process according to claim 7 wherein the impregnating step (b) is conducted so

- 25 -

as to facilitate chemical loading of 3-FB of from 15% to 30% (based on the dry weight of the wood or non-wood).

9. A process according to claim 7 or 8 wherein the impregnating step (b) is carried out
5 by a vacuum-pressure-vacuum system.

10. A process according to claim 9 wherein the vacuum-pressure-vacuum system is -90 to -95KPa - about 200 to about 1,000 KPa - -90 to -95 KPa.

10 11. A process according to any one of claims 1 to 10 wherein step c) involves hot pressing.

12. A process according to any one of claims 1 to 10 wherein the wood or non-wood subjected to step c) has a pH of about 2-5, preferably about 2.
15

13. A process according to claim 11 or 12 wherein the hot pressing step is conducted at a pressure of from about 5-30 MPa and at a temperature of from about 170-200°C, and preferably for about 5-15 minutes.

20 14. A process according to any one of claims 1 to 13 in which the wood or non-wood product is softwood.

15. A process according to any one of claims 1 to 13 in which the wood or non-wood product is hardwood.
25


16. A process according to any one of claims 1 to 13 in which the wood or non-wood product is bamboo.

17. A process according to any one of claims 1 to 13 in which the wood or non-wood
30 product is Kraft paper.


- 26 -

18. A chemically modified wood product derived from softwood which has been produced by the polymerisation of 3-furfuryl borate within said softwood.
19. A chemically modified non-wood product derived from Kraft paper which has been
5 produced by the polymerisation of 3-furfuryl borate within said Kraft paper.
20. A chemically modified wood or non-wood product which has been impregnated with 3-furfuryl borate.
- 10 21. 3-furfuryl borate for use as a wood or non-wood modifier.
22. A method of preparing 3-furfuryl borate ('3-FB') comprising the steps of:
(i) reacting furfuryl alcohol ('2-FM') or 3-furfuryl methanol ('3-FM') with boric acid; and
15 (ii) removing water produced during the reaction of (i).
23. A process for chemically modifying Kraft paper comprising:
(i) drying the Kraft paper to reduce its moisture content;
(ii) impregnating said Kraft paper with an aqueous composition comprising an acid
20 polymerisation catalyst;
(iii) impregnating the Kraft paper product from step (ii) with 3-FB; and
(iv) subjecting the Kraft paper product from (iii) for a time and under conditions to affect polymerisation of the 3-FB.
- 25 24. A process according to claim 23 including the additional step of:
(v) laminating the Kraft paper product from step (iv) with an epoxy resin.

- 1/5 -

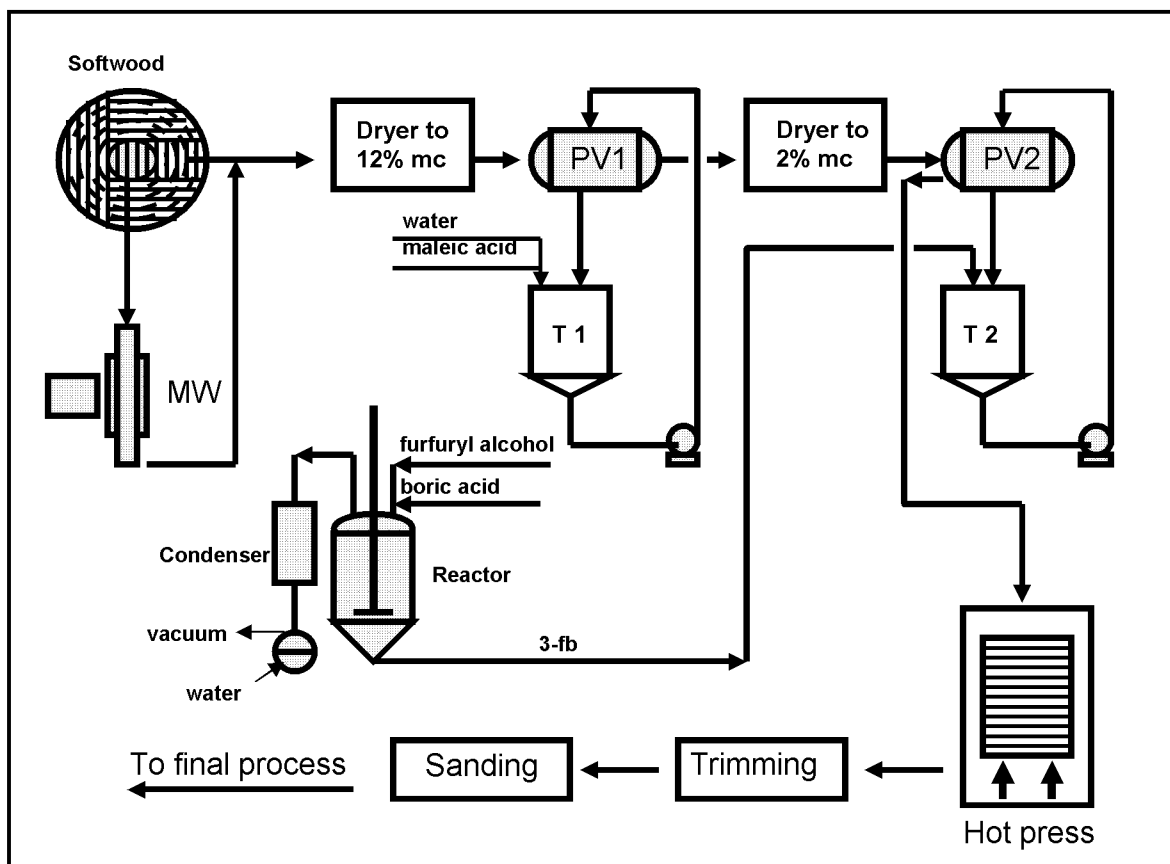**Figure 1**

- 2/5 -

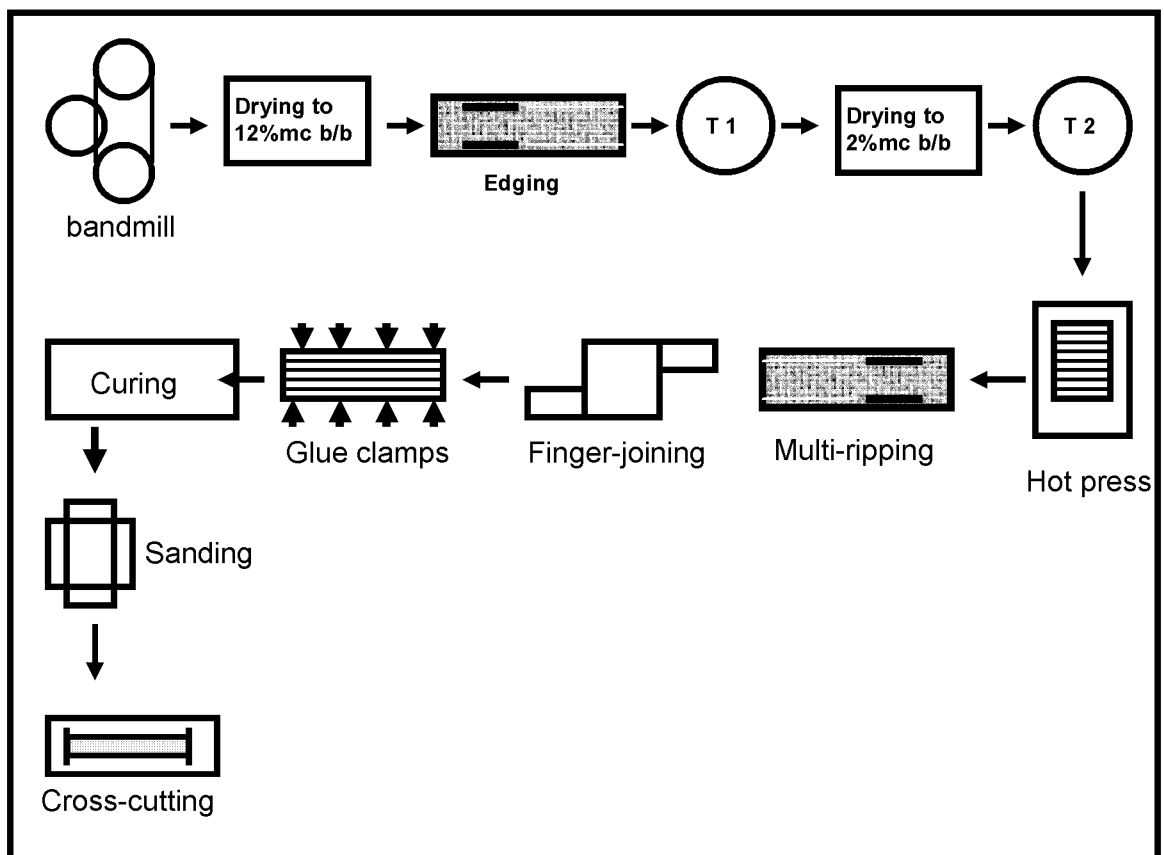**Figure 2**

- 3/5 -

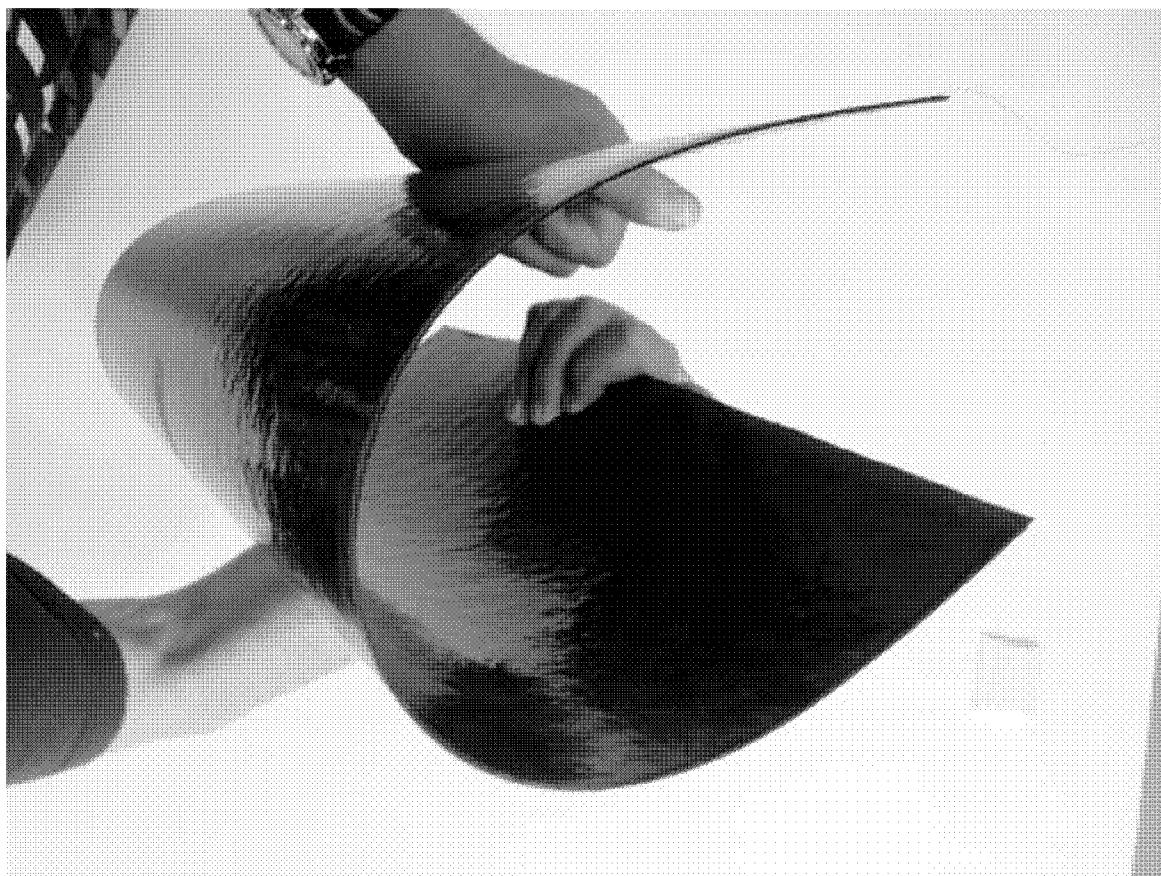


Figure 3

- 4/5 -

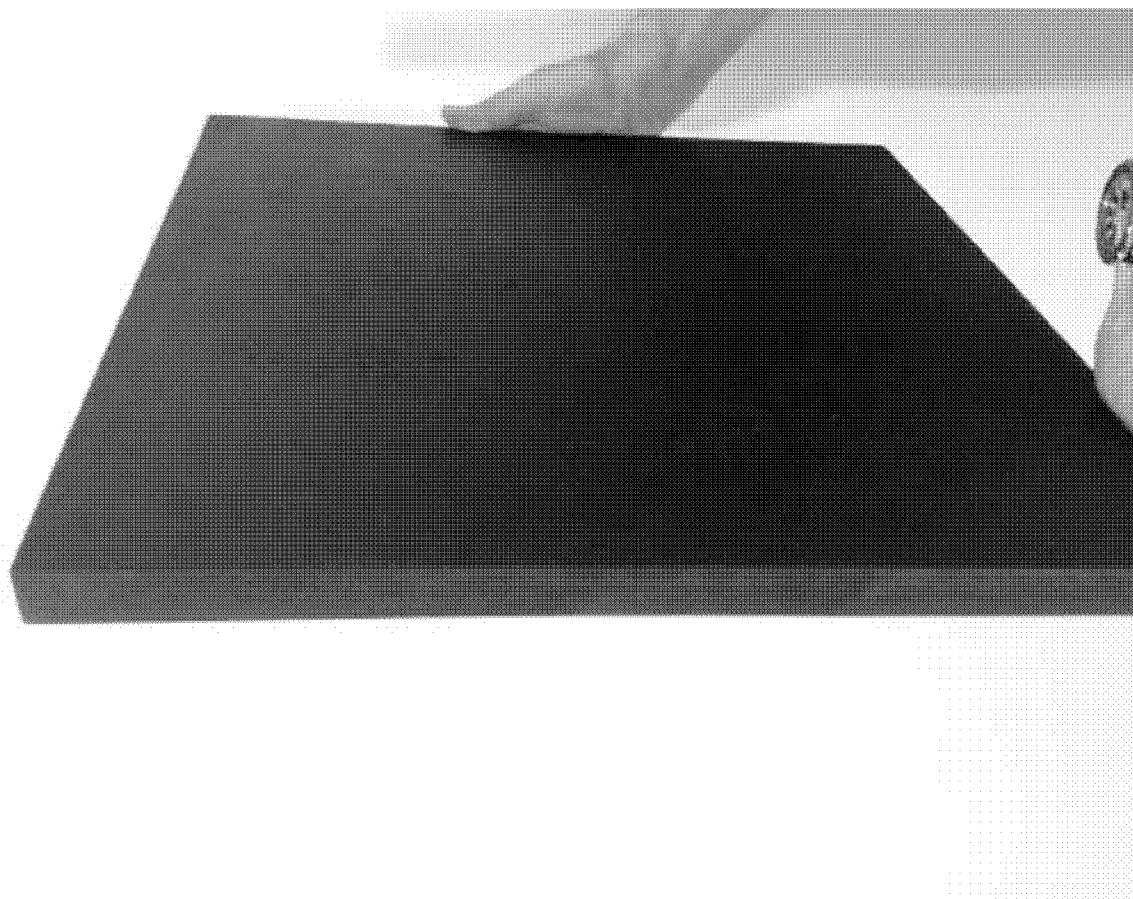


Figure 4

- 5/5 -

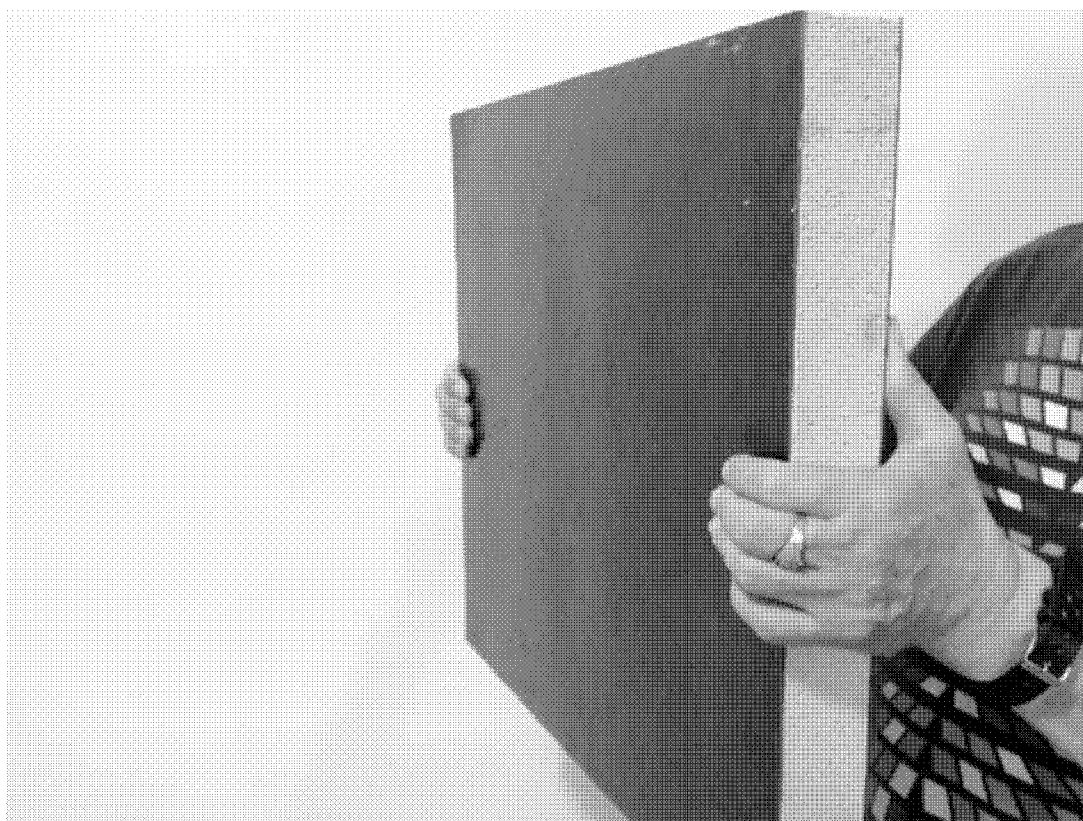


Figure 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/075713

A. CLASSIFICATION OF SUBJECT MATTER

B27K 3/34(2006.01)i; B27K 7/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B27K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI, CA, CNKI, CNPAT: wood, modif+, furfuryl 1w borate, boric 1w acid, catalyst

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 101913181 A (YIN KAN) 15 December 2010 (2010-12-15) paragraphs 4-46	1-24
A	NZ 538393 A (WOOD POLYMER TECHNOLOGIES ASA) 27 October 2006 (2006-10-27) page 1 line 37 to page 5 line 30	1-24
A	WO 2007147804 A1 (TRANSFURANS CHEMICALS ET AL.) 27 December 2007 (2007-12-27) page 5 line 21 to page 30 line 12, claims 1-24	1-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

01 June 2015

Date of mailing of the international search report

17 June 2015

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088, China

Authorized officer

SHI,Hao

Facsimile No. (86-10)62019451

Telephone No. (86-10)61648393

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/075713

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	101913181	A	15 December 2010	None			
NZ	538393	A	27 October 2006	RU	2005104826	A	10 October 2005
				PL	375048	A1	14 November 2005
				BR	0312905	A	14 June 2005
				PT	1534480	E	13 March 2014
				RU	2309837	C2	10 November 2007
				NO	318253	B1	21 February 2005
				AP	200503217	D0	31 March 2005
				MX	PA05001068	A	08 April 2005
				CA	2493284	C	13 November 2012
				EP	1534480	B1	25 December 2013
				NO	20023592	D0	26 July 2002
				CN	100337800	C	19 September 2007
				ES	2448961	T3	17 March 2014
				AP	2016	A	28 July 2009
				PL	205238	B1	31 March 2010
				AU	2003247295	A1	16 February 2004
				US	2006292366	A1	28 December 2006
				WO	2004011214	A3	10 September 2004
				WO	2004011214	A2	05 February 2004
				CA	2493284	A1	05 February 2004
				EP	1534480	A2	01 June 2005
				US	7858203	B2	28 December 2010
				DK	1534480	T3	24 March 2014
				JP	2005533689	A	10 November 2005
				SI	1534480	T1	30 May 2014
				CN	1671526	A	21 September 2005
				AU	2003247295	B2	09 November 2006
WO	2007147804	A1	27 December 2007	ES	2380062	T3	08 May 2012
				AT	539864	T	15 January 2012
				EP	2035198	A1	18 March 2009
				US	2010062276	A1	11 March 2010
				US	8158206	B2	17 April 2012
				SI	2035198	T1	31 August 2012
				EP	2035198	B1	04 January 2012