
Oct. 26, 1971 G. C. BHAGAT 3,615,128

APPARATUS FOR ELECTROSTATIC PRINTING

Filed July 11, 1968

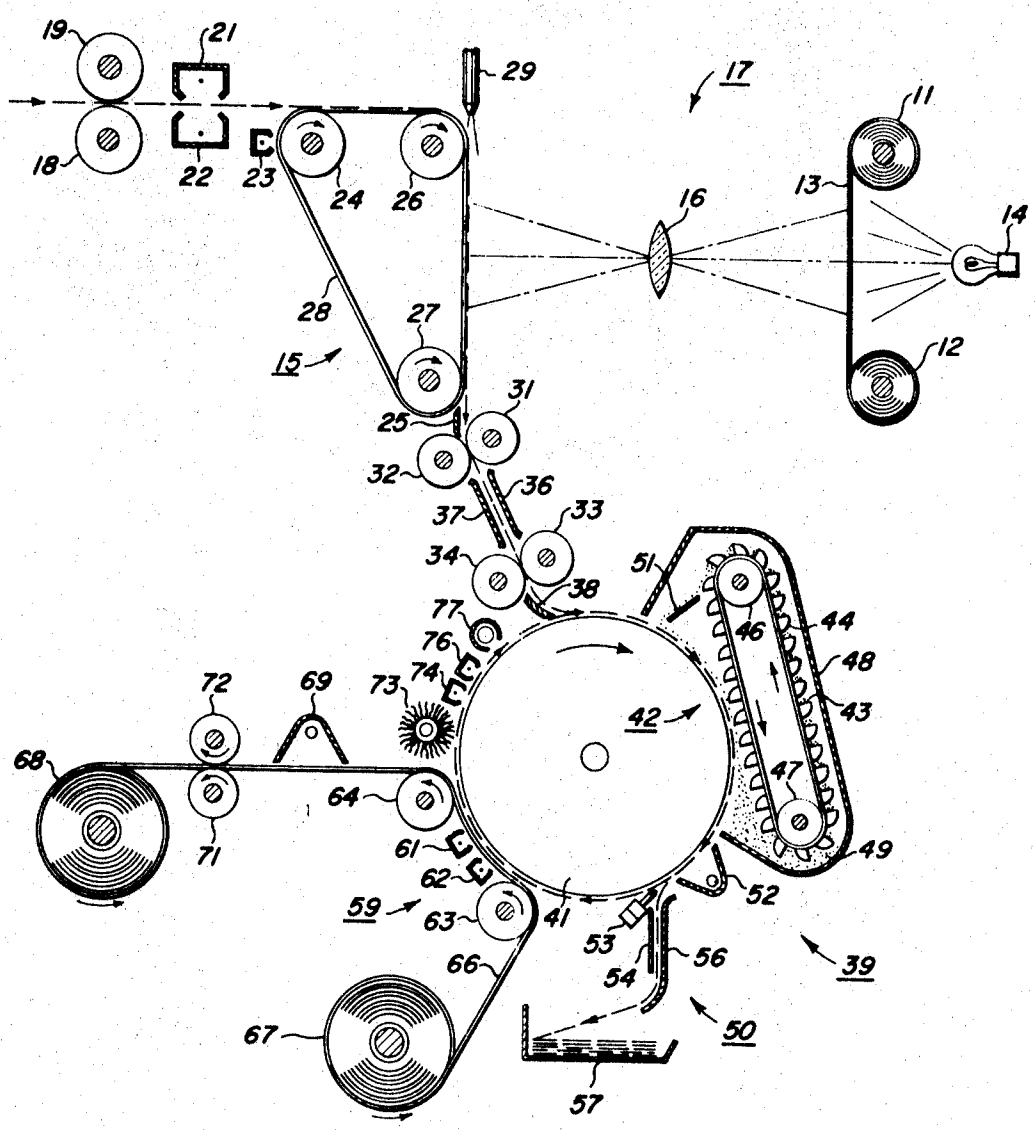

INVENTOR.
GOPAL BHAGAT
BY Laurence A. Gunn
Gunn & Schenker
ATTORNEYS

United States Patent Office 3,615,128
Patented Oct. 26, 1971

3,615,128

APPARATUS FOR ELECTROSTATIC PRINTING

Gopal C. Bhagat, Rochester, N.Y., assignor to
Xerox Corporation, Rochester, N.Y.

Filed July 11, 1968, Ser. No. 744,183
Int. Cl. G03g 15/00
U.S. Cl. 355—3 5 Claims

ABSTRACT OF THE DISCLOSURE

A method and apparatus for printing electrostatically including charging a photosensitive plate and exposing it to an optical pattern to form a latent image; placing the plate on a conveyor, developing the latent image and affixing the developed image to the plate to form a xeroprinting master; and charging the master, illuminating the master, developing the master and transferring from the master to a copy sheet the unfused toner to form a copy of the master on the copy sheet.

This invention relates in general to electrostatic printing, and, in particular, to forming a xeroprinting master and making copies from it.

This invention utilizes any suitable electrostatic process known, such as xerography, electrography, etc.; however, for the purpose of this disclosure the invention will be described in the environment of the xerographic process.

Xerography is essentially a reproduction process which involves the utilization of an electrostatic image created in response to light. To achieve this a layer of photoconductive insulating material is uniformly charged in the dark and then, a light pattern is projected onto it to selectively dissipate the electrostatic charge. The result is to create on or in the photoconductive layer a latent electrostatic charge pattern corresponding to the areas of shadow of the light image projected on the layer. This electrostatic charge pattern is then developed; that is, made visible, by placing a quantity of finely-divided, electrostatically-charged developing particles on the surface of the photoconductive material. The powder image may then be affixed to the photoconductive surface, transferred to a suitable image support member such as paper, or otherwise utilized as is well known to those skilled in the xerographic art. For a more detailed description of the xerographic process, reference is had to U.S. 2,297,691 to C. F. Carlson.

The xerographic steps have been utilized as a continuous printing operation in a process called "xeroprinting." In xeroprinting an image consisting of electroscopic marking powder, or toner, is fused onto a support surface having a photoconductive layer thereby creating a xeroprinting master. The photoconductive layer of the master is first uniformly charged, then exposed to light whereby a latent electrostatic charge pattern is formed on the master conforming to the fused toner image on the master. The latent charge pattern is developed with toner which adheres to the fused toner image. The unfused toner then can be transferred to a copy sheet or web thereby creating a copy of the master.

In general, xeroprinting is used to produce a relatively large number of copies of a single pattern and employs electrically insulating or non-conductive toner to form the permanent image on the master. The conductor, usually as a backing layer, is suitably grounded and may be either rigid or flexible and mounted to be continually moving past suitable stations for developing and transferring. Reference is had to U.S. 2,576,047, to Schaffert for a more complete description of the xeroprinting process.

Since images to be reproduced vary in size, any printing plate should have sufficient length to contain the entire pattern being reproduced, as a minimum. Conventional printing apparatus are limited to a fixed standard size of printing plate, the size of which is determined by experience to be economically optimum for the size of image reproduction most frequently encountered. This obviously restricts the use of the apparatus in that plates of longer than standard size cannot easily be accommodated whereas a standard size plate is required for an image consuming less than, and even substantially less than, the entire plate length. In xeroprinting nearly any size image can be accommodated by the xeroprinting master since the length of the master can be determined by the length of the image.

In the process of xeroprinting, as in any electrostatic printing operation or any other continuous printing operation with a large reproduction volume, considerable length and a correspondingly large volume of support member is consumed. Since it is well known in the printing art that the cost of paper represents a substantial portion of the manufacturing cost of printed copy, it is desirable to keep paper costs to a minimum by minimizing waste. Waste is normally comprised of unused portions of support member, and when a printing plate has considerably more length than image thereon, there occurs, with a continuously advancing paper web, a considerable waste or extensive lengths of blank areas between the printed portions being transferred. In the xeroprinting process, since the length of the plate is determined by the length of the information borne on it, this waste is kept at a minimum.

One of the drawbacks with presnetly-known xeroprinting techniques is that there has not been disclosed a complete system whereby the xeroprinting master is made and then reproduction carried out from it continuously in the same machine. The existing apparatus used in xeroprinting merely contemplates the generation of a xeroprinting master as a separate and distinct step from the reproduction step, or its utilization as a conventional printing plate.

Accordingly, is an object of this invention to improve electrostatic printing apparatus so that formation of a master and reproduction therefrom are carried out sequentially in the same apparatus as a unified process.

It is a further object of the invention to improve xeroprinting apparatus so that formation of the xeroprinting master and reproduction therefrom are carried out continuously in a unified apparatus.

It is a further object of the invention to improve electrostatic printing apparatus so that any size master can be made and then copies made from it sequentially and continuously in the same apparatus.

The apparatus for electrostatic printing according to this invention forms a xeroprinting master as well as makes reproductions of the master in one continuous operation. When the xerographic process is used a photosensitive plate is uniformly charged and then exposed to a light pattern whereby a latent electrostatic image is produced on it. Next, the substrate is automatically transported to and placed on a conveyor which carries the master through a developing station where toner is placed on the surface bearing the latent image in imagewise configuration. The master is then carried through a fuser device which permanently fuses the toner to the photosensitive substrate thereby forming a xeroprinting master. Still continuing to be attached to conveyor, the master is brought through charging, exposing, and developing stations, in that order, which form a pattern of unfused toner on the surface of the xeroprinting master, the unfused toner assuming imagewise configuration.

The master is then carried through a transfer station where the unfused toner is transferred to a web. The conveyor is cycled once to make a complete xeroprinting master, in addition to once for every copy that is desired to be made from the master. When the desired number of copies have been made from the xeroprinting master, the master is removed from the conveyor and placed in a storage tray.

For a better understanding of the invention as well as other objects and further features thereof, reference is had to the following detailed description of the invention to be used in conjunction with the accompanying drawing which is a schematic illustration showing the path of the plate from the point at which it is initially fed into the apparatus to the point at which it is removed from the drum and placed in the storage tray.

In conventional printing processes the formation of a master is carried as one phase and then, quite independently, the making of copies from the master is carried out in a second phase of the operation. This two phase operation has also been customarily used in electrostatic printing. For instance, in conventional xeroprinting a toner pattern conforming to the image to be reproduced is permanently affixed to the photoconductive insulating surface of the plate thereby producing on the surface of the plate a permanent, electrically-insulating, light-insensitive image pattern which is used as a master. After uniformily charging such a master and then flooding it with light, the electrostatic charge is retained only on the light-insensitive image areas, the photoconductive background being discharged by the light. The master is then carried through the remaining xerographic steps in making copies; that is, the plate is charged, exposed to light, and developed with electrostatically-charged marking particles, and the unfused toner particles are transferred in imagewise configuration to a support member or web.

According to the present invention, a plate having a pjhotoconductive layer overlaying a conductive material is uniformly charged and then fed to an exposure station. At the exposure station a light pattern conforming to the pattern to be reproduced is imaged upon the charged photoconductive layer of the substrate. The charge in the light areas of the plate is dissipated while the charge existent in the shadow areas remains substantially unaffected. The plate which are now bears a latent electrostatic charge pattern is placed on a drum with the photoconductive layer facing outwardly from the periphery of the drum.

The exposed plate is rigidly secured to the surface of the drum by a vacuum pressure which is imposed on the plate through a multitude of small holes in the periphery of the drum. As the drum turns clockwise, it carries the plate through a developing station where the latent image on the plate is made visible. The drum continues to rotate carrying the plate through a fusing station where the developed image is fused to the plate and made permanent. At this point, a xeroprinting master has been formed from the plate.

The master remains secured to the drum and as the drum continues to turn, the reproduction phase is commenced. The drum carries the master first through a charging station where the master is uniformly charged and then, through an exposure station where all areas of the photoconductive layer on the master which do not have toner fused to it are discharged. The resulting latent electrostatic image on the master is then developed by passing through the developing station. Finally, as the drum continues to rotate, the unfused toner on the master is transferred to a web, completing the first reproduction cycle.

If more than one copy is desired, the master remains on the drum after the first copy is produced and the charging, exposing, developing and transfer steps are carried out again in the same sequence as described immediately above for each additional copy. When the desired number of copies have been made from the master, the master is removed from the drum and guided to a storage tray.

Referring to the figure, the present invention can be divided into two dependent phases, the phase during which the master is formed, and the phase during which reproductions of the master are made. The master is formed from a plate which is capable of retaining an electrostatic charge pattern. The plate can be made of any suitable material; however, in the system shown in the figure, the plate should be flexible so that it can bend to change direction as it is transported to the drum, and so that it can be readily wrapped around the periphery of the drum. A plate that can be used in the apparatus shown in the figure is a photoconductive insulating layer such as zinc oxide which is coated on a support material such as paper which has been rendered conductive. The paper serves at least two purposes; it provides a physical support for the photoconductive insulating layer and it acts as a ground thereby permitting the photoconductive insulating layer to receive an electrostatic charge prior to exposure to a light pattern. For a more detailed description of this type of plate reference is had to U.S. 3,121,006 and 3,121,007.

The dotted line through the apparatus shown in FIG. 1 indicates the path of travel of the plate throughout the system while the arrowhead denotes its direction of travel. The photo-sensitive layer of the plate can be made of any suitable material such as vitreous selenium, known organic photoconductors or particular photoconductive material such as zinc oxide, cadmium sulfide or lead oxide, dispersed in insulating binders. The conductive backing can be any suitable material having sufficient electrical conductivity for charging and sensitization of the xerographic recording surface and to accommodate the release of electrical charge upon exposure of the recording surface.

Initially, the plate is fed into the apparatus between rollers **18** and **19** which tend to guide it in the direction of corotrons **21** and **22** and eventually onto movable belt **28**. The plate can be any convenient length which is long enough to accommodate the image being reproduced and need not be a standardized length. Hence, if the image to be reproduced were only 2 inches in length rather than the more conventional 11 inches; that is, standard letter length, the resulting xeroprinting master need only be 2 inches long. The two layers of the plate are charged electrostatically to opposite polarities by the corotrons; corotron **21** charges the photoconductive layer of the plate to an appropriate potential while corotron **22** charges the conductive backing layer of the plate in the opposite polarity. It is optional whether the conductive layer is charged at all, but it is preferable to charge it in order that the difference in potential between the charge held on the photoconductive layer and the conductive layer is sufficiently great to afford good development subsequent to exposure. However, if the conductive layer of the plate were kept at ground potential, selective charge dissipation of the photoconductive material would still occur.

After passing through rollers **18** and **19** and corotrons **21** and **22**, the plate is placed on belt **28** with its charged photoconductive layer facing out from the belt. Belt **28** is supported and driven by three rollers, **24**, **26** and **27**. The belt itself can be made of any suitable material which will convey the plate from the area where it is fed between the corotrons mentioned above, through the area where it is exposed to an optical pattern as projector **17**, and then, onto drum **41**. If the plate is a flexible material, during its travel in the path shown in the figure it can easily turn approximately 90° around roller **26**. The material of which belt **28** is made is desirably one which can hold an electrostatic charge, such as a di-electric belt. If such a belt is used, an electrostatic charge can be placed on its outer surface by corotron **23**. This electrostatic charge should be of such polarity and intensity that the conveyor becomes attractive to the backing material of the plate causing the plate to adhere to it

and assume the path of the conveyor. Corotron **23** can place an electrostatic charge on conveyor **28**.

As the plate is carried by belt **28**, it turns about roller **26** in order to pass through the optical pattern generated by projector **17**. The electrostatic attraction between the plate and the outer surface of the belt is an aid to keeping the plate on the belt while passing around roller **26**. In order to further assure that the plate lies flatly on the belt at all times as it changes direction about roller **26**, a jet of air created by a source of compressed air (not shown) and nozzle **29** generates an outside coercive force on the plate holding it in firm contact with the belt. The precise configuration of the belt assembly is arbitrary to the invention, and any suitable belt system can be used which allows the plate to be charged, exposed and then, placed on drum **41**, in that sequence. The configuration of the belt assembly as shown in the figure is chosen because of its compact design.

After passing through the vicinity of roller **26**, the plate is carried adjacent projector **17** by the belt. Projector **17** can be any suitable device which forms an optical image from an original such as a transparency projector, scanning device for scanning opaque and/or translucent originals, etc. In the figure light source **14** illuminates transparency **13**. The transparency is fed through the path of light from roll **12**, and then, rewound on roll **11** after the plate has been exposed. The optical pattern formed by the transparency and light source passes through lens **16** and onto the photoconductive layer of the plate. The plate can be either stopped for full frame exposure or moving in synchronism with the transparency during exposure. If the plate is not moving during exposure, light source **14** can be flashed to produce quick exposure, as contemplated in the figure. On the other hand, the projector could contain an optical scanning device (not shown) which would permit the plate to continue to move during exposure as long as the speed of the plate and movement of the scanning device are synchronized. The choice of projector device is also arbitrary in the present invention.

After the plate has been exposed, it travels with the belt to the vicinity of roller **27**. At this point the plate is separated from the belt and is directed onto drum **41** by an assembly of rollers and guides. The leading edge of the plate is first brought between rollers **31** and **32** and then, through guides **36** and **37**. Upon emerging from the guides, the leading edge of the plate passes between rollers **33** and **34** and then, is placed upon drum **41** in such a manner that the exposed surface of the plate faces outwardly from the drum. This is assured by the contour of guide **38** which directs the leading edge of the plate to the right and clockwise onto the drum, as can be seen in the figure.

The charge placed on belt **28** by corotron **23** may tend to keep the plate fastened to the outer surface of the belt after the plate has reached the vicinity of roller **27** and is about to be fed through rollers **21** and **32**. Separation of the plate from the belt is enhanced at this point by placing a device adjacent the conveyor which removes or neutralizes the electrostatic charge on the belt put there by corotron **23**. Such a device can be attached to roller **27**. In addition, mechanical fingers (not shown) can be placed between belt **28** and rollers **31** and **32** which mechanically separate the plate from the belt and guide it between the rollers and onto the drum.

After the plate has been guided onto drum **41**, the combined action of any residue electrostatic charge on the conductive layer of the plate plus small holes (not shown) in the drum surface through which a vacuum is imposed on the plate causes the plate to remain on the drum. The plate remains in a stationary position relative to the drum as the drum cycles in the clockwise direction, as shown by the arrow. It is pointed out that drum **41** is merely indicative of a transport device that can be used. The configuration of the drum in serving as a transport device is specially desirable because of its compactness and the relative ease of placing various pieces of apparatus adjacent it in an orderly fashion.

Once the plate is located on the periphery of the drum, various operations are performed on the plate which make it into a xeroprinting master during the first cycle of the drum. As shown in the figure, developing station **42** utilizes conventional cascade development wherein a two-component developer mixture comprising insulating toner particles and carrier beads are cascaded over the plate causing the toner particles to be stripped from the carrier beads and adhere to the surface of the photoconductive layer in imagewise configuration. The developer mixture rolls around the drum generally in the direction of travel of the surface of the drum and the stripped carrier beads fall back into the bottom of the developing mechanism to be retoned. The developing station includes housing **48** surrounding conveyor **43**. The conveyor is supported and driven by pulleys **46** and **47**, and contains buckets **44** which carry the developer material from the bottom of the housing to a point where it is dumped onto the plate as the plate travels adjacent the developing station. Deflector **51** is intended to direct the flow of developer onto the plate at a point where efficient development is assured. Conveyor **43** rotates in the counterclockwise direction in order that the buckets are filled with developer **49** at the bottom of the housing and carry it to the top of the housing where it is dumped onto the plate. For a more complete description of cascade development, see U.S. 2,705,199 to H. E. Clark.

Next, the plate is placed adjacent fuser **52** by the drum which fuses and makes permanent the toner image on the plate and thereby completes the phase of the invention which creates the xeroprinting master. At this point, the plate has been completely transformed into a xeroprinting master and all subsequent operations on it are concerned with making copies from it. The making of copies from the master actually begins when the latent image is reformed on the master; e.g., when the master passes through a reforming station including corotrons **74** and **76** and light source **77**. Between the time the master passes fuser **52** and reaches corotrons **74** and **76** during its first cycle, no operation is performed on the master although it passes removal device **50**, transfer assembly **59** and cleaning brush **73**.

During the image reforming step, a latent electrostatic charge pattern is reformed on the master which conforms to the original latent image formed on the plate by projector **17**. The reforming step can be accomplished by any known method such as by employing a charging device in conjunction with a source of illumination as shown in the figure. The charging units, corotrons **74** and **76**, uniformly charge the photoconductive layer of the master. Although charging can be accomplished with one charging device, two such devices are used to assure that complete charging occurs, particularly when the drum is rotated at high speeds.

After being charged the master passes beneath light source **77** which discharges those areas of the photoconductive surface which are not covered with fused toner. Hence, the charge pattern left on the photo conductive layer after it passes beneath light source **77** is exactly identical to that which was exposed upon the plate by projector **17**. This phenomenon is due to the fact that the insulating toner fused to the photoconductive surface of the master shields that area of the photoconductive surface lying beneath it from the radiation generated by light **77** preventing dissipation of the charge in these areas. Therefore, the toned areas of the photoconductive layer retain the charge generated by corotrons **74** and **76** while the charge on all other areas of the photoconductive layer is dissipated. After exposure, drum **41** continues to rotate carrying the master towards developing station **42**. At the developing station the latent image on the photoconductive layer is developed in a manner identical to that de-

scribed above in conjunction with the original development of the plate to make the xeroprinting master. This operation creates a loose, or impermanent, image on the master over the fused toner image already on the master. The drum continues to rotate carrying the master adjacent fuser **52** and removal mechanism **50**, and onto the transfer station **59**. During the reproduction cycle the fuser and removal mechanism remain inoperative.

Transfer assembly **59** includes reel **67** which feeds web **66** towards the drum and reel **68** which takes up the web after the toner image has been transferred and fused to it. The web fed from reel **67** around roller **63** and between the xeroprinting master bearing the unfused toner and corotrons **61** and **62** which effect the transfer of the unfused toner from the master to the web. The web then passes around roller **64** and under fuser **69** where the toner configuration transferred to the web is fused and made permanent. The web moves between support and guide rollers **71** and **72**, and then onto reel **68** where it is stored.

The xeroprinting master which bears the impermanent image comes into contact with the web at the transfer station. Corotrons **61** and **62** place a charge on the web which is of the same polarity as the electrostatic charge pattern on the photoconductive layer of the master and which is opposite in polarity to the charge on the unfused toner particles on the master. The effect of these corotrons is to transfer the unfused toner from the master to the web. After transfer, the xeroprinting master is carried by the drum adjacent cleaning brush **73** where any residue toner not transferred to the web is removed from the master. This cleaning brush is optional in the system, however, it has been found to be helpful in the elimination of excess background in succeeding cycles. The transfer assembly can be adapted to accommodate individual sheets and any other type of support member as well as a continuous web.

After transfer the first reproduction cycle has been completed and if subsequent copies are desired, the drum carries the master through as many cycles as copies desired; in other words, the drum recycles so that the master can be charged, exposed and developed and the unfused toner transferred to the web for each copy desired. When all copies have been made and it is desired that the master be removed from the system in preparation for the making of another master and subsequent reproductions of it, the leading edge of the master is carried to the vicinity of removal mechanism **50** after being cleaned. During the time the master is carried to the removal mechanism, it passes corotrons **74** and **76**, light source **77**, development station **42** and fuser **51**, but, these elements remain inoperative during this time.

Removal mechanism **50** contains puffer **53** which lifts the leading edge of the xeroprinting master from the drum as it approaches the removal area and directs it towards guides **54** and **56**. The guides, in turn, direct the leading edge of the master onto storage tray **57** which holds the used xeroprinting masters until they are removed by the operator. For a more detailed description of the operation of the puffer, reference is had to U.S. 3,062,536. At the time that the leading edge of the xeroprinting master is lifted from the drum by puffer **53**, the vacuum acting through the drum on the master is released to allow the master the freedom to be directed into the storage tray.

The electro-mechanical devices which control the operations of the various elements in the invention are intended to be any suitable devices which allow the machine to operate as described above. The control devices should permit corotrons **21** and **22** to remain in operation only when a plate is located between them, whereas the motor (not shown) which drives the belt as well as the power source for corotron **23** can be operated continuously as long as the machine is in operation. The projector is activated at a time when a plate is aligned in the path of the optical pattern projected towards belt **28**, and if the plate moves while being exposed, the movement of the transparency must be synchronized with the movement of the plate. It is optional whether or not the rotation of the drum be stopped during all times that the machine is in operation for the purpose of simplicity.

The developing station, fusing mechanism **39**, and removal mechanism **50**, all of which are located around the periphery of the drum, are operated intermittently depending on the position of the master. The developing station is operated only during the time the plate is adjacent it preferably since, otherwise, the drum surface would pick up toner particles and impair contact between the plate and drum surface in succeeding runs. On the other hand, fusing mechanism **39** must remain inoperative except during the time when any plate is carried adjacent it during its first cycle with the drum, i.e., the cycle making it a master. Similarly, removal device **50** must remain inoperative except when the leading edge of the master approaches puffer **53** after its last reproduction cycle is completed.

It is generally immaterial whether transfer station **59**, brush **73**, corotrons **74** and **76**, light source **77** remain operative continuously while the machine is operating or only during the time when they perform a function in the cycle.

Since many of the elements of the invention are required to operate intermittently, it is necessary to have some provision in the control mechanism to start and stop their operation at the correct moment. One method of accomplishing such control is by inserting recognition devices, such as a photoelectric cell, at strategic points along the path of the plate. The devices would recognize the leading edge of the plate as it passed and activate the proper circuit for the next operation. Many other methods could also be used to control the various operations, such as timing belts, trip switches, etc.

In addition to the apparatus and method outlined above many other modifications and/or additions to this invention will be readily apparent to those skilled in the art upon reading this disclosure, and these are intended to be encompassed within the scope of the invention.

What is claimed is:

1. An apparatus for making a selected number of copies of an original with a plate having a surface adapted to retain an electrostatic charge pattern thereon by forming a master from the plate and making copies from it comprising:

(a) means to form on the surface of the plate an electrostatic latent charge pattern conforming to the original;

(b) a movable conveyor adjacent the means to form the charge pattern having means to hold the plate on it;

(c) means to move the plate from the means to form the charge pattern onto the conveyor so that the surface of the plate bearing the charge pattern faces away from the conveyor;

(d) means to move the conveyor so that the plate cycles through a group of stations including a developing station for depositing insulating toner on the plate in conformance with the charge pattern, a fixing station for affixing to the plate toner which has been deposited on the plate, a transfer station for placing support material in contact with the plate and transfer unfused toner from the plate to the support material, and a reforming station for reforming the electrostatic charge pattern on the surface of the plate, said means moving the plate through the group of stations a predetermined number of cycles, said predetermined number of cycles being equal to the selected number of copies to be made plus one with the initial cycle of the plate producing the master and each additional cycle making copies of the master; and

(f) a control means for activating the developing and fixing stations during the first cycle of the plate to develop the latent charge pattern on the plate with insulating toner and to affix the toner to the plate to form the master, and for activating the reforming, developing, and transfer station during additional cycles of the plate to reform the electrostatic latent charge pattern on the plate, to develop the latent charge pattern to produce an unfused toner pattern conforming to the latent charge pattern and to transfer the unfused toner from the plate to the support material.

2. An apparatus for making a selected number of copies of an original with a xerographic plate having a surface adapted to retain an electrostatic charge pattern thereon by forming a xeroprinting master from the plate and making copies from it comprising:

(a) means to uniformly charge the photosensitive surface of the plate;

(b) means to expose on the charged photosensitive surface of the plate an optical pattern conforming to the original located adjacent the means to charge thereby forming an electrostatic latent charge pattern conforming to the original;

(c) means to move the plate from the means to charge to the means to expose;

(d) a movable conveyor adjacent the means to expose having means to hold the plate on it;

(e) means to move the plate from the means to expose onto the conveyor so that the surface of the plate bearing the latent charge pattern faces away from the conveyor;

(f) means to move the conveyor so that the plate cycles through a group of stations including a developing station for depositing insulating toner on the plate in conformance with the charge pattern, a fixing station for affixing to the plate toner which has been deposited on the plate, a transfer station for placing support material in contact with the plate and transfer unfused toner from the plate to the support material, a charging station for placing a uniform electrostatic charge on the photosensitive surface of the plate, and an illuminating station for illuminating the photosensitive surface of the plate, said means moving the plate through the group of stations a predetermined number of cycles, said predetermined number of cycles being equal to the selected number of copies to be made plus one with the initial cycle of the plate producing the master and each additional cycle making copies of the master; and

(g) a control means for activating the developing and fixing stations during the first cycle of the plate to develop the latent charge pattern on the plate with insulating toner and to affix the toner to the plate to form the master, and to activate the charging, illuminating, developing and transfer stations during additional cycles of the plate to recharge the photosensitive surface of the plate, to illuminate the photosensitive surface of the plate to dissipate the charge in all areas of the plate except the areas having toner affixed to them and reform the electrostatic latent charge pattern on the plate, to develop the latent charge pattern on the plate with an unfused toner pattern conforming to the patent charge pattern and to transfer the unfused toner from the plate to the support material.

3. The apparatus in claim 2 wherein the plate is a flexible plate and the conveyor is a rotatable drum having a circumferential length which is at least of such length that the plate can be wrapped around it without overlapping itself.

4. The apparatus in claim 3 wherein the plate is a conductive paper having a layer of photoconductive insulating material coated upon it.

5. The apparatus in claim 3 further including means to remove the plate from the drum located adjacent the drum.

References Cited

UNITED STATES PATENTS

2,357,809	9/1944	Carlson	355—3
2,576,047	11/1951	Schaffert	355—17 X
3,013,878	12/1961	Dessauer	355—17 X
3,480,361	11/1969	Tatsumi Doi et al.	355—16

FOREIGN PATENTS

154,222	5/1951	Australia	355—14

SAMUEL S. MATTHEWS, Primary Examiner

R. P. GREINER, Assistant Examiner

U.S. Cl. X.R.

355—14