

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 November 2003 (27.11.2003)

PCT

(10) International Publication Number  
WO 03/098071 A1

(51) International Patent Classification<sup>7</sup>:

F16H 7/12

(74) Agent: THURNAU, Jeffrey; The Gates Corporation, Mail Stop: 31-4-1-A3, 900 S. Broadway, Denver, CO 80209 (US).

(21) International Application Number: PCT/US03/12374

(22) International Filing Date: 18 April 2003 (18.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/147,183 15 May 2002 (15.05.2002) US

(71) Applicant: THE GATES CORPORATION [US/US];  
900 South Broadway, Denver, CO 80209 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DAMPING MECHANISM

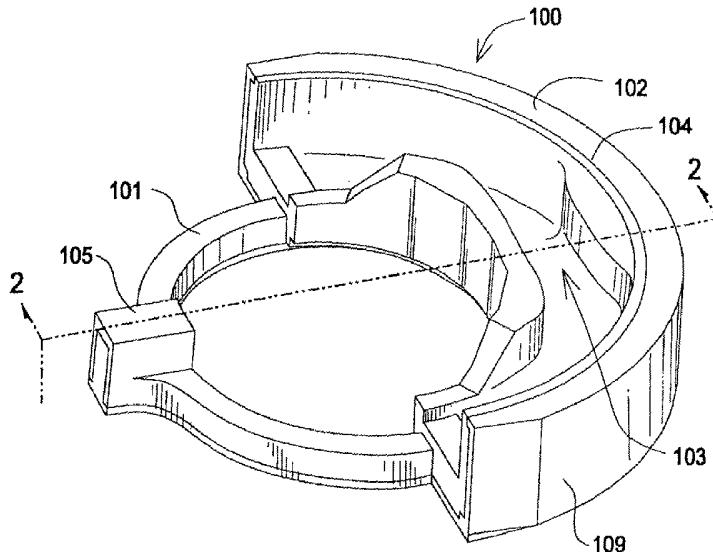

WO 03/098071 A1

(57) Abstract: An asymmetric damping mechanism (100) for use in a belt tensioner. The damping mechanism comprises two parts (210, 220) having substantially similar arcuate shapes for engaging a tensioner. The first part (210) is in contact with the second part (220) at a pivotable point of contact (216). The point of contact (216) position is determined according to the desired asymmetric damping factor. The first part (210) is also in contact with a spring. The second part (220) is in contact with a tensioner arm. The damping mechanism also comprises two damping shoes, each having a damping band (213, 215). The damping band is joined to the damping shoe by a plurality of vertical grooves on the damping shoe cooperating with a plurality of grooves on the damping band. The damping mechanism has an asymmetric damping factor in the range of approximately 1.5 to 5.

Title

Damping Mechanism

5

Field of the Invention

The invention relates to a damping mechanism, and more particularly, to an asymmetric damping mechanism for a tensioner.

10

Background of the Invention

Belt tensioners are used to impart a load on a belt. Typically the belt is used in an engine application for driving various accessories associated with the engine. For example, an air conditioning compressor and alternator are 15 two of the accessories that may be driven by a belt drive system.

A belt tensioner comprises a pulley journaled to an arm. A spring is connected between the arm and a base. The spring may also engage a damping mechanism. The damping 20 mechanism comprises frictional surfaces in contact with each other. The damping mechanism damps an oscillatory movement of the arm caused by operation of the belt drive. This in turn enhances a belt life expectancy.

Representative of the art is U.S. patent 5,632,697 to 25 Serkh (1997) which discloses a spring activated damping mechanism which provide a normal force greater than a spring force applied to a brake shoe that engages a cylindrical member.

Reference is also made to co-pending U.S. patent 30 application serial number 09/861,338 filed 18 May 2001 which discloses a tensioner having a damping mechanism.

What is needed is a damping mechanism having an asymmetric damping factor in the range of approximately 1.5 to 5.0. What is needed is a tensioner having a damping mechanism comprising two members having a pivotal connection. The present invention meets these needs.

Summary of the Invention

The primary aspect of the present invention is to provide a damping mechanism having an asymmetric damping factor in the range of 1.5 to 5.0.

Another aspect of the invention is to provide a tensioner having a damping mechanism comprising two members having a pivotal connection.

Other aspects of the invention will be pointed out or made apparent by the following description of the invention and the accompanying drawings.

Brief Description of the Drawings

Fig. 1 is a top perspective view of an inventive damping mechanism.

Fig. 2 is a cross-section view of an inventive damping mechanism at line 2-2 in Fig. 1.

Fig. 3 is a top perspective view of an inventive damping mechanism.

Fig. 4 is a cross-section view of an inventive damping mechanism at line 4-4 in Fig. 3.

Fig. 5 is a top perspective view of a locking mechanism on the damping shoe of an inventive damping mechanism.

Fig. 6 is a top perspective view of a locking mechanism on the damping band of an inventive damping mechanism.

Fig. 7 is a top perspective view of a prior art damping mechanism.

Fig. 8 is a top perspective view of a prior art damping mechanism damping shoe.

Fig. 9 is a top perspective view of a prior art damping mechanism damping band.

5 Fig. 10 is a diagram of forces acting on a damping mechanism.

Fig. 11 is a cross-sectional view of forces acting on a tensioner at line 11-11 in Fig. 12.

Fig. 12 is a plan view of forces acting on a tensioner.

10 Fig. 13 is a diagram of forces acting on a damping mechanism.

Fig. 14 is a cross-sectional view of forces acting on a tensioner at line 14-14 in Fig. 15.

Fig. 15 is a plan view of forces acting on a tensioner.

15 Fig. 16 is an exploded view of a tensioner having a damping mechanism.

Fig. 17 is an exploded view of a tensioner having a damping mechanism.

20

#### Description of the Invention

Fig. 1 is a top perspective view of an inventive damping mechanism. The inventive damping mechanism is utilized in a belt tensioner, see Fig. 17. The belt tensioner engages a belt through a pulley journaled to a lever arm. The tensioner is used to apply a preload to the belt and to damp oscillatory movements of the belt.

The damping mechanism damps oscillatory movements of a tensioner lever arm. The lever arm generally experiences a bi-directional or oscillatory motion caused by changes in 30 the operating status of a belt drive, for example by load changes. Damping is necessary to remove energy from the belt system, thereby ensuring proper operation of the

tensioner in order to maximize belt life and operational efficiency.

More particularly, an inventive damping mechanism is shown in Fig. 1. Damping mechanism 100 comprises damping band 102. Damping band 102 is connected to an outer arcuate surface 104 of damping shoe 101. Spring, or biasing member, receiving portion 103 comprises a slot in damping shoe 101. Receiving portion 103 receives an end tang (not shown, see 500 in Fig. 15) of a coil spring. Surface 105 engages a coil of a spring to provide support during operation.

Damping band 102 comprises a lubricated plastic such as nylon, PA and PPA, and their equivalents.

Fig. 2 is a cross-section view of an inventive damping mechanism at line 2-2 in Fig. 1. Ring cut 106 extends about 15 an outer perimeter of outer arcuate surface 104. Rim or protrusion 107 extends about a partial circumference of damping shoe 101. Ring cut 106 in combination with protrusion 107 serve to mechanically attach damping band 102 to damping shoe 101.

Fig. 3 is a top perspective view of an alternate damping mechanism. Inventive damping mechanism 200 comprises a first arcuate member 210 and a second arcuate member 220. First arcuate member 210 has a spring receiving portion 211 into which a spring end tang may be inserted, 25 see Fig. 12. A wall of the spring receiving portion has maximum thickness 211a at the spring contact area. Wall 211a may be tapered from the contact area in one direction or in both directions as it extends in both directions. By comparison, a like wall of the previous art has uniform 30 thickness.

First arcuate member 210 comprises a damping band 213 attached to a damping shoe 212. Second arcuate member 220 comprises a damping band 215 attached to a damping shoe 214.

First arcuate member 210 is in pivotal contact with the 5 second arcuate member 220 at a point of contact 216. Point of contact 216 comprises end 228 of damping shoe 212 and end 219 of damping shoe 214. Point of contact 216 may vary from a minimum radius to a maximum radius across a width W of each damping shoe with respect to a lever arm axis of 10 rotation R-R, see Fig. 11.

In order to achieve the desired asymmetric damping factor, point of contact 216 is located at a predetermined radial distance from a lever arm axis of rotation R-R. A minimum radius location for point of contact 216, shown in 15 Fig. 3, results in the highest asymmetric damping factor for the damping mechanism in operation in a tensioner. Point of contact 216 may be disposed at an outer radius 288 which produces a reduced asymmetric damping factor as compared to the foregoing minimum radius location.

20 In an alternate arrangement, end 218 of first arcuate member 210 is in contact with the second arcuate member end 217. In this alternate embodiment, a spring (not shown) having a coil direction opposite that used for the embodiment in Fig. 3 is used. Therefore, by switching the 25 point of contact from one end of the first arcuate member and second arcuate member to another end, either a left hand or right hand spring can be used.

Damping band 213, 215 are made of frictional material such as plastics, phenolics and metallics. A working surface 30 230, 231 of damping band 213, 215 respectively is slideably engaged under pressure with a tensioner base or arm by operation of a spring, see Fig. 12 and Fig. 15. A

frictional damping force is generated when the damping band slides on the base or arm.

Damping shoes 212, 213 are each made of structural material such as steel, molded plastic or equivalents thereof. Each damping shoe can be manufactured by utilizing a powder metal process, a die cast process, injection molding or similar processes. Materials that can be used include steel, aluminum (for low load parts), thermoplastics with various fillers, and equivalents thereof.

Damping band 215 of the second arcuate member has a material thickness less than the damping band 213 of the second portion. This has two advantages, first, increased spring hook-up size can be realized therefore a larger spring can be used. Second, due to the fact of that the second portion 220 of the damping mechanism has higher load than the first portion 210, a reduced thickness of the first damping band 213 will equalize durability life of both parts.

Fig. 4 is a cross-section view of an alternate damping mechanism at line 4-4 in Fig. 3. Ring cut 221 extends about an outer perimeter of damping shoe 212. Protrusion 222 extends about a partial circumference of damping shoe 212. Ring cut 223 extends about an outer perimeter of damping shoe 214. Protrusion 224 extends about a partial circumference of damping shoe 214. Each ring cut 221, 223 in combination with each protrusion 222, 224 serve to mechanically attached each damping band 213, 215 to each damping shoe 212, 214 respectively.

Fig. 5 is a top perspective view of a locking mechanism on the damping shoe of an inventive damping mechanism. Locking mechanism 300 joins damping shoe 101 to damping band 102, see Fig. 6. Locking mechanism 300 comprises a

plurality of vertical grooves 110 on an arcuate outer engaging surface 111 of damping shoe 101. Ring cut 112 is included to a top edge of the arcuate outer surface 111 to enhance the interconnection of the damping band 102 to the damping shoe 101. Accordingly, lip portion 227 on damping band 102 engages over ring cut 112. The disclosed multiple groove locking mechanism provides an improved, strong and uniform connection between the damping shoe and damping band. The connection distributes a frictional load imparted to the damping band 102 during operation, thereby extending an operational life over the prior art.

Fig. 6 is a top perspective view of a locking mechanism on the damping band of an inventive damping mechanism. The damping band portion of locking mechanism 300 comprises a plurality of spaced vertical ribs 120 on an arcuate inner engaging surface 121 of damping band 102. Ribs 120 of damping band 102 cooperatively engage grooves 110 of damping shoe 101. Protrusions 228 extend from a lower portion 229 of damping band 102. Protrusions 228 engage cooperating recesses or dimples 231 in a base of damping shoe 101 to further affix damping band 102.

The inventive locking mechanism significantly reduces weakening of the damping shoe, therefore, the inventive damping mechanism is much stronger than those in prior art. Loading conditions on the damping shoe/damping band are also much improved due to an improved load distribution across the damping shoe realized by the force distributive nature of the locking mechanism.

Fig. 7 is a top perspective view of a prior art damping mechanism. Prior art damping band DB is connected to prior art damping shoe DS. Tabs T mechanically connect the

damping band DB, see Fig. 9, to the damping shoe DS, see Fig. 8.

Fig. 8 is a top perspective view of a prior art damping mechanism damping shoe. Damping shoe DS comprises slots S. 5 Slots S receive tabs T in order to mechanically connect damping band DB to damping shoe DS, see Fig. 9.

Fig. 9 is a top perspective view of a prior art damping mechanism damping band. Damping band DB comprises tabs T. Each of tabs T mechanically cooperate with corresponding 10 slots S in order to connect damping band DB to damping shoe DS.

Fig. 10 is a diagram of forces acting on a damping mechanism. The damping mechanism depicted is the embodiment described in Fig. 3 and Fig. 4. Forces F1 are spring 15 contact reaction forces caused by contact of spring end 500 with the spring receiving portion 211. Spring end 500 contacts the spring receiving portion 211 at two points, creating a pair of reaction forces F1. F2 is a normal reaction force on the damping surface 230. F3 is a tangent 20 friction force on the damping surface 230. F8 is a normal reaction force on the damping surface 231. F9 is a tangent friction force on the damping surface 231. F4 is the normal reaction force on damping mechanism arcuate member 220 imparted by a contact of damping shoe 214 with a lever arm 25 1030, see Fig. 16.

The asymmetric damping factor is a function of a difference in frictional forces F3 and F9 for a movement of the lever arm 1030. In operation, a normal reaction force F8 on damping surface 231 is larger than normal reaction 30 force F2 on damping surface 230. More particularly, when the lever arm 1030 moves in the +A direction the vectors for the friction forces, F3 and F9 operate as shown in Fig. 10.

As the lever arm moves in a direction -A, friction force vectors F3 and F9 reverse direction. The change of direction of frictional force vectors F3 and F9 causes a resultant force on each damping surface 230, 231 to change.

5 As a result, when lever arm moves in the -A direction, a normal reaction force on damping mechanism F4 is larger than when the lever arm moves in direction +A. Proportionally, the torque generated on the lever arm in reference to the lever arm axis of rotation R-R by the force F4 is larger

10 when the lever arm moves in the -A direction than when the lever arm moves in the direction +A. The value of the torque on the lever arm when the arm moves in the direction -A is larger than the value of torque generated by the pair of forces F1. The difference between the two values of torque

15 is defined as the damping torque in the direction -A. The value of the torque on the lever arm when the arm moves in the direction +A is smaller than the value of torque generated by the pair of forces F1. The difference between the two values of torque is defined as the damping torque in

20 the direction +A. The ratio between the value of the damping torque in the direction -A and the value of the damping torque in the direction +A represents the asymmetric damping factor.

The asymmetric damping factor is adjustable depending

25 upon the radial location of point of contact 216 described in Fig. 3 and Fig. 4. The asymmetric damping factor will be increased as the point of contact 216 is placed radially closer to an axis of rotation of the lever arm 1030. In the alternative, the asymmetric damping factor will be decreased

30 as the point of contact 216 is placed radially farther from an axis of rotation of the lever arm 1030. By radially

moving point of contact 216 the asymmetric damping factor can be varied in the range of approximately 1.5 to 5.

Fig. 11 is a cross-sectional view of forces acting on a tensioner at line 11-11 in Fig. 12. Force F7 is a normal reaction force acting on the arm at the damping mechanism contact point. Force F7 has the same magnitude as force F4 acting on the damping mechanism. F6 is a pivot bushing reaction force acting at the interface between bushing 1040 and lever arm 1030. F5 is a hub load caused by a load on a belt B, see Fig. 12.

Fig. 12 is a plan view of forces acting on a tensioner. Depicted in Fig. 12 is a plan view of the forces described in Fig. 11.

Fig. 13 is a diagram of the forces acting on a damping mechanism. The damping mechanism is that depicted in Fig. 1 and Fig. 2. Forces F11 are spring contact reaction forces caused by contact of the end 500 with the spring receiving portion 103. One can see that spring end 500 contacts the spring receiving portion at two points creating a pair of reaction forces F11. F12 is a normal reaction force on the damping surface 109. F13 is a tangent friction force on the damping surface 109. F14 is the reaction force on damping mechanism portion 102 imparted by a contact with a lever arm 2030, see Fig. 17.

The asymmetric damping factor is realized by a difference in frictional force F13 for a movement of the lever arm 2030. More particularly, when lever arm 2030 moves in the +A direction, F13 operates as shown in Fig. 13. As the lever arm moves in the -A direction, F13 operates in the reverse direction. The change in direction in F13 causes a resultant force on damping surface 109 to change. As a result when lever arm 2030 moves in the +A direction, a

force F14 on the damping mechanism is larger than when the lever arm moves in direction -A. Proportionally, the torque generated on the lever arm in reference to the lever arm axis of rotation R-R by the force F14 is larger when the lever arm moves in the +A direction than when the lever arm moves in the direction -A. The value of the torque on the lever arm when the arm moves in the direction +A is larger than the value of torque generated by the pair of spring forces F11. The difference between the two values of torque is defined as the damping torque in the direction +A. The value of the torque on the lever arm when the arm moves in the direction -A is smaller than the value of torque generated by the pair of spring forces F11. The difference between the two values of torque is defined as the damping torque in the direction -A. The ratio between the value of the damping torque in the direction +A and the value of the damping torque in the direction -A represents the asymmetric damping factor.

Fig. 14 is a cross-sectional view of forces acting on a tensioner at line 14-14 in Fig. 15. Force F17 is a normal reaction force acting on the damping mechanism contact point. F16 is a pivot bushing reaction force acting at the interface between bushing 1040 and lever arm 1030. F15 is a hub load caused by a load on a belt B.

Fig. 15 is a plan view of the forces acting on a tensioner. Depicted in Fig. 15 is a plan view of the forces described in Fig. 14.

Fig. 16 is an exploded view of a tensioner having a damping mechanism. Damping mechanism 200 engages lever arm 1030 at tab 1031. Biasing member or spring 1020 has one end connected to base 1010 and the other end connected to damping mechanism spring receiving portion 211 as described

elsewhere in this specification. Lever arm 1030 is pivotably connected to base 1010 through bushing 1040. Dust seal 1050 prevents foreign material from entering the tensioner during operation. Pulley 1060 is journaled to lever arm 1030 through bearing 1070. A belt (not shown) engages pulley surface 1061.

Bearing 1070 is connected by a fastener such as bolt 1080. Damping mechanism surfaces 230, 231 are in sliding engagement with an inner surface 1011 of tensioner base 1010.

Tab 1031 engages damping shoe 212 during operation, thereby causing a movement of base inner surface 1011 across damping mechanism surface 230.

Fig. 17 is an exploded view of a tensioner having a damping mechanism. Damping mechanism 100 is engaged with lever arm 2030 at tab 2031. Biasing member or spring 2020 has one end connected to base 2010 and the other end connected to damping mechanism spring receiving portion 103 as described elsewhere in this specification. Lever arm 2030 is pivotably connected to base 2010 through bushing 2040. Dust seal 2050 prevents foreign material from entering the tensioner during operation. Pulley 2060 is journaled to lever arm 2030 through bearing 2070. A belt (not shown) engages pulley surface 2061.

Bearing 2070 is connected by a fastener such as bolt 2080. Damping mechanism surface 109 is in sliding engagement with an inner surface 2011 of tensioner base 2010.

Tab 2031 engages damping mechanism 100 during operation, thereby causing a movement of base inner surface 2011 across damping mechanism surface 109.

Although a single form of the invention has been described herein, it will be obvious to those skilled in the art that variations may be made in the construction and relation of parts without departing from the spirit and  
·5 scope of the invention described herein.

Claims

We claim:

1. A damping mechanism comprising:
  - a first arcuate member having a frictional surface;
  - 5 a second arcuate member having a frictional surface;
  - the first arcuate member and the second arcuate member engaged with a cooperating arcuate surface; and
  - 10 the first arcuate member and the second arcuate member having a pivotal engagement whereby a force exerted on the cooperating arcuate surface in a first movement direction is not equal to a force exerted on the cooperating arcuate surface in a second movement direction.
- 15 2. A tensioner comprising:
  - a base;
  - a lever arm pivotally engaged to the base;
  - 20 a pulley journaled to the lever arm;
  - a damping mechanism engaged with the lever arm and engaged with the base;
  - 25 a biasing member engaged with the damping mechanism and the base; and
  - the damping mechanism having an asymmetric damping factor.
3. The tensioner as in claim 2, wherein the damping mechanism further comprises a damping surface frictionally engaged with the base to damp a movement of the lever arm.
- 30 4. The tensioner as in claim 3, wherein the damping mechanism further comprises:
  - a first arcuate member having a first damping surface;

a second arcuate member having a second damping surface;

5 the first arcuate member and the second arcuate member slidingly engaged with a cooperating surface on the base; and

10 the first arcuate member and the second arcuate member having a pivotal engagement whereby the first arcuate member and the second arcuate member exert a force to resist a movement of the lever arm in a first movement direction that is not equal to a force exerted to resist a movement of the lever arm in a second movement direction.

5. The tensioner as in claim 4, wherein the pivotal engagement is radially disposed from a lever arm axis of rotation.

6. The tensioner as in claim 2 wherein the asymmetric damping factor is in the range of approximately 1.5 to 5.

20

7. The tensioner as in claim 4, wherein:

the first arcuate member comprises a first damping shoe; and the second arcuate member comprises a second damping shoe.

25 8. The tensioner in claim 7, wherein:

the first damping surface is engaged with the first damping shoe by a plurality of vertical cooperating members on an engagement surface.

30 9. The tensioner as in claim 8 further comprising:

the second damping surface is engaged with the second damping shoe by a plurality of vertical cooperating members on an engagement surface.

5 10. A tensioner comprising;  
a base;  
a lever arm pivotally engaged to the base;  
a pulley journaled to the lever arm;  
means for damping a lever arm movement engaged with the  
10 lever arm and engaged with the base;  
means for biasing engaged with the means for damping a  
lever arm movement and the base; and  
said means for damping a lever arm movement having an  
asymmetric damping factor.

15  
11. The tensioner as in claim 10, wherein;  
the means for damping comprises a damping surface  
frictionally engaged with the base to resist a movement of  
the lever arm.

20  
12. The tensioner as in claim 11, wherein the means for  
damping further comprises:  
a first arcuate member having a first damping surface;  
a second arcuate member having a second damping  
25 surface;  
the first arcuate member and the second arcuate member  
engaged with a cooperating surface on the base; and  
the first arcuate member and the second arcuate member  
having a pivotal engagement point whereby the first  
30 arcuate member and the second arcuate member exert a  
damping force in a first movement direction that is not

equal to a damping force exerted in a second movement direction.

13. The tensioner as in claim 12, wherein the pivotal engagement point is radially disposed from a lever arm axis of rotation.

14. The tensioner as in claim 10 wherein the asymmetric damping factor is in the range of approximately 1.5 to 5.

10

15. The tensioner as in claim 12, wherein:  
the first arcuate member comprises a first damping shoe; and  
the second arcuate member comprises a second damping shoe.

15 16. The tensioner in claim 15, wherein:  
the first damping surface is engaged with the first damping shoe by a plurality of vertical cooperating members on an engagement surface.

20 17. The tensioner as in claim 16 further comprising:  
the second damping surface is engaged with the second damping shoe by a plurality of vertical cooperating members on an engagement surface.

25 18. The tensioner as in claim 17 wherein the means for biasing comprises a spring.

19. A tensioner comprising;  
a base;  
30 a lever arm pivotally engaged to the base;  
a pulley journaled to the lever arm;

a damping mechanism engaged with the lever arm and engaged with the base;

a biasing member engaged with the damping mechanism and the base; and

5 the damping mechanism having an asymmetric damping factor.

20. The tensioner as in claim 19, wherein the damping mechanism further comprises:

10 a damping surface frictionally engaged with the base to damp a movement of the lever arm;

15 a biasing member receiving portion engaging a damping mechanism end at two points such that a pair of reaction forces is imparted to the damping mechanism; and

a surface for supporting a biasing member.

21. The tensioner as in claim 20, wherein the damping mechanism further comprises:

20 an arcuate member having a substantially circular form and having a damping surface; and  
the arcuate member engaged with a tab on the lever arm.

22. The tensioner as in claim 19 wherein the asymmetric damping factor is in the range of approximately 1.5 to 5.

23. The tensioner as in claim 21, wherein:

the arcuate member comprises a damping shoe.

30 24. The tensioner in claim 23, wherein:

the damping surface is engaged with the damping shoe by a plurality of vertical cooperating members on an engagement surface.

**AMENDED CLAIMS**

[received by the International Bureau on 09 September 2003 (09.09.03)  
original claims 1 – 24 replaced by new claims 1 - 45]

Claims

We claim:

1. A damping mechanism comprising:

a first arcuate member having a frictional surface, the frictional surface connected to a damping shoe by a plurality of grooves;

a second arcuate member having a frictional surface, the frictional surface connected to a damping shoe by a plurality of grooves;

the first arcuate member and the second arcuate member engaged with a cooperating arcuate surface; and

the first arcuate member and the second arcuate member having a pivotal engagement whereby a force exerted on the cooperating arcuate surface in a first movement direction is not equal to a force exerted on the cooperating arcuate surface in a second movement direction.

2. A tensioner comprising;

a base;

a lever arm pivotally engaged to the base;

a pulley journaled to the lever arm;

a damping mechanism engaged with the lever arm and engaged with the base;

the damping mechanism comprises a first arcuate member having a first damping surface;

a second arcuate member having a second damping surface;

the first arcuate member and the second arcuate member slidingly engaged with a cooperating surface on the base;

the first arcuate member and the second arcuate member having a pivotal engagement whereby the first arcuate member and the second arcuate member exert a force to resist a movement of the lever arm in a first movement direction that is not equal to a force exerted to resist a movement of the lever arm in a second movement direction;

the first arcuate member comprises a first damping shoe;

the second arcuate member comprises a second damping shoe;

the first damping surface is engaged with the first damping shoe by a plurality of vertical cooperating members on an engagement surface;

a biasing member engaged with the damping mechanism and the base; and

the damping mechanism having an asymmetric damping factor.

3. (Cancelled).

4. (Cancelled).

5. The tensioner as in claim 2, wherein the pivotal engagement is radially disposed from a lever arm axis of rotation.

6. The tensioner as in claim 2 wherein the asymmetric damping factor is in the range of approximately 1.5 to 5.

7. (Cancelled).

8. (Cancelled).

9. The tensioner as in claim 2 further comprising:  
the second damping surface is engaged with the second damping shoe by a plurality of vertical cooperating members on an engagement surface.

10. A tensioner comprising:  
a base;  
a lever arm pivotally engaged to the base;  
a pulley journaled to the lever arm;  
means for damping a lever arm movement engaged with the lever arm and engaged with the base;  
a first arcuate member having a first damping surface;  
a second arcuate member having a second damping surface;  
the first arcuate member and the second arcuate member engaged with a cooperating surface on the base;  
the first arcuate member and the second arcuate member having a pivotal engagement point whereby the first arcuate member and the second arcuate member exert a damping force in a first movement direction that is not equal to a damping force exerted in a second movement direction;  
the first arcuate member comprises a first damping shoe;  
the second arcuate member comprises a second damping shoe;  
the first damping surface is engaged with the first damping shoe by a plurality of cooperating members on an engagement surface;  
means for biasing engaged with the means for damping a lever arm movement and the base; and  
said means for damping a lever arm movement having an asymmetric damping factor.

11. (Cancelled).

12. (Cancelled).

13. The tensioner as in claim 10, wherein the pivotal engagement point is radially disposed from a lever arm axis of rotation.

14. The tensioner as in claim 10 wherein the asymmetric damping factor is in the range of approximately 1.5 to 5.

15. (Cancelled).

16. (Cancelled).

17. The tensioner as in claim 10 further comprising: the second damping surface is engaged with the second damping shoe by a plurality of cooperating members on an engagement surface.

18. The tensioner as in claim 17 wherein the means for biasing comprises a spring.

19. (Cancelled).

20. (Cancelled).

21. (Cancelled).

22. (Cancelled).

23. (Cancelled).

24. (cancelled).

25. A tensioner comprising;

a base;

a lever arm pivotally engaged to the base;

a pulley journaled to the lever arm;

a damping mechanism engaged with the lever arm and engaged with the base;

the damping mechanism comprising a damping surface and a damping shoe engaged by cooperating members on an engagement surface;

a biasing member engaged with the damping mechanism and the base; and

the damping mechanism having an asymmetric damping factor.

26. The tensioner as in claim 25 the damping mechanism further comprising:

a biasing member receiving portion whereby the biasing member engages the damping mechanism at two points such that a pair of reaction forces is imparted to the damping mechanism.

27. The tensioner as in claim 25 wherein the asymmetric damping factor is in the range of approximately 1.5 to 5.

28. The tensioner as in claim 25 further comprising:

a surface on the damping mechanism for supporting a portion of the biasing member.

29. A damping mechanism comprising:
  - a damping shoe having an arcuate form; and
  - a damping band engaged with the damping shoe by a locking mechanism, the locking mechanism opposing a frictional force imparted to the damping band during operation.
30. The damping mechanism as in claim 29 further comprising:
  - a protrusion extending from the damping band for engaging a cooperating recess in the damping shoe.
31. The damping mechanism as in claim 29 further comprising:
  - a lip in the damping band for engaging the damping shoe.
32. The damping mechanism as in claim 30, wherein the damping shoe further comprises:
  - a surface for supporting a spring coil.
33. The damping mechanism as in claim 30, wherein the damping shoe further comprises a spring receiving portion having two spring contact points for contacting a spring.
34. The damping mechanism as in claim 30, wherein the locking mechanism comprises a groove and cooperating rib.
35. The damping mechanism as in claim 29 further comprising:
  - a second damping shoe having an arcuate form;
  - a second damping band engaged with the second damping shoe by a second locking mechanism, the second locking mechanism disposed to oppose a frictional force imparted to the second damping band during operation.

36. The damping mechanism as in claim 35 further comprising:  
a protrusion extending from the second damping band for engaging a cooperating recess in the second damping shoe.
37. The damping mechanism as in claim 35 further comprising:  
a lip in the second damping band for engaging the second damping shoe.
38. The damping mechanism as in claim 35 further comprising:  
the damping shoe engaged with the second damping shoe at a point of contact;  
the point of contact disposed a radial distance from a lever arm axis of rotation whereby an asymmetric damping factor is achieved.
39. The damping mechanism as in claim 38, wherein the asymmetric damping factor is in the range of approximately 1.5 to 5.
40. The damping mechanism as in claim 35, wherein the locking mechanism comprises a groove and cooperating rib.
41. A tensioner comprising;  
a base;  
a lever arm pivotally engaged to the base;  
a pulley journaled to the lever arm;  
a damping mechanism engaged with the lever arm and frictionally engaged with the base;

the damping mechanism comprises a damping shoe engaged with damping band by a groove on an engagement surface, the groove oriented to oppose a frictional force imparted to the damping band during operation;

a spring engaged with the damping shoe and the base; and

the damping mechanism having an asymmetric damping factor.

42. The tensioner as in claim 41, wherein the damping shoe further comprises:

a spring receiving portion having two spring contact points for contacting a spring end whereby a pair of reaction forces are created.

43. The tensioner as in claim 41, wherein the damping mechanism further comprises:

a protrusion extending from the damping band for engaging a cooperating recess in the damping shoe.

44. The tensioner as in claim 41, wherein the damping mechanism further comprises:

a lip in the damping band for engaging the damping shoe.

45. The tensioner as in claim 41, wherein the asymmetric damping factor is in the range of approximately 1.5 to 5.

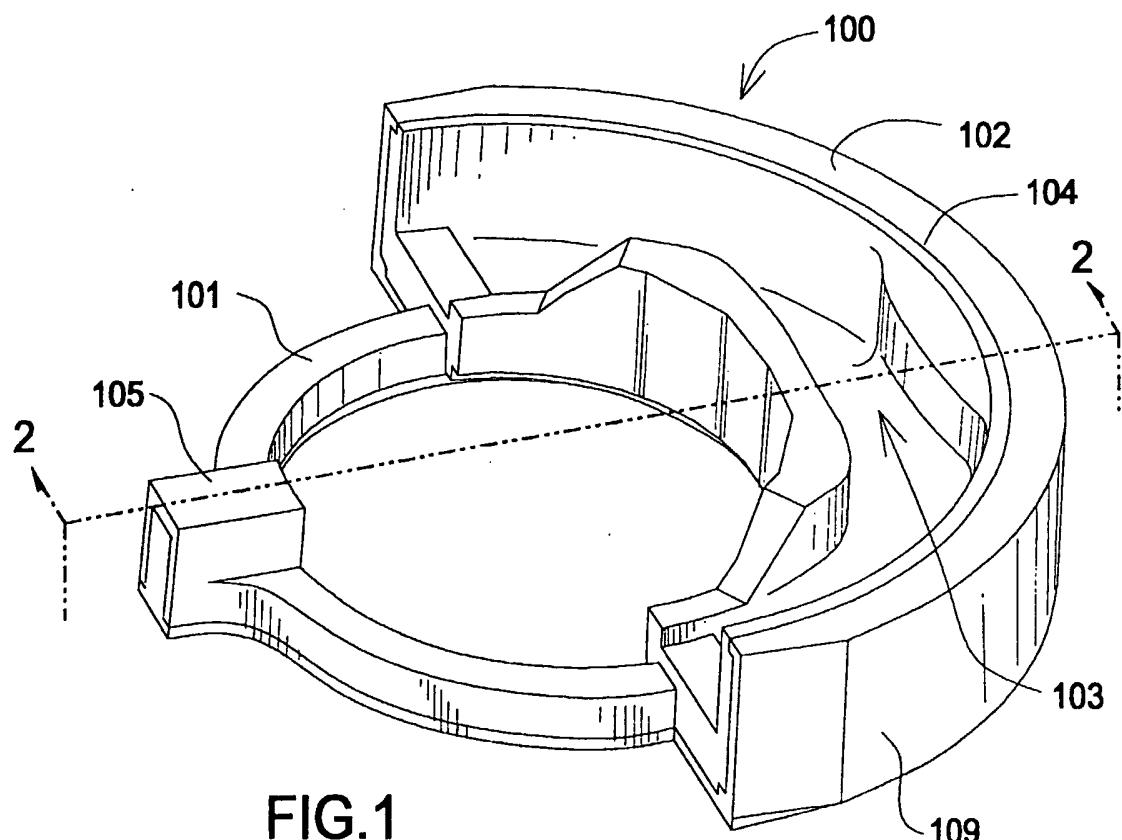


FIG.1

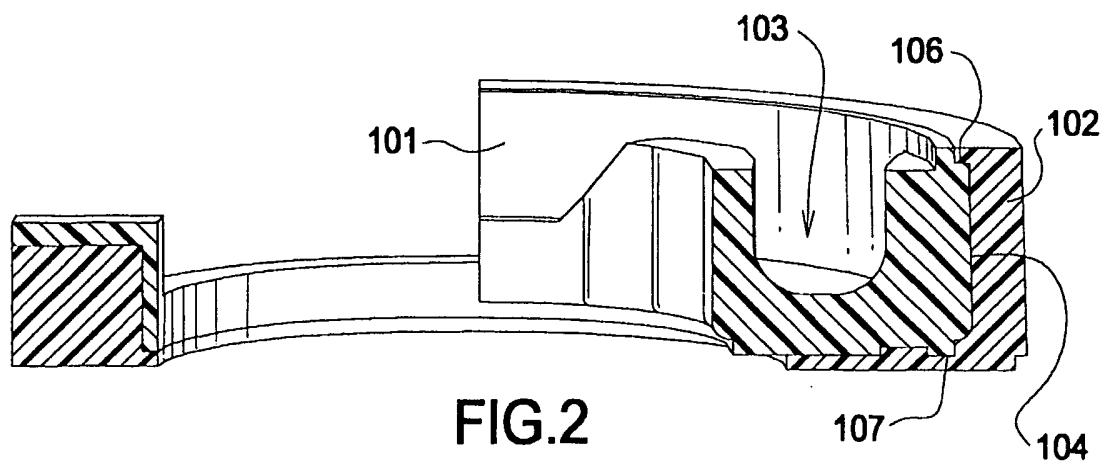


FIG.2

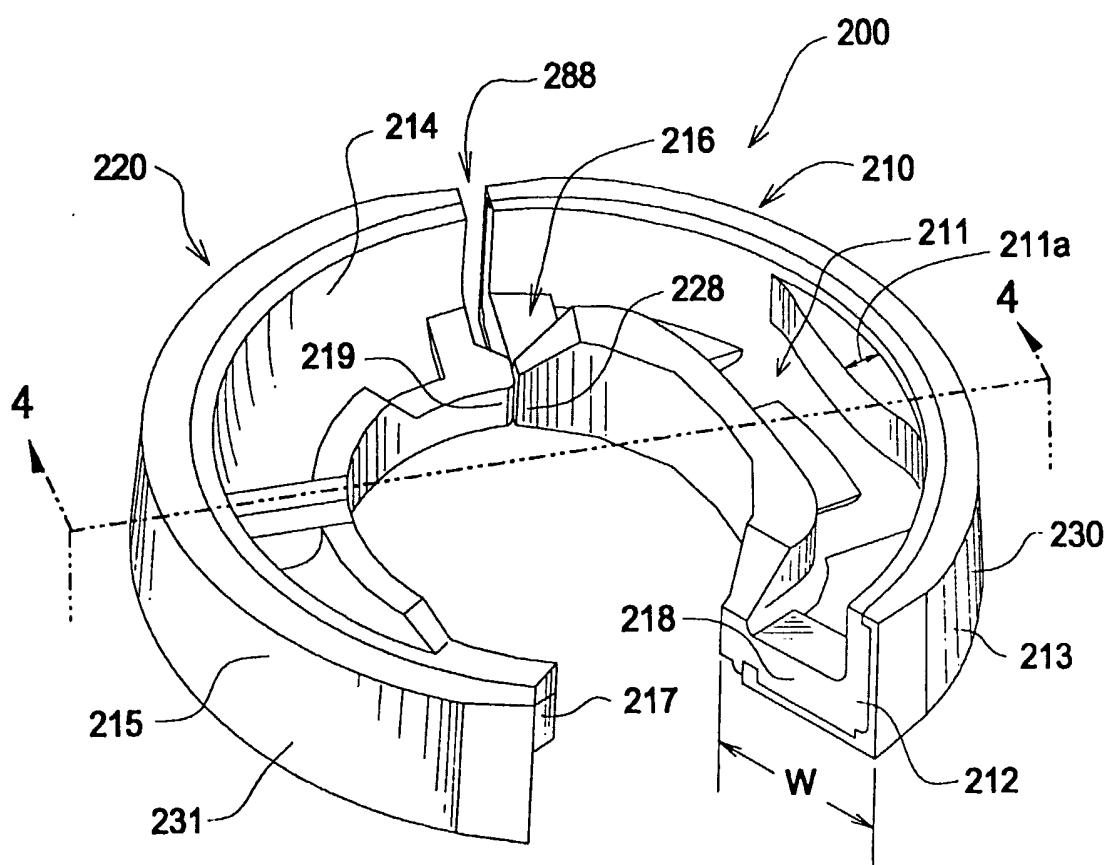


FIG.3

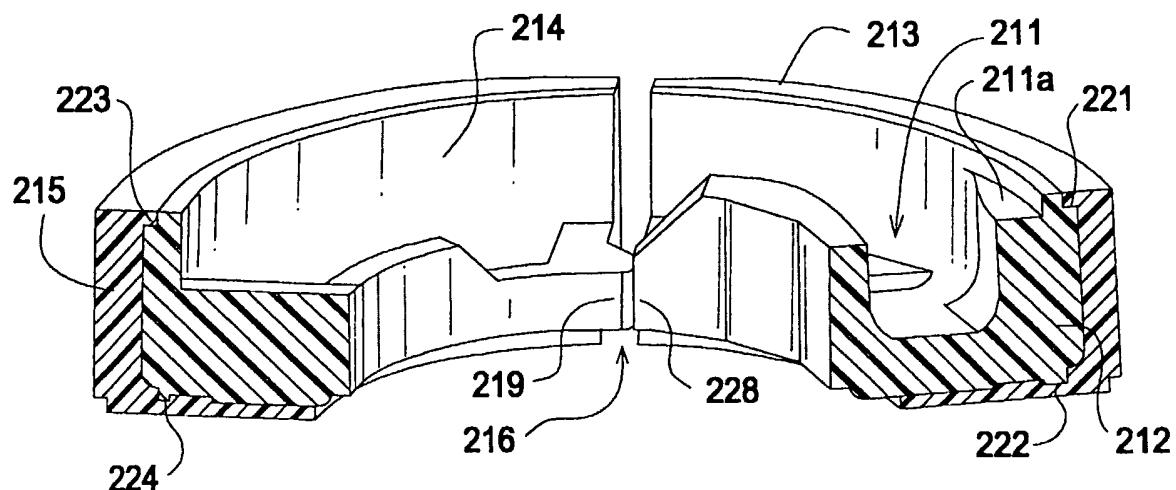


FIG.4

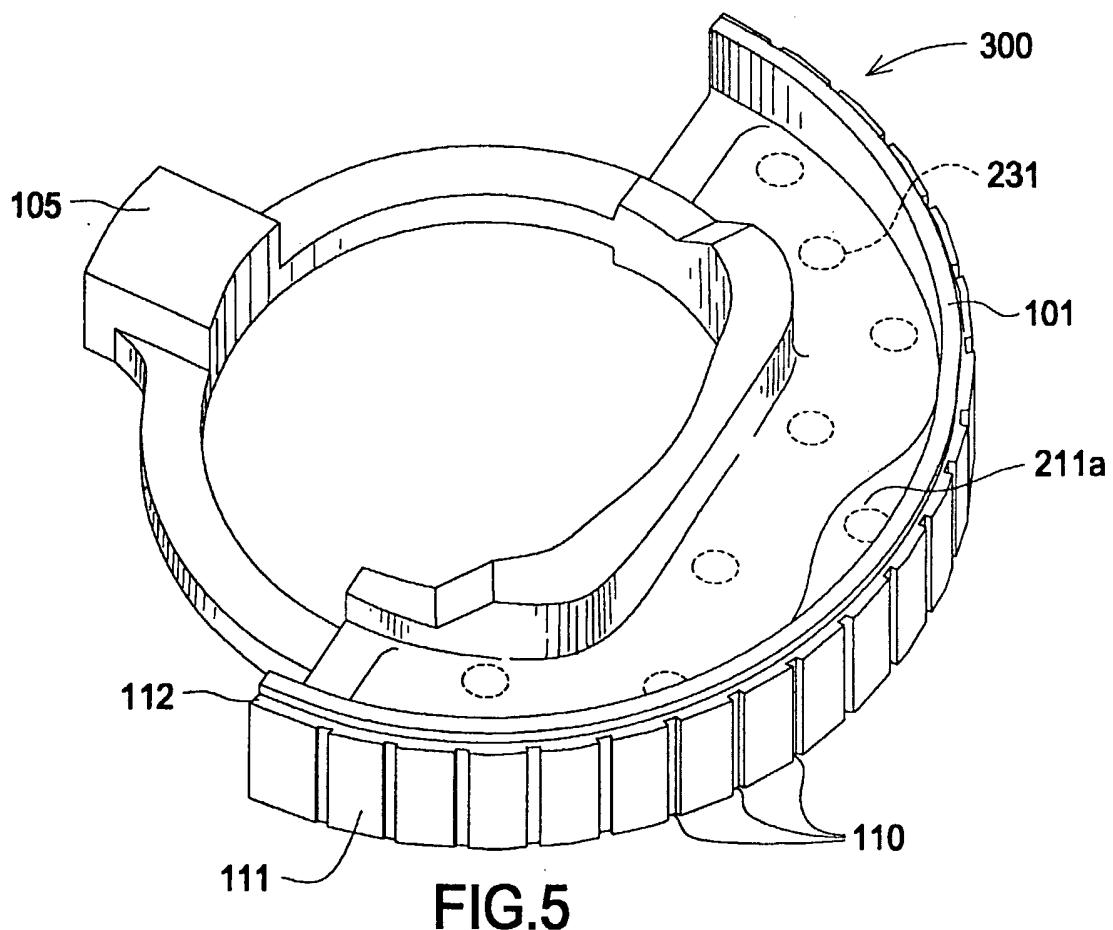


FIG. 5



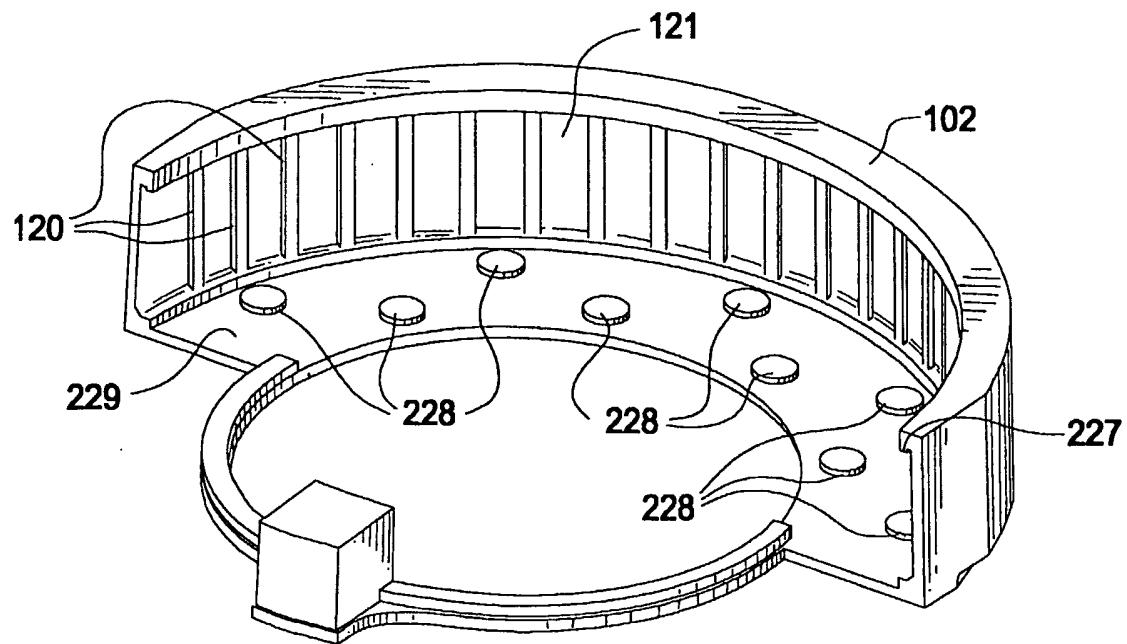


FIG. 6

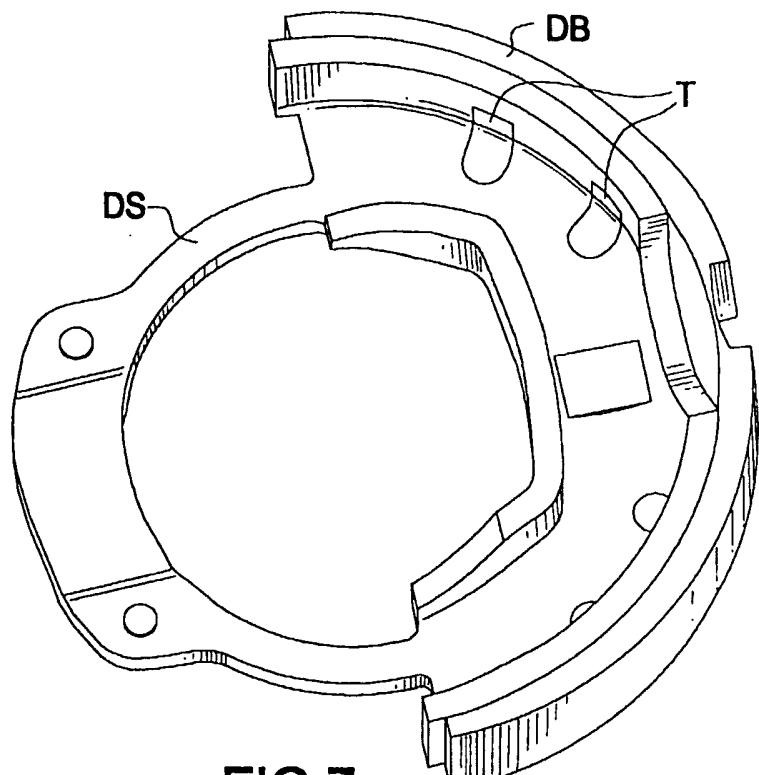

**FIG.7**  
PRIOR ART

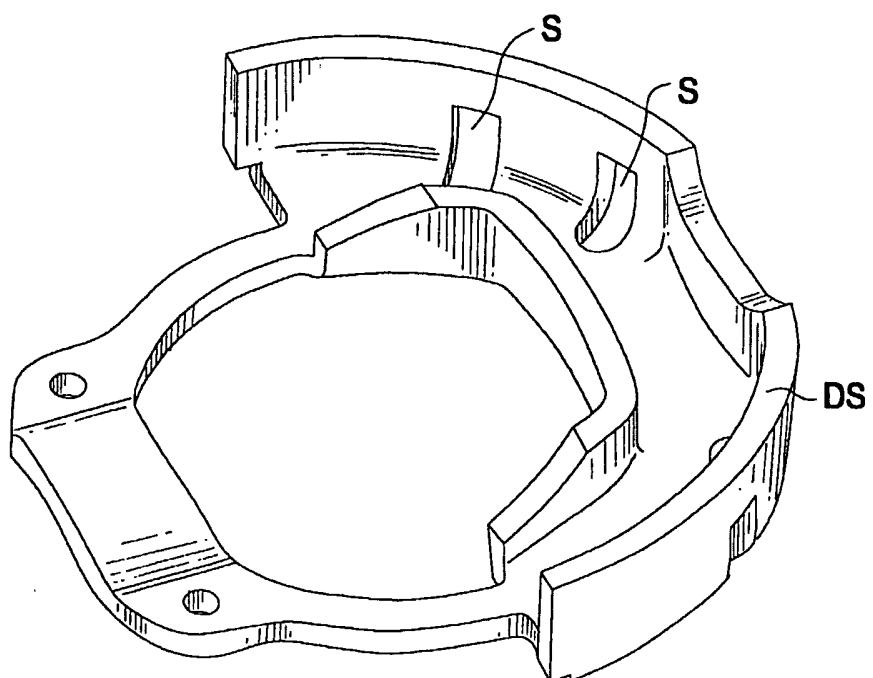

**FIG.8**  
PRIOR ART








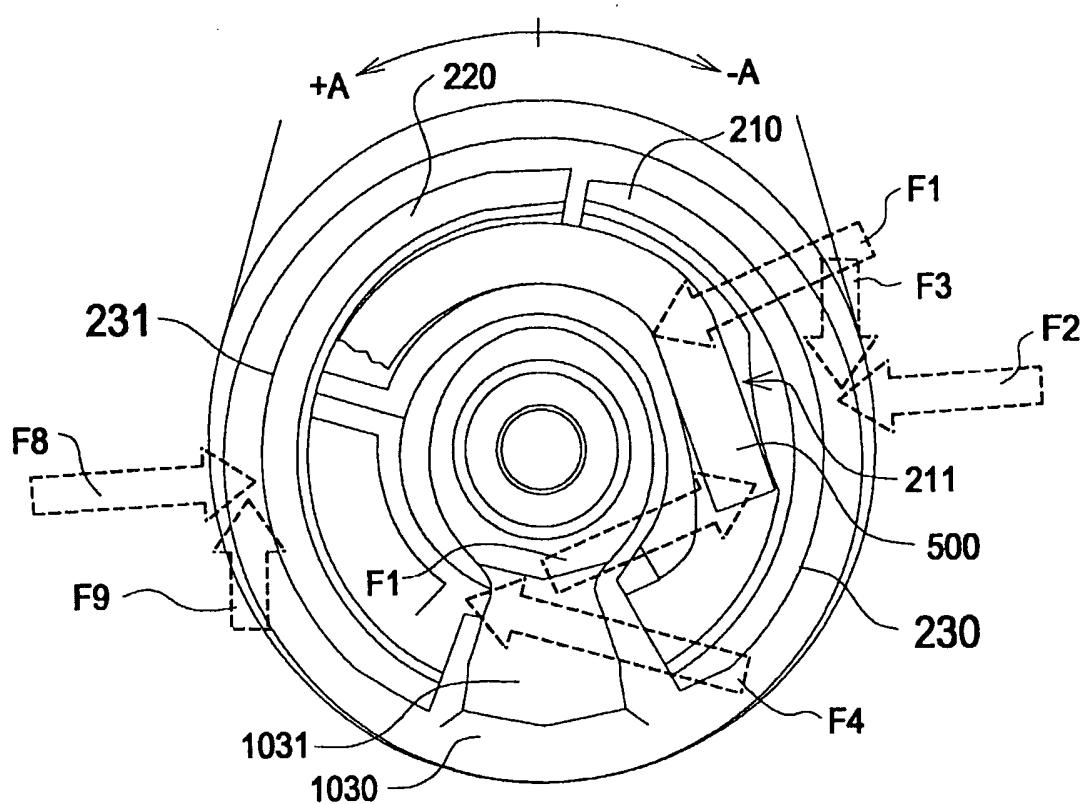



FIG.10

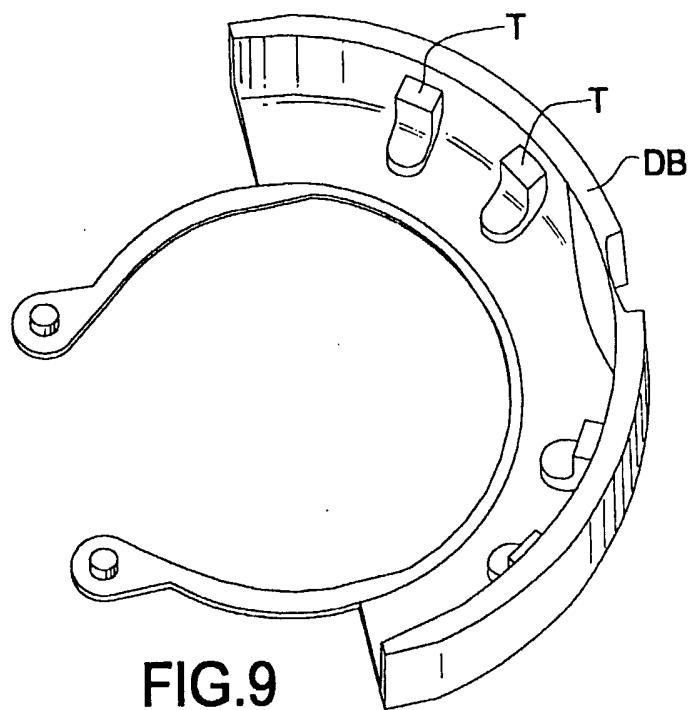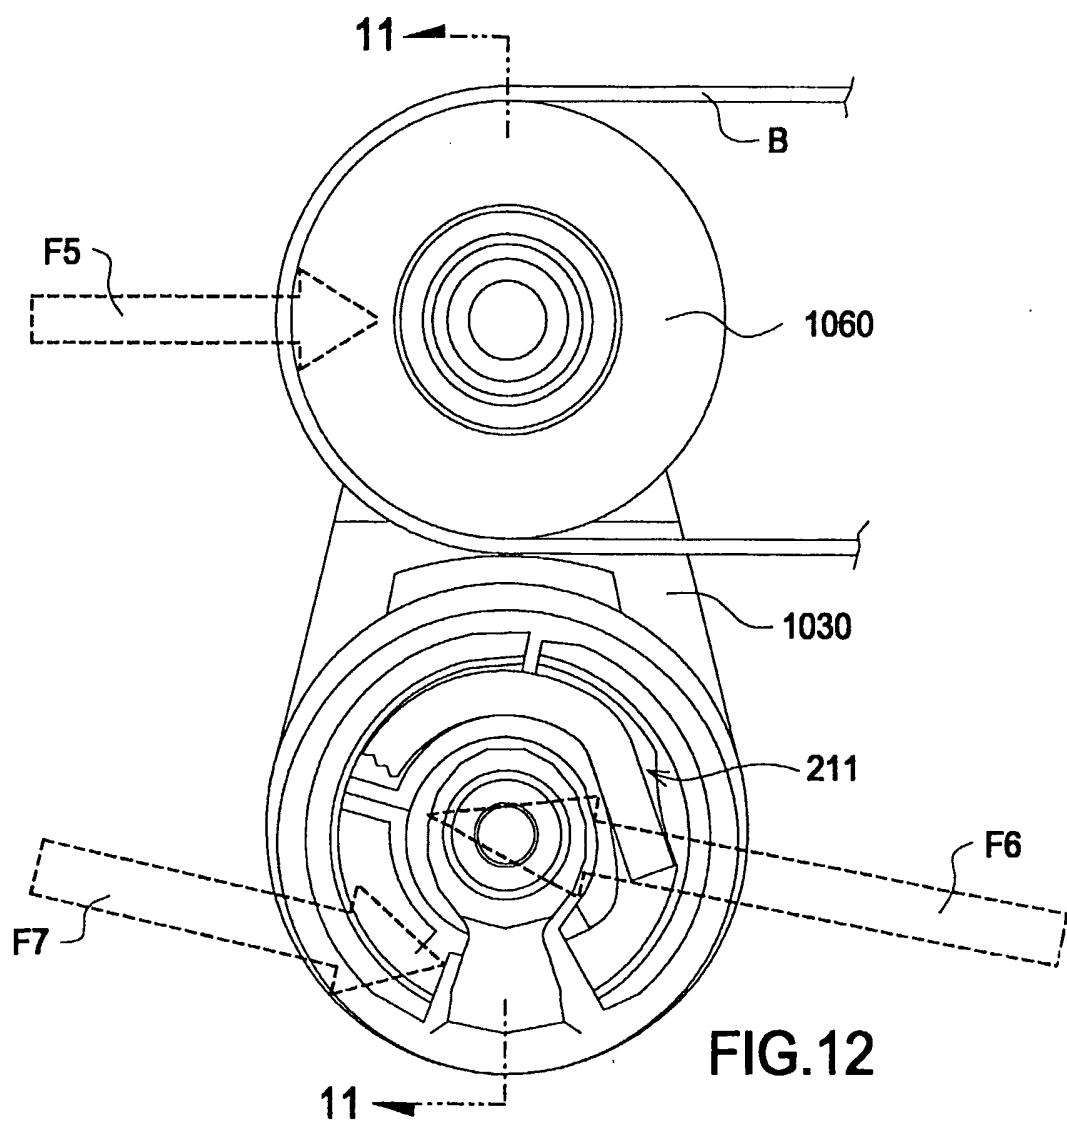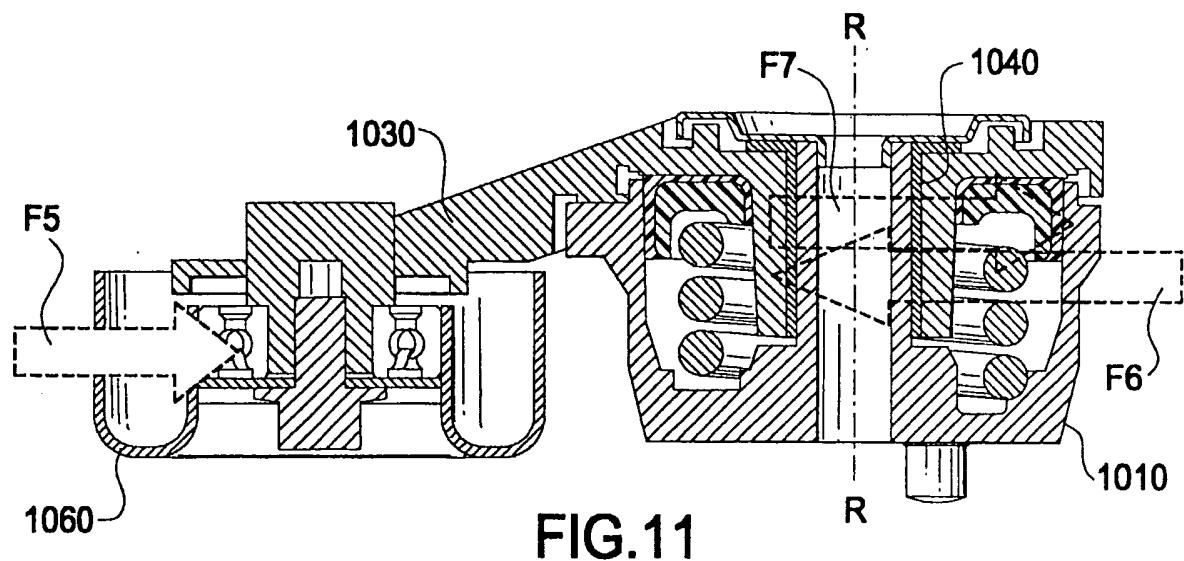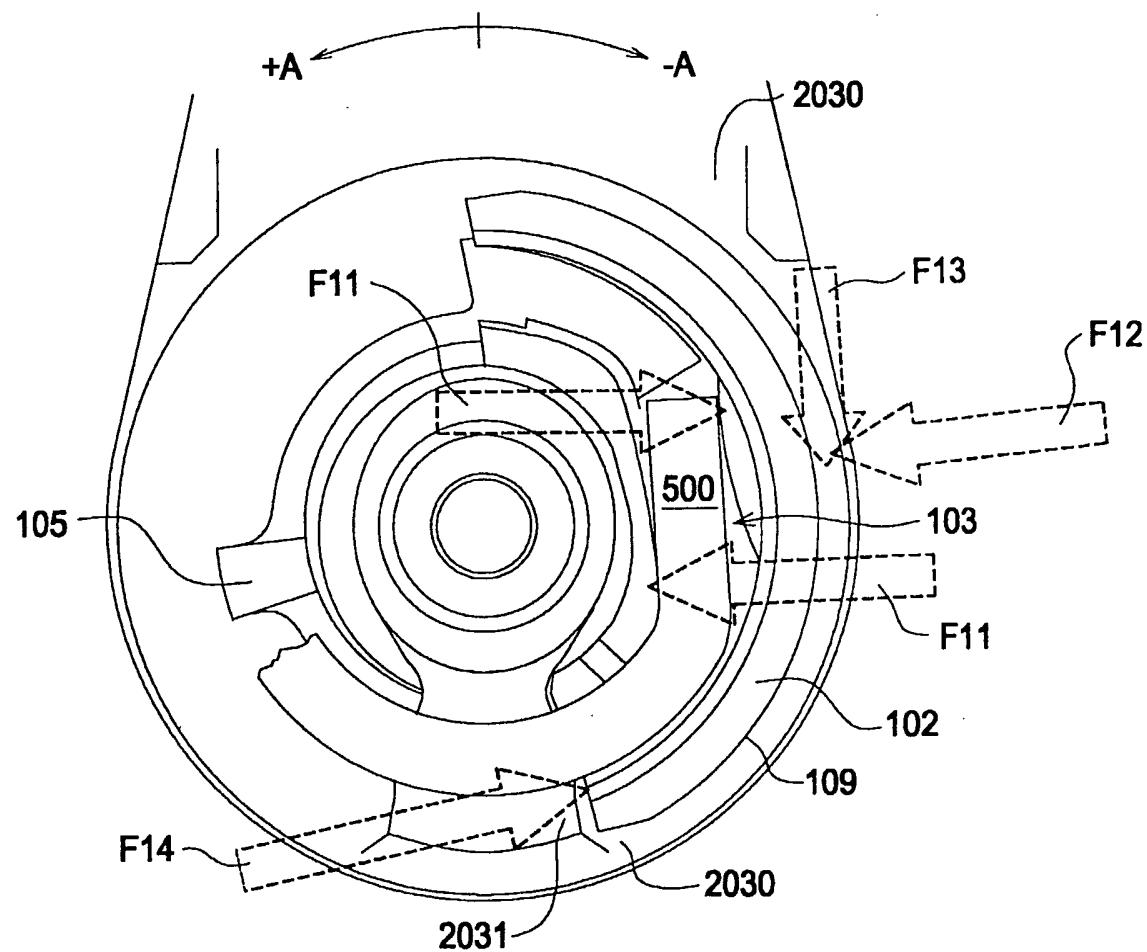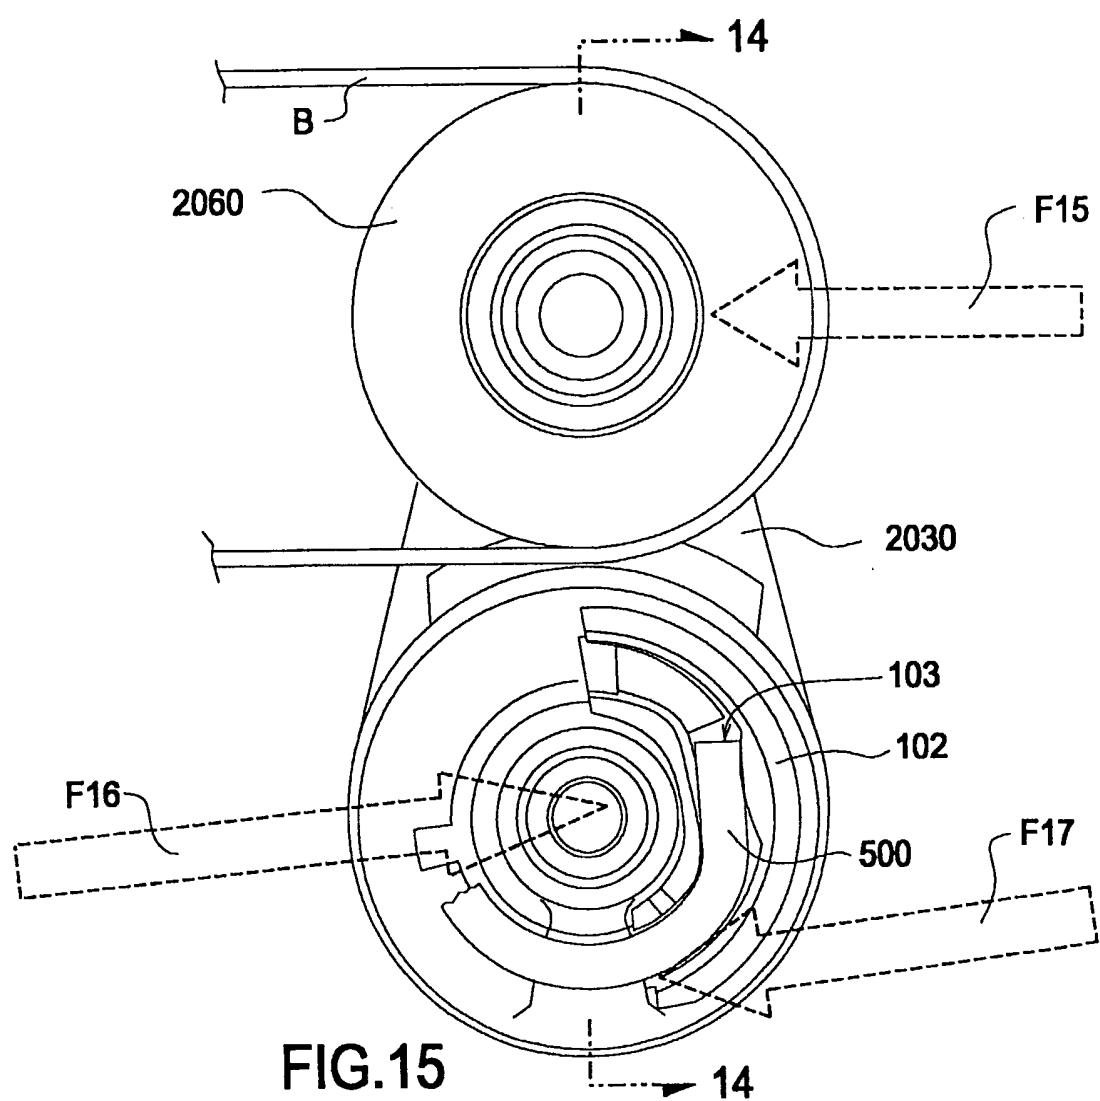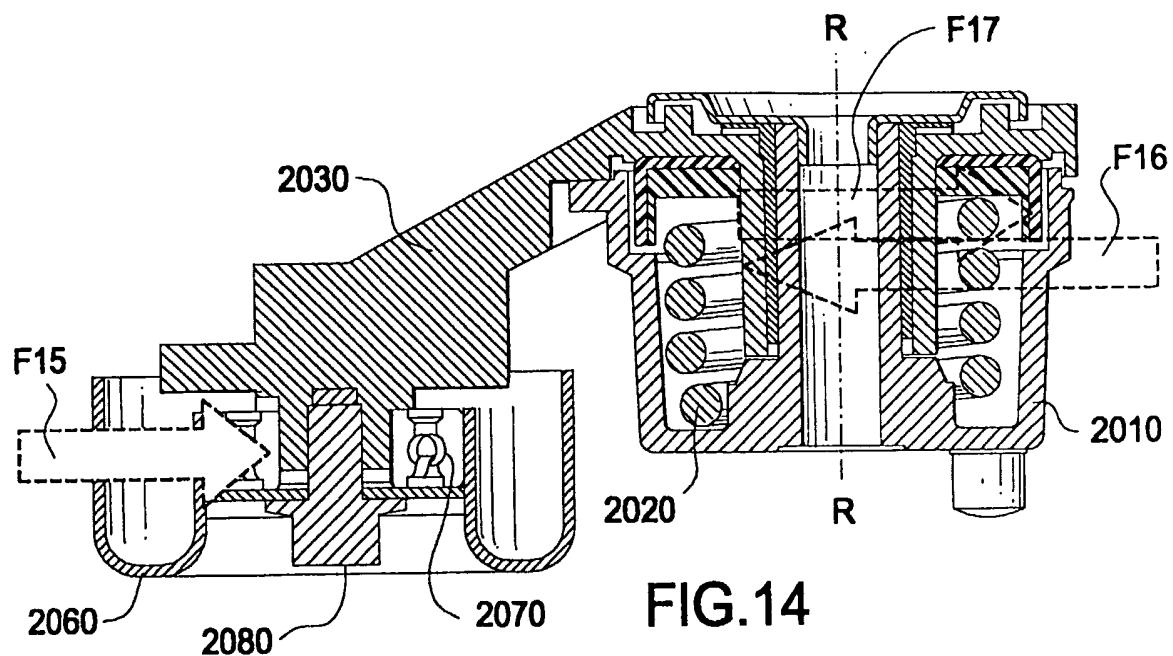

**FIG.13**

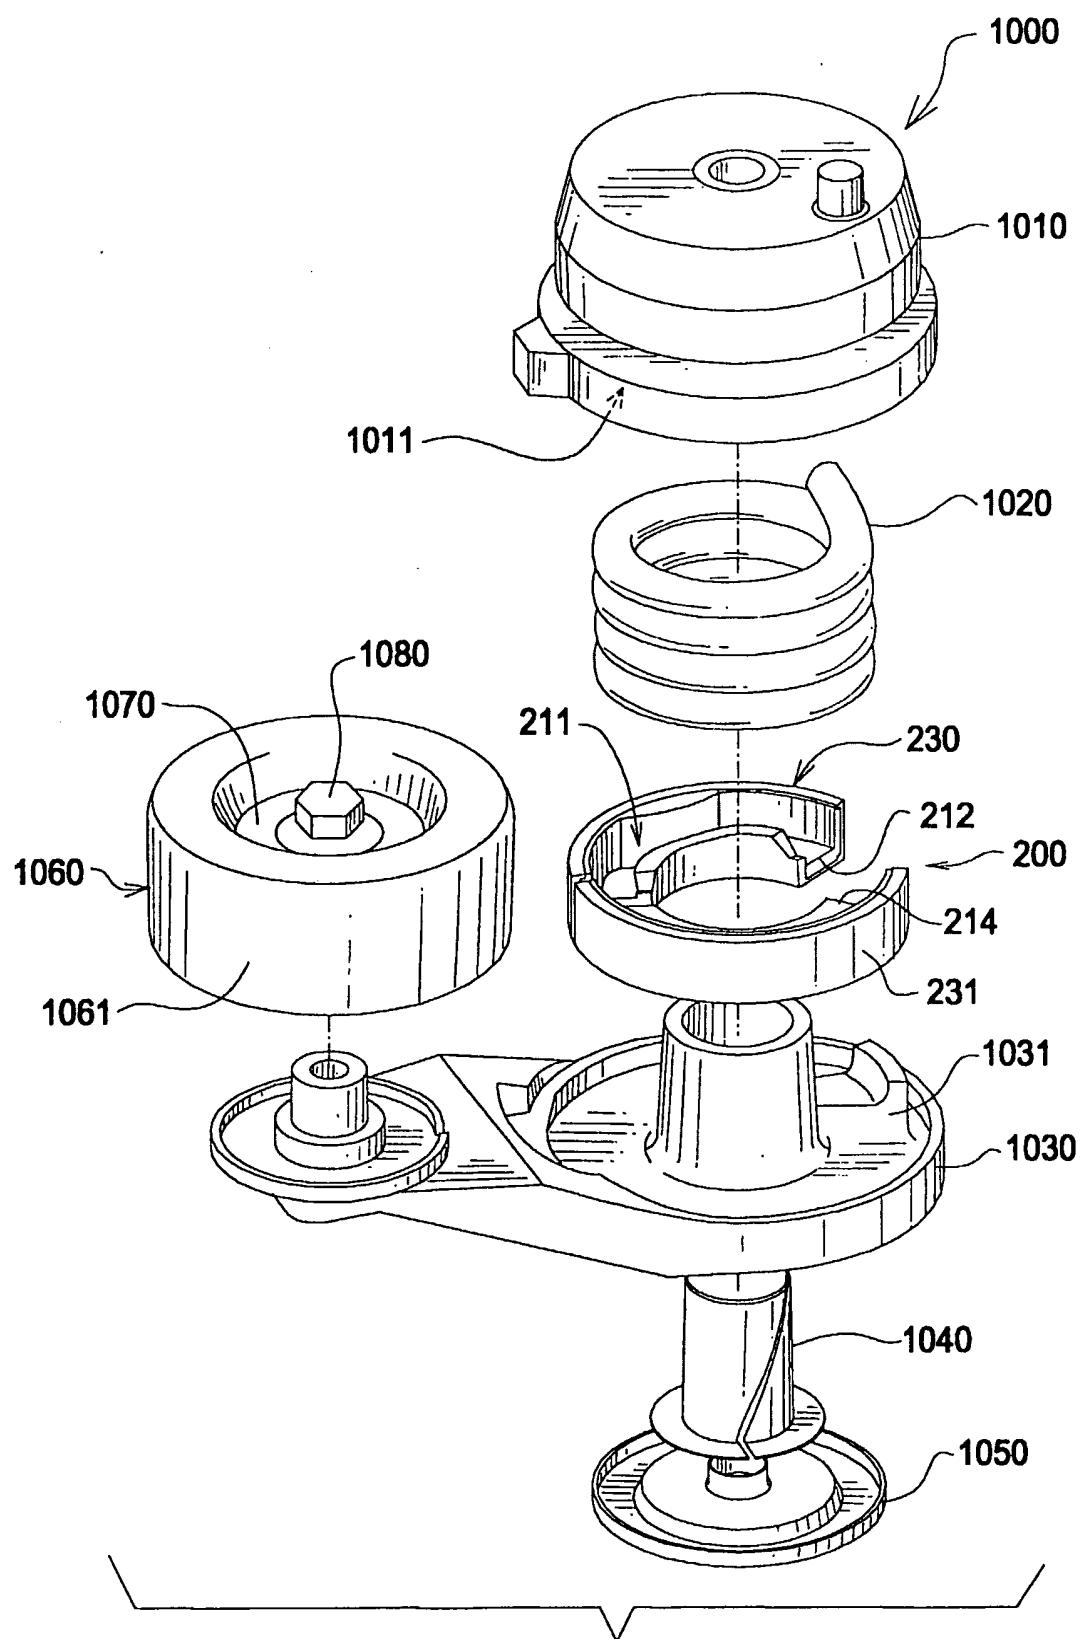

**FIG. 16**

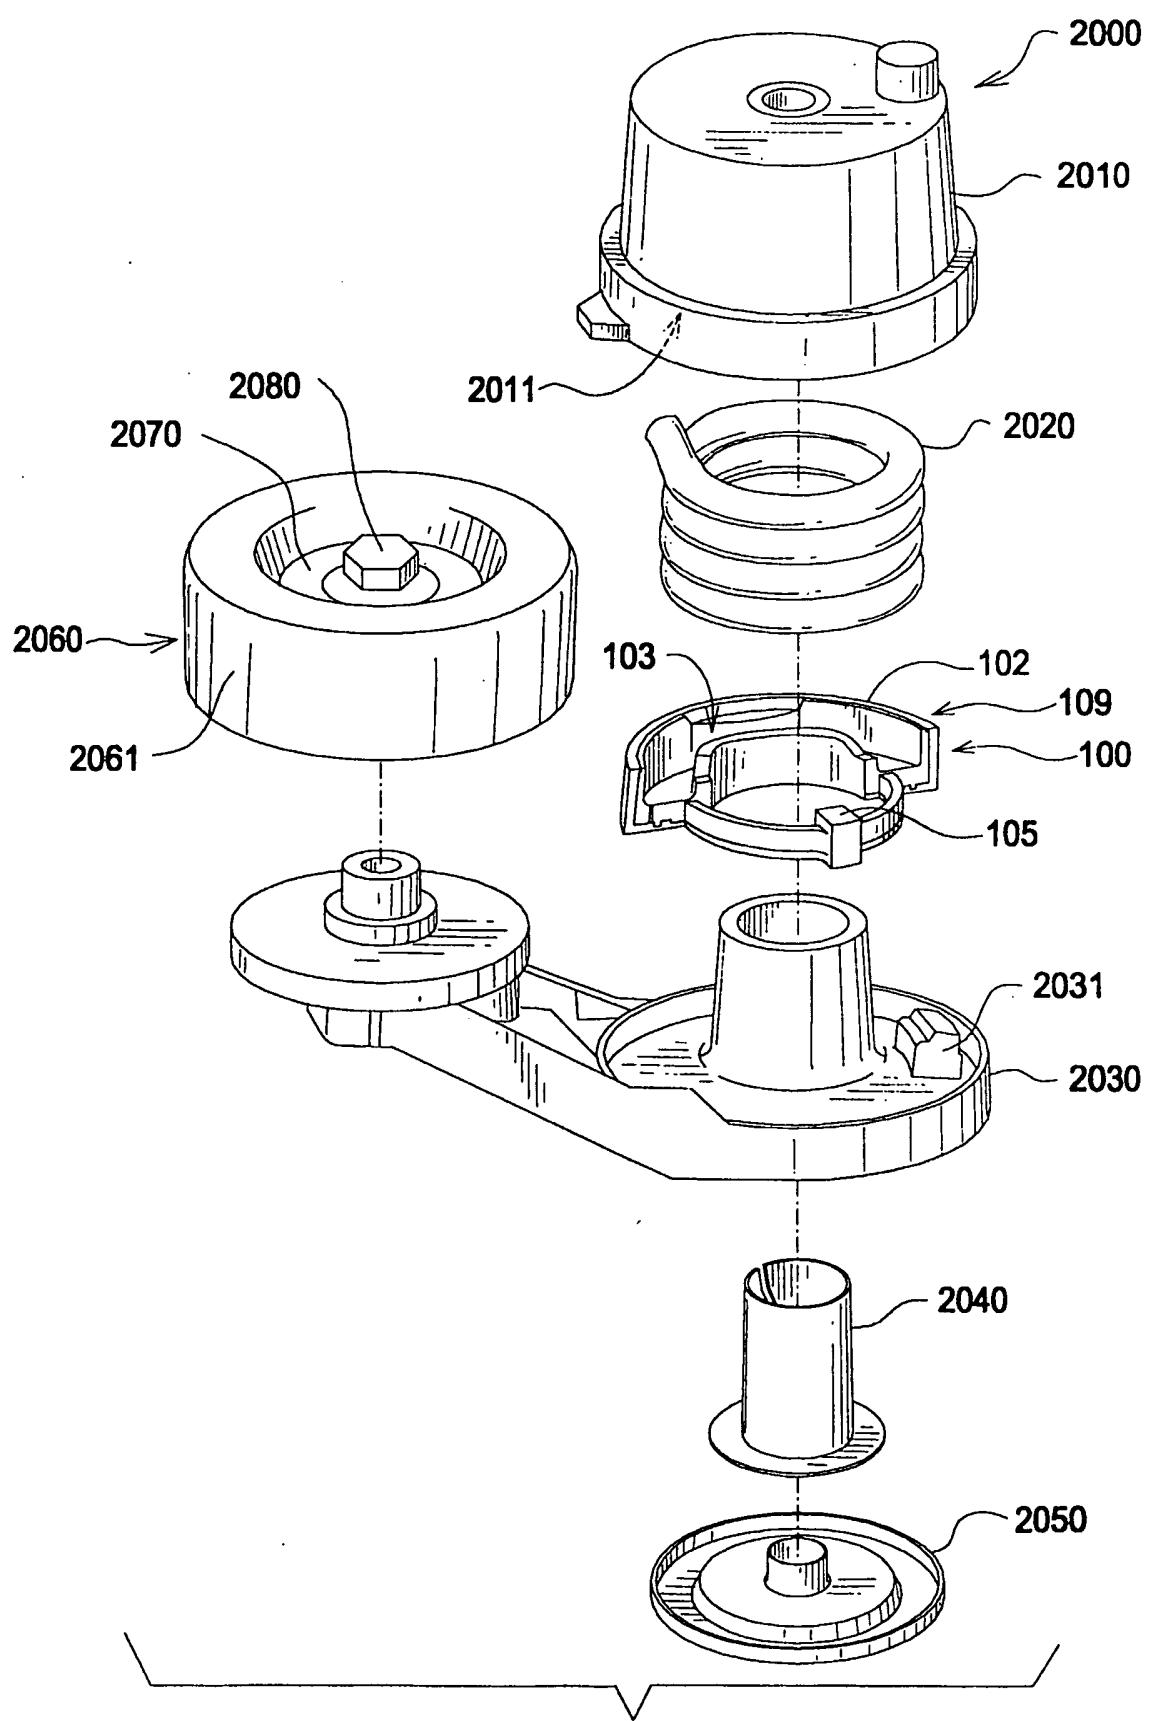**FIG.17**

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 03/12374

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F16H7/12

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/010045 A1 (SERKH ALEXANDER) 24 January 2002 (2002-01-24) cited in the application claim 19; figures 15-25 ---	1-7, 10-15, 19-23
Y	EP 0 636 815 A (CONTINENTAL AG) 1 February 1995 (1995-02-01) figure 2 ---	8,9, 16-18,24
X	DE 40 29 940 A (KUGELFISCHER G SCHAEFER & CO) 26 March 1992 (1992-03-26) figures ---	1-5,7, 10-15, 19-21,23 -/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

**Special categories of cited documents:**

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 July 2003

Date of mailing of the international search report

06/08/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Goeman, F

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 03/12374

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 196 47 224 A (VOLKSWAGENWERK AG) 28 May 1997 (1997-05-28) cited in the application figures ---	1-5, 7, 10-15, 19-21, 23
A	US 1 645 576 A (MARCELLIN BECONNIER PAUL) 18 October 1927 (1927-10-18) figures ---	
A	US 5 632 697 A (SERKH ALEXANDER) 27 May 1997 (1997-05-27) cited in the application figures -----	

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

 International Application No  
 PCT/US 03/12374

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2002010045	A1 24-01-2002	WO	02095263 A1	28-11-2002
		AU	2626301 A	24-07-2001
		CA	2396061 A1	19-07-2001
		CN	1404559 T	19-03-2003
		EP	1250542 A1	23-10-2002
		WO	0151828 A1	19-07-2001
EP 0636815	A 01-02-1995	DE	4325424 C1	02-02-1995
		AT	150853 T	15-04-1997
		DE	59402208 D1	30-04-1997
		EP	0636815 A1	01-02-1995
DE 4029940	A 26-03-1992	DE	4029940 A1	26-03-1992
DE 19647224	A 28-05-1997	DE	19647224 A1	28-05-1997
US 1645576	A 18-10-1927	DE	452947 C	23-11-1927
		FR	591875 A	20-07-1925
		GB	231204 A	17-09-1925
		GB	244403 A	
US 5632697	A 27-05-1997	AT	197341 T	15-11-2000
		BR	9606062 A	14-05-2002
		CA	2192422 A1	19-06-1997
		DE	69610811 D1	07-12-2000
		DE	69610811 T2	07-06-2001
		EP	0780598 A1	25-06-1997
		ES	2152497 T3	01-02-2001
		JP	2854292 B2	03-02-1999
		JP	9189348 A	22-07-1997
		KR	208042 B1	15-07-1999